Guía para desarrolladores de la versión 2.x

AWS SDK for Java 2.x



Copyright © 2026 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

AWS SDK for Java 2.x: Guía para desarrolladores de la versión 2.x

Copyright © 2026 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

Las marcas comerciales y la imagen comercial de Amazon no se pueden utilizar en relación con ningún producto o servicio que no sea de Amazon, de ninguna manera que pueda causar confusión entre los clientes y que menosprecie o desacredite a Amazon. Todas las demás marcas registradas que no son propiedad de Amazon son propiedad de sus respectivos propietarios, que pueden o no estar afiliados, conectados o patrocinados por Amazon.

Table of Contents

Qué es el AWS SDK for Java 2.x 1
Introducción al SDK 1
Desarrollar aplicaciones móviles 1
Mantenimiento y compatibilidad de las versiones principales del SDK 1
Recursos adicionales 2
Contribución al SDK 2
Introducción 3
Configuración 4
Descripción general de la configuración 4
Instalación de requisitos previos de desarrollo de Java 5
Configurar un proyecto Apache Maven 6
Configurar un proyecto Gradle 12
Configurar un proyecto de imagen nativa de GraalVM 19
Autenticarse con AWS 20
Configuración de la autenticación 20
Opciones de autenticación adicionales 23
Creación de una aplicación simple 23
Paso 1: Configuración para este tutorial 23
Paso 2: Crear el proyecto 23
Paso 3: Escribir el código 28
Paso 4: Compilar y ejecutar la aplicación 32
Siguientes pasos 33
Configuración de clientes de servicio 35
Configuración externa de clientes 36
Cadena de proveedores de configuración para la configuración del cliente 36
Creación de un cliente de servicio configurado mediante opciones externas 37
Variables de entorno del SDK para Java 2.x y propiedades del sistema JVM 38
Configuración de clientes en código 39
Configuración básica en código 39
Configuración avanzada en código 40
Opciones de configuración no disponibles en código 41
Clientes de servicio singleton 43
Ventajas de los clientes de servicio singleton 43
Creación y uso de clientes de servicio singleton 44

Consideraciones importantes 44
Región de AWS 44
Configure explícitamente un Región de AWS 45
Determinar la región desde el entorno 45
Comprobación de la disponibilidad del servicio 47
Seleccionar un punto de conexión específico 48
Proveedores de credenciales 48
Trabajo de desarrollo interactivo 49
Cadena predeterminada de proveedores de credenciales 52
Almacenamiento en caché de las credenciales 57
Especificación de un determinado proveedor de credenciales 60
Uso de perfiles de configuración compartidos 62
Uso de un proceso externo 65
Suministro de credenciales en código 70
Lectura de credenciales de roles de IAM en Amazon EC2 74
Reintentos 76
Estrategias de reintento 76
Especificación de una estrategia 80
Personalización de una estrategia 82
Migración desde `RetryPolicy` a `RetryStrategy` 84
Tiempos de espera 84
Tiempos de espera de clientes de servicio 85
Tiempo de espera de clientes HTTP 87
Interacciones de timeout y jerarquía 89
configuración inteligente predeterminada 90
Resumen 90
Observabilidad 91
Métricas 91
Monitorización 124
Registro 125
puntos de conexión 136
Opciones de configuración de puntos de conexión 137
Configuración de puntos de conexión integrados en el código 137
Configuración de puntos de conexión de nivel de solicitud 138
Configuración de puntos de conexión externos 139
Prioridad de configuración 140

Configuración de puntos de conexión específicos del servicio 140
Prácticas recomendadas 142
Configuración de clientes de HTTP 143
Clientes disponibles 143
Recomendaciones sobre clientes 144
Valores predeterminados inteligentes 149
Configurar el cliente HTTP basado en Apache 151
Configurar el cliente HTTP URLConnection basado 156
Configurar el cliente HTTP basado en Netty 162
Configurar clientes AWS HTTP basados en CRT 169
Configuración de proxies de HTTP 183
Configurar el cliente HTTP basado en Apache 5.x 189
Interceptores 192
Ciclo de vida 192
Registro de interceptores 192
Ejemplo 193
Prácticas recomendadas 200
Objetos de contexto 201
Uso del SDK 202
Realización de Servicio de AWS solicitudes 205
Uso de clientes de servicio para realizar solicitudes 205
Hacer solicitudes 207
Tratamiento de respuestas 209
Programación asíncrona 210
Uso de API de cliente asincrónicas 211
Administración de streaming en métodos asincrónicos 214
Configuración de opciones asincrónicas avanzadas 217
Prácticas recomendadas 219
Prevención del bloqueo de solicitudes 219
Reutilización de clientes 220
Liberación de recursos 220
Prevención de problemas de conexión 220
Optimización de HTTP 221
Optimización de SSL 221
Supervisión del rendimiento 222
Gestión de errores 222

¿Por qué excepciones no controladas? ... 222
AwsServiceException (y subclases) ... 222
SdkClientException ... 223
Excepciones y comportamiento de reintentos ... 224
Paginación ... 224
Paginación síncrona ... 224
Paginación asíncrona ... 227
Esperadores ... 233
Requisitos previos ... 233
Uso de esperadores ... 234
Configurar los esperadores ... 235
Ejemplos de código ... 236
Resolución de problemas ... 236
Restablecimiento de la conexión ... 236
Tiempo de espera de la conexión ... 237
Tiempo de espera de la lectura agotado ... 237
Tiempo de espera de grupo de conexiones ... 238
Errores de ruta de clases ... 242
Errores de firma ... 243
Cierre del grupo de conexiones ... 245
Cadena de error del proveedor de credenciales ... 246
Reduzca el tiempo de inicio del SDK para AWS Lambda ... 249
Utilice un cliente HTTP AWS basado en CRT ... 250
Eliminar las dependencias del cliente HTTP no utilizadas ... 250
Configurar los clientes de servicio para abreviar las búsquedas ... 251
Inicializar el cliente de SDK fuera del controlador de la función de Lambda ... 252
Minimizar la inyección de dependencias ... 253
Utilice una segmentación por arquetipo de Maven AWS Lambda ... 253
Lambda SnapStart ... 253
Cambios en la versión 2.x que afectan al tiempo de startup ... 254
Recursos adicionales ... 254
Implemente `ContentStreamProvider` ... 254
Utilice `mark()` y `reset()` ... 255
Uso de almacenamiento en búfer si `mark()` y `reset()` no están disponibles ... 255
Creación de nuevos flujos ... 256
Configurar el TTL de JVM para las búsquedas de nombres DNS ... 256

Cómo configurar el TTL de JVM 256
Trabajar con HTTP/2 257
Llamada a Servicios de AWS 259
CloudWatch 259
Obtenga métricas de CloudWatch 260
Publica datos de métricas personalizadas en CloudWatch 262
Trabaja con CloudWatch alarmas 264
Usa Amazon CloudWatch Events 268
Servicios de bases de datos de AWS 272
Amazon DynamoDB 272
Amazon RDS 273
Amazon Redshift 273
Amazon Aurora sin servidor v1 273
Amazon DocumentDB 274
DynamoDB 274
Selección de un cliente de DynamoDB 274
Configuración de clientes de DynamoDB 275
Qué se aborda en este tema 276
Trabajar con tablas en DynamoDB 276
Trabaja con elementos en DynamoDB 286
Asignar objetos a elementos de DynamoDB 293
Amazon EC2 432
Administrar Amazon EC2 instancias 432
Zonas de uso Regiones de AWS y disponibilidad 439
Trabajar con grupos de seguridad en Amazon EC2 446
Trabajar con metadatos de la instancia de Amazon EC2 451
IAM 457
Administrar claves de acceso de IAM 458
Administrar usuarios de IAM 464
Crear políticas de IAM 468
Trabajar con políticas de IAM 477
Trabajar con certificados IAM de servidor 483
Kinesis 488
Suscripción a Amazon Kinesis Data Streams 488
Lambda 499
Invocar una función Lambda 499

Enumerar funciones de Lambda ... 500
Eliminación de una función de Lambda ... 501
Amazon S3 ... 502
Clientes de S3 en el SDK ... 502
Carga de flujos en S3 ... 506
Prefirmado URLs ... 513
Acceso entre regiones ... 521
Protección de la integridad de los datos con sumas de comprobación ... 523
Utilizar un cliente S3 de alto rendimiento ... 531
Configuración de la compatibilidad con la transferencia paralela ... 536
Transferir archivos y directorios ... 538
Notificaciones de eventos de S3 ... 548
Amazon SNS ... 558
Crear un tema ... 558
Enumerar sus temas de Amazon SNS ... 559
Suscribir un punto de enlace a un tema ... 560
Publicar un mensaje en un tema ... 561
Cancelar la suscripción de un punto de enlace de un tema ... 562
Eliminación de un tema ... 563
Amazon SQS ... 564
Uso de procesamiento automático de solicitudes por lotes ... 565
Operaciones de cola ... 570
Operaciones con mensajes ... 574
Amazon Transcribe ... 577
Configurar el micrófono ... 577
Crear un editor ... 578
Cree el cliente e inicie la secuencia ... 581
Más información ... 577
Ejemplos de código ... 583
ACM ... 586
Acciones ... 586
API Gateway ... 604
Acciones ... 586
Escenarios ... 609
AWS contribuciones de la comunidad ... 610
Aplicación de escalado automático ... 610

Acciones ... 586
Controlador de recuperación de aplicaciones ... 619
Acciones ... 586
Aurora ... 622
Introducción ... 622
Conceptos básicos ... 624
Acciones ... 586
Escenarios ... 609
escalado automático ... 658
Introducción ... 622
Conceptos básicos ... 624
Acciones ... 586
Escenarios ... 609
AWS Batch ... 722
Introducción ... 622
Conceptos básicos ... 624
Acciones ... 586
Amazon Bedrock ... 772
Acciones ... 586
Amazon Bedrock Runtime ... 777
Escenarios ... 609
Amazon Nova ... 795
Amazon Nova Canvas ... 816
Amazon Titan Image Generator ... 819
Incrustaciones de texto de Amazon Titan ... 821
Anthropic Claude ... 825
Cohere Command ... 844
Meta Llama ... 855
Mistral AI ... 866
Stable Diffusion ... 877
CloudFront ... 879
Acciones ... 586
Escenarios ... 609
CloudWatch ... 910
Introducción ... 622
Conceptos básicos ... 624

Acciones 586
Escenarios 609
CloudWatch Eventos 987
Acciones 586
CloudWatch Registros 993
Acciones 586
Escenarios 609
Amazon Cognito Identity 1011
Acciones 586
Amazon Cognito Identity Provider 1019
Introducción 622
Acciones 586
Escenarios 609
Amazon Comprehend 1046
Acciones 586
Escenarios 609
AWS Control Tower 1059
Introducción 622
Conceptos básicos 624
Acciones 586
Firehose 1121
Acciones 586
Escenarios 609
Amazon DocumentDB 1130
Ejemplos de tecnología sin servidor 1131
DynamoDB 1132
Introducción 622
Conceptos básicos 624
Acciones 586
Escenarios 609
Ejemplos de tecnología sin servidor 1131
AWS contribuciones de la comunidad 610
Amazon EC2 1395
Introducción 622
Conceptos básicos 624
Acciones 586

Escenarios 609
Amazon ECR 1494
Introducción 622
Conceptos básicos 624
Acciones 586
Amazon ECS 1533
Acciones 586
Elastic Load Balancing - versión 2 1548
Introducción 622
Acciones 586
Escenarios 609
MediaStore 1593
Acciones 586
AWS Entity Resolution 1609
Introducción 622
Conceptos básicos 624
Acciones 586
OpenSearch Servicio 1656
Introducción 622
Conceptos básicos 624
Acciones 586
EventBridge 1686
Introducción 622
Conceptos básicos 624
Acciones 586
Escenarios 609
EventBridge Planificador 1722
Introducción 622
Acciones 586
Escenarios 609
Forecast 1747
Acciones 586
Amazon Glacier 1760
Acciones 586
AWS Glue 1776
Introducción 622

Conceptos básicos 624
Acciones 586
HealthImaging 1809
Acciones 586
Escenarios 609
IAM 1840
Introducción 622
Conceptos básicos 624
Acciones 586
Escenarios 609
Amazon Inspector 1925
Introducción 622
Conceptos básicos 624
Acciones 586
AWS IoT 1973
Introducción 622
Conceptos básicos 624
Acciones 586
AWS IoT data 2012
Acciones 586
AWS IoT FleetWise 2016
Introducción 622
Conceptos básicos 624
Acciones 586
AWS IoT SiteWise 2070
Introducción 622
Conceptos básicos 624
Acciones 586
Amazon Keyspaces 2108
Introducción 622
Conceptos básicos 624
Acciones 586
Kinesis 2135
Acciones 586
Ejemplos de tecnología sin servidor 1131
AWS KMS 2148

Introducción ... 622
Conceptos básicos ... 624
Acciones ... 586
Lambda ... 2205
Introducción ... 622
Conceptos básicos ... 624
Acciones ... 586
Escenarios ... 609
Ejemplos de tecnología sin servidor ... 1131
AWS contribuciones de la comunidad ... 610
Amazon Lex ... 2242
Escenarios ... 609
Amazon Location ... 2243
Introducción ... 622
Conceptos básicos ... 624
Acciones ... 586
Location Service Places ... 2291
Acciones ... 586
AWS Marketplace API de catálogo ... 2296
Productos de AMI ... 2297
Ofertas de socios del canal ... 2322
Productos de contenedor ... 2340
Entidades ... 2346
Ofertas ... 2351
Productos ... 2413
Autorización de reventa ... 2418
Productos SaaS de ... 2461
Utilidades ... 2487
AWS Marketplace API de acuerdo ... 2491
Acuerdos ... 2491
MediaConvert ... 2545
Acciones ... 586
Migration Hub ... 2567
Acciones ... 586
Amazon MSK ... 2580
Ejemplos de tecnología sin servidor ... 1131

Neptune 2581
Introducción 622
Conceptos básicos 624
Acciones 586
Escenarios 609
Centro de socios 2624
Acciones 586
Escenarios 609
Amazon Personalize 2659
Acciones 586
Eventos de Amazon Personalize 2690
Acciones 586
Versión ejecutable de Amazon Personalize 2693
Acciones 586
Amazon Pinpoint 2698
Acciones 586
API de SMS y voz de Amazon Pinpoint 2743
Acciones 586
Amazon Polly 2746
Acciones 586
Escenarios 609
Amazon RDS 2753
Introducción 622
Conceptos básicos 624
Acciones 586
Escenarios 609
Ejemplos de tecnología sin servidor 1131
Servicio de datos de Amazon RDS 2796
Escenarios 609
Amazon Redshift 2798
Introducción 622
Conceptos básicos 624
Acciones 586
Escenarios 609
Amazon Rekognition 2836
Acciones 586

Escenarios 609
Registro de dominios de Route 53 2908
Introducción 622
Conceptos básicos 624
Acciones 586
Amazon S3 2931
Introducción 622
Conceptos básicos 624
Acciones 586
Escenarios 609
Ejemplos de tecnología sin servidor 1131
Amazon S3 Control 3120
Introducción 622
Conceptos básicos 624
Acciones 586
S3 Directory Buckets 3164
Introducción 622
Conceptos básicos 624
Acciones 586
Escenarios 609
SageMaker IA 3247
Introducción 622
Acciones 586
Escenarios 609
Secrets Manager 3276
Acciones 586
Amazon SES 3278
Acciones 586
Escenarios 609
Amazon SES API v2 3295
Acciones 586
Escenarios 609
Amazon SNS 3316
Introducción 622
Acciones 586
Escenarios 609

Ejemplos de tecnología sin servidor ... 1131
Amazon SQS ... 3386
Introducción ... 622
Acciones ... 586
Escenarios ... 609
Ejemplos de tecnología sin servidor ... 1131
Step Functions ... 3486
Introducción ... 622
Conceptos básicos ... 624
Acciones ... 586
Escenarios ... 609
AWS STS ... 3510
Acciones ... 586
Soporte ... 3513
Introducción ... 622
Conceptos básicos ... 624
Acciones ... 586
Systems Manager ... 3537
Introducción ... 622
Conceptos básicos ... 624
Acciones ... 586
Amazon Textract ... 3580
Acciones ... 586
Escenarios ... 609
Amazon Transcribe ... 3592
Acciones ... 586
Escenarios ... 609
Amazon Transcribe Streaming ... 3603
Acciones ... 586
Escenarios ... 609
Amazon Translate ... 3623
Escenarios ... 609
Migrar a la versión 2 ... 3626
¿Qué novedades incluye la versión 2? ... 3626
¿Cómo migrar? ... 3627
Herramienta de migración ... 3627

Step-by-step instrucciones 3638
Diferencias entre 1.x y 2.x 3656
Cambio de nombre de paquete 3656
Adición de la versión 2.x a su proyecto 3657
Inmutable POJOs 3658
Métodos setter y getter 3658
Nombres de clases de modelo 3659
Bibliotecas y utilidades 3660
Cambios de cliente 3662
Cambios en el proveedor de credenciales 3707
Cambios de región 3715
Cambios en operaciones, solicitudes y respuestas 3717
Cambios de excepción 3726
Cambios específicos de los servicios 3728
Uso de Amazon S3 3733
Cambios del archivo de perfil 3783
Configuración externa 3784
Esperadores 3787
Utilidad de metadatos de EC2 3791
CloudFront prefirmar 3799
API del creador de políticas de IAM 3803
Uso de DynamoDB 3809
Procesamiento automático de solicitudes por lotes de SQS 3850
Utilizar el SDK para Java 1.x y 2.x en paralelo 3859
Busque aplicaciones mediante clientes 1.x 3860
Use CloudTrail Lake para buscar aplicaciones con clientes 1.x 3860
Seguridad 3863
Protección de datos 3863
seguridad de la capa de transporte (TLS) 3865
Consultar las versiones de TLS 3865
Aplicar versiones de TLS 3866
Migrar a TLS 1.2 3866
Gestión de identidad y acceso 3866
Público 3867
Autenticación con identidades 3867
Administración del acceso con políticas 3869

¿Cómo Servicios de AWS trabajar con IAM 3871
Solución de problemas de AWS identidad y acceso 3871
Validación de la conformidad 3873
Resiliencia 3873
Seguridad de infraestructuras 3874
Clave OpenPGP 3876
Clave actual 3876
Claves anteriores 3882
Historial de documentos 3889
..... mmmcmiii

Qué es el AWS SDK for Java 2.x

AWS SDK para Java Proporciona una API de Java para Servicios de AWS. Con el SDK, puede crear aplicaciones Java que funcionen con Amazon S3 Amazon EC2, DynamoDB, y más.

AWS SDK for Java 2.x Se trata de una importante reescritura del código base de la versión 1.x. Se basa en Java 8 y agrega varias características solicitadas con frecuencia. Entre estas se incluyen la compatibilidad con operaciones de E/S sin bloqueo y la capacidad de conectar una implementación HTTP diferente en tiempo de ejecución.

Añadimos periódicamente nuevos servicios a AWS SDK para Java. Para obtener una lista de los cambios realizados y las características en una versión determinada, consulte el registro de cambios.

Introducción al SDK

Si está listo para empezar a utilizar el SDK, consulte el capítulo Introducción.

Para configurar su entorno de desarrollo, consulte the section called “Configuración”.

Si actualmente utilizas la versión 1.x de SDK para Java, consulta Migrar a la versión 2 para obtener instrucciones específicas.

Para obtener información sobre cómo realizar Amazon S3 solicitudes Amazon EC2 y otros Servicios de AWS, consulte Usar SDK para Java y trabajar con Servicios de AWS. DynamoDB

Desarrollar aplicaciones móviles

Si eres desarrollador de aplicaciones móviles, Amazon Web Services proporciona el AWS Amplifymarco.

Mantenimiento y compatibilidad de las versiones principales del SDK

Para obtener información sobre el mantenimiento y el soporte de las versiones principales del SDK y sus dependencias subyacentes, consulte los siguientes temas de la Guía de referencia de herramientas AWS SDKs y herramientas:

- AWS SDKs y Política de mantenimiento de herramientas
- AWS SDKs Matriz de soporte de versiones y herramientas

Recursos adicionales

Además de esta guía, los siguientes son valiosos recursos en línea para AWS SDK para Java los desarrolladores:

- AWS SDK para Java Referencia de la API 2.x
- Blog para desarrolladores de Java
- Tema de desarrollo de Java en AWS re:Post
- Fuente del SDK en GitHub
- AWS Biblioteca de ejemplos de código del SDK
- @awsforjava (Twitter)

Contribución al SDK

Los desarrolladores también pueden enviar sus comentarios a través de los siguientes canales:

- Envíe los problemas del SDK en GitHub
- Únase a una charla informal sobre el SDK en el canal AWS SDK para Java 2.x gitter

Introducción a AWS SDK para Java 2.x

En las secciones de este tema se explican los pasos esenciales para empezar a crear aplicaciones de Java que puedan conectarse a Servicio de AWS. En las secciones se describe la configuración del entorno de desarrollo con Java y la creación de herramientas como Maven o Gradle, la configuración de autenticación segura en AWS y la creación de una primera aplicación funcional mediante un tutorial práctico. Este tema apto para principiantes le servirá de punto de partida al desarrollo de AWS con Java y le proporcionará la base que necesitará para explorar características más avanzadas.

Contenido

- Configuración de AWS SDK para Java 2.x
  - Descripción general de la configuración
  - Instale Java y una herramienta de compilación para trabajar con AWS SDK for Java 2.x
  - Configure un proyecto de Apache Maven que utilice AWS SDK for Java 2.x
    - Requisitos previos
    - Crear un proyecto de Maven
    - Configurar el compilador Java para Maven
    - Declarar el SDK como una dependencia
    - Establecer dependencias para módulos del SDK
      - Crear todo el SDK en su proyecto
    - Compilación del proyecto
  - Configura un proyecto de Gradle que utilice AWS SDK for Java 2.x
  - Configure un proyecto de GraalVM Native Image que utilice AWS SDK for Java 2.x
    - Requisitos previos
    - Crear un proyecto mediante el arquetipo
    - Crear una imagen nativa
- Autenticación AWS mediante el uso del AWS SDK for Java 2.x
  - Configuración de la autenticación
    - 1. Desarrollo local con credenciales a corto plazo
    - 2. Configuración del acceso de inicio de sesión único para el SDK
    - 3. Inicie sesión con el AWS CLI

- Opciones de autenticación adicionales
- Creación de una aplicación sencilla mediante el AWS SDK for Java 2.x
  - Paso 1: Configuración para este tutorial
  - Paso 2: Crear el proyecto
  - Paso 3: Escribir el código
  - Paso 4: Compilar y ejecutar la aplicación
    - Success
    - Limpieza
  - Siguientes pasos

Configuración de AWS SDK para Java 2.x

En esta sección se ofrece información sobre cómo configurar su entorno de desarrollo y proyectos para utilizar el AWS SDK for Java 2.x.

Descripción general de la configuración

Para desarrollar con éxito aplicaciones que accedan a Servicios de AWS utilizando el AWS SDK para Java, se requieren las siguientes condiciones:

- El SDK de Java debe tener acceso a las credenciales para autenticar solicitudes en su nombre.
- Los permisos del rol de IAM configurados para el SDK deben permitir el acceso a los Servicios de AWS que requiera su aplicación. Los permisos asociados a la política administrada de AWS PowerUserAccess son suficientes para la mayoría de las necesidades de desarrollo.
- Un entorno de desarrollo con los siguientes elementos:
  - Archivos de configuración compartidos que se configuran al menos de una de las siguientes maneras:
    - El archivo `config` contiene la configuración de inicio de sesión único del IAM Identity Center para que el SDK pueda obtener las credenciales AWS.
    - El archivo `credentials` contiene credenciales temporales.
  - Una instalación de Java 8 o posterior.
  - Una herramienta de automatización de compilaciones, como Maven o Gradle.
  - Un editor de texto para trabajar con código.

- (Opcional, pero recomendado) Un IDE (entorno de desarrollo integrado) como IntelliJ IDEA Eclipse o NetBeans.

  Si utiliza IntelliJ IDEA, también puede añadir AWS Toolkit para IntelliJ IDEA para integrar Servicios de AWS directamente en el IDE y ayudar a agilizar el desarrollo.

- Una sesión activa del portal de acceso a la AWS cuando esté listo para ejecutar su aplicación. Utiliza AWS Command Line Interface para el proceso de inicio de sesión en el portal de acceso a AWS del Centro de identidad de IAM.

> **Important**
>
> En las instrucciones de esta sección de configuración se supone que usted o su organización utilizan el Centro de identidad de IAM. Si su organización utiliza un proveedor de identidad externo que funciona de forma independiente del Centro de identidades de IAM, averigüe cómo puede obtener credenciales temporales para que las utilice el SDK para Java. Siga estas instrucciones para añadir credenciales temporales al archivo `~/.aws/credentials`. Si su proveedor de identidad agrega credenciales temporales automáticamente al archivo `~/.aws/credentials`, asegúrese de que el nombre del perfil sea `[default]` para que no necesite proporcionarlo al SDK o AWS CLI.

Instale Java y una herramienta de compilación para trabajar con AWS SDK for Java 2.x

Debe cumplir los siguientes requisitos de entorno de desarrollo para trabajar con SDK para Java 2.x:

- Java 8 o posterior AWS SDK para Java Funciona con el kit de desarrollo Java SE de Oracle y con distribuciones del Open Java Development Kit (OpenJDK) Amazon Corretto, como Red Hat OpenJDK y Adoptium.
- Una herramienta de compilación compatible con Maven como Apache Maven, Apache Ant with Ivy, Gradle o IntelliJ.
  - Para obtener información sobre cómo instalar y usar Maven, consulte https://maven.apache.org/.
  - Para obtener información sobre cómo instalar y utilizar Apache Ivy, consulte https://ant.apache.org/ivy/.

- Para obtener información sobre cómo instalar y usar Gradle, consulte https://gradle.org/.
- Para obtener información sobre cómo instalar y utilizar IntelliJ IDEA, consulte. https://www.jetbrains.com/idea/

Configure un proyecto de Apache Maven que utilice AWS SDK for Java 2.x

Puede utilizar Apache Maven para configurar y compilar proyectos de AWS SDK for Java 2.x o para compilar el propio SDK.

Requisitos previos

Para usar el SDK para Java 2.x con Maven necesita lo siguiente:

- Java 8.0 o posterior. Puede descargar la versión más reciente del software Java SE Development Kit desde http://www.oracle. com/technetwork/java/javase/downloads/. El SDK para Java 2.x también funciona con OpenJDK Amazon Corretto y con una distribución del Open Java Development Kit (OpenJDK). Descargue la última versión de OpenJDK desde. https://openjdk.java.net/install/index.html Descargue la última versión Amazon Corretto 8 u Amazon Corretto 11 de la Corretto página.
- Apache Maven. Si necesita instalar Maven, vaya a http://maven.apache.org/ para descargarlo e instalarlo.

Crear un proyecto de Maven

Para crear un proyecto Maven desde la línea de comandos, ejecute el siguiente comando desde un terminal o una ventana del indicador de comandos.

```
mvn -B archetype:generate \
 -DarchetypeGroupId=software.amazon.awssdk \
 -DarchetypeArtifactId=archetype-lambda -Dservice=s3 -Dregion=US_WEST_2 \
 -DarchetypeVersion=2.X.X \
 -DgroupId=com.example.myapp \
 -DartifactId=myapp
```

> **Note**
>
> Sustituya com.example.myapp por el espacio de nombres del paquete completo de su aplicación. Sustituya también myapp por el nombre de su proyecto. Esto se convierte en el nombre del directorio del proyecto.
> Para usar la última versión del arquetipo, sustitúyala por *2.X.X* la última de Maven Central.

Este comando crea un proyecto Maven utilizando el conjunto de herramientas de plantillas de arquetipos. El arquetipo genera el andamiaje para un proyecto de gestión de funciones. AWS Lambda Este arquetipo de proyecto está preconfigurado para compilar con Java SE 8 e incluye una dependencia a la versión del SDK para Java 2.x especificada con `-DarchetypeVersion`.

Para obtener más información sobre cómo crear y configurar proyectos de Maven, consulte Maven Getting Started Guide.

Configurar el compilador Java para Maven

Si ha creado su proyecto utilizando el arquetipo del AWS Lambda proyecto tal y como se ha descrito anteriormente, la configuración del compilador de Java ya está hecha.

Para comprobar que esta configuración está presente, comience abriendo el archivo `pom.xml` desde la carpeta de proyecto que creó (por ejemplo, `myapp`) cuando ejecutó el comando anterior. Busque en las líneas 11 y 12 para consultar la configuración de la versión del compilador Java para este proyecto de Maven y la inclusión requerida del complemento del compilador de Maven en las líneas 71-75.

```
<project>
  <properties>
    <maven.compiler.source>1.8</maven.compiler.source>
    <maven.compiler.target>1.8</maven.compiler.target>
  </properties>
  <build>
    <plugins>
      <plugin>
        <groupId>org.apache.maven.plugins</groupId>
        <artifactId>maven-compiler-plugin</artifactId>
        <version>${maven.compiler.plugin.version}</version>
      </plugin>
    </plugins>
```

```
  </build>
</project>
```

Si crea su proyecto con un arquetipo diferente o utilizando otro método, debe asegurarse de que el complemento del compilador de Maven sea parte de la compilación y que sus propiedades de origen y destino están establecidas en 1.8 en el archivo `pom.xml`.

Consulte el fragmento anterior para ver una forma de configurar estos parámetros necesarios.

Otra opción sería definir la configuración del compilador insertada con la declaración del complemento, de la siguiente manera.

```
<project>
  <build>
    <plugins>
      <plugin>
        <groupId>org.apache.maven.plugins</groupId>
        <artifactId>maven-compiler-plugin</artifactId>
        <configuration>
          <source>1.8</source>
          <target>1.8</target>
        </configuration>
      </plugin>
    </plugins>
  </build>
</project>
```

Declarar el SDK como una dependencia

Para usarlo AWS SDK para Java en su proyecto, debe declararlo como una dependencia en el archivo de su proyecto. `pom.xml`

Si creó su proyecto utilizando el arquetipo de proyecto como se describió anteriormente, la última versión del SDK ya está configurada como una dependencia en su proyecto.

El arquetipo genera un artefacto dependiente de la BOM (lista de materiales) para el identificador del grupo `software.amazon.awssdk`. Con una lista de materiales, no tiene que especificar la versión de Maven para las dependencias de artefactos individuales que comparten el mismo id de grupo.

Si creó su proyecto de Maven de otra manera, configure la versión más reciente del SDK para su proyecto asegurándose de que el archivo `pom.xml` contenga lo siguiente.

```
<project>
  <properties>
    <aws.java.sdk.version>2.X.X</aws.java.sdk.version>
  </properties>
  <dependencyManagement>
    <dependencies>
      <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>bom</artifactId>
        <version>${aws.java.sdk.version}</version>
        <type>pom</type>
        <scope>import</scope>
      </dependency>
    </dependencies>
  </dependencyManagement>
</project>
```

> **Note**
>
> Sustitúyala *2.X.X* en el `pom.xml` archivo por la última versión de AWS SDK for Java 2.x.

Establecer dependencias para módulos del SDK

Ahora que ha configurado el SDK, puede añadir dependencias para uno o más de los AWS SDK para Java módulos para utilizarlos en su proyecto.

Aunque puede especificar el número de versión para cada componente, no es necesario porque ya declaró la versión del SDK en la sección `dependencyManagement` usando la lista de materiales. Para cargar una versión personalizada de un módulo determinado, especifique un número de versión para su dependencia.

Si creó su proyecto utilizando el arquetipo de proyecto como se ha descrito anteriormente, su proyecto ya está configurado con múltiples dependencias. Incluyen las dependencias de los controladores de funciones AWS Lambda y Amazon S3, de la siguiente manera.

```
<project>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>s3</artifactId>
```

```
            <exclusions>
                <exclusion>
                    <groupId>software.amazon.awssdk</groupId>
                    <artifactId>netty-nio-client</artifactId>
                </exclusion>
                <exclusion>
                    <groupId>software.amazon.awssdk</groupId>
                    <artifactId>apache-client</artifactId>
                </exclusion>
            </exclusions>
        </dependency>

        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>url-connection-client</artifactId>
        </dependency>

        <dependency>
            <groupId>com.amazonaws</groupId>
            <artifactId>aws-lambda-java-core</artifactId>
            <version>${aws.lambda.java.version}</version>
        </dependency>
    </dependencies>
</project>
```

> **Note**
>
> En el ejemplo `pom.xml` anterior, las dependencias son de diferentes `groupId`. La dependencia `s3` es de `software.amazon.awssdk`, mientras que la dependencia `aws-lambda-java-core` es de `com.amazonaws`. La configuración de administración de dependencias de la BOM afecta a los artefactos para `software.amazon.awssdk`, por lo que se necesita una versión para el artefacto `aws-lambda-java-core`.
> Para el desarrollo de controladores de funciones Lambda utilizando el SDK para Java 2.x, `aws-lambda-java-core` es la dependencia correcta. Sin embargo, si la aplicación necesita administrar los recursos de Lambda, el uso de operaciones como `listFunctions`, `deleteFunction`, `invokeFunction` y `createFunction`, la aplicación requiere la siguiente dependencia.
>
> ```
> <groupId>software.amazon.awssdk</groupId>
> <artifactId>lambda</artifactId>
> ```

> **Note**
>
> La dependencia `s3` excluye las dependencias transitivas `netty-nio-client` y `apache-client`. En lugar de cualquiera de esos clientes HTTP, el arquetipo incluye la dependencia `url-connection-client`, lo que ayuda a reducir la latencia de inicio de las funciones de AWS Lambda.

Agregue los módulos a su proyecto para obtener las funciones Servicio de AWS y características que necesite para su proyecto. Los módulos (dependencias) que administra la BOM de AWS SDK para Java se enumeran en el repositorio central de Maven.

> **Note**
>
> Puede examinar el archivo `pom.xml` de un ejemplo de código para determinar qué dependencias necesita para su proyecto. Por ejemplo, si le interesan las dependencias del servicio DynamoDB, consulte este ejemplo del repositorio de ejemplos de AWS código en. GitHub (Busque el archivo `pom.xml` en /java2/example_code/dynamodb.)

Crear todo el SDK en su proyecto

Para optimizar su aplicación, le recomendamos encarecidamente que extraiga solo los componentes que necesita en lugar de todo el SDK. Sin embargo, para integrarlo todo AWS SDK para Java en el proyecto, declárelo en el `pom.xml` archivo de la siguiente manera.

```
<project>
  <dependencies>
    <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>aws-sdk-java</artifactId>
      <version>2.X.X</version>
    </dependency>
  </dependencies>
</project>
```

Compilación del proyecto

Después de configurar el archivo `pom.xml`, puede usar Maven para crear el proyecto.

Para crear el proyecto de Maven desde la línea de comandos, abra una ventana de terminal o símbolo del sistema, desplácese hasta el directorio del proyecto (por ejemplo, `myapp`), escriba o pegue el siguiente comando y, a continuación, presione "Enter" o "Return".

```
mvn package
```

Esto crea un único archivo `.jar` (JAR) en el directorio `target` (por ejemplo, `myapp/target`). Este JAR contiene todos los módulos del SDK especificados como dependencias en su archivo `pom.xml`.

Configura un proyecto de Gradle que utilice AWS SDK for Java 2.x

Puede usar Gradle para configurar y crear proyectos AWS SDK for Java 2.x .

Los pasos iniciales del ejemplo siguiente provienen de la Guía de introducción de Gradle para la versión 8.4. Si usa una versión diferente, los resultados pueden diferir ligeramente.

Para crear una aplicación Java con Gradle (línea de comandos)

1. Cree un directorio para alojar su proyecto. En este ejemplo, el directorio se llama `demo`.
2. En el directorio `demo`, ejecute el comando `gradle init` y proporcione los valores resaltados en rojo, como se muestra en el siguiente resultado de la línea de comandos. Para explicarlo, elegimos Kotlin como lenguaje DSL para compilar scripts, pero al final de este tema también se muestra un ejemplo completo de Groovy.

```
> gradle init
Starting a Gradle Daemon (subsequent builds will be faster)

Select type of project to generate:
1: basic
2: application
3: library
4: Gradle plugin
Enter selection (default: basic) [1..4] 2

Select implementation language:
1: C++
2: Groovy
3: Java
4: Kotlin
5: Scala
6: Swift
```

```
Enter selection (default: Java) [1..6] 3

Generate multiple subprojects for application? (default: no) [yes, no] no
Select build script DSL:
1: Kotlin
2: Groovy
Enter selection (default: Kotlin) [1..2] <Enter>

Select test framework:
1: JUnit 4
2: TestNG
3: Spock
4: JUnit Jupiter
Enter selection (default: JUnit Jupiter) [1..4] 4

Project name (default: demo): <Enter>
Source package (default: demo): <Enter>
Enter target version of Java (min. 7) (default: 11): <Enter>
Generate build using new APIs and behavior (some features may change in the next
 minor release)? (default: no) [yes, no] <Enter>

> Task :init
To learn more about Gradle by exploring our Samples at https://docs.gradle.org/8.4/
samples/sample_building_java_applications.html

BUILD SUCCESSFUL in 3m 43s
2 actionable tasks: 2 executed
```

3. Una vez completada la tarea `init`, el directorio demo contiene la siguiente estructura de árbol. En la siguiente sección examinaremos más de cerca el archivo de compilación principal `build.gradle.kts` (resaltado en rojo).

```
### app
#   ### build.gradle.kts
#   ### src
#       ### main
#       #   ### java
#       #   #   ### demo
#       #   #       ### App.java
#       #   ### resources
#       ### test
#           ### java
#           #   ### demo
```

```
#           #       ### AppTest.java
#           ### resources
### gradle
#   ### wrapper
#       ### gradle-wrapper.jar
#       ### gradle-wrapper.properties
### gradlew
### gradlew.bat
### settings.gradle.kts
```

El archivo `build.gradle.kts` contiene el siguiente andamiaje.

```
/*
 * This file was generated by the Gradle 'init' task.
 *
 * This generated file contains a sample Java application project to get you
 started.
 * For more details on building Java & JVM projects, please refer to https://
docs.gradle.org/8.4/userguide/building_java_projects.html in the Gradle
 documentation.
 */

plugins {
    // Apply the application plugin to add support for building a CLI application
 in Java.
    application
}

repositories {
    // Use Maven Central for resolving dependencies.
    mavenCentral()
}

dependencies {
    // Use JUnit Jupiter for testing.
    testImplementation("org.junit.jupiter:junit-jupiter:5.9.3")

    testRuntimeOnly("org.junit.platform:junit-platform-launcher")

    // This dependency is used by the application.
    implementation("com.google.guava:guava:33.3.0-jre")
}
```

```
// Apply a specific Java toolchain to ease working on different environments.
java {
    toolchain {
        languageVersion.set(JavaLanguageVersion.of(11))
    }
}

application {
    // Define the main class for the application.
    mainClass.set("demo.App")
}

tasks.named<Test>("test") {
    // Use JUnit Platform for unit tests.
    useJUnitPlatform()
}
```

4. Usa el archivo de compilación de Gradle estructurado como base para tu proyecto. AWS

   a. Para administrar las dependencias del SDK de tu proyecto de Gradle, agrega la lista de materiales (BOM) de Maven correspondiente a la sección del AWS SDK for Java 2.x archivo. `dependencies` `build.gradle.kts`

   ```
   ...
   dependencies {
       implementation(platform("software.amazon.awssdk:bom:2.27.21"))
       // With the bom declared, you specify individual SDK dependencies without a
    version.
    ...
   }
   ...
   ```

   > **Note**
   >
   > En este archivo de compilación de ejemplo, sustituya la 2.27.21 por la última versión del SDK para Java 2.x. Busque la última versión disponible en el repositorio central de Maven.

   b. Especifique los módulos del SDK que necesita su aplicación en la sección `dependencies`. A modo de ejemplo, lo siguiente añade una dependencia de Amazon Simple Storage Service.

```
...
dependencies {
    implementation(platform("software.amazon.awssdk:bom:2.27.21"))
    implementation("software.amazon.awssdk:s3")
 ...
}
...
```

Gradle resuelve automáticamente la versión correcta de las dependencias del SDK con la información de la BOM.

En los siguientes ejemplos, se muestran los archivos de compilación completos de Gradle tanto en Kotlin como en Groovy. DSLs El archivo de compilación contiene las dependencias para Amazon S3, la autenticación, el registro y las pruebas. La versión de origen y destino de Java es la versión 11.

Kotlin DSL (build.gradle.kts)

```
/*
 * This file was generated by the Gradle 'init' task.
 *
 * This generated file contains a sample Java application project to get you
 started.
 * For more details on building Java & JVM projects, please refer to https://
docs.gradle.org/8.4/userguide/building_java_projects.html in the Gradle
 documentation.
 */

plugins {
    // Apply the application plugin to add support for building a CLI application in
 Java.
    application
}

repositories {
    // Use Maven Central for resolving dependencies.
    mavenCentral()
}

dependencies {
    implementation(platform("software.amazon.awssdk:bom:2.20.56"))
    implementation("software.amazon.awssdk:s3")
```

```
    implementation("software.amazon.awssdk:sso")
    implementation("software.amazon.awssdk:ssooidc")
    implementation(platform("org.apache.logging.log4j:log4j-bom:2.20.0"))
    implementation("org.apache.logging.log4j:log4j-slf4j2-impl")
    implementation("org.apache.logging.log4j:log4j-1.2-api")
    testImplementation(platform("org.junit:junit-bom:5.10.0"))
    testImplementation("org.junit.jupiter:junit-jupiter")
}

// Apply a specific Java toolchain to ease working on different environments.
java {
    toolchain {
        languageVersion.set(JavaLanguageVersion.of(11))
    }
}

application {
    // Define the main class for the application.
    mainClass.set("demo.App")
}

tasks.named<Test>("test") {
    // Use JUnit Platform for unit tests.
    useJUnitPlatform()
}
```

Groovy DSL (build.gradle)

```
/*
 * This file was generated by the Gradle 'init' task.
 *
 * This generated file contains a sample Java application project to get you
 started.
 * For more details on building Java & JVM projects, please refer to https://
docs.gradle.org/8.4/userguide/building_java_projects.html in the Gradle
 documentation.
 */

plugins {
    // Apply the application plugin to add support for building a CLI application in
 Java.
    id 'application'
}
```

```
repositories {
    // Use Maven Central for resolving dependencies.
    mavenCentral()
}

dependencies {
    implementation platform('software.amazon.awssdk:bom:2.27.21')
    implementation 'software.amazon.awssdk:s3'
    implementation 'software.amazon.awssdk:sso'
    implementation 'software.amazon.awssdk:ssooidc'
    implementation platform('org.apache.logging.log4j:log4j-bom:2.20.0')
    implementation 'org.apache.logging.log4j:log4j-slf4j2-impl'
    implementation 'org.apache.logging.log4j:log4j-1.2-api'
    testImplementation platform('org.junit:junit-bom:5.10.0')
    testImplementation 'org.junit.jupiter:junit-jupiter'
}

// Apply a specific Java toolchain to ease working on different environments.
java {
    toolchain {
        languageVersion = JavaLanguageVersion.of(11)
    }
}

application {
    // Define the main class for the application.
    mainClass = 'demo_groovy.App'
}

tasks.named('test') {
    // Use JUnit Platform for unit tests.
    useJUnitPlatform()
}
```

Para ver los pasos siguientes, consulte la guía de introducción en el sitio web de Gradle para obtener instrucciones sobre cómo compilar y ejecutar una aplicación de Gradle.

Configure un proyecto de GraalVM Native Image que utilice AWS SDK for Java 2.x

Con las versiones 2.16.1 y posteriores, AWS SDK for Java 2.x proporciona out-of-the-box soporte para las aplicaciones GraalVM Native Image. Utilice el arquetipo de `archetype-app-quickstart` Maven para configurar un proyecto con soporte de imágenes nativo integrado.

Requisitos previos

- Complete los pasos que se indican en Configuración de la versión 2.x. AWS SDK para Java
- Instalar GraalVM Native Image.

Crear un proyecto mediante el arquetipo

Para crear un proyecto de Maven con soporte de imágenes nativo integrado, utilice el siguiente comando en una ventana de terminal o línea de comandos.

> **Note**
>
> Sustituya `com.example.mynativeimageapp` por el espacio de nombres completo del paquete de su aplicación. Sustituya también `mynativeimageapp` por el nombre de su proyecto. Esto se convierte en el nombre del directorio del proyecto.

```
mvn archetype:generate \
    -DarchetypeGroupId=software.amazon.awssdk \
    -DarchetypeArtifactId=archetype-app-quickstart \
    -DarchetypeVersion=2.27.21\
    -DnativeImage=true \
    -DhttpClient=apache-client \
    -Dservice=s3 \
    -DgroupId=com.example.mynativeimageapp \
    -DartifactId=mynativeimageapp \
    -DinteractiveMode=false
```

Este comando crea un proyecto de Maven configurado con dependencias para el AWS SDK para Java Amazon S3, y el `ApacheHttpClient` cliente HTTP. También incluye una dependencia para el complemento GraalVM Native Image Maven, para que pueda crear imágenes nativas con Maven.

Para incluir las dependencias de otro servicio Amazon Web Services, establezca el valor del `-Dservice` parámetro en el ID de artefacto de ese servicio. Entre los ejemplos se incluyen `dynamodb`, `comprehend` y `pinpoint`. Para obtener una lista completa de los artefactos IDs, consulta la lista de dependencias administradas de software.amazon.awssdk en Maven Central.

Para usar un cliente HTTP asíncrono, defina el parámetro `-DhttpClient` como `netty-nio-client`. Para usar `UrlConnectionHttpClient` como cliente HTTP asíncrono en lugar de `apache-client`, defina el parámetro `-DhttpClient` en `url-connection-client`.

Crear una imagen nativa

Tras crear el proyecto, ejecute el siguiente comando desde el directorio del proyecto, por ejemplo `mynativeimageapp`:

```
mvn package -P native-image
```

Esto crea una aplicación de imagen nativa en el directorio `target`, por ejemplo, `target/mynativeimageapp`.

Autenticación AWS mediante el uso del AWS SDK for Java 2.x

Debe establecer cómo se AWS SDK for Java 2.x autentica AWS cuando desarrolla con AWS los servicios. El SDK administra la detección de credenciales, la creación de firmas y la actualización de credenciales totalmente en segundo plano, lo que le permite centrarse en la lógica de la aplicación.

Configuración de la autenticación

El tema sobre autenticación y acceso de la Guía de referencia sobre herramientas AWS SDKs y herramientas describe los diferentes enfoques de autenticación.

Para el desarrollo local, el enfoque recomendado es utilizar credenciales a corto plazo iniciando sesión en la AWS CLI con las credenciales de inicio de sesión de la consola. Se recomienda utilizar usuarios root, usuarios de IAM o estar federados con IAM para acceder a la AWS cuenta. Siga las instrucciones de Acceda a las credenciales para el trabajo de desarrollo interactivo mediante AWS SDK for Java 2.x.

Tras seguir las instrucciones AWS SDKs y la Guía de referencia de herramientas, tu sistema debería estar configurado para permitir que el SDK firme las solicitudes:

1. Desarrollo local con credenciales a corto plazo

Para el desarrollo local, el enfoque recomendado es utilizar credenciales a corto plazo iniciando sesión en la AWS CLI con las credenciales de inicio de sesión de la consola. Se recomienda utilizar usuarios root, usuarios de IAM o estar federados con IAM para acceder a la AWS cuenta.

Para obtener instrucciones, consulte Uso de proveedores de credenciales en. AWS SDK for Java 2.x

2. Configuración del acceso de inicio de sesión único para el SDK

Tras completar el paso 2 de la sección de acceso mediante programación para que el SDK pueda utilizar la autenticación del Centro de identidades de IAM, el sistema debe contener los siguientes elementos.

- El AWS CLI, que se utiliza para iniciar una sesión en el portal de AWS acceso antes de ejecutar la aplicación.
- Un archivo `~/.aws/config` que contiene un perfil predeterminado. El SDK para Java utiliza la configuración de proveedor de token de SSO del perfil para adquirir las credenciales antes de enviar las solicitudes a AWS. El valor `sso_role_name`, que es un rol de IAM conectado a un conjunto de permisos del Centro de identidades de IAM, debería permitir el acceso a los Servicios de AWS utilizados en la aplicación.

  El siguiente archivo `config` de ejemplo muestra la configuración de un perfil predeterminado con el proveedor de token de SSO. La configuración `sso_session` del perfil hace referencia a la sección `sso-session` nombrada. La sección `sso-session` contiene la configuración para iniciar una sesión en el portal de acceso a AWS.

```
[default]
sso_session = my-sso
sso_account_id = 111122223333
sso_role_name = SampleRole
region = us-east-1
output = json

[sso-session my-sso]
sso_region = us-east-1
sso_start_url = https://provided-domain.awsapps.com/start
sso_registration_scopes = sso:account:access
```

Para obtener más información sobre los ajustes utilizados en la configuración del proveedor de token de SSO, consulte Configuración del proveedor de token de SSO en la Guía de referencia de herramientas AWS SDKs y herramientas.

Si tu entorno de desarrollo no está configurado para el acceso mediante programación como se ha mostrado anteriormente, sigue el paso 2 de la SDKs guía de referencia.

3. Inicie sesión con el AWS CLI

Antes de ejecutar una aplicación que acceda Servicios de AWS, necesita una sesión activa en el portal de AWS acceso para que el SDK utilice la autenticación del IAM Identity Center para resolver las credenciales. Ejecute el siguiente comando AWS CLI para iniciar sesión en el portal de AWS acceso.

```
aws sso login
```

Como tiene una configuración de perfil predeterminada, no necesita llamar al comando con una opción `--profile`. Si la configuración del proveedor de token de SSO utiliza un perfil con nombre, el comando es `aws sso login --profile named-profile`.

Para comprobar si ya tiene una sesión activa, ejecute el siguiente comando de la AWS CLI .

```
aws sts get-caller-identity
```

La respuesta a este comando debe indicar la cuenta y el conjunto de permisos del Centro de identidades de IAM configurados en el archivo compartido `config`.

> **Note**
>
> Si ya tiene una sesión activa en el portal de AWS acceso y la ejecuta`aws sso login`, no tendrá que proporcionar credenciales.
> Sin embargo, verá un cuadro de diálogo en el que se solicita permiso para que `botocore` acceda a su información. `botocore` es la base de la AWS CLI .
> Seleccione Permitir para autorizar el acceso a su información para el AWS CLI SDK for Java.

Opciones de autenticación adicionales

Para obtener más opciones de autenticación para el SDK, como el uso de perfiles y variables de entorno, consulte el capítulo de configuración de la Guía de referencia de herramientas AWS SDKs y herramientas.

Creación de una aplicación sencilla mediante el AWS SDK for Java 2.x

En este tutorial, se muestra cómo usar Apache Maven para definir las dependencias del SDK para Java 2.x y, a continuación, escribir el código al que se conecta Amazon S3 para cargar un archivo.

Para completar el tutorial, siga estos pasos:

- Paso 1: Configuración para este tutorial
- Paso 2: Crear el proyecto
- Paso 3: Escribir el código
- Paso 4: Compilar y ejecutar la aplicación

Paso 1: Configuración para este tutorial

Antes de empezar este tutorial, necesitará:

- Permiso de acceso Amazon S3
- Un entorno de desarrollo de Java que está configurado para acceder Servicios de AWS mediante un inicio de sesión único al AWS IAM Identity Center

Use las instrucciones de ??? para configurar para este tutorial. Una vez que haya configurado su entorno de desarrollo con acceso de inicio de sesión único para el SDK de Java y haya tenido una sesión activa en el portal de AWS acceso, continúe con el paso 2 de este tutorial.

Paso 2: Crear el proyecto

Para crear el proyecto de este tutorial, ejecute un comando de Maven que le pida información sobre cómo configurar el proyecto. Una vez introducidas y confirmadas todas las entradas, Maven termina de construir el proyecto creando un archivo `pom.xml` y archivos stub de Java.

1. Abra una ventana de terminal o línea de comandos y acceda a un directorio de su elección, como su carpeta `Desktop` o `Home`.
2. Introduzca el siguiente comando en el terminal y pulse `Enter`.

```
mvn archetype:generate \
  -DarchetypeGroupId=software.amazon.awssdk \
  -DarchetypeArtifactId=archetype-app-quickstart \
  -DarchetypeVersion=2.27.21
```

3. Introduzca el valor que aparece en la segunda columna para cada pregunta.

Petición	Valor para introducir
`Define value for property 'service':`	`s3`
`Define value for property 'httpClient' :`	`apache-client`
`Define value for property 'nativeImage' :`	`false`
`Define value for property 'credentialProvider'`	`identity-center`
`Define value for property 'groupId':`	`org.example`
`Define value for property 'artifactId':`	`getstarted`
`Define value for property 'version' 1.0-SNAPSHOT:`	*<Enter>*
`Define value for property 'package' org.example:`	*<Enter>*

4. Después de introducir el último valor, Maven muestra una lista de sus elecciones. Confirme introduciendo *Y* o vuelva a introducir los valores respondiendo con *N*

Maven crea la carpeta del proyecto llamada `getstarted` basándose en el valor `artifactId` que haya introducido. En la carpeta `getstarted`, busque un archivo `README.md` que pueda revisar, un archivo `pom.xml` y un directorio `src`.

Maven crea el árbol de directorios siguiente.

```
getstarted
### README.md
### pom.xml
### src
    ### main
    #   ### java
    #   #   ### org
    #   #       ### example
    #   #           ### App.java
    #   #           ### DependencyFactory.java
    #   #           ### Handler.java
    #   ### resources
    #       ### simplelogger.properties
    ### test
        ### java
            ### org
                ### example
                    ### HandlerTest.java

10 directories, 7 files
```

A continuación se muestra el contenido del archivo de proyecto `pom.xml`.

`pom.xml`

La sección `dependencyManagement` contiene una dependencia con el AWS SDK for Java 2.x y la sección `dependencies` una dependencia para Amazon S3. El proyecto usa Java 1.8 debido al valor `1.8` de las `maven.compiler.target` propiedades `maven.compiler.source`.

```
<?xml version="1.0" encoding="UTF-8"?>
<project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance" xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://
maven.apache.org/xsd/maven-4.0.0.xsd">
    <modelVersion>4.0.0</modelVersion>

    <groupId>org.example</groupId>
    <artifactId>getstarted</artifactId>
```

```
    <version>1.0-SNAPSHOT</version>
    <packaging>jar</packaging>
    <properties>
        <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
        <maven.compiler.source>1.8</maven.compiler.source>
        <maven.compiler.target>1.8</maven.compiler.target>
        <maven.shade.plugin.version>3.2.1</maven.shade.plugin.version>
        <maven.compiler.plugin.version>3.6.1</maven.compiler.plugin.version>
        <exec-maven-plugin.version>1.6.0</exec-maven-plugin.version>
        <aws.java.sdk.version>2.27.21</aws.java.sdk.version> <-------- SDK version
picked up from archetype version.
        <slf4j.version>1.7.28</slf4j.version>
        <junit5.version>5.8.1</junit5.version>
    </properties>

    <dependencyManagement>
        <dependencies>
            <dependency>
                <groupId>software.amazon.awssdk</groupId>
                <artifactId>bom</artifactId>
                <version>${aws.java.sdk.version}</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
        </dependencies>
    </dependencyManagement>

    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>s3</artifactId>  <-------- S3 dependency
            <exclusions>
                <exclusion>
                    <groupId>software.amazon.awssdk</groupId>
                    <artifactId>netty-nio-client</artifactId>
                </exclusion>
                <exclusion>
                    <groupId>software.amazon.awssdk</groupId>
                    <artifactId>apache-client</artifactId>
                </exclusion>
            </exclusions>
        </dependency>

        <dependency>
```

```
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>sso</artifactId> <-------- Required for identity center
authentication.
        </dependency>

        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>ssooidc</artifactId> <-------- Required for identity center
authentication.
        </dependency>

        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>apache-client</artifactId> <-------- HTTP client specified.
            <exclusions>
                <exclusion>
                    <groupId>commons-logging</groupId>
                    <artifactId>commons-logging</artifactId>
                </exclusion>
            </exclusions>
        </dependency>

        <dependency>
            <groupId>org.slf4j</groupId>
            <artifactId>slf4j-api</artifactId>
            <version>${slf4j.version}</version>
        </dependency>

        <dependency>
            <groupId>org.slf4j</groupId>
            <artifactId>slf4j-simple</artifactId>
            <version>${slf4j.version}</version>
        </dependency>

        <!-- Needed to adapt Apache Commons Logging used by Apache HTTP Client to Slf4j
to avoid
        ClassNotFoundException: org.apache.commons.logging.impl.LogFactoryImpl during
runtime -->
        <dependency>
            <groupId>org.slf4j</groupId>
            <artifactId>jcl-over-slf4j</artifactId>
            <version>${slf4j.version}</version>
        </dependency>
```

```
        <!-- Test Dependencies -->
        <dependency>
            <groupId>org.junit.jupiter</groupId>
            <artifactId>junit-jupiter</artifactId>
            <version>${junit5.version}</version>
            <scope>test</scope>
        </dependency>
    </dependencies>

    <build>
        <plugins>
            <plugin>
                <groupId>org.apache.maven.plugins</groupId>
                <artifactId>maven-compiler-plugin</artifactId>
                <version>${maven.compiler.plugin.version}</version>
            </plugin>
        </plugins>
    </build>

</project>
```

Paso 3: Escribir el código

En el código siguiente se muestra la clase App creada por Maven. El método `main` es el punto de entrada a la aplicación, que crea una instancia de la `Handler` clase y, a continuación, llama a su método `sendRequest`.

Clase **App**

```
package org.example;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

public class App {
    private static final Logger logger = LoggerFactory.getLogger(App.class);

    public static void main(String... args) {
        logger.info("Application starts");

        Handler handler = new Handler();
        handler.sendRequest();

        logger.info("Application ends");
```

```
    }
}
```

La clase `DependencyFactory` creada por Maven contiene el método de fábrica `s3Client` que crea y devuelve una instancia `S3Client`. La instancia `S3Client` usa una instancia del cliente HTTP basado en Apache. Esto se debe a que especificó `apache-client` cuando Maven preguntó qué cliente HTTP usar.

La `DependencyFactory` muestra en el siguiente código.

Clase **`DependencyFactory`**

```
package org.example;

import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.s3.S3Client;

/**
 * The module containing all dependencies required by the {@link Handler}.
 */
public class DependencyFactory {

    private DependencyFactory() {}

    /**
     * @return an instance of S3Client
     */
    public static S3Client s3Client() {
        return S3Client.builder()
                       .httpClientBuilder(ApacheHttpClient.builder())
                       .build();
    }
}
```

La clase `Handler` contiene la lógica principal del programa. Cuando se crea una instancia de `Handler` en la clase App, `DependencyFactory` proporciona el cliente de servicios `S3Client`. El código utiliza la instancia de `S3Client` para llamar al servicio Amazon S3.

Maven genera la siguiente clase `Handler` con un comentario *`TODO`*. El siguiente paso del tutorial reemplaza el *`TODO`* por código.

Clase **`Handler`**, generada por Maven

```
package org.example;

import software.amazon.awssdk.services.s3.S3Client;


public class Handler {
    private final S3Client s3Client;

    public Handler() {
        s3Client = DependencyFactory.s3Client();
    }

    public void sendRequest() {
        // TODO: invoking the api calls using s3Client.
    }
}
```

Para completar la lógica, reemplace todo el contenido de la clase `Handler` por el código siguiente. El método `sendRequest` se rellena y se añaden las importaciones necesarias.

Clase **`Handler`**, implementada

En primer lugar, el código crea un nuevo bucket de S3 con la última parte del nombre generado utilizando `System.currentTimeMillis()` para que el nombre del bucket sea único.

Tras crear el bucket en el método `createBucket()`, el programa carga un objeto mediante el método `putObject` de `S3Client`. El contenido del objeto es una cadena simple creada con el método `RequestBody.fromString`.

Por último, el programa elimina el objeto seguido del bucket del método `cleanUp`.

```
package org.example;

import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadBucketRequest;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
```

```
public class Handler {
    private final S3Client s3Client;

    public Handler() {
        s3Client = DependencyFactory.s3Client();
    }

    public void sendRequest() {
        String bucket = "bucket" + System.currentTimeMillis();
        String key = "key";

        createBucket(s3Client, bucket);

        System.out.println("Uploading object...");

        s3Client.putObject(PutObjectRequest.builder().bucket(bucket).key(key)
                        .build(),
                RequestBody.fromString("Testing with the {sdk-java}"));

        System.out.println("Upload complete");
        System.out.printf("%n");

        cleanUp(s3Client, bucket, key);

        System.out.println("Closing the connection to {S3}");
        s3Client.close();
        System.out.println("Connection closed");
        System.out.println("Exiting...");
    }

    public static void createBucket(S3Client s3Client, String bucketName) {
        try {
            s3Client.createBucket(CreateBucketRequest
                    .builder()
                    .bucket(bucketName)
                    .build());
            System.out.println("Creating bucket: " + bucketName);
            s3Client.waiter().waitUntilBucketExists(HeadBucketRequest.builder()
                    .bucket(bucketName)
                    .build());
            System.out.println(bucketName + " is ready.");
            System.out.printf("%n");
```

```
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void cleanUp(S3Client s3Client, String bucketName, String keyName) {
        System.out.println("Cleaning up...");
        try {
            System.out.println("Deleting object: " + keyName);
            DeleteObjectRequest deleteObjectRequest =
 DeleteObjectRequest.builder().bucket(bucketName).key(keyName).build();
            s3Client.deleteObject(deleteObjectRequest);
            System.out.println(keyName + " has been deleted.");
            System.out.println("Deleting bucket: " + bucketName);
            DeleteBucketRequest deleteBucketRequest =
 DeleteBucketRequest.builder().bucket(bucketName).build();
            s3Client.deleteBucket(deleteBucketRequest);
            System.out.println(bucketName + " has been deleted.");
            System.out.printf("%n");
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Cleanup complete");
        System.out.printf("%n");
    }
}
```

Paso 4: Compilar y ejecutar la aplicación

Una vez creado el proyecto y que contenga la clase `Handler` completa, compile y ejecute la aplicación.

1. Asegúrese de que tenga una sesión activa del Centro de identidades de IAM. Para ello, ejecute el AWS Command Line Interface comando `aws sts get-caller-identity` y compruebe la respuesta. Si no tiene una sesión activa, consulte esta sección para obtener instrucciones.
2. Abra una ventana de terminal o símbolo del sistema y desplácese hasta el directorio del proyecto `getstarted`.
3. Para compilar su proyecto, utilice el comando siguiente:

```
mvn clean package
```

4. Para ejecutar la aplicación, utilice el comando siguiente.

```
mvn exec:java -Dexec.mainClass="org.example.App"
```

Para ver el bucket y el objeto nuevos creados por el programa, siga los pasos descritos a continuación.

1. En `Handler.java`, comente la línea `cleanUp(s3Client, bucket, key)` del método `sendRequest` y guarde el archivo.
2. Recompile el proyecto ejecutando `mvn clean package`.
3. Vuelva a ejecutar `mvn exec:java -Dexec.mainClass="org.example.App"` para cargar el objeto de texto una vez más.
4. Inicie sesión en la consola de S3 para ver el nuevo objeto en el bucket recién creado.

Después de ver el archivo, elimine el objeto y, a continuación, elimine el bucket.

Success

Si su proyecto de Maven se creó y ejecutó sin errores, ¡enhorabuena! Ha creado correctamente su primera aplicación Java mediante SDK para Java 2.x.

Limpieza

Para limpiar los recursos que ha creado en este tutorial, haga lo siguiente:

- Si aún no lo ha hecho, en la consola de S3, elimine todos los objetos y buckets creados al ejecutar la aplicación.
- Elimine la carpeta del proyecto (`getstarted`).

Siguientes pasos

Ahora que ya ha aprendido lo básico, puede aprender lo siguiente:

- Trabajando con Amazon S3

- Trabajar con otros Amazon Web ServicesDynamoDBAmazon EC2, como y varios servicios de bases de datos
- Usar el SDK
- Seguridad para AWS SDK para Java

Configuración de clientes de servicio en AWS SDK for Java 2.x

Para acceder mediante programación Servicios de AWS, el SDK for Java 2.x utiliza un objeto de cliente para cada uno. Servicio de AWS Por ejemplo, si la aplicación necesita acceder a Amazon EC2, puede crear un objeto de cliente de Amazon EC2 (una instancia de la clase Ec2Client) para interactuar con ese servicio. A continuación, utiliza el cliente de servicio para realizar solicitudes al mismo Servicio de AWS. Para la mayoría de las aplicaciones, puede usar una instancia singleton de un cliente de servicio.

Hay muchas formas de configurar el comportamiento del SDK, pero en última instancia todo tiene que ver con el comportamiento de los clientes de servicio. Ninguna configuración tiene efecto hasta que el código cree un cliente de servicio que utilice dicha configuración.

Ejemplos de la configuración que usted proporciona son:

- Cómo se autentica tu código AWS cuando llamas a un servicio
- El Región de AWS que quieres que utilice un cliente de servicio
- Configuración de reintentos y tiempo de espera para las llamadas de servicio
- Configuración de proxy HTTP

Consulte la Guía de referencia de herramientas AWS SDKs y la configuración para conocer la configuración, las funciones y otros conceptos fundamentales comunes a muchos de AWS SDKs ellos.

Temas

- Configuración de clientes de servicio para el AWS SDK for Java 2.x exterior
- Configuración de clientes de servicio en código para AWS SDK for Java 2.x
- Utilice instancias de cliente de servicio singleton con AWS SDK for Java 2.x
- Configuración del Región de AWS para AWS SDK for Java 2.x
- Uso de proveedores de credenciales en el AWS SDK for Java 2.x
- Configure el comportamiento de reintento en el AWS SDK for Java 2.x
- Configuración de tiempos de espera en AWS SDK for Java 2.x
- Configuración de las características de observabilidad en el AWS SDK for Java 2.x

- Configuración de los puntos de conexión del cliente en AWS SDK for Java 2.x
- Configure los clientes HTTP en el AWS SDK for Java 2.x
- Utilice interceptores de ejecución en AWS SDK for Java 2.x

Configuración de clientes de servicio para el AWS SDK for Java 2.x exterior

Muchas opciones de configuración se pueden administrar fuera del código. Cuando administra la configuración de forma externa, puede aplicarse a todas las aplicaciones en el mismo proceso de Java. La mayoría de los ajustes de configuración se pueden establecer como variables de entorno, propiedades del sistema JVM o en un archivo compartido independiente. AWS `config` El archivo de `config` compartido puede mantener conjuntos de opciones independientes, denominados perfiles, para proporcionar diferentes configuraciones para distintos entornos o pruebas.

La mayoría de las variables de entorno y la configuración de los `config` archivos compartidos están estandarizadas y se comparten entre AWS SDKs sí, y son herramientas que permiten una funcionalidad uniforme en los diferentes lenguajes de programación y aplicaciones. En la mayoría de los casos, las propiedades del sistema JVM que puede usar el SDK para Java reflejan las variables de entorno.

Consulte la guía de referencia de herramientas AWS SDKs y la guía de referencia para obtener información sobre cómo configurar su aplicación mediante estos métodos, además de obtener información sobre cada configuración de varios SDK. Para ver todos los ajustes que el SDK puede resolver a partir de las variables de entorno, las propiedades del sistema JVM o los archivos de configuración, consulta la referencia sobre los ajustes en la Guía de referencia de herramientas AWS SDKs y herramientas.

Cadena de proveedores de configuración para la configuración del cliente

El SDK busca los valores de configuración en varios lugares (u orígenes).

1. Cualquier ajuste explícito establecido en el código o en el propio cliente de un servicio tiene prioridad sobre cualquier otra cosa.
2. Propiedades del sistema JVM
   - Para obtener más información sobre cómo configurar las propiedades del sistema JVM, consulte Cómo configurar las propiedades del sistema JVM en la Guía de referencia de herramientas AWS SDKs y herramientas.

3. Variables de entorno
   - Para obtener más información sobre la configuración de las variables de entorno, consulte las variables de entorno en la Guía de referencia de herramientas AWS SDKs y herramientas.
   - Tenga en cuenta que puede configurar variables de entorno para un intérprete de comandos en diferentes niveles de ámbito: todo el sistema, todos los usuarios y una sesión de terminal específica.
4. Archivos `config` y `credentials` compartidos
   - Para obtener más información sobre la configuración de estos archivos, consulte los `credentials`archivos compartidos `config` y de la AWS SDKs Guía de referencia de herramientas.
5. Los valores predeterminados proporcionados por el código fuente del SDK se utilizan en último lugar.
   - Algunas propiedades, como la región, no tienen un valor predeterminado. Debe especificarlas explícitamente en el código, en la configuración del entorno o en el archivo `config` compartido. Si el SDK no puede resolver la configuración requerida, las solicitudes de la API pueden generar errores en tiempo de ejecución.

Además de esta cadena de configuración general, el SDK de Java 2.x utiliza cadenas de proveedores especializados, como la cadena de proveedores de credenciales y la cadena de proveedores de Región de AWS. Estas cadenas especializadas agregan proveedores adicionales que tienen en cuenta el entorno en el que se ejecuta el SDK. Por ejemplo, en un contenedor o una instancia de EC2.

Creación de un cliente de servicio configurado mediante opciones externas

Debe crear un cliente de servicio en la aplicación para comunicarse con un Servicio de AWS. Los clientes de servicio son su punto de contacto esencial Servicios de AWS, ya que se encargan de todos los detalles complejos de la comunicación para que usted no tenga que preocuparse por ellos. Se ocupan automáticamente de tareas importantes como la seguridad, la gestión de errores y los reintentos, lo que le permite centrarse en crear la aplicación en lugar de lidiar con complicaciones técnicas.

Uso del método **`create()`**

Si todos los ajustes de configuración que necesita provienen de orígenes externos, puede crear un cliente de servicio con método sencillo:

```
S3Client s3Client = S3Client.create();
```

El fragmento de código anterior crea una instancia de `S3Client`. Durante la creación, el SDK busca la configuración en la cadena de proveedores de configuración. Una vez que el SDK encuentre un valor de configuración, el valor se utilizará incluso si existe una configuración que se encuentre más adelante en la cadena.

Por ejemplo, supongamos que un usuario establece la configuración de la JVM Región de AWS mediante la configuración de la propiedad `-Daws.region=us-west-2` del sistema. Si la variable de entorno `AWS_REGION` también está establecida, se ignora su valor.

La cadena de proveedores predeterminados de la región y la cadena de proveedores de credenciales predeterminados también se utilizarán en el proceso de creación. En algún punto de la cadena, el SDK debe resolver la Región de AWS que se utilizará y encontrar la configuración que le permita recuperar las credenciales para firmar las solicitudes. Si los SDKs archivos buscan esos valores, se produce un error en la creación del cliente.

Si bien puede crear un cliente mediante este patrón de compilador vacío, suele utilizarse este patrón cuando se desea añadir una configuración en código.

Variables de entorno del SDK para Java 2.x y propiedades del sistema JVM

Además de los ajustes entre varios SDK compatibles con la mayoría AWS SDKs, el SDK for Java 2.x proporciona los siguientes ajustes.

> **Note**
>
> Estas variables de entorno y propiedades del sistema JVM están destinadas principalmente a casos de uso avanzados, pruebas o escenarios de implementación específicos. En la mayor parte del código de las aplicaciones, es preferible utilizar las opciones de configuración programática que ofrecen los compiladores de clientes del SDK para mejorar la seguridad de tipos y la compatibilidad con el IDE.

Variables de entorno del proveedor de credenciales de contenedor

Además de las variables de entorno de credenciales de contenedor estándar documentadas en la guía de referencia, el SDK también admite:

`AWS_CONTAINER_SERVICE_ENDPOINT`: esta variable de entorno especifica el punto de conexión del servicio de metadatos del contenedor cuando se utiliza el proveedor de credenciales del contenedor.

Propiedades del sistema Java: `aws.containerServiceEndpoint`

Valor predeterminado: `http://169.254.170.2`

Variables de entorno de implementación del cliente HTTP

`SYNC_HTTP_SERVICE_IMPL`: identifica de forma explícita la implementación HTTP sincrónica predeterminada que utilizará el SDK. Resulta útil cuando hay varias implementaciones en la ruta de clases o para optimizar el rendimiento, ya que la detección de implementación requiere análisis de la ruta de clases.

Propiedades del sistema Java: `software.amazon.awssdk.http.service.impl`

`ASYNC_HTTP_SERVICE_IMPL`: identifica de forma explícita la implementación HTTP asincrónica predeterminada que utilizará el SDK. Resulta útil cuando hay varias implementaciones en la ruta de clases o para optimizar el rendimiento, ya que la detección de implementación requiere análisis de la ruta de clases.

Propiedades del sistema Java: `software.amazon.awssdk.http.async.service.impl`

Configuración de clientes de servicio en código para AWS SDK for Java 2.x

Como alternativa a la configuración de los clientes de servicio externamente, o como complemento a esta, puede configurarlos mediante programación en el código.

Al configurar los clientes de servicio en el código, se obtiene un control preciso de las numerosas opciones disponibles. La mayor parte de la configuración que puede establecer externamente también está disponible para establecerla en el código.

Configuración básica en código

Por ejemplo, el siguiente fragmento establece el t Región de AWS `EU_SOUTH_2` para un cliente de servicio Amazon S3 en el código:

```
S3Client s3Client = S3Client.builder()
```

```
        .region(Region.EU_SOUTH_2)
        .build();
```

El fragmento anterior muestra el método de fábrica estático, `builder()`. El método `builder()` devuelve un objeto `builder` que permite personalizar el cliente de servicio. Los métodos fluent setter devuelven el objeto `builder`, en este caso, una instancia de `S3ClientBuilder`, para que pueda encadenar fácilmente las llamadas a los métodos y para simplificar la lectura del código. Después de configurar las propiedades que desee, puede llamar al método `build()` para crear el cliente.

Configuración avanzada en código

En el siguiente fragmento de código se ven opciones de configuración adicionales:

```
ClientOverrideConfiguration clientOverrideConfiguration =
        ClientOverrideConfiguration.builder()
                .apiCallAttemptTimeout(Duration.ofSeconds(1))
                .addMetricPublisher(CloudWatchMetricPublisher.create())
                .build();

S3Client s3Client = S3Client.builder()
        .region(Region.EU_SOUTH_2)
        .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
        .overrideConfiguration(clientOverrideConfiguration)
        .httpClientBuilder(
                ApacheHttpClient.builder()
                        .maxConnections(100)
                        .connectionTimeout(Duration.ofSeconds(5))
                        .proxyConfiguration(ProxyConfiguration.builder()
                                .endpoint(URI.create("http://proxy:8080"))
                                .build())
        ).build();
```

En el fragmento anterior, puede ver varios puntos de entrada para configurar un cliente de servicio:

- Un objeto **`ClientOverrideConfiguration.Builder`** que proporciona opciones de configuración comunes a todos los clientes de servicio. Estos ajustes son comportamientos AWS específicos e independientes de cualquier implementación HTTP.
- Configuración del cliente HTTP mediante una implementación independiente del compilador de clientes HTTP. El `ApacheHttpClient.Builder` es un ejemplo. El cliente de servicio

proporciona el método `httpClientBuilder()` para asociar el cliente HTTP configurado al cliente de servicio.

- Métodos del propio compilador de clientes, como `region()` y `credentialsProvider()`

La misma configuración mediante bloques de configuración

En lugar de crear objetos separados y luego pasarlos a los métodos del cliente de servicio, AWS SDK for Java 2.x proporciona métodos que aceptan expresiones lambda para crear estos objetos en línea. Los métodos de configuración del compilador tienen el mismo nombre, pero tienen firmas diferentes. Por ejemplo:

- `overrideConfiguration(ClientOverrideConfiguration overrideConfiguration)`
- `overrideConfiguration(Consumer<ClientOverrideConfiguration.Builder> overrideConfiguration)`

La configuración del cliente de S3 que se mostró anteriormente con este método se puede realizar en un bloque de código:

```
S3Client s3Client = S3Client.builder()
        .region(Region.EU_SOUTH_2)
        .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
        .overrideConfiguration(b -> b
                .apiCallAttemptTimeout(Duration.ofSeconds(1))
                .addMetricPublisher(CloudWatchMetricPublisher.create()))
        .httpClientBuilder(ApacheHttpClient.builder()
                .maxConnections(100)
                .connectionTimeout(Duration.ofSeconds(5))
                .proxyConfiguration(ProxyConfiguration.builder()
                        .endpoint(URI.create("http://proxy:8080"))
                        .build()))
        .build();
```

Opciones de configuración no disponibles en código

Dado que la siguiente configuración afecta a procesos de inicialización fundamentales del SDK, puede establecer las siguientes opciones de configuración solo de forma externa y no en código:

Configuración de ubicación de archivos

Esta configuración controla la ubicación de los archivos de configuración y credenciales compartidos y no se puede anular mediante programación una vez que el SDK la haya cargado:

- AWS_CONFIG_FILE (variable de entorno)/AWS.configFile (propiedad del sistema JVM)
- AWS_SHARED_CREDENTIALS_FILE (variable de entorno)/aws. sharedCredentialsFile (propiedad del sistema JVM)

Estos ajustes se deben establecer antes de que el SDK cargue los archivos de configuración, ya que determinan dónde busca el SDK la configuración. Una vez inicializado el SDK, el cambio de estos valores no tiene ningún efecto.

Deshabilitación del servicio de metadatos de instancia

- AWS_EC2_METADATA_DISABLED (variable de entorno)/AWS.disableEC2Metadata (propiedad del sistema JVM)

Esta configuración controla si el SDK intenta utilizar el servicio de metadatos de instancias de EC2. Una vez que el SDK se haya inicializado, no podrá cambiar esta opción mediante programación.

Selección de perfil

- AWS_PROFILE(variable de entorno)/aws.profile (propiedad del sistema JVM)

Esta configuración indica al SDK qué perfil debe cargar desde los archivos de configuración y credenciales compartidos. Una vez cargado, el cambio de este valor no tiene ningún efecto.

Rutas de credenciales del contenedor

- AWS_CONTAINER_CREDENCIALES_URI RELATIVO
- AWS_CONTAINER_CREDENCIALES_URI COMPLETO
- AWS_CONTAINER_TOKEN DE AUTORIZACIÓN
- AWS_CONTAINER_ARCHIVO DE TOKEN DE AUTORIZACIÓN

Estas variables de entorno se utilizan para indicar al SDK cómo obtener credenciales de servicios de contenedor. Una vez que se haya establecido la cadena de proveedores de credenciales durante la inicialización del cliente de servicio, no podrá cambiar esta configuración.

Selección de implementación HTTP predeterminada

- SYNC_HTTP_SERVICE_IMPL (variable de entorno) / software.amazon.awssdk.http.service.impl (propiedad del sistema JVM)
- ASYNC_HTTP_SERVICE_IMPL (variable de entorno) / software.amazon.awssdk.http.service.impl (propiedad del sistema JVM)

Esta configuración global determina qué implementación de cliente HTTP usa el SDK para todos los clientes de servicio, a menos que se anule en código para clientes de servicio individuales. Debe configurarlos antes de que el SDK inicialice sus clientes HTTP y no se pueden cambiar posteriormente.

Utilice instancias de cliente de servicio singleton con AWS SDK for Java 2.x

Los clientes de servicio del AWS SDK for Java 2.x son seguros para subprocesos. Puede crear una instancia de cada cliente de servicio y reutilizarla en toda la aplicación. Este método mejora el rendimiento y administra los recursos de manera más eficiente.

Ventajas de los clientes de servicio singleton

Grupo de conexiones

: Los clientes de servicio mantienen grupos de conexiones HTTP internos. Crear y destruir estos grupos resulta caro. Al reutilizar los clientes, estos grupos se comparten de forma eficaz entre las solicitudes.

Reducción de la sobrecarga de inicialización

: La creación de un cliente implica cargar la configuración, establecer credenciales e inicializar componentes internos. Las instancias singleton eliminan esta sobrecarga.

Mejor aprovechamiento de los recursos

: Los clientes singleton evitan el agotamiento de recursos que puede producirse cuando se crean muchas instancias de cliente.

Creación y uso de clientes de servicio singleton

En el siguiente código de ejemplo se muestra cómo crear y utilizar un cliente del servicio:

```
// Create one instance and use it throughout the application.
public class ServiceClientSource {
    private static final S3Client s3Client = S3Client.create();

    public static S3Client getS3Client() {
        return s3Client;
    }
}
```

No cree nuevos clientes para cada operación:

```
// This approach creates unnecessary overhead.
public void badExample() {
    try (S3Client s3 = S3Client.create()) {
        s3.listBuckets();
    }
}
```

Consideraciones importantes

- Los clientes de servicio son seguros para subprocesos. Puede compartirlos de forma segura en varios subprocesos.
- Cierre los clientes solo cuando la aplicación se cierre o si ya no los necesita. Utilice `client.close()` o try-with-resources a nivel de aplicación.
- Si necesita configuraciones diferentes, como regiones o credenciales, cree instancias singleton únicas para cada configuración.

Si utiliza marcos de inyección de dependencias, como Spring, configura los clientes de servicio como beans singleton. Esto garantiza una administración adecuada del ciclo de vida.

Configuración del Región de AWS para AWS SDK for Java 2.x

Los clientes del SDK se conectan a un Servicio de AWS entorno específico Región de AWS que usted especifique al crear el cliente. Esta configuración permite que la aplicación interactúe con

recursos de AWS de esa área geográfica. Al crear un cliente de servicio sin establecer una región de forma explícita, el SDK utiliza la región predeterminada de la configuración externa.

Configure explícitamente un Región de AWS

Para configurar de forma explícita una región, le recomendamos que utilice las constantes definidas en la clase Region. Esta es una enumeración de todas las regiones disponibles públicamente.

Para crear un cliente con una región enumerada de la clase, utilice el método `region` del creador de clientes.

```
Ec2Client ec2 = Ec2Client.builder()
          .region(Region.US_WEST_2)
          .build();
```

Si la región que intenta utilizar no es una de las enumeraciones en la clase `Region`, puede crear una nueva región con el método `of` estático. Este método le permite obtener acceso a nuevas regiones sin actualizar el SDK.

```
Region newRegion = Region.of("us-east-42");
Ec2Client ec2 = Ec2Client.builder()
          .region(newRegion)
          .build();
```

> **Note**
>
> Después de crear un cliente con el generador, es inmutable y Región de AWS no se puede cambiar. Si necesita trabajar con varios Regiones de AWS para el mismo servicio, debe crear varios clientes, uno por región.

Deje que el SDK determine automáticamente el valor predeterminado Región de AWS del entorno

Cuando el código se ejecute en Amazon EC2 o AWS Lambda, tal vez, desee configurar los clientes para que usen los mismos en los Región de AWS que se ejecuta el código. Esto desvincula el código del entorno en el que se ejecuta y facilita la implementación de la aplicación en varios niveles Regiones de AWS para reducir la latencia o la redundancia.

Para usar la cadena de Región de AWS proveedores predeterminada para determinar la región a partir del entorno, utilice el método del creador de `create` clientes.

```
Ec2Client ec2 = Ec2Client.create();
```

También puede configurar el cliente de otras formas, pero no establecer la región. El SDK las recoge Región de AWS mediante la cadena de proveedores de regiones predeterminada:

```
Ec2Client ec2Client = Ec2Client.builder()
        .credentialsProvider(ProfileCredentialsProvider.builder()
                .profileName("my-profile")
                .build())
        .build();
```

Si no estableces una de forma explícita Región de AWS mediante el `region` método, el SDK consulta la cadena de proveedores de regiones predeterminada para determinar la región que se va a utilizar.

Comprender la cadena de Región de AWS proveedores predeterminada

El SDK sigue los pasos indicados a continuación para buscar una Región de AWS:

1. Cualquier región explícita establecida mediante el método `region` en el propio compilador prevalece sobre todas las demás.
2. El SDK busca la propiedad `aws.region` del sistema JVM y usa su valor si la encuentra.
3. Se comprueba la variable de entorno `AWS_REGION`. Si se ha establecido, se usa esa región para configurar el cliente.

   > **Note**
   >
   > El Lambda contenedor establece esta variable de entorno.

4. El SDK comprueba el perfil activo en los archivos de configuración y credenciales compartidos de AWS. Si la propiedad `region` está presente, el SDK la utiliza.

   El perfil `default` es el perfil activo a menos que lo anule una variable de entorno `AWS_PROFILE` o una propiedad del sistema JVM `aws.profile`. Si el SDK encuentra la propiedad `region` en ambos archivos para el mismo perfil (incluido el perfil `default`), usará el valor del archivo de credenciales compartido.

5. El SDK intenta usar el servicio de metadatos de la Amazon EC2 instancia (IMDS) para determinar la región de la Amazon EC2 instancia que se está ejecutando actualmente.
   - Para mayor seguridad, debe deshabilitar el SDK para que no intente usar la versión 1 del IMDS. Para deshabilitar la versión 1, utilice la misma configuración que se describe en la sección the section called “Con seguridad”.
6. Si el SDK todavía no ha encontrado una región en ese momento, la creación del cliente produce una excepción.

Al desarrollar AWS aplicaciones, un enfoque común consiste en utilizar el archivo de configuración compartido para establecer la región para el desarrollo local y confiar en la cadena de proveedores de regiones predeterminada para determinar la región cuando la aplicación se ejecuta en la AWS infraestructura. Esto simplifica enormemente la creación del cliente y dota de portabilidad a su aplicación.

Comprobación si un servicio está disponible en una región

Para comprobar si una determinada opción Servicio de AWS está disponible en una región, utilice el `serviceMetadata` método estático en un cliente de servicio:

```
DynamoDbClient.serviceMetadata().regions().forEach(System.out::println);
```

El fragmento anterior imprime una larga lista de Región de AWS códigos que tienen el servicio DynamoDB:

```
af-south-1
ap-east-1
ap-northeast-1
ap-northeast-2
ap-northeast-3
ap-south-1
ap-south-2
ap-southeast-1
...
```

Puede usar un código para buscar la Enumeración de clases de región correspondiente a la región que necesita que use su cliente de servicio.

Por ejemplo, si desea trabajar con DynamoDB en la región con el código `ap-northeast-2`, cree su cliente de DynamoDB con al menos la siguiente configuración:

```
DynamoDbClient ddb = DynamoDbClient.builder()
    .region(Region.AP_NORTHEAST_2)
    .build();
```

Seleccionar un punto de conexión específico

En determinadas situaciones (por ejemplo, para probar una vista previa de las funciones de un servicio antes de que pasen a estar disponibles para el público general), es posible que tenga que especificar un punto de conexión específico en una región. En estas situaciones, los clientes del servicio se pueden configurar llamando al método. `endpointOverride`

Por ejemplo, para configurar un Amazon EC2 cliente para que utilice la región de Europa (Irlanda) con un punto final específico, utilice el siguiente código.

```
Ec2Client ec2 = Ec2Client.builder()
                .region(Region.EU_WEST_1)
                .endpointOverride(URI.create("https://ec2.eu-west-1.amazonaws.com"))
                .build();
```

Consulte Regiones y puntos de enlace para ver la lista actual de regiones y sus puntos de enlace correspondientes para todos los AWS servicios.

Uso de proveedores de credenciales en el AWS SDK for Java 2.x

La función de un proveedor de credenciales en el AWS SDK for Java 2.x es obtener y suministrar credenciales a los Servicio de AWS clientes del SDK. El SDK utiliza las credenciales que obtiene para autenticarse en el servicio mediante la firma criptográfica de cada solicitud. Las credenciales suelen consistir en claves de acceso: un ID de clave de acceso y una clave de acceso secreta juntas.

Cuando utilizas credenciales temporales, que se utilizan cuando configuras la configuración del proveedor de tokens de SSO o configuras tu tiempo de ejecución para que asuma una función de IAM (AWS Identity and Access Management), por ejemplo, se añade un token de sesión a las claves de acceso, lo que proporciona un acceso a los recursos por tiempo limitado. AWS

En este tema se describen varias formas de permitir que el SDK acceda a las credenciales.

Temas

- Acceda a las credenciales para el trabajo de desarrollo interactivo mediante AWS SDK for Java 2.x

- Cadena de proveedores de credenciales predeterminada en el AWS SDK for Java 2.x
- Almacenamiento en caché de credenciales en el AWS SDK for Java 2.x
- Especifique un proveedor de credenciales específico en el AWS SDK for Java 2.x
- Utilice perfiles de configuración AWS compartidos en el AWS SDK for Java 2.x
- Cargue las credenciales de un proceso externo mediante el AWS SDK for Java 2.x
- Proporcione las credenciales en código mediante el AWS SDK for Java 2.x
- Lectura de credenciales de roles de IAM en Amazon EC2 mediante el SDK para Java 2.x

Acceda a las credenciales para el trabajo de desarrollo interactivo mediante AWS SDK for Java 2.x

Para aumentar la seguridad, se AWS recomienda configurar el SDK para Java para que utilice credenciales temporales en lugar de credenciales de larga duración. Las credenciales temporales consisten en claves de acceso (id de clave de acceso y clave de acceso secreta) y un token de sesión.

Dispone de varios métodos para trabajar con credenciales temporales. El método que utilice y, por tanto, la configuración que proporcione al SDK dependen de su caso de uso.

Cuando realice trabajos de desarrollo interactivo con el SDK de Java, le recomendamos que utilice las credenciales de inicio de sesión de AWS la consola.

Utilizar credenciales de inicio de sesión de la consola

Puede usar sus credenciales de inicio de sesión AWS de Management Console actuales para acceder a AWS los servicios mediante programación. Tras un flujo de autenticación basado en un navegador, AWS genera credenciales temporales que funcionan en todas las herramientas de desarrollo locales, como el SDK for Java 2.x AWS CLI y el SDK for Java 2.x.

Con este proceso, puede autenticarse con las credenciales raíz creadas durante la configuración inicial de la cuenta, un usuario de IAM o una identidad federada de su proveedor de identidad, y este gestiona AWS CLI automáticamente las credenciales temporales por usted. Este enfoque mejora la seguridad al eliminar la necesidad de almacenar localmente las credenciales a largo plazo.

Al ejecutar el comando `aws login`, puede seleccionar una de las sesiones de consola activas o iniciar sesión mediante el flujo de autenticación basado en el navegador, lo que generará

credenciales temporales automáticamente. El SDK for Java 2.x actualizará automáticamente estas credenciales durante un máximo de 12 horas.

> **Important**
>
> Además de la configuración que establezca en el archivo de configuración compartido que funciona para todos los proyectos, cada proyecto Java individual requiere la siguiente dependencia en el archivo Mavenpom.xml:
>
> ```
> <dependency>
>     <groupId>software.amazon.awssdk</groupId>
>     <artifactId>signin</artifactId>
> </dependency>
> ```
>
> La `signin` dependencia proporciona el código que permite al SDK para Java 2.x acceder a las credenciales de inicio de sesión de la consola y utilizarlas.

Para obtener más información sobre los requisitos previos para iniciar y cerrar sesión, consulte Iniciar sesión para el desarrollo AWS local con credenciales de consola en la Guía de referencia del AWS SDK y las herramientas.

Single-sign-on Enfoque

Al realizar trabajos de desarrollo interactivo con el SDK de Java, también puede utilizar el enfoque de inicio de sesión único. Este método requiere los siguientes recursos:

- Configuración a través del IAM Identity Center
- Configure un perfil en el archivo de configuración AWS compartido
- usar AWS CLI y ejecutar un comando para iniciar sesión y crear una sesión activa

Configuración del Identity Center de IAM

Al configurar el SDK para utilizar el acceso de inicio de sesión único al IAM Identity Center, tal como se describe en ??? de esta guía, el SDK utiliza las credenciales temporales.

El SDK utiliza el token de acceso al IAM Identity Center para acceder al rol de IAM definido con la configuración `sso_role_name` del archivo `config`. El SDK asume este rol de IAM y recupera las credenciales temporales para firmar solicitudes de Servicio de AWS .

Para obtener más información sobre cómo el SDK obtiene las credenciales temporales de la configuración, consulte la sección Cómo entender la autenticación del IAM Identity Center de la Guía de referencia sobre herramientas AWS SDKs y herramientas.

> **Important**
>
> Además de la configuración que establezca en el archivo de `config` compartido que funciona para todos los proyectos, cada proyecto de Java individual requiere las siguientes dependencias en el archivo `pom.xml`de Maven:
>
> ```
> <dependency>
>     <groupId>software.amazon.awssdk</groupId>
>     <artifactId>sso</artifactId>
> </dependency>
> <dependency>
>     <groupId>software.amazon.awssdk</groupId>
>     <artifactId>ssooidc</artifactId>
> </dependency>
> ```
>
> Las dependencias `sso` y `ssooidc` proporcionan el código que permite que el SDK para Java 2.x acceda a credenciales temporales.

Recupere las credenciales temporales del portal de AWS acceso

Como alternativa a la configuración de inicio de sesión único del IAM Identity Center, puede copiar y utilizar las credenciales temporales disponibles en el AWS portal de acceso. Puede utilizar las credenciales temporales en un perfil o como valores para las propiedades del sistema y las variables de entorno.

Configurar un archivo local de credenciales para las credenciales temporales

1. Crear un archivo de credenciales compartido.
2. En el archivo de credenciales, pegue el siguiente texto de marcador de posición hasta que pegue las credenciales temporales que funcionen.

```
[default]
aws_access_key_id=<value from AWS access portal>
aws_secret_access_key=<value from AWS access portal>
```

```
aws_session_token=<value from AWS access portal>
```

3. Guarde el archivo. El archivo `~/.aws/credentials` debería existir ahora en su sistema de desarrollo local. Este archivo contiene el perfil [predeterminado] que el SDK para Java utiliza si no se especifica un perfil con nombre específico.
4. Inicie sesión en el portal de acceso AWS
5. Siga estas instrucciones que aparecen en el apartado Actualización manual de credenciales para copiar las credenciales del rol de IAM del portal de AWS acceso.

   a. Para el paso 2 de las instrucciones vinculadas, elija `Access keys` como nombre del rol de IAM que le concede acceso para sus necesidades de desarrollo. Este rol suele tener un nombre similar PowerUserAccessal de Desarrollador.

   b. En el cuadro de diálogo modal, seleccione su sistema operativo y copie el contenido de Añadir un perfil al archivo de credenciales de AWS .
6. Pegue las credenciales copiadas en su archivo `credentials` local y elimine el nombre del perfil generado. Su archivo debería parecerse a lo siguiente.

```
[default]
aws_access_key_id=AKIAIOSFODNN7EXAMPLE
aws_secret_access_key=wJalrXUtnFEMI/K7MDENG/bPxRfiCYEXAMPLEKEY
aws_session_token=IQoJb3JpZ2luX2IQoJb3JpZ2luX2IQoJb3JpZ2luX2IQoJb3JpZ2luX2IQoJb3JpZVERYLONG
```

7. Guarde el archivo `credentials`.

Cuando el SDK para Java cree un cliente de servicio, accederá a estas credenciales temporales y las utilizará para cada solicitud. La configuración del rol de IAM elegido en el paso 5a determina el tiempo de validez de las credenciales temporales. La duración máxima es de doce horas.

Cuando las credenciales temporales caduquen, repita los pasos del 4 al 7.

Cadena de proveedores de credenciales predeterminada en el AWS SDK for Java 2.x

La cadena de proveedores de credenciales predeterminada busca AWS SDK for Java 2.x automáticamente las AWS credenciales en una secuencia predefinida de ubicaciones, lo que permite a las aplicaciones autenticarse Servicios de AWS sin especificar explícitamente las fuentes de credenciales.

La clase implementa la cadena de proveedores de credenciales predeterminada. DefaultCredentialsProvider Delega secuencialmente en otros proveedores de credenciales las implementaciones que comprueban la configuración en varias ubicaciones. El primer proveedor de credenciales que puede encontrar todos los elementos de configuración necesarios hace que la cadena finalice.

Para usar la cadena de proveedores de credenciales predeterminados para proporcionar las credenciales temporales, cree un compilador de clientes de servicio, pero no especifique un proveedor de credenciales. El siguiente fragmento de código crea una `DynamoDbClient` que utiliza la cadena de proveedores de credenciales predeterminados para localizar y recuperar los valores de configuración.

```
// Any external Region configuration is overridden.
// The SDK uses the default credentials provider chain because no specific credentials
 provider is specified.
Region region = Region.US_WEST_2;
DynamoDbClient ddb =
    DynamoDbClient.builder()
                  .region(region)
                  .build();
```

Orden de recuperación de la configuración de credenciales

La cadena predeterminada de proveedores de credenciales del SDK para Java 2.x busca la configuración en su entorno mediante una secuencia predefinida.

1. Propiedades del sistema Java
   - El SDK usa la SystemPropertyCredentialsProviderclase para cargar credenciales temporales desde las propiedades del sistema `aws.accessKeyIdaws.secretAccessKey`, y `aws.sessionToken` Java.

     > **Note**
     >
     > Para obtener información sobre cómo configurar las propiedades del sistema Java, consulte el tutorial Propiedades del sistema en el sitio web oficial de tutoriales de Java.

2. Variables de entorno

- El SDK usa la EnvironmentVariableCredentialsProviderclase para cargar credenciales temporales de las variables de `AWS_SESSION_TOKEN` entorno `AWS_ACCESS_KEY_IDAWS_SECRET_ACCESS_KEY`, y.

3. Token de identidad web y ARN del rol de IAM
   - El SDK usa la WebIdentityTokenFileCredentialsProviderclase para cargar las credenciales asumiendo un rol mediante un token de identidad web.
   - El proveedor de credenciales busca las siguientes variables de entorno o propiedades del sistema JVM:
     - `AWS_WEB_IDENTITY_TOKEN_FILE or aws.webIdentityTokenFile`
     - `AWS_ROLE_ARN` o `aws.roleArn`
     - `AWS_ROLE_SESSION_NAME` o `aws.roleSessionName` (opcional)
   - Una vez que el SDK adquiere los valores, llama al AWS Security Token Service (STS) y utiliza las credenciales temporales que devuelve para firmar las solicitudes.
   - Los entornos de ejecución, como Amazon Elastic Kubernetes Service (EKS), ponen automáticamente a disposición los tokens de identidad web, lo que permite AWS SDKs a las aplicaciones obtener credenciales temporales. AWS
4. Los archivos compartidos `credentials` y `config`
   - El SDK los utiliza ProfileCredentialsProviderpara cargar la configuración de inicio de sesión único o las credenciales temporales del `[default]` perfil de IAM Identity Center en los archivos AND compartidos. `credentials` `config`

     La guía de referencia de AWS SDKs and Tools contiene información detallada sobre cómo funciona el SDK para Java con el token de inicio de sesión único del IAM Identity Center para obtener las credenciales temporales que el SDK utiliza para llamar. Servicios de AWS

     > **Note**
     >
     > Los `config` archivos `credentials` y los comparten varias AWS SDKs herramientas. Para obtener más información, consulte The. aws/credentials and .aws/configarchivos en la Guía de referencia de AWS SDKs and Tools.

   - Dado que un perfil de los archivos compartidos `credentials` y `config` puede contener muchos conjuntos distintos de ajustes, el `ProfileCredentialsProvider` delega en otros proveedores la tarea de buscar los ajustes en el perfil de `[default]`:

- Credenciales de token de identidad web (clase `WebIdentityTokenCredentialsProvider`): cuando el perfil contiene `role_arn` y `web_identity_token_file`.
- Credenciales de SSO (clase`SsoCredentialsProvider`): cuando el perfil contiene propiedades relacionadas con SSO, como `sso_role_name`, `sso_account_id`.
- Credenciales basadas en roles con perfil de origen (clase `StsAssumeRoleCredentialsProvider`): cuando el perfil contiene `role_arn` y `source_profile`.
- Credenciales basadas en roles con origen de credenciales (clase `StsAssumeRoleWithSourceCredentialsProvider`): cuando el perfil contiene `role_arn` y `credential_source`.
  - Cuando `credential_source = Environment`: utiliza una cadena de `SystemPropertyCredentialsProvider` y `EnvironmentVariableCredentialsProvider`
  - Cuando `credential_source = Ec2InstanceMetadata`: utiliza `InstanceProfileCredentialsProvider`
  - Cuando `credential_source = EcsContainer`: utiliza `ContainerCredentialsProvider`
- Credenciales de inicio de sesión en la consola (clase`LoginCredentialsProvider`): cuando el perfil contiene `login_session`
- Credenciales de proceso (clase `ProcessCredentialsProvider`): cuando el perfil contiene `credential_process`.
- Credenciales de sesión (clase `StaticSessionCredentialsProvider`): cuando el perfil contiene `aws_access_key_id`, `aws_secret_access_key` y `aws_session_token`.
- Credenciales básicas (clase `StaticCredentialsProvider`): cuando el perfil contiene `aws_access_key_id` y `aws_secret_access_key`.

5. Amazon ECS credenciales del contenedor

- El SDK usa la ContainerCredentialsProviderclase para cargar credenciales temporales mediante las siguientes variables de entorno:

  a. `AWS_CONTAINER_CREDENTIALS_RELATIVE_URI` o `AWS_CONTAINER_CREDENTIALS_FULL_URI`

  b. `AWS_CONTAINER_AUTHORIZATION_TOKEN_FILE` o `AWS_CONTAINER_AUTHORIZATION_TOKEN`

El agente contenedor de ECS establece automáticamente la variable de entorno `AWS_CONTAINER_CREDENTIALS_RELATIVE_URI`, que apunta al punto de conexión de credenciales de ECS. Las demás variables de entorno suelen configurarse en escenarios específicos en los que no se utiliza el punto de conexión de credenciales de ECS estándar.

6. Amazon EC2 credenciales proporcionadas por el rol de IAM de instancia
   - El SDK usa la InstanceProfileCredentialsProviderclase para cargar credenciales temporales desde el Amazon EC2 servicio de metadatos.
7. Si el SDK no encuentra los ajustes de configuración necesarios siguiendo todos los pasos enumerados anteriormente, lanza una excepción con una salida similar a la siguiente:

```
software.amazon.awssdk.core.exception.SdkClientException: Unable to load credentials
 from any of the providers
in the chain
 AwsCredentialsProviderChain(credentialsProviders=[SystemPropertyCredentialsProvider(),
EnvironmentVariableCredentialsProvider(), WebIdentityTokenCredentialsProvider(),
 ProfileCredentialsProvider(),
ContainerCredentialsProvider(), InstanceProfileCredentialsProvider()])
```

Uso del **`DefaultCredentialsProvider`** in código

Puede utilizar explícitamente la cadena de proveedores de credenciales predeterminados en el código. Esto equivale funcionalmente a no especificar ningún proveedor de credenciales, ya que el SDK usa `DefaultCredentialsProvider` de forma predeterminada. Sin embargo, su uso explícito puede hacer que el código sea más legible y autodocumentado. Muestra claramente su intención de utilizar la cadena de credenciales predeterminadas.

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;

public class ExplicitDefaultCredentialsExample {
    public static void main(String[] args) {
        // Explicitly create the DefaultCredentialsProvider.
        DefaultCredentialsProvider defaultCredentialsProvider =
 DefaultCredentialsProvider
                                                                .builder().build();

        // Use it with any service client.
```

```
        S3Client s3Client = S3Client.builder()
            .region(Region.US_WEST_2)
            .credentialsProvider(defaultCredentialsProvider)
            .build();

        // Now you can use the client with the default credentials chain.
        s3Client.listBuckets();
    }
}
```

Al crear el proveedor de credenciales predeterminado, puede proporcionar más configuraciones:

```
DefaultCredentialsProvider customizedProvider = DefaultCredentialsProvider.builder()
    .profileName("custom-profile")  // Use a specific profile if the chain gets to the
 `ProfileCredentialsProvider` stage.
    .asyncCredentialUpdateEnabled(true)  // Enable async credential updates.
    .build();
```

Este método le brinda más control y, al mismo tiempo, le brinda la comodidad de la cadena de credenciales predeterminadas.

Almacenamiento en caché de credenciales en el AWS SDK for Java 2.x

AWS SDK for Java 2.x Implementa el almacenamiento en caché de credenciales para mejorar el rendimiento y reducir las llamadas a las fuentes de credenciales. En esta sección se explica cómo funciona el almacenamiento en caché de credenciales y cómo puede configurarlo para sus aplicaciones.

Descripción del almacenamiento en caché de proveedores de credenciales

Los proveedores de credenciales del SDK para Java 2.x utilizan diferentes estrategias de almacenamiento en caché:

- Almacenamiento interno de credenciales en caché: muchos proveedores almacenan en caché las credenciales que recuperan.
- Actualización automática: los proveedores con credenciales almacenadas en caché implementan mecanismos de actualización.

Proveedores con almacenamiento interno de credenciales en caché

Los siguientes proveedores de credenciales almacenan internamente credenciales en caché, incluso cuando se crean nuevas instancias:

- Proveedor de credenciales del perfil de instancia: almacena en caché las credenciales del servicio de metadatos de Amazon EC2.
- Proveedor de credenciales del contenedor: almacena en caché las credenciales del punto de conexión de metadatos del contenedor.
- Proveedores basados en STS: almacenan en caché las credenciales temporales de AWS Security Token Service (STS).
- Proveedores de tokens de identidad web: almacenan en caché las credenciales obtenidas de los tokens de identidad web.
- Proveedor de credenciales de procesos: almacena en caché las credenciales de procesos externos.

Proveedores sin almacenamiento interno en caché

Los siguientes proveedores no implementan el almacenamiento interno en caché:

- Proveedor de credenciales de variables de entorno
- Proveedor de credenciales de propiedades del sistema
- Proveedor de credenciales estáticas

Configuración del almacenamiento en caché de credenciales

Puede personalizar el comportamiento del almacenamiento en caché al crear proveedores de credenciales:

Tiempo de obsolescencia

Controla cuándo se consideran obsoletas las credenciales y deben actualizarse:

```
.staleTime(Duration.ofMinutes(2))  // Consider stale 2 minutes before expiration.
```

Tiempo de captura previa

Determina cuándo empezar a actualizar las credenciales antes de que caduquen:

```
.prefetchTime(Duration.ofMinutes(10))  // Start refresh 10 minutes before expiration.
```

Actualizaciones asincrónicas

Habilita la actualización de credenciales en segundo plano:

```
.asyncCredentialUpdateEnabled(true)  // Refresh credentials in background thread.
```

Duración de la sesión

En el caso de los proveedores basados en STS, controla el tiempo que permanecen válidas las credenciales temporales:

```
.refreshRequest(r -> r.durationSeconds(3600))  // 1 hour session.
```

Ejemplo de configuración de credenciales de almacenamiento en caché

Como ejemplo de configuración del almacenamiento en caché para la implementación de proveedores de credenciales, es recomendable que el SDK utilice un subproceso en segundo plano para recuperar previamente (por adelantado) las credenciales antes de que caduquen. De esta forma, puede evitar la llamada bloqueante que recupera credenciales nuevas.

A continuación se muestra un ejemplo que crea un `StsAssumeRoleCredentialsProvider` que utiliza un subproceso en segundo plano para capturar previamente credenciales estableciendo la propiedad `asyncCredentialUpdateEnabled` en `true` en el compilador:

```
StsAssumeRoleCredentialsProvider provider = StsAssumeRoleCredentialsProvider.builder()
    .refreshRequest(r -> r
        .roleArn("arn:aws:iam::111122223333:role/example-role")
        .roleSessionName("example-session")
        .durationSeconds(3600))  // 1 hour session
    .staleTime(Duration.ofMinutes(5))  // Consider stale 5 minutes before expiration
    .prefetchTime(Duration.ofMinutes(10))  // Start refresh 10 minutes before
 expiration
    .asyncCredentialUpdateEnabled(true)  // Refresh in background
    .build();

S3Client s3 = S3Client.builder()
    .credentialsProvider(provider)
```

```
    .build();
```

Cuando se invoca una operación `s3Client` por primera vez, `AssumeRoleRequest` se envía una al AWS Security Token Service (STS). STS devuelve credenciales temporales que son válidas durante 15 minutos (900 segundos). La instancia `s3Client` usa las credenciales almacenadas en caché hasta que llegue el momento de actualizarlas antes de que transcurran 15 minutos. De forma predeterminada, el SDK intenta recuperar las credenciales nuevas para una nueva sesión entre 5 minutos y 1 minuto antes de la fecha de caducidad de la sesión actual. La ventana de captura previa se puede configurar mediante las propiedades `prefetchTime` y `staleTime`.

Puede configurar de forma similar los siguientes proveedores de credenciales basados en sesiones:

- `StsWebIdentityTokenFileCredentialsProvider`
- `StsGetSessionTokenCredentialsProvider`
- `StsGetFederationTokenCredentialsProvider`
- `StsAssumeRoleWithWebIdentityCredentialsProvider`
- `StsAssumeRoleWithSamlCredentialsProvider`
- `StsAssumeRoleCredentialsProvider`
- `DefaultCredentialsProvider` (cuando delega en el proveedor de credenciales que usa sesiones)
- `ProcessCredentialsProvider`
- `WebIdentityTokenFileCredentialsProvider`
- `ContainerCredentialsProvider`
- `InstanceProfileCredentialsProvider`

Comprender el almacenamiento en caché de credenciales le ayuda a optimizar el rendimiento y la fiabilidad de su aplicación al trabajar con ella. Servicios de AWS

Especifique un proveedor de credenciales específico en el AWS SDK for Java 2.x

Si bien la cadena de proveedores de credenciales predeterminados es práctica en muchos escenarios, especificar los proveedores de credenciales de forma explícita le permite tener un mayor control sobre el comportamiento, el rendimiento y la seguridad de la autenticación.

Entre los motivos para especificar un proveedor de credenciales se incluyen los siguientes:

- La cadena de proveedores predeterminados comprueba varias fuentes de forma secuencial, lo que puede aumentar la latencia:

```
// The default provider chain checks might check multiple sources until it finds
// sufficient configuration.
S3Client s3Client = S3Client.builder().build();

// You can specify exactly where to look.
S3Client optimizedClient = S3Client.builder()
    .credentialsProvider(InstanceProfileCredentialsProvider.create())
    .build();
```

- Debe utilizar ubicaciones no estándar para acceder a la configuración de credenciales:

```
// Use configuration from a custom file location.
S3Client s3Client = S3Client.builder()
    .credentialsProvider(ProfileCredentialsProvider.builder()
            .profileFile(ProfileFile.builder()
                    .content(Paths.get("/custom/path/to/configuration/file"))
                    .type(ProfileFile.Type.CONFIGURATION) // Expects all non-default
 profiles to be prefixed with "profile".
                    .build())
            .profileName("custom")
            .build())
    .build();
```

- Utilice credenciales diferentes para diferentes clientes de servicio. Por ejemplo, si la aplicación necesita acceder a varias AWS cuentas o usar permisos diferentes para distintos servicios:

```
// S3 client using one set of credentials.
S3Client s3Client = S3Client.builder()
    .credentialsProvider(ProfileCredentialsProvider.create("s3-readonly"))
    .build();

// DynamoDB client using different credentials.
DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
    .credentialsProvider(ProfileCredentialsProvider.create("dynamodb-admin"))
    .build();
```

- Controle el comportamiento de actualización de credenciales:

```
// Create a provider with custom refresh behavior.
```

```
StsAssumeRoleCredentialsProvider customRefreshProvider =
    StsAssumeRoleCredentialsProvider.builder()
        .refreshRequest(AssumeRoleRequest.builder()
            .roleArn("arn:aws:iam::123456789012:role/my-role")
            .roleSessionName("custom-session")
            .build())
        .stsClient(StsClient.create())
        .asyncCredentialUpdateEnabled(true) // Use a background thread to prefetch
 credentials.
        .build();

S3Client s3Client = S3Client.builder()
    .credentialsProvider(customRefreshProvider)
    .build();
```

Utilice perfiles de configuración AWS compartidos en el AWS SDK for Java 2.x

Utilizando el archivo compartido de `credentials` y `config`, puede configurar varios perfiles. Esto posibilita que su aplicación utilice varios conjuntos de configuración de credenciales. El perfil `[default]` se mencionó anteriormente. El SDK usa la ProfileCredentialsProviderclase para cargar la configuración de los perfiles definidos en el `credentials` archivo compartido.

El siguiente fragmento de código muestra cómo crear un cliente de servicio que utilice la configuración definida como parte del perfil denominado `my_profile`.

```
Region region = Region.US_WEST_2;
DynamoDbClient ddb = DynamoDbClient.builder()
      .region(region)
      .credentialsProvider(ProfileCredentialsProvider.create("my_profile"))
      .build();
```

Establecer un perfil predeterminado diferente

Para establecer como predeterminado un perfil distinto del perfil `[default]` para su aplicación, defina la variable de entorno `AWS_PROFILE` con el nombre de su perfil personalizado.

Para establecer esta variable en Linux, MacOS, o Unix, utilice `export`:

```
export AWS_PROFILE="other_profile"
```

Para establecer estas variables en Windows, utilice `set`:

```
set AWS_PROFILE="other_profile"
```

Como alternativa, defina la propiedad del sistema Java `aws.profile` con el nombre del perfil.

Volver a cargar credenciales del perfil

Puede configurar cualquier proveedor de credenciales que tenga un método `profileFile()` en su generador para volver a cargar las credenciales del perfil. Estas clases de perfiles de credenciales son: `ProfileCredentialsProvider`, `DefaultCredentialsProvider`, `InstanceProfileCredentialsProvider` y `ProfileTokenProvider`.

> **Note**
>
> La recarga de credenciales de perfil solo funciona con los siguientes ajustes en el archivo de perfil: `aws_access_key_id`, `aws_secret_access_key` y `aws_session_token`. Los ajustes de `region`, `sso_session`, `sso_account_id` y `source_profile` no se tienen en cuenta.

Para configurar un proveedor de credenciales compatible para volver a cargar la configuración del perfil, proporcione una instancia del `ProfileFileSupplier` al método de creación del `profileFile()`. El siguiente ejemplo de código demuestra un `ProfileCredentialsProvider` que recarga la configuración de credenciales desde el perfil `[default]`.

```
ProfileCredentialsProvider provider = ProfileCredentialsProvider
    .builder()
    .profileFile(ProfileFileSupplier.defaultSupplier())
    .build();

// Set up a service client with the provider instance.
DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
                    .region(Region.US_EAST_1)
                    .credentialsProvider(provider)
                    .build();

/*
    Before dynamoDbClient makes a request, it reloads the credentials settings
    by calling provider.resolveCredentials().
```

```
*/
```

Cuando se llama a `ProfileCredentialsProvider.resolveCredentials()`, el SDK para Java vuelve a cargar la configuración. `ProfileFileSupplier.defaultSupplier()` es una de las diversas implementaciones prácticas de `ProfileFileSupplier` ofrecidas por el SDK. Si su caso lo requiere, puede proporcionar su propia implementación.

En el ejemplo siguiente, se muestra el uso del método de conveniencia `ProfileFileSupplier.reloadWhenModified()`. `reloadWhenModified()` toma un parámetro `Path`, lo que le da flexibilidad a la hora de designar el archivo de origen de la configuración en lugar de la ubicación estándar `~/.aws/credentials` (o `config`).

La configuración se volverá a cargar cuando `resolveCredentials()` se invoque solo si el SDK determina que el contenido del archivo se ha modificado.

```
Path credentialsFilePath = ...

ProfileCredentialsProvider provider = ProfileCredentialsProvider
    .builder()
    .profileFile(ProfileFileSupplier.reloadWhenModified(credentialsFilePath,
 ProfileFile.Type.CREDENTIALS))
    .profileName("my-profile")
    .build();
/*
    A service client configured with the provider instance calls
 provider.resolveCredential()
    before each request.
*/
```

El método `ProfileFileSupplier.aggregate()` combina el contenido de varios archivos de configuración. Usted decide si un archivo se vuelve a cargar por cada llamada a `resolveCredentials()` o si la configuración de un archivo se fija en el momento en que se leyó por primera vez.

El siguiente ejemplo muestra un `DefaultCredentialsProvider` que combina la configuración de dos archivos que contienen la configuración del perfil. El SDK vuelve a cargar la configuración del archivo al que apunta la variable `credentialsFilePath` cada vez que se llama a `resolveCredentials()` y cambia la configuración. La configuración del objeto `profileFile` sigue siendo la misma.

```
Path credentialsFilePath = ...;
ProfileFile profileFile = ...;

DefaultCredentialsProvider provider = DefaultCredentialsProvider
        .builder()
        .profileFile(ProfileFileSupplier.aggregate(
                ProfileFileSupplier.reloadWhenModified(credentialsFilePath,
 ProfileFile.Type.CREDENTIALS),
                ProfileFileSupplier.fixedProfileFile(profileFile)))
        .profileName("my-profile")
        .build();
/*
    A service client configured with the provider instance calls
 provider.resolveCredential()
    before each request.
*/
```

Cargue las credenciales de un proceso externo mediante el AWS SDK for Java 2.x

> **Warning**
>
> A continuación se describe un método para obtener credenciales de un proceso externo. Esto resulta potencialmente peligroso, así que proceda con precaución. Recomendamos utilizar otros proveedores de credenciales si es posible. Si usa esta opción, es recomendable asegurarse de que el archivo `config` esté lo más bloqueado posible siguiendo las prácticas recomendadas de seguridad del sistema operativo.
>
> Asegúrese de que su herramienta de credenciales personalizadas no escriba ninguna información secreta en ella`StdErr`. SDKs y AWS CLI puede capturar y registrar dicha información, lo que podría exponerla a usuarios no autorizados.

Con el SDK para Java 2.x, puede adquirir credenciales temporales de un proceso externo para casos de uso personalizados. Hay dos formas de configurar esta funcionalidad.

Usar la configuración de **`credential_process`**

Si tiene un método que proporciona credenciales temporales, puede integrarlo añadiendo la configuración de `credential_process` como parte de una definición de perfil en el archivo

`config`. El valor que especifique debe utilizar la ruta completa al archivo de comandos. Si la ruta del archivo contiene espacios, debe escribirla entre comillas.

El SDK llama al comando exactamente como se especifica y, a continuación, lee los datos JSON desde `stdout`.

Los ejemplos siguientes muestran el uso de esta configuración para las rutas de archivos sin espacios y las rutas de archivos con espacios.

Linux/macOS

Sin espacios en la ruta del archivo

```
[profile process-credential-profile]
credential_process = /path/to/credential/file/credential_file.sh --custom-command
 custom_parameter
```

Con espacios en la ruta del archivo

```
[profile process-credential-profile]
credential_process = "/path/with/space to/credential/file/credential_file.sh" --
custom-command custom_parameter
```

Windows

Sin espacios en la ruta del archivo

```
[profile process-credential-profile]
credential_process = C:\Path\To\credentials.cmd --custom_command custom_parameter
```

Con espacios en la ruta del archivo

```
[profile process-credential-profile]
credential_process = "C:\Path\With Space To\credentials.cmd" --custom_command
 custom_parameter
```

El siguiente fragmento de código muestra cómo crear un cliente de servicio que utilice la configuración definida como parte del perfil denominado `process-credential-profile`.

```
Region region = Region.US_WEST_2;
S3Client s3Client = S3Client.builder()
      .region(region)
      .credentialsProvider(ProfileCredentialsProvider.create("process-credential-
profile"))
      .build();
```

Para obtener información detallada sobre el uso de un proceso externo como fuente de credenciales temporales, consulte la sección sobre credenciales de procesos de la Guía de referencia sobre herramientas AWS SDKs y herramientas.

Utilizar un **`ProcessCredentialsProvider`**.

Como alternativa al uso de la configuración del archivo `config`, puede usar los `ProcessCredentialsProvider` del SDK para cargar credenciales temporales mediante Java.

Los siguientes ejemplos muestran varias versiones de cómo especificar un proceso externo utilizando el `ProcessCredentialsProvider` y configurando un cliente de servicio que utilice las credenciales temporales.

Linux/macOS

Sin espacios en la ruta del archivo

```
ProcessCredentialsProvider credentials =
    ProcessCredentialsProvider
        .builder()
        .command("/path/to/credentials.sh optional_param1 optional_param2")
        .build();

S3Client s3 = S3Client.builder()
                    .region(Region.US_WEST_2)
                    .credentialsProvider(credentials)
                    .build();
```

Con espacios en la ruta del archivo

```
ProcessCredentialsProvider credentials =
    ProcessCredentialsProvider
        .builder()
        .command("/path\\ with\\ spaces\\ to/credentials.sh optional_param1
 optional_param2")
```

```
        .build();

S3Client s3 = S3Client.builder()
                      .region(Region.US_WEST_2)
                      .credentialsProvider(credentials)
                      .build();
```

Windows

Sin espacios en la ruta del archivo

```
ProcessCredentialsProvider credentials =
    ProcessCredentialsProvider
        .builder()
        .command("C:\\Path\\To\\credentials.exe optional_param1 optional_param2")
        .build();

S3Client s3 = S3Client.builder()
                      .region(Region.US_WEST_2)
                      .credentialsProvider(credentials)
                      .build();
```

Con espacios en la ruta del archivo

```
ProcessCredentialsProvider credentials =
    ProcessCredentialsProvider
        .builder()
        .command("\"C:\\Path\\With Spaces To\\credentials.exe\" optional_param1
 optional_param2")
        .build();

S3Client s3 = S3Client.builder()
                      .region(Region.US_WEST_2)
                      .credentialsProvider(credentials)
                      .build();
```

Uso IAM Roles Anywhere en autenticación

IAM Roles Anywhere le permite obtener AWS credenciales temporales para cargas de trabajo Servicio de AWS que se ejecutan fuera de él. AWS Permite el acceso seguro a recursos de AWS desde entornos locales o de otro tipo en la nube.

Antes de poder autenticar las solicitudes con IAM Roles Anywhere, debe recopilar la información necesaria y descargar la herramienta ayudante de credenciales. Siga las instrucciones de Introducción de la Guía del usuario de IAM Roles Anywhere para crear los artefactos necesarios.

El SDK para Java no tiene un proveedor de credenciales dedicado para recuperar credenciales temporales de IAM Roles Anywhere, pero puede utilizar la herramienta ayudante de credenciales junto con una de las opciones para recuperar credenciales de un proceso externo.

Uso del ajuste **`credential_process`** en un perfil

En el siguiente fragmento del archivo de AWS configuración compartido, se muestra un nombre de perfil `roles_anywhere` que utiliza la configuración: `credential_process`

```
[profile roles_anywhere]
credential_process = ./aws_signing_helper credential-process \
  --certificate /path/to/certificate \
  --private-key /path/to/private-key \
  --trust-anchor-arn arn:aws:rolesanywhere:region:account:trust-anchor/TA_ID \
  --profile-arn arn:aws:rolesanywhere:region:account:profile/PROFILE_ID \
  --role-arn arn:aws:iam::account:role/role-name-with-path
```

Debe reemplazar el texto que se muestra en rojo por sus valores después de haber ensamblado todos los artefactos. El primer elemento de la configuración, `aws_signing_helper` es el ejecutable de la herramienta ayudante de credenciales y `credential-process` es el comando.

Al configurar un cliente de servicio para que use el perfil `roles_anywhere`, como se muestra en el siguiente código, el SDK almacena en caché las credenciales temporales y las actualiza antes de que caduquen:

```
S3Client s3Client = S3Client.builder()
    .credentialsProvider(ProfileCredentialsProvider.builder()
        .profileName("roles_anywhere").build())
    .build();
```

Configuración de un **`ProcessCredentialsProvider`**

Como se muestra a continuación, puede utilizar un método de solo código con el `ProcessCredentialsProvider` en lugar de utilizar la configuración del perfil:

```
ProcessCredentialsProvider processCredentialsProvider =
 ProcessCredentialsProvider.builder()
    .command("""
            ./aws_signing_helper credential-process \
            --certificate /path/to/certificate \
            --private-key /path/to/private-key \
            --trust-anchor-arn arn:aws:rolesanywhere:region:account:trust-anchor/TA_ID
 \
            --profile-arn arn:aws:rolesanywhere:region:account:profile/PROFILE_ID \
            --role-arn arn:aws:iam::account:role/role-name-with-path
        """).build();

S3Client s3Client = S3Client.builder()
    .credentialsProvider(processCredentialsProvider)
    .build();
```

Reemplace el texto que se muestra en rojo por sus valores después de haber ensamblado todos los artefactos.

Proporcione las credenciales en código mediante el AWS SDK for Java 2.x

Si la cadena de credenciales predeterminada o un proveedor o cadena de proveedores específicos o personalizados no funcionan para su código, puede proporcionar mediante código las credenciales temporales que desee. Pueden ser credenciales de rol de IAM, tal como se describió anteriormente, o credenciales temporales recuperadas de AWS Security Token Service ()AWS STS. Si ha obtenido credenciales temporales utilizando AWS STS, entréguelas a un Servicio de AWS cliente, tal y como se muestra en el siguiente ejemplo de código.

1. Asuma un rol llamando a `StsClient.assumeRole()`.
2. Cree un StaticCredentialsProviderobjeto y suministre el `AwsSessionCredentials` objeto.
3. Configure el compilador del cliente con `StaticCredentialsProvider` y compile el cliente.

En el siguiente ejemplo, se crea un cliente de servicio Amazon S3 con las credenciales temporales devueltas AWS STS por un rol asumido por IAM.

```
   // The AWS IAM Identity Center identity (user) who executes this method does not
have permission to list buckets.
   // The identity is configured in the [default] profile.
   public static void assumeRole(String roleArn, String roleSessionName) {
       // The IAM role represented by the 'roleArn' parameter can be assumed by
identities in two different accounts
       // and the role permits the user to only list buckets.

       // The SDK's default credentials provider chain will find the single sign-on
settings in the [default] profile.
       // The identity configured with the [default] profile needs permission to call
AssumeRole on the STS service.
       try {
           Credentials tempRoleCredentials;
           try (StsClient stsClient = StsClient.create()) {
               AssumeRoleRequest roleRequest = AssumeRoleRequest.builder()
                       .roleArn(roleArn)
                       .roleSessionName(roleSessionName)
                       .build();

               AssumeRoleResponse roleResponse = stsClient.assumeRole(roleRequest);
               tempRoleCredentials = roleResponse.credentials();
           }
           // Use the following temporary credential items for the S3 client.
           String key = tempRoleCredentials.accessKeyId();
           String secKey = tempRoleCredentials.secretAccessKey();
           String secToken = tempRoleCredentials.sessionToken();

           // List all buckets in the account associated with the assumed role
           // by using the temporary credentials retrieved by invoking
stsClient.assumeRole().
           StaticCredentialsProvider staticCredentialsProvider =
StaticCredentialsProvider.create(
                   AwsSessionCredentials.create(key, secKey, secToken));
           try (S3Client s3 = S3Client.builder()
                   .credentialsProvider(staticCredentialsProvider)
                   .build()) {
               List<Bucket> buckets = s3.listBuckets().buckets();
               for (Bucket bucket : buckets) {
                   System.out.println("bucket name: " + bucket.name());
               }
           }
       } catch (StsException | S3Exception e) {
```

```
            logger.error(e.getMessage());
            System.exit(1);
        }
    }
```

Conjunto de permisos

El siguiente conjunto de permisos, definido en, AWS IAM Identity Center permite a la identidad (usuario) realizar las dos operaciones siguientes

1. La `GetObject` operación del Amazon Simple Storage Service.
2. La operación `AssumeRole` del AWS Security Token Service.

Sin asumir el rol, fallaría el método `s3.listBuckets()` que se muestra en el ejemplo.

JSON

```
{
 "Version":"2012-10-17",
 "Statement": [
  {
   "Effect": "Allow",
   "Action": [
    "s3:GetObject",
    "sts:AssumeRole"
   ],
   "Resource": [
    "*"
   ]
  }
 ]
}
```

Rol asumido

Política de permisos del rol asumidos

La política de permisos siguiente está asociada al rol que se asume en el ejemplo anterior. Esta política de permisos permite enumerar todos los buckets de la misma cuenta que el rol.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": [
                "s3:ListAllMyBuckets"
            ],
            "Resource": [
                "*"
            ]
        }
    ]
}
```

Política de confianza del rol asumido

La política de permisos siguiente está asociada al rol que se asume en el ejemplo anterior. La política permite que las identidades (usuarios) de dos cuentas asuman el rol.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Principal": {
                "AWS": [
                    "arn:aws:iam::111122223333:root",
                    "arn:aws:iam::555555555555:root"
                ]
            },
            "Action": "sts:AssumeRole",
            "Condition": {}
        }
    ]
}
```

Lectura de credenciales de roles de IAM en Amazon EC2 mediante el SDK para Java 2.x

Puede utilizar una función de IAM para administrar las credenciales temporales de las aplicaciones que se ejecutan en una instancia EC2 y que realizan solicitudes a la API AWS CLI . AWS Es preferible hacerlo de este modo a almacenar claves de acceso en la instancia de EC2. Para asignar un AWS rol a una instancia EC2 y ponerlo a disposición de todas sus aplicaciones, debe crear un perfil de instancia adjunto a la instancia. Un perfil de instancia contiene el rol y permite a los programas que se ejecutan en la instancia de EC2 obtener credenciales temporales. Para obtener más información, consulte Uso de un rol de IAM para conceder permisos a aplicaciones que se ejecutan en instancias Amazon EC2 en la Guía del usuario de IAM.

En este tema se proporciona información sobre cómo configurar la aplicación Java para que se ejecute en una instancia EC2 y permitir que adquiera las AWS SDK for Java 2.x credenciales del IAM rol.

Adquisición de credenciales de roles de IAM desde el entorno

Si la aplicación crea un cliente de AWS servicio mediante el `create` método (o `builder().build()` los métodos), el SDK para Java utiliza la cadena de proveedores de credenciales predeterminada. La cadena de proveedores de credenciales predeterminados busca en el entorno de ejecución elementos de configuración que el SDK pueda intercambiar por credenciales temporales. En la sección the section called “Cadena predeterminada de proveedores de credenciales” se describe el proceso de búsqueda completo.

El último paso de la cadena de proveedores predeterminada solo está disponible cuando la aplicación se ejecuta en una Amazon EC2 instancia. En este paso, el SDK utiliza un `InstanceProfileCredentialsProvider` para leer el rol de IAM definido en el perfil de la instancia EC2. A continuación, el SDK adquiere las credenciales temporales para ese rol de IAM.

Aunque estas credenciales son temporales y acaban caducando, un `InstanceProfileCredentialsProvider` las actualiza periódicamente para que sigan permitiendo el acceso a AWS.

Adquisición de credenciales de roles de IAM mediante programación

Como alternativa a la cadena de proveedores de credenciales predeterminados que eventualmente utiliza un `InstanceProfileCredentialsProvider` en EC2, puede configurar un cliente de

servicio de forma explícita con un `InstanceProfileCredentialsProvider`. Este método se muestra en el fragmento de código siguiente.

```
S3Client s3 = S3Client.builder()
       .credentialsProvider(InstanceProfileCredentialsProvider.create())
       .build();
```

Adquisición segura de credenciales de roles de IAM

De forma predeterminada, las instancias de EC2 ejecutan IMDS (Instance Metadata Service), que permite al `InstanceProfileCredentialsProvider` de los SDK acceder a información como el rol de IAM que se ha configurado. Las instancias de EC2 ejecutan dos versiones del IMDS de forma predeterminada:

- Instance Metadata Service, versión 1 (IMDSv1): un request/response método
- Instance Metadata Service, versión 2 (IMDSv2): un método orientado a la sesión

IMDSv2 es un enfoque más seguro que. IMDSv1

De forma predeterminada, el SDK de Java primero IMDSv2 intenta obtener el rol de IAM, pero si no lo consigue, lo intenta IMDSv1. Sin embargo, dado que IMDSv1 es menos seguro, se AWS recomienda usar IMDSv2 únicamente e inhabilitar el SDK para que no lo intente IMDSv1.

Para utilizar un enfoque más seguro, deshabilite el uso del SDK IMDSv1 proporcionando una de las siguientes configuraciones con un valor de`true`.

- Variable de entorno: `AWS_EC2_METADATA_V1_DISABLED`
- Propiedad del sistema JVM: aws.`disableEc2MetadataV1`
- Ajuste del archivo de configuración compartido: `ec2_metadata_v1_disabled`

Si se establece una de estas configuraciones en`true`, el SDK no carga las credenciales del rol de IMDS IMDSv1 si se produce un error en la IMDSv2 llamada inicial.

Configure el comportamiento de reintento en el AWS SDK for Java 2.x

Las llamadas a Servicios de AWS pueden fallar ocasionalmente por motivos inesperados. Pueden producirse algunos errores, como la limitación (se supera la frecuencia) o los errores transitorios, si se vuelve a intentar la llamada. AWS SDK for Java 2.x cuenta con un mecanismo integrado para detectar estos errores y reintentar automáticamente la llamada que está habilitado de forma predeterminada para todos los clientes.

En esta página se describe cómo funciona, cómo configurar los distintos modos y personalizar el comportamiento de reintento.

Estrategias de reintento

Una estrategia de reintento es un mecanismo que se utiliza en el SDK para implementar reintentos. Cada cliente del SDK tiene una estrategia de reintento creada en el momento de compilación que no se puede modificar una vez creado el cliente.

La estrategia de reintento tiene las siguientes responsabilidades.

- Clasificar excepciones como reintentables o no.
- Calcular el retraso recomendado para esperar antes del siguiente intento.
- Mantener un bucket de tokens que proporcione un mecanismo para detener los reintentos cuando fallen un gran porcentaje de las solicitudes y los reintentos no tengan éxito.

> **Note**
>
> Antes del lanzamiento de las estrategias de reintento con la versión 2.26.0 del SDK, las políticas de reintento proporcionaban el mecanismo de reintento en el SDK. La API de política de reintento se compone de la clase `RetryPolicy` principal del paquete `software.amazon.awssdk.core.retry`, mientras que el paquete `software.amazon.awssdk.retries` contiene los elementos de la API de estrategia de reintento.
> La API de estrategia de reintentos se introdujo como parte AWS de un esfuerzo general por unificar las interfaces y el comportamiento de los componentes principales del. SDKs

El SDK para Java 2.x tiene tres estrategias de reintento integradas: estándar, heredada y adaptativa. Las tres estrategias de reintento están preconfiguradas para reintentar en un conjunto de excepciones reintentables. Algunos ejemplos de errores reintentables son los tiempos de espera de socket, la limitación de servicio, los errores de bloqueo positivo o simultáneo y los errores de servicio transitorios.

Estrategia de reintento estándar

La estrategia de reintento estándar es la implementación de `RetryStrategy` recomendada para casos de uso normales. A diferencia de `AdaptiveRetryStrategy`, la estrategia estándar suele ser útil en todos los casos de uso de reintento.

La estrategia de reintento estándar lleva a cabo lo siguiente de forma predeterminada.

- Reintenta en las condiciones configuradas en tiempo de compilación. Puede ajustarla con `StandardRetryStrategy.Builder#retryOnException`.
- Reintenta 2 veces con un total de 3 intentos. Puede ajustarla con `StandardRetryStrategy.Builder#maxAttempts(int)`.
- En el caso de excepciones sin limitación, utiliza la estrategia de retroceso de `BackoffStrategy#exponentialDelay`, con un retraso base de 100 milisegundos y un retraso máximo de 20 segundos. Puede ajustarla con `StandardRetryStrategy.Builder#backoffStrategy`.
- En el caso de excepciones con limitación, utiliza la estrategia de retroceso de `BackoffStrategy#exponentialDelay`, con un retraso base de 1 segundo y un retraso máximo de 20 segundos. Puede ajustarla con `StandardRetryStrategy.Builder#throttlingBackoffStrategy`.
- Realiza interrupción del circuito (deshabilita los reintentos) en caso de que se produzcan muchos errores posteriores. El primer intento siempre se ejecuta, solo se deshabilitan los reintentos. Ajústela con `StandardRetryStrategy.Builder#circuitBreakerEnabled`.

Estrategia de reintento heredada

La estrategia de reintento heredada es `RetryStrategy` para casos de uso normales, sin embargo, ha quedado obsoleta en favor de `StandardRetryStrategy`. Esta es la estrategia de reintento predeterminada que utilizan los clientes cuando no se especifica otra estrategia.

Se caracteriza por tratar las excepciones con y sin limitación de manera diferente: en el caso de las excepciones con limitación, el retardo base del retroceso es mayor (500 ms) que el retraso base para

excepciones sin limitación (100 ms), y las excepciones con limitación no afectan al estado del bucket de tokens.

La experiencia en el uso de esta estrategia a gran escala AWS ha demostrado que no es particularmente mejor que la estrategia de reintento estándar. Además, no protege los servicios posteriores de las tormentas de reintentos y puede provocar falta de recursos en el cliente.

La estrategia de reintento heredada lleva a cabo lo siguiente de forma predeterminada.

- Reintenta en las condiciones configuradas en tiempo de compilación. Puede ajustarla con `LegacyRetryStrategy.Builder#retryOnException`.
- Reintenta 3 veces con un total de 4 intentos. Puede ajustarla con `LegacyRetryStrategy.Builder#maxAttempts(int)`.
- En el caso de excepciones sin limitación, utiliza la estrategia de retroceso de `BackoffStrategy#exponentialDelay`, con un retraso base de 100 milisegundos y un retraso máximo de 20 segundos. Puede ajustarla con `LegacyRetryStrategy.Builder#backoffStrategy.`
- En el caso de excepciones con limitación, utiliza la estrategia de retroceso de `BackoffStrategy#exponentialDelay`, con un retraso base de 500 milisegundos y un retraso máximo de 20 segundos. Puede ajustarla con `LegacyRetryStrategy.Builder#throttlingBackoffStrategy`.
- Realiza interrupción del circuito (deshabilita los reintentos) en caso de que se produzcan muchos errores posteriores. La interrupción del circuito nunca evita un primer intento correcto. Puede ajustar este comportamiento con `LegacyRetryStrategy.Builder#circuitBreakerEnabled`.
- El estado del interruptor del circuito no se ve afectado por las excepciones de limitación.

Estrategia de reintento adaptativa

La estrategia de reintento adaptativa es una `RetryStrategy` para casos de uso con un alto nivel de limitación de recursos.

La estrategia de reintento adaptativa incluye todas las características de la estrategia estándar y agrega un limitador de velocidad en el cliente que mide la tasa de solicitudes con limitación en comparación con las solicitudes sin limitación. La estrategia utiliza esta medida para ralentizar las solicitudes e intentar mantenerlas dentro de un ancho de banda seguro, sin que se produzcan errores de limitación en un caso ideal.

La estrategia de reintento adaptativa lleva a cabo lo siguiente de forma predeterminada.

- Reintenta en las condiciones configuradas en tiempo de compilación. Puede ajustarla con `AdaptiveRetryStrategy.Builder#retryOnException`.
- Reintenta 2 veces con un total de 3 intentos. Puede ajustarla con `AdaptiveRetryStrategy.Builder#maxAttempts(int)`.
- Utiliza un retardo de retroceso dinámico que se basa en la carga actual frente el recurso posterior.
- Realiza interrupción del circuito (deshabilita los reintentos) cuando se produce un gran número de errores posteriores. La interrupción del circuito puede impedir un segundo intento en situaciones de suspensión para proteger el servicio posterior.

> **Warning**
>
> La estrategia de reintento adaptativa implica que el cliente trabaja con un único recurso (por ejemplo, una tabla de DynamoDB o un bucket de Amazon S3).
> Si utiliza un solo cliente para varios recursos, la limitación o las interrupciones asociadas a un recurso provocan un aumento de la latencia y los errores cuando el cliente accede a todos los demás recursos. Cuando utiliza la estrategia de reintento adaptativa es recomendable utilizar un único cliente para cada recurso.
> También le recomendamos que utilice esta estrategia en situaciones en las que todos los clientes utilicen la estrategia de reintento adaptativa frente al recurso.

> **Important**
>
> La publicación de las estrategias de reintento con la versión 2.26.0 del SDK de Java incluye el nuevo valor de enumeración `RetryMode.ADAPTIVE_V2`. El modo `ADAPTIVE_V2` corrige un error que no retrasaba el primer intento cuando se detectaban previamente errores de limitación.
> Con la versión 2.26.0, los usuarios obtienen automáticamente el comportamiento del modo `ADAPTIVE_V2` configurándolo como `adaptive` con una variable de entorno, una propiedad del sistema o un ajuste del perfil. Estos ajustes no tienen ningún valor `adaptive_v2`.
> Consulte la siguiente sección the section called “Especificación de una estrategia” para aprender a configurar el modo.

Los usuarios pueden obtener el comportamiento anterior configurando el modo en código mediante `RetryMode.ADAPTIVE`.

Resumen: comparación de los valores predeterminados de la estrategia de reintento

En la tabla siguiente, se muestran los valores predeterminados de las propiedades de cada estrategia de reintento.

Strategy (Estrategia)	Número máximo de intentos	Retraso base para errores sin limitación	Retraso base para errores con limitación	Tamaño del bucket de tokens	Costo del token por reintento sin limitación	Costo del token por reintento con limitación
Standard	3	100 ms	1000 ms	500	5	5
Legacy	4	100 ms	500 ms	500	5	0
Adaptiva	3	100 ms	100 ms	500	5	5

Note

Los clientes de DynamoDB utilizan un número máximo de reintentos predeterminado de 8 para todas las estrategias de reintentos, que es superior a los valores que se muestran en la tabla anterior para otros clientes. Servicio de AWS

Especificación de una estrategia

Hay cuatro formas de especificar una estrategia para el cliente de servicio.

En el código

Al crear un cliente, puede configurar una expresión lambda con una estrategia de reintento. El siguiente fragmento configura una estrategia de reintento estándar que utiliza valores predeterminados en un cliente de servicio de DynamoDB.

```
DynamoDbClient client = DynamoDbClient.builder()
        .overrideConfiguration(o -> o.retryStrategy(RetryMode.STANDARD))
        .build();
```

Puede especificar `RetryMode.LEGACY` o `RetryMode.ADAPTIVE` en lugar de `RetryMode.STANDARD`.

Como ajuste de perfil

`retry_mode`Incluya como configuración de perfil en el archivo de configuración compartido. AWS Especifique `standard`, `legacy` o `adaptive` como valor. Cuando se establece como ajuste de perfil, todos los clientes de servicio que se creen mientras el perfil esté activo utilizarán la estrategia de reintento especificada con los valores predeterminados. Puede anular este ajuste configurando una estrategia de reintento en código, como se ha mostrado anteriormente.

Con el siguiente perfil, todos los clientes de servicio utilizan la estrategia de reintento estándar.

```
[profile dev]
region = us-east-2
retry_mode = standard
```

Como propiedad del sistema JVM

Puede configurar una estrategia de reintento para todos los clientes de servicio, a menos que se anulen en el código, mediante la propiedad del sistema `aws.retryMode`. Especifique `standard`, `legacy` o `adaptive` como valor.

Utilice el conmutador `-D` cuando invoque Java, como se muestra en el siguiente comando.

```
java -Daws.retryMode=standard ...
```

También puede configurar la propiedad del sistema en el código antes de crear cualquier cliente, como se muestra en el siguiente fragmento.

```
public void main(String[] args) {
    // Set the property BEFORE any AWS service clients are created.
    System.setProperty("aws.retryMode", "standard");
    ...
```

```
}
```

Con una variable de entorno

También puede utilizar la variable de entorno `AWS_RETRY_MODE` con un valor de `standard`, `legacy` o `adaptive`. Al igual que ocurre con una configuración de perfil o una propiedad del sistema JVM, la variable de entorno configura todos los clientes de servicio con el modo de reintento especificado, a menos que se configure un cliente en el código.

El siguiente comando establece el modo de reintento en `standard` para la sesión actual del intérprete de comandos.

```
export AWS_RETRY_MODE=standard
```

Personalización de una estrategia

Puede personalizar cualquier estrategia de reintento estableciendo el número máximo de intentos, la estrategia de retroceso y las excepciones reintentables. Puede personalizar cuándo crea una estrategia de reintento o cuándo crea un cliente mediante un generador de anulaciones que permita seguir afinando la estrategia configurada.

Personalización de intentos máximos

Puede configurar el número máximo de intentos durante la creación del cliente, como se muestra en la siguiente instrucción. La siguiente instrucción personaliza la estrategia de reintento predeterminada para el cliente a un máximo de 5 intentos: un primer intento más 4 reintentos.

```
DynamoDbClient client = DynamoDbClient.builder()
        .overrideConfiguration(o -> o.retryStrategy(b -> b.maxAttempts(5)))
        .build();
```

Como alternativa, puede crear la estrategia y proporcionársela al cliente, como se muestra en el siguiente código de ejemplo. El código siguiente reemplaza el máximo estándar de 3 intentos por 10 y configura un cliente de DynamoDB con la estrategia personalizada.

```
StandardRetryStrategy strategy = AwsRetryStrategy.standardRetryStrategy()
         .toBuilder()
         .maxAttempts(10)
```

```
         .build();
DynamoDbClient client = DynamoDbClient.builder()
        .overrideConfiguration(o -> o.retryStrategy(strategy))
        .build();
```

> **Warning**
>
> Se recomienda configurar cada cliente con una instancia de `RetryStrategy` única. Si se comparte una instancia de `RetryStrategy`, los errores de un cliente pueden afectar al comportamiento de reintento del otro.

También puede establecer el número máximo de intentos para todos los clientes mediante ajustes externos en lugar de código. Puede configurar este ajuste como se describe en la sección the section called “Especificación de una estrategia”.

Personalización de excepciones reintentables

Puede configurar excepciones adicionales que activen los reintentos durante la creación del cliente. Esta personalización se proporciona para casos periféricos en los que se lancen excepciones que no estén incluidas en el conjunto predeterminado de excepciones reintentables.

Los métodos `retryOnException` y `retryOnExceptionOrCause` agregan nuevos tipos de excepciones al conjunto existente de excepciones reintentables; no sustituyen al conjunto predeterminado. Esto le permite ampliar el comportamiento de reintento y, al mismo tiempo, mantener las capacidades de reintento predeterminadas del SDK.

El método `retryOnExceptionOrCause` agrega una excepción reintentable si el SDK lanza la excepción directa o si la excepción se empaqueta como causa en otra excepción.

El siguiente fragmento de código muestra los métodos utilizados para personalizar las excepciones de reintento: `retryOnException` y `retryOnExceptionOrCause`. El método `retryOnExceptionOrCause` agrega una excepción reintentable si el SDK lanza la excepción directa o si la excepción está empaquetada.

```
DynamoDbClient client = DynamoDbClient.builder()
        .overrideConfiguration(o -> o.retryStrategy(
                b -> b.retryOnException(EdgeCaseException.class)
                      .retryOnExceptionOrCause(WrappedEdgeCaseException.class)))
```

```
        .build();
```

> **Important**
>
> Los reintentos están deshabilitados para el cliente asincrónico de Kinesis cuando se llama a un método `subscribeToShard`, independientemente de la configuración de la estrategia de reintento.

Personalización de la estrategia de retroceso

Puede crear la estrategia de retroceso y proporcionársela al cliente.

El siguiente código crea una `BackoffStrategy` que reemplaza la estrategia de retardo exponencial de la estrategia estándar predeterminada.

```
BackoffStrategy backoffStrategy =
        BackoffStrategy.exponentialDelay(Duration.ofMillis(150),  // The base delay.
                                         Duration.ofSeconds(15)); // The maximum delay.
DynamoDbClient client = DynamoDbClient.builder()
        .overrideConfiguration(o -> o.retryStrategy(
                b -> b.backoffStrategy(backoffStrategy)))
        .build();
```

Migración desde **`RetryPolicy`** a **`RetryStrategy`**

`RetryPolicy` (la API de política de reintentos) recibirá soporte a lo largo de los próximos años. Si actualmente utiliza una instancia de `RetryPolicy` para configurar el cliente, todo funcionará como antes. Entre bastidores, el SDK de Java la adapta a una `RetryStrategy`. Las nuevas interfaces de las estrategias de reintento proporcionan la misma funcionalidad que una `RetryPolicy`, pero se crean y configuran de forma diferente.

Configuración de tiempos de espera en AWS SDK for Java 2.x

AWS SDK for Java 2.x proporciona varias capas de configuración de tiempo de espera para ayudarlo a crear aplicaciones resilientes. El SDK ofrece diferentes tipos de tiempos de espera que funcionan en conjunto para optimizar el rendimiento y la fiabilidad de la aplicación.

Existen dos categorías principales de tiempos de espera en el SDK:

- Tiempos de espera de clientes de servicio: tiempos de espera de alto nivel que controlan las operaciones de la API
- Tiempos de espera de clientes de HTTP: tiempos de espera de bajo nivel que controlan la comunicación de la red

Tiempos de espera de clientes de servicio

Los tiempos de espera de los clientes de servicio funcionan en el nivel de la API y controlan el comportamiento general de las operaciones de servicio, incluidos los reintentos y los intentos múltiples.

Tiempo de espera de llamadas a la API

El tiempo de espera de llamada a la API establece la cantidad máxima de tiempo de toda una operación de la API, incluidos todos los reintentos. Este tiempo de espera establece un límite estricto del tiempo que la aplicación debe esperar a que finalice una operación completa.

```
S3Client s3Client = S3Client.builder()
    .overrideConfiguration(ClientOverrideConfiguration.builder()
        .apiCallTimeout(Duration.ofMinutes(2))  // Total time for entire operation,
 such as when you call the getObject method.
        .build())
    .build();
```

Características clave:

- Incluye todos los reintentos.
- Incluye el tiempo de espera entre reintentos.
- Proporciona el tiempo de espera máximo absoluto.
- Impide que las operaciones se ejecuten indefinidamente.

Tiempo de espera del intentos de llamada a la API

El tiempo de espera del intento de llamada a la API establece el tiempo máximo para un solo intento de una operación de API. Si se supera este tiempo de espera, el SDK vuelve a intentar la operación (si los reintentos están configurados) en lugar de fallar toda la llamada.

```
S3Client s3Client = S3Client.builder()
```

```
    .overrideConfiguration(ClientOverrideConfiguration.builder()
        .apiCallAttemptTimeout(Duration.ofSeconds(30))  // Time for single attempt.
        .build())
    .build();
```

Características clave:

- Se aplica solo a los intentos individuales.
- Permite realizar errores y reintentos rápidos en el caso de solicitudes lentas.
- Debe ser inferior al tiempo de espera de las llamadas a la API.
- Ayuda a identificar problemas transitorios y a recuperarse de ellos.

Configurar clientes de servicio

Puede configurar los tiempos de espera de los clientes de servicio de forma global para todas las operaciones o por solicitud:

Configuración global:

```
S3Client s3Client = S3Client.builder()
    .overrideConfiguration(b -> b
        .apiCallTimeout(Duration.ofSeconds(105L))
        .apiCallAttemptTimeout(Duration.ofSeconds(25L)))
    .build();
// When you use the s3Client for an API operation, the SDK uses the configured timeout
 values.
```

Configuración por solicitud:

```
S3Client basicS3Client = S3Client.create();

// The following configuration uses the same settings as shown before, but these
 settings
// apply to only the `putObject` call. When you use `basicS3Client` in another API call
 without
// supplying the override configuration, there are no API timeout limits. No timeout
 limits is the default for the SDK.
AwsRequestOverrideConfiguration overrideConfiguration =
 AwsRequestOverrideConfiguration.builder()
```

```
    .apiCallTimeout(Duration.ofSeconds(105L))
    .apiCallAttemptTimeout(Duration.ofSeconds(25L))
    .build();

basicS3Client.putObject(b -> b
        .bucket("amzn-s3-demo-bucket")
        .key("example-key")
        .overrideConfiguration(overrideConfiguration),
    RequestBody.fromString("test"));
```

Prácticas recomendadas para timeout de la API

El SDK no proporciona valores predeterminados para los tiempos de espera de las llamadas a la API ni para los tiempos de espera de los intentos de llamadas individuales a la API. Se recomienda establecer tiempos de espera tanto para los intentos individuales como para toda la solicitud. Esto ayuda a que su aplicación responda rápido a los problemas transitorios hacen que los intentos de solicitud tarden más tiempo o cuando se producen problemas graves de red.

Tiempo de espera de clientes HTTP

Los tiempos de espera de los clientes HTTP funcionan a nivel de red y controlan varios aspectos de la comunicación HTTP. Estos tiempos de espera varían según la implementación de cliente HTTP que utilice.

Tiempo de espera de conexión

El tiempo de espera de la conexión controla el tiempo de espera al establecer una nueva conexión con el Servicio de AWS punto de conexión.

```
// Available with all HTTP clients.
ApacheHttpClient.builder()
    .connectionTimeout(Duration.ofSeconds(5L))
    .build();
```

Finalidad:

- Evita problemas de conectividad de red.
- Responde rápido a los errores cuando no se puede acceder a los servicios.
- Esencial para las aplicaciones que necesitan una gestión de errores con capacidad de respuesta.

Tiempo de espera de los sockets (clientes Apache y URLConnection)

El tiempo de espera del socket controla el tiempo de espera para recibir datos en una conexión establecida.

```
ApacheHttpClient.builder()
    .socketTimeout(Duration.ofSeconds(30L))  // Time to wait for response data.
    .build();
```

Tiempos de espera de lectura y escritura (cliente Netty)

El cliente Netty proporciona timeout separados para operaciones de lectura y escritura:

```
NettyNioAsyncHttpClient.builder()
    .readTimeout(Duration.ofSeconds(30L))   // Reading response data.
    .writeTimeout(Duration.ofSeconds(30L))  // Writing request data.
    .build();
```

Tiempo de espera de negociación de TLS (cliente Netty)

Controla el tiempo permitido para el establecimiento de comunicación de TLS/SSL:

```
NettyNioAsyncHttpClient.builder()
    .tlsNegotiationTimeout(Duration.ofSeconds(3L))
    .build();
```

Tiempo de espera de grupo de conexiones

Algunos clientes HTTP proporcionan tiempos de espera para las operaciones del grupo de conexiones:

```
ApacheHttpClient.builder()
    .connectionAcquisitionTimeout(Duration.ofSeconds(10L))  // Wait for pool
 connection.
    .connectionTimeToLive(Duration.ofMinutes(5L))           // Maximum connection age.
    .connectionMaxIdleTime(Duration.ofSeconds(60L))         // Maximum idle time.
    .build()
```

Configuración de clientes de HTTPContiene más información sobre los clientes HTTP en el AWS SDK for Java 2.x

Interacciones de timeout y jerarquía

Comprender cómo interactúan los diferentes tiempos de espera es crucial para una configuración adecuada:

Jerarquía de timeout

```
API Call Timeout (2 minutes)
### Retry Attempt 1
#   ### API Call Attempt Timeout (45 seconds)
#   ### HTTP Client Timeouts
#       ### Connection Timeout (5 seconds)
#       ### TLS Negotiation Timeout (3 seconds)
#       ### Read/Write Timeout (30 seconds)
### Retry Attempt 2
#   ### [Same structure as Attempt 1]
### Retry Attempt 3
    ### [Same structure as Attempt 1]
```

Configuración de reglas

Tiempo de espera de la llamada a la API ≥ tiempo de espera del intento de llamada a la API

```
// Correct configuration.
.apiCallTimeout(Duration.ofMinutes(2))         // 120 seconds.
.apiCallAttemptTimeout(Duration.ofSeconds(30)) // 30 seconds.
```

Tiempo de espera del intento de llamada a la API ≥ tiempos de espera del cliente HTTP

```
// HTTP client timeouts must be less than attempt timeout.
.apiCallAttemptTimeout(Duration.ofSeconds(30L))   // 30 seconds.
// HTTP client configuration.
.connectionTimeout(Duration.ofSeconds(5L))        // 5 seconds.
.readTimeout(Duration.ofSeconds(25L))             // 25 seconds (< 30).
```

Tenga en cuenta varios intentos

```
// If you have 3 retry attempts, each taking up to 30 seconds
// API call timeout must be at least 90 seconds plus overhead.
.apiCallTimeout(Duration.ofMinutes(2L))          // 120 seconds.
```

```
    .apiCallAttemptTimeout(Duration.ofSeconds(30))   // 30 seconds per attempt.
```

configuración inteligente predeterminada

El SDK proporciona valores predeterminados inteligentes que configuran automáticamente los valores de tiempo de espera adecuados:

```
// Enable smart defaults.
S3Client client = S3Client.builder()
    .defaultsMode(DefaultsMode.AUTO)  // Automatically choose appropriate defaults.
    .build();

// Available modes:
// - STANDARD: Balanced defaults
// - IN_REGION: Optimized for same-region calls
// - CROSS_REGION: Optimized for cross-region calls
// - MOBILE: Optimized for mobile applications
// - AUTO: Automatically detect and choose appropriate mode
// - LEGACY: Provides settings that were used before smart defaults existed.
```

Los valores predeterminados inteligentes configuran automáticamente:

- Tiempos de espera de conexión.
- Valores de tiempo de espera de negociación de TLS.
- Otras configuraciones del cliente.

Resumen

La configuración efectiva de los tiempos de espera AWS SDK for Java 2.x requiere comprender la interacción entre los tiempos de espera del cliente de servicio y los tiempos de espera del cliente HTTP:

1. Los tiempos de espera de los clientes de servicio controlan el comportamiento de las API de alto nivel.
2. Los tiempos de espera de los clientes HTTP controlan el comportamiento de la red de bajo nivel.
3. La jerarquía adecuada garantiza que los tiempos de espera funcionen juntos de forma eficaz.
4. Los valores predeterminados inteligentes proporcionan buenos puntos de partida para la mayoría de las aplicaciones.

Configure los tiempos de espera de forma adecuada para su caso de uso a fin de crear aplicaciones que sean resistentes a los problemas de la red y que respondan a las necesidades de los usuarios.

Configuración de las características de observabilidad en el AWS SDK for Java 2.x

La telemetría es la recopilación y la transmisión automatizadas de datos desde fuentes remotas que le permiten monitorizar y analizar el comportamiento del sistema.

La observabilidad en el SDK para Java 2.x proporciona a los desarrolladores una visión completa de cómo interactúan sus aplicaciones Java Servicios de AWS a través de datos telemétricos enriquecidos que capturan el ciclo de vida completo de las solicitudes. Estas funciones le permiten recopilar, analizar y visualizar señales de telemetría, como métricas, registros y rastreos, lo que le permite supervisar los patrones de solicitudes, identificar los cuellos de botella y optimizar las interacciones de las aplicaciones para mejorar la fiabilidad y el rendimiento. AWS

Temas

- Publique las métricas del SDK desde AWS SDK for Java 2.x
- Monitorización de aplicaciones de AWS SDK for Java 2.x
- Inicio de sesión con SDK para Java 2.x

Publique las métricas del SDK desde AWS SDK for Java 2.x

Con él, AWS SDK for Java 2.x puede recopilar métricas sobre los clientes y las solicitudes de servicio de su aplicación, analizar el resultado en Amazon CloudWatch Logs y, a continuación, actuar en consecuencia.

De forma predeterminada, la recopilación de métricas está deshabilitada en el SDK. En este tema se explica cómo activarlo y configurarlo.

Introducción a las métricas de SDK

Para habilitar la recopilación de métricas en la aplicación, elija la implementación adecuada de la interfaz de `MetricPublisher` en función del caso de uso y siga las instrucciones de configuración detalladas:

Para aplicaciones de larga duración:

- Uso de `CloudWatchMetricPublisher`
- Consulte Publicación de métricas del SDK desde aplicaciones de ejecución prolongada para ver instrucciones de configuración completas, ejemplos de código y opciones de configuración.

Para AWS Lambda funciones:

- Uso de `EmfMetricLoggingPublisher`
- Consulte Publicar métricas del SDK para ver AWS Lambda las funciones para obtener instrucciones de configuración completas, las dependencias y la configuración específica de Lambda.

Para resolución de problemas y salida de la consola:

- Uso de `LoggingMetricPublisher`
- Consulte Envío de métricas del SDK a la consola para desarrollo y depuración para ver instrucciones de configuración, opciones de formato y ejemplos de desarrollo local y solución de problemas.

Vista previa de implementación rápida

Así se habilitan las métricas para cada caso de uso:

Aplicaciones de ejecución prolongada:

```
MetricPublisher metricsPub = CloudWatchMetricPublisher.create();
DynamoDbClient ddb = DynamoDbClient.builder()
    .overrideConfiguration(c -> c.addMetricPublisher(metricsPub))
    .build();
```

Funciones Lambda:

```
EmfMetricLoggingPublisher emfPublisher = EmfMetricLoggingPublisher.builder()
    .namespace("MyApp")
    .build();
DynamoDbClient dynamoDb = DynamoDbClient.builder()
    .overrideConfiguration(c -> c.addMetricPublisher(emfPublisher))
    .build();
```

Desarrollo y depuración:

```
MetricPublisher loggingPublisher = LoggingMetricPublisher.create();
S3Client s3 = S3Client.builder()
    .overrideConfiguration(c -> c.addMetricPublisher(loggingPublisher))
    .build();
```

Limitación de métricas del cliente S3 basado en AWS CRT

El cliente de S3 basado en AWS CRT no admite actualmente la recopilación de métricas del SDK. El creador de una instancia de cliente S3 AWS basada en CRT no proporciona métodos para configurar los publicadores de métricas. `S3CrtAsyncClientBuilder`

¿Cuándo están disponibles las métricas?

Por lo general, las métricas están disponibles entre 5 y 10 minutos después de que las emita el SDK para Java. Para obtener up-to-date métricas precisas, consulte Cloudwatch al menos 10 minutos después de emitir las métricas de sus aplicaciones Java.

¿Qué información se recopila?

La recopilación de métricas incluye lo siguiente:

- Número de solicitudes de API, se hayan realizado correctamente o no
- Información sobre a Servicios de AWS qué llamas en tus solicitudes de API, incluidas las excepciones devueltas
- La duración de varias operaciones, como la serialización, la firma y las solicitudes HTTP
- Métricas del cliente HTTP, como el número de conexiones abiertas, el número de solicitudes pendientes y el nombre del cliente HTTP utilizado

> **Note**
>
> Las métricas disponibles varían según el cliente HTTP.

Para ver una lista completa, consulte Métricas de los clientes de servicio.

¿Cómo puedo usar esta información?

Puede utilizar las métricas que recopila el SDK para monitorizar los clientes de servicio de su aplicación. Puede analizar las tendencias generales de uso, identificar anomalías, revisar las excepciones detectadas por los clientes del servicio o profundizar para entender un problema concreto. Con Amazon CloudWatch Logs, también puede crear alarmas que le notifiquen en cuanto su aplicación alcance una condición que usted defina.

Para obtener más información, consulte Uso de métricas de Amazon CloudWatch Logs y Uso de alarmas de Amazon CloudWatch Logs en la Guía del usuario de Amazon CloudWatch Logs.

Publique métricas del SDK de aplicaciones de larga ejecución mediante el AWS SDK for Java 2.x

Debido a que la `CloudWatchMetricPublisher` implementación agrega y carga periódicamente las métricas a Amazon CloudWatch con un retraso, su uso es más adecuado para aplicaciones de larga duración.

La configuración predeterminada del editor de métricas tiene por objeto minimizar el uso y el CloudWatch coste de la memoria y, al mismo tiempo, proporcionar una cantidad útil de información sobre los datos de las métricas.

Configuración

Para poder habilitar y utilizar métricas utilizando `CloudWatchMetricPublisher`, siga estos pasos.

Paso 1: agregación de dependencia requerida

Configure las dependencias de su proyecto (por ejemplo, en su archivo `pom.xml` o `build.gradle`) para usar la versión `2.14.0` o posterior del AWS SDK para Java.

Incluya el artifactId `cloudwatch-metric-publisher` con el número de versión `2.14.0` o posterior en las dependencias del proyecto.

Por ejemplo:

```
<project>
  <dependencyManagement>
   <dependencies>
      <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>bom</artifactId>
```

```
        <version>2.30.11</version>  <!-- Navigate the link to see the latest version.
 -->
        <type>pom</type>
        <scope>import</scope>
      </dependency>
   </dependencies>
  </dependencyManagement>
  <dependencies>
   <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>cloudwatch-metric-publisher</artifactId>
   </dependency>
  </dependencies>
</project>
```

Paso 2: configuración de permisos requeridos

Habilite los permisos de `cloudwatch:PutMetricData` para la identidad de IAM utilizada por el publicador de métricas con el fin de permitir que el SDK para Java escriba métricas.

Habilitar métricas para una solicitud específica

La clase siguiente muestra cómo habilitar el publicador de CloudWatch métricas para una solicitud a Amazon DynamoDB. Utiliza la configuración predeterminada del publicador de métricas.

```
import software.amazon.awssdk.metrics.MetricPublisher;
import software.amazon.awssdk.metrics.publishers.cloudwatch.CloudWatchMetricPublisher;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.ListTablesRequest;

public class DefaultConfigForRequest {
    // Use one MetricPublisher for your application. It can be used with requests or
 service clients.
    static MetricPublisher metricsPub = CloudWatchMetricPublisher.create();

    public static void main(String[] args) {
        DynamoDbClient ddb = DynamoDbClient.create();
        // Publish metrics the for ListTables operation.
        ddb.listTables(ListTablesRequest.builder()
            .overrideConfiguration(c -> c.addMetricPublisher(metricsPub))
            .build());

        // Perform more work in your application.
```

```
        // A MetricsPublisher has its own lifecycle independent of any service client
 or request that uses it.
        // If you no longer need the publisher, close it to free up resources.
        metricsPub.close();  // All metrics stored in memory are flushed to CloudWatch.

        // Perform more work with the DynamoDbClient instance without publishing
 metrics.
        // Close the service client when you no longer need it.
        ddb.close();
    }
}
```

> **Important**
>
> Asegúrese de que la aplicación llame a `close` en la instancia de `MetricPublisher` cuando el cliente de servicio ya no esté en uso. En caso contrario, pueden producirse filtraciones de subprocesos o descriptores de archivo.

Habilitación de métricas para un cliente de servicio específico

En el siguiente fragmento de código se muestra cómo habilitar un publicador de CloudWatch métricas con la configuración predeterminada para un cliente de servicio.

```
MetricPublisher metricsPub = CloudWatchMetricPublisher.create();

DynamoDbClient ddb = DynamoDbClient.builder()
          .overrideConfiguration(c -> c.addMetricPublisher(metricsPub))
          .build();
```

Personalice un publicador de métricas CloudWatch

En la siguiente clase se muestra cómo utilizar una configuración personalizada para el publicador de métricas de un cliente de servicio específico. Las personalizaciones incluyen cargar un perfil específico, especificar una AWS región a la que el publicador de métricas envía las solicitudes y personalizar la frecuencia a la que el editor envía las métricas. CloudWatch

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.core.metrics.CoreMetric;
import software.amazon.awssdk.metrics.MetricPublisher;
```

```
import software.amazon.awssdk.metrics.publishers.cloudwatch.CloudWatchMetricPublisher;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchAsyncClient;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;

import java.time.Duration;

public class CustomConfigForDDBClient {
    // Use one MetricPublisher for your application. It can be used with requests or
 service clients.
    static MetricPublisher metricsPub = CloudWatchMetricPublisher.builder()
        .cloudWatchClient(CloudWatchAsyncClient.builder()
            .region(Region.US_WEST_2)
            .credentialsProvider(ProfileCredentialsProvider.create("cloudwatch"))
            .build())
        .uploadFrequency(Duration.ofMinutes(5))
        .maximumCallsPerUpload(100)
        .namespace("ExampleSDKV2Metrics")
        .detailedMetrics(CoreMetric.API_CALL_DURATION)
        .build();

    public static void main(String[] args) {
        DynamoDbClient ddb = DynamoDbClient.builder()
            .overrideConfiguration(c -> c.addMetricPublisher(metricsPub))
            .build();
        // Publish metrics for DynamoDB operations.
        ddb.listTables();
        ddb.describeEndpoints();
        ddb.describeLimits();
        // Perform more work in your application.

        // A MetricsPublisher has its own lifecycle independent of any service client
 or request that uses it.
        // If you no longer need the publisher, close it to free up resources.
        metricsPub.close();  // All metrics stored in memory are flushed to CloudWatch.


        // Perform more work with the DynamoDbClient instance without publishing
 metrics.
        // Close the service client when you no longer need it.
        ddb.close();
    }
}
```

Las personalizaciones que se muestran en el fragmento anterior tienen los siguientes efectos.

- El `cloudWatchClient` método permite personalizar el CloudWatch cliente que se utiliza para enviar las métricas. En este ejemplo utilizamos una región diferente de la predeterminada de us-east-1 a la que el cliente envía las métricas. También utilizamos un perfil con nombre diferente, cloudwatch, cuyas credenciales se utilizarán para autenticar las solicitudes. CloudWatch Estas credenciales deben tener permisos para `cloudwatch:PutMetricData`.
- El `uploadFrequency` método te permite especificar la frecuencia con la que el publicador de las métricas las carga. CloudWatch El valor predeterminado es una vez por minuto.
- El método `maximumCallsPerUpload` limita el número de llamadas realizadas por carga. El valor predeterminado es ilimitado.
- De forma predeterminada, el SDK para Java 2.x publica las métricas en el espacio de nombres `AwsSdk/JavaSdk2`. Puede utilizar el método `namespace` para especificar un valor diferente.
- De forma predeterminada, el SDK publica métricas resumidas. Las métricas resumidas se componen de media, mínimo, máximo, suma y recuento de muestras. Al especificar una o más métricas del SDK en el método `detailedMetrics`, el SDK publica datos adicionales para cada métrica. Estos datos adicionales permiten realizar consultas con estadísticas de percentiles, como p90 y p99. CloudWatch Las métricas detalladas son especialmente útiles para las métricas de latencia`APICallDuration`, como las que miden la end-to-end latencia de las solicitudes de los clientes del SDK. Puede usar campos de la clase `CoreMetric` para especificar otras métricas comunes del SDK.

Próximos pasos: Si también trabaja con funciones de Lambda, consulte Publicar métricas del SDK para AWS Lambda funciones para la publicación de métricas basadas en EMF.

Publique las métricas del SDK para las funciones mediante el AWS Lambda AWS SDK for Java 2.x

Dado que las funciones de Lambda suelen ejecutarse entre milisegundos y minutos, cualquier retraso en el envío de las métricas, como ocurre con `CloudWatchMetricPublisher`, supone un riesgo de pérdida de datos.

`EmfMetricLoggingPublisher`proporciona un enfoque más adecuado al escribir inmediatamente las métricas como entradas de registro estructuradas en formato métrico CloudWatch integrado (EMF). `EmfMetricLoggingPublisher`funciona en entornos de ejecución que tienen una integración integrada con Amazon CloudWatch Logs, como AWS Lambda Amazon Elastic Container Service.

Configuración

Para poder habilitar y utilizar métricas utilizando `EmfMetricLoggingPublisher`, siga estos pasos.

Paso 1: agregación de dependencia requerida

Configure las dependencias de su proyecto (por ejemplo, en su archivo `pom.xml` o `build.gradle`) para usar la versión `2.30.3` o posterior del AWS SDK para Java.

Incluya el artifactId `emf-metric-logging-publisher` con el número de versión `2.30.3` o posterior en las dependencias del proyecto.

Por ejemplo:

```
<project>
  <dependencyManagement>
   <dependencies>
      <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>bom</artifactId>
        <version>2.30.11</version>  <!-- Navigate the link to see the latest version.
 -->
        <type>pom</type>
        <scope>import</scope>
      </dependency>
   </dependencies>
  </dependencyManagement>
  <dependencies>
   <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>emf-metric-logging-publisher</artifactId>
   </dependency>
  </dependencies>
</project>
```

Paso 2: configuración de permisos requeridos

Habilite permisos de `logs:PutLogEvents` para la identidad de IAM utilizada por el publicador de métricas con el fin de permitir que el SDK para Java escriba registros con formato EMF.

Paso 3: configuración del registro

Para garantizar una recopilación de métricas adecuada, configure el registro para enviar a la consola en el nivel de `INFO` o un nivel inferior (por ejemplo, `DEBUG`). En el archivo `log4j2.xml`:

```
<Loggers>
  <Root level="WARN">
   <AppenderRef ref="ConsoleAppender"/>
  </Root>
  <Logger
 name="software.amazon.awssdk.metrics.publishers.emf.EmfMetricLoggingPublisher"
 level="INFO" />
</Loggers>
```

Consulte el tema de registro de esta guía para obtener más información sobre cómo configurar un archivo `log4j2.xml`.

Configure y utilice **`EmfMetricLoggingPublisher`**

La siguiente clase de función de Lambda primero crea y configura una instancia de `EmfMetricLoggingPublisher` y, a continuación, la utiliza con un cliente de servicio de Amazon DynamoDB:

```
public class GameIdHandler implements RequestHandler<Map<String, String>, String> {
    private final EmfMetricLoggingPublisher emfPublisher;
    private final DynamoDbClient dynamoDb;

    public GameIdHandler() {
        // Build the publisher.
        this.emfPublisher = EmfMetricLoggingPublisher.builder()
                .namespace("namespace")
                .dimensions(CoreMetric.SERVICE_ID,
                        CoreMetric.OPERATION_NAME)
                .build();
        // Add the publisher to the client.
        this.dynamoDb = DynamoDbClient.builder()
                .overrideConfiguration(c -> c.addMetricPublisher(emfPublisher))
                .region(Region.of(System.getenv("AWS_REGION")))
                .build();
    }

    @Override
    public String handleRequest(Map<String, String> event, Context context) {
        Map<String, AttributeValue> gameItem = new HashMap<>();

        gameItem.put("gameId", AttributeValue.builder().s(event.get("id")).build());

        PutItemRequest putItemRequest = PutItemRequest.builder()
```

```
                .tableName("games")
                .item(gameItem)
                .build();

        dynamoDb.putItem(putItemRequest);

        return "Request handled";
    }
}
```

Cuando el cliente DynamoDB ejecuta `putItem` el método, publica automáticamente las métricas en CloudWatch un flujo de registro en formato EMF.

Ejemplo de evento de registro de EMF

Por ejemplo, si envía el siguiente evento a la función GameHandler Lambda con el registro configurado como se muestra anteriormente:

```
{
  "id": "23456"
}
```

Cuando la función procese el evento, encontrará dos eventos de registro similares al siguiente ejemplo. El objeto JSON del segundo evento contiene los datos de métricas del SDK de Java para la operación `PutItem` en DynamoDB.

Cuando CloudWatch recibe un evento de registro en formato EMF, analiza automáticamente el JSON estructurado para extraer datos métricos. CloudWatch a continuación, crea las métricas correspondientes mientras almacena la entrada de registro original en CloudWatch Logs.

```
2025-07-11 15:58:30 [main] INFO  org.example.GameIdHandler:39 - Received map:
 {id=23456}

2025-07-11 15:58:34 [main] INFO
 software.amazon.awssdk.metrics.publishers.emf.EmfMetricLoggingPublisher:43 -
{
    "_aws": {
        "Timestamp": 1752249513975,
        "LogGroupName": "/aws/lambda/GameId",
        "CloudWatchMetrics": [
            {
                "Namespace": "namespace",
```

```
                "Dimensions": [
                    [
                        "OperationName",
                        "ServiceId"
                    ]
                ],
                "Metrics": [
                    {
                        "Name": "AvailableConcurrency"
                    },
                    {
                        "Name": "PendingConcurrencyAcquires"
                    },
                    {
                        "Name": "ServiceCallDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "EndpointResolveDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "MaxConcurrency"
                    },
                    {
                        "Name": "BackoffDelayDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "MarshallingDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "LeasedConcurrency"
                    },
                    {
                        "Name": "SigningDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "ConcurrencyAcquireDuration",
                        "Unit": "Milliseconds"
                    },
                    {
```

```
                        "Name": "ApiCallSuccessful"
                    },
                    {
                        "Name": "RetryCount"
                    },
                    {
                        "Name": "UnmarshallingDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "ApiCallDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "CredentialsFetchDuration",
                        "Unit": "Milliseconds"
                    }
                ]
            }
        ]
    },
    "AvailableConcurrency": 0,
    "PendingConcurrencyAcquires": 0,
    "OperationName": "PutItem",
    "ServiceCallDuration": 1339,
    "EndpointResolveDuration": 81,
    "MaxConcurrency": 50,
    "BackoffDelayDuration": 0,
    "ServiceId": "DynamoDB",
    "MarshallingDuration": 181,
    "LeasedConcurrency": 1,
    "SigningDuration": 184,
    "ConcurrencyAcquireDuration": 83,
    "ApiCallSuccessful": 1,
    "RetryCount": 0,
    "UnmarshallingDuration": 85,
    "ApiCallDuration": 1880,
    "CredentialsFetchDuration": 138
}
```

La documentación de la API para `EmfMetricLoggingPublisher.Builder` muestra las opciones de configuración que puede utilizar.

También puede habilitar el registro de métricas de EMF para una sola solicitud, como se muestra en el CloudWatchMetricPublisher.

Próximos pasos: Para aplicaciones de ejecución prolongada, consulte Publicar métricas del SDK desde aplicaciones de ejecución prolongada para publicar métricas CloudWatch basadas en datos.

Envía las métricas del SDK a la consola mediante AWS SDK for Java 2.x

La implementación de `LoggingMetricPublisher` envía métricas directamente a la consola o los archivos de registro de la aplicación. Este enfoque es ideal para el desarrollo, la depuración y la comprensión de las métricas que recopila el SDK sin necesidad de servicios externos como Amazon CloudWatch.

A diferencia de `CloudWatchMetricPublisher` y `EmfMetricLoggingPublisher`, `LoggingMetricPublisher` proporciona resultados inmediatos sin demoras ni dependencias externas. Por ello resulta perfecto en escenarios de desarrollo local y solución de problemas.

¿Cuándo usarlo LoggingMetricPublisher

Use `LoggingMetricPublisher` cuando necesite:

- Depuración de la recopilación de métricas durante el desarrollo
- Explicación de las métricas que recopila el SDK para operaciones
- Solución de problemas de rendimiento localmente
- Prueba de recopilación de métricas sin dependencias de servicios externos
- Visualización de métricas inmediatamente en la consola o los archivos de registro

> **Note**
>
> No se recomienda `LoggingMetricPublisher` para entornos de producción en los que se necesiten capacidades de almacenamiento persistente y análisis de métricas.

Configuración del registro de la consola para métricas

SI desea ver el resultado de `LoggingMetricPublisher`, configure el marco de registro para mostrar mensajes de nivel de `INFO`. La siguiente configuración de `log4j2.xml` garantiza que las métricas aparezcan en la consola:

```
<?xml version="1.0" encoding="UTF-8"?>
<Configuration status="WARN">
    <Appenders>
        <Console name="ConsoleAppender" target="SYSTEM_OUT">
            <PatternLayout pattern="%d{HH:mm:ss.SSS} [%t] %-5level %logger{36} - %msg
%n"/>
        </Console>
    </Appenders>
    <Loggers>
        <Root level="INFO">
            <AppenderRef ref="ConsoleAppender"/>
        </Root>
        <!-- Ensure LoggingMetricPublisher output appears. -->
        <Logger name="software.amazon.awssdk.metrics.LoggingMetricPublisher"
 level="INFO" />
    </Loggers>
</Configuration>
```

Esta configuración indica al SDK que envíe las métricas a la consola en el nivel de `INFO`. La configuración del registrador `LoggingMetricPublisher` garantiza que la salida de las métricas aparezca incluso aunque el registrador raíz utilice un nivel superior como `WARN` o `ERROR`.

Habilitación de métricas de la consola para un cliente de servicio

En el siguiente ejemplo se muestra cómo crear un `LoggingMetricPublisher` y utilizarlo con un cliente de Amazon Simple Storage Service:

```
import software.amazon.awssdk.metrics.LoggingMetricPublisher;
import software.amazon.awssdk.metrics.MetricPublisher;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;

// Create a LoggingMetricPublisher with default settings.
MetricPublisher metricPublisher = LoggingMetricPublisher.create();

// Add the publisher to your service client.
S3Client s3Client = S3Client.builder()
    .region(Region.US_EAST_1)
    .overrideConfiguration(config -> config.addMetricPublisher(metricPublisher))
    .build();

// Make requests - metrics will appear in your console.
s3Client.listBuckets();
```

```
// Clean up resources.
metricPublisher.close();
s3Client.close();
```

Elección del formato de salida de la métrica

`LoggingMetricPublisher` admite dos formatos de salida:

- Formato PLAIN (predeterminado): genera métricas como entradas compactas de una sola línea
- Formato PRETTY: genera métricas en un formato multilínea legible por humanos

En el siguiente ejemplo se muestra cómo utilizar formato PRETTY para facilitar la lectura durante el desarrollo:

```
import org.slf4j.event.Level;
import software.amazon.awssdk.metrics.LoggingMetricPublisher;

// Create a LoggingMetricPublisher with PRETTY format.
MetricPublisher prettyMetricPublisher = LoggingMetricPublisher.create(
    Level.INFO,
    LoggingMetricPublisher.Format.PRETTY
);

// Use with your service client.
S3Client s3Client = S3Client.builder()
    .region(Region.US_EAST_1)
    .overrideConfiguration(config -> config.addMetricPublisher(prettyMetricPublisher))
    .build();
```

Ejemplo completo

En el ejemplo siguiente se muestra el uso de `LoggingMetricPublisher` de dos formas:

- En el nivel de cliente de servicio
- Para una sola solicitud

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import org.slf4j.event.Level;
```

```
import software.amazon.awssdk.metrics.LoggingMetricPublisher;
import software.amazon.awssdk.metrics.MetricPublisher;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.ListBucketsRequest;
import software.amazon.awssdk.services.s3.model.ListBucketsResponse;

/**
 * Demonstrates how to use LoggingMetricPublisher with AWS S3 SDK for Java 2.x.
 * <p>
 * This demo focuses on the S3 listBuckets operation to show how metrics are collected
 * and logged to the console for development and debugging purposes.
 * <p>
 * LoggingMetricPublisher is ideal for:
 * - Development and debugging
 * - Console output for troubleshooting
 * - Understanding what metrics are being collected
 * - Testing metric collection without external dependencies
 */
public class S3LoggingMetricPublisherDemo {

    private static final Logger logger =
 LoggerFactory.getLogger(S3LoggingMetricPublisherDemo.class);

    public static void main(String[] args) {
        S3LoggingMetricPublisherDemo demo = new S3LoggingMetricPublisherDemo();
        demo.demonstrateUsage();
    }

    /**
     * Demonstrates basic usage with S3Client and metrics enabled at the client level.
     */
    private void demonstrateUsage() {

        // Create a LoggingMetricPublisher with default settings. The SDK logs metrics
 as text in a single line.
        // The default settings are equivalent to using
 `LoggingMetricPublisher.Format.PLAIN`.

        MetricPublisher metricPublisher = LoggingMetricPublisher.create();

        // Create an S3 client with metrics enabled.
        try (S3Client s3Client = S3Client.builder()
                .region(Region.US_EAST_1)
```

```
                .overrideConfiguration(config ->
 config.addMetricPublisher(metricPublisher))
                .build()) {

            // Make the listBuckets request - metrics will be logged to console.
            ListBucketsResponse response =
 s3Client.listBuckets(ListBucketsRequest.builder().build());

            // The next block shows the using a different LoggingMetricPublisher with a
 `PRETTY` format.
            // Since the metric publisher is added to the request using the
 `overrideConfiguration`, this formatting
            // applies only to the one request.
            try {
                s3Client.listBuckets(ListBucketsRequest.builder()
                        .overrideConfiguration(config -> config
                                .addMetricPublisher(LoggingMetricPublisher.create(
                                        Level.INFO,
 LoggingMetricPublisher.Format.PRETTY)))
                        .build());
            } catch (Exception e) {
                logger.info("Request failed with metrics logged: {}", e.getMessage());
            }
            logger.info("Found {} buckets in your AWS account.",
 response.buckets().size());

        } catch (Exception e) {
            logger.error("Error during S3 operation: {}", e.getMessage());
            logger.info("Note: This is expected if AWS credentials are not
 configured.");
        }

        // Close the metric publisher to flush any remaining metrics.
        metricPublisher.close();
    }
}
```

El código registra lo siguiente en la consola:

```
INFO  LoggingMetricPublisher - Metrics published: MetricCollection(name=ApiCall,
 metrics=[MetricRecord(metric=MarshallingDuration, value=PT0.005409792S),
 MetricRecord(metric=RetryCount, value=0), MetricRecord(metric=ApiCallSuccessful,
 value=true), MetricRecord(metric=OperationName, value=ListBuckets),
```

```
 MetricRecord(metric=EndpointResolveDuration, value=PT0.000068S),
 MetricRecord(metric=ApiCallDuration, value=PT0.163802958S),
 MetricRecord(metric=CredentialsFetchDuration, value=PT0.145686542S),
 MetricRecord(metric=ServiceEndpoint, value=https://s3.amazonaws.com),
 MetricRecord(metric=ServiceId, value=S3)],
 children=[MetricCollection(name=ApiCallAttempt,
 metrics=[MetricRecord(metric=TimeToFirstByte, value=PT0.138816S),
 MetricRecord(metric=SigningDuration, value=PT0.007803459S),
 MetricRecord(metric=ReadThroughput, value=165153.96002660287),
 MetricRecord(metric=ServiceCallDuration, value=PT0.138816S),
 MetricRecord(metric=AwsExtendedRequestId, value=e13Swj3uwn0qP1Oz
+m7II5OGq7jf8xxT8H18iDfRBCQmDg+gU4ek91Xrsl8XxRLROlIzCAPQtsQF0DAAWOb8ntuKCzX2AJdj),
 MetricRecord(metric=HttpStatusCode, value=200),
 MetricRecord(metric=BackoffDelayDuration, value=PT0S),
 MetricRecord(metric=TimeToLastByte, value=PT0.148915667S),
 MetricRecord(metric=AwsRequestId, value=78AW9BM7SWR6YMGB)],
 children=[MetricCollection(name=HttpClient,
 metrics=[MetricRecord(metric=MaxConcurrency, value=50),
 MetricRecord(metric=AvailableConcurrency, value=0),
 MetricRecord(metric=LeasedConcurrency, value=1),
 MetricRecord(metric=ConcurrencyAcquireDuration, value=PT0.002623S),
 MetricRecord(metric=PendingConcurrencyAcquires, value=0),
 MetricRecord(metric=HttpClientName, value=Apache)], children=[])])])
INFO  LoggingMetricPublisher - [4e6f2bb5] ApiCall
INFO  LoggingMetricPublisher - [4e6f2bb5] ###############################################
INFO  LoggingMetricPublisher - [4e6f2bb5] # MarshallingDuration=PT0.000063S          #
INFO  LoggingMetricPublisher - [4e6f2bb5] # RetryCount=0                            #
INFO  LoggingMetricPublisher - [4e6f2bb5] # ApiCallSuccessful=true                  #
INFO  LoggingMetricPublisher - [4e6f2bb5] # OperationName=ListBuckets               #
INFO  LoggingMetricPublisher - [4e6f2bb5] # EndpointResolveDuration=PT0.000024375S   #
INFO  LoggingMetricPublisher - [4e6f2bb5] # ApiCallDuration=PT0.018463083S          #
INFO  LoggingMetricPublisher - [4e6f2bb5] # CredentialsFetchDuration=PT0.000022334S  #
INFO  LoggingMetricPublisher - [4e6f2bb5] # ServiceEndpoint=https://s3.amazonaws.com #
INFO  LoggingMetricPublisher - [4e6f2bb5] # ServiceId=S3                            #
INFO  LoggingMetricPublisher - [4e6f2bb5] ###############################################
INFO  LoggingMetricPublisher - [4e6f2bb5]     ApiCallAttempt
INFO  LoggingMetricPublisher - [4e6f2bb5]
 ###########################################################################################
INFO  LoggingMetricPublisher - [4e6f2bb5]     # TimeToFirstByte=PT0.0165575S
                                                                          #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # SigningDuration=PT0.000301125S
                                                                          #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # ReadThroughput=1195591.792850103
                                                                          #
```

```
INFO  LoggingMetricPublisher - [4e6f2bb5]     # ServiceCallDuration=PT0.0165575S
                                                                              #
INFO  LoggingMetricPublisher - [4e6f2bb5]     #
 AwsExtendedRequestId=3QI1eenRuokdszWqZBmBMDUmko6FlSmHkM
+CUMNMeLor7gJml4D4lv6QXUZ1zWoTgG+tHbr6yo2vHdz4h1P8PDovvtMFRCeB #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # HttpStatusCode=200
                                                                              #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # BackoffDelayDuration=PT0S
                                                                              #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # TimeToLastByte=PT0.017952625S
                                                                              #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # AwsRequestId=78AVFAF795AAWAXH
                                                                              #
INFO  LoggingMetricPublisher - [4e6f2bb5]
 ###############################################################################################
INFO  LoggingMetricPublisher - [4e6f2bb5]         HttpClient
INFO  LoggingMetricPublisher - [4e6f2bb5]
 ########################################
INFO  LoggingMetricPublisher - [4e6f2bb5]         # MaxConcurrency=50
   #
INFO  LoggingMetricPublisher - [4e6f2bb5]         # AvailableConcurrency=0
   #
INFO  LoggingMetricPublisher - [4e6f2bb5]         # LeasedConcurrency=1
   #
INFO  LoggingMetricPublisher - [4e6f2bb5]         #
 ConcurrencyAcquireDuration=PT0.00004S #
INFO  LoggingMetricPublisher - [4e6f2bb5]         # PendingConcurrencyAcquires=0
   #
INFO  LoggingMetricPublisher - [4e6f2bb5]         # HttpClientName=Apache
   #
INFO  LoggingMetricPublisher - [4e6f2bb5]
 ########################################
INFO  S3LoggingMetricPublisherDemo - Found 6 buckets in your AWS account.
```

Artefactos adicionales para el ejemplo

Archivo `pom.xml` de Maven

```
<?xml version="1.0" encoding="UTF-8"?>
<project xmlns="http://maven.apache.org/POM/4.0.0"
         xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
         xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
         http://maven.apache.org/xsd/maven-4.0.0.xsd">
    <modelVersion>4.0.0</modelVersion>
```

```
    <groupId>com.example</groupId>
    <artifactId>s3-logging-metric-publisher-demo</artifactId>
    <version>1.0.0</version>
    <packaging>jar</packaging>

    <name>AWS S3 LoggingMetricPublisher Demo</name>
    <description>Demonstrates how to use LoggingMetricPublisher with AWS S3 SDK for
Java 2.x</description>

    <properties>
        <maven.compiler.source>17</maven.compiler.source>
        <maven.compiler.target>17</maven.compiler.target>
        <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
        <aws.java.sdk.version>2.31.66</aws.java.sdk.version>
        <log4j.version>2.24.3</log4j.version>
    </properties>

    <dependencyManagement>
        <dependencies>
            <!-- AWS SDK BOM for dependency management -->
            <dependency>
                <groupId>software.amazon.awssdk</groupId>
                <artifactId>bom</artifactId>
                <version>${aws.java.sdk.version}</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>

            <!-- Log4j BOM for logging dependency management -->
            <dependency>
                <groupId>org.apache.logging.log4j</groupId>
                <artifactId>log4j-bom</artifactId>
                <version>${log4j.version}</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
        </dependencies>
    </dependencyManagement>

    <dependencies>
        <!-- AWS S3 SDK for demonstration -->
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
```

```
            <artifactId>s3</artifactId>
        </dependency>

        <!-- Log4j2 SLF4J implementation -->
        <dependency>
            <groupId>org.apache.logging.log4j</groupId>
            <artifactId>log4j-slf4j2-impl</artifactId>
        </dependency>

        <!-- Log4j2 Core -->
        <dependency>
            <groupId>org.apache.logging.log4j</groupId>
            <artifactId>log4j-core</artifactId>
        </dependency>
    </dependencies>

    <build>
        <plugins>
            <plugin>
                <groupId>org.apache.maven.plugins</groupId>
                <artifactId>maven-compiler-plugin</artifactId>
                <version>3.13.0</version>
                <configuration>
                    <source>17</source>
                    <target>17</target>
                </configuration>
            </plugin>
        </plugins>
    </build>
</project>
```

Archivo de configuración de la `Log4j2.xml`

```
<?xml version="1.0" encoding="UTF-8"?>
<Configuration status="WARN">
    <Appenders>
        <Console name="ConsoleAppender" target="SYSTEM_OUT">
            <PatternLayout pattern="%d{HH:mm:ss.SSS} [%t] %-5level %logger{36} - %msg
%n"/>
        </Console>
    </Appenders>
    <Loggers>
        <Root level="INFO">
```

```
            <AppenderRef ref="ConsoleAppender"/>
        </Root>
        <!-- Ensure LoggingMetricPublisher output appears. -->
        <Logger name="software.amazon.awssdk.metrics.LoggingMetricPublisher"
 level="INFO"/>
    </Loggers>
</Configuration>
```

Las métricas incluyen información sobre los tiempos, los detalles del servicio, los nombres de las operaciones y los códigos de estado HTTP que te ayudan a entender los patrones de uso de las AWS API de tu aplicación.

Siguientes pasos

Después de utilizar `LoggingMetricPublisher` para desarrollo y depuración, considere estas opciones para entornos de producción:

- En el caso de aplicaciones de larga duración, se utilizan CloudWatchMetricPublisherpara enviar métricas a Amazon CloudWatch para su análisis y emisión de alertas
- Para AWS Lambda las funciones, utilícelas EmfMetricLoggingPublisherpara publicar métricas en formato métrico CloudWatch integrado

AWS SDK for Java 2.x: referencia completa de métricas

Con él AWS SDK for Java 2.x, puedes recopilar métricas de los clientes de servicio de tu aplicación y, a continuación, publicarlas (generar) esas métricas en Amazon CloudWatch.

En estas tablas, se muestran las métricas que puede recopilar y cualquier requisito de uso del cliente HTTP.

Para obtener más información sobre cómo habilitar y configurar las métricas del SDK, consulte Habilitar métricas del SDK.

Métricas recopiladas con cada solicitud

Nombre de métrica	Description (Descripción)	Tipo
ApiCallDuration	Duración de la llamada a la API. Incluye todos los intentos de llamada realizados.	Duración*

Nombre de métrica	Description (Descripción)	Tipo
ApiCallSuccessful	Verdadero si la llamada a la API se realizó correctamente; false en caso contrario.	Booleano
CredentialsFetchDuration	Tiempo que se tarda en obtener credenciales de firma para la llamada a la API.	Duración*
EndpointResolveDuration	Tiempo que se tarda en resolver el punto de conexión utilizado para la llamada a la API.	Duración*
MarshallingDuration	Tiempo que se tarda en serializar una solicitud del SDK en una solicitud HTTP.	Duración*
OperationName	Nombre de la operación de servicio que se invoca.	Cadena
RetryCount	Número de reintentos que el SDK realizó al ejecutar la solicitud. 0 implica que la solicitud funcionó la primera vez y no se volvió a intentar. Para obtener más informaci ón sobre cómo configurar el comportamiento de reintento , consulte Estrategias de reintento.	Entero
ServiceId	ID exclusivo del servicio.	Cadena
ServiceEndpoint	Punto de conexión del servicio.	URI

Nombre de métrica	Description (Descripción)	Tipo
TokenFetchDuration	Tiempo que se tarda en obtener credenciales de firma para la llamada a la API.	Duración*

*java.time.Duration.

Métricas recopiladas para cada intento de solicitud

Es posible que cada llamada a la API requiera varios intentos antes de recibir una respuesta. Estas métricas se recogen para cada intento.

Métricas principales

Nombre de métrica	Description (Descripción)	Tipo
AwsExtendedRequestId	ID de solicitud extendida de la solicitud de servicio.	Cadena
AwsRequestId	ID de solicitud de la solicitud de servicio.	Cadena
BackoffDelayDuration	Tiempo que el SDK esperó antes de este intento de llamada a la API. El valor se basa en el conjunto `BackoffStrategy` del cliente. Consulte la sección Estrategias de reintento de esta guía para obtener más información.	Duración*
ErrorType	Tipo de error que se produjo en un intento de llamada. Los valores posibles son los siguientes:	Cadena

Nombre de métrica	Description (Descripción)	Tipo
	• `Throttling` : el servicio ha respondido con un error de limitación. • `ServerError` : el servicio ha respondido con un error que no es de limitación. • `ConfiguredTimeout` : se agotó el tiempo de espera del cliente, en el nivel de llamada a la API o en el nivel de intento de llamada a la API. • `IO`: Se ha producido un I/O error. • `Other`: se aplica catch-all a todos los demás errores que no correspondan a una de las categorías de la lista anterior.	

Nombre de métrica	Description (Descripción)	Tipo
ReadThroughput	Rendimiento de lectura del cliente, definido como `NumberOfResponseBytesRead / (TTLB - TTFB)`. Este valor se expresa en bytes por segundo. Tenga en cuenta que esta métrica solo mide los bytes leídos desde `ResponseTransformer` o `AsyncResponseTransformer` . Los datos que se leen fuera del transformador (por ejemplo, cuando el flujo de respuesta se devuelve como resultado del transformador) no se incluyen en el cálculo.	Double
ServiceCallDuration	Tiempo necesario para conectarse al servicio (o adquirir una conexión desde el grupo de conexiones), enviar la solicitud serializada y recibir la respuesta inicial (por ejemplo, código de estado HTTP y encabezados). NO incluye el tiempo necesario para leer la respuesta completa del servicio.	Duración*
SigningDuration	Duración del tiempo para firmar la solicitud HTTP.	Duración*

Nombre de métrica	Description (Descripción)	Tipo
TimeToFirstByte	Tiempo transcurrido desde el envío de la solicitud HTTP (incluida la adquisición de una conexión) al servicio hasta la recepción del primer byte de los encabezados de la respuesta.	Duración*
TimeToLastByte	Tiempo transcurrido desde el envío de la solicitud HTTP (incluida la adquisición de una conexión) al servicio hasta la recepción del último byte de la respuesta. Tenga en cuenta que, en el caso de las respuestas de streaming devueltas, esta métrica abarca el tiempo transcurrido hasta que se `AsyncResponseTransformer` complete el `ResponseTransformer` o. APIs	Duración*
UnmarshallingDuration	Tiempo que se tarda en desactivar la serialización de la respuesta HTTP a una respuesta del SDK. Nota: En el caso de las operaciones de streaming , esto no incluye el tiempo necesario para leer la carga útil de la respuesta.	Duración*

*java.time.Duration.

Métricas de HTTP

Nombre de métrica	Description (Descripción)	Tipo	Cliente HTTP necesario *
Available Concurrency	Número de solicitudes simultáneas adicionales que admite el cliente HTTP sin establecer nuevas conexiones con el servidor de destino. En el caso de operaciones HTTP/1, es igual al número de conexiones TCP inactivas establecidas con el servicio. En el caso de operaciones HTTP/2, es igual al número de transmisiones inactivas. Nota: Este valor varía según la implementación del cliente HTTP: • Cliente de Apache: el valor se aplica a todo el cliente HTTP • Cliente de Netty: el valor se aplica por punto de conexión • AWS Cliente basado en CRT: el valor se aplica por punto final El valor incluye una instancia de cliente HTTP individua l y excluye la simultaneidad de otros clientes HTTP en la misma JVM.	Entero	Apache, Netty, CRT
ConcurrencyAcquireDuration	Tiempo que se tarda en adquirir un canal del grupo de conexiones. En el caso de operaciones HTTP/1, un canal equivale a una conexión TCP. En el caso de operaciones HTTP/2, un canal equivale a un canal de streaming HTTP/2.	Duració	Apache, Netty, CRT

Nombre de métrica	Description (Descripción)	Tipo	Cliente HTTP necesario *
	La adquisición de un nuevo canal puede incluir tiempo para: 1. En espera de un permiso de simultaneidad, restringido por la configuración de simultaneidad máxima del cliente. 2. Estableciendo una nueva conexión, si no hay ninguna conexión disponible en el grupo. 3. Realizando el establecimiento de comunicación y la negociación de TLS, si está activado TLS.		
HttpClientName	Nombre del HTTP que se utiliza para la solicitud	Cadena	Apache, Netty, CRT
HttpStatusCode	Código de estado de la respuesta HTTP.	Entero	Cualquiera

Nombre de métrica	Description (Descripción)	Tipo	Cliente HTTP necesario *
LeasedConcurrency	Número de solicitudes que el cliente de HTTP está ejecutando actualmente En el caso de operaciones HTTP/1, es igual al número de conexiones TCP activas con el servicio (excluidas las conexiones inactivas). En el caso de las operaciones HTTP/2, es igual al número de flujos de HTTP activos con el servicio (excluida la capacidad de flujos inactivos). Nota: Este valor varía según la implementación del cliente HTTP: • Cliente de Apache: el valor se aplica a todo el cliente HTTP • Cliente de Netty: el valor se aplica por punto de conexión • AWS Cliente basado en CRT: el valor se aplica por punto final El valor incluye una instancia de cliente HTTP individual y excluye la simultaneidad de otros clientes HTTP en la misma JVM.	Entero	Apache, Netty, CRT
LocalStreamWindowSize	Tamaño de la ventana HTTP/2 local en bytes del flujo que ejecuta esta solicitud.	Entero	Netty

Nombre de métrica	Description (Descripción)	Tipo	Cliente HTTP necesario *
MaxConcurrency	Número máximo de solicitudes simultáneas que admite el cliente HTTP. En el caso de las operaciones HTTP/1, es igual al número máximo de conexiones TCP que el cliente HTTP puede agrupar. En el caso de las operaciones HTTP/2, es igual al número máximo de flujos que el cliente HTTP puede agrupar. Nota: Este valor varía según la implementación del cliente HTTP: • Cliente de Apache: el valor se aplica a todo el cliente HTTP • Cliente de Netty: el valor se aplica por punto de conexión • AWS Cliente basado en CRT: el valor se aplica por punto final El valor incluye una instancia de cliente HTTP individual y excluye la simultaneidad de otros clientes HTTP en la misma JVM.	Entero	Apache, Netty, CRT

Nombre de métrica	Description (Descripción)	Tipo	Cliente HTTP necesario *
PendingConcurrencyAcquires	Número de solicitudes que esperan simultaneidad del cliente HTTP. En el caso de las operaciones HTTP/1, es igual al número de solicitudes que esperan que se establezca una conexión TCP o se devuelva del grupo de conexiones. En el caso de las operaciones HTTP/2, es igual al número de solicitudes que esperan un nuevo flujo (y posiblemente una nueva conexión HTTP/2) del grupo de conexiones. Nota: Este valor varía según la implementación del cliente HTTP: • Cliente de Apache: el valor se aplica a todo el cliente HTTP • Cliente de Netty: el valor se aplica por punto de conexión • AWS Cliente basado en CRT: el valor se aplica por punto final El valor incluye una instancia de cliente HTTP individual y excluye la simultaneidad de otros clientes HTTP en la misma JVM.	Entero	Apache, Netty, CRT
RemoteStreamWindowSize	Tamaño de la ventana HTTP/2 remota en bytes del flujo que ejecuta esta solicitud.	Entero	Netty

*java.time.Duration.

Los términos utilizados en las tablas significan:

- Apache: el cliente HTTP basado en Apache (`ApacheHttpClient`)
- Netty: el cliente HTTP basado en Netty (`NettyNioAsyncHttpClient`)
- CRT: el cliente HTTP basado en AWS CRT () `AwsCrtAsyncHttpClient`
- Cualquiera: la recopilación de datos métricos no depende del cliente HTTP; esto incluye el cliente HTTP URLConnection basado () `UrlConnectionHttpClient`

Monitorización de aplicaciones de AWS SDK for Java 2.x

La monitorización es una parte importante del mantenimiento de la fiabilidad, la disponibilidad y el rendimiento de AWS SDK for Java 2.x. AWS ofrece las siguientes herramientas de monitorización para vigilar SDK para Java 2.x, informar cuando algo no va bien y realizar acciones automáticas cuando proceda:

- Amazon CloudWatch supervisa sus recursos de AWS y las aplicaciones que ejecute en AWS en tiempo real. Puede recopilar métricas y realizar un seguimiento de las métricas, crear paneles personalizados y definir alarmas que le advierten o que toman medidas cuando una métrica determinada alcanza el umbral que se especifique. Por ejemplo, puede hacer que CloudWatch haga un seguimiento del uso de la CPU u otras métricas de las instancias de Amazon EC2 y abrir nuevas instancias automáticamente cuando sea necesario. Para obtener más información, consulte la Guía del usuario de Amazon CloudWatch.
- Registros de Amazon CloudWatch le permite monitorizar, almacenar y tener acceso a los archivos de registro desde instancias de Amazon EC2, CloudTrail u otras fuentes. CloudWatch Logs puede supervisar información en los archivos de registro y enviarle una notificación cuando se llega a determinados umbrales. También se pueden archivar los datos del registro en un almacenamiento de larga duración. Para obtener más información, consulte la Guía del usuario de Registros de Amazon CloudWatch.
- AWS CloudTrail captura llamadas a la API y eventos relacionados efectuados por su cuenta de AWS o en su nombre, y entrega los archivos de registro al bucket de Amazon S3 que se haya especificado. También puede identificar qué usuarios y cuentas llamaron a AWS, la dirección IP de origen de las llamadas y el momento en que se hicieron. Para obtener más información, consulte la Guía del usuario de AWS CloudTrail.

Inicio de sesión con SDK para Java 2.x

AWS SDK for Java 2.x Utiliza SLF4J, que es una capa de abstracción que permite el uso de cualquiera de los varios sistemas de registro en tiempo de ejecución.

Los sistemas de registro compatibles incluyen Java Logging Framework y Apache Log4j 2, entre otros. En este tema se muestra cómo utilizar Log4j 2 como sistema de registro para trabajar con el SDK.

Archivo de configuración de Log4j 2

Por lo general, se utiliza un archivo de configuración, cuyo nombre es `log4j2.xml` con Log4j 2. A continuación, se muestran ejemplos de archivos de configuración. Para obtener más información acerca de los valores que se utilizan en el archivo de configuración, consulte el manual de configuración de Log4j.

El archivo `log4j2.xml` debe estar en la ruta de clases cuando se inicie la aplicación. Para un proyecto de Maven, coloque el archivo en el directorio `<project-dir>/src/main/resources`.

El archivo de configuración `log4j2.xml` especifica propiedades como el nivel de registro, dónde se envía la salida de registro (por ejemplo, a un archivo o a la consola) y el formato de la salida. El nivel de registro especifica el nivel de detalle que genera Log4j 2. Log4j 2 admite el concepto de varias jerarquías de registro. El nivel de registro se define de forma independiente para cada jerarquía. La jerarquía de registro principal que se utiliza con la AWS SDK for Java 2.x es `software.amazon.awssdk`.

Añadir dependencia de registro

Para configurar el enlace Log4j 2 para SLF4 J en su archivo de compilación, utilice lo siguiente.

Maven

Añada el siguiente elemento a su archivo `pom.xml`.

```
...
<dependency>
   <groupId>org.apache.logging.log4j</groupId>
   <artifactId>log4j-slf4j2-impl</artifactId>
   <version>VERSION</version>
</dependency>
...
```

Gradle–Kotlin DSL

Añada lo siguiente a su archivo `build.gradle.kts`.

```
...
dependencies {
    ...
    implementation("org.apache.logging.log4j:log4j-slf4j2-impl:VERSION")
    ...
}
...
```

Utilice `2.20.0` para la versión mínima del artefacto `log4j-slf4j2-impl`. Para obtener la última versión, utilice la versión publicada en Maven Central. *VERSION*Sustitúyala por la versión que vayas a utilizar.

Errores y advertencias específicos del SDK

Le recomendamos que deje siempre la jerarquía del registrador "software.amazon.awssdk" establecida en "WARN" para captar cualquier mensaje importante de las bibliotecas cliente del SDK. Por ejemplo, si el cliente Amazon S3 detecta que su aplicación no ha cerrado correctamente un `InputStream` y podría estar desperdiciando recursos, el cliente S3 informa de ello a través de un mensaje de advertencia a los archivos log. Esto también garantiza que se registren los mensajes si el cliente tiene algún problema con el tratamiento de las solicitudes o respuestas.

El siguiente archivo `log4j2.xml` establece `rootLogger` en «WARN», lo que genera mensajes de advertencia y de nivel de error de todos los registradores de la aplicación, incluidos los de la jerarquía «software.amazon.awssdk». Como alternativa, puede establecer explícitamente la jerarquía del registrador "software.amazon.awssdk" en "WARN" si se utiliza `<Root level="ERROR">`.

Ejemplo de archivo de configuración Log4j2.xml

Esta configuración registrará los mensajes en los niveles «ERROR» y «WARN» en la consola para todas las jerarquías de registradores.

```
<Configuration status="WARN">
 <Appenders>
  <Console name="ConsoleAppender" target="SYSTEM_OUT">
   <PatternLayout pattern="%d{YYYY-MM-dd HH:mm:ss} [%t] %-5p %c:%L - %m%n" />
  </Console>
 </Appenders>
```

```
 <Loggers>
  <Root level="WARN">
   <AppenderRef ref="ConsoleAppender"/>
  </Root>
 </Loggers>
</Configuration>
```

Registro de resumen de solicitud/respuesta

Cada solicitud a an Servicio de AWS genera un identificador de AWS solicitud único que es útil si tienes algún problema con la forma en que an Servicio de AWS gestiona una solicitud. AWS IDs Se puede acceder a las solicitudes mediante programación a través de `SdkServiceException`los objetos del SDK para cualquier llamada de servicio fallida, y también se pueden informar a través del nivel de registro «DEBUG» del registrador «software.amazon.awssdk.request».

El siguiente archivo `log4j2.xml` habilita un resumen de solicitudes y respuestas.

```
<Configuration status="WARN">
 <Appenders>
  <Console name="ConsoleAppender" target="SYSTEM_OUT">
   <PatternLayout pattern="%d{YYYY-MM-dd HH:mm:ss} [%t] %-5p %c:%L - %m%n" />
  </Console>
 </Appenders>

 <Loggers>
  <Root level="ERROR">
   <AppenderRef ref="ConsoleAppender"/>
  </Root>
  <Logger name="software.amazon.awssdk" level="WARN" />
  <Logger name="software.amazon.awssdk.request" level="DEBUG" />
 </Loggers>
</Configuration>
```

Este es un ejemplo del resultado del registro:

```
2022-09-23 16:02:08 [main] DEBUG software.amazon.awssdk.request:85 - Sending Request:
 DefaultSdkHttpFullRequest(httpMethod=POST, protocol=https, host=dynamodb.us-
east-1.amazonaws.com, encodedPath=/, headers=[amz-sdk-invocation-id, Content-Length,
 Content-Type, User-Agent, X-Amz-Target], queryParameters=[])
2022-09-23 16:02:08 [main] DEBUG software.amazon.awssdk.request:85 - Received
 successful response: 200, Request ID:
```

```
 QS9DUMME2NHEDH8TGT9N5V53OJVV4KQNSO5AEMVJF66Q9ASUAAJG, Extended Request ID: not
 available
```

Si solo le interesa el identificador de solicitud, utilice `<Logger name="software.amazon.awssdk.requestId" level="DEBUG" />`.

Registro del SDK en el nivel de depuración

Si necesita más información sobre qué hace el SDK, puede configurar el nivel de registro del registrador `software.amazon.awssdk` en `DEBUG`. En este nivel, el SDK genera una gran cantidad de detalles, por lo que te recomendamos que establezca este nivel para resolver errores mediante pruebas de integración.

En este nivel de registro, el SDK registra información sobre configuración, resolución de credenciales, interceptores de ejecución, actividad de TLS de alto nivel, firma de solicitudes y mucho más.

A continuación se ofrece una muestra de instrucciones que genera el SDK en el nivel de `DEBUG` para una llamada `S3Client#listBuckets()`.

```
DEBUG s.a.a.r.p.AwsRegionProviderChain:57 - Unable to load region from
 software.amazon.awssdk.regions.providers.SystemSettingsRegionProvider@324dcd31:Unable
 to load region from system settings. Region must be specified either via environment
 variable (AWS_REGION) or  system property (aws.region).
DEBUG s.a.a.c.i.h.l.ClasspathSdkHttpServiceProvider:85 - The HTTP implementation loaded
 is software.amazon.awssdk.http.apache.ApacheSdkHttpService@a23a01d
DEBUG s.a.a.c.i.ExecutionInterceptorChain:85 - Creating an interceptor
 chain that will apply interceptors in the following order:
 [software.amazon.awssdk.core.internal.interceptor.HttpChecksumValidationInterceptor@69b2f8e5,
 software.amazon.awssdk.awscore.interceptor.HelpfulUnknownHostExceptionInterceptor@6331250e,
 software.amazon.awssdk.awscore.eventstream.EventStreamInitialRequestInterceptor@a10c1b5,
 software.amazon.awssdk.awscore.interceptor.TraceIdExecutionInterceptor@644abb8f,
 software.amazon.awssdk.services.s3.auth.scheme.internal.S3AuthSchemeInterceptor@1a411233,
 software.amazon.awssdk.services.s3.endpoints.internal.S3ResolveEndpointInterceptor@70325d20,
 software.amazon.awssdk.services.s3.endpoints.internal.S3RequestSetEndpointInterceptor@7c2327fa
 software.amazon.awssdk.services.s3.internal.handlers.StreamingRequestInterceptor@4d847d32,
 software.amazon.awssdk.services.s3.internal.handlers.CreateBucketInterceptor@5f462e3b,
 software.amazon.awssdk.services.s3.internal.handlers.CreateMultipartUploadRequestInterceptor@3
 software.amazon.awssdk.services.s3.internal.handlers.DecodeUrlEncodedResponseInterceptor@58065
 software.amazon.awssdk.services.s3.internal.handlers.GetBucketPolicyInterceptor@3605c4d3,
 software.amazon.awssdk.services.s3.internal.handlers.S3ExpressChecksumInterceptor@585c13de,
 software.amazon.awssdk.services.s3.internal.handlers.AsyncChecksumValidationInterceptor@187eb9
```

```
 software.amazon.awssdk.services.s3.internal.handlers.SyncChecksumValidationInterceptor@726a6b9
 software.amazon.awssdk.services.s3.internal.handlers.EnableTrailingChecksumInterceptor@6ad11a5
 software.amazon.awssdk.services.s3.internal.handlers.ExceptionTranslationInterceptor@522b2631,
 software.amazon.awssdk.services.s3.internal.handlers.GetObjectInterceptor@3ff57625,
 software.amazon.awssdk.services.s3.internal.handlers.CopySourceInterceptor@1ee29c84,
 software.amazon.awssdk.services.s3.internal.handlers.ObjectMetadataInterceptor@7c8326a4]
DEBUG s.a.a.u.c.CachedSupplier:85 - (SsoOidcTokenProvider()) Cached value is stale and
 will be refreshed.
...
DEBUG s.a.a.c.i.ExecutionInterceptorChain:85 - Creating an interceptor
 chain that will apply interceptors in the following order:
 [software.amazon.awssdk.core.internal.interceptor.HttpChecksumValidationInterceptor@51351f28,
 software.amazon.awssdk.awscore.interceptor.HelpfulUnknownHostExceptionInterceptor@21618fa7,
 software.amazon.awssdk.awscore.eventstream.EventStreamInitialRequestInterceptor@15f2eda3,
 software.amazon.awssdk.awscore.interceptor.TraceIdExecutionInterceptor@34cf294c,
 software.amazon.awssdk.services.sso.auth.scheme.internal.SsoAuthSchemeInterceptor@4d7aaca2,
 software.amazon.awssdk.services.sso.endpoints.internal.SsoResolveEndpointInterceptor@604b1e1d,
 software.amazon.awssdk.services.sso.endpoints.internal.SsoRequestSetEndpointInterceptor@625668
...
DEBUG s.a.a.request:85 - Sending Request: DefaultSdkHttpFullRequest(httpMethod=GET,
 protocol=https, host=portal.sso.us-east-1.amazonaws.com, encodedPath=/federation/
credentials, headers=[amz-sdk-invocation-id, User-Agent, x-amz-sso_bearer_token],
 queryParameters=[role_name, account_id])
DEBUG s.a.a.c.i.h.p.s.SigningStage:85 - Using SelectedAuthScheme: smithy.api#noAuth
DEBUG s.a.a.h.a.i.c.SdkTlsSocketFactory:366 - Connecting socket to portal.sso.us-
east-1.amazonaws.com/18.235.195.183:443 with timeout 2000
...
DEBUG s.a.a.requestId:85 - Received successful response: 200, Request ID: bb4f40f4-
e920-4b5c-8648-58f26e7e08cd, Extended Request ID: not available
DEBUG s.a.a.request:85 - Received successful response: 200, Request ID: bb4f40f4-
e920-4b5c-8648-58f26e7e08cd, Extended Request ID: not available
DEBUG s.a.a.u.c.CachedSupplier:85 -
 (software.amazon.awssdk.services.sso.auth.SsoCredentialsProvider@b965857) Successfully
 refreshed cached value. Next Prefetch Time: 2024-04-25T22:03:10.097Z. Next Stale Time:
 2024-04-25T22:05:30Z
DEBUG s.a.a.c.i.ExecutionInterceptorChain:85 - Interceptor
 'software.amazon.awssdk.services.s3.endpoints.internal.S3RequestSetEndpointInterceptor@7c2327f
 modified the message with its modifyHttpRequest method.
...
DEBUG s.a.a.c.i.h.p.s.SigningStage:85 - Using SelectedAuthScheme: aws.auth#sigv4
...
DEBUG s.a.a.a.s.Aws4Signer:85 - AWS4 Canonical Request: GET
...
DEBUG s.a.a.h.a.a.i.s.DefaultV4RequestSigner:85 - AWS4 String to sign: AWS4-HMAC-SHA256
```

```
20240425T210631Z
20240425/us-east-1/s3/aws4_request
aafb7784627fa7a49584256cb746279751c48c2076f813259ef767ecce304d64
DEBUG s.a.a.h.a.i.c.SdkTlsSocketFactory:366 - Connecting socket to s3.us-
east-1.amazonaws.com/52.217.41.86:443 with timeout 2000
...
```

El siguiente `log4j2.xml` configura la salida anterior.

```
<Configuration status="WARN">
    <Appenders>
        <Console name="ConsoleAppender" target="SYSTEM_OUT">
            <PatternLayout pattern="%-5p %c{1.}:%L - %m%n" />
        </Console>
    </Appenders>

    <Loggers>
        <Root level="WARN">
            <AppenderRef ref="ConsoleAppender"/>
        </Root>
        <Logger name="software.amazon.awssdk" level="DEBUG" />
    </Loggers>
</Configuration>
```

Habilitación del registro en red

Puede ser útil ver exactamente las solicitudes y respuestas que el SDK para Java 2.x envía y recibe. Si necesita acceder a esta información, puede habilitarla temporalmente añadiendo la configuración necesaria en función del cliente HTTP que utilice el cliente del servicio.

De forma predeterminada, los clientes de servicios síncronos, como el S3Client, utilizan un Apache subyacente, y los clientes de servicios asíncronos, como el S3 HttpClient, utilizan un cliente HTTP Netty sin bloqueo. AsyncClient

Este es un desglose de los clientes HTTP que puede utilizar para las dos categorías de clientes de servicio:

Clientes HTTP síncronos	Clientes HTTP asíncronos
ApacheHttpClient (predeterminado)	NettyNioAsyncHttpClient (predeterminado)

Clientes HTTP síncronos	Clientes HTTP asíncronos
UrlConnectionHttpClient	AwsCrtAsyncHttpClient
AwsCrtHttpClient	
Apache 5 HttpClient	

Consulte la pestaña correspondiente a continuación para ver los ajustes de configuración que necesite añadir en función del cliente HTTP subyacente.

> **Warning**
>
> Le recomendamos que solo utilice en registro en red para fines de depuración. Deshabilítelo en sus entornos de producción, ya que puede registrar información confidencial. Registra la solicitud o respuesta completa sin cifrado, incluso para una llamada HTTPS. En el caso de solicitudes o respuestas de gran tamaño (p. ej., para cargar un archivo Amazon S3), el registro detallado de las conexiones también puede afectar considerablemente al rendimiento de la aplicación.

ApacheHttpClient

Añada el registrador «org.apache.http.wire» al archivo de configuración `log4j2.xml` y establezca el nivel en «DEBUG».

El siguiente `log4j2.xml` archivo activa el registro completo de cables para Apache. HttpClient

```
<Configuration status="WARN">
 <Appenders>
  <Console name="ConsoleAppender" target="SYSTEM_OUT">
   <PatternLayout pattern="%d{YYYY-MM-dd HH:mm:ss} [%t] %-5p %c:%L - %m%n" />
  </Console>
 </Appenders>

 <Loggers>
  <Root level="WARN">
   <AppenderRef ref="ConsoleAppender"/>
  </Root>
  <Logger name="software.amazon.awssdk" level="WARN" />
```

```
  <Logger name="software.amazon.awssdk.request" level="DEBUG" />
  <Logger name="org.apache.http.wire" level="DEBUG" />
 </Loggers>
</Configuration>
```

Se requiere una dependencia adicional de Maven en el artefacto `log4j-1.2-api` para el registro de cables con Apache, ya que utiliza 1.2 internamente.

El conjunto completo de dependencias de Maven para log4j 2, incluido el registro de conexiones para el cliente HTTP Apache, se muestra en los siguientes fragmentos de archivos de compilación.

Maven

```
...
<dependencyManagement>
    ...
    <dependencies>
        <dependency>
            <groupId>org.apache.logging.log4j</groupId>
            <artifactId>log4j-bom</artifactId>
            <version>VERSION</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
     </dependencies>
</dependencyManagement>
...
<!-- The following is needed for Log4j2 with SLF4J -->
<dependency>
   <groupId>org.apache.logging.log4j</groupId>
   <artifactId>log4j-slf4j2-impl</artifactId>
</dependency>

<!-- The following is needed for Apache HttpClient wire logging -->
<dependency>
   <groupId>org.apache.logging.log4j</groupId>
   <artifactId>log4j-1.2-api</artifactId>
</dependency>
...
```

DSL de Gradle–Kotlin

```
...
dependencies {
    ...
    implementation(platform("org.apache.logging.log4j:log4j-bom:VERSION"))
    implementation("org.apache.logging.log4j:log4j-slf4j2-impl")
    implementation("org.apache.logging.log4j:log4j-1.2-api")
}
...
```

Utilice `2.20.0` para la versión mínima del artefacto `log4j-bom`. Para obtener la última versión, utilice la versión publicada en Maven Central. *VERSION*Sustitúyala por la versión que vayas a utilizar.

Apache5HttpClient

Añada el registrador «org.apache.hc.client5.http.wire» al archivo de configuración y establezca el nivel en «DEBUG». `log4j2.xml`

`log4j2.xml`El siguiente archivo activa el registro completo de cables en HttpClient el Apache5.

```
<Configuration status="WARN">
 <Appenders>
  <Console name="ConsoleAppender" target="SYSTEM_OUT">
   <PatternLayout pattern="%d{YYYY-MM-dd HH:mm:ss} [%t] %-5p %c:%L - %m%n" />
  </Console>
 </Appenders>

 <Loggers>
  <Root level="WARN">
   <AppenderRef ref="ConsoleAppender"/>
  </Root>
  <Logger name="software.amazon.awssdk" level="WARN" />
  <Logger name="software.amazon.awssdk.request" level="DEBUG" />
  <Logger name="org.apache.hc.client5.http.wire" level="DEBUG" />
 </Loggers>
</Configuration>
```

UrlConnectionHttpClient

Para registrar los detalles de los clientes del servicio que utilizan la `UrlConnectionHttpClient`, cree primero un archivo `logging.properties` con el siguiente contenido:

```
handlers=java.util.logging.ConsoleHandler
java.util.logging.ConsoleHandler.level=FINEST
sun.net.www.protocol.http.HttpURLConnection.level=ALL
```

Defina la siguiente propiedad del sistema JVM con la ruta completa de `logging.properties`:

```
-Djava.util.logging.config.file=/full/path/to/logging.properties
```

Esta configuración registrará únicamente los encabezados de la solicitud y la respuesta, por ejemplo:

```
<Request>  FINE: sun.net.www.MessageHeader@35a9782c11 pairs: {GET /fileuploadtest
 HTTP/1.1: null}{amz-sdk-invocation-id: 5f7e707e-4ac5-bef5-ba62-00d71034ffdc}
{amz-sdk-request: attempt=1; max=4}{Authorization: AWS4-HMAC-SHA256
 Credential=<deleted>/20220927/us-east-1/s3/aws4_request, SignedHeaders=amz-sdk-
invocation-id;amz-sdk-request;host;x-amz-content-sha256;x-amz-date;x-amz-te,
 Signature=e367fa0bc217a6a65675bb743e1280cf12fbe8d566196a816d948fdf0b42ca1a}{User-
Agent: aws-sdk-java/2.17.230 Mac_OS_X/12.5 OpenJDK_64-Bit_Server_VM/25.332-b08
 Java/1.8.0_332 vendor/Amazon.com_Inc. io/sync http/UrlConnection cfg/retry-mode/
legacy}{x-amz-content-sha256: UNSIGNED-PAYLOAD}{X-Amz-Date: 20220927T133955Z}{x-amz-
te: append-md5}{Host: tkhill-test1.s3.amazonaws.com}{Accept: text/html, image/gif,
 image/jpeg, *; q=.2, */*; q=.2}{Connection: keep-alive}
<Response> FINE: sun.net.www.MessageHeader@70a36a6611 pairs: {null: HTTP/1.1
 200 OK}{x-amz-id-2: sAFeZDOKdUMsBbkdjyDZw7P0oocb4C9KbiuzfJ6TWKQsGXHM/
dFuOvr2tUb7Y1wEHGdJ3DSIxq0=}{x-amz-request-id: P9QW9SMZ97FKZ9X7}{Date: Tue,
 27 Sep 2022 13:39:57 GMT}{Last-Modified: Tue, 13 Sep 2022 14:38:12 GMT}{ETag:
 "2cbe5ad4a064cedec33b452bebf48032"}{x-amz-transfer-encoding: append-md5}{Accept-
Ranges: bytes}{Content-Type: text/plain}{Server: AmazonS3}{Content-Length: 67}
```

Para ver los request/response cuerpos, agréguelos `-Djavax.net.debug=all` a las propiedades de la JVM. Esta propiedad adicional registra una gran cantidad de información, incluida toda la información de SSL.

En la consola de registro o en el archivo de registro, busque `"GET"` o `"POST"` para ir rápidamente a la sección del registro que contiene las solicitudes y respuestas reales. Busque `"Plaintext before ENCRYPTION"` para las solicitudes y `"Plaintext after DECRYPTION"` para las respuestas para ver el texto completo de las cabeceras y los contenidos.

NettyNioAsyncHttpClient

Si su cliente de servicio asíncrono utiliza el `NettyNioAsyncHttpClient` predeterminado, añada dos registradores adicionales al su archivo `log4j2.xml` para registrar los encabezados HTTP y los textos de las solicitudes o respuestas.

```
<Logger name="io.netty.handler.logging" level="DEBUG" />
<Logger name="io.netty.handler.codec.http2.Http2FrameLogger" level="DEBUG" />
```

Este es un ejemplo completo de `log4j2.xml`:

```
<Configuration status="WARN">
    <Appenders>
        <Console name="ConsoleAppender" target="SYSTEM_OUT">
            <PatternLayout pattern="%d{YYYY-MM-dd HH:mm:ss} [%t] %-5p %c:%L - %m
%n" />
        </Console>
    </Appenders>

    <Loggers>
        <Root level="WARN">
            <AppenderRef ref="ConsoleAppender"/>
        </Root>
        <Logger name="software.amazon.awssdk" level="WARN" />
        <Logger name="software.amazon.awssdk.request" level="DEBUG" />
        <Logger name="io.netty.handler.logging" level="DEBUG" />
        <Logger name="io.netty.handler.codec.http2.Http2FrameLogger" level="DEBUG" /
>
    </Loggers>
</Configuration>
```

Esta configuración registra todos los detalles y request/response cuerpos del encabezado.

AwsCrtAsyncHttpClient/AwsCrtHttpClient

Si ha configurado su cliente de servicio para que utilice una instancia de un cliente de HTTP basado en AWS CRT, puede registrar los detalles configurando las propiedades del sistema JVM o mediante programación.

Log to a file at "Debug" level

Uso de las propiedades del sistema:

```
-Daws.crt.log.level=Trace
-Daws.crt.log.destination=File
-Daws.crt.log.filename=<path to file>
```

Mediante programación:

```
import software.amazon.awssdk.crt.Log;

// Execute this statement before constructing the SDK service client.
Log.initLoggingToFile(Log.LogLevel.Trace, "<path to file>");
```

Log to the console at "Debug" level

Uso de las propiedades del sistema:

```
-Daws.crt.log.level=Trace
-Daws.crt.log.destination=Stdout
```

Mediante programación:

```
import software.amazon.awssdk.crt.Log;

// Execute this statement before constructing the SDK service client.
Log.initLoggingToStdout(Log.LogLevel.Trace);
```

Por motivos de seguridad, en el nivel «Trace», los clientes HTTP AWS basados en CRT solo registran los encabezados de respuesta. Los encabezados de las solicitudes, los textos de las solicitudes y los de respuesta no se registran.

Configuración de los puntos de conexión del cliente en AWS SDK for Java 2.x

El SDK para Java 2.x proporciona varias formas de configurar puntos de conexión de servicio. Un punto de conexión es la URL que el SDK utiliza para realizar llamadas a la API a Servicios de AWS. De forma predeterminada, el SDK determina automáticamente el punto de conexión apropiado para cada servicio en función de la Región de AWS que haya configurado. No obstante, hay situaciones en las que tal vez sea preciso personalizar o anular estos puntos de conexión:

- Trabajo con implementaciones de servicio locales o de terceros (como LocalStack)
- Conexión con Servicios de AWS a través de un proxy o un punto de conexión de VPC
- Pruebas con puntos de conexión de servicio en versión beta o previa al lanzamiento

Opciones de configuración de puntos de conexión

AWS SDK for Java 2.x proporciona varias formas de configurar puntos de conexión:

- Configuración integrada en el código mediante el compilador de clientes de servicios
- Configuración externa con variables de entorno
- Configuración externa con propiedades del sistema JVM
- Configuración externa con un archivo de configuración de AWS compartido

Configuración de puntos de conexión integrados en el código

Uso de **`endpointOverride`**

La forma más directa de configurar un punto de conexión es utilizando el método `endpointOverride` en el compilador de clientes de servicio. Este método acepta un objeto `URI` que representa la URL del punto de conexión personalizado.

Example Configuración de un punto de conexión personalizado para un cliente de Amazon S3

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import java.net.URI;

S3Client s3 = S3Client.builder()
        .region(Region.US_WEST_2)
        .endpointOverride(URI.create("https://my-custom-s3-endpoint.example.com"))
        .build();
```

Al usar `endpointOverride`, debe seguir especificando una región para el cliente, aunque el punto de conexión se haya establecido de forma explícita. La región se usa para firmar solicitudes.

Detección de puntos de enlace

Algunas Servicios de AWS admiten detección de puntos de conexión, en la que el SDK puede detectar automáticamente el punto de conexión óptimo para su uso. Puede habilitar o deshabilitar esta característica mediante el método `endpointDiscoveryEnabled` en el compilador de clientes de servicio.

Example Habilitación de la detección de puntos de conexión para un cliente de DynamoDB

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;

DynamoDbClient dynamoDb = DynamoDbClient.builder()
        .region(Region.US_WEST_2)
        .endpointDiscoveryEnabled(true)
        .build();
```

Configuración de puntos de conexión de nivel de solicitud

En algunos casos, es posible que tenga que anular el punto de conexión para una solicitud específica y utilizar el mismo cliente para otras solicitudes con el punto de conexión predeterminado. AWS SDK for Java 2.x ofrece esta opción mediante la anulación de solicitudes.

Example Anulación del punto de conexión para una solicitud específica

```
import software.amazon.awssdk.core.SdkRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.http.SdkHttpRequest;

S3Client s3 = S3Client.builder()
        .region(Region.US_WEST_2)
        .build();

// Create a request
GetObjectRequest getObjectRequest = GetObjectRequest.builder()
        .bucket("amzn-s3-demo-bucket")
        .key("my-key")
        .overrideConfiguration(c -> c.putHeader("Host", "custom-endpoint.example.com"))
        .build();

// Execute the request with the custom endpoint
s3.getObject(getObjectRequest);
```

Tenga en cuenta que las anulaciones de puntos de conexión en el nivel de solicitud son limitadas y es posible que no funcionen en todos los servicios o escenarios. En la mayoría de los casos, se recomienda utilizar una configuración de punto de conexión en el nivel de cliente.

Configuración de puntos de conexión externos

Uso de variables de entorno

Puede configurar puntos de conexión mediante variables de entorno. El SDK admite la configuración de puntos de conexión específicos del servicio mediante variables de entorno con el formato `AWS_ENDPOINT_URL_[SERVICE]`, donde `[SERVICE]` es el identificador de servicio en mayúscula.

Example Configuración de un punto de conexión de S3 mediante variables de entorno

```
# For Linux/macOS
export AWS_ENDPOINT_URL_S3=https://my-custom-s3-endpoint.example.com

# For Windows
set AWS_ENDPOINT_URL_S3=https://my-custom-s3-endpoint.example.com
```

También puede establecer un prefijo o sufijo de URL de punto de conexión global mediante las siguientes variables de entorno:

- `AWS_ENDPOINT_URL`: establece un punto de conexión global para todos los servicios
- `AWS_ENDPOINT_URL_PREFIX`: añade un prefijo a todos los puntos de conexión de servicio
- `AWS_ENDPOINT_URL_SUFFIX`: añade un sufijo a todos los puntos de conexión de servicio

Uso de las propiedades del sistema JVM

También puede configurar puntos de conexión mediante las propiedades del sistema JVM. El formato es similar al de las variables de entorno, pero utiliza una convención de nomenclatura diferente.

Example Configuración de un punto de conexión de S3 utilizando las propiedades del sistema JVM

```
java -Daws.endpointUrl.s3=https://my-custom-s3-endpoint.example.com -jar your-
application.jar
```

La configuración de puntos de conexión globales también está disponible a través de las propiedades del sistema:

- `aws.endpointUrl`: establece un punto de conexión global para todos los servicios
- `aws.endpointUrl.prefix`: añade un prefijo a todos los puntos de conexión de servicio
- `aws.endpointUrl.suffix`: añade un sufijo a todos los puntos de conexión de servicio

Uso del archivo de configuración de AWS compartido

AWS SDK for Java 2.x también admite la configuración de puntos de conexión a través del archivo de configuración de AWS compartido, que normalmente se encuentra en `~/.aws/config` (Linux/macOS) o `%USERPROFILE%\.aws\config` (Windows). Consulte la Guía de referencia de los SDK y las herramientas de AWS para obtener información y ejemplos.

Prioridad de configuración

Cuando hay varias configuraciones de punto de conexión, el SDK sigue este orden de prioridad (de mayor a menor):

1. Anulaciones de nivel de solicitud (cuando proceda)
2. Configuración de nivel de cliente a través de `endpointOverride`
3. Variables de entorno
4. Propiedades del sistema JVM
5. Archivo de configuración de AWS compartido
6. Puntos de conexión predeterminados en función de la Región de AWS configurada

Configuración de puntos de conexión específicos del servicio

Algunos Servicios de AWS tienen opciones adicionales de configuración de puntos de conexión específicas para ese servicio. A continuación se muestran algunos ejemplos:

Configuración de puntos de conexión de Amazon S3

Amazon S3 admite varias configuraciones de puntos de conexión a través de la clase `S3Configuration`:

- `dualstackEnabled`: habilita compatibilidad con IPv6
- `accelerateModeEnabled`: habilita la aceleración de transferencias de S3
- `pathStyleAccessEnabled`: utiliza el estilo de acceso por ruta en lugar del estilo de alojamiento virtual
- `useArnRegionEnabled`: utiliza la región de un ARN para las solicitudes entre regiones
- `fipsModeEnabled`: enruta solicitudes a puntos de conexión que cumplen con FIPS

Example Configuración de opciones de punto de conexión específicas de S3

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.S3Configuration;

S3Client s3 = S3Client.builder()
        .region(Region.US_WEST_2)
        .serviceConfiguration(S3Configuration.builder()
                .accelerateModeEnabled(true)
                .dualstackEnabled(true)
                .pathStyleAccessEnabled(false)
                .fipsModeEnabled(true)
                .build())
        .build();
```

Configuración de puntos de conexión de DynamoDB

En el caso de DynamoDB, conviene utilizar la detección de puntos de conexión o conectarse a DynamoDB local para realizar pruebas:

Example Conexión a DynamoDB local

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import java.net.URI;

DynamoDbClient dynamoDb = DynamoDbClient.builder()
        .endpointOverride(URI.create("http://localhost:8000"))
```

```
        // The region is meaningless for DynamoDB local but required for the client
builder.
        .region(Region.US_WEST_2)
        .build();
```

DynamoDB también admite el uso de puntos de conexión basados en cuentas, que se pueden configurar en código o mediante ajustes externos. El siguiente ejemplo muestra cómo deshabilitar en el código el uso de puntos de conexión basados en cuentas al crear el cliente (la configuración predeterminada es la preferida):

```
DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
    .region(Region.US_EAST_1)
    .accountIdEndpointMode(AccountIdEndpointMode.DISABLED)
    .build();
```

Prácticas recomendadas

Al configurar puntos de conexión en AWS SDK for Java 2.x, tenga en cuenta estas prácticas recomendadas:

- Utilice una configuración externa para puntos de conexión específicos del entorno: utilice variables de entorno, propiedades del sistema o el archivo de configuración de AWS para puntos de conexión que varían de un entorno a otro (desarrollo, pruebas, producción).
- Utilice configuración integrada en el código para puntos de conexión específicos de la aplicación: utilice el método `endpointOverride` del compilador de clientes para puntos de conexión específicos del diseño de la aplicación.
- Especifique siempre una región: incluso al anular puntos de conexión, especifique siempre una región tal como se utiliza para firmar solicitudes.
- Tenga cuidado con las anulaciones de puntos de conexión globales: el uso de anulaciones de puntos de conexión globales puede afectar a todos los servicios, y quizá no sea esa su intención.
- Tenga en cuenta las implicaciones de seguridad: cuando utilice puntos de conexión personalizados, asegúrese de que cuenten con las medidas de seguridad adecuadas, especialmente para cargas de trabajo de producción.

Configure los clientes HTTP en el AWS SDK for Java 2.x

Puede cambiar el cliente HTTP para usarlo en su cliente de servicio, así como cambiar la configuración predeterminada de los clientes HTTP con AWS SDK for Java 2.x. En esta sección se describen los clientes HTTP y la configuración del SDK.

Clientes HTTP disponibles en el SDK para Java

Clientes síncronos

Los clientes HTTP sincrónicos del SDK para Java implementan la SdkHttpClientinterfaz. Un cliente de servicio síncrono, como el `S3Client` o el `DynamoDbClient`, requiere el uso de un cliente HTTP síncrono. AWS SDK para Java Ofrece tres clientes HTTP sincrónicos.

ApacheHttpClient (predeterminado)

ApacheHttpClientes el cliente HTTP predeterminado para los clientes de servicios síncronos. Para obtener información acerca de cómo configurar el `ApacheHttpClient`, consulte Configurar el cliente HTTP basado en Apache.

AwsCrtHttpClient

AwsCrtHttpClientproporciona E/S de alto rendimiento y sin bloqueo. Se basa en el cliente HTTP AWS Common Runtime (CRT). Para obtener información sobre cómo configurar el `AwsCrtHttpClient` y utilizar el servicio con los clientes, consulte the section called “Configurar clientes AWS HTTP basados en CRT”.

UrlConnectionHttpClient

Para minimizar la cantidad de archivos jar y bibliotecas de terceros que utiliza la aplicación, puede utilizar el UrlConnectionHttpClient. Para obtener información acerca de cómo configurar el `UrlConnectionHttpClient`, consulte Configurar el cliente HTTP URLConnection basado.

Apache 5 HttpClient

Apache5 HttpClient es una versión actualizada *`ApacheHttpClient`* que se basa en Apache 5.x. HttpClient La versión 5.x es la versión que Apache mantiene activamente y mejora la versión anterior utilizada al ofrecer compatibilidad con el ecosistema moderno de Java, incluida la compatibilidad con subprocesos virtuales para Java 2.1 y una mayor flexibilidad de registro mediante SLF4 J. que `Apache5HttpClient` sustituirá `ApacheHttpClient`

como cliente síncrono predeterminado en una futura versión del AWS SDK para Java 2.x. `ApacheHttpClient` Cuenta con una API y características idénticas, lo que la hace ideal como reemplazo directo. Para obtener información acerca de cómo configurar el `Apache5HttpClient`, consulte Configurar el cliente HTTP basado en Apache 5.x.

Clientes asíncronos

Los clientes HTTP asíncronos del SDK for Java implementan la interfaz. SdkAsyncHttpClient Un cliente de servicio asíncrono, como el `S3AsyncClient` o el `DynamoDbAsyncClient`, requiere el uso de un cliente HTTP asíncrono. AWS SDK para Java Ofrece dos clientes HTTP asíncronos.

NettyNioAsyncHttpClient (predeterminado)

NettyNioAsyncHttpClientes el cliente HTTP predeterminado que utilizan los clientes asíncronos. Para obtener información acerca de cómo configurar el `NettyNioAsyncHttpClient`, consulte the section called “Configurar el cliente HTTP basado en Netty”.

AwsCrtAsyncHttpClient


AwsCrtAsyncHttpClientSe basa en el cliente HTTP AWS Common Runtime (CRT). Para obtener información acerca de cómo configurar el `AwsCrtAsyncHttpClient`, consulte the section called “Configurar clientes AWS HTTP basados en CRT”.

Recomendaciones sobre el cliente HTTP

Al elegir una implementación de cliente HTTP entran en juego varios factores. Utilice la siguiente información para ayudarle en la decisión.

Diagrama de flujo de recomendaciones

El siguiente diagrama de flujo proporciona una guía general para ayudarle a determinar qué cliente HTTP debe utilizar.

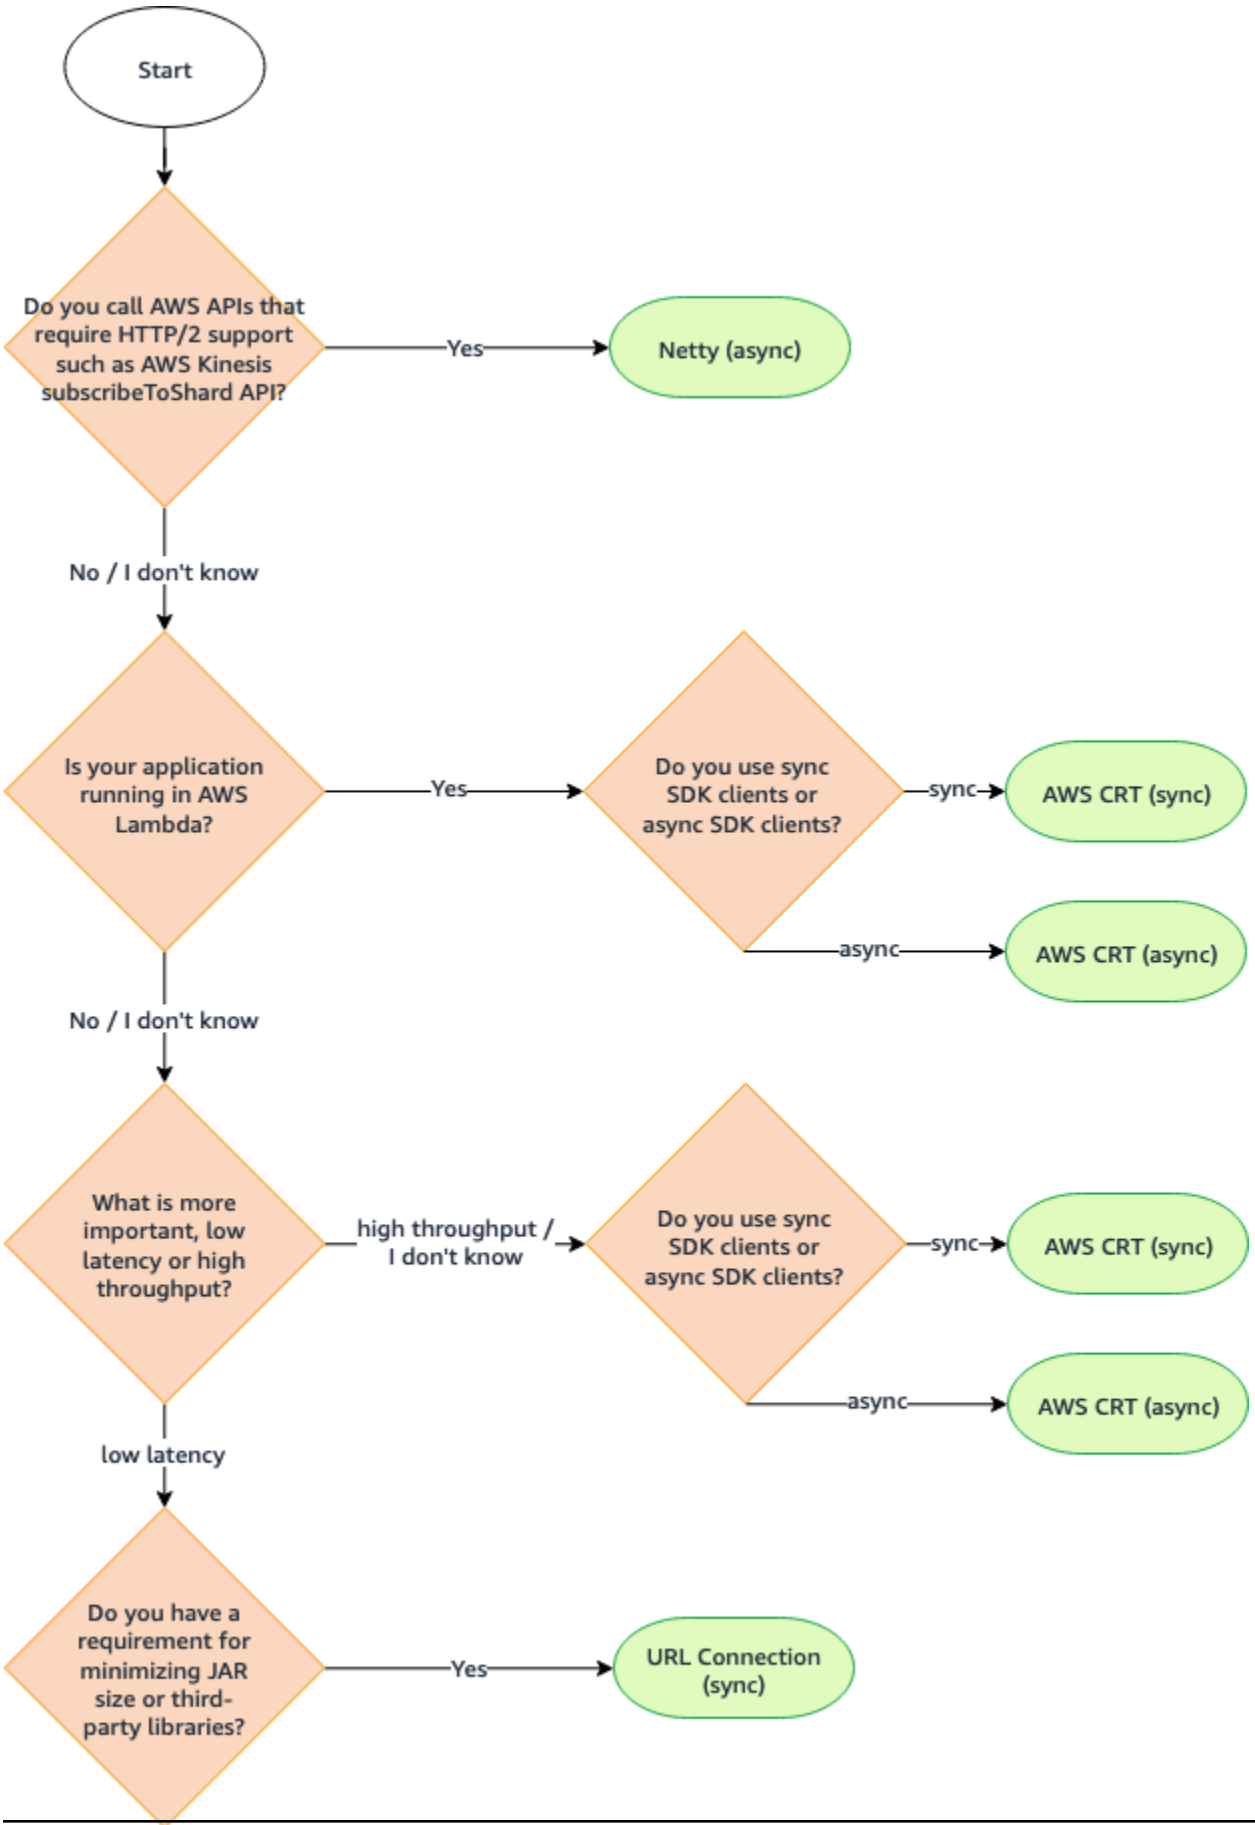
Start
Do you call AWS APIs that require HTTP/2 support such as AWS Kinesis subscribeToShard API?
Yes
Netty (async)
No / I don't know
Is your application running in AWS Lambda?
Yes
Do you use sync SDK clients or async SDK clients?
sync
AWS CRT (sync)
async
AWS CRT (async)
No / I don't know
What is more important, low latency or high throughput?
high throughput / I don't know
Do you use sync SDK clients or async SDK clients?
sync
AWS CRT (sync)
async
AWS CRT (async)
low latency
Do you have a requirement for minimizing JAR size or third-party libraries?
Yes
URL Connection (sync)
No / I don't know

Comparación de clientes HTTP

La siguiente tabla proporciona información detallada de cada cliente HTTP.

Cliente HTTP	Sínc. or asínc.	Cuándo se debe usar	Limitación o inconveniente
Cliente HTTP basado en Apache (cliente HTTP de sincronización predeterminado)	Sincronizar	Úselo si prefiere una latencia baja en lugar de un alto rendimiento	Tiempo de startup más lento en comparación con otros clientes HTTP
Cliente HTTP basado en URLConnection	Sincronizar	Úselo si tiene requisitos estrictos para limitar las dependencias de terceros	No admite el método HTTP PATCH, que requieren algunas API, como las operaciones de Amazon APIGateway Update
AWS Cliente HTTP de sincronización basado en CRT 1	Sincronizar	• Úselo si su aplicación se está ejecutando en AWS Lambda - Utilícelo si prefiere un alto rendimiento a una baja latencia • Úselo si prefiere clientes del SDK síncronos	Ya no se admiten las siguientes propiedades del sistema de Java. • javax.net.ssl.keyStore • javax.net.ssl.keyStorePassword

Cliente HTTP	Sínc. or asínc.	Cuándo se debe usar	Limitación o inconveniente
			• javax.net .ssl.trustStore • javax.net .ssl. trustStor ePassword
Netty-based HTTP client (cliente HTTP asíncrono predeterminado)	Asíncrono	• Úselo si su aplicación invoca elementos APIs que requieren compatibilidad con HTTP/2, como la API de Kinesis SubscribeToShard	Tiempo de startup más lento en comparaci ón con otros clientes HTTP

Cliente HTTP	Sínc. or asínc.	Cuándo se debe usar	Limitación o inconveniente
AWS Cliente HTTP asíncrono basado en CRT 1	Asíncrono	• Úselo si su aplicación se está ejecutando en AWS Lambda - Utilícelo si prefiere un alto rendimiento a una baja latencia • Úselo si prefiere clientes del SDK asíncronos	• No es compatible con clientes de servicio que requieran compatibilidad con HTTP/2, como `KinesisAsynClient` y `TranscribeStreamingAsyncClient` Ya no se admiten las siguientes propiedades del sistema de Java. • javax.net.ssl.keyStore • javax.net.ssl.keyStorePassword • javax.net.ssl.trustStore • javax.net.ssl. trustStorePassword

[1] Debido a sus ventajas adicionales, le recomendamos que utilice los clientes HTTP AWS basados en CRT si es posible.

Valores predeterminados de configuración inteligente

La AWS SDK for Java 2.x versión 2.17.102 o posterior ofrece una función de configuración inteligente por defecto. Esta característica optimiza dos propiedades del cliente HTTP junto con otras propiedades que no afectan al cliente HTTP.

Los valores predeterminados de la configuración inteligente establecen valores razonables para las propiedades `connectTimeoutInMillis` y `tlsNegotiationTimeoutInMillis` en función del valor de modo predeterminado que proporcione. El valor de modo predeterminado se elige según las características de la aplicación.

Para obtener más información sobre los valores predeterminados de la configuración inteligente y sobre cómo elegir el valor de modo predeterminado que mejor se adapte a sus aplicaciones, consulte la AWS SDKs Guía de referencia de herramientas y herramientas.

A continuación, se muestran cuatro formas de configurar el modo predeterminado para su aplicación.

Service client

Utilice el generador de clientes de servicio para configurar el modo predeterminado directamente en el cliente de servicio. El siguiente ejemplo establece el modo predeterminado en `auto` para el `DynamoDbClient`.

```
DynamoDbClient ddbClient = DynamoDbClient.builder()
                             .defaultsMode(DefaultsMode.AUTO)
                             .build();
```

System property

Puede usar la propiedad del `aws.defaultsMode` sistema para especificar el modo predeterminado. Si establece la propiedad del sistema en Java, debe establecerla antes de inicializar cualquier cliente de servicio.

En el siguiente ejemplo, se muestra cómo configurar el modo predeterminado en `auto` usar un conjunto de propiedades del sistema en Java.

```
System.setProperty("aws.defaultsMode", "auto");
```

En el siguiente ejemplo, se muestra cómo configurar el modo predeterminado como `auto` mediante una opción `-D` del comando `java`.

```
java -Daws.defaultsMode=auto
```

Environment variable

Defina un valor para la variable de entorno `AWS_DEFAULTS_MODE` para seleccionar el modo predeterminado de la aplicación.

La siguiente información muestra el comando que se debe ejecutar para establecer el valor del modo predeterminado como `auto` utilizando una variable de entorno.

Sistema operativo	Comando para definir variables de entorno
Linux, macOS o Unix	`export AWS_DEFAULTS_MODE=auto`
Windows	`set AWS_DEFAULTS_MODE=auto`

AWS config file

Puede añadir una propiedad de `defaults_mode` configuración al AWS `config` archivo compartido, como se muestra en el siguiente ejemplo.

```
[default]
defaults_mode = auto
```

Si define el modo predeterminado de forma global con la propiedad del sistema, la variable de entorno o el archivo de configuración AWS , puede sustituir la configuración cuando cree un cliente HTTP.

Al crear un cliente HTTP con el método `httpClientBuilder()`, la configuración se aplica solo a la instancia que se está creando. Un ejemplo de ello se muestra aquí. En este ejemplo, el cliente HTTP basado en Netty anula cualquier valor de modo predeterminado establecido globalmente para `connectTimeoutInMillis` y `tlsNegotiationTimeoutInMillis`.

Configurar el cliente HTTP basado en Apache

Los clientes del servicio sincrónico AWS SDK for Java 2.x utilizan un cliente HTTP basado en Apache de forma predeterminada. ApacheHttpClient El SDK `ApacheHttpClient` se basa en Apache. HttpClient

El SDK también ofrece el UrlConnectionHttpClient, que se carga más rápido, pero tiene menos funciones. Para obtener información acerca de cómo configurar el `UrlConnectionHttpClient`, consulte the section called “Configurar el cliente HTTP URLConnection basado”.

Para ver el conjunto completo de opciones de configuración disponibles para el`ApacheHttpClient`, consulte ApacheHttpClient.Builder y ProxyConfiguration.Builder.

Acceso al **`ApacheHttpClient`**

En la mayoría de las situaciones, `ApacheHttpClient` se utiliza sin ninguna configuración explícita. Declare sus clientes de servicios y el SDK configurará los `ApacheHttpClient` con valores estándar por usted.

Si quiere configurar de forma explícita el `ApacheHttpClient` o usarlo con varios clientes de servicio, tiene que hacerlo disponible para su configuración.

No se necesita configuración

Cuando declara una dependencia de un cliente de servicio en Maven, el SDK añade una dependencia en tiempo de ejecución del artefacto `apache-client`. Esto hace que la clase `ApacheHttpClient` esté disponible para su código en el tiempo de ejecución, pero no en el de compilación. Si no está configurando el cliente HTTP basado en Apache, no necesita especificar una dependencia para él.

En el siguiente fragmento XML de un archivo `pom.xml` Maven, la dependencia declarada con `<artifactId>s3</artifactId>` trae de forma transitoria el cliente HTTP basado en Apache. No necesita declarar una dependencia específicamente para ella.

```
<dependencyManagement>
   <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.27.21</version>
```

```
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <!-- The s3 dependency automatically adds a runtime dependency on the
 ApacheHttpClient-->
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>s3</artifactId>
    </dependency>
</dependencies>
```

Con estas dependencias, no puede realizar ningún cambio en la configuración HTTP, ya que la biblioteca `ApacheHttpClient` solo se encuentra en la ruta de clases del tiempo de ejecución.

Se necesita configuración

Para configurar el `ApacheHttpClient`, es necesario añadir una dependencia a la biblioteca `apache-client` en el momento de la compilación.

Consulte el siguiente ejemplo de un archivo `pom.xml` Maven para configurar el `ApacheHttpClient`.

```
    <dependencyManagement>
        <dependencies>
            <dependency>
                <groupId>software.amazon.awssdk</groupId>
                <artifactId>bom</artifactId>
                <version>2.27.21</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
        </dependencies>
    </dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>s3</artifactId>
        </dependency>
        <!-- By adding the apache-client dependency, ApacheHttpClient will be added to
             the compile classpath so you can configure it. -->
```

```
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>apache-client</artifactId>
        </dependency>
    </dependencies>
```

Utilizar y configurar el **`ApacheHttpClient`**

Puede configurar una instancia del `ApacheHttpClient` junto con la creación de un cliente de servicio, o configurar una sola instancia para compartirla entre varios clientes de servicio.

Con cualquiera de estos enfoques, utilice `ApacheHttpClient.Builder` para configurar las propiedades de la instancia de cliente HTTP basada en Apache.

Práctica recomendada: dedicar una instancia de **`ApacheHttpClient`** a un cliente de servicio

Si necesita configurar una instancia del `ApacheHttpClient`, le recomendamos que cree la instancia `ApacheHttpClient` dedicada. Puede hacerlo con el método `httpClientBuilder` del generador del cliente del servicio. De esta forma, el SDK administra el ciclo de vida del cliente HTTP, lo que ayuda a evitar posibles pérdidas de memoria si la instancia `ApacheHttpClient` no se cierra cuando ya no se necesita.

En el ejemplo siguiente, se crea un `S3Client` y se configura la instancia integrada de `ApacheHttpClient` con los valores `maxConnections` y `connectionTimeout`. La instancia HTTP se crea mediante el método `httpClientBuilder` de `S3Client.Builder`.

Importaciones

```
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import java.time.Duration;
```

Código

```
S3Client s3Client = S3Client   // Singleton: Use the s3Client for all requests.
    .builder()
    .httpClientBuilder(ApacheHttpClient.builder()
        .maxConnections(100)
        .connectionTimeout(Duration.ofSeconds(5))
    ).build();
```

```
// Perform work with the s3Client.

s3Client.close();   // Requests completed: Close all service clients.
```

Enfoque alternativo: compartir una instancia **`ApacheHttpClient`**

Para reducir el uso de recursos y memoria en su aplicación, puede configurar un `ApacheHttpClient` y compartirlo entre varios clientes de servicio. El grupo de conexiones HTTP se compartirá, lo que reduce el uso de recursos.

> **Note**
>
> Al compartir una instancia de `ApacheHttpClient`, es preciso cerrarla cuando esté lista para ser eliminada. El SDK no cerrará la instancia cuando el cliente del servicio esté cerrado.

En el siguiente ejemplo, se configura un cliente HTTP basado en Apache, utilizado por dos clientes de servicio. La instancia de `ApacheHttpClient` configurada se pasa al método `httpClient` de cada creador. Cuando los clientes de servicio y el cliente HTTP ya no son necesarios, el código los cierra de forma explícita. El código cierra el cliente HTTP por última vez.

Importaciones

```
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.s3.S3Client;
```

Código

```
SdkHttpClient apacheHttpClient = ApacheHttpClient.builder()
        .maxConnections(100).build();

// Singletons: Use the s3Client and dynamoDbClient for all requests.
S3Client s3Client =
    S3Client.builder()
            .httpClient(apacheHttpClient).build();

DynamoDbClient dynamoDbClient =
    DynamoDbClient.builder()
                  .httpClient(apacheHttpClient).build();
```

```
// Perform work with the s3Client and dynamoDbClient.

// Requests completed: Close all service clients.
s3Client.close();
dynamoDbClient.close();
apacheHttpClient.close();  // Explicitly close apacheHttpClient.
```

Ejemplo de configuración proxy

El siguiente fragmento de código utiliza el generador de configuración proxy para el cliente HTTP de Apache.

```
SdkHttpClient apacheHttpClient = ApacheHttpClient.builder()
                .proxyConfiguration(ProxyConfiguration.builder()
                        .endpoint(URI.create("http://example.com:1234"))
                        .username("username")
                        .password("password")
                        .addNonProxyHost("localhost")
                        .addNonProxyHost("host.example.com")
                        .build())
                .build();
```

Las propiedades del sistema Java equivalentes para la configuración del proxy se muestran en el siguiente fragmento de línea de comandos.

```
$ java -Dhttp.proxyHost=example.com -Dhttp.proxyPort=1234 -Dhttp.proxyUser=username \
-Dhttp.proxyPassword=password -Dhttp.nonProxyHosts=localhost|host.example.com -cp ...
 App
```

La configuración equivalente que usa variables de entorno es:

```
// Set the following environment variables.
// $ export HTTP_PROXY="http://username:password@example.com:1234"
// $ export NO_PROXY="localhost|host.example.com"

// Set the 'useSystemPropertyValues' to false on the proxy configuration.
SdkHttpClient apacheHttpClient = ApacheHttpClient.builder()
                .proxyConfiguration(ProxyConfiguration.builder()
                        .useSystemPropertyValues(Boolean.FALSE)
                        .build())
```

```
                .build();

// Run the application.
// $ java -cp ... App
```

> **Note**
>
> El cliente HTTP de Apache no admite actualmente las propiedades del sistema proxy de HTTPS ni la variable de entorno HTTPS_PROXY.

Configurar el cliente HTTP URLConnection basado

AWS SDK for Java 2.x Ofrece un cliente `UrlConnectionHttpClient` HTTP más ligero en comparación con el predeterminado. `ApacheHttpClient` El `UrlConnectionHttpClient` se basa en el `URLConnection` de Java.

El `UrlConnectionHttpClient` se carga más rápido que el cliente HTTP basado en Apache, pero tiene menos características. Como se carga más rápido, es una buena solución para las funciones AWS Lambda de Java.

El `UrlConnectionHttpClient` tiene varias opciones configurables a las que puede acceder.

> **Note**
>
> El `UrlConnectionHttpClient` no admite el método HTTP PATCH.
> Algunas operaciones de AWS API requieren solicitudes de PATCH. Los nombres de esas operaciones suelen empezar por `Update*`. A continuación se presentan varios ejemplos.
>
> - Varias `Update*` operaciones en la AWS Security Hub CSPM API y también en la BatchUpdateFindingsoperación
> - Todas las operaciones de `Update*` de la API de Amazon API Gateway
>
> Si puedes usar la`UrlConnectionHttpClient`, consulta primero la referencia de la API Servicio de AWS que estés usando. Compruebe si las operaciones que necesita utilizan la operación PATCH.

Acceso al `UrlConnectionHttpClient`

Para configurar y utilizar el `UrlConnectionHttpClient`, debe declarar una dependencia en el artefacto Maven `pom.xml` de su archivo `url-connection-client`.

A diferencia del `ApacheHttpClient`, el `UrlConnectionHttpClient` se añade automáticamente al proyecto, por lo que el usuario debe declararlo específicamente.

El siguiente ejemplo de un archivo `pom.xml` muestra las dependencias necesarias para usar y configurar el cliente HTTP.

```
<dependencyManagement>
   <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.27.21</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>

<!-- other dependencies such as s3 or dynamodb -->

<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>url-connection-client</artifactId>
    </dependency>
</dependencies>
```

Utilizar y configurar el `UrlConnectionHttpClient`

Puede configurar una instancia del `UrlConnectionHttpClient` junto con la creación de un cliente de servicio, o configurar una sola instancia para compartirla entre varios clientes de servicio.

Con cualquiera de los dos enfoques, se utiliza el UrlConnectionHttpClient.Builder para configurar las propiedades del cliente HTTP URLConnection basado.

Práctica recomendada: dedicar una instancia de **`UrlConnectionHttpClient`** a un cliente de servicio

Si necesita configurar una instancia del `UrlConnectionHttpClient`, le recomendamos que cree la instancia `UrlConnectionHttpClient` dedicada. Puede hacerlo con el método `httpClientBuilder` del generador del cliente del servicio. De esta forma, el SDK administra el ciclo de vida del cliente HTTP, lo que ayuda a evitar posibles pérdidas de memoria si la instancia `UrlConnectionHttpClient` no se cierra cuando ya no se necesita.

En el ejemplo siguiente, se crea un `S3Client` y se configura la instancia integrada de `UrlConnectionHttpClient` con los valores `socketTimeout` y `proxyConfiguration`. El método `proxyConfiguration` toma una expresión lambda de Java de tipo `Consumer<ProxyConfiguration.Builder>`.

Importaciones

```
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.urlconnection.UrlConnectionHttpClient;
import java.net.URI;
import java.time.Duration;
```

Código

```
// Singleton: Use the s3Client for all requests.
S3Client s3Client =
    S3Client.builder()
            .httpClientBuilder(UrlConnectionHttpClient.builder()
                    .socketTimeout(Duration.ofMinutes(5))
                    .proxyConfiguration(proxy -> proxy.endpoint(URI.create("http://
proxy.mydomain.net:8888"))))
            .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
            .build();

// Perform work with the s3Client.

s3Client.close();   // Requests completed: Close the s3client.
```

Enfoque alternativo: compartir una instancia **`UrlConnectionHttpClient`**

Para reducir el uso de recursos y memoria en su aplicación, puede configurar un `UrlConnectionHttpClient` y compartirlo entre varios clientes de servicio. El grupo de conexiones HTTP se compartirá, lo que reduce el uso de recursos.

> **Note**
>
> Al compartir una instancia de `UrlConnectionHttpClient`, es preciso cerrarla cuando esté lista para ser eliminada. El SDK no cerrará la instancia cuando el cliente del servicio esté cerrado.

El siguiente ejemplo configura un cliente HTTP URLConnection basado que utilizan dos clientes de servicio. La instancia de `UrlConnectionHttpClient` configurada se pasa al método `httpClient` de cada creador. Cuando los clientes de servicio y el cliente HTTP ya no son necesarios, el código los cierra de forma explícita. El código cierra el cliente HTTP por última vez.

Importaciones

```
import software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.awscore.defaultsmode.DefaultsMode;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.urlconnection.ProxyConfiguration;
import software.amazon.awssdk.http.urlconnection.UrlConnectionHttpClient;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.s3.S3Client;
import java.net.URI;
import java.time.Duration;
```

Código

```
SdkHttpClient urlHttpClient = UrlConnectionHttpClient.create();

// Singletons: Use the s3Client and dynamoDbClient for all requests.
S3Client s3Client =
    S3Client.builder()
            .httpClient(urlHttpClient)
            .defaultsMode(DefaultsMode.IN_REGION)
            .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
            .build();
```

```
DynamoDbClient dynamoDbClient =
    DynamoDbClient.builder()
                  .httpClient(urlHttpClient)
                  .defaultsMode(DefaultsMode.IN_REGION)
                  .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
                  .build();

// Perform work with the s3Client and dynamoDbClient.

// Requests completed: Close all service clients.
s3Client.close();
dynamoDbClient.close();
urlHttpClient.close();
```

Utiliza **`URLConnectionHttpClient`** y **`ApacheHttpClient`** juntos

Al utilizar el `UrlConnectionHttpClient` en su aplicación, debe proporcionar a cada cliente de servicio una instancia `URLConnectionHttpClient` o una instancia `ApacheHttpClient` mediante el método `httpClientBuilder` del creador de clientes de servicio.

Se produce una excepción si el programa utiliza varios clientes de servicio y se cumplen las siguientes condiciones:

- Un cliente de servicio está configurado para usar una instancia `UrlConnectionHttpClient`
- Otro cliente de servicio utiliza el `ApacheHttpClient` predeterminado sin compilarlo explícitamente con los métodos `httpClient()` o `httpClientBuilder()`

La excepción indicará que se encontraron varias implementaciones HTTP en la ruta de clases.

El siguiente fragmento de código de ejemplo conduce a una excepción.

```
// The dynamoDbClient uses the UrlConnectionHttpClient
DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
        .httpClient(UrlConnectionHttpClient.create())
        .build();

// The s3Client below uses the ApacheHttpClient at runtime, without specifying it.
// An SdkClientException is thrown with the message that multiple HTTP implementations
 were found on the classpath.
S3Client s3Client = S3Client.create();
```

```
// Perform work with the s3Client and dynamoDbClient.

dynamoDbClient.close();
s3Client.close();
```

Evite la excepción configurando explícitamente el `S3Client` con un `ApacheHttpClient`.

```
DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
        .httpClient(UrlConnectionHttpClient.create())
        .build();

S3Client s3Client = S3Client.builder()
        .httpClient(ApacheHttpClient.create())    // Explicitly build the
 ApacheHttpClient.
        .build();

// Perform work with the s3Client and dynamoDbClient.

dynamoDbClient.close();
s3Client.close();
```

> **Note**
>
> Para crear explícitamente el `ApacheHttpClient`, debe añadir una dependencia del artefacto `apache-client` en su archivo de proyecto Maven.

Ejemplo de configuración proxy

El siguiente fragmento de código utiliza el generador de configuración proxy para el cliente HTTP de conexión URL.

```
SdkHttpClient urlHttpClient = UrlConnectionHttpClient.builder()
                .proxyConfiguration(ProxyConfiguration.builder()
                        .endpoint(URI.create("http://example.com:1234"))
                        .username("username")
                        .password("password")
                        .addNonProxyHost("localhost")
                        .addNonProxyHost("host.example.com")
                        .build())
                .build();
```

Las propiedades del sistema Java equivalentes para la configuración del proxy se muestran en el siguiente fragmento de línea de comandos.

```
$ java -Dhttp.proxyHost=example.com -Dhttp.proxyPort=1234 -Dhttp.proxyUser=username \
-Dhttp.proxyPassword=password -Dhttp.nonProxyHosts=localhost|host.example.com -cp ...
 App
```

La configuración equivalente que usa variables de entorno es:

```
// Set the following environment variables.
// $ export HTTP_PROXY="http://username:password@example.com:1234"
// $ export NO_PROXY="localhost|host.example.com"

// Set the 'useSystemPropertyValues' to false on the proxy configuration.
SdkHttpClient apacheHttpClient = UrlConnectionHttpClient.builder()
                .proxyConfiguration(ProxyConfiguration.builder()
                        .useSystemPropertyValues(Boolean.FALSE)
                        .build())
                .build();

// Run the application.
// $ java -cp ... App
```

> **Note**
>
> El cliente HTTP URLConnection basado no admite actualmente las propiedades del sistema proxy HTTPS ni la variable de entorno HTTPS_PROXY.

Configurar el cliente HTTP basado en Netty

El cliente HTTP predeterminado para las operaciones asíncronas en el AWS SDK for Java 2.x es el basado en Netty. NettyNioAsyncHttpClient El cliente basado en Netty se basa en el marco de red asíncrono dirigido por eventos del proyecto Netty.

Como cliente HTTP alternativo, puede utilizar el nuevo cliente HTTP basado en CRT de AWS . En este tema se muestra cómo configurar el `NettyNioAsyncHttpClient`.

Acceso al **`NettyNioAsyncHttpClient`**

En la mayoría de las situaciones, se utiliza `NettyNioAsyncHttpClient` sin ninguna configuración explícita en los programas asíncronos. Declara sus clientes de servicios asíncronos y el SDK configurará los `NettyNioAsyncHttpClient` con valores estándar por usted.

Si quiere configurar de forma explícita el `NettyNioAsyncHttpClient` o usarlo con varios clientes de servicio, tiene que hacerlo disponible para su configuración.

No se necesita configuración

Cuando declara una dependencia de un cliente de servicio en Maven, el SDK añade una dependencia en tiempo de ejecución del artefacto `netty-nio-client`. Esto hace que la clase `NettyNioAsyncHttpClient` esté disponible para su código en el tiempo de ejecución, pero no en el de compilación. Si no está configurando el cliente HTTP basado en Netty, no necesita especificar una dependencia para él.

En el siguiente fragmento XML de un archivo `pom.xml` Maven, la dependencia declarada con `<artifactId>dynamodb-enhanced</artifactId>` trae de forma transitoria el cliente HTTP basado en Netty. No necesita declarar una dependencia específicamente para ella.

```
<dependencyManagement>
   <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.27.21</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>dynamodb-enhanced</artifactId>
    </dependency>
</dependencies>
```

Con estas dependencias, no puede realizar ningún cambio en la configuración HTTP, ya que la biblioteca `NettyNioAsyncHttpClient` solo se encuentra en la ruta de clases del tiempo de ejecución.

Se necesita configuración

Para configurar el `NettyNioAsyncHttpClient`, es necesario añadir una dependencia al artefacto `netty-nio-client` en tiempo de compilación.

Consulte el siguiente ejemplo de un archivo `pom.xml` Maven para configurar el `NettyNioAsyncHttpClient`.

```
    <dependencyManagement>
        <dependencies>
            <dependency>
                <groupId>software.amazon.awssdk</groupId>
                <artifactId>bom</artifactId>
                <version>2.27.21</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
        </dependencies>
    </dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>dynamodb-enhanced</artifactId>
        </dependency>
        <!-- By adding the netty-nio-client dependency, NettyNioAsyncHttpClient will
be
             added to the compile classpath so you can configure it. -->
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>netty-nio-client</artifactId>
        </dependency>
    </dependencies>
```

Utilizar y configurar el **`NettyNioAsyncHttpClient`**

Puede configurar una instancia del `NettyNioAsyncHttpClient` junto con la creación de un cliente de servicio, o configurar una sola instancia para compartirla entre varios clientes de servicio.

Con cualquiera de los dos enfoques, se utiliza el NettyNioAsyncHttpClient.Builder para configurar las propiedades de la instancia de cliente HTTP basada en Netty.

Práctica recomendada: dedicar una instancia de **`NettyNioAsyncHttpClient`** a un cliente de servicio

Si necesita configurar una instancia del `NettyNioAsyncHttpClient`, le recomendamos que cree una instancia de `NettyNioAsyncHttpClient` dedicada. Puede hacerlo con el método `httpClientBuilder` del generador del cliente del servicio. De esta forma, el SDK administra el ciclo de vida del cliente HTTP, lo que ayuda a evitar posibles pérdidas de memoria si la instancia `NettyNioAsyncHttpClient` no se cierra cuando ya no se necesita.

En el siguiente ejemplo, se crea una instancia `DynamoDbAsyncClient`, que también es utilizada por una instancia `DynamoDbEnhancedAsyncClient`. La instancia `DynamoDbAsyncClient` contiene la instancia `NettyNioAsyncHttpClient` con los valores `connectionTimeout` y `maxConcurrency`. La instancia HTTP se crea mediante el método `httpClientBuilder` de `DynamoDbAsyncClient.Builder`.

Importaciones

```
import software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.awscore.defaultsmode.DefaultsMode;
import software.amazon.awssdk.enhanced.dynamodb.DynamoDbEnhancedAsyncClient;
import
 software.amazon.awssdk.enhanced.dynamodb.extensions.AutoGeneratedTimestampRecordExtension;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.services.dynamodb.DynamoDbAsyncClient;
import java.time.Duration;
```

Código

```
// DynamoDbAsyncClient is the lower-level client used by the enhanced client.
DynamoDbAsyncClient dynamoDbAsyncClient =
    DynamoDbAsyncClient
        .builder()
            .httpClientBuilder(NettyNioAsyncHttpClient.builder()
            .connectionTimeout(Duration.ofMillis(5_000))
            .maxConcurrency(100)
            .tlsNegotiationTimeout(Duration.ofMillis(3_500)))
        .defaultsMode(DefaultsMode.IN_REGION)
        .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
```

```
        .build();

// Singleton: Use dynamoDbAsyncClient and enhancedClient for all requests.
DynamoDbEnhancedAsyncClient enhancedClient =
    DynamoDbEnhancedAsyncClient
        .builder()
        .dynamoDbClient(dynamoDbAsyncClient)
        .extensions(AutoGeneratedTimestampRecordExtension.create())
        .build();

// Perform work with the dynamoDbAsyncClient and enhancedClient.

// Requests completed: Close dynamoDbAsyncClient.
dynamoDbAsyncClient.close();
```

Enfoque alternativo: compartir una instancia **`NettyNioAsyncHttpClient`**

Para reducir el uso de recursos y memoria en su aplicación, puede configurar un `NettyNioAsyncHttpClient` y compartirlo entre varios clientes de servicio. El grupo de conexiones HTTP se compartirá, lo que reduce el uso de recursos.

> **Note**
>
> Al compartir una instancia de `NettyNioAsyncHttpClient`, es preciso cerrarla cuando esté lista para ser eliminada. El SDK no cerrará la instancia cuando el cliente del servicio esté cerrado.

En el siguiente ejemplo, se configura un cliente HTTP basado en Netty, utilizado por dos clientes de servicio. La instancia de `NettyNioAsyncHttpClient` configurada se pasa al método `httpClient` de cada creador. Cuando los clientes de servicio y el cliente HTTP ya no son necesarios, el código los cierra de forma explícita. El código cierra el cliente HTTP por última vez.

Importaciones

```
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.s3.S3Client;
```

Código

```
// Create a NettyNioAsyncHttpClient shared instance.
SdkAsyncHttpClient nettyHttpClient =
 NettyNioAsyncHttpClient.builder().maxConcurrency(100).build();

// Singletons: Use the s3AsyncClient, dbAsyncClient, and enhancedAsyncClient for all
 requests.
S3AsyncClient s3AsyncClient =
    S3AsyncClient.builder()
                 .httpClient(nettyHttpClient)
                 .build();

DynamoDbAsyncClient dbAsyncClient =
    DynamoDbAsyncClient.builder()
                       .httpClient(nettyHttpClient)
                       .defaultsMode(DefaultsMode.IN_REGION)

 .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
                       .build();

DynamoDbEnhancedAsyncClient enhancedAsyncClient =
    DynamoDbEnhancedAsyncClient.builder()
                               .dynamoDbClient(dbAsyncClient)

 .extensions(AutoGeneratedTimestampRecordExtension.create())
                               .build();

// Perform work with s3AsyncClient, dbAsyncClient, and enhancedAsyncClient.

// Requests completed: Close all service clients.
s3AsyncClient.close();
dbAsyncClient.close()
nettyHttpClient.close();  // Explicitly close nettyHttpClient.
```

Configuración de la negociación del protocolo ALPN

ALPN (negociación de protocolos de capa de aplicación) es una extensión de TLS que permite a la capa de aplicación negociar qué protocolo debe ejecutarse a través de una conexión segura, de manera que se evitan viajes de ida y vuelta adicionales y se obtiene mayor rendimiento.

Para permitir que el cliente de HTTP basado en Netty utilice ALPN, llame a los métodos del compilador como se muestra en el siguiente fragmento de código:

```
import software.amazon.awssdk.http.Protocol;
import software.amazon.awssdk.http.ProtocolNegotiation;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import
 software.amazon.awssdk.services.transcribestreaming.TranscribeStreamingAsyncClient;


// Configure the Netty-based HTTP client to use the ALPN protocol.
SdkAsyncHttpClient nettyClient = NettyNioAsyncHttpClient.builder()
                                                        .protocol(Protocol.HTTP2)

 .protocolNegotiation(ProtocolNegotiation.ALPN)
                                                        .build();
// Use the Netty-based HTTP client with a service client.
TranscribeStreamingAsyncClient transcribeClient =
 TranscribeStreamingAsyncClient.builder()

 .httpClient(nettyClient)

 .build();
```

La negociación de protocolos de ALPN actualmente solo funciona con el protocolo HTTP/2, como se muestra en el fragmento de código anterior.

Ejemplo de configuración proxy

El siguiente fragmento de código utiliza el generador de configuración proxy para el cliente HTTP de Netty.

```
SdkAsyncHttpClient nettyHttpClient = NettyNioAsyncHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .scheme("https")
        .host("myproxy")
        .port(1234)
        .username("username")
        .password("password")
        .nonProxyHosts(Set.of("localhost", "host.example.com"))
        .build())
    .build();
```

Las propiedades del sistema Java equivalentes para la configuración del proxy se muestran en el siguiente fragmento de línea de comandos.

```
$ java -Dhttps.proxyHost=myproxy -Dhttps.proxyPort=1234 -Dhttps.proxyUser=username \
-Dhttps.proxyPassword=password -Dhttp.nonProxyHosts=localhost|host.example.com -cp ...
 App
```

> **Important**
>
> Para utilizar cualquiera de las propiedades del sistema proxy HTTPS, la propiedad `scheme` debe estar configurada en código para `https`. Si la propiedad del esquema no está configurada en el código, el esquema predeterminado es HTTP y el SDK solo busca las propiedades del sistema `http.*`.

La configuración equivalente que usa variables de entorno es:

```
// Set the following environment variables.
// $ export HTTPS_PROXY="https://username:password@myproxy:1234"
// $ export NO_PROXY="localhost|host.example.com"

// Set the 'useSystemPropertyValues' to false on the proxy configuration.
SdkAsyncHttpClient nettyHttpClient = NettyNioAsyncHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .useSystemPropertyValues(Boolean.FALSE)
        .build())
    .build();

// Run the application.
// $ java -cp ... App
```

Configurar clientes AWS HTTP basados en CRT

Los clientes HTTP AWS basados en CRT incluyen los clientes síncronos y asíncronos. AwsCrtHttpClientAwsCrtAsyncHttpClient Los clientes HTTP AWS basados en CRT ofrecen las siguientes ventajas para los clientes HTTP:

- Tiempo de inicio del SDK más rápido
- Ocupación de menos espacio de memoria

- Tiempo de latencia reducido
- Administración del estado de conexión
- equilibrio de carga de DNS

AWS Componentes basados en CRT en el SDK

Los clientes HTTP AWS basados en CRT, que se describen en este tema, y el cliente S3 AWS basado en CRT son componentes diferentes del SDK.

Los clientes HTTP basados en CRT de AWS síncronos y asíncronos son implementaciones e interfaces de cliente HTTP de SDK y se utilizan para la comunicación HTTP general. Son alternativas a los otros clientes HTTP síncronos o asíncronos del SDK con ventajas adicionales.

El cliente S3 AWS basado en CRT es una implementación de la AsyncClient interfaz S3 y se utiliza para trabajar con el servicio Amazon S3. Es una alternativa a la implementación de la interfaz `S3AsyncClient` basada en Java y ofrece varias ventajas.

Si bien ambos componentes utilizan bibliotecas del AWS Common Runtime, los clientes HTTP AWS basados en CRT no utilizan la biblioteca aws-c-s 3 y no admiten las funciones de la API de carga multiparte de S3. El cliente S3 AWS basado en CRT, por el contrario, se creó específicamente para admitir las funciones de la API de carga multiparte de S3.

Acceda a los clientes HTTP basados en CRT AWS

Antes de poder usar los clientes HTTP AWS basados en CRT, agrega el `aws-crt-client` artefacto con una versión mínima de 2.22.0 a las dependencias de tu proyecto.

Utilice una de las siguientes opciones para configurar el archivo `pom.xml` de Maven.

> **Note**
>
> Puedes optar por utilizar la opción jar específica de la plataforma si necesitas reducir el tamaño de las dependencias del tiempo de ejecución, por ejemplo, si tu aplicación se ejecuta en una función. AWS Lambda

Uber-jar option

De forma predeterminada, `aws-crt-client` utiliza un supercontenedor de artefactos AWS CRT que contiene archivos binarios para varias plataformas, incluidas Linux, Windows y macOS.

```
<project>
   <properties>
     <aws.sdk.java.version>2.29.10*</aws.sdk.java.version>
  </properties>
  <dependencyManagement>
   <dependencies>
      <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>bom</artifactId>
        <version>${aws.sdk.version}</version>
        <type>pom</type>
        <scope>import</scope>
      </dependency>
   </dependencies>
  </dependencyManagement>
  <dependencies>
   <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>aws-crt-client</artifactId>
   </dependency>
  </dependencies>
</project>
```

*Reemplace la versión que se muestra en rojo por la versión del SDK de Java que desee utilizar. Busque las últimas novedades sobre Maven Central.

Platform-specific jar option

Para restringir el tiempo de ejecución de Java a la versión de la biblioteca AWS CRT específica para cada plataforma, realice los siguientes cambios en la opción Uber-JAR.

- Añada un elemento de `exclusions` al artefacto `aws-crt-client` del SDK. Esta exclusión impide que el SDK utilice transitoriamente el uber-jar CRT. AWS
- Agrega un elemento de dependencia para la versión específica de la plataforma AWS CRT que necesites. Consulte los pasos para determinar la versión del artefacto AWS CRT que aparecen a continuación para saber cómo determinar la versión correcta.

```
<project>
   <properties>
     <aws.sdk.java.version>2.29.10[1]</aws.sdk.java.version>
  </properties>
```

```
<dependencyManagement>
     <dependencies>
         <dependency>
             <groupId>software.amazon.awssdk</groupId>
             <artifactId>bom</artifactId>
             <version>${aws.sdk.java.version}</version>
             <type>pom</type>
             <scope>import</scope>
         </dependency>
     </dependencies>
 </dependencyManagement>
 <dependencies>
     <dependency>
         <groupId>software.amazon.awssdk</groupId>
         <artifactId>aws-crt-client</artifactId>
         <exclusions>
             <exclusion>
                 <groupId>software.amazon.awssdk.crt</groupId>
                 <artifactId>aws-crt</artifactId>
             </exclusion>
         </exclusions>
     </dependency>
     <dependency>
         <groupId>software.amazon.awssdk.crt</groupId>
         <artifactId>aws-crt</artifactId>
         <version>0.31.3[2]</version>
         <classifier>linux-x86_64[3]</classifier>
     </dependency>
 </dependencies>
```

[1]Reemplace la versión que se muestra en rojo por la versión del SDK de Java que desee utilizar. Busque las últimas novedades sobre Maven Central.

[2]Reemplace la versión de `software.amazon.awssdk.crt:aws-crt` que proporcionaría la Opción Uber-jar. Consulta los siguientes pasos para determinar la versión del artefacto AWS CRT.

[3]Reemplace el valor de `classifier` por uno para su plataforma. Consulte la GitHub página AWS CRT para Java para obtener una lista de los valores disponibles.

Pasos para determinar la versión del AWS artefacto CRT

Siga los pasos siguientes para determinar la versión del artefacto AWS CRT que es compatible con la versión del SDK para Java que está utilizando.

1. Configure el archivo `pom.xml` como se muestra en la Opción Uber-jar. Esta configuración permite ver qué versión de `software.amazon.awssdk.crt:aws-crt` del SDK está incluida de forma predeterminada.
2. En la raíz del proyecto (en el mismo directorio que el archivo `pom.xml`), ejecute el siguiente comando de Maven:

   ```
   mvn dependency:tree -Dincludes=software.amazon.awssdk.crt:aws-crt
   ```

   Maven puede realizar otras acciones, pero al final debería ver la salida de la consola de la dependencia de `software.amazon.awssdk.crt:aws-crt` que utiliza el SDK de forma transitiva. En el siguiente fragmento de código se muestra una salida de ejemplo basada en una versión del SDK de `2.29.10`:

   ```
   [INFO] org.example:yourProject:jar:1.0-SNAPSHOT
   [INFO] \- software.amazon.awssdk:aws-crt-client:jar:2.29.10:compile
   [INFO]    \- software.amazon.awssdk.crt:aws-crt:jar:0.31.3:compile
   ```
3. Utilice la versión que muestra la consola para el artefacto de `software.amazon.awssdk.crt:aws-crt`. En este caso, añada `0.31.3` al archivo `pom.xml`.

Utilice y configure un cliente HTTP basado en AWS CRT

Puede configurar un cliente HTTP AWS basado en CRT junto con la creación de un cliente de servicio, o puede configurar una sola instancia para compartirla entre varios clientes de servicio.

Con cualquiera de estos enfoques, se utiliza un generador para configurar las propiedades de la instancia de cliente HTTP AWS basada en CRT.

Práctica recomendada: dedicar una instancia de a un cliente de servicio

Si necesitas configurar una instancia de un cliente HTTP AWS basado en CRT, te recomendamos que dediques la instancia y la compiles junto con el cliente de servicio. Puede hacerlo con el método `httpClientBuilder` del generador del cliente del servicio. De esta forma, el SDK administra el

ciclo de vida del cliente HTTP, lo que ayuda a evitar posibles pérdidas de memoria si la instancia del cliente HTTP AWS basada en CRT no se cierra cuando ya no es necesaria.

En el siguiente ejemplo, se crea un cliente de servicio S3 y se configura un cliente HTTP AWS basado en CRT con valores y valores. `connectionTimeout` `maxConcurrency`

Synchronous client

Importaciones

```
import software.amazon.awssdk.http.crt.AwsCrtHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import java.time.Duration;
```

Código

```
// Singleton: Use s3Client for all requests.
S3Client s3Client = S3Client.builder()
    .httpClientBuilder(AwsCrtHttpClient
        .builder()
        .connectionTimeout(Duration.ofSeconds(3))
        .maxConcurrency(100))
    .build();

// Perform work with the s3Client.

// Requests completed: Close the s3Client.
s3Client.close();
```

Asynchronous client

Importaciones

```
import software.amazon.awssdk.http.crt.AwsCrtAsyncHttpClient;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import java.time.Duration;
```

Código

```
// Singleton: Use s3AsyncClient for all requests.
S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
    .httpClientBuilder(AwsCrtAsyncHttpClient
```

```
        .builder()
        .connectionTimeout(Duration.ofSeconds(3))
        .maxConcurrency(100))
    .build();

// Perform work with the s3AsyncClient.

// Requests completed: Close the s3AsyncClient.
s3AsyncClient.close();
```

Enfoque alternativo: compartir una instancia

Para reducir el uso de recursos y memoria para su aplicación, puede configurar un cliente HTTP AWS basado en CRT y compartirlo entre varios clientes de servicio. El grupo de conexiones HTTP se compartirá, lo que reduce el uso de recursos.

> **Note**
>
> Cuando se comparte una instancia de cliente HTTP AWS basada en CRT, debe cerrarla cuando esté lista para su eliminación. El SDK no cerrará la instancia cuando el cliente del servicio esté cerrado.

El siguiente ejemplo configura una instancia de cliente HTTP AWS basada en CRT con valores y. `connectionTimeout` `maxConcurrency` La instancia configurada se pasa al método `httpClient` del creador de cada cliente de servicio. Cuando los clientes de servicio y el cliente HTTP ya no son necesarios, se cierran de forma explícita. El cliente HTTP se cierra en último lugar.

Synchronous client

Importaciones

```
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.awscore.defaultsmode.DefaultsMode;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.crt.AwsCrtHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.s3.S3Client;
```

```
import java.time.Duration;
```

Código

```
// Create an AwsCrtHttpClient shared instance.
SdkHttpClient crtHttpClient = AwsCrtHttpClient.builder()
    .connectionTimeout(Duration.ofSeconds(3))
    .maxConcurrency(100)
    .build();

// Singletons: Use the s3Client and dynamoDbClient for all requests.
S3Client s3Client = S3Client.builder()
    .httpClient(crtHttpClient)
    .credentialsProvider(EnvironmentVariableCredentialsProvider.crea
    .defaultsMode(DefaultsMode.IN_REGION)
    .region(Region.US_EAST_1)
    .build();

DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
    .httpClient(crtHttpClient)
    .credentialsProvider(EnvironmentVariableCredentialsProvider.crea
    .defaultsMode(DefaultsMode.IN_REGION)
    .region(Region.US_EAST_1)
    .build();

// Requests completed: Close all service clients.
s3Client.close();
dynamoDbClient.close();
crtHttpClient.close();  // Explicitly close crtHttpClient.
```

Asynchronous client

Importaciones

```
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.awscore.defaultsmode.DefaultsMode;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.crt.AwsCrtAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbAsyncClient;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import java.time.Duration;
```

Código

```
// Create an AwsCrtAsyncHttpClient shared instance.
SdkAsyncHttpClient crtAsyncHttpClient = AwsCrtAsyncHttpClient.builder()
    .connectionTimeout(Duration.ofSeconds(3))
    .maxConcurrency(100)
    .build();

// Singletons: Use the s3AsyncClient and dynamoDbAsyncClient for all requests.
S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
    .httpClient(crtAsyncHttpClient)
    .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
    .defaultsMode(DefaultsMode.IN_REGION)
    .region(Region.US_EAST_1)
    .build();

DynamoDbAsyncClient dynamoDbAsyncClient = DynamoDbAsyncClient.builder()
    .httpClient(crtAsyncHttpClient)
    .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
    .defaultsMode(DefaultsMode.IN_REGION)
    .region(Region.US_EAST_1)
    .build();

// Requests completed: Close all service clients.
s3AsyncClient.close();
dynamoDbAsyncClient.close();
crtAsyncHttpClient.close();  // Explicitly close crtAsyncHttpClient.
```

Establezca un cliente HTTP AWS basado en CRT como predeterminado

Puede configurar su archivo de compilación de Maven para que el SDK utilice un cliente HTTP AWS basado en CRT como cliente HTTP predeterminado para los clientes de servicio.

Para ello, añada un elemento `exclusions` con las dependencias predeterminadas del cliente HTTP a cada artefacto del cliente de servicio.

En el siguiente `pom.xml` ejemplo, el SDK usa un cliente HTTP AWS basado en CRT para los servicios de S3. Si el cliente de servicio de su código es un `S3AsyncClient`, el SDK utiliza `AwsCrtAsyncHttpClient`. Si el cliente de servicio es un S3Client, el SDK utiliza `AwsCrtHttpClient`. Con esta configuración, el cliente HTTP asíncrono predeterminado basado en Netty y el HTTP síncrono predeterminado basado en Apache no están disponibles.

```
<project>
   <properties>
     <aws.sdk.version>VERSION</aws.sdk.version>
  </properties>
  <dependencies>
   <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>s3</artifactId>
      <version>${aws.sdk.version}</version>
      <exclusions>
         <exclusion>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>netty-nio-client</artifactId>
         </exclusion>
         <exclusion>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>apache-client</artifactId>
         </exclusion>
      </exclusions>
   </dependency>
   <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>aws-crt-client</artifactId>
   </dependency>
  </dependencies>
</project>
```

Visite el repositorio central de Maven para obtener el valor más reciente. *VERSION*

> **Note**
>
> Si se declaran varios clientes de servicio en un archivo `pom.xml`, todos requieren el elemento XML `exclusions`.

Utilizar una propiedad del sistema Java

Para usar los clientes HTTP AWS basados en CRT como HTTP predeterminado para su aplicación, puede establecer la propiedad del sistema Java en un valor `software.amazon.awssdk.http.async.service.impl` de. `software.amazon.awssdk.http.crt.AwsCrtSdkHttpService`

Para configurarlo durante el inicio de la aplicación, ejecute un comando similar al siguiente.

```
java app.jar -Dsoftware.amazon.awssdk.http.async.service.impl=\
software.amazon.awssdk.http.crt.AwsCrtSdkHttpService
```

Use el siguiente fragmento de código para establecer la propiedad del sistema en el código de la aplicación.

```
System.setProperty("software.amazon.awssdk.http.async.service.impl",
"software.amazon.awssdk.http.crt.AwsCrtSdkHttpService");
```

> **Note**
>
> Debe añadir una dependencia al `aws-crt-client` artefacto del `pom.xml` archivo cuando utilice una propiedad del sistema para configurar el uso de los clientes HTTP basados en AWS CRT.

Configuración avanzada de clientes HTTP basados en AWS CRT

Puede utilizar varios ajustes de configuración de los clientes HTTP AWS basados en CRT, incluida la configuración del estado de la conexión y el tiempo máximo de inactividad. Puede revisar las opciones de configuración disponibles para el `AwsCrtAsyncHttpClient`. Puede configurar las mismas opciones para `AwsCrtHttpClient`.

Configuración del estado de conexión

Puede configurar el estado de la conexión para los clientes HTTP AWS basados en CRT mediante el `connectionHealthConfiguration` método del generador de clientes HTTP.

En el siguiente ejemplo, se crea un cliente de servicio S3 que utiliza una instancia de cliente HTTP AWS basada en CRT configurada con una configuración de mantenimiento de la conexión y un tiempo máximo de inactividad para las conexiones.

Synchronous client

Importaciones

```
import software.amazon.awssdk.http.crt.AwsCrtHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
```

```
import java.time.Duration;
```

Código

```
// Singleton: Use the s3Client for all requests.
S3Client s3Client = S3Client.builder()
    .httpClientBuilder(AwsCrtHttpClient
        .builder()
        .connectionHealthConfiguration(builder -> builder
            .minimumThroughputInBps(32000L)
            .minimumThroughputTimeout(Duration.ofSeconds(3)))
        .connectionMaxIdleTime(Duration.ofSeconds(5)))
    .build();

// Perform work with s3Client.

// Requests complete: Close the service client.
s3Client.close();
```

Asynchronous client

Importaciones

```
import software.amazon.awssdk.http.crt.AwsCrtAsyncHttpClient;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import java.time.Duration;
```

Código

```
// Singleton: Use the s3AsyncClient for all requests.
S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
    .httpClientBuilder(AwsCrtAsyncHttpClient
        .builder()
        .connectionHealthConfiguration(builder -> builder
            .minimumThroughputInBps(32000L)
            .minimumThroughputTimeout(Duration.ofSeconds(3)))
        .connectionMaxIdleTime(Duration.ofSeconds(5)))
    .build();

// Perform work with s3AsyncClient.

// Requests complete: Close the service client.
```

```
s3AsyncClient.close();
```

Compatibilidad con HTTP/2

El protocolo HTTP/2 aún no es compatible con los clientes HTTP AWS basados en CRT, pero está previsto que se publique en un futuro.

Mientras tanto, si utiliza clientes de servicio que requieren compatibilidad con HTTP/2, como el KinesisAsyncClient o el TranscribeStreamingAsyncClient, considere la posibilidad de utilizar el en su lugar. NettyNioAsyncHttpClient

Ejemplo de configuración proxy

El siguiente fragmento de código muestra el uso de `ProxyConfiguration.Builder` que se utiliza para configurar el proxy en el código.

Synchronous client

Importaciones

```
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.crt.AwsCrtHttpClient;
import software.amazon.awssdk.http.crt.ProxyConfiguration;
```

Código

```
SdkHttpClient crtHttpClient = AwsCrtHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .scheme("https")
        .host("myproxy")
        .port(1234)
        .username("username")
        .password("password")
        .nonProxyHosts(Set.of("localhost", "host.example.com"))
        .build())
    .build();
```

Asynchronous client

Importaciones

```
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.crt.AwsCrtAsyncHttpClient;
import software.amazon.awssdk.http.crt.ProxyConfiguration;
```

Código

```
SdkAsyncHttpClient crtAsyncHttpClient = AwsCrtAsyncHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .scheme("https")
        .host("myproxy")
        .port(1234)
        .username("username")
        .password("password")
        .nonProxyHosts(Set.of("localhost", "host.example.com"))
        .build())
    .build();
```

Las propiedades del sistema Java equivalentes para la configuración del proxy se muestran en el siguiente fragmento de línea de comandos.

```
$ java -Dhttps.proxyHost=myproxy -Dhttps.proxyPort=1234 -Dhttps.proxyUser=username \
-Dhttps.proxyPassword=password -Dhttp.nonProxyHosts=localhost|host.example.com -cp ...
 App
```

Important

Para utilizar cualquiera de las propiedades del sistema proxy HTTPS, la propiedad `scheme` debe estar configurada en código para `https`. Si la propiedad del esquema no está configurada en el código, el esquema predeterminado es HTTP y el SDK solo busca las propiedades del sistema `http.*`.

La configuración equivalente que usa variables de entorno es:

```
// Set the following environment variables.
// $ export HTTPS_PROXY="https://username:password@myproxy:1234"
// $ export NO_PROXY="localhost|host.example.com"

// Set the 'useSystemPropertyValues' to false on the proxy configuration.
```

```
SdkAsyncHttpClient crtAsyncHttpClient = AwsCrtAsyncHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .scheme("https")
        .useSystemPropertyValues(Boolean.FALSE)
        .build())
    .build();

// Run the application.
// $ java -cp ... App
```

Configuración de proxies de HTTP

Puede configurar proxies de HTTP mediante código, definiendo propiedades del sistema Java o definiendo variables de entorno.

Configuración en código

Los proxies se configuran en código con un generador `ProxyConfiguration` específico del cliente al crear el cliente de servicio. El código siguiente muestra una configuración de proxy de ejemplo para un cliente HTTP basado en Apache que utiliza un cliente de servicio de Amazon S3.

```
SdkHttpClient httpClient1 = ApacheHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .endpoint(URI.create("http://proxy.example.com"))
        .username("username")
        .password("password")
        .addNonProxyHost("localhost")
        .build())
    .build();

S3Client s3Client = S3Client.builder()
    .httpClient(httpClient)
    .build();
```

En la sección correspondiente a cada cliente HTTP de este tema se muestra un ejemplo de configuración de proxy.

- Cliente HTTP basado en Apache
- URLConnectioncliente HTTP basado
- Netty-based HTTP client
- AWS Cliente HTTP basado en CRT

Configuración de proxies de HTTP con ajustes externos

Aunque no utilice explícitamente un compilador de `ProxyConfiguration` en el código, el SDK busca ajustes externos para configurar una configuración de proxy predeterminada.

De forma predeterminada, el SDK busca primero las propiedades del sistema JVM. Si se encuentra una sola propiedad, el SDK usa el valor y cualquier otro valor de propiedad del sistema. Si no hay propiedades del sistema disponibles, el SDK busca variables de entorno del proxy.

El SDK puede usar las siguientes propiedades y variables de entorno del sistema Java.

Propiedades del sistema Java

Propiedad del sistema	Description (Descripción)	Compatibilidad con clientes HTTP
http.proxyHost	Nombre de host del servidor proxy HTTP	Todos
http.proxyPort	Número de puerto del servidor proxy HTTP	Todos
http.proxyUser	Nombre de usuario para la autenticación mediante proxy HTTP	Todos
http.proxyPassword	Contraseña para la autentica ción mediante proxy HTTP	Todos
http. nonProxyHosts	Lista de hosts a los que se debe acceder directamente, sin pasar por el proxy. Esta lista también es válida cuando se utiliza HTTPS.	Todos
https.proxyHost	Nombre de host del servidor proxy HTTP	Netty, CRT
https.proxyPort	Número de puerto del servidor proxy HTTP	Netty, CRT

Propiedad del sistema	Description (Descripción)	Compatibilidad con clientes HTTP
https.proxyUser	Nombre de usuario para la autenticación mediante proxy HTTPS	Netty, CRT
https.proxyPassword	Contraseña para la autentica ción mediante proxy HTTPS	Netty, CRT

Variables de entorno

Variable de entorno	Description (Descripción)	Compatibilidad con clientes HTTP
HTTP_PROXY[1]	URL válida con un esquema de HTTP	Todos
HTTPS_PROXY[1]	URL válida con un esquema de HTTPS	Netty, CRT
NO_PROXY[2]	Lista de hosts a los que se debe acceder directamente, sin pasar por el proxy. La lista es válida tanto para HTTP como para HTTPS.	Todos

Visualización de notas clave y al pie

Todos: todos los clientes HTTP que ofrece el SDK: `UrlConnectionHttpClient`, `ApacheHttpClient`, `NettyNioAsyncHttpClient`, `AwsCrtAsyncHttpClient`.

Netty: el cliente de HTTP basado en Netty (`NettyNioAsyncHttpClient`)

CRT: los clientes HTTP AWS basados en CRT, (y)`AwsCrtHttpClient`. `AwsCrtAsyncHttpClient`

[1]La variable de entorno consultada, ya sea `HTTP_PROXY` o `HTTPS_PROXY`, depende de la configuración del esquema en la `ProxyConfiguration` del cliente. El esquema predeterminado es HTTP. El siguiente fragmento de código muestra cómo cambiar el esquema a HTTPS utilizado para la resolución de variables de entorno.

```
SdkHttpClient httpClient = ApacheHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .scheme("https")
        .build())
    .build();
```

[2]La variable de entorno `NO_PROXY` admite una combinación de separadores “|” y “,” entre los nombres de host. Los nombres de host pueden incluir el comodín “*”.

Uso de una combinación de ajustes

Puede usar una combinación de ajustes de proxy de HTTP en el código, las propiedades del sistema y las variables de entorno.

Example– configuración proporcionada por una propiedad del sistema y por código.

```
// Command line with the proxy password set as a system property.
$ java -Dhttp.proxyPassword=SYS_PROP_password -cp ... App

// Since the 'useSystemPropertyValues' setting is 'true' (the default), the SDK will
 supplement
// the proxy configuration in code with the 'http.proxyPassword' value from the system
 property.
SdkHttpClient apacheHttpClient = ApacheHttpClient.builder()
            .proxyConfiguration(ProxyConfiguration.builder()
                    .endpoint(URI.create("http://localhost:1234"))
                    .username("username")
                    .build())
            .build();

// Use the apache HTTP client with proxy configuration.
DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
                    .httpClient(apacheHttpClient)
                    .build();
```

El SDK resuelve la siguiente configuración del proxy.

```
Host = localhost
Port = 1234
Password = SYS_PROP_password
UserName = username
Non ProxyHost = null
```

Example– están disponibles tanto las propiedades del sistema como las variables de entorno

El compilador `ProxyConfiguration` del cliente de HTTP ofrece configuraciones denominadas `useSystemPropertyValues` y `useEnvironmentVariablesValues`. De forma predeterminada, ambas configuraciones son `true`. Cuando es `true`, el SDK utiliza automáticamente valores de propiedades del sistema o variables de entorno para las opciones que no proporciona el compilador `ProxyConfiguration`.

> **Important**
>
> Las propiedades del sistema tienen prioridad sobre las variables de entorno. Si se encuentra una propiedad del sistema proxy de HTTP, el SDK recupera todos los valores de las propiedades del sistema y ninguno de las variables de entorno. Si desea priorizar las variables de entorno sobre las propiedades del sistema, establezca `useSystemPropertyValues` en `false`.

En este ejemplo, los siguientes ajustes están disponibles en tiempo de ejecución:

```
// System properties
http.proxyHost=SYS_PROP_HOST.com
http.proxyPort=2222
http.password=SYS_PROP_PASSWORD
http.user=SYS_PROP_USER

// Environment variables
HTTP_PROXY="http://EnvironmentUser:EnvironmentPassword@ENV_VAR_HOST:3333"
NO_PROXY="environmentnonproxy.host,environmentnonproxy2.host:1234"
```

El cliente de servicio se crea con una de las instrucciones siguientes. Ninguna de las instrucciones establece explícitamente una configuración de proxy.

```
DynamoDbClient client = DynamoDbClient.create();
```

```
DynamoDbClient client = DynamoDbClient.builder().build();
DynamoDbClient client = DynamoDbClient.builder()
    .httpClient(ApacheHttpClient.builder()
        .proxyConfiguration(ProxyConfiguration.builder()
            .build())
        .build())
    .build();
```

El SDK resuelve la siguiente configuración del proxy.

```
Host = SYS_PROP_HOST.com
Port = 2222
Password = SYS_PROP_PASSWORD
UserName = SYS_PROP_USER
Non ProxyHost = null
```

Dado que el cliente de servicio tiene la configuración de proxy predeterminada, el SDK busca las propiedades del sistema y, a continuación, las variables de entorno. Puesto que la configuración de las propiedades del sistema tiene prioridad sobre las variables de entorno, el SDK utiliza únicamente las propiedades del sistema.

Si el uso de las propiedades del sistema se cambia a `false`, como se muestra en el código siguiente, el SDK resuelve solo las variables de entorno.

```
DynamoDbClient client = DynamoDbClient.builder()
    .httpClient(ApacheHttpClient.builder()
        .proxyConfiguration(ProxyConfiguration.builder()
            .useSystemPropertyValues(Boolean.FALSE)
            .build())
        .build())
    .build();
```

La configuración de proxy resuelta mediante HTTP es:

```
Host = ENV_VAR_HOST
Port = 3333
Password = EnvironmentPassword
UserName = EnvironmentUser
Non ProxyHost = environmentnonproxy.host, environmentnonproxy2.host:1234
```

Configurar el cliente HTTP basado en Apache 5.x

Acceda al Apache5 HttpClient

Para poder utilizar el, `Apache5HttpClient` debe agregar una dependencia apache5-client y configurarlo explícitamente `Apache5HttpClient` en sus clientes de servicio.

```
<dependencyManagement>
   <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.41.0*</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>

<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>s3</artifactId>
    </dependency>

    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>apache5-client</artifactId>
    </dependency>
</dependencies>
```

*Reemplace la versión que se muestra en rojo por la versión del SDK de Java que desee utilizar. Busque las últimas novedades sobre Maven Central.

Utilizar y configurar el **`Apache5HttpClient`**

Puede configurar una instancia del `Apache5HttpClient` junto con la creación de un cliente de servicio, o configurar una sola instancia para compartirla entre varios clientes de servicio.

Con cualquiera de los dos enfoques, se utiliza el Apache5 HttpClient .Builder para configurar las propiedades del cliente HTTP basado en Apache 5.

Práctica recomendada: dedicar una instancia de Apache5 HttpClient a un cliente de servicio

Si necesita configurar una instancia del `Apache5HttpClient`, le recomendamos que cree la instancia `Apache5HttpClient` dedicada. Para ello, utilice el httpClientBuilder método del creador del cliente de servicio. De esta forma, el SDK administra el ciclo de vida del cliente HTTP, lo que ayuda a evitar posibles pérdidas de memoria si la instancia `Apache5HttpClient` no se cierra cuando ya no se necesita.

En el siguiente ejemplo, se crea un S3Client y se configura la instancia integrada `Apache5HttpClient` con los valores MaxConnections y ConnectionTimeout. La instancia HTTP se crea mediante el método `httpClientBuilder` de `S3Client.Builder`.

Importaciones

```
import software.amazon.awssdk.http.apache5.Apache5HttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import java.time.Duration;
```

Código

```
S3Client s3Client = S3Client   // Singleton: Use the s3Client for all requests.
    .builder()
    .httpClientBuilder(Apache5HttpClient.builder()
        .maxConnections(100)
        .connectionTimeout(Duration.ofSeconds(5))
    )
    .build();

// Perform work with the s3Client.

s3Client.close();   // Requests completed: Close all service clients.
```

Enfoque alternativo: compartir una instancia **`Apache5HttpClient`**

Para reducir el uso de recursos y memoria en su aplicación, puede configurar un `Apache5HttpClient` y compartirlo entre varios clientes de servicio. El grupo de conexiones HTTP se compartirá, lo que reduce el uso de recursos.

> **Note**
>
> Al compartir una instancia de `Apache5HttpClient`, es preciso cerrarla cuando esté lista para ser eliminada. El SDK no cerrará la instancia cuando el cliente del servicio esté cerrado.

En el siguiente ejemplo, se configura un cliente HTTP basado en Apache, utilizado por dos clientes de servicio. La `ApacheHttpClient` instancia configurada se pasa al método HttpClient de cada generador. Cuando los clientes de servicio y el cliente HTTP ya no son necesarios, el código los cierra de forma explícita. El código cierra el cliente HTTP por última vez.

Importaciones

```
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.apache5.Apache5HttpClient;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.s3.S3Client;
```

Código

```
SdkHttpClient apache5HttpClient = Apache5HttpClient.builder()
        .maxConnections(100).build();

// Singletons: Use the s3Client and dynamoDbClient for all requests.
S3Client s3Client =
    S3Client.builder()
            .httpClient(apache5HttpClient).build();

DynamoDbClient dynamoDbClient =
    DynamoDbClient.builder()
                  .httpClient(apache5HttpClient).build();

// Perform work with the s3Client and dynamoDbClient.

// Requests completed: Close all service clients.
s3Client.close();
dynamoDbClient.close();
apache5HttpClient.close();  // Explicitly close apache5HttpClient.
```

Utilice interceptores de ejecución en AWS SDK for Java 2.x

Los interceptores de ejecución de AWS SDK for Java 2.x se enlazan en el ciclo de vida de las solicitudes y las respuestas para realizar lógica personalizada en distintas etapas de la ejecución de las llamadas a la API. Utilice los interceptores para implementar aspectos transversales, como registro, recopilación de métricas, modificación de solicitudes, depuración y tratamiento de errores.

Los interceptores implementan la interfaz de `ExecutionInterceptor`, que proporciona enlaces para las diferentes fases de la ejecución de solicitudes.

Ciclo de vida de los interceptores

La interfaz de `ExecutionInterceptor` proporciona métodos a los que se llama en puntos específicos durante la ejecución de solicitudes:

- `beforeExecution`: se llama antes de que se ejecute la solicitud
- `modifyRequest`: modifica el objeto de solicitud del SDK
- `beforeMarshalling`: se llama antes de que la solicitud se serialice a HTTP
- `afterMarshalling`: se llama después de que la solicitud se serialice a HTTP
- `modifyHttpRequest`: modifica la solicitud de HTTP
- `beforeTransmission`: se llama antes de que se envíe la solicitud de HTTP
- `afterTransmission`: se llama después de que se reciba la respuesta de HTTP
- `modifyHttpResponse`: modifica la respuesta de HTTP
- `beforeUnmarshalling`: se llama antes de que se deserialice la respuesta de HTTP
- `afterUnmarshalling`: se llama después de que deserialice la respuesta de HTTP
- `modifyResponse`: modifica el objeto de respuesta del SDK
- `afterExecution`: se llama después de la ejecución correcta de la solicitud
- `onExecutionFailure`: se llama cuando falla la ejecución de la solicitud

Registro de interceptores

Registre interceptores al crear un cliente de servicio mediante el método `overrideConfiguration`. Puede registrar varios interceptores y se ejecutarán en el orden en el que los registre.

```
// Register a single interceptor.
SqsClient client = SqsClient.builder()
    .overrideConfiguration(c -> c.addExecutionInterceptor(new LoggingInterceptor()))
    .build();

// Register multiple interceptors.
S3Client s3Client = S3Client.builder()
    .overrideConfiguration(config -> config
        .addExecutionInterceptor(new TimingInterceptor())
        .addExecutionInterceptor(new LoggingInterceptor())
        .addExecutionInterceptor(new RequestModificationInterceptor()))
    .build();
```

Ejemplo de interceptor

La siguiente clase demuestra cómo utilizar los interceptores de ejecución para añadir aspectos transversales como registro, supervisión del rendimiento y modificación de solicitudes a las operaciones de S3 sin cambiar la lógica empresarial principal.

En este ejemplo se muestra cómo registrar varios interceptores en un cliente de S3 y verlos en acción durante llamadas a la AWS API reales.

Importaciones

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.awscore.exception.AwsServiceException;
import software.amazon.awssdk.core.ApiName;
import software.amazon.awssdk.core.SdkRequest;
import software.amazon.awssdk.core.interceptor.Context;
import software.amazon.awssdk.core.interceptor.ExecutionAttributes;
import software.amazon.awssdk.core.interceptor.ExecutionInterceptor;
import software.amazon.awssdk.http.SdkHttpRequest;
import software.amazon.awssdk.http.SdkHttpResponse;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.HeadBucketRequest;
import software.amazon.awssdk.services.s3.model.ListBucketsResponse;

import java.time.Duration;
import java.time.Instant;
```

```
public class S3InterceptorsDemo {
```

```
    private static final Logger logger =
LoggerFactory.getLogger(S3InterceptorsDemo.class);

    public static void main(String[] args) {
        logger.info("=== AWS SDK for Java v2 - S3 Interceptors Demo ===");

        // Create an S3 client with multiple interceptors.
        S3Client s3Client = S3Client.builder()
            .overrideConfiguration(config -> config
                .addExecutionInterceptor(new TimingInterceptor())
                .addExecutionInterceptor(new LoggingInterceptor())
                .addExecutionInterceptor(new RequestModificationInterceptor()))
            .build();

        try {
            logger.info("Starting S3 operations with interceptors...");

            // Operation 1: List buckets.
            logger.info("Operation 1: Listing S3 buckets");
            logger.info("---------------------------------------");
            ListBucketsResponse listBucketsResponse = s3Client.listBuckets();
            logger.info("Found {} buckets", listBucketsResponse.buckets().size());

            // Operation 2: Try to access a bucket that likely doesn't exist.
            logger.info("Operation 2: Checking non-existent bucket (demonstrating error
interceptor)");
            logger.info("---------------------------------------");
            try {
                s3Client.headBucket(HeadBucketRequest.builder()
                    .bucket("amzn-s3-demo-bucket-that-does-not-exist-1234")
                    .build());
            } catch (Exception e) {
                logger.info("Expected error occurred (interceptor should have logged
it)");
            }

        } catch (Exception e) {
            logger.error(" Error during S3 operations: {}", e.getMessage(), e);
        } finally {
            s3Client.close();
            logger.info("Demo completed - S3 client closed");
        }
    }
```

```
    // Logging interceptor.
    private static class LoggingInterceptor implements ExecutionInterceptor {
        private static final Logger logger =
LoggerFactory.getLogger(LoggingInterceptor.class);

        @Override
        public void beforeExecution(Context.BeforeExecution context,
ExecutionAttributes executionAttributes) {
            logger.info("[LOGGING] Starting request: {}",
context.request().getClass().getSimpleName());
        }

        @Override
        public void afterExecution(Context.AfterExecution context, ExecutionAttributes
executionAttributes) {
            logger.info("[LOGGING] Completed request: {}",
context.request().getClass().getSimpleName());
        }

        @Override
        public void onExecutionFailure(Context.FailedExecution context,
ExecutionAttributes executionAttributes) {
            logger.error("[LOGGING] Request failed: {}",
context.request().getClass().getSimpleName());
            if (context.exception() instanceof AwsServiceException) {
                AwsServiceException ase = (AwsServiceException) context.exception();
                if (ase.awsErrorDetails().errorCode() != null) {
                    SdkHttpResponse httpResponse =
ase.awsErrorDetails().sdkHttpResponse();
                    logger.error("   HTTP Status: {}", httpResponse.statusCode());
                    logger.error("   Error Code: {}",
ase.awsErrorDetails().errorCode());
                    logger.error("   Error Message: {}",
ase.awsErrorDetails().errorMessage());
                }
            }
        }
    }

    // Performance timing interceptor.
    private static class TimingInterceptor implements ExecutionInterceptor {
        private static final Logger logger =
LoggerFactory.getLogger(TimingInterceptor.class);
        private Instant startTime;
```

```
        @Override
        public void beforeExecution(Context.BeforeExecution context,
ExecutionAttributes executionAttributes) {
            startTime = Instant.now();
            logger.info("##  [TIMING] Request started at: {}", startTime);
        }

        @Override
        public void afterExecution(Context.AfterExecution context, ExecutionAttributes
executionAttributes) {
            if (startTime != null) {
                Duration duration = Duration.between(startTime, Instant.now());
                logger.info("##  [TIMING] Request completed in: {}ms",
duration.toMillis());
            }
        }

        @Override
        public void onExecutionFailure(Context.FailedExecution context,
ExecutionAttributes executionAttributes) {
            if (startTime != null) {
                Duration duration = Duration.between(startTime, Instant.now());
                logger.warn("##  [TIMING] Request failed after: {}ms",
duration.toMillis());
            }
        }
    }

    // Request modification interceptor
    private static class RequestModificationInterceptor implements ExecutionInterceptor
{
        private static final Logger logger =
LoggerFactory.getLogger(RequestModificationInterceptor.class);

        @Override
        public SdkRequest modifyRequest(Context.ModifyRequest context,
ExecutionAttributes executionAttributes) {
            SdkRequest originalRequest = context.request();
            logger.info("[MODIFY] Modifying request: {}",
originalRequest.getClass().getSimpleName());

            // For ListBucketsRequest, we can't modify much since it has no settable
properties
```

```
            // For HeadBucketRequest, we can demonstrate modifying the request
            if (originalRequest instanceof HeadBucketRequest) {
                HeadBucketRequest headRequest = (HeadBucketRequest) originalRequest;

                // Create a new request with an API name added.
                return HeadBucketRequest.builder()
                        .bucket(headRequest.bucket())
                        .overrideConfiguration(b -> b.addApiName(ApiName.builder()
                                .name("My-API")
                                .version("1.0")
                                .build()))
                        .build();
            }
            logger.info("Not a HeadBucketRequest, returning original request");
            return originalRequest;
        }

        @Override
        public SdkHttpRequest modifyHttpRequest(Context.ModifyHttpRequest context,
 ExecutionAttributes executionAttributes) {
            logger.info("[MODIFY] Adding custom HTTP headers");
            return context.httpRequest().toBuilder()
                .putHeader("X-Custom-Header", "S3InterceptorDemo")
                .putHeader("X-Request-ID", java.util.UUID.randomUUID().toString())
                .build();
        }
    }
}
```

Archivo pom de Maven

```
<?xml version="1.0" encoding="UTF-8"?>
<project xmlns="http://maven.apache.org/POM/4.0.0"
         xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
         xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
         http://maven.apache.org/xsd/maven-4.0.0.xsd">
    <modelVersion>4.0.0</modelVersion>

    <groupId>org.example</groupId>
    <artifactId>interceptors-examples</artifactId>
    <version>1.0.0</version>
    <packaging>jar</packaging>
```

```
    <name>interceptors-examples</name>
    <description>Demonstration of execution interceptors in AWS SDK for Java v2</
description>

    <properties>
        <maven.compiler.source>17</maven.compiler.source>
        <maven.compiler.target>17</maven.compiler.target>
        <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
        <aws.java.sdk.version>2.31.62</aws.java.sdk.version>
        <exec.mainClass>org.example.S3InterceptorsDemo</exec.mainClass>
    </properties>

    <dependencyManagement>
        <dependencies>
            <dependency>
                <groupId>software.amazon.awssdk</groupId>
                <artifactId>bom</artifactId>
                <version>${aws.java.sdk.version}</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
            <dependency>
                <groupId>org.apache.logging.log4j</groupId>
                <artifactId>log4j-bom</artifactId>
                <version>2.23.1</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
        </dependencies>
    </dependencyManagement>

    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>s3</artifactId>
        </dependency>

        <dependency>
            <groupId>org.apache.logging.log4j</groupId>
            <artifactId>log4j-core</artifactId>
        </dependency>
        <dependency>
            <groupId>org.slf4j</groupId>
            <artifactId>slf4j-api</artifactId>
```

```
            <version>2.0.13</version>
        </dependency>
        <dependency>
            <groupId>org.apache.logging.log4j</groupId>
            <artifactId>log4j-slf4j2-impl</artifactId>
        </dependency>
        <dependency>
            <groupId>org.apache.logging.log4j</groupId>
            <artifactId>log4j-1.2-api</artifactId>
        </dependency>
        <dependency>
            <groupId>org.junit.jupiter</groupId>
            <artifactId>junit-jupiter</artifactId>
            <version>5.10.1</version>
            <scope>test</scope>
        </dependency>
    </dependencies>

    <build>
        <plugins>
            <!-- Compiler Plugin -->
            <plugin>
                <groupId>org.apache.maven.plugins</groupId>
                <artifactId>maven-compiler-plugin</artifactId>
                <version>3.11.0</version>
                <configuration>
                    <source>17</source>
                    <target>17</target>
                </configuration>
            </plugin>

            <!-- Surefire Plugin for running tests -->
            <plugin>
                <groupId>org.apache.maven.plugins</groupId>
                <artifactId>maven-surefire-plugin</artifactId>
                <version>3.2.2</version>
            </plugin>

            <!-- Exec Plugin for running the main class -->
            <plugin>
                <groupId>org.codehaus.mojo</groupId>
                <artifactId>exec-maven-plugin</artifactId>
                <version>3.1.0</version>
                <configuration>
```

```
                    <mainClass>${exec.mainClass}</mainClass>
                </configuration>
            </plugin>

            <!-- Shade Plugin to create executable JAR -->
            <plugin>
                <groupId>org.apache.maven.plugins</groupId>
                <artifactId>maven-shade-plugin</artifactId>
                <version>3.4.1</version>
                <executions>
                    <execution>
                        <phase>package</phase>
                        <goals>
                            <goal>shade</goal>
                        </goals>
                        <configuration>
                            <transformers>
                                <transformer
 implementation="org.apache.maven.plugins.shade.resource.ManifestResourceTransformer">
                                    <mainClass>${exec.mainClass}</mainClass>
                                </transformer>
                            </transformers>
                            <createDependencyReducedPom>false</
createDependencyReducedPom>
                        </configuration>
                    </execution>
                </executions>
            </plugin>
        </plugins>
    </build>
</project>
```

Prácticas recomendadas

- Mantenga los interceptores livianos: los interceptores se ejecutan para cada solicitud, por lo que debe evitar computación intensa u operaciones de bloqueo que podrían afectar al rendimiento.
- Trate las excepciones con cuidado: si el interceptor lanza una excepción, se produce un error en toda la solicitud. Utilice siempre bloques try-catch para operaciones que puedan fallar.
- Importancia del orden: los interceptores se ejecutan en el orden en que los registra. Tenga en cuenta las dependencias entre los interceptores al registrarlos.

- Use ExecutionAttributes para el estado: si necesita pasar datos entre diferentes métodos de interceptor, use `ExecutionAttributes` lugar de variables de instancia para garantizar la seguridad de los subprocesos.
- Preste atención a los datos confidenciales: cuando registre solicitudes y respuestas, tenga cuidado de no registrar información confidencial, como credenciales o datos personales.

Objetos de contexto

Cada método interceptor recibe un objeto de contexto que proporciona acceso a la información de solicitud y respuesta en diferentes etapas de ejecución:

- `Context.BeforeExecution`: proporciona acceso a la solicitud original del SDK
- `Context.ModifyRequest`: modifica la solicitud del SDK
- `Context.ModifyHttpRequest`: modifica la solicitud de HTTP
- `Context.AfterExecution`: proporciona acceso a la solicitud y la respuesta
- `Context.FailedExecution`: proporciona acceso a la solicitud y a la excepción que se ha producido

Uso del AWS SDK for Java 2.x

En este capítulo se muestra cómo utilizarlos de AWS SDK for Java 2.x forma eficaz. Aprenda a crear clientes de servicio, realizar solicitudes, administrar respuestas y administrar errores. Este capítulo trata sobre programación síncrona y asíncrona, resultados paginados, esperadores para la monitorización de recursos y optimización del rendimiento.

También se hablará de prácticas recomendadas para la reutilización de clientes, instrucciones de solución de problemas, optimización del inicio de Lambda, compatibilidad con HTTP/2 y configuración de DNS.

Contenido

- Realizar Servicio de AWS solicitudes utilizando el AWS SDK for Java 2.x
  - Uso de clientes de servicio para realizar solicitudes
    - Crear un cliente de servicio
    - Configuración predeterminada de cliente
    - Configurar clientes de servicio
    - Cerrar el cliente de servicio
  - Hacer solicitudes
    - Uso de solicitudes para anular la configuración de clientes
  - Tratamiento de respuestas
- Programación asincrónica mediante AWS SDK for Java 2.x
  - Uso de API de cliente asincrónicas
  - Administración de streaming en métodos asincrónicos
  - Configuración de opciones asincrónicas avanzadas
- Mejores prácticas para usar el AWS SDK for Java 2.x
  - Prevención del bloqueo de solicitudes configurando tiempos de espera de la API
  - Mejora del rendimiento reutilizando clientes de servicio
  - Prevención de pérdidas de recursos cerrando los clientes de servicio no utilizados
  - Prevención del agotamiento de grupos de conexiones cerrando flujos de entrada
  - Optimización del rendimiento de HTTP para la carga de trabajo de la aplicación
  - Mejora del rendimiento de SSL con OpenSSL para clientes asincrónicos

- Monitorización del rendimiento de las aplicaciones con métricas del SDK
- Manejo de errores en el AWS SDK for Java 2.x
  - ¿Por qué excepciones no controladas?
  - AwsServiceException (y subclases)
  - SdkClientException
  - Excepciones y comportamiento de reintentos
- Uso de resultados paginados en la versión 2.x AWS SDK para Java
  - Paginación síncrona
    - Iterar sobre páginas
    - Iterar sobre objetos
      - Usar un stream
      - Usar un buble for-each
    - Paginación manual
  - Paginación asíncrona
    - Recorrer en iteración páginas de nombres de tablas
      - Utilizar un Subscriber.
      - Utilizar un Consumer.
    - Recorrer en iteración nombres de tablas
      - Utilizar un Subscriber.
      - Utilizar un Consumer.
    - Usar una biblioteca de terceros
- Utilizando camareros en el AWS SDK for Java 2.x
  - Requisitos previos
  - Uso de esperadores
    - Programación asíncrona
    - Programación asíncrona
  - Configurar los esperadores
    - Configurar un esperador
    - Anular la configuración de una solicitud específica
  - Ejemplos de código

- Solución de problemas FAQs
  - ¿Cómo puedo corregir el error “java.net.SocketException: Connection reset” o “server failed to complete the response”?
  - ¿Cómo puedo corregir “tiempo de espera de conexión”?
  - ¿Cómo puedo corregir “java.net.SocketTimeoutException: Read timed out”?
  - ¿Cómo puedo corregir el error “Unable to execute HTTP request: Timeout waiting for connection from pool”?
  - ¿Cómo puedo corregir NoClassDefFoundError, NoSuchMethodError o NoSuchFieldError?
  - ¿Cómo puedo corregir un error “SignatureDoesNotMatch” o un error “The request signature we calculated does not match the signature you provided”?
  - ¿Cómo puedo solucionar el error “java.lang.IllegalStateException: Connection pool shut down”?
  - ¿Cómo puedo corregir el error «No se pueden cargar las credenciales de ninguno de los proveedores de la cadena AwsCredentialsProviderChain»?
    - Problemas y soluciones comunes
      - Revise la configuración de sus credenciales
        - Para instancias de Amazon EC2
        - Para entornos de contenedores
        - Para desarrollo local
        - Para federación de identidades web
      - Problemas de conectividad de red o de proxy
- Reduzca el tiempo de inicio del SDK para AWS Lambda
  - Utilice un cliente HTTP AWS basado en CRT
  - Eliminar las dependencias del cliente HTTP no utilizadas
  - Configurar los clientes de servicio para abreviar las búsquedas
  - Inicializar el cliente de SDK fuera del controlador de la función de Lambda
  - Minimizar la inyección de dependencias
  - Utilice una segmentación por arquetipo de Maven AWS Lambda
  - Considere Lambda SnapStart para Java
  - Cambios en la versión 2.x que afectan al tiempo de startup
  - Recursos adicionales
- Implemente ContentStreamProvider en el AWS SDK for Java 2.x

  - Utilice mark() y reset()
  - Uso de almacenamiento en búfer si mark() y reset() no están disponibles
  - Creación de nuevos flujos
- Configurar el TTL de JVM para las búsquedas de nombres DNS
  - Cómo configurar el TTL de JVM
- Trabajar con HTTP/2 en el AWS SDK para Java

Realizar Servicio de AWS solicitudes utilizando el AWS SDK for Java 2.x

Uso de clientes de servicio para realizar solicitudes

Tras completar los pasos de Configuración del SDK y comprender cómo configurar los clientes de servicio, estará listo para realizar solicitudes a AWS servicios como Amazon S3, Amazon DynamoDB, AWS Identity and Access Management Amazon EC2, etc.

Crear un cliente de servicio

Para realizar una solicitud a un Servicio de AWS, primero debe crear una instancia de un cliente de servicio para ese servicio mediante el método estático de fábrica,. `builder()` El método `builder()` devuelve un objeto `builder` que permite personalizar el cliente de servicio. Los métodos setter Fluent devuelven el objeto `builder` para que pueda encadenar fácilmente las llamadas a los métodos y para simplificar la lectura del código. Después de configurar las propiedades que desee, puede llamar al método `build()` para crear el cliente.

A modo de ejemplo, el siguiente fragmento de código crea una instancia de un objeto `Ec2Client` como cliente de servicio para Amazon EC2.

```
Region region = Region.US_WEST_2;
Ec2Client ec2Client = Ec2Client.builder()
        .region(region)
        .build();
```

> **Note**
>
> Los clientes de servicios del SDK son seguros para subprocesos. Para obtener el máximo desempeño, trátelos como objetos de larga duración. Cada cliente tiene su propio recurso de grupo de conexiones que se libera cuando el cliente recopila los elementos no utilizados.
> Un objeto cliente de servicio es inmutable, por lo que deberá crear un nuevo cliente para cada servicio al que haga peticiones, o si desea utilizar una configuración diferente para realizar peticiones al mismo servicio.
> No es necesario especificarlo `Region` en el generador de clientes de AWS servicios para todos los servicios; sin embargo, se recomienda establecer la región de las llamadas a la API que realice en sus aplicaciones. Para obtener más información, consulte la Selección de regiones de AWS.

Configuración predeterminada de cliente

Los creadores de clientes tienen otro método de fábrica denominado `create()`. Este método crea un servicio cliente con la configuración predeterminada. Utiliza la cadena de proveedores predeterminada para cargar las credenciales y la cadena Región de AWS de proveedores predeterminada. Si las credenciales o la región no se pueden determinar a partir del entorno en el que se ejecuta la aplicación, la llamada a `create` produce un error. Consulte Uso de credenciales y Selección de regiones para obtener más información acerca de cómo el SDK determinan las credenciales y la región.

A modo de ejemplo, el siguiente fragmento de código crea una instancia de un objeto `DynamoDbClient` como cliente de servicio para Amazon DynamoDB:

```
DynamoDbClient dynamoDbClient = DynamoDbClient.create();
```

Configurar clientes de servicio

Para obtener información detallada sobre cómo configurar clientes de servicio, consulte Configuración externa de clientes y Configuración de clientes en código.

Cerrar el cliente de servicio

Como práctica recomendada, debe utilizar un cliente de servicio para varias llamadas al servicio de la API durante la vida útil de una aplicación. Sin embargo, si necesita un cliente de servicio para un solo uso o ya no lo necesita, ciérrelo.

Para liberar recursos, llame al método `close()` cuando el cliente de servicio deje de ser necesario.

```
ec2Client.close();
```

Si necesita un cliente de servicio para un solo uso, puede crear una instancia del cliente de servicio como un recurso en una instrucción `try`-with-resources. Los clientes de servicio implementan la interfaz de `Autoclosable`, por lo que el JDK llama automáticamente al método `close()` al final de la instrucción.

En el ejemplo siguiente, se muestra cómo utilizar un cliente de servicio para una llamada única. El `StsClient` que llama al AWS Security Token Service se cierra después de devolver el ID de la cuenta.

```
import software.amazon.awssdk.services.sts.StsClient;

String getAccountID() {
    try (StsClient stsClient = StsClient.create()) {
       return stsClient.getCallerIdentity().account();
    }
}
```

Hacer solicitudes

Utilice el cliente del servicio para realizar solicitudes al correspondiente Servicio de AWS.

Por ejemplo, este fragmento de código muestra cómo crear un objeto de `RunInstancesRequest` para crear una nueva instancia de Amazon EC2:

```
// Create the request by using the fluid setter methods of the request builder.
RunInstancesRequest runInstancesRequest = RunInstancesRequest.builder()
        .imageId(amiId)
        .instanceType(InstanceType.T1_MICRO)
        .maxCount(1)
        .minCount(1)
        .build();

// Use the configured request with the service client.
RunInstancesResponse response = ec2Client.runInstances(runInstancesRequest);
```

En lugar de crear una solicitud y pasar la instancia, el SDK proporciona una API fluida que puede usar para crear una solicitud. Con la API fluida, puede usar expresiones lambda de Java para crear la solicitud “en línea”.

En el siguiente ejemplo, se reescribe el ejemplo anterior mediante la versión del `runInstances` método que utiliza un creador para crear la solicitud.

```
// Create the request by using a lambda expression.
RunInstancesResponse response = ec2.runInstances(r -> r
                .imageId(amiId)
                .instanceType(InstanceType.T1_MICRO)
                .maxCount(1)
                .minCount(1));
```

Uso de solicitudes para anular la configuración de clientes

Aunque un cliente de servicio es inmutable, puede anular muchos de sus ajustes en el nivel de solicitud. Al crear una solicitud, puede proporcionar una AwsRequestOverrideConfigurationinstancia para proporcionar la configuración anulada. Algunos de los métodos que puede utilizar para anular la configuración del cliente son:

- `apiCallAttemptTimeout`
- `apiCallTimeout`
- `credentialProvider`
- `compressionConfiguration`
- `putHeader`

Para ver un ejemplo de cómo anular la configuración de un cliente con una solicitud, supongamos que tiene el siguiente cliente de S3 con la configuración predeterminada.

```
S3Client s3Client = S3Client.create();
```

Desea descargar un archivo grande y asegurarse de que no se agote el tiempo de espera de la solicitud antes de que finalice la descarga. Para ello, aumente los valores de tiempo de espera de una sola solicitud `GetObject`, como se muestra en el código siguiente.

Standard API

```
AwsRequestOverrideConfiguration overrideConfiguration =
 AwsRequestOverrideConfiguration.builder()
    .apiCallTimeout(Duration.ofSeconds(100L))
    .apiCallAttemptTimeout(Duration.ofSeconds(25L))
    .build();

GetObjectRequest request = GetObjectRequest.builder()
    .bucket("amzn-s3-demo-bucket")
    .key("demo-key")
    .overrideConfiguration(overrideConfiguration)
    .build();

s3Client.getObject(request, myPath);
```

Fluent API

```
s3Client.getObject(b -> b
        .bucket("amzn-s3-demo-bucket")
        .key("demo-key")
        .overrideConfiguration(c -> c
            .apiCallTimeout(Duration.ofSeconds(100L))
            .apiCallAttemptTimeout(Duration.ofSeconds(25L))),
    myPath);
```

Tratamiento de respuestas

El SDK devuelve un objeto de respuesta para la mayoría de las operaciones de servicio. El código puede procesar la información del objeto de respuesta en función de sus necesidades.

Por ejemplo, el siguiente fragmento de código imprime el primer identificador de instancia devuelto con el objeto `RunInstancesResponse` de la solicitud anterior.

```
RunInstancesResponse runInstancesResponse =
 ec2Client.runInstances(runInstancesRequest);
System.out.println(runInstancesResponse.instances().get(0).instanceId());
```

Sin embargo, no todas las operaciones devuelven un objeto de respuesta con datos específicos del servicio. En estas situaciones, puede consultar el estado de la respuesta HTTP para saber si la operación se realizó correctamente.

Por ejemplo, el código del siguiente fragmento comprueba la respuesta HTTP para ver si la operación `DeleteContactList` de Amazon Simple Email Service se ha realizado correctamente.

```
SesV2Client sesv2Client = SesV2Client.create();

DeleteContactListRequest request = DeleteContactListRequest.builder()
    .contactListName("ExampleContactListName")
    .build();

DeleteContactListResponse response = sesv2Client.deleteContactList(request);
if (response.sdkHttpResponse().isSuccessful()) {
    System.out.println("Contact list deleted successfully");
} else {
    System.out.println("Failed to delete contact list. Status code: " +
 response.sdkHttpResponse().statusCode());
}
```

Programación asincrónica mediante AWS SDK for Java 2.x

El AWS SDK for Java 2.x incorpora clientes asincrónicos con compatibilidad de E/S no bloqueante que implementan un alto nivel de simultaneidad en algunos subprocesos. Sin embargo, no se garantiza una E/S no bloqueante total. Un cliente asincrónico puede realizar llamadas de bloqueo en algunos casos, como recuperación de credenciales, firma de solicitudes mediante AWS Signature Version 4 (SigV4) o detección de puntos de conexión.

Los métodos síncronos bloquean la ejecución de los subprocesos hasta que el cliente recibe una respuesta del servicio. Los métodos asíncronos terminan de ejecutarse inmediatamente, devolviendo el control al subproceso que realiza la llamada sin esperar una respuesta.

Como un método asíncrono termina de ejecutarse antes de que haya una respuesta disponible, necesita una forma de obtener la respuesta cuando esté lista. Los métodos para cliente asíncrono en 2.x del AWS SDK para Java devuelven objetos CompletableFuture que le permiten acceder a la respuesta cuando esté lista.

Uso de API de cliente asincrónicas

Las firmas de los métodos de cliente asincrónicos son las mismas que las de los métodos sincrónicos, pero los métodos asincrónicos devuelven un objeto CompletableFuture que contiene los resultados de la operación asincrónica en el futuro. Si se produce un error mientras se ejecuta el método asincrónico del SDK, el error se lanza como `CompletionException`.

Un método que se puede usar para obtener el resultado es encadenar un método `whenComplete()` al `CompletableFuture` devuelto por la llamada a métodos del SDK. El método `whenComplete()` recibe el resultado o un objeto del tipo Throwable de tipo `CompletionException` en función de cómo se haya completado la llamada asincrónica. Debe proporcionar una acción a `whenComplete()` para procesar o comprobar los resultados antes de que se devuelva al código de llamada.

Si quiere devolver algo distinto del objeto devuelto por el método del SDK, use el método `handle()` en su lugar. El método `handle()` utiliza los mismos parámetros que `whenComplete()`, pero se puede procesar el resultado y devolver un objeto.

Para esperar a que se complete la cadena asincrónica y recuperar los resultados de la finalización, puede llamar al método `join()`. Si el objeto `Throwable` no se administraba en la cadena, el método `join()` lanza un `CompletionException` no controlado que empaqueta la excepción original. Acceda a la excepción original con `CompletionException#getCause()`. También puede llamar al método `CompletableFuture#get()` para obtener los resultados de la finalización. Sin embargo, el método `get()` puede lanzar excepciones controladas.

El siguiente ejemplo muestra dos variantes de cómo se puede trabajar con el método `listTables()` del cliente asincrónico de DynamoDB. La acción pasada a `whenComplete()` registra simplemente una respuesta correcta, mientras que la versión `handle()` extrae la lista de nombres de tablas y la devuelve. En ambos casos, si se genera un error en la cadena asincrónica, el error se vuelve a lanzar para que el código del cliente pueda administrarlo.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbAsyncClient;
import software.amazon.awssdk.services.dynamodb.model.ListTablesRequest;
import software.amazon.awssdk.services.dynamodb.model.ListTablesResponse;

import java.util.List;
import java.util.concurrent.CompletableFuture;
```

Código de

whenComplete() variation

```
public class DynamoDbAsyncListTables {

    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        DynamoDbAsyncClient dynamoDbAsyncClient =
 DynamoDbAsyncClient.builder().region(region).build();
        try {
            ListTablesResponse listTablesResponse =
 listTablesWhenComplete(dynamoDbAsyncClient).join();  // The join() method may throw
 a CompletionException.
            if (listTablesResponse.hasTableNames()){
                System.out.println("Table exist in this region: " + region.id());
            }
        } catch (RuntimeException e) {
            // Handle as needed. Here we simply print out the class names.
            System.out.println(e.getClass()); // Prints 'class
 java.util.concurrent.CompletionException'.
            System.out.println(e.getCause().getClass()); // Prints 'class
 software.amazon.awssdk.services.dynamodb.model.DynamoDbException'.
        }
    }

    public static CompletableFuture<ListTablesResponse>
 listTablesWhenComplete(DynamoDbAsyncClient client) {
        return client.listTables(ListTablesRequest.builder().build())
            .whenComplete((listTablesResponse, throwable) -> {
                if (listTablesResponse != null) {  // Consume the response.
                    System.out.println("The SDK's listTables method completed
 successfully.");
                } else {
                    RuntimeException cause = (RuntimeException)
 throwable.getCause(); // If an error was thrown during the SDK's listTables method
 it is wrapped in a CompletionException.

  // The SDK throws only RuntimeExceptions, so this is a safe cast.
                    System.out.println(cause.getMessage());  // Log error here, but
 rethrow so the calling code can handle as needed.
                    throw cause;
                }
            });
```

```
    }
```

handle() variation

```
public class DynamoDbAsyncListTables {

    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        DynamoDbAsyncClient dynamoDbAsyncClient =
 DynamoDbAsyncClient.builder().region(region).build();
        try {
            List<String> tableNames =
 listTablesHandle(dynamoDbAsyncClient).join(); // The join() method may throw a
 CompletionException.
            tableNames.forEach(System.out::println);
        } catch (RuntimeException e) {
            // Handle as needed. Here we simply print out the class names.
            System.out.println(e.getClass()); // Prints 'class
 java.util.concurrent.CompletionException'.
            System.out.println(e.getCause().getClass()); // Prints 'class
 software.amazon.awssdk.services.dynamodb.model.DynamoDbException'.
        }
    }

    public static CompletableFuture<List<String>>
 listTablesHandle(DynamoDbAsyncClient client) {
        return client.listTables(ListTablesRequest.builder().build())
            .handle((listTablesResponse, throwable) -> {
                if (listTablesResponse != null) {
                    return listTablesResponse.tableNames(); // Return the list of
 table names.
                } else {
                    RuntimeException cause = (RuntimeException)
 throwable.getCause(); // If an error was thrown during the SDK's listTables method
 it is wrapped in a CompletionException.

  // The SDK throws only RuntimeExceptions, so this is a safe cast.
                    System.out.println(cause.getMessage());  // Log error here, but
 rethrow so the calling code can handle as needed.
                    throw cause;
                }
            });
    }
```

```
}
```

Administración de streaming en métodos asincrónicos

Para métodos asincrónicos con contenido de streaming, debe proporcionar un objeto AsyncRequestBody para proporcionar el contenido de forma incremental o un objeto AsyncResponseTransformer para recibir y procesar la respuesta.

El ejemplo siguiente carga un archivo en Amazon S3 de forma asincrónica utilizando la forma asincrónica de la operación `PutObject`.

Importaciones

```
import software.amazon.awssdk.core.async.AsyncRequestBody;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;
import java.nio.file.Paths;
import java.util.concurrent.CompletableFuture;
```

Código de

```
/**
 * To run this AWS code example, ensure that you have setup your development
 environment, including your AWS credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class S3AsyncOps {

     public static void main(String[] args) {

         final String USAGE = "\n" +
                 "Usage:\n" +
                 "    S3AsyncOps <bucketName> <key> <path>\n\n" +
                 "Where:\n" +
```

```
                "    bucketName - the name of the Amazon S3 bucket (for example,
bucket1). \n\n" +
                "    key - the name of the object (for example, book.pdf). \n" +
                "    path - the local path to the file (for example, C:/AWS/book.pdf).
\n" ;

        if (args.length != 3) {
            System.out.println(USAGE);
             System.exit(1);
        }

        String bucketName = args[0];
        String key = args[1];
        String path = args[2];

        Region region = Region.US_WEST_2;
        S3AsyncClient client = S3AsyncClient.builder()
                .region(region)
                .build();

        PutObjectRequest objectRequest = PutObjectRequest.builder()
                .bucket(bucketName)
                .key(key)
                .build();

        // Put the object into the bucket
        CompletableFuture<PutObjectResponse> future = client.putObject(objectRequest,
                AsyncRequestBody.fromFile(Paths.get(path))
        );
        future.whenComplete((resp, err) -> {
            try {
                if (resp != null) {
                    System.out.println("Object uploaded. Details: " + resp);
                } else {
                    // Handle error
                    err.printStackTrace();
                }
            } finally {
                // Only close the client when you are completely done with it
                client.close();
            }
        });

        future.join();
```

```
    }
}
```

En el ejemplo siguiente se obtiene un archivo de Amazon S3 utilizando la forma asincrónica de la operación `GetObject`.

Importaciones

```
import software.amazon.awssdk.core.async.AsyncResponseTransformer;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.GetObjectResponse;
import java.nio.file.Paths;
import java.util.concurrent.CompletableFuture;
```

Código de

```
/**
 * To run this AWS code example, ensure that you have setup your development
 environment, including your AWS credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class S3AsyncStreamOps {

    public static void main(String[] args) {

        final String USAGE = "\n" +
                "Usage:\n" +
                "    S3AsyncStreamOps <bucketName> <objectKey> <path>\n\n" +
                "Where:\n" +
                "    bucketName - the name of the Amazon S3 bucket (for example,
 bucket1). \n\n" +
                "    objectKey - the name of the object (for example, book.pdf). \n" +
                "    path - the local path to the file (for example, C:/AWS/book.pdf).
 \n" ;

        if (args.length != 3) {
```

```
            System.out.println(USAGE);
            System.exit(1);
         }

        String bucketName = args[0];
        String objectKey = args[1];
        String path = args[2];

        Region region = Region.US_WEST_2;
        S3AsyncClient client = S3AsyncClient.builder()
                .region(region)
                .build();

        GetObjectRequest objectRequest = GetObjectRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .build();

        CompletableFuture<GetObjectResponse> futureGet =
 client.getObject(objectRequest,
                AsyncResponseTransformer.toFile(Paths.get(path)));

        futureGet.whenComplete((resp, err) -> {
            try {
                if (resp != null) {
                    System.out.println("Object downloaded. Details: "+resp);
                } else {
                    err.printStackTrace();
                }
            } finally {
               // Only close the client when you are completely done with it
                client.close();
            }
        });
        futureGet.join();
    }
}
```

Configuración de opciones asincrónicas avanzadas

El AWS SDK para Java 2.x usa Netty, una plataforma de aplicación de red asíncrona y basado en eventos, para gestionar subprocesos de E/S. El AWS SDK para Java 2.x crea un `ExecutorService` después de Netty para completar los futuros devueltos desde la solicitud del

cliente HTTP al cliente Netty. Esta abstracción reduce el riesgo de que una aplicación interrumpa el proceso de sincronización si los desarrolladores deciden detener o suspender los subprocesos. De forma predeterminada, cada cliente asíncrono crea un grupo de subprocesos en función del número de procesadores y gestiona las tareas de una cola dentro del `ExecutorService`.

Puede especificar una implementación de JDK específica de `ExecutorService` cuando cree su cliente asincrónico. El siguiente fragmento crea un `ExecutorService` con un número fijo de subprocesos.

Código de

```
S3AsyncClient clientThread = S3AsyncClient.builder()
  .asyncConfiguration(
    b -> b.advancedOption(SdkAdvancedAsyncClientOption
      .FUTURE_COMPLETION_EXECUTOR,
      Executors.newFixedThreadPool(10)
    )
  )
  .build();
```

Para optimizar el rendimiento, puede administrar su propio ejecutor de grupo de subprocesos e incluirlo al configurar el cliente.

```
ThreadPoolExecutor executor = new ThreadPoolExecutor(50, 50,
    10, TimeUnit.SECONDS,
    new LinkedBlockingQueue<>(<custom_value>),
    new ThreadFactoryBuilder()
      .threadNamePrefix("sdk-async-response").build());

// Allow idle core threads to time out
executor.allowCoreThreadTimeOut(true);

S3AsyncClient clientThread = S3AsyncClient.builder()
  .asyncConfiguration(
    b -> b.advancedOption(SdkAdvancedAsyncClientOption
      .FUTURE_COMPLETION_EXECUTOR,
      executor
    )
  )
  .build();
```

Mejores prácticas para usar el AWS SDK for Java 2.x

Prevención del bloqueo de solicitudes configurando tiempos de espera de la API

El SDK proporciona valores predeterminados para algunas opciones de tiempo de espera, como el tiempo de espera de la conexión y los tiempos de espera del socket, pero no para los tiempos de espera de las llamadas a la API ni para los tiempos de espera de los intentos de llamadas individuales a la API. Se recomienda establecer tiempos de espera tanto para los intentos individuales como para toda la solicitud. Esto garantizará que la aplicación pueda responder rápido a los errores y de forma óptima cuando se produzcan problemas transitorios que puedan provocar que los intentos de solicitud tarden más en completarse o surjan problemas graves de red.

Puede configurar los tiempos de espera para todas las solicitudes realizadas por los clientes de un servicio mediante `ClientOverrideConfiguration#apiCallAttemptTimeout` y `ClientOverrideConfiguration#apiCallTimeout`.

En el siguiente ejemplo, se muestra la configuración de un cliente Amazon S3 con valores de tiempo de espera personalizados.

```
S3Client.builder()
        .overrideConfiguration(
             b -> b.apiCallTimeout(Duration.ofSeconds(<custom value>))
                   .apiCallAttemptTimeout(Duration.ofMillis(<custom value>)))
        .build();
```

`apiCallAttemptTimeout`

Esta configuración establece la cantidad de tiempo para un único intento HTTP, tras el cual se puede volver a intentar la llamada a la API.

`apiCallTimeout`

El valor de esta propiedad configura la cantidad de tiempo de toda la ejecución, incluidos todos los reintentos.

Como alternativa a establecer estos valores de tiempo de espera en el cliente de servicio, puede usar `RequestOverrideConfiguration#apiCallTimeout()` y

`RequestOverrideConfiguration#apiCallAttemptTimeout()` para configurar una sola solicitud.

El ejemplo siguiente configura una única solicitud de `listBuckets` con valores de tiempo de espera personalizados.

```
s3Client.listBuckets(lbr -> lbr.overrideConfiguration(
        b -> b.apiCallTimeout(Duration.ofSeconds(<custom value>))
              .apiCallAttemptTimeout(Duration.ofMillis(<custom value>))));
```

Al utilizar juntas estas propiedades, establece un límite estricto en el tiempo total dedicado a todos los intentos entre reintentos. También configura una solicitud HTTP individual para poder responder rápido a los errores en las solicitudes lentas.

Mejora del rendimiento reutilizando clientes de servicio

Cada cliente de servicio mantiene su propio grupo de conexiones HTTP. Una conexión que ya existe en el grupo se puede reutilizar mediante una nueva solicitud para reducir el tiempo necesario para establecer una nueva conexión. Recomendamos compartir una sola instancia del cliente para evitar la sobrecarga que supone tener demasiados grupos de conexiones que no se utilizan de forma eficaz. Todos los clientes de servicio son seguros para subprocesos.

Si no quiere compartir una instancia de cliente, utilice `close()` en la instancia para liberar los recursos cuando el cliente no sea necesario.

Prevención de pérdidas de recursos cerrando los clientes de servicio no utilizados

Cierre de un cliente de servicio para liberar recursos, como subprocesos, si ya no es necesario. Si no quiere compartir una instancia de cliente, utilice `close()` en la instancia para liberar los recursos cuando el cliente no sea necesario.

Prevención del agotamiento de grupos de conexiones cerrando flujos de entrada

Para operaciones de secuencia, como `S3Client#getObject`, si trabaja directamente con `ResponseInputStream`, recomendamos que haga lo siguiente:

- Lea todos los datos de la secuencia de entrada lo antes posible.
- Cierre la secuencia de entrada cuanto antes.

Hacemos estas recomendaciones porque la secuencia de entrada es un flujo directo de datos de la conexión HTTP y la conexión HTTP subyacente no se puede reutilizar hasta que se hayan leído todos los datos de la secuencia y esta se cierre. Si no se siguen estas reglas, el cliente puede quedarse sin recursos por asignar demasiadas conexiones HTTP abiertas pero no utilizadas.

Optimización del rendimiento de HTTP para la carga de trabajo de la aplicación

El SDK proporciona un conjunto de configuraciones http predeterminadas que se aplican a los casos de uso generales. Recomendamos a los clientes que definan las configuraciones HTTP de sus aplicaciones en función de sus casos de uso.

Como buen punto de partida, el SDK ofrece una característica de configuración inteligente de valores predeterminados. Esta característica está disponible a partir de la versión 2.17.102. Debe seleccionar un modo según su uso, lo que proporciona valores de configuración razonables.

Mejora del rendimiento de SSL con OpenSSL para clientes asincrónicos

De forma predeterminada, el `NettyNioAsyncHttpClient` de SDK utiliza la implementación SSL predeterminada del JDK como `SslProvider`. Nuestras pruebas revelaron que OpenSSL funciona mejor que la implementación predeterminada de JDK. La comunidad de Netty también recomienda usar OpenSSL.

Para usar OpenSSL, agregue `netty-tcnative` a sus dependencias. Para obtener detalles de configuración, consulte la documentación del proyecto Netty.

Una vez que haya configurado su proyecto con `netty-tcnative`, la instancia del `NettyNioAsyncHttpClient` seleccionará OpenSSL automáticamente. Como alternativa, puede configurar el `SslProvider` de forma explícita mediante el compilador de `NettyNioAsyncHttpClient`, como muestra el siguiente fragmento.

```
NettyNioAsyncHttpClient.builder()
                       .sslProvider(SslProvider.OPENSSL)
                       .build();
```

Monitorización del rendimiento de las aplicaciones con métricas del SDK

El SDK para Java puede recopilar métricas para los clientes de servicio de su aplicación. Puede utilizar estas métricas para identificar problemas de rendimiento, revisar las tendencias generales de uso, revisar las excepciones de clientes de servicio devueltas o profundizar para comprender un problema concreto.

Le recomendamos que recopile métricas y, a continuación, analice los Amazon CloudWatch Logs para comprender mejor el rendimiento de su aplicación.

Manejo de errores en el AWS SDK for Java 2.x

Comprender cómo y cuándo se producen AWS SDK for Java 2.x excepciones es importante para crear aplicaciones de alta calidad con el SDK. En las siguientes secciones se describen los diferentes casos de excepciones que produce el SDK y cómo tratarlas correctamente.

¿Por qué excepciones no controladas?

AWS SDK para Java Utiliza excepciones en tiempo de ejecución (o no comprobadas) en lugar de excepciones comprobadas por los siguientes motivos:

- Para permitir a los desarrolladores un control minucioso de los errores que desean administrar sin obligarles a abordar casos excepcionales que no les preocupan (o que les obligan a detallar su código en exceso)
- Para evitar problemas de escalabilidad inherentes a las excepciones controladas en aplicaciones grandes

En general, las excepciones controladas funcionan bien a pequeña escala, pero pueden ser problemáticas cuando las aplicaciones crecen y se vuelven más complejas.

AwsServiceException (y subclases)

AwsServiceExceptiones la excepción más común que experimentará al AWS SDK para Java usar. `AwsServiceException`es una subclase de las más generales SdkServiceException. `AwsServiceExceptions` representan una respuesta de error de un Servicio de AWS. Por ejemplo, si intentas terminar una Amazon EC2 instancia que no existe, Amazon EC2 devolverá una respuesta de error y todos los detalles de esa respuesta de error se incluirán en la `AwsServiceException` que se arroje.

Cuando encuentres una`AwsServiceException`, sabrás que tu solicitud se envió correctamente, Servicio de AWS pero que no se pudo procesar correctamente. Esto puede ser debido a errores en los parámetros de la solicitud o a problemas en el servicio.

`AwsServiceException` proporciona información como:

- Código de estado HTTP devuelto
- Código AWS de error devuelto
- Mensaje de error detallado del servicio de la AwsErrorDetailsclase
- AWS ID de solicitud de la solicitud fallida

En algunos casos, se produce una subclase de `AwsServiceException` para permitir a los desarrolladores un control minucioso del tratamiento de casos de error a través de bloques de captura. La referencia de la API del SDK de Java AwsServiceExceptionmuestra la gran cantidad de `AwsServiceException` subclases. Utilice los enlaces de las subclases para profundizar y ver las excepciones granulares generadas por un servicio.

Por ejemplo, los siguientes enlaces a la referencia API del SDK muestran las jerarquías de excepciones para algunos Servicios de AWS comunes. La lista de subclases que se muestra en cada página muestra las excepciones específicas que su código puede capturar.

- Amazon S3
- DynamoDB
- Amazon SQS

Para obtener más información sobre una excepción, inspeccione `errorCode` el AwsErrorDetailsobjeto. Puede usar el valor `errorCode` para buscar información en la API de la guía de servicios. Por ejemplo, si se captura un `S3Exception` y el valor `AwsErrorDetails#errorCode()` es `InvalidRequest`, utilice la lista de códigos de error de la Referencia de la API de Amazon S3 para ver más detalles.

SdkClientException

SdkClientExceptionindica que se ha producido un problema en el código del cliente de Java, ya sea al intentar enviar una solicitud AWS o al analizar una respuesta desde él AWS. Un `SdkClientException` es generalmente más grave que uno e indica un problema importante que

impide que el cliente realice llamadas de servicio a AWS los servicios. `SdkServiceException` Por ejemplo, `SdkClientException` si no hay ninguna conexión de red disponible cuando se intenta llamar a una operación en uno de los clientes. AWS SDK para Java

Excepciones y comportamiento de reintentos

El SDK para Java vuelve a intentar las solicitudes de varias excepciones del lado del cliente y de los códigos de estado HTTP que recibe de las respuestas. Servicio de AWS Estos errores se gestionan como parte del `RetryMode` heredado que los clientes de servicios utilizan de forma predeterminada. La referencia de la API de Java para `RetryMode` describe las distintas formas de configurar el modo.

Para personalizar las excepciones y los códigos de estado HTTP que activan los reintentos automáticos, configure su cliente de servicio con una `RetryPolicy` que añada instancias `RetryOnExceptionsCondition` y `RetryOnStatusCodeCondition`.

Uso de resultados paginados en la versión 2.x AWS SDK para Java

Muchas AWS operaciones devuelven resultados paginados cuando el objeto de respuesta es demasiado grande para mostrarlos en una sola respuesta. En la AWS SDK para Java versión 1.0, la respuesta contiene un token que se usa para recuperar la siguiente página de resultados. Por el contrario, la versión AWS SDK para Java 2.x cuenta con métodos de autopaginación que permiten realizar múltiples llamadas de servicio para obtener automáticamente la siguiente página de resultados. Solo tiene que escribir el código que procesa los resultados. La paginación automática está disponible para clientes síncronos y asíncronos.

> **Note**
>
> Estos fragmentos de código asumen que entiende los fundamentos del uso del SDK, y ha configurado su entorno con acceso de inicio de sesión único.

Paginación síncrona

En los ejemplos siguientes, se muestran métodos de paginación síncrona para obtener una lista de los objetos en un bucket de Amazon S3 .

Iterar sobre páginas

El primer ejemplo demuestra el uso de un objeto paginador de `listRes`, una instancia de `ListObjectsV2Iterable`, para iterar por todas las páginas de respuesta con el método `stream`. El código recorre las páginas de respuesta, convierte el flujo de respuesta en un flujo de `S3Object` contenido y, a continuación, procesa el contenido del objeto. Amazon S3

Las importaciones siguientes se aplican a todos los ejemplos de esta sección de paginación síncrona.

Importaciones

```
import java.io.IOException;
import java.nio.ByteBuffer;
import java.util.Random;

import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.paginators.ListObjectsV2Iterable;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Request;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Response;
import software.amazon.awssdk.services.s3.model.S3Object;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.DeleteObjectRequest;
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadRequest;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.CompletedMultipartUpload;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.CreateBucketConfiguration;
import software.amazon.awssdk.services.s3.model.UploadPartRequest;
import software.amazon.awssdk.services.s3.model.CompleteMultipartUploadRequest;
import software.amazon.awssdk.services.s3.waiters.S3Waiter;
import software.amazon.awssdk.services.s3.model.HeadBucketRequest;
import software.amazon.awssdk.services.s3.model.HeadBucketResponse;
```

```
        ListObjectsV2Request listReq = ListObjectsV2Request.builder()
            .bucket(bucketName)
            .maxKeys(1)
            .build();

        ListObjectsV2Iterable listRes = s3.listObjectsV2Paginator(listReq);
        // Process response pages
        listRes.stream()
            .flatMap(r -> r.contents().stream())
            .forEach(content -> System.out
                .println(" Key: " + content.key() + " size = " + content.size()));
```

Consulte el ejemplo completo en GitHub.

Iterar sobre objetos

Los ejemplos siguientes muestran formas de recorrer en iteración los objetos devueltos en la respuesta en lugar de las páginas de la respuesta. El método `contents` de clase `ListObjectsV2Iterable` devuelve un `SdkIterable` que proporciona varios métodos para procesar los elementos de contenido subyacentes.

Usar un stream

El siguiente fragmento de código utiliza el método `stream` sobre el contenido de la respuesta para recorrer en iteración la colección de elementos paginados.

```
        // Helper method to work with paginated collection of items directly.
        listRes.contents().stream()
            .forEach(content -> System.out
                .println(" Key: " + content.key() + " size = " + content.size()));
```

Consulte el ejemplo completo en GitHub.

Usar un buble for-each

Como `SdkIterable` amplía la interfaz de `Iterable`, puede procesar el contenido como cualquier otro `Iterable`. El siguiente fragmento de código utiliza un bucle estándar `for-each` para recorrer en iteración el contenido de la respuesta.

```
        for (S3Object content : listRes.contents()) {
            System.out.println(" Key: " + content.key() + " size = " + content.size());
        }
```

Consulte el ejemplo completo en GitHub.

Paginación manual

Si su caso de uso lo requiere, la paginación manual seguirá estando disponible. Utilice el siguiente token del objeto de respuesta para las solicitudes posteriores. En este ejemplo se usa un bucle `while`.

```
        ListObjectsV2Request listObjectsReqManual = ListObjectsV2Request.builder()
            .bucket(bucketName)
            .maxKeys(1)
            .build();

        boolean done = false;
        while (!done) {
            ListObjectsV2Response listObjResponse =
s3.listObjectsV2(listObjectsReqManual);
            for (S3Object content : listObjResponse.contents()) {
                System.out.println(content.key());
            }

            if (listObjResponse.nextContinuationToken() == null) {
                done = true;
            }

            listObjectsReqManual = listObjectsReqManual.toBuilder()
                .continuationToken(listObjResponse.nextContinuationToken())
                .build();
        }
```

Consulte el ejemplo completo en GitHub.

Paginación asíncrona

Los siguientes ejemplos muestran los métodos de paginación asíncrona para enumerar tablas. DynamoDB

Recorrer en iteración páginas de nombres de tablas

Los dos ejemplos siguientes utilizan un cliente de DynamoDB asincrónico que llama al método `listTablesPaginator` con una solicitud para obtener un `ListTablesPublisher`. `ListTablesPublisher` implementa dos interfaces, que ofrecen muchas opciones para procesar respuestas. Analizaremos los métodos de cada interfaz.

Utilizar un **`Subscriber`**.

En el ejemplo de código siguiente se muestra cómo procesar los resultados paginados mediante la interfaz `org.reactivestreams.Publisher` implementada por `ListTablesPublisher`. Para obtener más información sobre el modelo de transmisiones reactivas, consulte el repositorio de transmisiones reactivas. GitHub

Las importaciones siguientes se aplican a todos los ejemplos de esta sección de paginación asíncrona.

Importaciones

```
import io.reactivex.rxjava3.core.Flowable;
import org.reactivestreams.Subscriber;
import org.reactivestreams.Subscription;
import reactor.core.publisher.Flux;
import software.amazon.awssdk.core.async.SdkPublisher;
import software.amazon.awssdk.services.dynamodb.DynamoDbAsyncClient;
import software.amazon.awssdk.services.dynamodb.model.ListTablesRequest;
import software.amazon.awssdk.services.dynamodb.model.ListTablesResponse;
import software.amazon.awssdk.services.dynamodb.paginators.ListTablesPublisher;

import java.util.List;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutionException;
```

El siguiente código adquiere una instancia `ListTablesPublisher`.

```
        // Creates a default client with credentials and region loaded from the
        // environment.
        final DynamoDbAsyncClient asyncClient = DynamoDbAsyncClient.create();

        ListTablesRequest listTablesRequest =
 ListTablesRequest.builder().limit(3).build();
```

```
        ListTablesPublisher publisher =
asyncClient.listTablesPaginator(listTablesRequest);
```

El código siguiente utiliza una implementación anónima de `org.reactivestreams.Subscriber` para procesar los resultados de cada página.

El método on`Subscribe` llama al método `Subscription.request` para iniciar las solicitudes de datos del publicador. Este método debe llamarse para empezar a obtener datos del publicador.

El método on`Next` del suscriptor procesa una página de respuesta accediendo a todos los nombres de las tablas e imprimiendo cada una de ellas. Una vez procesada la página, se solicita otra página al publicador. Este es el método que se llama repetidamente hasta que se recuperan todas las páginas.

El método on`Error` se desencadena si se produce un error al recuperar los datos. Por último, se llama al método on`Complete` cuando se han solicitado todas las páginas.

```
        // A Subscription represents a one-to-one life-cycle of a Subscriber
subscribing
        // to a Publisher.
        publisher.subscribe(new Subscriber<ListTablesResponse>() {
            // Maintain a reference to the subscription object, which is required to
request
            // data from the publisher.
            private Subscription subscription;

            @Override
            public void onSubscribe(Subscription s) {
                subscription = s;
                // Request method should be called to demand data. Here we request a
single
                // page.
                subscription.request(1);
            }

            @Override
            public void onNext(ListTablesResponse response) {
                response.tableNames().forEach(System.out::println);
                // After you process the current page, call the request method to
signal that
                // you are ready for next page.
                subscription.request(1);
```

```
            }

            @Override
            public void onError(Throwable t) {
                // Called when an error has occurred while processing the requests.
            }

            @Override
            public void onComplete() {
                // This indicates all the results are delivered and there are no more
pages
                // left.
            }
        });
```

Consulta el ejemplo completo en. GitHub

Utilizar un **`Consumer`**.

La interfaz `SdkPublisher` que `ListTablesPublisher` implementa tiene un método `subscribe` que toma un `Consumer` y devuelve un `CompletableFuture<Void>`.

El método `subscribe` de esta interfaz se puede utilizar para casos de uso simples en los que un `org.reactivestreams.Subscriber` puede resultar demasiado recargado. Como el siguiente código consume cada página, llama al método `tableNames` en cada una de ellas. El método `tableNames` devuelve un `java.util.List` de nombres de tablas de DynamoDB que se procesan con el método `forEach`.

```
        // Use a Consumer for simple use cases.
        CompletableFuture<Void> future = publisher.subscribe(
                response -> response.tableNames()
                        .forEach(System.out::println));
```

Consulte el ejemplo completo en GitHub.

Recorrer en iteración nombres de tablas

Los ejemplos siguientes muestran formas de recorrer en iteración los objetos devueltos en la respuesta en lugar de las páginas de la respuesta. De forma similar al ejemplo síncrono de Amazon S3 mostrado anteriormente con su método `contents`, la clase de resultados asíncrona de DynamoDB, `ListTablesPublisher` dispone del método de conveniencia `tableNames` para

interactuar con la colección de elementos subyacente. El tipo devuelto del método `tableNames` es un `SdkPublisher` que se puede usar para solicitar elementos en todas las páginas.

Utilizar un **`Subscriber`**.

El código siguiente adquiere un `SdkPublisher` de las colecciones subyacentes de nombres de tablas.

```
        // Create a default client with credentials and region loaded from the
        // environment.
        final DynamoDbAsyncClient asyncClient = DynamoDbAsyncClient.create();

        ListTablesRequest listTablesRequest =
ListTablesRequest.builder().limit(3).build();
        ListTablesPublisher listTablesPublisher =
asyncClient.listTablesPaginator(listTablesRequest);
        SdkPublisher<String> publisher = listTablesPublisher.tableNames();
```

El código siguiente utiliza una implementación anónima de `org.reactivestreams.Subscriber` para procesar los resultados de cada página.

El método del suscriptor `onNext` procesa un elemento individual de la colección. En este caso, es el nombre de una tabla. Una vez procesada la página, se solicita otra página al publicador. Este es el método que se llama repetidamente hasta que se recuperan todas las páginas.

```
        // Use a Subscriber.
        publisher.subscribe(new Subscriber<String>() {
            private Subscription subscription;

            @Override
            public void onSubscribe(Subscription s) {
                subscription = s;
                subscription.request(1);
            }

            @Override
            public void onNext(String tableName) {
                System.out.println(tableName);
                subscription.request(1);
            }

            @Override
```

```
            public void onError(Throwable t) {
            }

            @Override
            public void onComplete() {
            }
        });
```

Consulte el ejemplo completo en GitHub.

Utilizar un **`Consumer`**.

En el ejemplo siguiente, se utiliza el método `subscribe` de `SdkPublisher` que toma un `Consumer` a para procesar cada elemento.

```
        // Use a Consumer.
        CompletableFuture<Void> future = publisher.subscribe(System.out::println);
        future.get();
```

Consulte el ejemplo completo en GitHub.

Usar una biblioteca de terceros

Puede utilizar otras bibliotecas de terceros en lugar de implementar un suscriptor personalizado. Este ejemplo demuestra el uso de RxJava, pero se puede utilizar cualquier biblioteca que implemente las interfaces de flujo reactivo. Consulte la página RxJava wiki en GitHub para obtener más información sobre esa biblioteca.

Para utilizar la biblioteca, añádala como una dependencia. Si utiliza Maven, el ejemplo muestra el fragmento de POM que se debe utilizar.

Entrada de POM

```
<dependency>
      <groupId>io.reactivex.rxjava3</groupId>
      <artifactId>rxjava</artifactId>
      <version>3.1.6</version>
</dependency>
```

Código

```
        DynamoDbAsyncClient asyncClient = DynamoDbAsyncClient.create();
        ListTablesPublisher publisher =
asyncClient.listTablesPaginator(ListTablesRequest.builder()
                .build());

        // The Flowable class has many helper methods that work with
        // an implementation of an org.reactivestreams.Publisher.
        List<String> tables = Flowable.fromPublisher(publisher)
                .flatMapIterable(ListTablesResponse::tableNames)
                .toList()
                .blockingGet();
        System.out.println(tables);
```

Consulte el ejemplo completo en GitHub.

Utilizando camareros en el AWS SDK for Java 2.x

La utilidad waiters de la versión AWS SDK para Java 2.x permite validar que AWS los recursos se encuentran en un estado específico antes de realizar operaciones con esos recursos.

Un camarero es una abstracción que se utiliza para sondear AWS recursos, como DynamoDB tablas o Amazon S3 cubos, hasta que se alcance el estado deseado (o hasta que se determine que el recurso nunca alcanzará el estado deseado). En lugar de escribir una lógica para sondear continuamente AWS los recursos, lo que puede resultar engorroso y propenso a errores, puede utilizar waiters para sondear un recurso y hacer que el código siga ejecutándose una vez que el recurso esté listo.

Requisitos previos

Para poder usar camareros en un proyecto con el AWS SDK para Java, debes completar los pasos de Configuración de la versión 2.x. AWS SDK para Java

También debe configurar las dependencias de su proyecto (por ejemplo, en su archivo `pom.xml` o `build.gradle`) para usar la versión `2.15.0` o posterior del AWS SDK para Java.

Por ejemplo:

```
<project>
  <dependencyManagement>
```

```
   <dependencies>
      <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>bom</artifactId>
        <version>2.27.21</version>
        <type>pom</type>
        <scope>import</scope>
      </dependency>
   </dependencies>
  </dependencyManagement>
</project>
```

Uso de esperadores

Para crear una instancia de un objeto esperador, cree antes un cliente de servicio. Establece el método del cliente `waiter()` de servicio como el valor del objeto esperador. Una vez que exista la instancia de esperador, configure sus opciones de respuesta para ejecutar el código apropiado.

Programación asíncrona

El siguiente fragmento de código muestra cómo esperar a que una DynamoDB mesa exista y esté en estado ACTIVO.

```
DynamoDbClient dynamo = DynamoDbClient.create();
DynamoDbWaiter waiter = dynamo.waiter();

WaiterResponse<DescribeTableResponse> waiterResponse =
  waiter.waitUntilTableExists(r -> r.tableName("myTable"));

// print out the matched response with a tableStatus of ACTIVE
waiterResponse.matched().response().ifPresent(System.out::println);
```

Programación asíncrona

El siguiente fragmento de código muestra cómo esperar a que una DynamoDB tabla deje de existir.

```
DynamoDbAsyncClient asyncDynamo = DynamoDbAsyncClient.create();
DynamoDbAsyncWaiter asyncWaiter = asyncDynamo.waiter();

CompletableFuture<WaiterResponse<DescribeTableResponse>> waiterResponse =
          asyncWaiter.waitUntilTableNotExists(r -> r.tableName("myTable"));
```

```
waiterResponse.whenComplete((r, t) -> {
  if (t == null) {
   // print out the matched ResourceNotFoundException
   r.matched().exception().ifPresent(System.out::println);
  }
}).join();
```

Configurar los esperadores

Puede personalizar la configuración de un esperador utilizando el `overrideConfiguration()` en su creador. Para algunas operaciones, puede aplicar una configuración personalizada al realizar la solicitud.

Configurar un esperador

En el siguiente fragmento de código se muestra cómo anular la configuración de un esperador.

```
// sync
DynamoDbWaiter waiter =
   DynamoDbWaiter.builder()
          .overrideConfiguration(b -> b.maxAttempts(10))
          .client(dynamoDbClient)
          .build();
// async
DynamoDbAsyncWaiter asyncWaiter =
   DynamoDbAsyncWaiter.builder()
          .client(dynamoDbAsyncClient)
          .overrideConfiguration(o -> o.backoffStrategy(
               FixedDelayBackoffStrategy.create(Duration.ofSeconds(2))))
          .scheduledExecutorService(Executors.newScheduledThreadPool(3))
          .build();
```

Anular la configuración de una solicitud específica

El siguiente fragmento de código muestra cómo anular la configuración de un esperador en función de cada solicitud. Tenga en cuenta que solo algunas operaciones tienen configuraciones personalizables.

```
waiter.waitUntilTableNotExists(b -> b.tableName("myTable"),
               o -> o.maxAttempts(10));
```

```
asyncWaiter.waitUntilTableExists(b -> b.tableName("myTable"),
                 o -> o.waitTimeout(Duration.ofMinutes(1)));
```

Ejemplos de código

Para ver un ejemplo completo del uso de waiters with DynamoDB, consulta CreateTable.java en el AWS repositorio de ejemplos de código.

Para ver un ejemplo completo del uso de waiters with Amazon S3, consulta S3 BucketOps .java en el AWS repositorio de ejemplos de código.

Solución de problemas FAQs

A medida que lo utilice AWS SDK for Java 2.x en sus aplicaciones, es posible que se produzcan los errores de tiempo de ejecución que se enumeran en este tema. Utilice estas sugerencias como ayuda para descubrir la causa principal y resolver el error.

¿Cómo puedo corregir el error "**`java.net.SocketException`**: Connection reset" o "server failed to complete the response"?

Un error al restablecer la conexión indica que el anfitrión Servicio de AWS, el servidor o cualquier intermediario (por ejemplo, una puerta de enlace NAT, un proxy o un equilibrador de carga) cerró la conexión antes de que se completara la solicitud. Dado que las causas pueden ser múltiples, es necesario saber por qué se cierra la conexión para encontrar una solución. Los siguientes elementos suelen provocar el cierre de una conexión.

- La conexión está inactiva.Esto es habitual en las operaciones de streaming, en las que los datos no se escriben ni salen de la red durante un período de tiempo, por lo que un intermediario detecta que la conexión está interrumpida y la cierra. Para evitarlo, asegúrate de que tu aplicación descargue o cargue datos de forma activa.
- Usted ha cerrado el cliente de HTTP o el SDK. Asegúrese de no cerrar recursos mientras estén en uso.
- Un proxy configurado incorrectamente. Intente omitir los proxies que haya configurado para comprobar si se soluciona el problema. Si se soluciona el problema, el proxy está cerrando la conexión por alguna razón. Investigue su proxy específico para determinar por qué cierra la conexión.

Si no puede identificar el problema, ejecute un volcado de TCP para una conexión afectada en la periferia del cliente de la red (por ejemplo, después de cualquier servidor proxy que usted controle).

Si ves que el AWS punto final está enviando un `TCP RST` (restablecimiento), ponte en contacto con el servicio afectado para ver si pueden determinar el motivo del restablecimiento. Prepárate para proporcionar una solicitud IDs y marcar la hora en la que se produjo el problema. El equipo de AWS soporte también podría beneficiarse de los registros de cables que muestren exactamente qué bytes envía y recibe su aplicación y cuándo.

¿Cómo puedo corregir “tiempo de espera de conexión”?

Un error en el tiempo de espera de la conexión indica que el anfitrión Servicio de AWS, el servidor o cualquier intermediario (por ejemplo, una puerta de enlace NAT, un proxy o un equilibrador de carga) no pudieron establecer una nueva conexión con el servidor dentro del tiempo de espera de conexión configurado. Los siguientes elementos describen causas comunes de este problema.

- El tiempo de espera de conexión configurado es demasiado bajo. De forma predeterminada, el tiempo de espera de conexión es de 2 segundos en AWS SDK for Java 2.x. Si establece el tiempo de espera de conexión demasiado bajo, es posible que aparezca este error. El tiempo de espera de conexión recomendado es de 1 segundo si solo hace llamadas dentro de una región y de 3 segundos si realiza solicitudes entre regiones.
- Un proxy configurado incorrectamente. Intente omitir los proxies que haya configurado para comprobar si se soluciona el problema. Si se soluciona, la razón del problema del tiempo de espera de conexión se encuentra en el proxy. Investigue su proxy específico para determinar la causa

Si no puede identificar el problema, ejecute un volcado de TCP para una conexión afectada en la periferia del cliente de la red (por ejemplo, después de cualquier servidor proxy que usted controle) para investigar posibles problemas de red.

¿Cómo puedo corregir “**`java.net.SocketTimeoutException`**: Read timed out”?

Un error de tiempo de espera agotado de lectura indica que la JVM ha intentado leer los datos del sistema operativo subyacente, pero no se devolvieron dentro del tiempo configurado mediante el SDK. Este error puede producirse si el sistema operativo Servicio de AWS, el operador o cualquier intermediario (por ejemplo, una puerta de enlace NAT, un proxy o un equilibrador de carga) no envía

los datos en el tiempo esperado por la JVM. Dado que las causas pueden ser múltiples, es necesario saber por qué no se devuelven los datos para encontrar una solución.


Ejecute un volcado de TCP para una conexión afectada en la periferia del cliente de la red (por ejemplo, después de cualquier servidor proxy que usted controle).

Si ve que el AWS punto final está enviando un `TCP RST` (restablecimiento), póngase en contacto con el servicio afectado. Prepárate para proporcionar una solicitud IDs y marcar la hora en la que se produjo el problema. El equipo de AWS soporte también podría beneficiarse de los registros de cables que muestren exactamente qué bytes envía y recibe su aplicación y cuándo.


¿Cómo puedo corregir el error “Unable to execute HTTP request: Timeout waiting for connection from pool”?

Este error indica que una solicitud no puede obtener una conexión del grupo en el plazo de tiempo máximo especificado. Para solucionar el problema, te recomendamos que habilites las métricas del lado del cliente del SDK para publicar las métricas en Amazon. CloudWatch Las métricas de HTTP pueden ayudar a reducir el problema raíz. Los siguientes elementos describen causas comunes de este error.

- Filtración de conexión. Puede investigar esto comprobando las métricas de `LeasedConcurrency`, `AvailableConcurrency` y `MaxConcurrency`. Si `LeasedConcurrency` aumenta hasta alcanzar `MaxConcurrency` pero no disminuye, es posible que haya una filtración de conexión. Una causa común de filtración es que haya una operación de streaming, como un método `getObject` de S3, que no se ha cerrado. Recomendamos que la aplicación lea todos los datos del flujo de entrada lo antes posible y cierre el flujo de entrada después. En el siguiente gráfico se muestra el aspecto que podrían tener las métricas del SDK en caso de filtración de conexión.

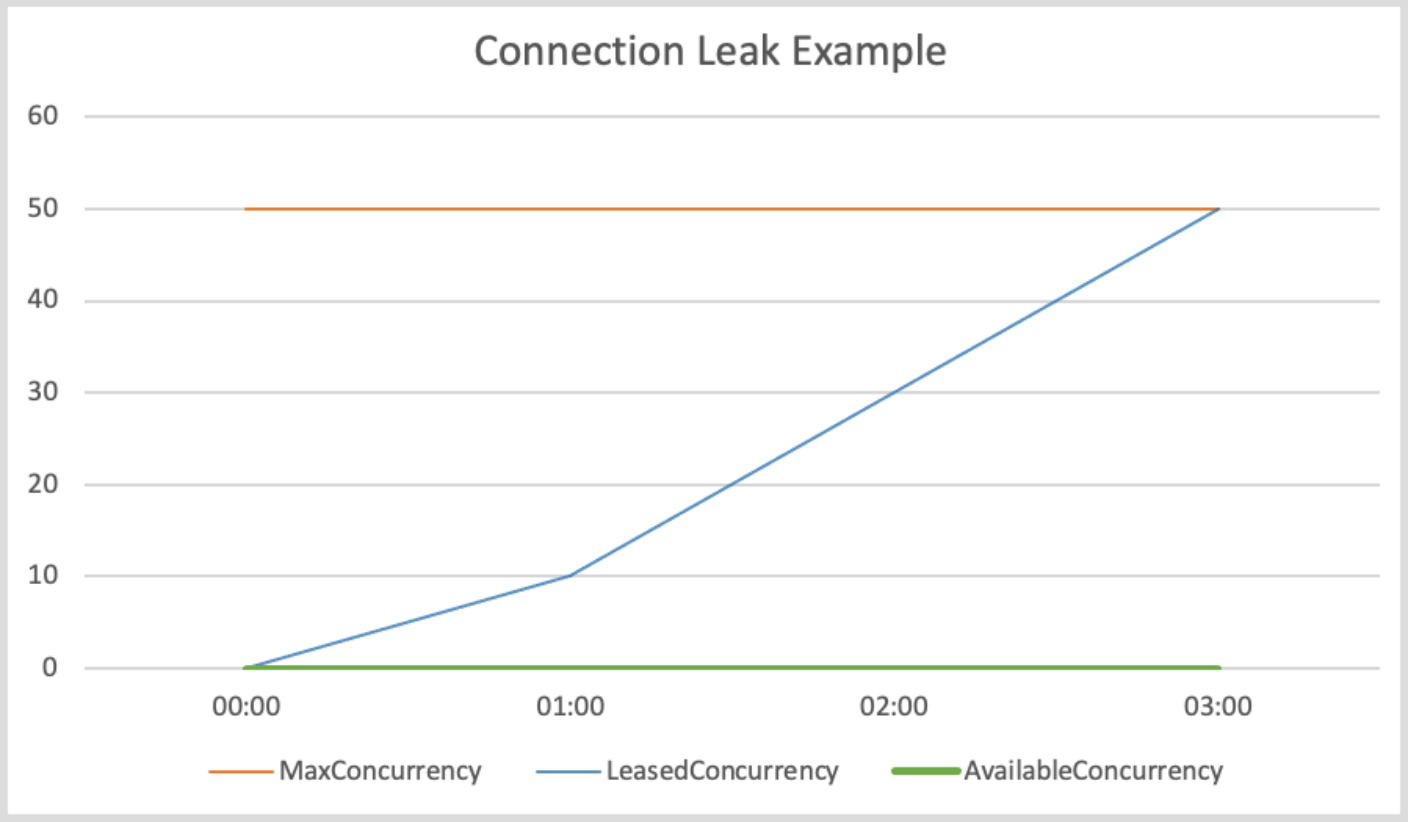

- Falta de grupos de conexiones.Esta situación puede producirse si la tasa de solicitudes es demasiado alta y el tamaño del grupo de conexiones que se ha configurado no puede satisfacer la demanda de las solicitudes. El tamaño predeterminado del grupo de conexiones es 50 y, cuando las conexiones del grupo alcanzan el máximo, el cliente de HTTP pone en cola las solicitudes entrantes hasta que haya conexiones disponibles. En el siguiente gráfico se muestra el aspecto que podrían tener las métricas del SDK en caso de falta de grupos de conexiones.

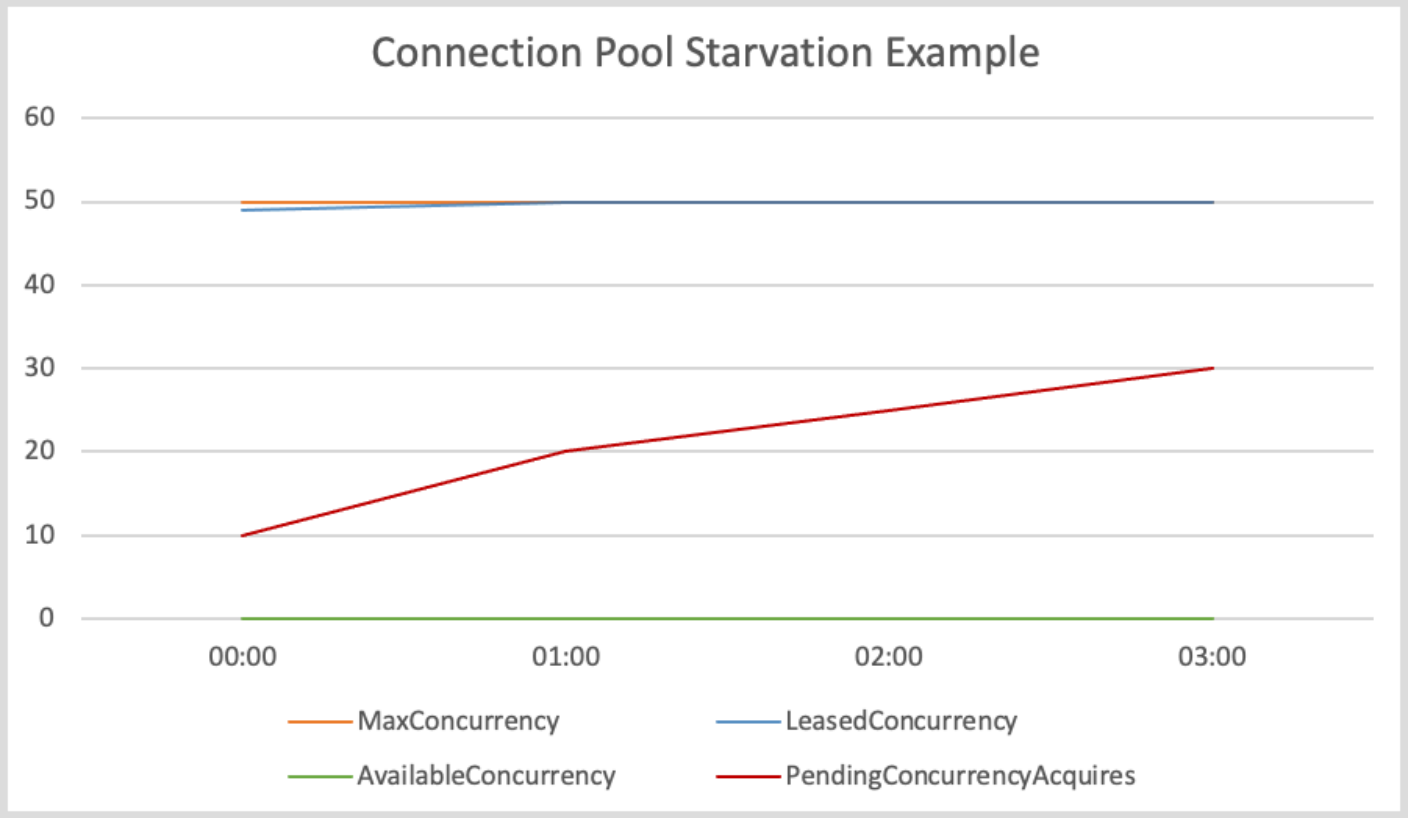

Para mitigar este problema, considere la posibilidad de tomar alguna de estas medidas.


- Aumente el tamaño del grupo de conexiones.
- Aumente el tiempo de espera de adquisición.
- Disminuya la tasa de solicitudes.

Al aumentar el número máximo de conexiones, el rendimiento del cliente puede aumentar (a menos que la interfaz de red ya esté plenamente utilizada). Sin embargo, con el tiempo es posible que se produzcan limitaciones del sistema operativo en cuanto al número de descriptores de archivos utilizados por el proceso. Si ya utiliza plenamente la interfaz de red o no puede aumentar más el número de conexiones, pruebe a aumentar el tiempo de espera de adquisición. Con este aumento se gana tiempo adicional para las solicitudes de adquisición de una conexión antes de que se agote el tiempo de espera. Si las conexiones no se liberan, se agotará el tiempo de espera de las solicitudes subsiguientes.

Si no puede corregir el problema utilizando las dos primeras medidas, reduzca la tasa de solicitudes probando las siguientes opciones.

- Simplifique las solicitudes para que las grandes ampliaciones de tráfico no sobrecarguen al cliente.

  - Sea más eficiente con las llamadas a Servicios de AWS.
  - Aumente el número de hosts que envían solicitudes.
- Los subprocesos de E/S están demasiado ocupados. Esto solo se aplica si utiliza un cliente de SDK asincrónico con `NettyNioAsyncHttpClient`. Si la `AvailableConcurrency` métrica no es baja (lo que indica que hay conexiones disponibles en el grupo), pero `ConcurrencyAcquireDuration` es alta, podría deberse a que los I/O subprocesos no pueden gestionar las solicitudes. Asegúrese de no hacerse pasar por `Runnable:run` un ejecutor de future complete y de realizar una tarea que requiera mucho tiempo en la cadena de finalización futura de la respuesta, ya que esto puede bloquear un I/O hilo. Si ese no es el caso, considere la posibilidad de aumentar el número de I/O subprocesos mediante el `eventLoopGroupBuilder` método. Como referencia, la cantidad predeterminada de subprocesos de E/S para una instancia de `NettyNioAsyncHttpClient` es el doble del número de núcleos de CPU del host.
- Alta latencia de establecimiento de comunicación de TLS. Si la métrica `AvailableConcurrency` está cerca de 0 y `LeasedConcurrency` es inferior a `MaxConcurrency`, puede deberse a que sea alta la latencia de establecimiento de comunicación de TLS. En el siguiente gráfico se muestra el aspecto que podrían tener las métricas del SDK en caso de latencia alta del establecimiento de comunicación de TLS.

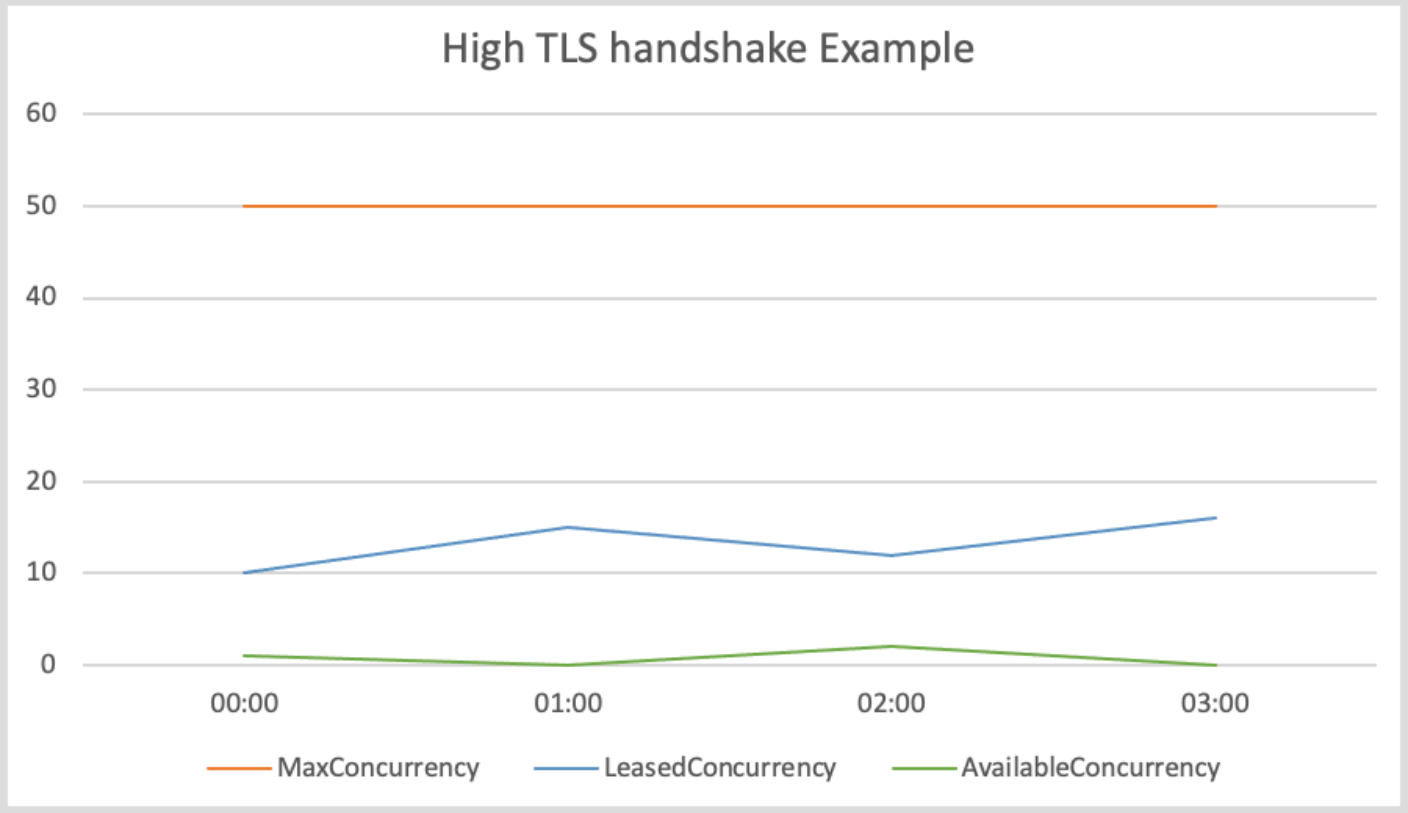

En el caso de los clientes HTTP que ofrece el SDK de Java y que no están basados en CRT, pruebe a habilitar los registros de TLS para solucionar problemas de TLS. Para el cliente de HTTP basado en AWS CRT, pruebe a habilitar registros de AWS CRT. Si observas que el AWS punto final tarda mucho en realizar un protocolo de enlace TLS, ponte en contacto con el servicio afectado.

¿Cómo puedo corregir **`NoClassDefFoundError`**, **`NoSuchMethodError`** o **`NoSuchFieldError`**?

Un `NoClassDefFoundError` indica que no se ha podido cargar una clase en tiempo de ejecución. Estas son las dos causas más comunes de este error:

- la clase no existe en la ruta de clases porque falta el JAR o porque hay una versión incorrecta del JAR en la ruta de clases.
- la clase no se ha podido cargar porque su inicializador estático ha lanzado una excepción.

Del mismo modo, `NoSuchMethodError` y `NoSuchFieldError` suelen deberse a una versión de JAR que no coincide. Le recomendamos que siga estos siguientes pasos:

1. Compruebe sus dependencias para asegurarse de que está usando la misma versión de todos los jar del SDK. Cuando no se encuentra una clase, un método o un campo lo más común es que se deba a que ha actualizado a una nueva versión del cliente pero sigue usando una versión antigua de dependencia “compartida” del SDK. Es posible que la nueva versión del cliente intente usar clases que solo existen en las dependencias “compartidas” del SDK más recientes. Pruebe a ejecutar `mvn dependency:tree` o `gradle dependencies` (para Gradle) para verificar que coincidan todas las versiones de la biblioteca del SDK. Para evitar este problema por completo en el futuro, recomendamos utilizar la lista de materiales (BOM) para administrar versiones de los módulos del SDK.

   El siguiente ejemplo muestra un ejemplo de versiones de SDK mixtas.

   ```
   [INFO] +- software.amazon.awssdk:dynamodb:jar:2.20.00:compile
   [INFO] |  +- software.amazon.awssdk:aws-core:jar:2.13.19:compile
   [INFO] +- software.amazon.awssdk:netty-nio-client:jar:2.20.00:compile
   ```

La versión de `dynamodb` es 2.20.00 y la versión de `aws-core` es 2.13.19. La versión del artefacto `aws-core` también debería ser 2.20.00.

2. Compruebe instrucciones al principio de los registros para ver si una clase no se carga debido a un error de inicialización estática. La primera vez que la clase no se carga, puede generar una excepción diferente y más útil que especifique por qué no se puede cargar la clase. Esta excepción, potencialmente útil, se produce solo una vez, por lo que las instrucciones de registro posteriores solo informarán de que no se ha encontrado la clase.
3. Compruebe el proceso de implementación para asegurarse de que realmente implementa los archivos JAR necesarios junto con la aplicación. Es posible que esté compilando con la versión correcta, pero el proceso que crea la ruta de clases para su aplicación esté excluyendo una dependencia obligatoria.

¿Cómo puedo corregir un error “**`SignatureDoesNotMatch`**” o un error “The request signature we calculated does not match the signature you provided”?

Un `SignatureDoesNotMatch` error indica que la firma generada por el AWS SDK para Java y la firma generada por el Servicio de AWS no coinciden. Puede deberse a las causas siguientes.

- Un proxy o un intermediario modifica la solicitud. Por ejemplo, un proxy o un equilibrador de carga puede modificar un encabezado, una ruta o una cadena de consulta haya firmado el SDK.
- El servicio y el SDK se diferencian en la forma en que codifican la solicitud cuando cada uno genera la cadena que se va a firmar.

Para solucionar este problema, le recomendamos que habilite el registro de depuración en el SDK. Intente reproducir el error y busque la solicitud canónica que ha generado el SDK. En el registro, la solicitud canónica se etiqueta con `AWS4 Canonical Request: ...` y la cadena que se va a firmar se etiqueta con `AWS4 String to sign: ...`.

Si no puede habilitar la depuración (por ejemplo, porque solo se puede reproducir en producción), agregue lógica a la aplicación que registra información sobre la solicitud cuando se produzca el error. A continuación, puede usar esa información para intentar replicar el error fuera del entorno de producción en una prueba de integración con el registro de depuración activado.

Una vez recopiladas la solicitud canónica y la cadena de firma, compárelas con la especificación de la versión 4 de AWS Signature para determinar si hay algún problema en la forma en que el SDK ha generado la cadena de firma. Si algo parece estar mal, puede crear un informe de GitHub error para AWS SDK para Java.

Si no hay ningún problema, puedes comparar la cadena del SDK para firmar con la cadena para firmar que algunos Servicios de AWS devuelven como parte de la respuesta al error (Amazon S3, por ejemplo). Si no está disponible, deberá ponerse en contacto con el servicio afectado para ver qué solicitud canónica y cadena de firma han generado para comparar. Estas comparaciones pueden ayudar a identificar los intermediarios que podrían haber modificado la solicitud o diferencias de codificación entre el servicio y el cliente.

Para obtener más información general sobre la firma de solicitudes, consulte Firmar solicitudes de AWS API en la Guía del AWS Identity and Access Management usuario.

Example de una solicitud canónica

```
PUT
/Example-Bucket/Example-Object
partNumber=19&uploadId=string
amz-sdk-invocation-id:f8c2799d-367c-f024-e8fa-6ad6d0a1afb9
amz-sdk-request:attempt=1; max=4
content-encoding:aws-chunked
content-length:51
content-type:application/octet-stream
host:xxxxx
x-amz-content-sha256:STREAMING-UNSIGNED-PAYLOAD-TRAILER
x-amz-date:20240308T034733Z
x-amz-decoded-content-length:10
x-amz-sdk-checksum-algorithm:CRC32
x-amz-trailer:x-amz-checksum-crc32
```

Example de una cadena de firma

```
AWS4-HMAC-SHA256
20240308T034435Z
20240308/us-east-1/s3/aws4_request
5f20a7604b1ef65dd89c333fd66736fdef9578d11a4f5d22d289597c387dc713
```

¿Cómo puedo solucionar el error "**java.lang.IllegalStateException**: Connection pool shut down"?

Este error indica que el grupo de conexiones HTTP de Apache subyacente estaba cerrado. Puede deberse a las causas siguientes.

- El cliente del SDK se ha cerrado prematuramente.El SDK solo cierra el grupo de conexiones cuando el cliente asociado está cerrado. Asegúrese de no cerrar recursos mientras estén en uso.
- Se ha lanzado un **java.lang.Error**. Errores como `OutOfMemoryError` provocan que un grupo de conexiones HTTP de Apache se cierre. Examine sus registros para ver si hay rastros de pilas de error. Revise también el código para ver los lugares en los que capta `Throwable` o `Error`, pero pasa por alto la salida que evita que aparezca el error. Si el código no muestra errores, vuelve a escribirlo para que se registre la información. La información registrada ayuda a determinar la causa raíz del error.
- Ha intentado utilizar el proveedor de credenciales del **DefaultCredentialsProvider#create()** después de que se cerró. `DefaultCredentialsProvider#create`devuelve una instancia singleton, por lo que si está cerrada y el código llama al método `resolveCredentials`, la excepción se generará una vez que caduquen las credenciales (o el token) en caché.

  Compruebe el código de los lugares donde `DefaultCredentialsProvider` esté cerrado, como se muestra en los siguientes ejemplos.

  - La instancia de singleton se cierra llamando a `DefaultCredentialsProvider#close()`.

```
DefaultCredentialsProvider defaultCredentialsProvider =
 DefaultCredentialsProvider.create(); // Singleton instance returned.
AwsCredentials credentials = defaultCredentialsProvider.resolveCredentials();

// Make calls to Servicios de AWS.

defaultCredentialsProvider.close();  // Explicit close.

// Make calls to Servicios de AWS.

// After the credentials expire, either of the following calls eventually results
 in a "Connection pool shut down" exception.
credentials = defaultCredentialsProvider.resolveCredentials();
// Or
```

```
credentials = DefaultCredentialsProvider.create().resolveCredentials();
```

- Invoca `DefaultCredentialsProvider#create()` en un try-with-resources bloque.

```
try (DefaultCredentialsProvider defaultCredentialsProvider =
 DefaultCredentialsProvider.create()) {
    AwsCredentials credentials = defaultCredentialsProvider.resolveCredentials();

    // Make calls to Servicios de AWS.

} // After the try-with-resources block exits, the singleton
 DefaultCredentialsProvider is closed.

// Make calls to Servicios de AWS.

DefaultCredentialsProvider defaultCredentialsProvider =
 DefaultCredentialsProvider.create(); // The closed singleton instance is returned.
// If the credentials (or token) has expired, the following call results in the
 error.
AwsCredentials credentials = defaultCredentialsProvider.resolveCredentials();
```

  Cree una nueva instancia que no sea singleton llamando a `DefaultCredentialsProvider.builder().build()` si el código ha cerrado la instancia de singleton y debe resolver las credenciales mediante un `DefaultCredentialsProvider`.

¿Cómo puedo corregir el error «No se pueden cargar las credenciales de ninguno de los proveedores de la cadena AwsCredentialsProviderChain»?

Este error indica que no ha AWS SDK for Java 2.x podido encontrar AWS credenciales válidas a través de ninguno de los proveedores de credenciales de la cadena de proveedores de credenciales predeterminada. El SDK busca automáticamente credenciales en un orden específico y este error se produce cuando todos los proveedores de la cadena no proporcionan credenciales válidas.

El mensaje de error completo suele tener este aspecto (se añaden finales de línea y sangrados para mejorar la legibilidad):

```
Unable to load credentials from any of the providers in the chain
 AwsCredentialsProviderChain(
    credentialsProviders=[
        SystemPropertyCredentialsProvider(),
```

```
       EnvironmentVariableCredentialsProvider(),
       WebIdentityTokenCredentialsProvider(),
       ProfileCredentialsProvider(profileName=default,
profileFile=ProfileFile(sections=[])),
       ContainerCredentialsProvider(),
       InstanceProfileCredentialsProvider()
   ]) : [
       SystemPropertyCredentialsProvider(): Unable to load credentials from system
settings.
       Access key must be specified either via environment variable
(AWS_ACCESS_KEY_ID)
       or system property (aws.accessKeyId).,

       EnvironmentVariableCredentialsProvider(): Unable to load credentials from
system settings.
       Access key must be specified either via environment variable
(AWS_ACCESS_KEY_ID)
       or system property (aws.accessKeyId).,

       WebIdentityTokenCredentialsProvider(): To use web identity tokens, the 'sts'
service module
       must be on the class path.,

       ProfileCredentialsProvider(profileName=default,
profileFile=ProfileFile(sections=[])):
       Profile file contained no credentials for profile 'default':
ProfileFile(sections=[]),

       ContainerCredentialsProvider(): Cannot fetch credentials from container -
neither
       AWS_CONTAINER_CREDENTIALS_FULL_URI or AWS_CONTAINER_CREDENTIALS_RELATIVE_URI
environment
       variables are set.,

       InstanceProfileCredentialsProvider(): Failed to load credentials from IMDS.]
```

Problemas y soluciones comunes

Revise la configuración de sus credenciales

Cuando utiliza el proveedor de credenciales predeterminado (llamando a `ServiceClient.create()` sin configurar credenciales de forma explícita), el SDK busca credenciales en un orden específico. Revise cómo funciona la cadena de proveedores

predeterminados de credenciales para comprender qué fuentes de credenciales comprueba el SDK y en qué orden.

Asegúrese de que el método de configuración de credenciales que desea utilizar esté configurado correctamente en su entorno:

Para instancias de Amazon EC2

- Compruebe el rol de IAM: compruebe que haya un rol de IAM asociado a la instancia.
- Fallos intermitentes del IMDS: si se producen fallos intermitentes (que suelen durar unos cientos de milisegundos), suele deberse a problemas transitorios de red que afectan al servicio de metadatos de instancias (IMDS).

  Soluciones:

  - Habilite el registro de depuración para analizar el tiempo y la frecuencia de los fallos
  - Considere la posibilidad de implementar lógica de reintento en la aplicación para errores relacionados con credenciales
  - Compruebe si hay problemas de conectividad de red entre la instancia y el punto de conexión del IMDS

Para entornos de contenedores

Confirme que los roles de tareas (Amazon ECS) o las cuentas de servicio (Amazon EKS) estén configuradas y que las variables de entorno necesarias estén configuradas.

Para desarrollo local

Compruebe que las variables de entorno, los archivos de credenciales o la configuración del Centro de identidades de IAM están definidos.

Para federación de identidades web

- Compruebe la configuración: compruebe que existe el archivo de token de identidad web y que están configuradas las variables de entorno necesarias.
- Falta la dependencia del módulo STS: si aparece el error `To use web identity tokens, the 'sts' service module must be on the class path`, debe agregar el módulo STS como dependencia. Esto es habitual cuando se utiliza Pod Identity de Amazon EKS u otra autenticación de token de identidad web.

Solución: añada el módulo STS a las dependencias de su proyecto:

- ```
  <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>sts</artifactId>
  </dependency>
  ```

  Para algunos servicios, es posible que también necesite la dependencia de `aws-query-protocol`:

  ```
  <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>aws-query-protocol</artifactId>
  </dependency>
  ```

Problemas de conectividad de red o de proxy

Si aparecen errores `Connection refused` en la cadena de proveedores de credenciales, suele deberse a problemas de conectividad de red cuando el SDK intenta llegar a los puntos de conexión de AWS .

Soluciones:

- Compruebe la configuración del proxy si utiliza un servidor proxy
- Compruebe que su red permita conexiones HTTPS salientes a los puntos finales AWS
- Habilite registro de depuración para ver los intentos de conexión detallados
- Pruebe la conectividad mediante herramientas como `curl` para verificar el acceso de red a los puntos de conexión de AWS

Reduzca el tiempo de inicio del SDK para AWS Lambda

Uno de los objetivos del AWS SDK for Java 2.x es reducir la latencia de inicio de las AWS Lambda funciones. El SDK contiene cambios que reducen el tiempo de startup, descritos al final de este tema.
  ```

En primer lugar, este tema se centra en los cambios que puede realizar para reducir los tiempos de arranque en frío. Esto incluye realizar cambios en la estructura de su código y en la configuración de los clientes del servicio.

Utilice un cliente HTTP AWS basado en CRT

Para trabajar con él AWS Lambda, recomendamos el `AwsCrtHttpClient`para escenarios sincrónicos y `AwsCrtAsyncHttpClient`asíncronos.

El tema the section called “Configurar clientes AWS HTTP basados en CRT” de esta guía describe las ventajas de usar los clientes de HTTP, cómo agregar la dependencia y cómo configurar su uso por los clientes de servicio.

Eliminar las dependencias del cliente HTTP no utilizadas

Además del uso explícito de un cliente AWS basado en CRT, puedes eliminar otros clientes HTTP que el SDK incluye de forma predeterminada. El tiempo de startup de Lambda se reduce cuando se necesita cargar menos librerías, por lo que debería eliminar cualquier artefacto no utilizado que la JVM necesite cargar.

El siguiente fragmento de código de un archivo `pom.xml` Maven muestra la exclusión del cliente HTTP basado en Apache y el cliente HTTP basado en Netty. (Estos clientes no son necesarios cuando se utiliza un cliente basado en AWS CRT). En este ejemplo, se excluyen los artefactos del cliente HTTP de la dependencia del cliente S3 y se agrega el `aws-crt-client` artefacto para permitir el acceso a los AWS clientes HTTP basados en CRT.

```
<project>
    <properties>
        <aws.java.sdk.version>2.27.21</aws.java.sdk.version>
    <properties>
    <dependencyManagement>
        <dependencies>
            <dependency>
                <groupId>software.amazon.awssdk</groupId>
                <artifactId>bom</artifactId>
                <version>${aws.java.sdk.version}</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
        </dependencies>
    </dependencyManagement>
```

```
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>aws-crt-client</artifactId>
        </dependency>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>s3</artifactId>
            <exclusions>
                <exclusion>
                    <groupId>software.amazon.awssdk</groupId>
                    <artifactId>netty-nio-client</artifactId>
                </exclusion>
                <exclusion>
                    <groupId>software.amazon.awssdk</groupId>
                    <artifactId>apache-client</artifactId>
                </exclusion>
            </exclusions>
        </dependency>
    </dependencies>
</project>
```

> **Note**
>
> Añada el elemento `<exclusions>` a todas las dependencias del cliente de servicio del archivo `pom.xml`.

Configurar los clientes de servicio para abreviar las búsquedas

Especificar una región

Cuando cree un cliente de servicio, llame al método `region` en el generador del cliente de servicio. Esto reduce el proceso de búsqueda de regiones predeterminado del SDK, que busca la información en varios lugares. Región de AWS

Para mantener el código Lambda independiente de la región, utilice el siguiente código dentro del método `region`. Este código accede a la variable de entorno `AWS_REGION` establecida por el contenedor Lambda.

```
Region.of(System.getenv(SdkSystemSetting.AWS_REGION.environmentVariable()))
```

Utilizar `EnvironmentVariableCredentialProvider`

Al igual que el comportamiento de búsqueda predeterminado para la información de la Región, el SDK busca las credenciales en varios lugares. Si especifica el `EnvironmentVariableCredentialProvider` al generar un cliente de servicio, ahorrará tiempo en el proceso de búsqueda de credenciales del SDK.

> **Note**
>
> El uso de este proveedor de credenciales permite que el código se utilice en Lambda funciones, pero es posible que no funcione en Amazon EC2 otros sistemas.
> Si piensa utilizar Lambda SnapStart para Java en algún momento, debe confiar en la cadena de proveedores de credenciales predeterminada para buscar las credenciales. Si lo especifica`EnvironmentVariableCredentialsProvider`, la búsqueda inicial de credenciales funciona, pero cuando SnapStart se activa, el motor de ejecución de Java establece las variables de entorno de las credenciales del contenedor. Tras la activación, las variables de entorno utilizadas por `EnvironmentVariableCredentialsProvider` (variables de entorno clave de acceso) no están disponibles en el SDK de Java.

El siguiente fragmento de código muestra un cliente de servicio S3 configurado adecuadamente para su uso en un entorno Lambda.

```
S3Client s3Client = S3Client.builder()

 .region(Region.of(System.getenv(SdkSystemSetting.AWS_REGION.environmentVariable())))
    .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
    .httpClient(AwsCrtHttpClient.builder().build())
    .build();
```

Inicializar el cliente de SDK fuera del controlador de la función de Lambda

Recomendamos inicializar un cliente SDK fuera del método del controlador Lambda. De esta forma, si se reutiliza el contexto de ejecución, se puede omitir la inicialización del cliente de servicio. Al reutilizar la instancia del cliente y sus conexiones, las invocaciones posteriores al método controlador se producen más rápidamente.

En el siguiente ejemplo, la instancia `S3Client` se inicializa en el generador mediante un método de fábrica estático. Si se reutiliza el contenedor que administra el entorno Lambda, se reutiliza la instancia `S3Client` inicializada.

```
public class App implements RequestHandler<Object, Object> {
    private final S3Client s3Client;

    public App() {
        s3Client = DependencyFactory.s3Client();
    }

    @Override
    public Object handle Request(final Object input, final Context context) {
         ListBucketResponse response = s3Client.listBuckets();
         // Process the response.
    }
}
```

Minimizar la inyección de dependencias

Los marcos de inyección de dependencias (DI) pueden tardar más tiempo en completar el proceso de configuración. También es posible que requieran dependencias adicionales, que tardan un tiempo en cargarse.

Si se necesita un marco de DI, recomendamos usar marcos DI livianos como Dagger.

Utilice una segmentación por arquetipo de Maven AWS Lambda

El equipo del SDK de AWS Java ha desarrollado una plantilla Maven Archetype para arrancar un proyecto Lambda con un tiempo de inicio mínimo. Puede crear un proyecto de Maven a partir del arquetipo y saber que las dependencias están configuradas adecuadamente para el entorno de Lambda.

Para obtener más información sobre el arquetipo y trabajar con un ejemplo de implementación, consulte esta entrada del blog.

Considere Lambda SnapStart para Java

Si sus requisitos de tiempo de ejecución son compatibles, AWS ofrece Lambda SnapStart para Java. Lambda SnapStart es una solución basada en infraestructura que mejora el rendimiento inicial de las funciones de Java. Al publicar una nueva versión de una función, Lambda la SnapStart

inicializa y toma una instantánea cifrada e inmutable del estado de la memoria y del disco. SnapStart a continuación, guarda en caché la instantánea para volver a utilizarla.

Cambios en la versión 2.x que afectan al tiempo de startup

Además de los cambios que haga en su código, la versión 2.x del SDK para Java incluye tres cambios principales que reducen el tiempo de startup:

- Uso de jackson-jr, una biblioteca de serialización que mejora el tiempo de inicialización.
- Uso de las bibliotecas java.time para los objetos de fecha y hora, parte del JDK.
- Uso de Slf4j para una fachada de registro.

Recursos adicionales

La Guía para AWS Lambda desarrolladores contiene una sección sobre las mejores prácticas para desarrollar funciones de Lambda que no es específica de Java.

Para ver un ejemplo de cómo crear una aplicación nativa de la nube en Java que utilice Java AWS Lambda, consulte el contenido de este taller. En el taller se trata la optimización del rendimiento y otras buenas prácticas.

Puede considerar la posibilidad de utilizar imágenes estáticas que se compilen con antelación para reducir la latencia de startup. Por ejemplo, puede usar el SDK para Java 2.x y Maven para generar una imagen nativa de GraalVM.

Implemente **`ContentStreamProvider`** en el AWS SDK for Java 2.x

`ContentStreamProvider`es una abstracción utilizada en el AWS SDK for Java 2.x para permitir múltiples lecturas de los datos de entrada. En este tema se explica cómo implementar un `ContentStreamProvider` correctamente para las aplicaciones.

El SDK para Java 2.x usa el método `ContentStreamProvider#newStream()` cada vez que necesita leer un flujo completo. Para que esto funcione en todo el flujo, el flujo devuelto debe estar siempre al principio del contenido y debe contener los mismos datos.

En las secciones siguientes, proporcionaremos tres métodos para implementar correctamente este comportamiento.

Utilice `mark()` y `reset()`

En el siguiente ejemplo, utilizamos `mark(int)` en el constructor antes de que comience la lectura para asegurarnos de que podemos restablecer el flujo al principio. Para cada invocación de `newStream()`, restablecemos el flujo:

```
public class MyContentStreamProvider implements ContentStreamProvider {
    private InputStream contentStream;

    public MyContentStreamProvider(InputStream contentStream) {
        this.contentStream = contentStream;
        this.contentStream.mark(MAX_LEN);
    }

    @Override
    public InputStream newStream() {
        contentStream.reset();
        return contentStream;
    }
}
```

Uso de almacenamiento en búfer si `mark()` y `reset()` no están disponibles

Si el flujo no es compatible con `mark()` y `reset()` directamente, puede seguir usando la solución que se mostró anteriormente envolviendo primero el flujo en un `BufferedInputStream`:

```
public class MyContentStreamProvider implements ContentStreamProvider {
    private BufferedReader contentStream;

    public MyContentStreamProvider(InputStream contentStream) {
        this.contentStream = new BufferedInputStream(contentStream);
        this.contentStream.mark(MAX_LEN);
    }

    @Override
    public InputStream newStream() {
        contentStream.reset();
        return contentStream;
    }
}
```

Creación de nuevos flujos

Un método más sencillo consiste simplemente en obtener un nuevo flujo para los datos en cada invocación y cerrar el anterior:

```
public class MyContentStreamProvider implements ContentStreamProvider {
    private InputStream contentStream;

    @Override
    public InputStream newStream() {
        if (contentStream != null) {
            contentStream.close();
        }
        contentStream = openStream();
        return contentStream;
    }
}
```

Configurar el TTL de JVM para las búsquedas de nombres DNS

La máquina virtual de Java (JVM) almacena en caché las búsquedas de nombres DNS. Cuando la JVM resuelve un nombre de host en una dirección IP, almacena en caché la dirección IP durante un periodo de tiempo especificado, conocido como tiempo de vida (TTL).

Como los recursos de AWS utilizan entradas de nombres de DNS que cambian de vez en cuando, recomendamos que configure su JVM con un valor de TTL de 5 segundos. Con esto se asegurará de que cuando cambie la dirección IP de un recurso, su aplicación pueda recibir y utilizar la nueva dirección IP del recurso volviendo a consultar el DNS.

En algunas configuraciones de Java, el TTL predeterminado de JVM está establecido de forma que nunca se actualicen las entradas DNS hasta que se reinicie la JVM. Por lo tanto, si la dirección IP de un recurso de AWS cambia mientras la aplicación sigue ejecutándose, no podrá utilizar dicho recurso hasta que reinicie manualmente la JVM y se actualice la información de la dirección IP almacenada en caché. En este caso, es fundamental establecer el TTL de la JVM de forma que actualice periódicamente la información de las direcciones IP almacenada en caché.

Cómo configurar el TTL de JVM

Para modificar el TTL de la JVM, defina el valor de la propiedad de seguridad networkaddress.cache.ttl y establezca la propiedad `networkaddress.cache.ttl` en el archivo

`$JAVA_HOME/jre/lib/security/java.security` para Java 8 o en el archivo `$JAVA_HOME/conf/security/java.security` para Java 11 o superior.

A continuación se ofrece muestra un fragmento de archivo `java.security` que muestra la caché de TTL configurada en 5 segundos.

```
#
# This is the "master security properties file".
#
# An alternate java.security properties file may be specified
...
# The Java-level namelookup cache policy for successful lookups:
#
# any negative value: caching forever
# any positive value: the number of seconds to cache an address for
# zero: do not cache
...
networkaddress.cache.ttl=5
...
```

Todas las aplicaciones que se ejecutan en la JVM representada por la variable de entorno `$JAVA_HOME` utilizan esta configuración.

Trabajar con HTTP/2 en el AWS SDK para Java

HTTP/2 es una revisión importante del protocolo HTTP. Esta nueva versión tiene varias mejoras para optimizar el rendimiento:

- La codificación de datos binarios permite una transferencia de datos más eficiente.
- La compresión de encabezado reduce la sobrecarga de bytes descargados por el cliente, lo que ayuda a que el cliente obtenga el contenido antes. Esto resulta especialmente útil para los clientes móviles que ya tienen un ancho de banda limitado.
- La comunicación asíncrona bidireccional (multiplexado) permite que varias solicitudes y mensajes de respuesta entre el cliente y AWS estén en tránsito al mismo tiempo en una única conexión, en vez de necesitar varias conexiones, lo que mejora el rendimiento.

Los desarrolladores que actualizan a los SDK más recientes utilizarán automáticamente HTTP/2 cuando sea compatible con el servicio con el que estén trabajando. Las nuevas interfaces de

programación aprovechan fácilmente las características de HTTP/2 y proporcionan nuevas formas de crear aplicaciones.

El AWS SDK para Java 2.x incluye nuevas API para streaming de eventos que implementan el protocolo HTTP/2. Para ver ejemplos de cómo usar estas nuevas API, consulte Trabajar con Kinesis.

Llamada a Servicios de AWS desde AWS SDK for Java 2.x

Esta sección ofrece breves tutoriales y orientación sobre cómo trabajar con algunos Servicios de AWS. Para ver un conjunto completo de ejemplos, consulte la sección Ejemplos de código.

Temas

- Trabaja con CloudWatch
- Servicios de base de datos de AWS y AWS SDK for Java 2.x
- Trabaja con DynamoDB
- Trabajar con de Amazon EC2
- Trabaja con IAM
- Trabajar con de Kinesis
- Invocar, enumerar y eliminar funciones AWS Lambda
- Trabajo con Amazon S3
- Trabajar con de Amazon Simple Notification Service
- Trabajar con de Amazon Simple Queue Service
- Trabaja con Amazon Transcribe

Trabaja con CloudWatch

En esta sección se proporcionan ejemplos de programación de Amazon CloudWatch mediante la versión AWS SDK para Java 2.x.

Amazon CloudWatch monitorea tus recursos Amazon Web Services (AWS) y las aplicaciones en las que ejecutas AWS en tiempo real. Puede utilizarlas CloudWatch para recopilar y realizar un seguimiento de las métricas, que son variables que puede medir para sus recursos y aplicaciones. CloudWatch las alarmas envían notificaciones o modifican automáticamente los recursos que está supervisando en función de las reglas que usted defina.

Los siguientes ejemplos incluyen únicamente el código necesario para demostrar cada técnica. El código de ejemplo completo está disponible en GitHub. Desde allí, puede descargar un único archivo de código fuente o clonar el repositorio localmente para obtener todos los ejemplos para compilarlos y ejecutarlos.

Temas

- Obtenga métricas de CloudWatch
- Publica datos de métricas personalizadas en CloudWatch
- Trabaja con CloudWatch alarmas
- Usa Amazon CloudWatch Events

Obtenga métricas de CloudWatch

Mostrar métricas

Para enumerar CloudWatch las métricas, crea un `listMetrics` método ListMetricsRequesty CloudWatchClient llama al. Puede utilizar el objeto `ListMetricsRequest` para filtrar las métricas devueltas por espacio de nombres, nombre de métrica o dimensiones.

> **Note**
>
> Puedes encontrar una lista de métricas y dimensiones publicadas por AWS servicios en la referencia de Amazon CloudWatch métricas y dimensiones de la Guía del Amazon CloudWatch usuario.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatch.model.ListMetricsRequest;
import software.amazon.awssdk.services.cloudwatch.model.ListMetricsResponse;
import software.amazon.awssdk.services.cloudwatch.model.Metric;
```

Código

```
    public static void listMets( CloudWatchClient cw, String namespace) {

        boolean done = false;
        String nextToken = null;

        try {
            while(!done) {
```

```
                ListMetricsResponse response;

                if (nextToken == null) {
                   ListMetricsRequest request = ListMetricsRequest.builder()
                         .namespace(namespace)
                         .build();

                 response = cw.listMetrics(request);
                } else {
                  ListMetricsRequest request = ListMetricsRequest.builder()
                         .namespace(namespace)
                         .nextToken(nextToken)
                         .build();

                response = cw.listMetrics(request);
            }

            for (Metric metric : response.metrics()) {
                System.out.printf(
                        "Retrieved metric %s", metric.metricName());
                System.out.println();
            }

            if(response.nextToken() == null) {
                done = true;
            } else {
                nextToken = response.nextToken();
            }
        }

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Las métricas se devuelven en forma de ListMetricsResponsellamando a su `getMetrics` método.

Los resultados puede que estén paginados. Para recuperar el siguiente lote de resultados, llame a `nextToken` en el objeto de respuesta y use el valor de token para crear un nuevo objeto de solicitud. Llame entonces al método `listMetrics` de nuevo con la nueva solicitud.

Consulta el ejemplo completo en GitHub.

Más información

- ListMetricsen la referencia Amazon CloudWatch de la API

Publica datos de métricas personalizadas en CloudWatch

Varios AWS servicios publican sus propias métricas en espacios de nombres que comienzan por «AWS». También puedes publicar datos de métricas personalizados con tu propio espacio de nombres (siempre y cuando no comience por «»). AWS

Publicar datos de métricas personalizadas

Para publicar tus propios datos de métricas, llama al método CloudWatchClient's con unputMetricData. PutMetricDataRequest PutMetricDataRequestDebe incluir el espacio de nombres personalizado que se utilizará para los datos e información sobre el propio punto de datos de un MetricDatumobjeto.

> **Note**
>
> No puede especificar un espacio de nombres que comience por "AWS". Los espacios de nombres que comienzan por «AWS» están reservados para su uso por parte de los productos. Amazon Web Services

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.Dimension;
import software.amazon.awssdk.services.cloudwatch.model.MetricDatum;
import software.amazon.awssdk.services.cloudwatch.model.StandardUnit;
import software.amazon.awssdk.services.cloudwatch.model.PutMetricDataRequest;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import java.time.Instant;
import java.time.ZoneOffset;
import java.time.ZonedDateTime;
import java.time.format.DateTimeFormatter;
```

Código

```
    public static void putMetData(CloudWatchClient cw, Double dataPoint ) {

        try {
            Dimension dimension = Dimension.builder()
                    .name("UNIQUE_PAGES")
                    .value("URLS")
                    .build();

            // Set an Instant object
            String time =
ZonedDateTime.now( ZoneOffset.UTC ).format( DateTimeFormatter.ISO_INSTANT );
            Instant instant = Instant.parse(time);

            MetricDatum datum = MetricDatum.builder()
                .metricName("PAGES_VISITED")
                .unit(StandardUnit.NONE)
                .value(dataPoint)
                .timestamp(instant)
                .dimensions(dimension).build();

            PutMetricDataRequest request = PutMetricDataRequest.builder()
                .namespace("SITE/TRAFFIC")
                .metricData(datum).build();

            cw.putMetricData(request);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.printf("Successfully put data point %f", dataPoint);
    }
```

Consulte el ejemplo completo en. GitHub

Más información

- Utilice Amazon CloudWatch las métricas en la guía Amazon CloudWatch del usuario.
- AWS Los espacios de nombres en la guía del Amazon CloudWatch usuario.
- PutMetricDataen la referencia de la Amazon CloudWatch API.

Trabaja con CloudWatch alarmas

Crear una alarma

Para crear una alarma basada en una CloudWatch métrica, llama al CloudWatchClient `putMetricAlarm` método s y PutMetricAlarmRequestrellena con las condiciones de la alarma.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.Dimension;
import software.amazon.awssdk.services.cloudwatch.model.PutMetricAlarmRequest;
import software.amazon.awssdk.services.cloudwatch.model.ComparisonOperator;
import software.amazon.awssdk.services.cloudwatch.model.Statistic;
import software.amazon.awssdk.services.cloudwatch.model.StandardUnit;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
```

Código

```
   public static void putMetricAlarm(CloudWatchClient cw, String alarmName, String
instanceId) {

       try {
           Dimension dimension = Dimension.builder()
               .name("InstanceId")
               .value(instanceId).build();

           PutMetricAlarmRequest request = PutMetricAlarmRequest.builder()
               .alarmName(alarmName)
               .comparisonOperator(
                       ComparisonOperator.GREATER_THAN_THRESHOLD)
               .evaluationPeriods(1)
               .metricName("CPUUtilization")
               .namespace("AWS/EC2")
               .period(60)
               .statistic(Statistic.AVERAGE)
               .threshold(70.0)
               .actionsEnabled(false)
               .alarmDescription(
                       "Alarm when server CPU utilization exceeds 70%")
               .unit(StandardUnit.SECONDS)
               .dimensions(dimension)
```

```
                .build();

            cw.putMetricAlarm(request);
            System.out.printf(
                    "Successfully created alarm with name %s", alarmName);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulta el ejemplo completo en GitHub.

Mostrar alarmas

Para ver una lista de las CloudWatch alarmas que ha creado, llame al CloudWatchClient `describeAlarms` método s con un DescribeAlarmsRequestque pueda usar para configurar las opciones del resultado.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatch.model.DescribeAlarmsRequest;
import software.amazon.awssdk.services.cloudwatch.model.DescribeAlarmsResponse;
import software.amazon.awssdk.services.cloudwatch.model.MetricAlarm;
```

Código

```
    public static void desCWAlarms( CloudWatchClient cw) {

        try {

            boolean done = false;
            String newToken = null;

            while(!done) {
                DescribeAlarmsResponse response;

                if (newToken == null) {
```

```
                    DescribeAlarmsRequest request =
DescribeAlarmsRequest.builder().build();
                    response = cw.describeAlarms(request);
                } else {
                    DescribeAlarmsRequest request = DescribeAlarmsRequest.builder()
                        .nextToken(newToken)
                        .build();
                    response = cw.describeAlarms(request);
                }

                for(MetricAlarm alarm : response.metricAlarms()) {
                    System.out.printf("\n Retrieved alarm %s", alarm.alarmName());
                }

                if(response.nextToken() == null) {
                    done = true;
                } else {
                    newToken = response.nextToken();
                }
            }

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.printf("Done");
    }
```

La lista de alarmas se puede obtener llamando `MetricAlarms` DescribeAlarmsResponseal devuelto por`describeAlarms`.

Los resultados puede que estén paginados. Para recuperar el siguiente lote de resultados, llame a `nextToken` en el objeto de respuesta y use el valor de token para crear un nuevo objeto de solicitud. Llame entonces al método `describeAlarms` de nuevo con la nueva solicitud.

> **Note**
>
> También puede recuperar las alarmas de una métrica específica mediante CloudWatchClient el `describeAlarmsForMetric` método. Su uso es similar a `describeAlarms`.

Consulte el ejemplo completo en GitHub.

Eliminación de alarmas

Para eliminar CloudWatch las alarmas, llame al CloudWatchClient `deleteAlarms` método DeleteAlarmsRequestque contenga uno o más nombres de las alarmas que desee eliminar.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatch.model.DeleteAlarmsRequest;
```

Código

```
    public static void deleteCWAlarm(CloudWatchClient cw, String alarmName) {

        try {
            DeleteAlarmsRequest request = DeleteAlarmsRequest.builder()
                    .alarmNames(alarmName)
                    .build();

            cw.deleteAlarms(request);
            System.out.printf("Successfully deleted alarm %s", alarmName);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulta el ejemplo completo en GitHub.

Más información

- Uso de Amazon CloudWatch alarmas en la Guía Amazon CloudWatch del usuario
- PutMetricAlarmen la referencia Amazon CloudWatch de la API
- DescribeAlarmsen la referencia Amazon CloudWatch de la API
- DeleteAlarmsen la referencia Amazon CloudWatch de la API

Usa Amazon CloudWatch Events

CloudWatch Los eventos ofrecen un flujo casi en tiempo real de los eventos del sistema que describen los cambios en AWS los recursos en las Amazon EC2 instancias, Lambda las funciones, los Kinesis flujos, Amazon ECS las tareas, las máquinas de Step Functions estado, Amazon SNS los temas, Amazon SQS las colas o los objetivos integrados. Mediante reglas sencillas, puede asignar los eventos y dirigirlos a una o más secuencias o funciones de destino.

Amazon EventBridge es la evolución de los CloudWatch eventos. Ambos servicios utilizan la misma API, por lo que puedes seguir utilizando el cliente de CloudWatch Events que proporciona el SDK o migrar al SDK del EventBridge cliente de Java para disfrutar de la funcionalidad de CloudWatch Events. CloudWatch La documentación de la guía del usuario de Events y la referencia sobre la API ya están disponibles en los sitios de EventBridge documentación.

Agregar eventos

Para añadir CloudWatch eventos personalizados, llama al `CloudWatchEventsClient's` `putEvents` método con un `PutEventsRequest`objeto que contenga uno o más `PutEventsRequestEntry`objetos que proporcionen detalles sobre cada evento. Puede especificar varios parámetros para la entrada como el origen y el tipo del evento, los recursos asociados con el evento, etc.

> **Note**
>
> Puede especificar un máximo de 10 eventos para cada llamada a `putEvents`.

Importaciones

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient;
import software.amazon.awssdk.services.cloudwatchevents.model.PutEventsRequest;
import software.amazon.awssdk.services.cloudwatchevents.model.PutEventsRequestEntry;
```

Código

```
    public static void putCWEvents(CloudWatchEventsClient cwe, String resourceArn ) {

        try {
```

```
            final String EVENT_DETAILS =
                "{ \"key1\": \"value1\", \"key2\": \"value2\" }";

            PutEventsRequestEntry requestEntry = PutEventsRequestEntry.builder()
                    .detail(EVENT_DETAILS)
                    .detailType("sampleSubmitted")
                    .resources(resourceArn)
                    .source("aws-sdk-java-cloudwatch-example")
                    .build();

            PutEventsRequest request = PutEventsRequest.builder()
                    .entries(requestEntry)
                    .build();

            cwe.putEvents(request);
            System.out.println("Successfully put CloudWatch event");

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Cómo añadir reglas

Para crear o actualizar una regla, llame al `CloudWatchEventsClient's putRule` método con una `PutRuleRequest`con el nombre de la regla y parámetros opcionales, como el patrón de eventos, el IAM rol que se va a asociar a la regla y una expresión de programación que describa la frecuencia con la que se ejecuta la regla.

Importaciones

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient;
import software.amazon.awssdk.services.cloudwatchevents.model.PutRuleRequest;
import software.amazon.awssdk.services.cloudwatchevents.model.PutRuleResponse;
import software.amazon.awssdk.services.cloudwatchevents.model.RuleState;
```

Código

```
   public static void putCWRule(CloudWatchEventsClient cwe, String ruleName, String
roleArn) {

       try {
           PutRuleRequest request = PutRuleRequest.builder()
               .name(ruleName)
               .roleArn(roleArn)
               .scheduleExpression("rate(5 minutes)")
               .state(RuleState.ENABLED)
               .build();

           PutRuleResponse response = cwe.putRule(request);
           System.out.printf(
                   "Successfully created CloudWatch events rule %s with arn %s",
                   roleArn, response.ruleArn());
       } catch (
           CloudWatchException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

Consulte el ejemplo completo en GitHub.

Agregar destinos

Los destinos son los recursos que se invocan cuando se activa una regla. Los objetivos de ejemplo incluyen Amazon EC2 instancias, Lambda funciones, Kinesis flujos, Amazon ECS tareas, máquinas de Step Functions estado y objetivos integrados.

Para añadir un destino a una regla, llame al método `putTargets` de `CloudWatchEventsClient's` con un objeto `PutTargetsRequest` que contenga la regla que se va a actualizar y la lista de destinos que se van a añadir a la regla.

Importaciones

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient;
import software.amazon.awssdk.services.cloudwatchevents.model.PutTargetsRequest;
import software.amazon.awssdk.services.cloudwatchevents.model.PutTargetsResponse;
import software.amazon.awssdk.services.cloudwatchevents.model.Target;
```

Código

```
   public static void putCWTargets(CloudWatchEventsClient cwe, String ruleName, String
functionArn, String targetId ) {

       try {
           Target target = Target.builder()
               .arn(functionArn)
               .id(targetId)
               .build();

           PutTargetsRequest request = PutTargetsRequest.builder()
               .targets(target)
               .rule(ruleName)
               .build();

           PutTargetsResponse response = cwe.putTargets(request);
           System.out.printf(
               "Successfully created CloudWatch events target for rule %s",
               ruleName);
       } catch (CloudWatchException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

Consulte el ejemplo completo en GitHub.

Más información

- Añadir eventos PutEvents en la Guía del EventBridge usuario de Amazon
- Programe expresiones para reglas en la Guía del EventBridge usuario de Amazon
- Tipos de eventos para CloudWatch Events la Guía del EventBridge usuario de Amazon
- Patrones de eventos en la guía del EventBridge usuario de Amazon
- PutEventsen la referencia de la EventBridge API de Amazon
- PutTargetsen la referencia de la EventBridge API de Amazon
- PutRuleen la referencia de la EventBridge API de Amazon

Servicios de base de datos de AWS y AWS SDK for Java 2.x

AWS ofrece varios tipos de bases de datos: relacionales, clave-valor, en memoria, de documentos y otras. La compatibilidad con el SDK para Java 2.x varía según la naturaleza del servicio de base de datos en AWS.

Algunos servicios de bases de datos, como Amazon DynamoDB, tienen API de servicios web para administrar el recurso de AWS (base de datos), así como API de servicios web para interactuar con los datos. En el SDK para Java 2.x, estos tipos de servicios tienen clientes de servicio dedicados, por ejemplo DynamoDBClient.

Otros servicios de bases de datos tienen API de servicios web que interactúan con el recurso, como la API Amazon DocumentDB (para la administración de clústeres, instancias y recursos), pero no tienen una API de servicio web para trabajar con los datos. El SDK para Java 2.x tiene la interfaz DocDBClient correspondiente para trabajar con el recurso. Sin embargo, necesita otra API de Java, como MongoDB para Java para trabajar con los datos.

Utilice los ejemplos siguientes para aprender cómo utilizar los clientes de servicio SDK para Java 2.x con los distintos tipos de bases de datos.

Ejemplos de Amazon DynamoDB

Trabajo con los datos	Trabajo con la base de datos
SDK service client: DynamoDbClient Example: Aplicación REST React/Spring con DynamoDB Examples: Varios ejemplos de DynamoDB	SDK service client: DynamoDbClient Examples: CreateTable, ListTables, DeleteTable
SDK service client: DynamoDbEnhancedClient Example: Aplicación REST React/Spring con DynamoDB Examples: Varios ejemplos de DynamoDB (names starting with 'Enhanced")	

Consulte otros ejemplos de DynamoDB en la sección de ejemplos de código guiados de esta guía.

Ejemplos de Amazon RDS

Trabajo con los datos	Trabajo con la base de datos
API ajena al SDK: JDBC, tipo SQL específico de la base de datos; el código administra las conexiones de la base de datos o un grupo de conexiones.	Cliente de servicio del SDK: RdsClient
Ejemplo: aplicación REST de React/Spring con MySQL	Ejemplos: varios ejemplos de RdsClient

Ejemplos de Amazon Redshift

Trabajo con los datos	Trabajo con la base de datos
Cliente de servicio SDK: RedshiftDataClient	Cliente de servicio SDK: RedshiftClient
Ejemplos: varios ejemplos de RedshiftDataClient	Ejemplos: varios ejemplos de RedShiftClient
Ejemplo: aplicación REST de React/Spring con RedshiftDataClient	

Ejemplos de Amazon Aurora sin servidor v2

Trabajo con los datos	Trabajo con la base de datos
Cliente de servicio SDK: RdsDataClient	Cliente de servicio del SDK: RdsClient
Ejemplo: aplicación REST de React/Spring con RdsDataClient	Ejemplos: varios ejemplos de RdsClient

Ejemplos de Amazon DocumentDB

Trabajo con los datos	Trabajo con la base de datos
API que no pertenece al SDK: biblioteca Java específica de MongoDB (por ejemplo, MongoDB para Java); su código administra las conexiones de bases de datos o un grupo de conexiones.	Cliente de servicio SDK: DocDBClient
Ejemplos: Guía del desarrollador de DocumentDB (Mongo) (seleccione la pestaña «Java»)	

Trabaja con DynamoDB

DynamoDB es un servicio de bases de datos NoSQL totalmente administrado que proporciona un rendimiento rápido y predecible, así como una perfecta escalabilidad. En esta sección se muestra cómo trabajar con DynamoDB mediante la versión AWS SDK para Java 2.x.

Selección de un cliente de DynamoDB

El SDK ofrece dos métodos principales para trabajar con DynamoDB:

Cliente de bajo nivel (`DynamoDbClient`)

> Proporciona acceso directo a las operaciones de DynamoDB con control total sobre las solicitudes y las respuestas. Utilice este cliente cuando necesite un control detallado o trabaje con esquemas dinámicos.

Cliente mejorado (`DynamoDbEnhancedClient`)

> Ofrece programación orientada a objetos con asignación automática entre objetos de Java y elementos de DynamoDB. También proporciona funciones orientadas a documentos para trabajar con datos tipo JSON que no siguen un esquema fijo. Utilice este cliente cuando trabaje con modelos de datos bien definidos o datos de tipo documento.

Configuración de clientes de DynamoDB

Antes de trabajar con DynamoDB, configure el cliente para obtener un rendimiento y una fiabilidad óptimos.

Descripción del comportamiento de reintento de DynamoDB

Los clientes de DynamoDB utilizan un número máximo de reintentos predeterminado de 8, que es mayor que el de otros clientes de Servicio de AWS . Este mayor número de reintentos ayuda a administrar la naturaleza distribuida y las limitaciones temporales de capacidad de DynamoDB. Para obtener más información sobre estrategias de reintento, consulte the section called “Reintentos”.

Optimización del rendimiento con puntos de conexión basados en cuentas

DynamoDB AWS ofrece puntos de enlace basados en cuentas que mejoran el rendimiento mediante el uso de AWS su ID de cuenta para agilizar el enrutamiento de solicitudes.

Para utilizar esta característica, debe utilizar la versión 2.28.4 o superior de AWS SDK for Java 2.x. Encontrará la versión más reciente en el Repositorio central de Maven. Las versiones del SDK compatibles utilizan automáticamente los nuevos puntos de conexión.

Para excluir el enrutamiento basado en cuentas, elija una de estas opciones:

- Configure un cliente de servicio de DynamoDB con `AccountIdEndpointMode` establecido en `DISABLED`.
- Establezca una variable de entorno.
- Establezca una propiedad del sistema JVM.
- Actualice la configuración del archivo de configuración compartido. AWS

El siguiente ejemplo muestra cómo deshabilitar el enrutamiento basado en cuentas mediante la configuración de un cliente de servicio de DynamoDB:

```
DynamoDbClient.builder()
                .accountIdEndpointMode(AccountIdEndpointMode.DISABLED)
                .build();
```

Para obtener más información sobre las demás opciones de configuración, consulte los puntos finales basados en cuentas en la Guía de referencia de herramientas AWS SDKs y herramientas.

Qué se aborda en este tema

En las secciones siguientes se muestra cómo se trabaja con DynamoDB:

- the section called “Trabajar con tablas en DynamoDB”: crear, describir, actualizar y eliminar tablas
- the section called “Trabaja con elementos en DynamoDB”: añadir, recuperar y actualizar elementos individuales
- the section called “ Asignar objetos a elementos de DynamoDB”: utilizar la asignación de objetos y datos orientados a documentos con el Cliente mejorado

Para ver más ejemplos de código de DynamoDB, consulte Ejemplos de código de DynamoDB en la biblioteca de ejemplos de código. AWS

Trabajar con tablas en DynamoDB

Las tablas son los contenedores de todos los elementos de una base de datos de DynamoDB. Para poder añadir o eliminar datos de DynamoDB, debe crear una tabla.

Para cada tabla, debe definir:

- Un nombre de tabla que sea único para su cuenta y región.
- Una clave principal para la que cada valor debe ser único; no puede haber dos elementos de la tabla que tengan el mismo valor de clave principal.

  Una clave principal puede ser simple, formada por una sola clave de partición (HASH) o compuesta, formada por una clave de partición y una clave de ordenación (RANGE).

  Cada valor de clave tiene un tipo de datos asociado, enumerado por la clase `ScalarAttributeType`. El valor de clave puede ser binario (B), numérico (N) o una cadena (S). Para obtener más información, consulte Reglas de nomenclatura y tipos de datos en la Guía para desarrolladores de Amazon DynamoDB.
- El desempeño aprovisionado son valores que definen el número de unidades de capacidad de lectura/escritura reservadas para la tabla.

> **Note**
>
> Los precios de Amazon DynamoDB se basan en los valores de desempeño aprovisionado que puede definir en sus tablas para que solo se reserve la capacidad que piensa que va a necesitar para la tabla.

El desempeño aprovisionado para una tabla se puede modificar en cualquier momento, por lo que puede ajustar la capacidad cuando cambien sus necesidades.

Creación de una tabla

Use el método `createTable` de `DynamoDbClient's` para crear una nueva tabla de DynamoDB. Debe crear los atributos de la tabla y un esquema de tabla, que se pueden usar para identificar la clave principal de la tabla. También debe proporcionar los valores iniciales de desempeño aprovisionado y el nombre de una tabla.

> **Note**
>
> Si ya existe una tabla con el nombre elegido, se producirá una `DynamoDbException`.

Crear una tabla con una clave principal simple

Este código crea una tabla con un atributo que es la clave principal simple de la tabla. El ejemplo utiliza los objetos `AttributeDefinition` y `KeySchemaElement` y para la `CreateTableRequest`.

Importaciones

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.CreateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;
import software.amazon.awssdk.services.dynamodb.model.KeySchemaElement;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughput;
```

```
import software.amazon.awssdk.services.dynamodb.model.KeyType;
import software.amazon.awssdk.services.dynamodb.model.CreateTableResponse;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableRequest;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableResponse;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.waiters.DynamoDbWaiter;
```

Código de

```
    public static String createTable(DynamoDbClient ddb, String tableName, String key)
{

        DynamoDbWaiter dbWaiter = ddb.waiter();
        CreateTableRequest request = CreateTableRequest.builder()
                .attributeDefinitions(AttributeDefinition.builder()
                        .attributeName(key)
                        .attributeType(ScalarAttributeType.S)
                        .build())
                .keySchema(KeySchemaElement.builder()
                        .attributeName(key)
                        .keyType(KeyType.HASH)
                        .build())
                .provisionedThroughput(ProvisionedThroughput.builder()
                        .readCapacityUnits(new Long(10))
                        .writeCapacityUnits(new Long(10))
                        .build())
                .tableName(tableName)
                .build();

        String newTable ="";
        try {
            CreateTableResponse response = ddb.createTable(request);
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            // Wait until the Amazon DynamoDB table is created
            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);

            newTable = response.tableDescription().tableName();
```

```
            return newTable;

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
       return "";
    }
```

Consulte el ejemplo completo en GitHub.

Crear una tabla con una clave primaria compuesta

En el siguiente ejemplo se crea una tabla con dos atributos. Ambos atributos se utilizan para la clave primaria compuesta.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.CreateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.CreateTableResponse;
import software.amazon.awssdk.services.dynamodb.model.KeySchemaElement;
import software.amazon.awssdk.services.dynamodb.model.KeyType;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughput;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
```

Código de

```
    public static String createTableComKey(DynamoDbClient ddb, String tableName) {
        CreateTableRequest request = CreateTableRequest.builder()
                .attributeDefinitions(
                        AttributeDefinition.builder()
                                .attributeName("Language")
                                .attributeType(ScalarAttributeType.S)
                                .build(),
                        AttributeDefinition.builder()
                                .attributeName("Greeting")
                                .attributeType(ScalarAttributeType.S)
                                .build())
                .keySchema(
```

```
                        KeySchemaElement.builder()
                                .attributeName("Language")
                                .keyType(KeyType.HASH)
                                .build(),
                        KeySchemaElement.builder()
                                .attributeName("Greeting")
                                .keyType(KeyType.RANGE)
                                .build())
                .provisionedThroughput(
                        ProvisionedThroughput.builder()
                                .readCapacityUnits(new Long(10))
                                .writeCapacityUnits(new Long(10)).build())
                .tableName(tableName)
                .build();

        String tableId = "";

        try {
             CreateTableResponse result = ddb.createTable(request);
             tableId = result.tableDescription().tableId();
             return tableId;
         } catch (DynamoDbException e) {
             System.err.println(e.getMessage());
             System.exit(1);
         }
        return "";
    }
```

Consulte el ejemplo completo en GitHub.

Lista de tablas

Puede mostrar las tablas de una región determinada llamando al método `listTables` de `DynamoDbClient's`.

> **Note**
>
> Si la tabla designada no existe para su cuenta y región, se produce una `ResourceNotFoundException`.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ListTablesResponse;
import software.amazon.awssdk.services.dynamodb.model.ListTablesRequest;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import java.util.List;
```

Código de

```
    public static void listAllTables(DynamoDbClient ddb){

        boolean moreTables = true;
        String lastName = null;

        while(moreTables) {
            try {
                ListTablesResponse response = null;
                if (lastName == null) {
                    ListTablesRequest request = ListTablesRequest.builder().build();
                    response = ddb.listTables(request);
                } else {
                    ListTablesRequest request = ListTablesRequest.builder()
                            .exclusiveStartTableName(lastName).build();
                    response = ddb.listTables(request);
                }

                List<String> tableNames = response.tableNames();

                if (tableNames.size() > 0) {
                    for (String curName : tableNames) {
                        System.out.format("* %s\n", curName);
                    }
                } else {
                    System.out.println("No tables found!");
                    System.exit(0);
                }

                lastName = response.lastEvaluatedTableName();
                if (lastName == null) {
                    moreTables = false;
                }
            } catch (DynamoDbException e) {
                System.err.println(e.getMessage());
```

```
                System.exit(1);
            }
        }
        System.out.println("\nDone!");
    }
```

De forma predeterminada, se devuelve un máximo de 100 tablas para cada llamada: utilice `lastEvaluatedTableName` en el objeto `ListTablesResponse` devuelto para obtener la última tabla que se evaluó. Puede utilizar este valor para iniciar la enumeración después del último valor devuelto de la enumeración anterior.

Consulte el ejemplo completo en GitHub.

Describir una tabla (obtener información de ella)

Utilice el método `describeTable` de `DynamoDbClient's` para obtener información sobre una tabla.

> **Note**
>
> Si la tabla designada no existe para su cuenta y región, se produce una `ResourceNotFoundException`.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableRequest;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughputDescription;
import software.amazon.awssdk.services.dynamodb.model.TableDescription;
import java.util.List;
```

Código de

```
    public static void describeDymamoDBTable(DynamoDbClient ddb,String tableName ) {

        DescribeTableRequest request = DescribeTableRequest.builder()
                .tableName(tableName)
```

```
                .build();

        try {
            TableDescription tableInfo =
                    ddb.describeTable(request).table();

            if (tableInfo != null) {
                System.out.format("Table name  : %s\n",
                        tableInfo.tableName());
                System.out.format("Table ARN   : %s\n",
                        tableInfo.tableArn());
                System.out.format("Status      : %s\n",
                        tableInfo.tableStatus());
                System.out.format("Item count  : %d\n",
                        tableInfo.itemCount().longValue());
                System.out.format("Size (bytes): %d\n",
                        tableInfo.tableSizeBytes().longValue());

                ProvisionedThroughputDescription throughputInfo =
                        tableInfo.provisionedThroughput();
                System.out.println("Throughput");
                System.out.format("  Read Capacity : %d\n",
                        throughputInfo.readCapacityUnits().longValue());
                System.out.format("  Write Capacity: %d\n",
                        throughputInfo.writeCapacityUnits().longValue());

                List<AttributeDefinition> attributes =
                        tableInfo.attributeDefinitions();
                System.out.println("Attributes");

                for (AttributeDefinition a : attributes) {
                    System.out.format("  %s (%s)\n",
                            a.attributeName(), a.attributeType());
                }
            }
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println("\nDone!");
    }
```

Consulte el ejemplo completo en GitHub.

Modificar (actualizar) una tabla

Puede modificar los valores de rendimiento aprovisionado de la tabla en cualquier momento llamando al método `updateTable` de `DynamoDbClient's`.

> **Note**
>
> Si la tabla designada no existe para su cuenta y región, se produce una ResourceNotFoundException.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughput;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.UpdateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
```

Código de

```
    public static void updateDynamoDBTable(DynamoDbClient ddb,
                                           String tableName,
                                           Long readCapacity,
                                           Long writeCapacity) {

        System.out.format(
                "Updating %s with new provisioned throughput values\n",
                tableName);
        System.out.format("Read capacity : %d\n", readCapacity);
        System.out.format("Write capacity : %d\n", writeCapacity);

        ProvisionedThroughput tableThroughput = ProvisionedThroughput.builder()
                .readCapacityUnits(readCapacity)
                .writeCapacityUnits(writeCapacity)
                .build();

        UpdateTableRequest request = UpdateTableRequest.builder()
                .provisionedThroughput(tableThroughput)
                .tableName(tableName)
                .build();
```

```
        try {
            ddb.updateTable(request);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }

        System.out.println("Done!");
    }
```

Consulte el ejemplo completo en GitHub.

Eliminación de una tabla

Para eliminar una tabla, llame al método `deleteTable` de `DynamoDbClient's` y proporcione el nombre de la tabla.

> **Note**
>
> Si la tabla designada no existe para su cuenta y región, se produce una ResourceNotFoundException.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DeleteTableRequest;
```

Código de

```
    public static void deleteDynamoDBTable(DynamoDbClient ddb, String tableName) {

        DeleteTableRequest request = DeleteTableRequest.builder()
                .tableName(tableName)
                .build();

        try {
            ddb.deleteTable(request);

        } catch (DynamoDbException e) {
```

```
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println(tableName +" was successfully deleted!");
    }
```

Consulte el ejemplo completo en GitHub.

Más información

- Prácticas recomendadas para trabajar con tablas en la Guía para desarrolladores de Amazon DynamoDB
- Trabajar con tablas en DynamoDB en la Guía para desarrolladores de Amazon DynamoDB

Trabaja con elementos en DynamoDB

En DynamoDB, un elemento es una colección de atributos, cada uno de los cuales tiene un nombre y un valor. Los valores de los atributos pueden ser escalares, conjuntos o tipos de documentos. Para obtener más información, consulte Reglas de nomenclatura y tipos de datos en la Guía para desarrolladores de Amazon DynamoDB .

Recuperar (obtener) un elemento de una tabla

Llama al `getItem` método DynamoDbClient's y pásale un GetItemRequestobjeto con el nombre de la tabla y el valor de la clave principal del elemento que desees. Devuelve un GetItemResponseobjeto con todos los atributos de ese elemento. Puede especificar una o varias expresiones de proyección en `GetItemRequest` para recuperar atributos específicos.

Puede utilizar el `item()` método del `GetItemResponse` objeto devuelto para recuperar un mapa de los pares clave (cadena AttributeValue) y valor () asociados al elemento.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import java.util.HashMap;
import java.util.Map;
```

```
import java.util.Set;
```

Código

```
   public static void getDynamoDBItem(DynamoDbClient ddb,String tableName,String
key,String keyVal ) {

       HashMap<String,AttributeValue> keyToGet = new HashMap<String,AttributeValue>();

       keyToGet.put(key, AttributeValue.builder()
               .s(keyVal).build());

       GetItemRequest request = GetItemRequest.builder()
               .key(keyToGet)
               .tableName(tableName)
               .build();

       try {
           Map<String,AttributeValue> returnedItem = ddb.getItem(request).item();

           if (returnedItem != null) {
               Set<String> keys = returnedItem.keySet();
               System.out.println("Amazon DynamoDB table attributes: \n");

               for (String key1 : keys) {
                   System.out.format("%s: %s\n", key1,
returnedItem.get(key1).toString());
               }
           } else {
               System.out.format("No item found with the key %s!\n", key);
           }
       } catch (DynamoDbException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

Consulta el ejemplo completo en GitHub.

Recuperar (obtener) un elemento de una tabla usando el cliente asíncrono

Invoque el `getItem` método del DynamoDbAsyncClient y pásele un GetItemRequestobjeto con el nombre de la tabla y el valor de la clave principal del elemento que desee.

Puede devolver una instancia de recopilación con todos los atributos de ese elemento (consulte el siguiente ejemplo).

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.DynamoDbAsyncClient;
import java.util.HashMap;
import java.util.Map;
import java.util.Set;
import java.util.stream.Collectors;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
```

Código

```
   public static void getItem(DynamoDbAsyncClient client, String tableName, String
key,  String keyVal) {

       HashMap<String, AttributeValue> keyToGet =
               new HashMap<String, AttributeValue>();

       keyToGet.put(key, AttributeValue.builder()
               .s(keyVal).build());

       try {

           // Create a GetItemRequest instance
           GetItemRequest request = GetItemRequest.builder()
                   .key(keyToGet)
                   .tableName(tableName)
                   .build();

           // Invoke the DynamoDbAsyncClient object's getItem
           java.util.Collection<AttributeValue> returnedItem =
client.getItem(request).join().item().values();

           // Convert Set to Map
           Map<String, AttributeValue> map =
returnedItem.stream().collect(Collectors.toMap(AttributeValue::s, s->s));
           Set<String> keys = map.keySet();
           for (String sinKey : keys) {
```

```
                System.out.format("%s: %s\n", sinKey, map.get(sinKey).toString());
            }

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
```

Consulte el ejemplo completo en. GitHub

Agregar un nuevo elemento a una tabla

Cree un mapa de pares de clave-valor que represente los atributos del elemento. Estos deben incluir valores para los campos de la clave principal de la tabla. Si el elemento identificado por la clave principal ya existe, la solicitud actualiza sus campos.

> **Note**
>
> Si la tabla con el nombre indicado no existe para tu cuenta y región, ResourceNotFoundExceptionaparecerá una.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.PutItemRequest;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import java.util.HashMap;
```

Código

```
    public static void putItemInTable(DynamoDbClient ddb,
                                      String tableName,
                                      String key,
                                      String keyVal,
                                      String albumTitle,
                                      String albumTitleValue,
```

```
                                       String awards,
                                       String awardVal,
                                       String songTitle,
                                       String songTitleVal){

        HashMap<String,AttributeValue> itemValues = new
 HashMap<String,AttributeValue>();

        // Add all content to the table
        itemValues.put(key, AttributeValue.builder().s(keyVal).build());
        itemValues.put(songTitle, AttributeValue.builder().s(songTitleVal).build());
        itemValues.put(albumTitle,
 AttributeValue.builder().s(albumTitleValue).build());
        itemValues.put(awards, AttributeValue.builder().s(awardVal).build());

        PutItemRequest request = PutItemRequest.builder()
                .tableName(tableName)
                .item(itemValues)
                .build();

        try {
            ddb.putItem(request);
            System.out.println(tableName +" was successfully updated");

        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be found.
\n", tableName);
            System.err.println("Be sure that it exists and that you've typed its name
 correctly!");
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

Consulta el ejemplo completo en GitHub.

Actualizar un elemento existente en una tabla

Puede actualizar un atributo de un elemento que ya existe en una tabla mediante el método `updateItem` de DynamoDbClient, proporcionando el nombre de la tabla, el valor de clave principal y un mapa de los campos que se van a actualizar.

> **Note**
>
> Si la tabla con el nombre asignado no existe para tu cuenta y región, o si el elemento identificado con la clave principal que has introducido no existe, ResourceNotFoundExceptionaparecerá un.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.AttributeAction;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.AttributeValueUpdate;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import java.util.HashMap;
```

Código

```
    public static void updateTableItem(DynamoDbClient ddb,
                                       String tableName,
                                       String key,
                                       String keyVal,
                                       String name,
                                       String updateVal){

        HashMap<String,AttributeValue> itemKey = new HashMap<String,AttributeValue>();

        itemKey.put(key, AttributeValue.builder().s(keyVal).build());

        HashMap<String,AttributeValueUpdate> updatedValues =
                new HashMap<String,AttributeValueUpdate>();

        // Update the column specified by name with updatedVal
        updatedValues.put(name, AttributeValueUpdate.builder()
                .value(AttributeValue.builder().s(updateVal).build())
                .action(AttributeAction.PUT)
                .build());

        UpdateItemRequest request = UpdateItemRequest.builder()
```

```
                .tableName(tableName)
                .key(itemKey)
                .attributeUpdates(updatedValues)
                .build();

        try {
            ddb.updateItem(request);
        } catch (ResourceNotFoundException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }

        System.out.println("Done!");
    }
```

Consulta el ejemplo completo en GitHub.

Eliminar un elemento existente en una tabla

Puede eliminar un elemento que existe en una tabla utilizando el `deleteItem` método DynamoDbClient's y proporcionando un nombre de tabla, así como el valor de la clave principal.

> **Note**
>
> Si la tabla con el nombre asignado no existe para tu cuenta y región, o si el elemento identificado con la clave principal que has introducido no existe, ResourceNotFoundExceptionse generará una.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DeleteItemRequest;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import java.util.HashMap;
```

Código

```
 public static void deleteDynamoDBItem(DynamoDbClient ddb, String tableName, String
key, String keyVal) {

       HashMap<String,AttributeValue> keyToGet =
               new HashMap<String,AttributeValue>();

       keyToGet.put(key, AttributeValue.builder()
               .s(keyVal)
               .build());

       DeleteItemRequest deleteReq = DeleteItemRequest.builder()
               .tableName(tableName)
               .key(keyToGet)
               .build();

       try {
           ddb.deleteItem(deleteReq);
       } catch (DynamoDbException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

Consulta el ejemplo completo en GitHub.

Más información

- Prácticas recomendadas para el uso de elementos en la Guía para desarrolladores de Amazon DynamoDB
- Cómo trabajar con los elementos DynamoDB de la guía para Amazon DynamoDB desarrolladores

Asigne objetos Java a elementos de DynamoDB con AWS SDK for Java 2.x

La API de cliente mejorado de DynamoDB es una biblioteca de alto nivel, sucesora de la clase `DynamoDBMapper` del SDK para Java v1.x. Ofrece una forma sencilla de asignar clases del cliente a tablas de DynamoDB. Defina las relaciones entre tablas y sus correspondientes clases de datos en el código. Después de definir estas relaciones, puede realizar intuitivamente varias operaciones de creación, lectura, actualización o eliminación (CRUD) en tablas o elementos en DynamoDB.

La API de cliente mejorado de DynamoDB también incluye la API de documentos mejorada para trabajar con elementos de tipo documento que no siguen un esquema definido.

La API de cliente mejorado de DynamoDB se analiza en los siguientes temas.

- Empiece a utilizar la API de cliente mejorado de DynamoDB
- Aprenda los conceptos básicos de la API de cliente mejorado de DynamoDB
- Utilizar características de asignación avanzadas
- Trabaje con documentos JSON con la API de documentos mejorada para DynamoDB
- Uso de extensiones para personalizar operaciones de DynamoDB Enhanced Client
- Utilizar la API de cliente mejorado de DynamoDB de forma asíncrona
- Anotaciones de clases de datos

Empiece a utilizar la API de cliente mejorado de DynamoDB

El siguiente tutorial presenta los aspectos básicos necesarios para trabajar con la API de cliente mejorado de DynamoDB.

agregar dependencias de API

Para empezar a trabajar con la API de cliente mejorado de DynamoDB en su proyecto, añada una dependencia al artefacto de Maven `dynamodb-enhanced`. Esto se muestra en el ejemplo siguiente.

Maven

```
<project>
  <dependencyManagement>
   <dependencies>
      <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>bom</artifactId>
        <version><VERSION></version>
        <type>pom</type>
        <scope>import</scope>
      </dependency>
   </dependencies>
  </dependencyManagement>
  <dependencies>
    <dependency>
```

```
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>dynamodb-enhanced</artifactId>
    </dependency>
  </dependencies>
  ...
</project>
```

Realice una búsqueda en el repositorio central de Maven para encontrar la última versión y *<VERSION>* sustitúyala por este valor.

Gradle

```
repositories {
    mavenCentral()
}
dependencies {
    implementation(platform("software.amazon.awssdk:bom:<VERSION>"))
    implementation("software.amazon.awssdk:dynamodb-enhanced")
    ...
}
```

Realice una búsqueda en el repositorio central de Maven para encontrar la última versión y sustitúyala por este *<VERSION>* valor.

Generación de un **`TableSchema`** partir de una clase de datos

Un `TableSchema` permite al cliente mejorado asignar valores de atributos de DynamoDB hacia y desde las clases del cliente. En este tutorial, conocerá los `TableSchema` derivados de una clase de datos estáticos y generadas a partir de código mediante un generador.

Utilice una clase de datos anotada

El SDK para Java 2.x incluye un conjunto de anotaciones que puede utilizar con una clase de datos para generar rápidamente un `TableSchema` para asignar sus clases a tablas.

Comience por crear una clase de datos que se ajuste a la JavaBean especificación. La especificación requiere que una clase tenga un constructor público sin argumentos, además de getters y setters para cada atributo de la clase. Incluya una anotación a nivel de clase para indicar que la clase de datos es una `DynamoDbBean`. Además, como mínimo, incluya una anotación `DynamoDbPartitionKey` en el getter o setter para el atributo de clave principal.

Puede aplicar anotaciones de nivel de atributo a getters o setters, pero no a ambos.

> **Note**
>
> El término `property` se usa normalmente para un valor encapsulado en un. JavaBean Sin embargo, en esta guía se utiliza el término `attribute` en su lugar para mantener la coherencia con la terminología utilizada por DynamoDB.

La clase siguiente `Customer` muestra anotaciones que vinculan la definición de clase a una tabla de DynamoDB.

Clase **`Customer`**

```
package org.example.tests.model;

import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbBean;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbPartitionKey;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSortKey;

import java.time.Instant;

@DynamoDbBean
public class Customer {

    private String id;
    private String name;
    private String email;
    private Instant regDate;

    @DynamoDbPartitionKey
    public String getId() { return this.id; }

    public void setId(String id) { this.id = id; }

    public String getCustName() { return this.name; }

    public void setCustName(String name) { this.name = name; }

    @DynamoDbSortKey
    public String getEmail() { return this.email; }
```

```
    public void setEmail(String email) { this.email = email; }

    public Instant getRegistrationDate() { return this.regDate; }

    public void setRegistrationDate(Instant registrationDate) { this.regDate =
 registrationDate; }

    @Override
    public String toString() {
        return "Customer [id=" + id + ", name=" + name + ", email=" + email
                + ", regDate=" + regDate + "]";
    }
}
```

Una vez creada una clase de datos anotada, utilícela para crear el `TableSchema`, como se muestra en el siguiente fragmento.

```
static final TableSchema<Customer> customerTableSchema =
 TableSchema.fromBean(Customer.class);
```

Un `TableSchema` se diseña para ser estático e inmutable. Por lo general, puede instanciarlo en el momento de cargar la clase.

El método de fábrica estático `TableSchema.fromBean()` introspecciona el objeto bean para generar la asignación de atributos (propiedades) de la clase de datos a y desde los atributos de DynamoDB.

Para ver un ejemplo de cómo trabajar con un modelo de datos compuesto por varias clases de datos, consulte la clase `Person` en la sección ???.

Uso de un constructor

Puede saltarse el coste de la introspección de objetos bean si define el esquema de la tabla en código. Si codificas el esquema, no es necesario que tu clase siga los estándares de JavaBean nomenclatura ni que esté anotada. El siguiente ejemplo utiliza un constructor y es equivalente al ejemplo de clase `Customer` que utiliza anotaciones.

```
static final TableSchema<Customer> customerTableSchema =
                TableSchema.builder(Customer.class)
                        .newItemSupplier(Customer::new)
```

```
                        .addAttribute(String.class, a -> a.name("id")
                                .getter(Customer::getId)
                                .setter(Customer::setId)
                                .tags(StaticAttributeTags.primaryPartitionKey()))
                        .addAttribute(String.class, a -> a.name("email")
                                .getter(Customer::getEmail)
                                .setter(Customer::setEmail)
                                .tags(StaticAttributeTags.primarySortKey()))
                        .addAttribute(String.class, a -> a.name("name")
                                .getter(Customer::getCustName)
                                .setter(Customer::setCustName))
                        .addAttribute(Instant.class, a -> a.name("registrationDate")
                                .getter(Customer::getRegistrationDate)
                                .setter(Customer::setRegistrationDate))
                        .build();
```

Crear un cliente mejorado y una **`DynamoDbTable`**

Crear un cliente mejorado

La DynamoDbEnhancedClientclase o su contraparte asíncrona DynamoDbEnhancedAsyncClient, es el punto de partida para trabajar con la API de cliente mejorada de DynamoDB.

El cliente mejorado requiere un `DynamoDbClient` estándar para hacer el trabajo. La API ofrece dos formas de crear una instancia de `DynamoDbEnhancedClient`. La primera opción, que se muestra en el siguiente fragmento, crea un `DynamoDbClient` estándar con los ajustes predeterminados tomados de la configuración.

```
DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.create();
```

Si desea configurar el cliente estándar subyacente, puede suministrarlo al método constructor del cliente mejorado como se muestra en el siguiente fragmento.

```
// Configure an instance of the standard DynamoDbClient.
DynamoDbClient standardClient = DynamoDbClient.builder()
    .region(Region.US_EAST_1)
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

// Use the configured standard client with the enhanced client.
DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
    .dynamoDbClient(standardClient)
```

```
    .build();
```

Crear una instancia de **`DynamoDbTable`**

Piense en una `DynamoDbTable` como la representación del cliente de una tabla de DynamoDB que utiliza la funcionalidad de mapeo proporcionada por un `TableSchema`. La clase `DynamoDbTable` proporciona métodos para las operaciones CRUD que permiten interactuar con una sola tabla de DynamoDB.

`DynamoDbTable<T>` es una clase genérica que toma un único argumento de tipo, ya sea una clase personalizada o un `EnhancedDocument` cuando se trabaja con elementos de tipo documento. Este tipo de argumento establece la relación entre la clase que utiliza y la tabla única de DynamoDB.

Siga el método de fábrica `table()` del `DynamoDbEnhancedClient` para crear una instancia `DynamoDbTable`, como se muestra en el siguiente fragmento.

```
static final DynamoDbTable<Customer> customerTable =
        enhancedClient.table("Customer", TableSchema.fromBean(Customer.class));
```

Las instancias de `DynamoDbTable` son aptas para ser únicas porque son inmutables y se pueden usar en toda la aplicación.

El código ahora tiene una representación en memoria de una tabla de DynamoDB que puede funcionar con instancias `Customer`. La tabla de DynamoDB real puede existir o no. Si la tabla nombrada `Customer` ya existe, puede empezar a realizar operaciones de CRUD en ella. Si no existe, utilice la instancia de `DynamoDbTable` para crear la tabla, tal y como se explica en la siguiente sección.

Cree una tabla de DynamoDB si es necesario

Después de crear una instancia `DynamoDbTable`, úsela para crear una tabla de DynamoDB por única vez.

Crear código de ejemplo de tabla

En el siguiente ejemplo, se crea una tabla de DynamoDB basada en la clase de datos `Customer`.

En este ejemplo se crea una tabla DynamoDB con el nombre `Customer` —idéntico al nombre de la clase— pero el nombre de la tabla puede ser otro. Sea cual sea el nombre que dé a la tabla,

debe usar este nombre en otras aplicaciones para trabajar con la tabla. Proporcione este nombre al método `table()` cada vez que cree otro objeto `DynamoDbTable` para trabajar con la tabla de DynamoDB subyacente.

El parámetro lambda de Java, `builder`, que se pasa al método `createTable`, permite personalizar la tabla. En este ejemplo, se configura el rendimiento aprovisionado. Si desea utilizar la configuración predeterminada al crear una tabla, omita el generador, tal y como se muestra en el siguiente fragmento.

```
customerTable.createTable();
```

Cuando se utiliza la configuración predeterminada, no se establecen los valores del rendimiento aprovisionado. En su lugar, el modo de facturación de la tabla se establece como bajo demanda.

En el ejemplo también se utiliza una `DynamoDbWaiter` antes de intentar imprimir el nombre de la tabla recibido en la respuesta. Crear una tabla lleva algún tiempo. Por lo tanto, utilizar un 'waiter' significa que no tiene que escribir lógica que consulte el servicio de DynamoDB para verificar si la tabla existe antes de su uso.

Importaciones

```
import com.example.dynamodb.Customer;
import software.amazon.awssdk.core.internal.waiters.ResponseOrException;
import software.amazon.awssdk.enhanced.dynamodb.DynamoDbEnhancedClient;
import software.amazon.awssdk.enhanced.dynamodb.DynamoDbTable;
import software.amazon.awssdk.enhanced.dynamodb.TableSchema;
import software.amazon.awssdk.enhanced.dynamodb.model.CreateTableEnhancedRequest;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableResponse;
import software.amazon.awssdk.services.dynamodb.waiters.DynamoDbWaiter;
```

Código

```
public static void createCustomerTable(DynamoDbTable<Customer> customerTable,
DynamoDbClient standardClient) {
    // Create the DynamoDB table using the 'customerTable' DynamoDbTable instance.
    customerTable.createTable(builder -> builder
            .provisionedThroughput(b -> b
                    .readCapacityUnits(10L)
                    .writeCapacityUnits(10L)
                    .build())
```

```
    );
    // The DynamoDbClient instance (named 'standardClient') passed to the builder for
the DynamoDbWaiter is the same instance
    // that was passed to the builder of the DynamoDbEnhancedClient instance that we
created previously.
    // By using the same instance, it ensures that the same Region that was configured
on the standard DynamoDbClient
    // instance is used for other service clients that accept a DynamoDbClient during
construction.
    try (DynamoDbWaiter waiter =
DynamoDbWaiter.builder().client(standardClient).build()) { // DynamoDbWaiter is
Autocloseable
        ResponseOrException<DescribeTableResponse> response = waiter
                .waitUntilTableExists(builder ->
builder.tableName("Customer").build())
                .matched();
        DescribeTableResponse tableDescription = response.response().orElseThrow(
                () -> new RuntimeException("Customer table was not created."));
        // The actual error can be inspected in response.exception()
        logger.info("Customer table was created.");
    }
}
```

> **Note**
>
> Los nombres de los atributos de una tabla de DynamoDB comienzan con una letra minúscula cuando la tabla se genera a partir de una clase de datos. Si desea que el nombre del atributo de la tabla comience con una letra mayúscula, utilice la anotación `@DynamoDbAttribute(NAME)` y proporcione el nombre que desee como parámetro.

Realizar operaciones

Una vez creada la tabla, utilice la instancia `DynamoDbTable` para las operaciones en la tabla de DynamoDB.

En el siguiente ejemplo, se pasa un singleton `DynamoDbTable<Customer>` como parámetro junto con una instancia de clase de datos `Customer` para añadir un nuevo elemento a la tabla.

```
   public static void putItemExample(DynamoDbTable<Customer> customerTable, Customer
customer){
```

```
        logger.info(customer.toString());
        customerTable.putItem(customer);
    }
```

Objeto **`Customer`**

```
        Customer customer = new Customer();
        customer.setId("1");
        customer.setCustName("Customer Name");
        customer.setEmail("customer@example.com");
        customer.setRegistrationDate(Instant.parse("2023-07-03T10:15:30.00Z"));
```

Antes de enviar el objeto `customer` al servicio DynamoDB, registre el resultado del método del objeto `toString()` para compararlo con lo que envía el cliente mejorado.

```
Customer [id=1, name=Customer Name, email=customer@example.com,
 regDate=2023-07-03T10:15:30Z]
```

El registro a nivel de cable muestra la carga útil de la solicitud generada. El cliente mejorado generó la representación de bajo nivel a partir de la clase de datos. El atributo `regDate`, que es un tipo `Instant` en Java, se representa como una cadena de DynamoDB.

```
{
  "TableName": "Customer",
  "Item": {
    "registrationDate": {
      "S": "2023-07-03T10:15:30Z"
    },
    "id": {
      "S": "1"
    },
    "custName": {
      "S": "Customer Name"
    },
    "email": {
      "S": "customer@example.com"
    }
  }
}
```

Trabajar con una tabla existente

En la sección anterior se muestra cómo crear una tabla de DynamoDB a partir de una clase de datos de Java. Si ya tiene una tabla existente y desea utilizar las características del cliente mejorado, puede crear una clase de datos de Java para que funcione con la tabla. Debe examinar la tabla de DynamoDB y añadir las anotaciones necesarias a la clase de datos.

Antes de trabajar con una tabla existente, llame al método `DynamoDbEnhanced.table()`. Esto se hizo en el ejemplo anterior con la instrucción siguiente.

```
DynamoDbTable<Customer> customerTable = enhancedClient.table("Customer",
 TableSchema.fromBean(Customer.class));
```

Una vez devuelta la instancia `DynamoDbTable`, puede empezar a trabajar de inmediato con la tabla subyacente. No es necesario volver a crear la tabla llamando al método `DynamoDbTable.createTable()`.

El siguiente ejemplo lo demuestra mediante la recuperación inmediata de una instancia `Customer` de la tabla de DynamoDB.

```
DynamoDbTable<Customer> customerTable = enhancedClient.table("Customer",
 TableSchema.fromBean(Customer.class));
// The Customer table exists already and has an item with a primary key value of "1"
 and a sort key value of "customer@example.com".
customerTable.getItem(
        Key.builder().
                partitionValue("1").
                sortValue("customer@example.com").build());
```

> **Important**
>
> El nombre de la tabla utilizado en el método `table()` debe coincidir con el nombre de la tabla de DynamoDB existente.

Aprenda los conceptos básicos de la API de cliente mejorado de DynamoDB

Este tema trata las características básicas de la API de cliente mejorado de DynamoDB y la compara con la API de cliente de DynamoDB estándar.

Si es la primera vez que utiliza la API de cliente mejorado de DynamoDB, le recomendamos que consulte el tutorial introductorio para familiarizarse con las clases fundamentales.

Elementos de DynamoDB en Java

Las tablas de DynamoDB almacenan elementos. Según el caso práctico, los elementos del lado de Java pueden adoptar la forma de datos estructurados de forma estática o estructuras creadas dinámicamente.

Si su caso requiere elementos con un conjunto coherente de atributos, utilice clases anotadas o un constructor para generar los tipos estáticos adecuados de `TableSchema`.

Alternativamente, si necesita almacenar elementos que consten de estructuras variables, cree un `DocumentTableSchema`. `DocumentTableSchema` forma parte de la API de documento mejorada y solo requiere una clave principal de tipo estático y funciona con instancias `EnhancedDocument` para contener los elementos de datos. La API de documentos mejorada se trata en otro tema.

Tipos de atributos para clases de modelos de datos

Si bien DynamoDB admite un número menor de tipos de atributos en comparación con el sistema de tipos enriquecidos de Java, la API de cliente mejorado de DynamoDB proporciona mecanismos para convertir los miembros de una clase de Java a y desde tipos de atributos de DynamoDB.

Los tipos de atributos (propiedades) de las clases de datos de Java deben ser tipos de objetos, no primitivos. Por ejemplo, utilice siempre tipos de datos de objetos `Long` y `Integer`, no primitivos `long` y `int`.

De forma predeterminada, la API de cliente mejorada de DynamoDB admite convertidores de atributos para una gran cantidad de tipos, como Integer BigDecimal, String e Instant. La lista aparece en las clases de implementación conocidas de la AttributeConverter interfaz. La lista incluye muchos tipos y colecciones, como mapas, listas y conjuntos.

Para almacenar los datos de un tipo de atributo que no se admite de forma predeterminada o que no se ajusta a la JavaBean convención, puede escribir una `AttributeConverter` implementación personalizada para realizar la conversión. Consulte la sección sobre conversión de atributos para ver un ejemplo.

Para almacenar los datos de un tipo de atributo cuya clase cumpla con la especificación de beans de Java (o una clase de datos inmutable), puede adoptar dos enfoques.

- Si tiene acceso al archivo fuente, puede anotar la clase con `@DynamoDbBean` (o `@DynamoDbImmutable`). La sección que analiza los atributos anidados muestra ejemplos del uso de clases anotadas.

- Si no tiene acceso al archivo de origen de la clase de JavaBean datos del atributo (o no quiere hacer anotaciones en el archivo de origen de una clase a la que sí tiene acceso), puede utilizar el enfoque de creación. Esto crea un esquema de tabla sin definir las claves. A continuación, puede anidar este esquema de tabla dentro de otro esquema de tabla para realizar el mapeo. La sección de atributos anidados contiene un ejemplo que muestra el uso de esquemas anidados.

Valores nulos

Al utilizar el método `putItem`, el cliente mejorado no incluye los atributos con valores nulos de un objeto de datos mapeado en la solicitud a DynamoDB.

El comportamiento predeterminado del SDK para las solicitudes `updateItem` elimina atributos del elemento de DynamoDB que están configurados como nulos en el objeto que se envía en el método `updateItem`. Si desea actualizar algunos valores de atributos y mantener los demás sin cambios, tiene dos opciones.

- Recupere el elemento (usando `getItem`) antes de realizar cambios en los valores. Con este método, el SDK envía todos los valores antiguos y actualizados a DynamoDB.
- Utilice `IgnoreNullsMode.SCALAR_ONLY` o `IgnoreNullsMode.MAPS_ONLY` cuando cree la solicitud para actualizar el elemento. Ambos modos ignoran las propiedades con valores nulos del objeto que representan atributos escalares en DynamoDB. El tema the section called “Actualización de elementos que contienen tipos complejos” de esta guía contiene más información sobre los valores `IgnoreNullsMode` y sobre cómo trabajar con tipos complejos.

El siguiente ejemplo demuestra `ignoreNullsMode()` para el método `updateItem()`.

```
    public static void updateItemNullsExample() {
        Customer customer = new Customer();
        customer.setCustName("CustomerName");
        customer.setEmail("email");
        customer.setId("1");
        customer.setRegistrationDate(Instant.now());

        logger.info("Original customer: {}", customer);
```

```
        // Put item with values for all attributes.
        try {
            customerAsyncDynamoDbTable.putItem(customer).join();
        } catch (RuntimeException rte) {
            logger.error("A exception occurred during putItem: {}",
rte.getCause().getMessage(), rte);
            return;
        }

        // Create a Customer instance with the same 'id' and 'email' values, but a
different 'name' value.
        // Do not set the 'registrationDate' attribute.
        Customer customerForUpdate = new Customer();
        customerForUpdate.setCustName("NewName");
        customerForUpdate.setEmail("email");
        customerForUpdate.setId("1");

        // Update item without setting the 'registrationDate' property and set
IgnoreNullsMode to SCALAR_ONLY.
        try {
            Customer updatedWithNullsIgnored = customerAsyncDynamoDbTable.updateItem(b
-> b
                            .item(customerForUpdate)
                            .ignoreNullsMode(IgnoreNullsMode.SCALAR_ONLY))
                    .join();
            logger.info("Customer updated with nulls ignored: {}",
updatedWithNullsIgnored.toString());
        } catch (RuntimeException rte) {
            logger.error("An exception occurred during updateItem: {}",
rte.getCause().getMessage(), rte);
            return;
        }

        // Update item without setting the registrationDate attribute and not setting
ignoreNulls to true.
        try {
            Customer updatedWithNullsUsed =
customerAsyncDynamoDbTable.updateItem(customerForUpdate)
                    .join();
            logger.info("Customer updated with nulls used: {}",
updatedWithNullsUsed.toString());
        } catch (RuntimeException rte) {
```

```
            logger.error("An exception occurred during updateItem: {}",
 rte.getCause().getMessage(), rte);
        }
    }


// Logged lines.
Original customer: Customer [id=1, name=CustomerName, email=email,
 regDate=2024-10-11T14:12:30.222858Z]
Customer updated with nulls ignored: Customer [id=1, name=NewName, email=email,
 regDate=2024-10-11T14:12:30.222858Z]
Customer updated with nulls used: Customer [id=1, name=NewName, email=email,
 regDate=null]
```

Métodos básicos del cliente mejorado de DynamoDB

Los métodos básicos del cliente mejorado se corresponden con las operaciones del servicio de DynamoDB que les dan nombre. Los siguientes ejemplos muestran la variación más simple de cada método. Puede personalizar cada método pasando un objeto de solicitud mejorado. Los objetos de solicitud mejorados ofrecen la mayoría de las características disponibles en el cliente estándar de DynamoDB. Estas acciones se documentan por completo en la Referencia de la API de AWS SDK for Java 2.x .

El ejemplo usa la the section called “Clase `Customer`” mostrada anteriormente.

```
// CreateTable
customerTable.createTable();

// GetItem
Customer customer =
 customerTable.getItem(Key.builder().partitionValue("a123").build());

// UpdateItem
Customer updatedCustomer = customerTable.updateItem(customer);

// PutItem
customerTable.putItem(customer);

// DeleteItem
Customer deletedCustomer =
 customerTable.deleteItem(Key.builder().partitionValue("a123").sortValue(456).build());

// Query
```

```
PageIterable<Customer> customers = customerTable.query(keyEqualTo(k ->
 k.partitionValue("a123")));

// Scan
PageIterable<Customer> customers = customerTable.scan();

// BatchGetItem
BatchGetResultPageIterable batchResults =
    enhancedClient.batchGetItem(r -> r.addReadBatch(ReadBatch.builder(Customer.class)
                                      .mappedTableResource(customerTable)
                                      .addGetItem(key1)
                                      .addGetItem(key2)
                                      .addGetItem(key3)
                                      .build()));

// BatchWriteItem
batchResults = enhancedClient.batchWriteItem(r ->
 r.addWriteBatch(WriteBatch.builder(Customer.class)
                                                    .mappedTableResource(customerTable)
                                                    .addPutItem(customer)
                                                    .addDeleteItem(key1)
                                                    .addDeleteItem(key1)
                                                    .build()));

// TransactGetItems
transactResults = enhancedClient.transactGetItems(r -> r.addGetItem(customerTable,
 key1)
                                                         .addGetItem(customerTable,
 key2));

// TransactWriteItems
enhancedClient.transactWriteItems(r -> r.addConditionCheck(customerTable,
                                                            i -> i.key(orderKey)

 .conditionExpression(conditionExpression))
                                      .addUpdateItem(customerTable, customer)
                                      .addDeleteItem(customerTable, key));
```

Comparar el cliente mejorado con el cliente estándar de DynamoDB

Los dos APIs clientes de DynamoDB (estándar y mejorado) le permiten trabajar con tablas de DynamoDB para realizar operaciones CRUD (crear, leer, actualizar y eliminar) a nivel de datos. La diferencia entre los clientes reside en la forma en que se logra. APIs Con el cliente estándar, se

trabaja directamente con atributos de datos de bajo nivel. La API de cliente mejorada utiliza clases de Java conocidas y se asigna a la API de bajo nivel en segundo plano.

Si bien ambos clientes APIs admiten operaciones a nivel de datos, el cliente estándar de DynamoDB también admite operaciones a nivel de recursos. Las operaciones a nivel de recursos gestionan la base de datos, como la creación de copias de seguridad, la creación de listas y la actualización de tablas. La API de cliente mejorada admite un número selecto de operaciones a nivel de recursos, como la creación, descripción y eliminación de tablas.

Para ilustrar los diferentes enfoques utilizados por los dos clientes APIs, los siguientes ejemplos de código muestran la creación de la misma `ProductCatalog` tabla con el cliente estándar y el cliente mejorado.

Comparación: crear una tabla mediante el cliente estándar de DynamoDB

```
DependencyFactory.dynamoDbClient().createTable(builder -> builder
        .tableName(TABLE_NAME)
        .attributeDefinitions(
                b -> b.attributeName("id").attributeType(ScalarAttributeType.N),
                b -> b.attributeName("title").attributeType(ScalarAttributeType.S),
                b -> b.attributeName("isbn").attributeType(ScalarAttributeType.S)
        )
        .keySchema(
                builder1 -> builder1.attributeName("id").keyType(KeyType.HASH),
                builder2 -> builder2.attributeName("title").keyType(KeyType.RANGE)
        )
        .globalSecondaryIndexes(builder3 -> builder3
                        .indexName("products_by_isbn")
                        .keySchema(builder2 -> builder2
                                .attributeName("isbn").keyType(KeyType.HASH))
                        .projection(builder2 -> builder2
                                .projectionType(ProjectionType.INCLUDE)
                                .nonKeyAttributes("price", "authors"))
                        .provisionedThroughput(builder4 -> builder4
                                .writeCapacityUnits(5L).readCapacityUnits(5L))
        )
        .provisionedThroughput(builder1 -> builder1
                .readCapacityUnits(5L).writeCapacityUnits(5L))
);
```

Comparación: crear una tabla mediante el cliente mejorado de DynamoDB

```
DynamoDbEnhancedClient enhancedClient = DependencyFactory.enhancedClient();
productCatalog = enhancedClient.table(TABLE_NAME,
 TableSchema.fromImmutableClass(ProductCatalog.class));
productCatalog.createTable(b -> b
        .provisionedThroughput(b1 -> b1.readCapacityUnits(5L).writeCapacityUnits(5L))
        .globalSecondaryIndices(b2 -> b2.indexName("products_by_isbn")
                .projection(b4 -> b4
                        .projectionType(ProjectionType.INCLUDE)
                        .nonKeyAttributes("price", "authors"))
                .provisionedThroughput(b3 ->
 b3.writeCapacityUnits(5L).readCapacityUnits(5L))
        )
);
```

El cliente mejorado utiliza la siguiente clase de datos anotados. El cliente mejorado de DynamoDB asigna los tipos de datos de Java a los tipos de datos de DynamoDB para obtener un código menos detallado que sea más fácil de seguir. `ProductCatalog` es un ejemplo del uso de una clase inmutable con el cliente mejorado de DynamoDB. El uso de clases inmutables para las clases de datos mapeados se analiza más adelante en este tema.

Clase **`ProductCatalog`**

```
package org.example.tests.model;

import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbIgnore;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbImmutable;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondaryPartitionKey;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSortKey;

import java.math.BigDecimal;
import java.util.Objects;
import java.util.Set;

@DynamoDbImmutable(builder = ProductCatalog.Builder.class)
public class ProductCatalog implements Comparable<ProductCatalog> {
    private Integer id;
    private String title;
```

```
    private String isbn;
    private Set<String> authors;
    private BigDecimal price;


    private ProductCatalog(Builder builder){
        this.authors = builder.authors;
        this.id = builder.id;
        this.isbn = builder.isbn;
        this.price = builder.price;
        this.title = builder.title;
    }

    public static Builder builder(){ return new Builder(); }

    @DynamoDbPartitionKey
    public Integer id() { return id; }

    @DynamoDbSortKey
    public String title() { return title; }

    @DynamoDbSecondaryPartitionKey(indexNames = "products_by_isbn")
    public String isbn() { return isbn; }
    public Set<String> authors() { return authors; }
    public BigDecimal price() { return price; }


    public static final class Builder {
      private Integer id;
      private String title;
      private String isbn;
      private Set<String> authors;
      private BigDecimal price;
      private Builder(){}

      public Builder id(Integer id) { this.id = id; return this; }
      public Builder title(String title) { this.title = title; return this; }
      public Builder isbn(String ISBN) { this.isbn = ISBN; return this; }
      public Builder authors(Set<String> authors) { this.authors = authors; return
this; }
      public Builder price(BigDecimal price) { this.price = price; return this; }
      public ProductCatalog build() { return new ProductCatalog(this); }
  }
```

```
    @Override
    public String toString() {
        final StringBuffer sb = new StringBuffer("ProductCatalog{");
        sb.append("id=").append(id);
        sb.append(", title='").append(title).append('\'');
        sb.append(", isbn='").append(isbn).append('\'');
        sb.append(", authors=").append(authors);
        sb.append(", price=").append(price);
        sb.append('}');
        return sb.toString();
    }

    @Override
    public boolean equals(Object o) {
        if (this == o) return true;
        if (o == null || getClass() != o.getClass()) return false;
        ProductCatalog that = (ProductCatalog) o;
        return id.equals(that.id) && title.equals(that.title) && Objects.equals(isbn,
 that.isbn) && Objects.equals(authors, that.authors) && Objects.equals(price,
 that.price);
    }

    @Override
    public int hashCode() {
        return Objects.hash(id, title, isbn, authors, price);
    }

    @Override
    @DynamoDbIgnore
    public int compareTo(ProductCatalog other) {
        if (this.id.compareTo(other.id) != 0){
            return this.id.compareTo(other.id);
        } else {
            return this.title.compareTo(other.title);
        }
    }
}
```

Los dos ejemplos de código siguientes de una escritura por lotes ilustran la imprecisión y la falta de seguridad de tipos cuando se utiliza el cliente estándar frente al cliente mejorado.

Comparación: escritura por lotes mediante el cliente estándar de DynamoDB

```
   public static void batchWriteStandard(DynamoDbClient dynamoDbClient, String
tableName) {

       Map<String, AttributeValue> catalogItem = Map.of(
               "authors", AttributeValue.builder().ss("a", "b").build(),
               "id", AttributeValue.builder().n("1").build(),
               "isbn", AttributeValue.builder().s("1-565-85698").build(),
               "title", AttributeValue.builder().s("Title 1").build(),
               "price", AttributeValue.builder().n("52.13").build());

       Map<String, AttributeValue> catalogItem2 = Map.of(
               "authors", AttributeValue.builder().ss("a", "b", "c").build(),
               "id", AttributeValue.builder().n("2").build(),
               "isbn", AttributeValue.builder().s("1-208-98073").build(),
               "title", AttributeValue.builder().s("Title 2").build(),
               "price", AttributeValue.builder().n("21.99").build());

       Map<String, AttributeValue> catalogItem3 = Map.of(
               "authors", AttributeValue.builder().ss("g", "k", "c").build(),
               "id", AttributeValue.builder().n("3").build(),
               "isbn", AttributeValue.builder().s("7-236-98618").build(),
               "title", AttributeValue.builder().s("Title 3").build(),
               "price", AttributeValue.builder().n("42.00").build());

       Set<WriteRequest> writeRequests = Set.of(
               WriteRequest.builder().putRequest(b -> b.item(catalogItem)).build(),
               WriteRequest.builder().putRequest(b -> b.item(catalogItem2)).build(),
               WriteRequest.builder().putRequest(b -> b.item(catalogItem3)).build());

       Map<String, Set<WriteRequest>> productCatalogItems = Map.of(
               "ProductCatalog", writeRequests);

       BatchWriteItemResponse response = dynamoDbClient.batchWriteItem(b ->
b.requestItems(productCatalogItems));

       logger.info("Unprocessed items: " + response.unprocessedItems().size());
   }
```

Comparación: escritura por lotes mediante el cliente mejorado de DynamoDB

```
   public static void batchWriteEnhanced(DynamoDbTable<ProductCatalog> productCatalog)
{
       ProductCatalog prod = ProductCatalog.builder()
               .id(1)
               .isbn("1-565-85698")
               .authors(new HashSet<>(Arrays.asList("a", "b")))
               .price(BigDecimal.valueOf(52.13))
               .title("Title 1")
               .build();
       ProductCatalog prod2 = ProductCatalog.builder()
               .id(2)
               .isbn("1-208-98073")
               .authors(new HashSet<>(Arrays.asList("a", "b", "c")))
               .price(BigDecimal.valueOf(21.99))
               .title("Title 2")
               .build();
       ProductCatalog prod3 = ProductCatalog.builder()
               .id(3)
               .isbn("7-236-98618")
               .authors(new HashSet<>(Arrays.asList("g", "k", "c")))
               .price(BigDecimal.valueOf(42.00))
               .title("Title 3")
               .build();

       BatchWriteResult batchWriteResult = DependencyFactory.enhancedClient()
               .batchWriteItem(b -> b.writeBatches(
                       WriteBatch.builder(ProductCatalog.class)
                               .mappedTableResource(productCatalog)
                               .addPutItem(prod).addPutItem(prod2).addPutItem(prod3)
                               .build()
               ));
       logger.info("Unprocessed items: " +
batchWriteResult.unprocessedPutItemsForTable(productCatalog).size());
   }
```

Trabajar con clases de datos inmutables

La característica de asignación de la API de cliente mejorado de DynamoDB funciona con clases de datos inmutables. Una clase inmutable solo tiene getters y requiere una clase constructora que el SDK utiliza para crear instancias de la clase. En lugar de usar la anotación `@DynamoDbBean` como

se muestra en la clase Customer, las clases inmutables usan la anotación `@DynamoDbImmutable`, que toma un parámetro que indica la clase de generador que se va a usar.

La siguiente clase es una versión inmutable de `Customer`.

```
package org.example.tests.model.immutable;

import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbImmutable;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondaryPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondarySortKey;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSortKey;

import java.time.Instant;

@DynamoDbImmutable(builder = CustomerImmutable.Builder.class)
public class CustomerImmutable {
    private final String id;
    private final String name;
    private final String email;
    private final Instant regDate;

    private CustomerImmutable(Builder b) {
        this.id = b.id;
        this.email = b.email;
        this.name = b.name;
        this.regDate = b.regDate;
    }

    // This method will be automatically discovered and used by the TableSchema.
    public static Builder builder() { return new Builder(); }

    @DynamoDbPartitionKey
    public String id() { return this.id; }

    @DynamoDbSortKey
    public String email() { return this.email; }

    @DynamoDbSecondaryPartitionKey(indexNames = "customers_by_name")
    public String name() { return this.name; }
```

```
    @DynamoDbSecondarySortKey(indexNames = {"customers_by_date", "customers_by_name"})
    public Instant regDate() { return this.regDate; }

    public static final class Builder {
        private String id;
        private String email;
        private String name;
        private Instant regDate;

        // The private Builder constructor is visible to the enclosing
 CustomerImmutable class.
        private Builder() {}

        public Builder id(String id) { this.id = id; return this; }
        public Builder email(String email) { this.email = email; return this; }
        public Builder name(String name) { this.name = name; return this; }
        public Builder regDate(Instant regDate) { this.regDate = regDate; return
 this; }

        // This method will be automatically discovered and used by the TableSchema.
        public CustomerImmutable build() { return new CustomerImmutable(this); }
    }
}
```

Debe cumplir los siguientes requisitos al anotar una clase de datos con `@DynamoDbImmutable`.

1. Todo método que no sea una sustitución de `Object.class` y que no haya sido anotado con `@DynamoDbIgnore` debe ser un método de obtención de un atributo de la tabla de DynamoDB.
2. Cada getter debe tener un setter correspondiente que distinga entre mayúsculas y minúsculas en la clase de constructor.
3. Solo debe cumplirse una de las siguientes condiciones de construcción.
   - La clase de constructor debe tener un constructor público predeterminado.
   - La clase de datos debe tener un nombre de método estático público `builder()` que no tome parámetros y devuelva una instancia de clase constructor. Esta opción se muestra en la clase `Customer` inmutable.
4. La clase del constructor debe tener un método público llamado `build()` que no acepte parámetros y devuelva una instancia de la clase inmutable.

Para crear un `TableSchema` para su clase inmutable, utilice el método `fromImmutableClass()` en `TableSchema` como se muestra en el siguiente fragmento.

```
static final TableSchema<CustomerImmutable> customerImmutableTableSchema =
                         TableSchema.fromImmutableClass(CustomerImmutable.class);
```

Del mismo modo que puede crear una tabla de DynamoDB a partir de una clase mutable, también puede crear una a partir de una clase inmutable con una llamada única a `createTable()` de `DynamoDbTable` como se muestra en el siguiente ejemplo de fragmento.

```
static void createTableFromImmutable(DynamoDbEnhancedClient enhancedClient, String
 tableName, DynamoDbWaiter waiter){
    // First, create an in-memory representation of the table using the 'table()'
 method of the DynamoDb Enhanced Client.
    // 'table()' accepts a name for the table and a TableSchema instance that you
 created previously.
    DynamoDbTable<CustomerImmutable> customerDynamoDbTable = enhancedClient
            .table(tableName, TableSchema.fromImmutableClass(CustomerImmutable.class));

    // Second, call the 'createTable()' method on the DynamoDbTable instance.
    customerDynamoDbTable.createTable();
    waiter.waitUntilTableExists(b -> b.tableName(tableName));
}
```

Utilizar bibliotecas de terceros, como Lombok

Las bibliotecas de terceros, como Project Lombok, ayudan a generar código reutilizable asociado a objetos inmutables. La API de cliente mejorado de DynamoDB funciona con estas bibliotecas siempre que las clases de datos sigan las convenciones detalladas en esta sección.

En el siguiente ejemplo, se muestra la clase `CustomerImmutable` inmutable con anotaciones de Lombok. Observe cómo la característica `onMethod` de Lombok copia las anotaciones de DynamoDB basadas en atributos, como `@DynamoDbPartitionKey`, en el código generado.

```
@Value
@Builder
@DynamoDbImmutable(builder = Customer.CustomerBuilder.class)
public class Customer {
    @Getter(onMethod_=@DynamoDbPartitionKey)
    private String id;
```

```
    @Getter(onMethod_=@DynamoDbSortKey)
    private String email;

    @Getter(onMethod_=@DynamoDbSecondaryPartitionKey(indexNames = "customers_by_name"))
    private String name;

    @Getter(onMethod_=@DynamoDbSecondarySortKey(indexNames = {"customers_by_date",
 "customers_by_name"}))
    private Instant createdDate;
}
```

Usar expresiones y condiciones

Las expresiones de la API de cliente mejorado de DynamoDB son representaciones Java de las expresiones de DynamoDB.

La API de cliente mejorado de DynamoDB utiliza tres tipos de expresiones:

`Expression`

La clase `Expression` se usa al definir condiciones y filtros.

`QueryConditional`

Este tipo de expresión representa las condiciones clave para las operaciones de consulta.

`UpdateExpression`

Esta clase le ayuda a escribir expresiones de actualización de DynamoDB y actualmente se usa en el marco de extensiones al actualizar un elemento.

Anatomía de una expresión

Una expresión consta de lo siguiente:

- Una expresión de cadena (obligatoria). La cadena contiene una expresión lógica de DynamoDB con nombres de marcadores de posición para los nombres y valores de los atributos.
- Un mapa de valores de la expresión (normalmente obligatorio).
- Un mapa de nombres de expresiones (opcional).

Utilice un generador para generar un objeto `Expression` que adopte la siguiente forma general.

```
Expression expression = Expression.builder()
                            .expression(<String>)
                            .expressionNames(<Map>)
                            .expressionValues(<Map>)
                           .build()
```

Las `Expression` suelen requerir un mapa de valores de expresión. El mapa proporciona los valores de los marcadores de posición de la expresión de cadena. La clave del mapa consta del nombre del marcador de posición precedido de dos puntos (`:`) y el valor del mapa es una instancia de. AttributeValue La AttributeValuesclase tiene métodos prácticos para generar una `AttributeValue` instancia a partir de un literal. Como alternativa, puede usar el `AttributeValue.Builder` para generar una instancia de `AttributeValue`.

El siguiente fragmento muestra un mapa con dos entradas después de la línea de comentarios 2. La cadena pasada al método `expression()`, mostrada después de la línea de comentario 1, contiene los marcadores de posición que DynamoDB resuelve antes de realizar la operación. Este fragmento no contiene un mapa de nombres de expresiones, ya que el precio es un nombre de atributo permitido.

```
    public static void scanAsync(DynamoDbAsyncTable productCatalog) {
        ScanEnhancedRequest request = ScanEnhancedRequest.builder()
                .consistentRead(true)
                .attributesToProject("id", "title", "authors", "price")
                .filterExpression(Expression.builder()
                        // 1. :min_value and :max_value are placeholders for the values
provided by the map
                        .expression("price >= :min_value AND price <= :max_value")
                        // 2. Two values are needed for the expression and each is
supplied as a map entry.
                        .expressionValues(
                                Map.of( ":min_value", numberValue(8.00),
                                        ":max_value", numberValue(400_000.00)))
                        .build())
                .build();
```

Si el nombre de un atributo de la tabla de DynamoDB es una palabra reservada, comienza por un número o contiene un espacio, se requiere un mapa de nombres de expresiones para el `Expression`.

Por ejemplo, si el nombre del atributo fuera *price* en lugar de *1price* en el ejemplo de código anterior, habría que modificar el ejemplo como se muestra en el siguiente ejemplo.

```
        ScanEnhancedRequest request = ScanEnhancedRequest.builder()
                .filterExpression(Expression.builder()
                        .expression("#price >= :min_value AND #price <= :max_value")
                        .expressionNames( Map.of("#price", "1price") )
                        .expressionValues(
                                Map.of(":min_value", numberValue(8.00),
                                        ":max_value", numberValue(400_000.00)))
                        .build())
                .build();
```

Un marcador de posición del nombre de una expresión comienza con el signo de almohadilla (#). Una entrada del mapa de nombres de expresiones utiliza el marcador de posición como clave y el nombre del atributo como valor. El mapa se agrega al generador de expresiones con el método `expressionNames()`. DynamoDB resuelve el nombre del atributo antes de efectuar la operación.

Los valores de expresión no son necesarios si se utiliza una función en la expresión de cadena. Un ejemplo de función de expresión es `attribute_exists(<attribute_name>)`.

En el ejemplo siguiente, se crea una `Expression` que utiliza una función de DynamoDB. La cadena de expresión de este ejemplo no utiliza marcadores de posición. Esta expresión podría usarse en una operación `putItem` para comprobar si ya existe un elemento en la base de datos con un valor de atributo `movie` igual al atributo `movie` del objeto de datos.

```
Expression exp = Expression.builder().expression("attribute_not_exists
 (movie)").build();
```

La Guía para desarrolladores de DynamoDB contiene información completa sobre las expresiones de bajo nivel que se utilizan con DynamoDB.

Expresiones de condición y condicionales

Cuando se utilizan los métodos `putItem()`, `updateItem()` y `deleteItem()`, y también cuando se utilizan operaciones de transacción y lote, se usan objetos `Expression` para especificar las condiciones que DynamoDB debe cumplir para continuar con la operación. Estas expresiones se denominan expresiones de condición. Para ver un ejemplo, consulte la expresión de condición utilizada en el método `addDeleteItem()` (después de la línea de comentario 1) del ejemplo de transacción que se muestra en esta guía.

Cuando se trabaja con los métodos `query()`, una condición se expresa como `QueryConditional`. La clase `QueryConditional` tiene varios métodos prácticos estáticos que le ayudan a escribir los criterios que determinan qué elementos leer de DynamoDB.

Para ver ejemplos de `QueryConditionals`, consulte el primer ejemplo de código de la sección the section called “Ejemplos del método `Query`” de esta guía.

Expresiones de filtro

Las expresiones de filtro se utilizan en las operaciones de análisis y consulta para filtrar los elementos que se devuelven.

Una expresión de filtro se aplica después de haber leído todos los datos de la base de datos, por lo que el coste de lectura es el mismo que si no hubiera filtro. La Guía para desarrolladores de Amazon DynamoDB contiene más información sobre el uso de expresiones de filtro para las operaciones de consulta y análisis.

En el ejemplo siguiente, se muestra una expresión de filtro agregada a una solicitud de análisis. El criterio restringe los artículos devueltos a artículos con un precio entre 8 y 80 euros, ambos incluidos.

```
        Map<String, AttributeValue> expressionValues = Map.of(
                ":min_value", numberValue(8.00),
                ":max_value", numberValue(80.00));

        ScanEnhancedRequest request = ScanEnhancedRequest.builder()
                .consistentRead(true)
                // 1. the 'attributesToProject()' method allows you to specify which
values you want returned.
                .attributesToProject("id", "title", "authors", "price")
                // 2. Filter expression limits the items returned that match the
provided criteria.
                .filterExpression(Expression.builder()
                        .expression("price >= :min_value AND price <= :max_value")
                        .expressionValues(expressionValues)
                        .build())
                .build();
```

Expresiones de actualización

El método `updateItem()` de cliente mejorado de DynamoDB proporciona una forma estándar de actualizar elementos en DynamoDB. Sin embargo, cuando necesite más funciones, `UpdateExpressions`proporcione una representación segura de la sintaxis de las expresiones de

actualización de DynamoDB. Por ejemplo, puede usar `UpdateExpressions` para aumentar los valores sin leer primero los elementos de DynamoDB o agregar miembros individuales a una lista. Las expresiones de actualización están disponibles actualmente en extensiones personalizadas para el método `updateItem()`.

Para ver un ejemplo en el que se utilizan expresiones de actualización, consulte el ejemplo de extensión personalizada de esta guía.

Encontrará más información sobre las expresiones de actualización en la Guía para desarrolladores de Amazon DynamoDB.

Trabajar con resultados paginados: análisis y consultas

Los métodos `scan`, `query` y `batch` de la API de cliente mejorado de DynamoDB devuelven respuestas con una o varias páginas. Una página contiene uno o varios elementos. El código puede procesar la respuesta por página o procesar elementos individuales.

Una respuesta paginada devuelta por el `DynamoDbEnhancedClient` cliente síncrono devuelve un PageIterableobjeto, mientras que una respuesta devuelta por el cliente `DynamoDbEnhancedAsyncClient` asíncrono devuelve un objeto. PagePublisher

En esta sección se analiza el procesamiento de los resultados paginados y se proporcionan ejemplos en los que se utilizan el escaneo y la consulta. APIs

Examinar una tabla

El método `scan` del SDK corresponde a la operación de DynamoDB del mismo nombre. La API de cliente mejorado de DynamoDB ofrece las mismas opciones, pero utiliza un modelo de objetos conocido y gestiona la paginación por usted.

En primer lugar, exploramos la `PageIterable` interfaz analizando el `scan` método de la clase de mapeo síncrono,. DynamoDbTable

Utilizar la API síncrona

El siguiente ejemplo muestra el método `scan` que usa una expresión para filtrar los elementos que se devuelven. ProductCatalogEs el objeto modelo que se mostró anteriormente.

La expresión de filtrado que se muestra después de la línea de comentario 2 limita los `ProductCatalog` artículos devueltos a aquellos con un precio comprendido entre 8,00 y 80,00€, ambos inclusive.

En este ejemplo también se excluyen `isbn` los valores mediante el `attributesToProject` método que se muestra después de la línea de comentario 1.

Después de la línea de comentario 3, el objeto `PageIterable`, `pagedResults`, es devuelto por el método `scan`. El método `stream` de `PageIterable` devuelve un objeto `java.util.Stream`, que puede utilizar para procesar las páginas. En este ejemplo, se cuenta y se registra el número de páginas.

Empezando por la línea de comentarios 4, el ejemplo muestra dos variantes del acceso a los elementos de `ProductCatalog`. La versión posterior a la línea de comentarios 4a recorre cada página y ordena y registra los elementos de cada página. La versión siguiente a la línea de comentarios 4b omite la iteración de la página y accede a los elementos directamente.

La interfaz `PageIterable` ofrece varias formas de procesar los resultados debido a sus dos interfaces principales, `java.lang.Iterable` y `SdkIterable`. `Iterable` trae los métodos `forEach`, `iterator` y `spliterator`, y `SdkIterable` el método `stream`.

```
    public static void scanSync(DynamoDbTable<ProductCatalog> productCatalog) {

        Map<String, AttributeValue> expressionValues = Map.of(
                ":min_value", numberValue(8.00),
                ":max_value", numberValue(80.00));

        ScanEnhancedRequest request = ScanEnhancedRequest.builder()
                .consistentRead(true)
                // 1. the 'attributesToProject()' method allows you to specify which
values you want returned.
                .attributesToProject("id", "title", "authors", "price")
                // 2. Filter expression limits the items returned that match the
provided criteria.
                .filterExpression(Expression.builder()
                        .expression("price >= :min_value AND price <= :max_value")
                        .expressionValues(expressionValues)
                        .build())
                .build();

        // 3. A PageIterable object is returned by the scan method.
        PageIterable<ProductCatalog> pagedResults = productCatalog.scan(request);
        logger.info("page count: {}", pagedResults.stream().count());

        // 4. Log the returned ProductCatalog items using two variations.
        // 4a. This version sorts and logs the items of each page.
```

```
        pagedResults.stream().forEach(p -> p.items().stream()
                .sorted(Comparator.comparing(ProductCatalog::price))
                .forEach(
                        item -> logger.info(item.toString())
                ));
        // 4b. This version sorts and logs all items for all pages.
        pagedResults.items().stream()
                .sorted(Comparator.comparing(ProductCatalog::price))
                .forEach(
                        item -> logger.info(item.toString())
                );
    }
```

Utilizar la API asíncrona

El método `scan` asíncrono devuelve los resultados como un objeto `PagePublisher`. La interfaz de `PagePublisher` tiene dos métodos `subscribe` que puede utilizar para procesar las páginas de respuesta. Un método `subscribe` proviene de la interfaz principal `org.reactivestreams.Publisher`. Para procesar páginas con esta primera opción, pase una instancia `Subscriber` al método `subscribe`. En el ejemplo siguiente se muestra el uso del método `subscribe`.

El segundo `subscribe` método proviene de la interfaz. SdkPublisher Esta versión de `subscribe` acepta un `Consumer` en lugar de un `Subscriber`. Esta variación del método `subscribe` se muestra en el segundo ejemplo siguiente.

El ejemplo siguiente muestra la versión asíncrona del método `scan` que utiliza la misma expresión de filtro que se muestra en el ejemplo anterior.

Tras la línea de comentario 3, `DynamoDbAsyncTable.scan` devuelve un objeto `PagePublisher`. En la siguiente línea, el código crea una instancia de la interfaz de `org.reactivestreams.Subscriber`, `ProductCatalogSubscriber`, que se suscribe a la `PagePublisher` después de la línea de comentarios 4.

El objeto `Subscriber` recopila los elementos `ProductCatalog` de cada página del método `onNext` después de la línea de comentarios 8 del ejemplo de clase `ProductCatalogSubscriber`. Los elementos se almacenan en la variable `List` privada y se accede a ellos en el código de llamada con el método `ProductCatalogSubscriber.getSubscribedItems()`. Esto se invoca después de la línea de comentarios 5.

Una vez recuperada la lista, el código ordena todos los artículos `ProductCatalog` por precio y registra cada uno de ellos.

El comando CountDownLatchin the `ProductCatalogSubscriber` class bloquea el hilo de llamada hasta que todos los elementos se hayan agregado a la lista antes de continuar después de la línea de comentarios 5.

```
    public static void scanAsync(DynamoDbAsyncTable productCatalog) {
        ScanEnhancedRequest request = ScanEnhancedRequest.builder()
                .consistentRead(true)
                .attributesToProject("id", "title", "authors", "price")
                .filterExpression(Expression.builder()
                        // 1. :min_value and :max_value are placeholders for the values
provided by the map
                        .expression("price >= :min_value AND price <= :max_value")
                        // 2. Two values are needed for the expression and each is
supplied as a map entry.
                        .expressionValues(
                                Map.of( ":min_value", numberValue(8.00),
                                        ":max_value", numberValue(400_000.00)))
                        .build())
                .build();

        // 3. A PagePublisher object is returned by the scan method.
        PagePublisher<ProductCatalog> pagePublisher = productCatalog.scan(request);
        ProductCatalogSubscriber subscriber = new ProductCatalogSubscriber();
        // 4. Subscribe the ProductCatalogSubscriber to the PagePublisher.
        pagePublisher.subscribe(subscriber);
        // 5. Retrieve all collected ProductCatalog items accumulated by the
subscriber.
        subscriber.getSubscribedItems().stream()
                .sorted(Comparator.comparing(ProductCatalog::price))
                .forEach(item ->
                        logger.info(item.toString()));
        // 6. Use a Consumer to work through each page.
        pagePublisher.subscribe(page -> page
                        .items().stream()
                        .sorted(Comparator.comparing(ProductCatalog::price))
                        .forEach(item ->
                                logger.info(item.toString())))
                .join(); // If needed, blocks the subscribe() method thread until it is
finished processing.
        // 7. Use a Consumer to work through each ProductCatalog item.
```

```
        pagePublisher.items()
                .subscribe(product -> logger.info(product.toString()))
                .exceptionally(failure -> {
                    logger.error("ERROR  - ", failure);
                    return null;
                })
                .join(); // If needed, blocks the subscribe() method thread until it is
finished processing.
    }
```

```
    private static class ProductCatalogSubscriber implements
Subscriber<Page<ProductCatalog>> {
        private CountDownLatch latch = new CountDownLatch(1);
        private Subscription subscription;
        private List<ProductCatalog> itemsFromAllPages = new ArrayList<>();

        @Override
        public void onSubscribe(Subscription sub) {
            subscription = sub;
            subscription.request(1L);
            try {
                latch.await(); // Called by main thread blocking it until latch is
released.
            } catch (InterruptedException e) {
                throw new RuntimeException(e);
            }
        }

        @Override
        public void onNext(Page<ProductCatalog> productCatalogPage) {
            // 8. Collect all the ProductCatalog instances in the page, then ask the
publisher for one more page.
            itemsFromAllPages.addAll(productCatalogPage.items());
            subscription.request(1L);
        }

        @Override
        public void onError(Throwable throwable) {
        }

        @Override
        public void onComplete() {
            latch.countDown(); // Call by subscription thread; latch releases.
```

```
        }

        List<ProductCatalog> getSubscribedItems() {
            return this.itemsFromAllPages;
        }
    }
```

En el siguiente ejemplo de fragmento, se utiliza la versión del método `PagePublisher.subscribe` que acepta una `Consumer` después de la línea de comentario 6. El parámetro lambda de Java consume páginas, que procesan aún más cada elemento. En este ejemplo, se procesa cada página y los elementos de cada página se ordenan y, a continuación, se registran.

```
        // 6. Use a Consumer to work through each page.
        pagePublisher.subscribe(page -> page
                        .items().stream()
                        .sorted(Comparator.comparing(ProductCatalog::price))
                        .forEach(item ->
                                logger.info(item.toString())))
                .join(); // If needed, blocks the subscribe() method thread until it is
finished processing.
```

El método `items` de `PagePublisher` separa las instancias del modelo para que el código pueda procesar los elementos directamente. Este método se muestra en el fragmento de código siguiente.

```
        // 7. Use a Consumer to work through each ProductCatalog item.
        pagePublisher.items()
                .subscribe(product -> logger.info(product.toString()))
                .exceptionally(failure -> {
                    logger.error("ERROR  - ", failure);
                    return null;
                })
                .join(); // If needed, blocks the subscribe() method thread until it is
finished processing.
```

Consultar una tabla

Puede utilizar DynamoDB Enhanced Client para consultar la tabla y recuperar varios elementos que coincidan con criterios específicos. El método `query()` busca los elementos en función de los valores clave principales mediante la anotación `@DynamoDbPartitionKey` y, opcionalmente, la `@DynamoDbSortKey` definidas en la clase de datos.

El método `query()` requiere un valor de clave de partición y, de forma opcional, acepta condiciones de clave de clasificación para afinar aún más los resultados. Al igual que la API `scan`, las consultas devuelven una `PageIterable` para llamadas sincrónicas y una `PagePublisher` para asincrónicas.

Ejemplos del método **`Query`**

El ejemplo de código del método `query()` siguiente utiliza la clase `MovieActor`. La clase de datos define una clave primaria compuesta que se compone del atributo **`movie`** como clave de partición y el atributo **`actor`** como clave de clasificación.

Clase **`MovieActor`**

```
package org.example.tests.model;

import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbAttribute;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbBean;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondaryPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondarySortKey;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSortKey;

import java.util.Objects;

@DynamoDbBean
public class MovieActor implements Comparable<MovieActor> {

    private String movieName;
    private String actorName;
    private String actingAward;
    private Integer actingYear;
    private String actingSchoolName;

    @DynamoDbPartitionKey
    @DynamoDbAttribute("movie")
    public String getMovieName() {
        return movieName;
    }

    public void setMovieName(String movieName) {
```

```
        this.movieName = movieName;
    }

    @DynamoDbSortKey
    @DynamoDbAttribute("actor")
    public String getActorName() {
        return actorName;
    }

    public void setActorName(String actorName) {
        this.actorName = actorName;
    }

    @DynamoDbSecondaryPartitionKey(indexNames = "acting_award_year")
    @DynamoDbAttribute("actingaward")
    public String getActingAward() {
        return actingAward;
    }

    public void setActingAward(String actingAward) {
        this.actingAward = actingAward;
    }

    @DynamoDbSecondarySortKey(indexNames = {"acting_award_year", "movie_year"})
    @DynamoDbAttribute("actingyear")
    public Integer getActingYear() {
        return actingYear;
    }

    public void setActingYear(Integer actingYear) {
        this.actingYear = actingYear;
    }

    @DynamoDbAttribute("actingschoolname")
    public String getActingSchoolName() {
        return actingSchoolName;
    }

    public void setActingSchoolName(String actingSchoolName) {
        this.actingSchoolName = actingSchoolName;
    }

    @Override
    public String toString() {
```

```
        final StringBuffer sb = new StringBuffer("MovieActor{");
        sb.append("movieName='").append(movieName).append('\'');
        sb.append(", actorName='").append(actorName).append('\'');
        sb.append(", actingAward='").append(actingAward).append('\'');
        sb.append(", actingYear=").append(actingYear);
        sb.append(", actingSchoolName='").append(actingSchoolName).append('\'');
        sb.append('}');
        return sb.toString();
    }

    @Override
    public boolean equals(Object o) {
        if (this == o) return true;
        if (o == null || getClass() != o.getClass()) return false;
        MovieActor that = (MovieActor) o;
        return Objects.equals(movieName, that.movieName) && Objects.equals(actorName,
 that.actorName) && Objects.equals(actingAward, that.actingAward) &&
 Objects.equals(actingYear, that.actingYear) && Objects.equals(actingSchoolName,
 that.actingSchoolName);
    }

    @Override
    public int hashCode() {
        return Objects.hash(movieName, actorName, actingAward, actingYear,
 actingSchoolName);
    }

    @Override
    public int compareTo(MovieActor o) {
        if (this.movieName.compareTo(o.movieName) != 0){
            return this.movieName.compareTo(o.movieName);
        } else {
            return this.actorName.compareTo(o.actorName);
        }
    }
}
```

Los ejemplos de código que aparecen a continuación se refieren a los siguientes elementos.

Elementos de la tabla **`MovieActor`**

```
MovieActor{movieName='movie01', actorName='actor0', actingAward='actingaward0',
 actingYear=2001, actingSchoolName='null'}
```

```
MovieActor{movieName='movie01', actorName='actor1', actingAward='actingaward1',
 actingYear=2001, actingSchoolName='actingschool1'}
MovieActor{movieName='movie01', actorName='actor2', actingAward='actingaward2',
 actingYear=2001, actingSchoolName='actingschool2'}
MovieActor{movieName='movie01', actorName='actor3', actingAward='actingaward3',
 actingYear=2001, actingSchoolName='null'}
MovieActor{movieName='movie01', actorName='actor4', actingAward='actingaward4',
 actingYear=2001, actingSchoolName='actingschool4'}
MovieActor{movieName='movie02', actorName='actor0', actingAward='actingaward0',
 actingYear=2002, actingSchoolName='null'}
MovieActor{movieName='movie02', actorName='actor1', actingAward='actingaward1',
 actingYear=2002, actingSchoolName='actingschool1'}
MovieActor{movieName='movie02', actorName='actor2', actingAward='actingaward2',
 actingYear=2002, actingSchoolName='actingschool2'}
MovieActor{movieName='movie02', actorName='actor3', actingAward='actingaward3',
 actingYear=2002, actingSchoolName='null'}
MovieActor{movieName='movie02', actorName='actor4', actingAward='actingaward4',
 actingYear=2002, actingSchoolName='actingschool4'}
MovieActor{movieName='movie03', actorName='actor0', actingAward='actingaward0',
 actingYear=2003, actingSchoolName='null'}
MovieActor{movieName='movie03', actorName='actor1', actingAward='actingaward1',
 actingYear=2003, actingSchoolName='actingschool1'}
MovieActor{movieName='movie03', actorName='actor2', actingAward='actingaward2',
 actingYear=2003, actingSchoolName='actingschool2'}
MovieActor{movieName='movie03', actorName='actor3', actingAward='actingaward3',
 actingYear=2003, actingSchoolName='null'}
MovieActor{movieName='movie03', actorName='actor4', actingAward='actingaward4',
 actingYear=2003, actingSchoolName='actingschool4'}
```

El siguiente código define dos instancias `QueryConditional`: `keyEqual` (después de la línea de comentario 1) y `sortGreaterThanOrEqualTo` (después de la línea de comentario 1a).

Consulta de elementos por clave de partición

La instancia `keyEqual` asocia los elementos con un valor de clave de partición de **`movie01`**.

Este ejemplo también define una expresión de filtro después de la línea de comentario 2 que filtra cualquier elemento que no tenga un valor de **`actingschoolname`**.

La `QueryEnhancedRequest` combina la condición de clave y la expresión de filtro de la consulta.

```
    public static void query(DynamoDbTable movieActorTable) {
```

```
        // 1. Define a QueryConditional instance to return items matching a partition
 value.
        QueryConditional keyEqual = QueryConditional.keyEqualTo(b ->
 b.partitionValue("movie01"));
        // 1a. Define a QueryConditional that adds a sort key criteria to the partition
 value criteria.
        QueryConditional sortGreaterThanOrEqualTo =
 QueryConditional.sortGreaterThanOrEqualTo(b ->
 b.partitionValue("movie01").sortValue("actor2"));
        // 2. Define a filter expression that filters out items whose attribute value
 is null.
        final Expression filterOutNoActingschoolname =
 Expression.builder().expression("attribute_exists(actingschoolname)").build();

        // 3. Build the query request.
        QueryEnhancedRequest tableQuery = QueryEnhancedRequest.builder()
                .queryConditional(keyEqual)
                .filterExpression(filterOutNoActingschoolname)
                .build();
        // 4. Perform the query using the "keyEqual" conditional and filter expression.
        PageIterable<MovieActor> pagedResults = movieActorTable.query(tableQuery);
        logger.info("page count: {}", pagedResults.stream().count()); // Log  number of
 pages.

        pagedResults.items().stream()
                .sorted()
                .forEach(
                        item -> logger.info(item.toString()) // Log the sorted list of
 items.
                );
```

Example— Salida utilizando el condicional de consulta keyEqual

Se genera la siguiente salida de la ejecución del método. El resultado muestra los elementos con un valor `movieName` de movie01 y no muestra ningún elemento con `actingSchoolName` igual a **`null`**.

```
2023-03-05 13:11:05 [main] INFO  org.example.tests.QueryDemo:46 - page count: 1
2023-03-05 13:11:05 [main] INFO  org.example.tests.QueryDemo:51 -
 MovieActor{movieName='movie01', actorName='actor1', actingAward='actingaward1',
 actingYear=2001, actingSchoolName='actingschool1'}
2023-03-05 13:11:05 [main] INFO  org.example.tests.QueryDemo:51 -
 MovieActor{movieName='movie01', actorName='actor2', actingAward='actingaward2',
 actingYear=2001, actingSchoolName='actingschool2'}
```

```
2023-03-05 13:11:05 [main] INFO  org.example.tests.QueryDemo:51 -
 MovieActor{movieName='movie01', actorName='actor4', actingAward='actingaward4',
 actingYear=2001, actingSchoolName='actingschool4'}
```

Consulta de elementos por clave de partición y clave de clasificación

La `QueryConditional` `sortGreaterThanOrEqualTo` afina la coincidencia de clave de partición (movie01) añadiendo una condición de clave de clasificación para valores mayores o iguales que actor2.

Los métodos de `QueryConditional` que comienzan por `sort` requieren un valor de clave de partición para asociar y afinar aún más la consulta mediante una comparación basada en el valor de la clave de clasificación. `Sort` en el nombre del método no significa que los resultados estén clasificados, sino que se utilizará un valor de clave de clasificación para comparación.

En el siguiente fragmento cambiamos la solicitud de consulta que mostrada anteriormente después de la línea de comentario 3. Este fragmento reemplaza el condicional de consulta «keyEqual» por el condicional de consulta «» que se definió sortGreaterThan OrEqualTo después de la línea de comentario 1a. El código siguiente también elimina la expresión del filtro.

```
        QueryEnhancedRequest tableQuery = QueryEnhancedRequest.builder()
                .queryConditional(sortGreaterThanOrEqualTo).build();
```

Example— Salida utilizando el condicional de consulta sortGreaterThanOrEqualTo

La siguiente salida muestra los resultados de la consulta. La consulta devuelve los elementos que tienen un valor `movieName` igual a movie01 y solo los elementos que tienen un valor `actorName` mayor o igual a actor2. Dado que quitamos el filtro, la consulta devuelve elementos que no tienen ningún valor para el atributo `actingSchoolName`.

```
2023-03-05 13:15:00 [main] INFO  org.example.tests.QueryDemo:46 - page count: 1
2023-03-05 13:15:00 [main] INFO  org.example.tests.QueryDemo:51 -
 MovieActor{movieName='movie01', actorName='actor2', actingAward='actingaward2',
 actingYear=2001, actingSchoolName='actingschool2'}
2023-03-05 13:15:00 [main] INFO  org.example.tests.QueryDemo:51 -
 MovieActor{movieName='movie01', actorName='actor3', actingAward='actingaward3',
 actingYear=2001, actingSchoolName='null'}
2023-03-05 13:15:00 [main] INFO  org.example.tests.QueryDemo:51 -
 MovieActor{movieName='movie01', actorName='actor4', actingAward='actingaward4',
 actingYear=2001, actingSchoolName='actingschool4'}
```

Realizar operaciones por lotes

La API de cliente mejorado de DynamoDB ofrece dos métodos por lotes, `batchGetItem()` y `batchWriteItem()`.

`batchGetItem()`Ejemplo de

Con el método `DynamoDbEnhancedClient.batchGetItem()`, puede recuperar hasta 100 elementos individuales de varias tablas en una solicitud general. En el siguiente ejemplo, se utilizan las clases de datos `Customer` y `MovieActor` mostradas anteriormente.

En el ejemplo, después de las líneas 1 y 2, se crean objetos `ReadBatch` que se añaden posteriormente como parámetros al método `batchGetItem()` después de la línea de comentarios 3.

El código que sigue a la línea de comentarios 1 crea el lote para leerlo de la tabla `Customer`.
El código que sigue a la línea de comentario 1a muestra el uso de un compilador de `GetItemEnhancedRequest` que toma un valor de clave principal y un valor de clave de clasificación para especificar el elemento que se va a leer. Si la clase de datos tiene una clave compuesta, debe proporcionar tanto el valor de la clave de partición como el valor de la clave de clasificación.

A diferencia de especificar valores clave para solicitar un elemento, puede usar una clase de datos para solicitar un elemento, como se muestra después de la línea de comentario 1b. El SDK extrae automáticamente los valores clave de manera interna antes de enviar la solicitud.

Cuando especifique el elemento utilizando el enfoque basado en claves, como se muestra en las dos instrucciones posteriores a 2a, también puede especificar que DynamoDB realice una lectura altamente coherente. Cuando se utilice el método `consistentRead()`, se debe utilizar en todos los elementos solicitados de la misma tabla.

Para recuperar los elementos encontrados por DynamoDB, utilice el método `resultsForTable()` que se muestra después de la línea de comentarios 4. Llame al método de cada tabla que se haya leído en la solicitud. `resultsForTable()` devuelve una lista de los elementos encontrados que puede procesar mediante cualquier método `java.util.List`. En este ejemplo se registra cada elemento.

Para descubrir elementos que DynamoDB no procesó, utilice el enfoque que aparece después de la línea de comentarios 5. La clase `BatchGetResultPage` tiene el método

unprocessedKeysForTable() que permite acceder a todas las claves que no se hayan procesado. La referencia de la BatchGetItem API contiene más información sobre situaciones que dan como resultado elementos sin procesar.

```
    public static void batchGetItemExample(DynamoDbEnhancedClient enhancedClient,
                                           DynamoDbTable<Customer> customerTable,
                                           DynamoDbTable<MovieActor> movieActorTable) {

        Customer customer2 = new Customer();
        customer2.setId("2");
        customer2.setEmail("cust2@example.org");

        // 1. Build a batch to read from the Customer table.
        ReadBatch customerBatch = ReadBatch.builder(Customer.class)
                .mappedTableResource(customerTable)
                // 1a. Specify the primary key value and sort key value for the item.
                .addGetItem(b -> b.key(k ->
k.partitionValue("1").sortValue("cust1@orgname.org")))
                // 1b. Alternatively, supply a data class instances to provide the
primary key values.
                .addGetItem(customer2)
                .build();

        // 2. Build a batch to read from the MovieActor table.
        ReadBatch moveActorBatch = ReadBatch.builder(MovieActor.class)
                .mappedTableResource(movieActorTable)
                // 2a. Call consistentRead(Boolean.TRUE) for each item for the same
table.
                .addGetItem(b -> b.key(k ->
k.partitionValue("movie01").sortValue("actor1")).consistentRead(Boolean.TRUE))
                .addGetItem(b -> b.key(k ->
k.partitionValue("movie01").sortValue("actor4")).consistentRead(Boolean.TRUE))
                .build();

        // 3. Add ReadBatch objects to the request.
        BatchGetResultPageIterable resultPages = enhancedClient.batchGetItem(b ->
b.readBatches(customerBatch, moveActorBatch));

        // 4. Retrieve the successfully requested items from each table.
        resultPages.resultsForTable(customerTable).forEach(item ->
logger.info(item.toString()));
        resultPages.resultsForTable(movieActorTable).forEach(item ->
logger.info(item.toString()));
```

```
        // 5. Retrieve the keys of the items requested but not processed by the
 service.
        resultPages.forEach((BatchGetResultPage pageResult) -> {
            pageResult.unprocessedKeysForTable(customerTable).forEach(key ->
 logger.info("Unprocessed item key: " + key.toString()));
            pageResult.unprocessedKeysForTable(movieActorTable).forEach(key ->
 logger.info("Unprocessed item key: " + key.toString()));
        });
    }
```

Suponga que los siguientes elementos están en las dos tablas antes de ejecutar el código de ejemplo.

Elementos de la tabla

```
Customer [id=1, name=CustName1, email=cust1@example.org,
 regDate=2023-03-31T15:46:27.688Z]
Customer [id=2, name=CustName2, email=cust2@example.org,
 regDate=2023-03-31T15:46:28.688Z]
Customer [id=3, name=CustName3, email=cust3@example.org,
 regDate=2023-03-31T15:46:29.688Z]
Customer [id=4, name=CustName4, email=cust4@example.org,
 regDate=2023-03-31T15:46:30.688Z]
Customer [id=5, name=CustName5, email=cust5@example.org,
 regDate=2023-03-31T15:46:31.689Z]
MovieActor{movieName='movie01', actorName='actor0', actingAward='actingaward0',
 actingYear=2001, actingSchoolName='null'}
MovieActor{movieName='movie01', actorName='actor1', actingAward='actingaward1',
 actingYear=2001, actingSchoolName='actingschool1'}
MovieActor{movieName='movie01', actorName='actor2', actingAward='actingaward2',
 actingYear=2001, actingSchoolName='actingschool2'}
MovieActor{movieName='movie01', actorName='actor3', actingAward='actingaward3',
 actingYear=2001, actingSchoolName='null'}
MovieActor{movieName='movie01', actorName='actor4', actingAward='actingaward4',
 actingYear=2001, actingSchoolName='actingschool4'}
```

El siguiente resultado muestra los elementos devueltos y registrados después de la línea de comentarios 4.

```
Customer [id=1, name=CustName1, email=cust1@example.org,
 regDate=2023-03-31T15:46:27.688Z]
```

```
Customer [id=2, name=CustName2, email=cust2@example.org,
 regDate=2023-03-31T15:46:28.688Z]
MovieActor{movieName='movie01', actorName='actor4', actingAward='actingaward4',
 actingYear=2001, actingSchoolName='actingschool4'}
MovieActor{movieName='movie01', actorName='actor1', actingAward='actingaward1',
 actingYear=2001, actingSchoolName='actingschool1'}
```

`batchWriteItem()`Ejemplo de

El método `batchWriteItem()` pone o borra varios elementos en una o varias tablas. Puede especificar hasta 25 operaciones individuales de colocación o borrado en la solicitud. En el siguiente ejemplo, se utilizan las clases de modelos `ProductCatalog` y `MovieActor` mostradas anteriormente.

Los objetos de `WriteBatch` se crean después de las líneas de comentario 1 y 2. En la tabla `ProductCatalog`, el código coloca un elemento y elimina otro. En la tabla `MovieActor` situada después de la línea de comentarios 2, el código coloca dos elementos y elimina uno.

El método `batchWriteItem` se llama después de la línea de comentarios 3. El parámetro `builder` proporciona las solicitudes de lote para cada tabla.

El objeto devuelto `BatchWriteResult` proporciona métodos independientes para cada operación a fin de ver las solicitudes no procesadas. El código que sigue a la línea de comentarios 4a proporciona las claves para las solicitudes de eliminación sin procesar y el código que sigue a la línea de comentarios 4b proporciona los elementos de venta sin procesar.

```
   public static void batchWriteItemExample(DynamoDbEnhancedClient enhancedClient,
                                            DynamoDbTable<ProductCatalog>
catalogTable,
                                            DynamoDbTable<MovieActor> movieActorTable)
{

       // 1. Build a batch to write to the ProductCatalog table.
       WriteBatch products = WriteBatch.builder(ProductCatalog.class)
               .mappedTableResource(catalogTable)
               .addPutItem(b -> b.item(getProductCatItem1()))
               .addDeleteItem(b -> b.key(k -> k
                       .partitionValue(getProductCatItem2().id())
                       .sortValue(getProductCatItem2().title())))
               .build();

       // 2. Build a batch to write to the MovieActor table.
```

```
        WriteBatch movies = WriteBatch.builder(MovieActor.class)
                .mappedTableResource(movieActorTable)
                .addPutItem(getMovieActorYeoh())
                .addPutItem(getMovieActorBlanchettPartial())
                .addDeleteItem(b -> b.key(k -> k
                        .partitionValue(getMovieActorStreep().getMovieName())
                        .sortValue(getMovieActorStreep().getActorName())))
                .build();

        // 3. Add WriteBatch objects to the request.
        BatchWriteResult batchWriteResult = enhancedClient.batchWriteItem(b ->
b.writeBatches(products, movies));
        // 4. Retrieve keys for items the service did not process.
        // 4a. 'unprocessedDeleteItemsForTable()' returns keys for delete requests that
did not process.
        if (batchWriteResult.unprocessedDeleteItemsForTable(movieActorTable).size() >
0) {

batchWriteResult.unprocessedDeleteItemsForTable(movieActorTable).forEach(key ->
                    logger.info(key.toString()));
        }
        // 4b. 'unprocessedPutItemsForTable()' returns keys for put requests that did
not process.
        if (batchWriteResult.unprocessedPutItemsForTable(catalogTable).size() > 0) {
            batchWriteResult.unprocessedPutItemsForTable(catalogTable).forEach(key ->
                    logger.info(key.toString()));
        }
    }
```

Los siguientes métodos auxiliares proporcionan los objetos modelo para las operaciones de colocación y eliminación.

Métodos auxiliares

```
    public static ProductCatalog getProductCatItem1() {
        return ProductCatalog.builder()
                .id(2)
                .isbn("1-565-85698")
                .authors(new HashSet<>(Arrays.asList("a", "b")))
                .price(BigDecimal.valueOf(30.22))
                .title("Title 55")
                .build();
    }
```

```
    public static ProductCatalog getProductCatItem2() {
        return ProductCatalog.builder()
                .id(4)
                .price(BigDecimal.valueOf(40.00))
                .title("Title 1")
                .build();
    }

    public static MovieActor getMovieActorBlanchettPartial() {
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Cate Blanchett");
        movieActor.setMovieName("Blue Jasmine");
        movieActor.setActingYear(2023);
        movieActor.setActingAward("Best Actress");
        return movieActor;
    }

    public static MovieActor getMovieActorStreep() {
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Meryl Streep");
        movieActor.setMovieName("Sophie's Choice");
        movieActor.setActingYear(1982);
        movieActor.setActingAward("Best Actress");
        movieActor.setActingSchoolName("Yale School of Drama");
        return movieActor;
    }

    public static MovieActor getMovieActorYeoh(){
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Michelle Yeoh");
        movieActor.setMovieName("Everything Everywhere All at Once");
        movieActor.setActingYear(2023);
        movieActor.setActingAward("Best Actress");
        movieActor.setActingSchoolName("Royal Academy of Dance");
        return movieActor;
    }
```

Suponga que las tablas contienen los siguientes elementos antes de ejecutar el código de ejemplo.

```
MovieActor{movieName='Blue Jasmine', actorName='Cate Blanchett', actingAward='Best
 Actress', actingYear=2013, actingSchoolName='National Institute of Dramatic Art'}
```

```
MovieActor{movieName='Sophie's Choice', actorName='Meryl Streep', actingAward='Best
 Actress', actingYear=1982, actingSchoolName='Yale School of Drama'}
ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=10}
```

Una vez finalizado el código de ejemplo, las tablas contienen los siguientes elementos.

```
MovieActor{movieName='Blue Jasmine', actorName='Cate Blanchett', actingAward='Best
 Actress', actingYear=2013, actingSchoolName='null'}
MovieActor{movieName='Everything Everywhere All at Once', actorName='Michelle Yeoh',
 actingAward='Best Actress', actingYear=2023, actingSchoolName='Royal Academy of
 Dance'}
ProductCatalog{id=2, title='Title 55', isbn='1-565-85698', authors=[a, b], price=30.22}
```

Observe en la tabla `MovieActor` que el elemento de la película `Blue Jasmine` se ha sustituido por el elemento utilizado en la solicitud de venta adquirida mediante el método auxiliar `getMovieActorBlanchettPartial()`. Si no se ha proporcionado el valor de un atributo de un objeto de datos, se elimina el valor de la base de datos. Esta es la razón por la que el `actingSchoolName` resultante es nulo para el elemento de la película `Blue Jasmine`.

> **Note**
>
> Aunque la documentación de la API sugiere que pueden utilizarse expresiones de condición y que las métricas de capacidad consumida y de recogida pueden devolverse con solicitudes individuales de put y delete, esto no es así en un escenario de escritura por lotes. Para mejorar el rendimiento de las operaciones por lotes, se ignoran estas opciones individuales.

Realizar operaciones de transacciones

La API de cliente mejorado de DynamoDB proporciona los `transactGetItems()` y los métodos `transactWriteItems()`. Los métodos de transacción del SDK para Java proporcionan atomicidad, consistencia, aislamiento y durabilidad (ACID) en las tablas de DynamoDB, ayudándole a mantener la corrección de los datos en sus aplicaciones.

`transactGetItems()`Ejemplo de

El método `transactGetItems()` admite hasta 100 solicitudes individuales de artículos. Todos los artículos se leen en una sola transacción atómica. La Guía para desarrolladores de Amazon DynamoDB contiene información sobre las condiciones que hacen que un método

`transactGetItems()` falle, y también sobre el nivel de aislamiento utilizado cuando se llama a `transactGetItem()`.

Tras la línea de comentarios 1 del siguiente ejemplo, el código llama al método `transactGetItems()` con un parámetro `builder`. El generador `addGetItem()` se invoca tres veces con un objeto de datos que contiene los valores clave que el SDK utilizará para generar la solicitud final.

La solicitud devuelve una lista de objetos `Document` después de la línea de comentarios 2. La lista de documentos que se devuelve contiene instancias de documentos no nulas de los datos de los artículos en el mismo orden solicitado. El método `Document.getItem(MappedTableResource<T> mappedTableResource)` convierte un objeto sin tipo en un objeto `Document` Java con tipo si se devolvieron los datos del elemento; de lo contrario, el método devuelve un valor nulo.

```
    public static void transactGetItemsExample(DynamoDbEnhancedClient enhancedClient,
                                               DynamoDbTable<ProductCatalog>
catalogTable,
                                               DynamoDbTable<MovieActor>
movieActorTable) {

        // 1. Request three items from two tables using a builder.
        final List<Document> documents = enhancedClient.transactGetItems(b -> b
                .addGetItem(catalogTable,
Key.builder().partitionValue(2).sortValue("Title 55").build())
                .addGetItem(movieActorTable, Key.builder().partitionValue("Sophie's
Choice").sortValue("Meryl Streep").build())
                .addGetItem(movieActorTable, Key.builder().partitionValue("Blue
Jasmine").sortValue("Cate Blanchett").build())
                .build());

        // 2. A list of Document objects is returned in the same order as requested.
        ProductCatalog title55 = documents.get(0).getItem(catalogTable);
        if (title55 != null) {
            logger.info(title55.toString());
        }

        MovieActor sophiesChoice = documents.get(1).getItem(movieActorTable);
        if (sophiesChoice != null) {
            logger.info(sophiesChoice.toString());
        }
```

```
        // 3. The getItem() method returns null if the Document object contains no item
from DynamoDB.
        MovieActor blueJasmine = documents.get(2).getItem(movieActorTable);
        if (blueJasmine != null) {
            logger.info(blueJasmine.toString());
        }
    }
```

Las tablas de DynamoDB contienen los siguientes elementos antes de que se ejecute el ejemplo de código.

```
ProductCatalog{id=2, title='Title 55', isbn='orig_isbn', authors=[b, g], price=10}
MovieActor{movieName='Sophie's Choice', actorName='Meryl Streep', actingAward='Best
 Actress', actingYear=1982, actingSchoolName='Yale School of Drama'}
```

Se registra la siguiente salida. Si se solicita un elemento pero no se encuentra, no se devuelve, como ocurre con la solicitud de la película nombrada `Blue Jasmine`.

```
ProductCatalog{id=2, title='Title 55', isbn='orig_isbn', authors=[b, g], price=10}
MovieActor{movieName='Sophie's Choice', actorName='Meryl Streep', actingAward='Best
 Actress', actingYear=1982, actingSchoolName='Yale School of Drama'}
```

Ejemplos de **`transactWriteItems()`**

El `transactWriteItems()` acepta hasta 100 acciones para colocar, actualizar o eliminar en una única transacción atómica a través de varias tablas. La Guía para desarrolladores de Amazon DynamoDB contiene detalles sobre las restricciones y las condiciones de fallo del funcionamiento del servicio DynamoDB subyacente.

Ejemplo básico

En el ejemplo siguiente, se solicitan cuatro operaciones para dos tablas. Las clases de modelos correspondientes `ProductCatalog` y `MovieActor` se mostraron anteriormente.

Cada una de las tres operaciones posibles (poner, actualizar y eliminar) utiliza un parámetro de solicitud específico para especificar los detalles.

El código bajo la línea de comentarios 1 muestra la variación simple del método `addPutItem()`. El método acepta un objeto `MappedTableResource` y la instancia del objeto de datos para colocarlo. La declaración que sigue a la línea de comentarios 2 muestra la variación que acepta una instancia

`TransactPutItemEnhancedRequest`. Esta variante permite añadir más opciones a la solicitud, como una expresión de condición. En un ejemplo posterior, se muestra una expresión de condición para una operación individual.

Se solicita una operación de actualización después de la línea de comentario 3. `TransactUpdateItemEnhancedRequest` tiene un método `ignoreNulls()` que permite configurar lo que hace el SDK con los valores `null` del objeto modelo. Si el método `ignoreNulls()` devuelve el valor true, el SDK no elimina los valores de los atributos de la tabla para los atributos del objeto de datos que son `null`. Si el método `ignoreNulls()` devuelve false, el SDK solicita al servicio DynamoDB que elimine los atributos del elemento de la tabla. El valor predeterminado de `ignoreNulls` es false.

La instrucción tras la línea de comentario 4 muestra la variación de una petición de borrado que toma un objeto de datos. El cliente mejorado extrae los valores clave antes de enviar la solicitud final.

```
    public static void transactWriteItems(DynamoDbEnhancedClient enhancedClient,
                                          DynamoDbTable<ProductCatalog> catalogTable,
                                          DynamoDbTable<MovieActor> movieActorTable) {

        enhancedClient.transactWriteItems(b -> b
                // 1. Simplest variation of put item request.
                .addPutItem(catalogTable, getProductCatId2())
                // 2. Put item request variation that accommodates condition
expressions.
                .addPutItem(movieActorTable,
TransactPutItemEnhancedRequest.builder(MovieActor.class)
                        .item(getMovieActorStreep())

.conditionExpression(Expression.builder().expression("attribute_not_exists
(movie)").build())
                        .build())
                // 3. Update request that does not remove attribute values on the table
if the data object's value is null.
                .addUpdateItem(catalogTable,
TransactUpdateItemEnhancedRequest.builder(ProductCatalog.class)
                        .item(getProductCatId4ForUpdate())
                        .ignoreNulls(Boolean.TRUE)
                        .build())
                // 4. Variation of delete request that accepts a data object. The key
values are extracted for the request.
                .addDeleteItem(movieActorTable, getMovieActorBlanchett())
        );
```

```
    }
```

Los siguientes métodos auxiliares proporcionan los objetos de datos para los parámetros `add*Item`.

Métodos auxiliares

```
    public static ProductCatalog getProductCatId2() {
        return ProductCatalog.builder()
                .id(2)
                .isbn("1-565-85698")
                .authors(new HashSet<>(Arrays.asList("a", "b")))
                .price(BigDecimal.valueOf(30.22))
                .title("Title 55")
                .build();
    }

    public static ProductCatalog getProductCatId4ForUpdate() {
        return ProductCatalog.builder()
                .id(4)
                .price(BigDecimal.valueOf(40.00))
                .title("Title 1")
                .build();
    }

    public static MovieActor getMovieActorBlanchett() {
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Cate Blanchett");
        movieActor.setMovieName("Tar");
        movieActor.setActingYear(2022);
        movieActor.setActingAward("Best Actress");
        movieActor.setActingSchoolName("National Institute of Dramatic Art");
        return movieActor;
    }

    public static MovieActor getMovieActorStreep() {
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Meryl Streep");
        movieActor.setMovieName("Sophie's Choice");
        movieActor.setActingYear(1982);
        movieActor.setActingAward("Best Actress");
        movieActor.setActingSchoolName("Yale School of Drama");
        return movieActor;
    }
```

Las tablas de DynamoDB contienen los siguientes elementos antes de que se ejecute el ejemplo de código.

```
1 | ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=10}
2 | MovieActor{movieName='Tar', actorName='Cate Blanchett', actingAward='Best Actress',
 actingYear=2022, actingSchoolName='National Institute of Dramatic Art'}
```

Los siguientes elementos aparecen en las tablas después de que el código termine de ejecutarse.

```
3 | ProductCatalog{id=2, title='Title 55', isbn='1-565-85698', authors=[a, b],
 price=30.22}
4 | ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=40.0}
5 | MovieActor{movieName='Sophie's Choice', actorName='Meryl Streep', actingAward='Best
 Actress', actingYear=1982, actingSchoolName='Yale School of Drama'}
```

Se ha eliminado el elemento de la línea 2 y las líneas 3 y 5 muestran los elementos que se colocaron. La línea 4 muestra la actualización de la línea 1. El valor `price` es el único que ha cambiado en el artículo. Si `ignoreNulls()` hubiera devuelto false, la línea 4 tendría el siguiente aspecto.

```
ProductCatalog{id=4, title='Title 1', isbn='null', authors=null, price=40.0}
```

Ejemplo de comprobación de estado

En el siguiente ejemplo, se muestra el uso de una comprobación de estado. Una comprobación de estado se utiliza para comprobar la existencia de un elemento o para comprobar el estado de atributos concretos de un elemento en la base de datos. El artículo registrado en la verificación de estado no se puede utilizar en otra operación de la transacción.

> **Note**
>
> No se pueden dirigir varias operaciones de la misma transacción al mismo elemento. Por ejemplo, no puede llevar a cabo una comprobación de condiciones y además intentar actualizar el mismo artículo en la misma transacción.

El ejemplo muestra una operación de cada tipo en una solicitud transaccional de escritura de artículos. Después de la línea de comentario 2, el método `addConditionCheck()` suministra

la condición que falla la transacción si el parámetro `conditionExpression` se evalúa como `false`. La expresión de condición que devuelve el método mostrado en el bloque Métodos auxiliares comprueba si el año de concesión de la película `Sophie's Choice` no es igual a 1982. Si es así, la expresión se evalúa como `false` y la transacción no se realiza correctamente.

Esta guía analiza en profundidad las expresiones en otro tema.

```
   public static void conditionCheckFailExample(DynamoDbEnhancedClient enhancedClient,
                                                DynamoDbTable<ProductCatalog>
catalogTable,
                                                DynamoDbTable<MovieActor>
movieActorTable) {

       try {
           enhancedClient.transactWriteItems(b -> b
                   // 1. Perform one of each type of operation with the next three
methods.
                   .addPutItem(catalogTable,
TransactPutItemEnhancedRequest.builder(ProductCatalog.class)
                           .item(getProductCatId2()).build())
                   .addUpdateItem(catalogTable,
TransactUpdateItemEnhancedRequest.builder(ProductCatalog.class)
                           .item(getProductCatId4ForUpdate())
                           .ignoreNulls(Boolean.TRUE).build())
                   .addDeleteItem(movieActorTable,
TransactDeleteItemEnhancedRequest.builder()
                           .key(b1 -> b1

.partitionValue(getMovieActorBlanchett().getMovieName())

.sortValue(getMovieActorBlanchett().getActorName())).build())
                   // 2. Add a condition check on a table item that is not involved in
another operation in this request.
                   .addConditionCheck(movieActorTable, ConditionCheck.builder()
                           .conditionExpression(buildConditionCheckExpression())
                           .key(k -> k
                                   .partitionValue("Sophie's Choice")
                                   .sortValue("Meryl Streep"))
                           // 3. Specify the request to return existing values from
the item if the condition evaluates to true.

.returnValuesOnConditionCheckFailure(ReturnValuesOnConditionCheckFailure.ALL_OLD)
                           .build())
```

```
                .build());
        // 4. Catch the exception if the transaction fails and log the information.
        } catch (TransactionCanceledException ex) {
            ex.cancellationReasons().stream().forEach(cancellationReason -> {
                logger.info(cancellationReason.toString());
            });
        }
    }
```

En el ejemplo de código anterior se utilizan los siguientes métodos auxiliares.

Métodos auxiliares

```
    private static Expression buildConditionCheckExpression() {
        Map<String, AttributeValue> expressionValue = Map.of(
                ":year", numberValue(1982));

        return Expression.builder()
                .expression("actingyear <> :year")
                .expressionValues(expressionValue)
                .build();
    }

    public static ProductCatalog getProductCatId2() {
        return ProductCatalog.builder()
                .id(2)
                .isbn("1-565-85698")
                .authors(new HashSet<>(Arrays.asList("a", "b")))
                .price(BigDecimal.valueOf(30.22))
                .title("Title 55")
                .build();
    }

    public static ProductCatalog getProductCatId4ForUpdate() {
        return ProductCatalog.builder()
                .id(4)
                .price(BigDecimal.valueOf(40.00))
                .title("Title 1")
                .build();
    }

    public static MovieActor getMovieActorBlanchett() {
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Cate Blanchett");
```

```
        movieActor.setMovieName("Blue Jasmine");
        movieActor.setActingYear(2013);
        movieActor.setActingAward("Best Actress");
        movieActor.setActingSchoolName("National Institute of Dramatic Art");
        return movieActor;
    }
```

Las tablas de DynamoDB contienen los siguientes elementos antes de que se ejecute el ejemplo de código.

```
1 | ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=10}
2 | MovieActor{movieName='Sophie's Choice', actorName='Meryl Streep', actingAward='Best
 Actress', actingYear=1982, actingSchoolName='Yale School of Drama'}
3 | MovieActor{movieName='Tar', actorName='Cate Blanchett', actingAward='Best Actress',
 actingYear=2022, actingSchoolName='National Institute of Dramatic Art'}
```

Los siguientes elementos aparecen en las tablas después de que el código termine de ejecutarse.

```
ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=10}
MovieActor{movieName='Sophie's Choice', actorName='Meryl Streep', actingAward='Best
 Actress', actingYear=1982, actingSchoolName='Yale School of Drama'}
MovieActor{movieName='Tar', actorName='Cate Blanchett', actingAward='Best Actress',
 actingYear=2022, actingSchoolName='National Institute of Dramatic Art'}
```

Los elementos permanecen sin cambios en las tablas porque se produjo un error en la transacción. El valor `actingYear` de la película `Sophie's Choice` es 1982, como muestra la línea 2 de los elementos de la tabla antes de llamar al método `transactWriteItem()`.

Para capturar la información de cancelación de la transacción, incluya la llamada al método `transactWriteItems()` en un bloque `try` y `catch` el `TransactionCanceledException`. Tras la línea de comentario 4 del ejemplo, el código registra cada objeto `CancellationReason`. Dado que el código que sigue a la línea de comentario 3 del ejemplo especifica que deben devolverse los valores del elemento que provocó el fallo de la transacción, el registro muestra los valores brutos de la base de datos para el elemento de la película `Sophie's Choice`.

```
CancellationReason(Code=None)
CancellationReason(Code=None)
CancellationReason(Code=None)
CancellationReason(Item={actor=AttributeValue(S=Meryl Streep),
 movie=AttributeValue(S=Sophie's Choice), actingaward=AttributeValue(S=Best Actress),
```

```
actingyear=AttributeValue(N=1982), actingschoolname=AttributeValue(S=Yale School of
Drama)}, ¬
   Code=ConditionalCheckFailed, Message=The conditional request failed.)
```

Ejemplo de condición de operación única

El siguiente ejemplo muestra el uso de una condición en una sola operación de una solicitud de transacción. La operación de eliminación después de la línea de comentarios 1 contiene una condición que compara el valor del elemento objetivo de la operación con la base de datos. En este ejemplo, la expresión de condición creada con el método auxiliar después de la línea de comentario 2 especifica que el elemento debe eliminarse de la base de datos si el año de actuación de la película no es igual a 2013.

Las expresiones se describen más adelante en esta guía.

```
   public static void singleOperationConditionFailExample(DynamoDbEnhancedClient
enhancedClient,

DynamoDbTable<ProductCatalog> catalogTable,
                                                        DynamoDbTable<MovieActor>
movieActorTable) {
       try {
           enhancedClient.transactWriteItems(b -> b
                   .addPutItem(catalogTable,
TransactPutItemEnhancedRequest.builder(ProductCatalog.class)
                           .item(getProductCatId2())
                           .build())
                   .addUpdateItem(catalogTable,
TransactUpdateItemEnhancedRequest.builder(ProductCatalog.class)
                           .item(getProductCatId4ForUpdate())
                           .ignoreNulls(Boolean.TRUE).build())
                  // 1. Delete operation that contains a condition expression
                   .addDeleteItem(movieActorTable,
TransactDeleteItemEnhancedRequest.builder()
                           .key((Key.Builder k) -> {
                               MovieActor blanchett = getMovieActorBlanchett();
                               k.partitionValue(blanchett.getMovieName())
                                       .sortValue(blanchett.getActorName());
                           })
                           .conditionExpression(buildDeleteItemExpression())

.returnValuesOnConditionCheckFailure(ReturnValuesOnConditionCheckFailure.ALL_OLD)
```

```
                            .build())
                    .build());
        } catch (TransactionCanceledException ex) {
            ex.cancellationReasons().forEach(cancellationReason ->
logger.info(cancellationReason.toString()));
        }
    }

    // 2. Provide condition expression to check if 'actingyear' is not equal to 2013.
    private static Expression buildDeleteItemExpression() {
        Map<String, AttributeValue> expressionValue = Map.of(
                ":year", numberValue(2013));

        return Expression.builder()
                .expression("actingyear <> :year")
                .expressionValues(expressionValue)
                .build();
    }
```

En el ejemplo de código anterior se utilizan los siguientes métodos auxiliares.

Métodos auxiliares

```
    public static ProductCatalog getProductCatId2() {
        return ProductCatalog.builder()
                .id(2)
                .isbn("1-565-85698")
                .authors(new HashSet<>(Arrays.asList("a", "b")))
                .price(BigDecimal.valueOf(30.22))
                .title("Title 55")
                .build();
    }

    public static ProductCatalog getProductCatId4ForUpdate() {
        return ProductCatalog.builder()
                .id(4)
                .price(BigDecimal.valueOf(40.00))
                .title("Title 1")
                .build();
    }
    public static MovieActor getMovieActorBlanchett() {
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Cate Blanchett");
        movieActor.setMovieName("Blue Jasmine");
```

```
        movieActor.setActingYear(2013);
        movieActor.setActingAward("Best Actress");
        movieActor.setActingSchoolName("National Institute of Dramatic Art");
        return movieActor;
    }
```

Las tablas de DynamoDB contienen los siguientes elementos antes de que se ejecute el ejemplo de código.

```
1 | ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=10}
2 | MovieActor{movieName='Blue Jasmine', actorName='Cate Blanchett', actingAward='Best
 Actress', actingYear=2013, actingSchoolName='National Institute of Dramatic Art'}
```

Los siguientes elementos aparecen en las tablas después de que el código termine de ejecutarse.

```
ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=10}
2023-03-15 11:29:07 [main] INFO  org.example.tests.TransactDemoTest:168 -
 MovieActor{movieName='Blue Jasmine', actorName='Cate Blanchett', actingAward='Best
 Actress', actingYear=2013, actingSchoolName='National Institute of Dramatic Art'}
```

Los elementos permanecen sin cambios en las tablas porque se produjo un error en la transacción. El valor `actingYear` para la película `Blue Jasmine` es `2013` como se muestra en la línea 2 de la lista de elementos antes de que se ejecute el ejemplo de código.

Las líneas siguientes se registran en la consola.

```
CancellationReason(Code=None)
CancellationReason(Code=None)
CancellationReason(Item={actor=AttributeValue(S=Cate Blanchett),
 movie=AttributeValue(S=Blue Jasmine), actingaward=AttributeValue(S=Best Actress),
 actingyear=AttributeValue(N=2013), actingschoolname=AttributeValue(S=National
 Institute of Dramatic Art)},
    Code=ConditionalCheckFailed, Message=The conditional request failed)
```

Usar índices secundarios

Los índices secundarios mejoran el acceso a los datos al definir claves alternativas que se utilizan en las operaciones de consulta y análisis. Índice secundario global (GSI): índice con una clave de partición y una clave de clasificación que pueden ser diferentes de las de la tabla base. Por el contrario, los índices secundarios locales (LSI) utilizan la clave de partición del índice principal.

Anote la clase de datos con anotaciones de índice secundarias

Los atributos que participan en índices secundarios requieren la anotación `@DynamoDbSecondaryPartitionKey` o `@DynamoDbSecondarySortKey`.

La siguiente clase muestra las anotaciones de dos índices. El GSI denominado SubjectLastPostedDateIndexusa el `Subject` atributo para la clave de partición y el atributo `LastPostedDateTime` para la clave de clasificación. El LSI denominado ForumLastPostedDateIndexutiliza el `ForumName` como clave de partición y `LastPostedDateTime` como clave de clasificación.

Tenga en cuenta que el atributo `Subject` cumple una doble función. Es la clave de clasificación de la clave principal y la clave de partición del GSI denominado. SubjectLastPostedDateIndex

Clase **`MessageThread`**

La clase `MessageThread` es adecuada para utilizarla como clase de datos en la tabla Thread de ejemplo de la Guía para desarrolladores de Amazon DynamoDB.

Importaciones

```
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbBean;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondaryPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondarySortKey;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSortKey;

import java.util.List;
```

```
@DynamoDbBean
public class MessageThread {
    private String ForumName;
    private String Subject;
    private String Message;
    private String LastPostedBy;
    private String LastPostedDateTime;
    private Integer Views;
    private Integer Replies;
    private Integer Answered;
```

```
    private List<String> Tags;

    @DynamoDbPartitionKey
    public String getForumName() {
        return ForumName;
    }

    public void setForumName(String forumName) {
        ForumName = forumName;
    }

    // Sort key for primary index and partition key for GSI
"SubjectLastPostedDateIndex".
    @DynamoDbSortKey
    @DynamoDbSecondaryPartitionKey(indexNames = "SubjectLastPostedDateIndex")
    public String getSubject() {
        return Subject;
    }

    public void setSubject(String subject) {
        Subject = subject;
    }

    // Sort key for GSI "SubjectLastPostedDateIndex" and sort key for LSI
"ForumLastPostedDateIndex".
    @DynamoDbSecondarySortKey(indexNames = {"SubjectLastPostedDateIndex",
"ForumLastPostedDateIndex"})
    public String getLastPostedDateTime() {
        return LastPostedDateTime;
    }

    public void setLastPostedDateTime(String lastPostedDateTime) {
        LastPostedDateTime = lastPostedDateTime;
    }
    public String getMessage() {
        return Message;
    }

    public void setMessage(String message) {
        Message = message;
    }

    public String getLastPostedBy() {
        return LastPostedBy;
```

```
    }

    public void setLastPostedBy(String lastPostedBy) {
        LastPostedBy = lastPostedBy;
    }

    public Integer getViews() {
        return Views;
    }

    public void setViews(Integer views) {
        Views = views;
    }

    @DynamoDbSecondaryPartitionKey(indexNames = "ForumRepliesIndex")
    public Integer getReplies() {
        return Replies;
    }

    public void setReplies(Integer replies) {
        Replies = replies;
    }

    public Integer getAnswered() {
        return Answered;
    }

    public void setAnswered(Integer answered) {
        Answered = answered;
    }

    public List<String> getTags() {
        return Tags;
    }

    public void setTags(List<String> tags) {
        Tags = tags;
    }

    public MessageThread() {
        this.Answered = 0;
        this.LastPostedBy = "";
        this.ForumName = "";
        this.Message = "";
```

```
        this.LastPostedDateTime = "";
        this.Replies = 0;
        this.Views = 0;
        this.Subject = "";
    }

    @Override
    public String toString() {
        return "MessageThread{" +
                "ForumName='" + ForumName + '\'' +
                ", Subject='" + Subject + '\'' +
                ", Message='" + Message + '\'' +
                ", LastPostedBy='" + LastPostedBy + '\'' +
                ", LastPostedDateTime='" + LastPostedDateTime + '\'' +
                ", Views=" + Views +
                ", Replies=" + Replies +
                ", Answered=" + Answered +
                ", Tags=" + Tags +
                '}';
    }
}
```

Crear el índice

A partir de la versión 2.20.86 del SDK para Java, el método `createTable()` genera automáticamente índices secundarios a partir de las anotaciones de las clases de datos. De forma predeterminada, todos los atributos de la tabla base se copian en un índice y los valores de rendimiento aprovisionados son 20 unidades de capacidad de lectura y 20 unidades de capacidad de escritura.

Sin embargo, si utiliza una versión del SDK anterior a la 2.20.86, debe crear el índice junto con la tabla, como se muestra en el siguiente ejemplo. En este ejemplo, se crean los dos índices de la tabla `Thread`. El parámetro constructor tiene métodos para configurar ambos tipos de índices, como se muestra después de las líneas de comentario 1 y 2. Utilice el método del generador de índices `indexName()` para asociar los nombres de índice especificados en las anotaciones de las clases de datos con el tipo de índice deseado.

Este código configura todos los atributos de la tabla para que terminen en ambos índices después de las líneas de comentario 3 y 4. Encontrará más información sobre las proyecciones de atributos en la Guía para desarrolladores de Amazon DynamoDB.

```
    public static void createMessageThreadTable(DynamoDbTable<MessageThread>
 messageThreadDynamoDbTable, DynamoDbClient dynamoDbClient) {
        messageThreadDynamoDbTable.createTable(b -> b
                // 1. Generate the GSI.
                .globalSecondaryIndices(gsi ->
 gsi.indexName("SubjectLastPostedDateIndex")
                        // 3. Populate the GSI with all attributes.
                        .projection(p -> p
                                .projectionType(ProjectionType.ALL))
                )
                // 2. Generate the LSI.
                .localSecondaryIndices(lsi -> lsi.indexName("ForumLastPostedDateIndex")
                        // 4. Populate the LSI with all attributes.
                        .projection(p -> p
                                .projectionType(ProjectionType.ALL))
                )
        );
```

Consultar utilizando un índice

El siguiente ejemplo consulta el índice secundario global ForumLastPostedDateIndex.

Tras la línea de comentario 2, se crea un QueryConditionalobjeto que es obligatorio al llamar al método DynamoDbIndex.query ().

Para obtener una referencia al índice que desea consultar después de la línea de comentario 3, debe pasar al nombre del índice. Tras la línea de comentario 4, se llama al método `query()` del índice que pasa al objeto `QueryConditional`.

También puede configurar la consulta para que devuelva tres valores de atributo, como se muestra tras la línea de comentario 5. Si no se llama `attributesToProject()`, la consulta devuelve todos los valores de los atributos. Los nombres de los atributos especificados comienzan con letras minúsculas. Estos nombres coinciden con los utilizados en la tabla, no necesariamente con los de la clase de datos.

Siguiendo la línea de comentario 6, se itera a través de los resultados y se registra cada elemento devuelto por la consulta y también se almacena en la lista para devolvérsela a la persona que llama.

```
public class IndexScanExamples {
    private static Logger logger = LoggerFactory.getLogger(IndexScanExamples.class);

    public static List<MessageThread> queryUsingSecondaryIndices(String lastPostedDate,
```

```
DynamoDbTable<MessageThread> threadTable) {
       // 1. Log the parameter value.
       logger.info("lastPostedDate value: {}", lastPostedDate);

       // 2. Create a QueryConditional whose sort key value must be greater than or
equal to the parameter value.
       QueryConditional queryConditional =
QueryConditional.sortGreaterThanOrEqualTo(qc ->
               qc.partitionValue("Forum02").sortValue(lastPostedDate));

       // 3. Specify the index name to query.
       final DynamoDbIndex<MessageThread> forumLastPostedDateIndex =
threadTable.index("ForumLastPostedDateIndex");

       // 4. Perform the query using the QueryConditional object.
       final SdkIterable<Page<MessageThread>> pagedResult =
forumLastPostedDateIndex.query(q -> q
               .queryConditional(queryConditional)
               // 5. Request three attribute in the results.
               .attributesToProject("forumName", "subject", "lastPostedDateTime"));

       List<MessageThread> collectedItems = new ArrayList<>();
       // 6. Iterate through pages response and sort the items.
       pagedResult.stream().forEach(page -> page.items().stream()
               .sorted(Comparator.comparing(MessageThread::getLastPostedDateTime))
               .forEach(mt -> {
                   // 7. Log the returned items and add the collection to return to
the caller.
                   logger.info(mt.toString());
                   collectedItems.add(mt);
               }));
       return collectedItems;
   }
```

En la base de datos existen los siguientes elementos antes de que se ejecute la consulta.

```
MessageThread{ForumName='Forum01', Subject='Subject01', Message='Message01',
 LastPostedBy='', LastPostedDateTime='2023.03.28', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum02', Subject='Subject02', Message='Message02',
 LastPostedBy='', LastPostedDateTime='2023.03.29', Views=0, Replies=0, Answered=0,
 Tags=null}
```

```
MessageThread{ForumName='Forum02', Subject='Subject04', Message='Message04',
 LastPostedBy='', LastPostedDateTime='2023.03.31', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum02', Subject='Subject08', Message='Message08',
 LastPostedBy='', LastPostedDateTime='2023.04.04', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum02', Subject='Subject10', Message='Message10',
 LastPostedBy='', LastPostedDateTime='2023.04.06', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum03', Subject='Subject03', Message='Message03',
 LastPostedBy='', LastPostedDateTime='2023.03.30', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum03', Subject='Subject06', Message='Message06',
 LastPostedBy='', LastPostedDateTime='2023.04.02', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum03', Subject='Subject09', Message='Message09',
 LastPostedBy='', LastPostedDateTime='2023.04.05', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum05', Subject='Subject05', Message='Message05',
 LastPostedBy='', LastPostedDateTime='2023.04.01', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum07', Subject='Subject07', Message='Message07',
 LastPostedBy='', LastPostedDateTime='2023.04.03', Views=0, Replies=0, Answered=0,
 Tags=null}
```

Las instrucciones de registro de las líneas 1 y 6 dan como resultado la siguiente salida de consola.

```
lastPostedDate value: 2023.03.31
MessageThread{ForumName='Forum02', Subject='Subject04', Message='', LastPostedBy='',
 LastPostedDateTime='2023.03.31', Views=0, Replies=0, Answered=0, Tags=null}
MessageThread{ForumName='Forum02', Subject='Subject08', Message='', LastPostedBy='',
 LastPostedDateTime='2023.04.04', Views=0, Replies=0, Answered=0, Tags=null}
MessageThread{ForumName='Forum02', Subject='Subject10', Message='', LastPostedBy='',
 LastPostedDateTime='2023.04.06', Views=0, Replies=0, Answered=0, Tags=null}
```

La consulta devolvió elementos con un valor `forumName` de Forum02 y un valor de `lastPostedDateTime` superior o igual a 2023.03.31. Los resultados muestran valores `message` con una cadena vacía, aunque los atributos `message` tienen valores en el índice. Esto se debe a que el atributo del mensaje no se proyectó mediante código después de la línea de comentario 5.

Utilizar características de asignación avanzadas

Obtenga información sobre las características avanzadas del esquema de tablas en la API del cliente mejorado de DynamoDB.

Comprender los tipos de esquema de tabla

`TableSchema` es la interfaz para la funcionalidad de asignación de la API del cliente mejorado de DynamoDB. Puede mapear un objeto de datos hacia y desde un mapa de AttributeValues. Un objeto `TableSchema` necesita conocer la estructura de la tabla que está asignando. Esta información de estructura se almacena en un objeto `TableMetadata`.

La API del cliente mejorado tiene varias implementaciones de `TableSchema`, indicadas a continuación.

Esquema de tabla generado a partir de clases anotadas

Es una operación algo costosa construir un `TableSchema` a partir de clases anotadas, por lo que recomendamos hacerlo una vez, al inicio de la aplicación.

BeanTableSchema

Esta implementación se construye basándose en atributos y anotaciones de una clase de bean. En la sección Introducción se muestra un ejemplo de este enfoque.

> **Note**
>
> Si un `BeanTableSchema` no se comporta como espera, active el registro de depuración para `software.amazon.awssdk.enhanced.dynamodb.beans`.

ImmutableTableSchema

Esta implementación se crea a partir de una clase de datos inmutable. Esto se describe en la sección ??? anterior.

Esquema de tabla generado con un generador

Los siguientes `TableSchema` se crean a partir de código mediante un generador. Este enfoque es menos costoso que el enfoque que usa clases de datos anotadas. El enfoque de creación evita el uso de anotaciones y no requiere estándares de JavaBean nomenclatura.

StaticTableSchema

Esta implementación está creada para clases de datos mutables. En la sección de introducción de esta guía se muestra cómo crear un `StaticTableSchema` mediante un generador.

StaticImmutableTableSchema

De forma similar a como se crea un `StaticTableSchema`, se genera una implementación de este tipo de `TableSchema` utilizando un generador para su uso con clases de datos inmutables.

Esquema de tabla para datos sin un esquema fijo

DocumentTableSchema

A diferencia de otras implementaciones de `TableSchema`, no define los atributos de una instancia `DocumentTableSchema`. Por lo general, solo especifica las claves principales y los proveedores de convertidores de atributos. Una instancia `EnhancedDocument` proporciona los atributos que se crean a partir de elementos individuales o de una cadena JSON.

Incluir o excluir explícitamente atributos

La API del cliente mejorado de DynamoDB ofrece anotaciones para impedir que los atributos de las clases de datos se conviertan en atributos de una tabla. Con la API, también puede usar un nombre de atributo diferente del nombre de atributo de la clase de datos.

Excluir atributos

Para ignorar los atributos que no se deben asignar a una tabla de DynamoDB, marque el atributo con la anotación `@DynamoDbIgnore`.

```
private String internalKey;

@DynamoDbIgnore
public String getInternalKey() { return this.internalKey; }
public void setInternalKey(String internalKey) { this.internalKey = internalKey;}
```

Incluir atributos

Para cambiar el nombre de un atributo utilizado en la tabla de DynamoDB, márquelo con la anotación `@DynamoDbAttribute` y escriba un nombre diferente.

```
private String internalKey;

@DynamoDbAttribute("renamedInternalKey")
public String getInternalKey() { return this.internalKey; }
public void setInternalKey(String internalKey) { this.internalKey = internalKey;}
```

Conversión de atributos de control

De forma predeterminada, un esquema de tabla proporciona convertidores para muchos tipos comunes de Java mediante una implementación predeterminada de la interfaz de `AttributeConverterProvider`. Puede cambiar el comportamiento predeterminado general con una implementación de `AttributeConverterProvider` personalizada. También puede cambiar el conversor de un solo atributo.

Para obtener una lista de los convertidores disponibles, consulte el documento de la AttributeConverterinterfaz Java.

Proporcionar proveedores de convertidores de atributos personalizados

Puede proporcionar una `AttributeConverterProvider` única o una cadena de `AttributeConverterProvider` ordenadas a través de la anotación `@DynamoDbBean (converterProviders = {…})`. Cualquier `AttributeConverterProvider` personalizada debe extender la interfaz `AttributeConverterProvider`.

Tenga en cuenta que si suministra su propia cadena de proveedores de convertidores de atributos, anulará el proveedor de convertidores predeterminado `DefaultAttributeConverterProvider`. Si desea utilizar la funcionalidad del `DefaultAttributeConverterProvider`, debe incluirlo en la cadena.

También es posible anotar el bean con una matriz vacía `{}`. Esto deshabilita el uso de cualquier proveedor de conversión de atributos, incluido el predeterminado. En este caso, todos los atributos que se van a asignar deben tener su propio convertidor de atributos.

El fragmento siguiente muestra un único proveedor de convertidores.

```
@DynamoDbBean(converterProviders = ConverterProvider1.class)
public class Customer {

}
```

El siguiente fragmento muestra el uso de una cadena de proveedores de convertidores. Como el SDK predeterminado es el último que se proporciona, tiene la prioridad más baja.

```
@DynamoDbBean(converterProviders = {
   ConverterProvider1.class,
   ConverterProvider2.class,
   DefaultAttributeConverterProvider.class})
public class Customer {

}
```

Los creadores de esquemas de tablas estáticas tienen un método `attributeConverterProviders()` que funciona de la misma manera. Esto se muestra en el siguiente fragmento.

```
private static final StaticTableSchema<Customer> CUSTOMER_TABLE_SCHEMA =
  StaticTableSchema.builder(Customer.class)
    .newItemSupplier(Customer::new)
    .addAttribute(String.class, a -> a.name("name")
                                      a.getter(Customer::getName)
                                      a.setter(Customer::setName))
    .attributeConverterProviders(converterProvider1, converterProvider2)
    .build();
```

Sustituir la asignación de un único atributo

Para sustituir la forma en que se asigna un único atributo, introduzca un `AttributeConverter` para el atributo. Esto anula los convertidores proporcionados por `AttributeConverterProviders` en el esquema de la tabla. Esto añade un conversor personalizado solo para ese atributo. Otros atributos, incluso los del mismo tipo, no utilizarán ese convertidor salvo que se especifique explícitamente para esos otros atributos.

La anotación `@DynamoDbConvertedBy` se usa para especificar la clase `AttributeConverter` personalizada, como se muestra en el siguiente fragmento.

```
@DynamoDbBean
public class Customer {
    private String name;

    @DynamoDbConvertedBy(CustomAttributeConverter.class)
    public String getName() { return this.name; }
```

```
    public void setName(String name) { this.name = name;}
}
```

Los generadores de esquemas estáticos tienen un método `attributeConverter()` de creación de atributos equivalente. Este método toma una instancia de un `AttributeConverter`, como se muestra a continuación.

```
private static final StaticTableSchema<Customer> CUSTOMER_TABLE_SCHEMA =
  StaticTableSchema.builder(Customer.class)
    .newItemSupplier(Customer::new)
    .addAttribute(String.class, a -> a.name("name")
                                      a.getter(Customer::getName)
                                      a.setter(Customer::setName)
                                      a.attributeConverter(customAttributeConverter))
    .build();
```

Ejemplo

En este ejemplo, se muestra una implementación de `AttributeConverterProvider` que proporciona un conversor de atributos para objetos `java.net.HttpCookie`.

La siguiente clase `SimpleUser` contiene un nombre de atributo `lastUsedCookie` que es una instancia de `HttpCookie`.

El parámetro de las anotaciones de `@DynamoDbBean` muestra las dos clases de `AttributeConverterProvider` que proporcionan convertidores.

Class with annotations

```
   @DynamoDbBean(converterProviders = {CookieConverterProvider.class,
DefaultAttributeConverterProvider.class})
   public static final class SimpleUser {
       private String name;
       private HttpCookie lastUsedCookie;

       @DynamoDbPartitionKey
       public String getName() {
           return name;
       }

       public void setName(String name) {
           this.name = name;
```

```
        }

        public HttpCookie getLastUsedCookie() {
            return lastUsedCookie;
        }

        public void setLastUsedCookie(HttpCookie lastUsedCookie) {
            this.lastUsedCookie = lastUsedCookie;
        }
```

Static table schema

```
    private static final TableSchema<SimpleUser> SIMPLE_USER_TABLE_SCHEMA =
            TableSchema.builder(SimpleUser.class)
                    .newItemSupplier(SimpleUser::new)
                    .attributeConverterProviders(CookieConverterProvider.create(),
AttributeConverterProvider.defaultProvider())
                    .addAttribute(String.class, a -> a.name("name")
                            .setter(SimpleUser::setName)
                            .getter(SimpleUser::getName)
                            .tags(StaticAttributeTags.primaryPartitionKey()))
                    .addAttribute(HttpCookie.class, a -> a.name("lastUsedCookie")
                            .setter(SimpleUser::setLastUsedCookie)
                            .getter(SimpleUser::getLastUsedCookie))
                    .build();
```

El `CookieConverterProvider` en el ejemplo siguiente proporciona una instancia de un `HttpCookeConverter`.

```
    public static final class CookieConverterProvider implements
AttributeConverterProvider {
        private final Map<EnhancedType<?>, AttributeConverter<?>> converterCache =
ImmutableMap.of(
                // 1. Add HttpCookieConverter to the internal cache.
                EnhancedType.of(HttpCookie.class), new HttpCookieConverter());

        public static CookieConverterProvider create() {
            return new CookieConverterProvider();
        }

        // The SDK calls this method to find out if the provider contains a
AttributeConverter instance
```

```
        // for the EnhancedType<T> argument.
        @SuppressWarnings("unchecked")
        @Override
        public <T> AttributeConverter<T> converterFor(EnhancedType<T> enhancedType) {
            return (AttributeConverter<T>) converterCache.get(enhancedType);
        }
    }
```

Conversión de códigos

En el método `transformFrom()` de la clase `HttpCookieConverter` siguiente, el código recibe una instancia `HttpCookie` y la transforma en un mapa de DynamoDB que se almacena como un atributo.

El método `transformTo()` recibe un parámetro de mapa de DynamoDB y, a continuación, invoca el constructor `HttpCookie` que requiere un nombre y un valor.

```
   public static final class HttpCookieConverter implements
AttributeConverter<HttpCookie> {

        @Override
        public AttributeValue transformFrom(HttpCookie httpCookie) {

            return AttributeValue.fromM(
            Map.of ("cookieName", AttributeValue.fromS(httpCookie.getName()),
                    "cookieValue", AttributeValue.fromS(httpCookie.getValue()))
            );
        }

        @Override
        public HttpCookie transformTo(AttributeValue attributeValue) {
            Map<String, AttributeValue> map = attributeValue.m();
            return new HttpCookie(
                    map.get("cookieName").s(),
                    map.get("cookieValue").s());
        }

        @Override
        public EnhancedType<HttpCookie> type() {
            return EnhancedType.of(HttpCookie.class);
        }

        @Override
```

```
        public AttributeValueType attributeValueType() {
            return AttributeValueType.M;
        }
    }
```

Cambiar el comportamiento de actualización de los atributos

Puede personalizar el comportamiento de actualización de los atributos individuales al realizar una operación de actualización. Algunos ejemplos de operaciones de actualización en la API de cliente mejorada de DynamoDB son updateItem () y (). transactWriteItems

Por ejemplo, imagine que desea almacenar en su registro una marca de tiempo de tipo creado en el registro. Sin embargo, desea que su valor se escriba solo si no existe ningún valor para el atributo en la base de datos. En este caso, utiliza el comportamiento de actualización de `WRITE_IF_NOT_EXISTS`.

En el siguiente ejemplo, se muestra la anotación que añade el comportamiento al `createdOn` atributo.

```
@DynamoDbBean
public class Customer extends GenericRecord {
    private String id;
    private Instant createdOn;

    @DynamoDbPartitionKey
    public String getId() { return this.id; }
    public void setId(String id) { this.name = id; }

    @DynamoDbUpdateBehavior(UpdateBehavior.WRITE_IF_NOT_EXISTS)
    public Instant getCreatedOn() { return this.createdOn; }
    public void setCreatedOn(Instant createdOn) { this.createdOn = createdOn; }
}
```

Puede declarar el mismo comportamiento de actualización al crear un esquema de tabla estática, como se muestra en el siguiente ejemplo después de la línea de comentario 1.

```
static final TableSchema<Customer> CUSTOMER_TABLE_SCHEMA =
     TableSchema.builder(Customer.class)
       .newItemSupplier(Customer::new)
       .addAttribute(String.class, a -> a.name("id")
                                         .getter(Customer::getId)
                                         .setter(Customer::setId)
```

```
.tags(StaticAttributeTags.primaryPartitionKey()))
      .addAttribute(Instant.class, a -> a.name("createdOn")
                                         .getter(Customer::getCreatedOn)
                                         .setter(Customer::setCreatedOn)
                                         // 1. Add an UpdateBehavior.

.tags(StaticAttributeTags.updateBehavior(UpdateBehavior.WRITE_IF_NOT_EXISTS)))
      .build();
```

Aplanar atributos de otras clases

Si los atributos de su tabla están repartidos en varias clases Java diferentes, ya sea por herencia o composición, la API del cliente mejorado de DynamoDB proporciona soporte para aplanar los atributos en una sola clase.

Utilizar la herencia

Si sus clases utilizan herencias, utilice los siguientes enfoques para aplanar la jerarquía.

Utilizar objetos bean anotados

Para el método de anotación, ambas clases deben llevar la anotación `@DynamoDbBean` y una de ellas llevar una o más anotaciones de clave principal.

A continuación, se muestran ejemplos de clases de datos que tienen una relación de herencia.

Standard data class

```
@DynamoDbBean
public class Customer extends GenericRecord {
    private String name;

    public String getName() { return name; }
    public void setName(String name) { this.name = name; }
}

@DynamoDbBean
public abstract class GenericRecord {
    private String id;
    private String createdDate;

    @DynamoDbPartitionKey
```

```
    public String getId() { return id; }
    public void setId(String id) { this.id = id; }

    public String getCreatedDate() { return createdDate; }
    public void setCreatedDate(String createdDate) { this.createdDate =
 createdDate; }
}
```

Lombok

La opción onMethod de Lombok copia anotaciones de DynamoDB basadas en atributos, como `@DynamoDbPartitionKey`, en el código generado.

```
@DynamoDbBean
@Data
@ToString(callSuper = true)
public class Customer extends GenericRecord {
    private String name;
}

@Data
@DynamoDbBean
public abstract class GenericRecord {
    @Getter(onMethod_=@DynamoDbPartitionKey)
    private String id;
    private String createdDate;
}
```

Usar esquemas estáticos

Para el enfoque de esquema estático, utilice el método `extend()` del generador para contraer los atributos de la clase principal en la clase secundaria. Esto se muestra después de la línea de comentario 1 en el siguiente ejemplo.

```
       StaticTableSchema<org.example.tests.model.inheritance.stat.GenericRecord>
GENERIC_RECORD_SCHEMA =

StaticTableSchema.builder(org.example.tests.model.inheritance.stat.GenericRecord.class)
                     // The partition key will be inherited by the top level mapper.
                     .addAttribute(String.class, a -> a.name("id")

.getter(org.example.tests.model.inheritance.stat.GenericRecord::getId)
```

```
.setter(org.example.tests.model.inheritance.stat.GenericRecord::setId)
                                .tags(primaryPartitionKey()))
                        .addAttribute(String.class, a -> a.name("created_date")

.getter(org.example.tests.model.inheritance.stat.GenericRecord::getCreatedDate)

.setter(org.example.tests.model.inheritance.stat.GenericRecord::setCreatedDate))
                        .build();

       StaticTableSchema<org.example.tests.model.inheritance.stat.Customer>
CUSTOMER_SCHEMA =

StaticTableSchema.builder(org.example.tests.model.inheritance.stat.Customer.class)

.newItemSupplier(org.example.tests.model.inheritance.stat.Customer::new)
                        .addAttribute(String.class, a -> a.name("name")

.getter(org.example.tests.model.inheritance.stat.Customer::getName)

.setter(org.example.tests.model.inheritance.stat.Customer::setName))
                       // 1. Use the extend() method to collapse the parent attributes
onto the child class.
                        .extend(GENERIC_RECORD_SCHEMA)     // All the attributes of the
GenericRecord schema are added to Customer.
                        .build();
```

El ejemplo de esquema estático anterior utiliza las siguientes clases de datos. Dado que la asignación se define cuando se construye el esquema estático de la tabla, las clases de datos no requieren anotaciones.

Clases de datos

Standard data class

```
public class Customer extends GenericRecord {
    private String name;

    public String getName() { return name; }
    public void setName(String name) { this.name = name; }
}
```

```
public abstract class GenericRecord {
    private String id;
    private String createdDate;

    public String getId() { return id; }
    public void setId(String id) { this.id = id; }

    public String getCreatedDate() { return createdDate; }
    public void setCreatedDate(String createdDate) { this.createdDate =
 createdDate; }
```

Lombok

```
@Data
@ToString(callSuper = true)
public class Customer extends GenericRecord{
    private String name;
}

@Data
public abstract class GenericRecord {
    private String id;
    private String createdDate;
}
```

Utilizar composiciones

Si sus clases utilizan composiciones, siga los siguientes planteamientos para aplanar la jerarquía.

Utilizar objetos bean anotados

La anotación `@DynamoDbFlatten` aplana la clase contenida.

Los siguientes ejemplos de clases de datos utilizan la anotación `@DynamoDbFlatten` para añadir de forma eficaz todos los atributos de la clase `GenericRecord` contenida a la clase `Customer`.

Standard data class

```
@DynamoDbBean
public class Customer {
    private String name;
    private GenericRecord record;
```

```
    public String getName() { return this.name; }
    public void setName(String name) { this.name = name; }

    @DynamoDbFlatten
    public GenericRecord getRecord() { return this.record; }
    public void setRecord(GenericRecord record) { this.record = record; }

@DynamoDbBean
public class GenericRecord {
    private String id;
    private String createdDate;

    @DynamoDbPartitionKey
    public String getId() { return this.id; }
    public void setId(String id) { this.id = id; }

    public String getCreatedDate() { return this.createdDate; }
    public void setCreatedDate(String createdDate) { this.createdDate =
 createdDate; }
}
```

Lombok

```
@Data
@DynamoDbBean
public class Customer {
    private String name;
    @Getter(onMethod_=@DynamoDbFlatten)
    private GenericRecord record;
}

@Data
@DynamoDbBean
public class GenericRecord {
    @Getter(onMethod_=@DynamoDbPartitionKey)
    private String id;
    private String createdDate;
}
```

Puede utilizar la anotación aplanar para aplanar tantas clases elegibles diferentes como necesite. Existen las siguientes limitaciones:

- Después de ser aplanados, todos los nombres de atributos deben ser únicos.
- Nunca debe haber más de una clave de partición, clave de clasificación o nombre de tabla.

Usar esquemas estáticos

Cuando construya un esquema de tabla estático, utilice el método `flatten()` del constructor. También debe suministrar los métodos getter y setter que identifican la clase contenida.

```
        StaticTableSchema<GenericRecord> GENERIC_RECORD_SCHEMA =
                StaticTableSchema.builder(GenericRecord.class)
                        .newItemSupplier(GenericRecord::new)
                        .addAttribute(String.class, a -> a.name("id")
                                .getter(GenericRecord::getId)
                                .setter(GenericRecord::setId)
                                .tags(primaryPartitionKey()))
                        .addAttribute(String.class, a -> a.name("created_date")
                                .getter(GenericRecord::getCreatedDate)
                                .setter(GenericRecord::setCreatedDate))
                        .build();

        StaticTableSchema<Customer> CUSTOMER_SCHEMA =
                StaticTableSchema.builder(Customer.class)
                        .newItemSupplier(Customer::new)
                        .addAttribute(String.class, a -> a.name("name")
                                .getter(Customer::getName)
                                .setter(Customer::setName))
                       // Because we are flattening a component object, we supply a
getter and setter so the
                        // mapper knows how to access it.
                        .flatten(GENERIC_RECORD_SCHEMA, Customer::getRecord,
Customer::setRecord)
                        .build();
```

El ejemplo de esquema estático anterior utiliza las siguientes clases de datos.

Clases de datos

Standard data class

```
public class Customer {
    private String name;
```

```
    private GenericRecord record;

    public String getName() { return this.name; }
    public void setName(String name) { this.name = name; }

    public GenericRecord getRecord() { return this.record; }
    public void setRecord(GenericRecord record) { this.record = record; }

public class GenericRecord {
    private String id;
    private String createdDate;

    public String getId() { return this.id; }
    public void setId(String id) { this.id = id; }

    public String getCreatedDate() { return this.createdDate; }
    public void setCreatedDate(String createdDate) { this.createdDate =
 createdDate; }
}
```

Lombok

```
@Data
public class Customer {
    private String name;
    private GenericRecord record;
}

@Data
public class GenericRecord {
    private String id;
    private String createdDate;
}
```

Puede utilizar el patrón constructor para aplanar tantas clases elegibles diferentes como necesite.

Implicaciones para otro código

Cuando se utiliza el atributo `@DynamoDbFlatten` (o el método constructor `flatten()`), el elemento en DynamoDB contiene un atributo para cada atributo del objeto compuesto. También incluye los atributos del objeto que lo compone.

Por el contrario, si anota una clase de datos con una clase compuesta y no usa `@DynamoDbFlatten`, el elemento se guarda con el objeto compuesto como un atributo único.

Por ejemplo, compare la clase `Customer` que se muestra en el ejemplo de aplanamiento con composición con y sin aplanamiento del atributo `record`. Puede visualizar la diferencia con JSON según muestra la siguiente tabla.

Con aplanamiento	Con aplanamiento
3 atributos	2 atributos

<pre>{
  "id": "1",
  "createdDate": "today",
  "name": "my name"
}</pre>
	<pre>{
	  "id": "1",
	  "record": {
	  "createdDate": "today",
	  "name": "my name"
	  }
	}</pre>

La diferencia es importante si hay otro código que accede a la tabla de DynamoDB y espera encontrar determinados atributos.

Uso de atributos que son beans, mapas, listas y conjuntos

Una definición de bean, como la clase `Person` que se muestra a continuación, podría establecer propiedades (o atributos) que hagan referencia a tipos con atributos adicionales. Por ejemplo, en la clase `Person`, `mainAddress` es una propiedad que hace referencia a un bean `Address` que define atributos de valor adicionales. `addresses` hace referencia a un mapa de Java, cuyos elementos hacen referencia a beans `Address`. Estos tipos complejos pueden considerarse contenedores de atributos simples que se utilizan como valor de datos en el contexto de DynamoDB.

En DynamoDB se denominan atributos anidados a las propiedades de valor de elementos anidados, como mapas, listas o beans. En la Guía para desarrolladores de Amazon DynamoDB se denomina tipo de documento al formato guardado de un mapa de Java, lista o bean. Los atributos simples que se utilizan por su valor de datos en Java se denominan tipos escalares en DynamoDB. Los conjuntos que contienen varios elementos escalares del mismo tipo se denominan tipos de conjuntos.

Es importante saber que la API DynamoDB Enhanced Client convierte una propiedad que es bean en un tipo de documento de mapa de DynamoDB al guardarla.

Clase **`Person`**

```
@DynamoDbBean
public class Person {
    private Integer id;
    private String firstName;
    private String lastName;
    private Integer age;
    private Address mainAddress;
    private Map<String, Address> addresses;
    private List<PhoneNumber> phoneNumbers;
    private Set<String> hobbies;

    @DynamoDbPartitionKey
    public Integer getId() {
        return id;
    }

    public void setId(Integer id) {
        this.id = id;
    }

    public String getFirstName() {
        return firstName;
    }

    public void setFirstName(String firstName) {
        this.firstName = firstName;
    }

    public String getLastName() {
        return lastName;
    }

    public void setLastName(String lastName) {
        this.lastName = lastName;
    }

    public Integer getAge() {
        return age;
    }

    public void setAge(Integer age) {
        this.age = age;
```

```
    }

    public Address getMainAddress() {
        return mainAddress;
    }

    public void setMainAddress(Address mainAddress) {
        this.mainAddress = mainAddress;
    }

    public Map<String, Address> getAddresses() {
        return addresses;
    }

    public void setAddresses(Map<String, Address> addresses) {
        this.addresses = addresses;
    }

    public List<PhoneNumber> getPhoneNumbers() {
        return phoneNumbers;
    }

    public void setPhoneNumbers(List<PhoneNumber> phoneNumbers) {
        this.phoneNumbers = phoneNumbers;
    }

    public Set<String> getHobbies() {
        return hobbies;
    }

    public void setHobbies(Set<String> hobbies) {
        this.hobbies = hobbies;
    }

    @Override
    public String toString() {
        return "Person{" +
               "addresses=" + addresses +
               ", id=" + id +
               ", firstName='" + firstName + '\'' +
               ", lastName='" + lastName + '\'' +
               ", age=" + age +
               ", mainAddress=" + mainAddress +
               ", phoneNumbers=" + phoneNumbers +
```

```
                ", hobbies=" + hobbies +
                '}';
    }
}
```

Clase **`Address`**

```
@DynamoDbBean
public class Address {
    private String street;
    private String city;
    private String state;
    private String zipCode;

    public Address() {
    }

    public String getStreet() {
        return this.street;
    }

    public String getCity() {
        return this.city;
    }

    public String getState() {
        return this.state;
    }

    public String getZipCode() {
        return this.zipCode;
    }

    public void setStreet(String street) {
        this.street = street;
    }

    public void setCity(String city) {
        this.city = city;
    }

    public void setState(String state) {
        this.state = state;
```

```
    }

    public void setZipCode(String zipCode) {
        this.zipCode = zipCode;
    }

    @Override
    public boolean equals(Object o) {
        if (this == o) return true;
        if (o == null || getClass() != o.getClass()) return false;
        Address address = (Address) o;
        return Objects.equals(street, address.street) && Objects.equals(city,
 address.city) && Objects.equals(state, address.state) && Objects.equals(zipCode,
 address.zipCode);
    }

    @Override
    public int hashCode() {
        return Objects.hash(street, city, state, zipCode);
    }

    @Override
    public String toString() {
        return "Address{" +
                "street='" + street + '\'' +
                ", city='" + city + '\'' +
                ", state='" + state + '\'' +
                ", zipCode='" + zipCode + '\'' +
                '}';
    }
}
```

Clase **PhoneNumber**

```
@DynamoDbBean
public class PhoneNumber {
    String type;
    String number;

    public String getType() {
        return type;
    }
```

```
    public void setType(String type) {
        this.type = type;
    }

    public String getNumber() {
        return number;
    }

    public void setNumber(String number) {
        this.number = number;
    }

    @Override
    public String toString() {
        return "PhoneNumber{" +
                "type='" + type + '\'' +
                ", number='" + number + '\'' +
                '}';
    }
}
```

Almacenamiento de tipos complejos

Uso de clases de datos anotadas

Si desea guardar atributos anidados para clases personalizadas, puede anotarlos simplemente. La clase `Address` y la clase `PhoneNumber` mostradas anteriormente se anotan solo con la anotación `@DynamoDbBean`. Cuando la API del cliente mejorado de DynamoDB construye el esquema de tabla para la clase `Person` con el siguiente fragmento, la API descubre el uso de las clases `Address` y `PhoneNumber`, y construye las asignaciones correspondientes para trabajar con DynamoDB.

```
TableSchema<Person> personTableSchema = TableSchema.fromBean(Person.class);
```

Uso de esquemas abstractos con generadores

El método alternativo consiste en utilizar compiladores de esquemas de tablas estáticas para cada clase de bean anidada, como se muestra en el código siguiente.

Los esquemas de tabla de las clases `Address` y `PhoneNumber` y son abstractos en el sentido de que no se pueden usar con una tabla de DynamoDB. Esto se debe a que carecen de definiciones para la clave principal. Sin embargo, se utilizan como esquemas anidados en el esquema de tabla de la clase `Person`.

Tras las líneas de comentario 1 y 2 de la definición de `PERSON_TABLE_SCHEMA`, verá el código que utiliza los esquemas de tabla abstractos. El uso de `documentOf` en el método `EnhanceType.documentOf(...)` no indica que este devuelva un tipo `EnhancedDocument` de la API de documentos mejorados. En este contexto, el método `documentOf(...)` devuelve un objeto que sabe cómo asignar su argumento de clase a y desde los atributos de la tabla de DynamoDB mediante el argumento del esquema de la tabla.

Código de esquema estático

```
   // Abstract table schema that cannot be used to work with a DynamoDB table,
   // but can be used as a nested schema.
   public static final TableSchema<Address> TABLE_SCHEMA_ADDRESS =
TableSchema.builder(Address.class)
       .newItemSupplier(Address::new)
       .addAttribute(String.class, a -> a.name("street")
           .getter(Address::getStreet)
           .setter(Address::setStreet))
       .addAttribute(String.class, a -> a.name("city")
           .getter(Address::getCity)
           .setter(Address::setCity))
       .addAttribute(String.class, a -> a.name("zipcode")
           .getter(Address::getZipCode)
           .setter(Address::setZipCode))
       .addAttribute(String.class, a -> a.name("state")
           .getter(Address::getState)
           .setter(Address::setState))
       .build();

   // Abstract table schema that cannot be used to work with a DynamoDB table,
   // but can be used as a nested schema.
   public static final TableSchema<PhoneNumber> TABLE_SCHEMA_PHONENUMBER =
TableSchema.builder(PhoneNumber.class)
       .newItemSupplier(PhoneNumber::new)
       .addAttribute(String.class, a -> a.name("type")
           .getter(PhoneNumber::getType)
           .setter(PhoneNumber::setType))
       .addAttribute(String.class, a -> a.name("number")
           .getter(PhoneNumber::getNumber)
           .setter(PhoneNumber::setNumber))
       .build();

   // A static table schema that can be used with a DynamoDB table.
```

```
   // The table schema contains two nested schemas that are used to perform mapping
to/from DynamoDB.
   public static final TableSchema<Person> PERSON_TABLE_SCHEMA =
       TableSchema.builder(Person.class)
           .newItemSupplier(Person::new)
           .addAttribute(Integer.class, a -> a.name("id")
               .getter(Person::getId)
               .setter(Person::setId)
               .addTag(StaticAttributeTags.primaryPartitionKey()))
           .addAttribute(String.class, a -> a.name("firstName")
               .getter(Person::getFirstName)
               .setter(Person::setFirstName))
           .addAttribute(String.class, a -> a.name("lastName")
               .getter(Person::getLastName)
               .setter(Person::setLastName))
           .addAttribute(Integer.class, a -> a.name("age")
               .getter(Person::getAge)
               .setter(Person::setAge))
           .addAttribute(EnhancedType.documentOf(Address.class, TABLE_SCHEMA_ADDRESS),
a -> a.name("mainAddress")
               .getter(Person::getMainAddress)
               .setter(Person::setMainAddress))
           .addAttribute(EnhancedType.listOf(String.class), a -> a.name("hobbies")
               .getter(Person::getHobbies)
               .setter(Person::setHobbies))
           .addAttribute(EnhancedType.mapOf(
               EnhancedType.of(String.class),
               // 1. Use mapping functionality of the Address table schema.
               EnhancedType.documentOf(Address.class, TABLE_SCHEMA_ADDRESS)), a ->
a.name("addresses")
               .getter(Person::getAddresses)
               .setter(Person::setAddresses))
           .addAttribute(EnhancedType.listOf(
               // 2. Use mapping functionality of the PhoneNumber table schema.
               EnhancedType.documentOf(PhoneNumber.class, TABLE_SCHEMA_PHONENUMBER)),
a -> a.name("phoneNumbers")
               .getter(Person::getPhoneNumbers)
               .setter(Person::setPhoneNumbers))
           .build();
```

Atributos de proyecto de tipos complejos

Para los métodos `query()` y `scan()`, puede especificar qué atributos desea que se devuelvan en los resultados mediante llamadas a métodos como `addNestedAttributeToProject()` y `attributesToProject()`. La API del cliente mejorada de DynamoDB convierte los parámetros de llamada al método Java en expresiones de proyección antes de enviar la solicitud.

En el siguiente ejemplo, se rellena la tabla `Person` con dos elementos y, a continuación, se efectúan tres operaciones de análisis.

El primer análisis accede a todos los elementos de la tabla para comparar los resultados con las demás operaciones de análisis.

El segundo análisis aplica el método del constructor `addNestedAttributeToProject()` para devolver solo el valor del atributo `street`.

La tercera operación de análisis sigue el método del constructor `attributesToProject()` para devolver los datos del atributo de primer nivel, `hobbies`. El tipo de atributo `hobbies` es una lista Para acceder a cada elemento de la lista, haga una operación `get()` en la lista.

```
        personDynamoDbTable = getDynamoDbEnhancedClient().table("Person",
PERSON_TABLE_SCHEMA);
        PersonUtils.createPersonTable(personDynamoDbTable, getDynamoDbClient());
        // Use a utility class to add items to the Person table.
        List<Person> personList = PersonUtils.getItemsForCount(2);
        // This utility method performs a put against DynamoDB to save the instances in
the list argument.
        PersonUtils.putCollection(getDynamoDbEnhancedClient(), personList,
personDynamoDbTable);

        // The first scan logs all items in the table to compare to the results of the
subsequent scans.
        final PageIterable<Person> allItems = personDynamoDbTable.scan();
        allItems.items().forEach(p ->
                // 1. Log what is in the table.
                logger.info(p.toString()));

        // Scan for nested attributes.
        PageIterable<Person> streetScanResult = personDynamoDbTable.scan(b -> b
                // Use the 'addNestedAttributeToProject()' or
'addNestedAttributesToProject()' to access data nested in maps in DynamoDB.
                .addNestedAttributeToProject(
```

```
                        NestedAttributeName.create("addresses", "work", "street")
                ));

        streetScanResult.items().forEach(p ->
                //2. Log the results of requesting nested attributes.
                logger.info(p.toString()));

        // Scan for a top-level list attribute.
        PageIterable<Person> hobbiesScanResult = personDynamoDbTable.scan(b -> b
                // Use the 'attributesToProject()' method to access first-level
 attributes.
                .attributesToProject("hobbies"));

        hobbiesScanResult.items().forEach((p) -> {
            // 3. Log the results of the request for the 'hobbies' attribute.
            logger.info(p.toString());
            // To access an item in a list, first get the parent attribute, 'hobbies',
 then access items in the list.
            String hobby = p.getHobbies().get(1);
            // 4. Log an item in the list.
            logger.info(hobby);
        });
```

```
// Logged results from comment line 1.
Person{id=2, firstName='first name 2', lastName='last name 2', age=11,
 addresses={work=Address{street='street 21', city='city 21', state='state 21',
 zipCode='33333'}, home=Address{street='street 2', city='city 2', state='state 2',
 zipCode='22222'}}, phoneNumbers=[PhoneNumber{type='home', number='222-222-2222'},
 PhoneNumber{type='work', number='333-333-3333'}], hobbies=[hobby 2, hobby 21]}
Person{id=1, firstName='first name 1', lastName='last name 1', age=11,
 addresses={work=Address{street='street 11', city='city 11', state='state 11',
 zipCode='22222'}, home=Address{street='street 1', city='city 1', state='state 1',
 zipCode='11111'}}, phoneNumbers=[PhoneNumber{type='home', number='111-111-1111'},
 PhoneNumber{type='work', number='222-222-2222'}], hobbies=[hobby 1, hobby 11]}

// Logged results from comment line 2.
Person{id=null, firstName='null', lastName='null', age=null,
 addresses={work=Address{street='street 21', city='null', state='null',
 zipCode='null'}}, phoneNumbers=null, hobbies=null}
Person{id=null, firstName='null', lastName='null', age=null,
 addresses={work=Address{street='street 11', city='null', state='null',
 zipCode='null'}}, phoneNumbers=null, hobbies=null}
```

```
// Logged results from comment lines 3 and 4.
Person{id=null, firstName='null', lastName='null', age=null, addresses=null,
 phoneNumbers=null, hobbies=[hobby 2, hobby 21]}
hobby 21
Person{id=null, firstName='null', lastName='null', age=null, addresses=null,
 phoneNumbers=null, hobbies=[hobby 1, hobby 11]}
hobby 11
```

Note

Si el método `attributesToProject()` sigue cualquier otro procedimiento de creación que añada los atributos que desee proyectar, la lista de nombres de atributos proporcionada a `attributesToProject()` sustituirá a todos los demás nombres de atributos.
Un análisis efectuado con la instancia `ScanEnhancedRequest` del fragmento siguiente devuelve solo datos de hobbies.

```
ScanEnhancedRequest lastOverwrites = ScanEnhancedRequest.builder()
        .addNestedAttributeToProject(
                NestedAttributeName.create("addresses", "work", "street"))
        .addAttributeToProject("firstName")
        // If the 'attributesToProject()' method follows other builder methods
 that add attributes for projection,
        // its list of attributes replace all previous attributes.
        .attributesToProject("hobbies")
        .build();
PageIterable<Person> hobbiesOnlyResult =
 personDynamoDbTable.scan(lastOverwrites);
hobbiesOnlyResult.items().forEach(p ->
        logger.info(p.toString()));

// Logged results.
Person{id=null, firstName='null', lastName='null', age=null, addresses=null,
 phoneNumbers=null, hobbies=[hobby 2, hobby 21]}
Person{id=null, firstName='null', lastName='null', age=null, addresses=null,
 phoneNumbers=null, hobbies=[hobby 1, hobby 11]}
```

El siguiente fragmento de código usa primero el método `attributesToProject()`. Este orden preserva todos los demás atributos solicitados.

```
ScanEnhancedRequest attributesPreserved = ScanEnhancedRequest.builder()
```

```
        // Use 'attributesToProject()' first so that the method call does not
 replace all other attributes
        // that you want to project.
        .attributesToProject("firstName")
        .addNestedAttributeToProject(
                NestedAttributeName.create("addresses", "work", "street"))
        .addAttributeToProject("hobbies")
        .build();
PageIterable<Person> allAttributesResult =
 personDynamoDbTable.scan(attributesPreserved);
allAttributesResult.items().forEach(p ->
        logger.info(p.toString()));

// Logged results.
Person{id=null, firstName='first name 2', lastName='null', age=null,
 addresses={work=Address{street='street 21', city='null', state='null',
 zipCode='null'}}, phoneNumbers=null, hobbies=[hobby 2, hobby 21]}
Person{id=null, firstName='first name 1', lastName='null', age=null,
 addresses={work=Address{street='street 11', city='null', state='null',
 zipCode='null'}}, phoneNumbers=null, hobbies=[hobby 1, hobby 11]}
```

Uso de tipos complejos en expresiones

Puede usar tipos complejos en expresiones, como expresiones de filtro y expresiones de condición, mediante operadores de cancelación de referencias para navegar por la estructura del tipo complejo. Para objetos y mapas, utilice `. (dot)` y para elementos de lista, utilice `[n]` (corchetes en el número de secuencia del elemento). No puede hacer referencia a elementos individuales de un conjunto, pero puede utilizar la [función `contains`].

El siguiente ejemplo muestra dos expresiones de filtro que se utilizan en operaciones de análisis. Las expresiones de filtro especifican las condiciones de coincidencia de los elementos que desea incluir en los resultados. En el ejemplo se utilizan las clases `Person`, `Address` y `PhoneNumber` mostradas anteriormente.

```
   public void scanUsingFilterOfNestedAttr() {
       // The following is a filter expression for an attribute that is a map of
Address objects.
       // By using this filter expression, the SDK returns Person objects that have an
address
       // with 'mailing' as a key and 'MS2' for a state value.
```

```
        Expression addressFilter = Expression.builder()
                .expression("addresses.#type.#field = :value")
                .putExpressionName("#type", "mailing")
                .putExpressionName("#field", "state")
                .putExpressionValue(":value",
AttributeValue.builder().s("MS2").build())
                .build();

        PageIterable<Person> addressFilterResults = personDynamoDbTable.scan(rb -> rb.
                filterExpression(addressFilter));
        addressFilterResults.items().stream().forEach(p -> logger.info("Person: {}",
p));

        assert addressFilterResults.items().stream().count() == 1;


        // The following is a filter expression for an attribute that is a list of
phone numbers.
        // By using this filter expression, the SDK returns Person objects whose second
phone number
        // in the list has a type equal to 'cell'.
        Expression phoneFilter = Expression.builder()
                .expression("phoneNumbers[1].#type = :type")
                .putExpressionName("#type", "type")
                .putExpressionValue(":type",
AttributeValue.builder().s("cell").build())
                .build();

        PageIterable<Person> phoneFilterResults = personDynamoDbTable.scan(rb -> rb
                .filterExpression(phoneFilter)
                .attributesToProject("id", "firstName", "lastName", "phoneNumbers")
        );

        phoneFilterResults.items().stream().forEach(p -> logger.info("Person: {}", p));

        assert phoneFilterResults.items().stream().count() == 1;
        assert
phoneFilterResults.items().stream().findFirst().get().getPhoneNumbers().get(1).getType().equal
    }
```

Método auxiliar que rellena la tabla

```
    public static void populateDatabase() {
```

```
        Person person1 = new Person();
        person1.setId(1);
        person1.setFirstName("FirstName1");
        person1.setLastName("LastName1");

        Address billingAddr1 = new Address();
        billingAddr1.setState("BS1");
        billingAddr1.setCity("BillingTown1");

        Address mailing1 = new Address();
        mailing1.setState("MS1");
        mailing1.setCity("MailingTown1");

        person1.setAddresses(Map.of("billing", billingAddr1, "mailing", mailing1));

        PhoneNumber pn1_1 = new PhoneNumber();
        pn1_1.setType("work");
        pn1_1.setNumber("111-111-1111");

        PhoneNumber pn1_2 = new PhoneNumber();
        pn1_2.setType("home");
        pn1_2.setNumber("222-222-2222");

        List<PhoneNumber> phoneNumbers1 = List.of(pn1_1, pn1_2);
        person1.setPhoneNumbers(phoneNumbers1);

        personDynamoDbTable.putItem(person1);

        Person person2 = person1;
        person2.setId(2);
        person2.setFirstName("FirstName2");
        person2.setLastName("LastName2");

        Address billingAddress2 = billingAddr1;
        billingAddress2.setCity("BillingTown2");
        billingAddress2.setState("BS2");

        Address mailing2 = mailing1;
        mailing2.setCity("MailingTown2");
        mailing2.setState("MS2");

        person2.setAddresses(Map.of("billing", billingAddress2, "mailing", mailing2));

        PhoneNumber pn2_1 = new PhoneNumber();
```

```
        pn2_1.setType("work");
        pn2_1.setNumber("333-333-3333");

        PhoneNumber pn2_2 = new PhoneNumber();
        pn2_2.setType("cell");
        pn2_2.setNumber("444-444-4444");

        List<PhoneNumber> phoneNumbers2 = List.of(pn2_1, pn2_2);
        person2.setPhoneNumbers(phoneNumbers2);

        personDynamoDbTable.putItem(person2);
    }
```

Representación en JSON de elementos de la base de datos

```
{
 "id": 1,
 "addresses": {
  "billing": {
   "city": "BillingTown1",
   "state": "BS1",
   "street": null,
   "zipCode": null
  },
  "mailing": {
   "city": "MailingTown1",
   "state": "MS1",
   "street": null,
   "zipCode": null
  }
 },
 "firstName": "FirstName1",
 "lastName": "LastName1",
 "phoneNumbers": [
  {
   "number": "111-111-1111",
   "type": "work"
  },
  {
   "number": "222-222-2222",
   "type": "home"
  }
 ]
```

```
}

{
 "id": 2,
 "addresses": {
  "billing": {
   "city": "BillingTown2",
   "state": "BS2",
   "street": null,
   "zipCode": null
  },
  "mailing": {
   "city": "MailingTown2",
   "state": "MS2",
   "street": null,
   "zipCode": null
  }
 },
 "firstName": "FirstName2",
 "lastName": "LastName2",
 "phoneNumbers": [
  {
   "number": "333-333-3333",
   "type": "work"
  },
  {
   "number": "444-444-4444",
   "type": "cell"
  }
 ]
}
```

Actualización de elementos que contienen tipos complejos

Para actualizar un elemento que contiene tipos complejos hay dos métodos básicos:

- Método 1: recupere primero el elemento (usando `getItem`), actualice el objeto y, a continuación, llame a `DynamoDbTable#updateItem`.
- Método 2: no recupere el elemento, pero cree una nueva instancia, establezca las propiedades que desee actualizar y envíe la instancia a `DynamoDbTable#updateItem` estableciendo el valor apropiado de `IgnoreNullsMode`. Con este método no es necesario recuperar el elemento antes de actualizarlo.

Los ejemplos que se muestran en esta sección utilizan las clases `Person`, `Address` y `PhoneNumber` mostradas anteriormente.

Método de actualización 1: recupere y, a continuación, actualice

Al utilizar este método, se asegura de que no se pierdan datos durante la actualización. La API DynamoDB Enhanced Client vuelve a crear el bean con los atributos del elemento guardado en DynamoDB, incluidos los valores de tipos complejos. A continuación, debe usar los métodos getters y los setters para actualizar el bean. La desventaja de este método es el costo en el que se incurre al recuperar primero el elemento.

El siguiente ejemplo demuestra que no se pierde ningún dato si se recupera el elemento antes de actualizarlo.

```
    public void retrieveThenUpdateExample()  {
        // Assume that we ran this code yesterday.
        Person person = new Person();
        person.setId(1);
        person.setFirstName("FirstName");
        person.setLastName("LastName");

        Address mainAddress = new Address();
        mainAddress.setStreet("123 MyStreet");
        mainAddress.setCity("MyCity");
        mainAddress.setState("MyState");
        mainAddress.setZipCode("MyZipCode");
        person.setMainAddress(mainAddress);

        PhoneNumber homePhone = new PhoneNumber();
        homePhone.setNumber("1111111");
        homePhone.setType("HOME");
        person.setPhoneNumbers(List.of(homePhone));

        personDynamoDbTable.putItem(person);

        // Assume that we are running this code now.
        // First, retrieve the item
        Person retrievedPerson =
personDynamoDbTable.getItem(Key.builder().partitionValue(1).build());

        // Make any updates.
        retrievedPerson.getMainAddress().setCity("YourCity");
```

```
        // Save the updated bean. 'updateItem' returns the bean as it appears after the
 update.
        Person updatedPerson = personDynamoDbTable.updateItem(retrievedPerson);

        // Verify for this example.
        Address updatedMainAddress = updatedPerson.getMainAddress();
        assert updatedMainAddress.getCity().equals("YourCity");
        assert updatedMainAddress.getState().equals("MyState"); // Unchanged.
        // The list of phone numbers remains; it was not set to null;
        assert updatedPerson.getPhoneNumbers().size() == 1;
    }
```

Método de actualización 2: utilice una enumeración **`IgnoreNullsMode`** sin recuperar primero el elemento

Para actualizar un elemento en DynamoDB, puede proporcionar un objeto nuevo que solo tenga las propiedades que desee actualizar y dejar los demás valores como nulos. Con este método, debe saber cómo trata el SDK los valores nulos del objeto y cómo puede controlar su comportamiento.

Para especificar qué propiedades con valores nulos quiere que ignore el SDK, proporcione una enumeración `IgnoreNullsMode` al compilar `UpdateItemEnhancedRequest`. Como ejemplo de uso de uno de los valores enumerados, en el siguiente fragmento se utiliza el modo `IgnoreNullsMode.SCALAR_ONLY`.

```
// Create a new Person object to update the existing item in DynamoDB.
Person personForUpdate = new Person();
personForUpdate.setId(1);
personForUpdate.setFirstName("updatedFirstName");  // 'firstName' is a top scalar
 property.

Address addressForUpdate = new Address();
addressForUpdate.setCity("updatedCity");
personForUpdate.setMainAddress(addressForUpdate);

personDynamoDbTable.updateItem(r -> r
                .item(personForUpdate)
                .ignoreNullsMode(IgnoreNullsMode.SCALAR_ONLY));

/* With IgnoreNullsMode.SCALAR_ONLY provided, The SDK ignores all null properties. The
 SDK adds or replaces
the 'firstName' property with the provided value, "updatedFirstName". The SDK updates
 the 'city' value of
```

```
'mainAddress', as long as the 'mainAddress' attribute already exists in DynamoDB.

In the background, the SDK generates an update expression that it sends in the request
 to DynamoDB.
The following JSON object is a simplified version of what it sends. Notice that the SDK
 includes the paths
to 'mainAddress.city' and 'firstName' in the SET clause of the update expression. No
 null values in
'personForUpdate' are included.

{
  "TableName": "PersonTable",
  "Key": {
    "id": {
      "N": "1"
    }
  },
  "ReturnValues": "ALL_NEW",
  "UpdateExpression": "SET #mainAddress.#city = :mainAddress_city, #firstName
 = :firstName",
  "ExpressionAttributeNames": {
    "#city": "city",
    "#firstName": "firstName",
    "#mainAddress": "mainAddress"
  },
  "ExpressionAttributeValues": {
    ":firstName": {
      "S": "updatedFirstName"
    },
    ":mainAddress_city": {
      "S": "updatedCity"
    }
  }
}

Had we chosen 'IgnoreNullsMode.DEFAULT' instead of 'IgnoreNullsMode.SCALAR_ONLY', the
 SDK would have included
null values in the "ExpressionAttributeValues" section of the request as shown in the
 following snippet.

  "ExpressionAttributeValues": {
    ":mainAddress": {
      "M": {
        "zipCode": {
```

```
          "NULL": true
        },
        "city": {
          "S": "updatedCity"
        },
        "street": {
          "NULL": true
        },
        "state": {
          "NULL": true
        }
      }
    },
    ":firstName": {
      "S": "updatedFirstName"
    }
  }
*/
```

Encontrará más información sobre expresiones de actualización en la Guía para desarrolladores de Amazon DynamoDB.

Descripción de las opciones de **`IgnoreNullsMode`**

- `IgnoreNullsMode.SCALAR_ONLY`: use esta configuración para actualizar atributos escalares en cualquier nivel. El SDK crea una instrucción de actualización que envía solo atributos escalares no nulos a DynamoDB. El SDK ignora los atributos escalares con valores nulos de un bean o mapa y conserva el valor guardado en DynamoDB.

  Al actualizar un atributo escalar de un mapa o bean, el mapa ya debe existir en DynamoDB. Si agrega un mapa o un bean al objeto que aún no existe para el objeto en DynamoDB, se generará una excepción `DynamoDbException` con el mensaje The document path provided in the update expression is invalid for update. Debe usar el modo `MAPS_ONLY` para añadir un bean o un mapa a DynamoDB antes de actualizar cualquiera de sus atributos.
- `IgnoreNullsMode.MAPS_ONLY`: utilice este valor para añadir o reemplazar propiedades que sean un bean o un mapa. El SDK reemplaza o añade cualquier mapa o bean incluido en el objeto. Se ignoran los beans o mapas que son nulos en el objeto y se conserva el mapa que existe en DynamoDB.
- `IgnoreNullsMode.DEFAULT`: con esta configuración, el SDK nunca ignora los valores nulos. Los atributos escalares de cualquier nivel que sean nulos se actualizan a nulos. El SDK

actualiza cualquier propiedad de bean, mapa, lista o conjunto con valores nulos en el objeto a nulos en DynamoDB. Cuando utilice este modo (o no proporcione un modo, ya que es el modo predeterminado), debe recuperar primero el elemento para que los valores de DynamoDB no se establezcan como nulos si ya están presentes en el objeto que se va a actualizar, a menos que su intención sea establecerlos como nulos.

En todos los modos, si proporciona a `updateItem` un objeto que tiene una lista o un conjunto no nulos, la lista o el conjunto se guardan en DynamoDB.

¿Por qué los modos?

Al proporcionar un objeto con un bean o un mapa al `updateItem` método, el SDK no puede determinar si debe usar los valores de las propiedades del bean (o los valores de entrada del mapa) para actualizar el elemento o si todo bean/map debe reemplazar lo que se ha guardado en DynamoDB.

Siguiendo el ejemplo anterior, en el que se muestra primero la recuperación del elemento, intentemos actualizar el atributo `city` de `mainAddress` sin la recuperación.

```
/* The retrieval example saved the Person object with a 'mainAddress' property whose
 'city' property value is "MyCity".
/* Note that we create a new Person with only the necessary information to update the
 city value
of the mainAddress. */
Person personForUpdate = new Person();
personForUpdate.setId(1);
// The update we want to make changes the city.
Address mainAddressForUpdate = new Address();
mainAddressForUpdate.setCity("YourCity");
personForUpdate.setMainAddress(mainAddressForUpdate);

// Lets' try the following:
Person updatedPerson = personDynamoDbTable.updateItem(personForUpdate);
/*
 Since we haven't retrieved the item, we don't know if the 'mainAddress' property
 already exists, so what update expression should the SDK generate?

A) Should it replace or add the 'mainAddress' with the provided object (setting all
 attributes to null other than city)
   as shown in the following simplified JSON?
```

```
      {
        "TableName": "PersonTable",
        "Key": {
          "id": {
            "N": "1"
          }
        },
        "ReturnValues": "ALL_NEW",
        "UpdateExpression": "SET #mainAddress = :mainAddress",
        "ExpressionAttributeNames": {
          "#mainAddress": "mainAddress"
        },
        "ExpressionAttributeValues": {
          ":mainAddress": {
            "M": {
              "zipCode": {
                "NULL": true
              },
              "city": {
                "S": "YourCity"
              },
              "street": {
                "NULL": true
              },
              "state": {
                "NULL": true
              }
            }
          }
        }
      }

B) Or should it update only the 'city' attribute of an existing 'mainAddress' as shown
 in the following simplified JSON?

      {
        "TableName": "PersonTable",
        "Key": {
          "id": {
            "N": "1"
          }
        },
        "ReturnValues": "ALL_NEW",
        "UpdateExpression": "SET #mainAddress.#city = :mainAddress_city",
```

```
        "ExpressionAttributeNames": {
          "#city": "city",
          "#mainAddress": "mainAddress"
        },
        "ExpressionAttributeValues": {
          ":mainAddress_city": {
            "S": "YourCity"
          }
        }
      }

However, assume that we don't know if the 'mainAddress' already exists. If it doesn't
 exist, the SDK would try to update
an attribute of a non-existent map, which results in an exception.

In this particular case, we would likely select option B (SCALAR_ONLY) to retain the
 other values of the 'mainAddress'.
*/
```

En los dos ejemplos siguientes se muestran los usos de los valores enumerados `MAPS_ONLY` y `SCALAR_ONLY`. `MAPS_ONLY` agrega un mapa y `SCALAR_ONLY` actualiza un mapa.

`IgnoreNullsMode.MAPS_ONLY`Ejemplo de

```
    public void mapsOnlyModeExample() {
        // Assume that we ran this code yesterday.
        Person person = new Person();
        person.setId(1);
        person.setFirstName("FirstName");

        personDynamoDbTable.putItem(person);

        // Assume that we are running this code now.

        /* Note that we create a new Person with only the necessary information to
 update the city value
        of the mainAddress. */
        Person personForUpdate = new Person();
        personForUpdate.setId(1);
        // The update we want to make changes the city.
        Address mainAddressForUpdate = new Address();
        mainAddressForUpdate.setCity("YourCity");
        personForUpdate.setMainAddress(mainAddressForUpdate);
```

```
        Person updatedPerson = personDynamoDbTable.updateItem(r -> r
                .item(personForUpdate)
                .ignoreNullsMode(IgnoreNullsMode.MAPS_ONLY)); // Since the mainAddress
property does not exist, use MAPS_ONLY mode.
        assert updatedPerson.getMainAddress().getCity().equals("YourCity");
        assert updatedPerson.getMainAddress().getState() == null;
    }
```

IgnoreNullsMode.SCALAR_ONLY example

```
    public void scalarOnlyExample() {
        // Assume that we ran this code yesterday.
        Person person = new Person();
        person.setId(1);
        Address mainAddress = new Address();
        mainAddress.setCity("MyCity");
        mainAddress.setState("MyState");
        person.setMainAddress(mainAddress);

        personDynamoDbTable.putItem(person);

        // Assume that we are running this code now.

        /* Note that we create a new Person with only the necessary information to
update the city value
        of the mainAddress. */
        Person personForUpdate = new Person();
        personForUpdate.setId(1);
        // The update we want to make changes the city.
        Address mainAddressForUpdate = new Address();
        mainAddressForUpdate.setCity("YourCity");
        personForUpdate.setMainAddress(mainAddressForUpdate);

        Person updatedPerson = personDynamoDbTable.updateItem(r -> r
                .item(personForUpdate)
                .ignoreNullsMode(IgnoreNullsMode.SCALAR_ONLY)); // SCALAR_ONLY mode
ignores null properties in the in mainAddress.
        assert updatedPerson.getMainAddress().getCity().equals("YourCity");
        assert updatedPerson.getMainAddress().getState().equals("MyState"); // The
state property remains the same.
    }
```

Consulte la siguiente tabla para ver qué valores nulos se ignoran para cada modo. A menudo puede trabajar con `SCALAR_ONLY` o con `MAPS_ONLY`, salvo cuando trabaja con beans o mapas.

¿Qué propiedades con valores nulos en el objeto enviado a **`updateItem`** ignora el SDK para cada modo?

Tipo de propiedad	en modo SCALAR_ONLY	en modo MAPS_ONLY	en modo DEFAULT
Escalar superior	Sí	Sí	No
Bean o mapa	Sí	Sí	No
Valor escalar de una entrada de bean o mapa	Sí[1]	No[2]	No
Lista o conjunto	Sí	Sí	No

[1]Asume que el mapa ya existe en DynamoDB. Cualquier valor escalar (nulo o no nulo) del bean o el mapa que proporcione en el objeto para actualización requiere que exista una ruta al valor en DynamoDB. El SDK crea una ruta al atributo mediante el operador de desreferenciación `. (dot)` antes de enviar la solicitud.

[2]Dado que se utiliza el modo `MAPS_ONLY` para sustituir por completo o añadir un bean o mapa, todos los valores nulos del bean o mapa se conservan en el mapa guardado en DynamoDB.

Conserva los objetos vacíos con **`@DynamoDbPreserveEmptyObject`**

Si guarda un bean en Amazon DynamoDB con objetos vacíos y desea que el SDK vuelva a crear los objetos vacíos al recuperarlos, anote el getter del bean interior con `@DynamoDbPreserveEmptyObject`.

Para ilustrar cómo funciona la anotación, en el ejemplo de código se utilizan los dos beans siguientes.

Beans de ejemplo

La clase de datos siguiente contiene dos campos `InnerBean`. El método de getter, `getInnerBeanWithoutAnno()`, no está anotado con `@DynamoDbPreserveEmptyObject`. El método `getInnerBeanWithAnno()` está anotado.

```
@DynamoDbBean
public class MyBean {

    private String id;
    private String name;
    private InnerBean innerBeanWithoutAnno;
    private InnerBean innerBeanWithAnno;

    @DynamoDbPartitionKey
    public String getId() { return id; }
    public void setId(String id) { this.id = id; }

    public String getName() { return name; }
    public void setName(String name) { this.name = name; }

    public InnerBean getInnerBeanWithoutAnno() { return innerBeanWithoutAnno; }
    public void setInnerBeanWithoutAnno(InnerBean innerBeanWithoutAnno)
 { this.innerBeanWithoutAnno = innerBeanWithoutAnno; }

    @DynamoDbPreserveEmptyObject
    public InnerBean getInnerBeanWithAnno() { return innerBeanWithAnno; }
    public void setInnerBeanWithAnno(InnerBean innerBeanWithAnno)
 { this.innerBeanWithAnno = innerBeanWithAnno; }

    @Override
    public String toString() {
        return new StringJoiner(", ", MyBean.class.getSimpleName() + "[", "]")
                .add("innerBeanWithoutAnno=" + innerBeanWithoutAnno)
                .add("innerBeanWithAnno=" + innerBeanWithAnno)
                .add("id='" + id + "'")
                .add("name='" + name + "'")
                .toString();
    }
}
```

Las instancias de la clase siguiente `InnerBean` son campos de `MyBean` y se inicializan como objetos vacíos en el código de ejemplo.

```
@DynamoDbBean
public class InnerBean {

    private String innerBeanField;
```

```
    public String getInnerBeanField() {
        return innerBeanField;
    }

    public void setInnerBeanField(String innerBeanField) {
        this.innerBeanField = innerBeanField;
    }

    @Override
    public String toString() {
        return "InnerBean{" +
                "innerBeanField='" + innerBeanField + '\'' +
                '}';
    }
}
```

El siguiente ejemplo de código guarda un objeto `MyBean` con objetos beans internos inicializados en DynamoDB y, a continuación, recupera el elemento. El resultado registrado muestra que el `innerBeanWithoutAnno` no se ha inicializado, sino que se ha creado `innerBeanWithAnno`.

```
   public MyBean preserveEmptyObjectAnnoUsingGetItemExample(DynamoDbTable<MyBean>
 myBeanTable) {
        // Save an item to DynamoDB.
        MyBean bean = new MyBean();
        bean.setId("1");
        bean.setInnerBeanWithoutAnno(new InnerBean());   // Instantiate the inner bean.
        bean.setInnerBeanWithAnno(new InnerBean());      // Instantiate the inner bean.
        myBeanTable.putItem(bean);

        GetItemEnhancedRequest request = GetItemEnhancedRequest.builder()
                .key(Key.builder().partitionValue("1").build())
                .build();
        MyBean myBean = myBeanTable.getItem(request);

        logger.info(myBean.toString());
        // Output 'MyBean[innerBeanWithoutAnno=null,
 innerBeanWithAnno=InnerBean{innerBeanField='null'}, id='1', name='null']'.

        return myBean;
    }
```

Esquema estático alternativo

Puede utilizar la siguiente versión de `StaticTableSchema` de los esquemas de tabla en lugar de las anotaciones de los beans.

```
    public static TableSchema<MyBean> buildStaticSchemas() {

        StaticTableSchema<InnerBean> innerBeanStaticTableSchema =
                StaticTableSchema.builder(InnerBean.class)
                        .newItemSupplier(InnerBean::new)
                        .addAttribute(String.class, a -> a.name("innerBeanField")
                                .getter(InnerBean::getInnerBeanField)
                                .setter(InnerBean::setInnerBeanField))
                        .build();

        return StaticTableSchema.builder(MyBean.class)
                .newItemSupplier(MyBean::new)
                .addAttribute(String.class, a -> a.name("id")
                        .getter(MyBean::getId)
                        .setter(MyBean::setId)
                        .addTag(primaryPartitionKey()))
                .addAttribute(String.class, a -> a.name("name")
                        .getter(MyBean::getName)
                        .setter(MyBean::setName))
                .addAttribute(EnhancedType.documentOf(InnerBean.class,
                                innerBeanStaticTableSchema),
                        a -> a.name("innerBean1")
                                .getter(MyBean::getInnerBeanWithoutAnno)
                                .setter(MyBean::setInnerBeanWithoutAnno))
                .addAttribute(EnhancedType.documentOf(InnerBean.class,
                                innerBeanStaticTableSchema,
                                b -> b.preserveEmptyObject(true)),
                        a -> a.name("innerBean2")
                                .getter(MyBean::getInnerBeanWithAnno)
                                .setter(MyBean::setInnerBeanWithAnno))
                .build();
    }
```

Evitar guardar atributos nulos de los objetos anidados

Puede omitir los atributos nulos de los objetos anidados al guardar un objeto de clase de datos en DynamoDB aplicando la anotación. `@DynamoDbIgnoreNulls` Por el contrario, los atributos de nivel superior con valores nulos nunca se guardan en la base de datos.

Para ilustrar cómo funciona la anotación, en el ejemplo de código se utilizan los dos beans siguientes.

Beans de ejemplo

La clase de datos siguiente contiene dos campos `InnerBean`. El método de getter, `getInnerBeanWithoutAnno()`, no está anotado. El método `getInnerBeanWithIgnoreNullsAnno()` está anotado con `@DynamoDbIgnoreNulls`.

```
@DynamoDbBean
public class MyBean {

    private String id;
    private String name;
    private InnerBean innerBeanWithoutAnno;
    private InnerBean innerBeanWithIgnoreNullsAnno;

    @DynamoDbPartitionKey
    public String getId() { return id; }
    public void setId(String id) { this.id = id; }

    public String getName() { return name; }
    public void setName(String name) { this.name = name; }

    public InnerBean getInnerBeanWithoutAnno() { return innerBeanWithoutAnno; }
    public void setInnerBeanWithoutAnno(InnerBean innerBeanWithoutAnno)
 { this.innerBeanWithoutAnno = innerBeanWithoutAnno; }

    @DynamoDbIgnoreNulls
    public InnerBean getInnerBeanWithIgnoreNullsAnno() { return
 innerBeanWithIgnoreNullsAnno; }
    public void setInnerBeanWithIgnoreNullsAnno(InnerBean innerBeanWithAnno)
 { this.innerBeanWithIgnoreNullsAnno = innerBeanWithAnno; }

    @Override
    public String toString() {
        return new StringJoiner(", ", MyBean.class.getSimpleName() + "[", "]")
                .add("innerBeanWithoutAnno=" + innerBeanWithoutAnno)
                .add("innerBeanWithIgnoreNullsAnno=" + innerBeanWithIgnoreNullsAnno)
                .add("id='" + id + "'")
                .add("name='" + name + "'")
                .toString();
    }
```

```
}
```

Las instancias de la clase `InnerBean` siguiente son campos de `MyBean` y se inicializan como objetos vacíos en el código de ejemplo.

```
@DynamoDbBean
public class InnerBean {

    private String innerBeanFieldString;
    private Integer innerBeanFieldInteger;

    public String getInnerBeanFieldString() { return innerBeanFieldString; }
    public void setInnerBeanFieldString(String innerBeanFieldString)
 { this.innerBeanFieldString = innerBeanFieldString; }

    public Integer getInnerBeanFieldInteger() { return innerBeanFieldInteger; }
    public void setInnerBeanFieldInteger(Integer innerBeanFieldInteger)
 { this.innerBeanFieldInteger = innerBeanFieldInteger; }

    @Override
    public String toString() {
        return new StringJoiner(", ", InnerBean.class.getSimpleName() + "[", "]")
                .add("innerBeanFieldString='" + innerBeanFieldString + "'")
                .add("innerBeanFieldInteger=" + innerBeanFieldInteger)
                .toString();
    }
}
```

El siguiente ejemplo de código crea un objeto `InnerBean` y establece solo uno de sus dos atributos con un valor.

```
    public void ignoreNullsAnnoUsingPutItemExample(DynamoDbTable<MyBean> myBeanTable) {
        // Create an InnerBean object and give only one attribute a value.
        InnerBean innerBeanOneAttributeSet = new InnerBean();
        innerBeanOneAttributeSet.setInnerBeanFieldInteger(200);

        // Create a MyBean instance and use the same InnerBean instance both for
 attributes.
        MyBean bean = new MyBean();
        bean.setId("1");
        bean.setInnerBeanWithoutAnno(innerBeanOneAttributeSet);
        bean.setInnerBeanWithIgnoreNullsAnno(innerBeanOneAttributeSet);
```

```
        Map<String, AttributeValue> itemMap = myBeanTable.tableSchema().itemToMap(bean,
 true);
        logger.info(itemMap.toString());
        // Log the map that is sent to the database.
        //
 {innerBeanWithIgnoreNullsAnno=AttributeValue(M={innerBeanFieldInteger=AttributeValue(N=200)}),
 id=AttributeValue(S=1),
 innerBeanWithoutAnno=AttributeValue(M={innerBeanFieldInteger=AttributeValue(N=200),
 innerBeanFieldString=AttributeValue(NUL=true)})}

        // Save the MyBean object to the table.
        myBeanTable.putItem(bean);
    }
```

Para visualizar los datos de bajo nivel que se envían a DynamoDB, el código registra el mapa de atributos antes de guardar el objeto `MyBean`.

La salida registrada muestra que `innerBeanWithIgnoreNullsAnno` emite un atributo,

```
innerBeanWithIgnoreNullsAnno=AttributeValue(M={innerBeanFieldInteger=AttributeValue(N=200)})
```

La instancia `innerBeanWithoutAnno` genera dos atributos. Un atributo tiene un valor de 200 y el otro tiene un valor nulo.

```
innerBeanWithoutAnno=AttributeValue(M={innerBeanFieldInteger=AttributeValue(N=200),
 innerBeanFieldString=AttributeValue(NUL=true)})
```

Representación en JSON del mapa de atributos

La siguiente representación en JSON facilita la visualización de los datos guardados en DynamoDB.

```
{
  "id": {
    "S": "1"
  },
  "innerBeanWithIgnoreNullsAnno": {
    "M": {
      "innerBeanFieldInteger": {
        "N": "200"
      }
    }
```

```
  },
  "innerBeanWithoutAnno": {
    "M": {
      "innerBeanFieldInteger": {
        "N": "200"
      },
      "innerBeanFieldString": {
        "NULL": true
      }
    }
  }
}
```

Esquema estático alternativo

Puede utilizar la siguiente versión de `StaticTableSchema` de los esquemas de tabla en lugar de las anotaciones de los beans.

```
public static TableSchema<MyBean> buildStaticSchemas() {

    StaticTableSchema<InnerBean> innerBeanStaticTableSchema =
        StaticTableSchema.builder(InnerBean.class)
            .newItemSupplier(InnerBean::new)
            .addAttribute(String.class, a -> a.name("innerBeanFieldString")
                .getter(InnerBean::getInnerBeanFieldString)
                .setter(InnerBean::setInnerBeanFieldString))
            .addAttribute(Integer.class, a -> a.name("innerBeanFieldInteger")
                .getter(InnerBean::getInnerBeanFieldInteger)
                .setter(InnerBean::setInnerBeanFieldInteger))
            .build();

    return StaticTableSchema.builder(MyBean.class)
        .newItemSupplier(MyBean::new)
        .addAttribute(String.class, a -> a.name("id")
            .getter(MyBean::getId)
            .setter(MyBean::setId)
            .addTag(primaryPartitionKey()))
        .addAttribute(String.class, a -> a.name("name")
            .getter(MyBean::getName)
            .setter(MyBean::setName))
        .addAttribute(EnhancedType.documentOf(InnerBean.class,
                innerBeanStaticTableSchema),
            a -> a.name("innerBeanWithoutAnno")
```

```
                .getter(MyBean::getInnerBeanWithoutAnno)
                .setter(MyBean::setInnerBeanWithoutAnno))
        .addAttribute(EnhancedType.documentOf(InnerBean.class,
                innerBeanStaticTableSchema,
                b -> b.ignoreNulls(true)),
            a -> a.name("innerBeanWithIgnoreNullsAnno")
                .getter(MyBean::getInnerBeanWithIgnoreNullsAnno)
                .setter(MyBean::setInnerBeanWithIgnoreNullsAnno))
        .build();
}
```

Trabaje con documentos JSON con la API de documentos mejorada para DynamoDB

La API de documentos mejorada para AWS SDK for Java 2.x está diseñada para funcionar con datos orientados a documentos que no tienen un esquema fijo. Sin embargo, también le permite utilizar clases personalizadas para asignar atributos individuales.

La API de documentos mejorada es la sucesora de la API de documentos de la AWS SDK para Java versión 1.x.

Contenido

- Introducción al uso de API de documentos mejorada
  - Crear un DocumentTableSchema y una DynamoDbTable.
- Crear documentos mejorados
  - Compilar a partir de una cadena JSON
  - Construir a partir de elementos individuales
- Operaciones CRUD
- Acceder a los atributos mejorados del documento como objetos personalizados
- Utilizar un EnhancedDocument sin DynamoDB

Introducción al uso de API de documentos mejorada

La API de documentos mejorada requiere las mismas dependencias que se necesitan para la API de cliente mejorado de DynamoDB. También requiere una instancia de `DynamoDbEnhancedClient`, como se muestra al principio de este tema.

Como la API de documentos mejorada se publicó con la versión 2.20.3 de AWS SDK for Java 2.x, necesita esa versión o una superior.

Crear un **`DocumentTableSchema`** y una **`DynamoDbTable`**.

Para invocar comandos en una tabla de DynamoDB mediante la API de documentos mejorada, asocie la tabla a un objeto de recurso **< >** del lado del DynamoDbTablecliente EnhancedDocument.

El método `table()` del cliente mejorado crea una instancia `DynamoDbTable<EnhancedDocument>` y requiere parámetros para el nombre de la tabla de DynamoDB y un `DocumentTableSchema`.

El generador de a DocumentTableSchemarequiere una clave de índice principal y uno o más proveedores de convertidores de atributos. El método `AttributeConverterProvider.defaultProvider()` proporciona convertidores para los tipos predeterminados. Debe especificarse incluso si proporciona un proveedor de convertidores de atributos personalizado. Puede añadir una clave de índice secundaria opcional al generador.

El siguiente fragmento de código muestra el código que genera la representación del lado de una tabla `person` de DynamoDB que almacena objetos `EnhancedDocument` sin esquema.

```
DynamoDbTable<EnhancedDocument> documentDynamoDbTable =
                enhancedClient.table("person",
                        TableSchema.documentSchemaBuilder()
                            // Specify the primary key attributes.

 .addIndexPartitionKey(TableMetadata.primaryIndexName(),"id", AttributeValueType.S)
                            .addIndexSortKey(TableMetadata.primaryIndexName(),
 "lastName", AttributeValueType.S)
                            // Specify attribute converter providers. Minimally add the
 default one.

 .attributeConverterProviders(AttributeConverterProvider.defaultProvider())
                            .build());

// Call documentTable.createTable() if "person" does not exist in DynamoDB.
// createTable() should be called only one time.
```

A continuación, se muestra la representación JSON de un objeto `person` que se utiliza en esta sección.

Objeto **`person`** JSON

```
{
```

```
  "id": 1,
  "firstName": "Richard",
  "lastName": "Roe",
  "age": 25,
  "addresses":
    {
      "home": {
        "zipCode": "00000",
        "city": "Any Town",
        "state": "FL",
        "street": "123 Any Street"
      },
      "work": {
        "zipCode": "00001",
        "city": "Anywhere",
        "state": "FL",
        "street": "100 Main Street"
      }
    },
  "hobbies": [
    "Hobby 1",
    "Hobby 2"
  ],
  "phoneNumbers": [
    {
      "type": "Home",
      "number": "555-0100"
    },
    {
      "type": "Work",
      "number": "555-0119"
    }
  ]
}
```

Crear documentos mejorados

Un `EnhancedDocument` representa un objeto de tipo documento que tiene una estructura compleja con atributos anidados. Un `EnhancedDocument` requiere atributos de nivel superior que coincidan con los atributos clave principales especificados para el `DocumentTableSchema`. El contenido restante es arbitrario y puede consistir en atributos de nivel superior y también en atributos profundamente anidados.

Para crear una instancia `EnhancedDocument`, utilice un generador que proporciona varias formas de añadir elementos.

Compilar a partir de una cadena JSON

Con una cadena JSON, puede construir un `EnhancedDocument` en una llamada al método. El siguiente fragmento de código crea un `EnhancedDocument` a partir de una cadena JSON devuelta por el método auxiliar `jsonPerson()`. El método `jsonPerson()` devuelve la versión de cadena JSON del objeto persona mostrado anteriormente.

```
EnhancedDocument document =
        EnhancedDocument.builder()
                        .json( jsonPerson() )
                        .build());
```

Construir a partir de elementos individuales

Alternativamente, puede construir una instancia `EnhancedDocument` a partir de componentes individuales utilizando métodos seguros de tipo del constructor.

En el ejemplo siguiente, se crea un documento mejorado `person` similar al que se crea a partir de la cadena JSON del ejemplo anterior.

```
       /* Define the shape of an address map whose JSON representation looks like the
following.
          Use 'addressMapEnhancedType' in the following EnhancedDocument.builder() to
simplify the code.
          "home": {
            "zipCode": "00000",
            "city": "Any Town",
            "state": "FL",
            "street": "123 Any Street"
          }*/
       EnhancedType<Map<String, String>> addressMapEnhancedType =
               EnhancedType.mapOf(EnhancedType.of(String.class),
EnhancedType.of(String.class));


       //  Use the builder's typesafe methods to add elements to the enhanced
document.
       EnhancedDocument personDocument = EnhancedDocument.builder()
               .putNumber("id", 50)
```

```
                .putString("firstName", "Shirley")
                .putString("lastName", "Rodriguez")
                .putNumber("age", 53)
                .putNull("nullAttribute")
                .putJson("phoneNumbers", phoneNumbersJSONString())
                /* Add the map of addresses whose JSON representation looks like the
following.
                        {
                          "home": {
                            "zipCode": "00000",
                            "city": "Any Town",
                            "state": "FL",
                            "street": "123 Any Street"
                          }
                        } */
                .putMap("addresses", getAddresses(), EnhancedType.of(String.class),
addressMapEnhancedType)
                .putList("hobbies", List.of("Theater", "Golf"),
EnhancedType.of(String.class))
                .build();
```

Métodos auxiliares

```
   private static String phoneNumbersJSONString() {
       return "  [" +
               "    {" +
               "      \"type\": \"Home\"," +
               "      \"number\": \"555-0140\"" +
               "    }," +
               "    {" +
               "      \"type\": \"Work\"," +
               "      \"number\": \"555-0155\"" +
               "    }" +
               "  ]";
   }

   private static Map<String, Map<String, String>> getAddresses() {
       return Map.of(
               "home", Map.of(
                       "zipCode", "00002",
                       "city", "Any Town",
                       "state", "ME",
                       "street", "123 Any Street"));
```

```
    }
```

Operaciones CRUD

Una vez definida una instancia `EnhancedDocument`, puede guardarla en una tabla de DynamoDB. El siguiente fragmento de código utiliza el PersonDocument que se creó a partir de elementos individuales.

```
documentDynamoDbTable.putItem(personDocument);
```

Después de leer una instancia de documento mejorada de DynamoDB, puede extraer los valores individuales de los atributos utilizando getters como se muestra en el siguiente fragmento de código que accede a los datos guardados del `personDocument`. Como alternativa, puede extraer el contenido completo en una cadena JSON, como se muestra en la última parte del código de ejemplo.

```
       // Read the item.
       EnhancedDocument personDocFromDb =
documentDynamoDbTable.getItem(Key.builder().partitionValue(50).build());

       // Access top-level attributes.
       logger.info("Name: {} {}", personDocFromDb.getString("firstName"),
personDocFromDb.getString("lastName"));
       // Name: Shirley Rodriguez

       // Typesafe access of a deeply nested attribute. The addressMapEnhancedType
shown previously defines the shape of an addresses map.
       Map<String, Map<String, String>> addresses =
personDocFromDb.getMap("addresses", EnhancedType.of(String.class),
addressMapEnhancedType);
       addresses.keySet().forEach(k -> logger.info(addresses.get(k).toString()));
       // {zipCode=00002, city=Any Town, street=123 Any Street, state=ME}

       // Alternatively, work with AttributeValue types checking along the way for
deeply nested attributes.
       Map<String, AttributeValue> addressesMap =
personDocFromDb.getMapOfUnknownType("addresses");
       addressesMap.keySet().forEach((String k) -> {
           logger.info("Looking at data for [{}] address", k);
           // Looking at data for [home] address
           AttributeValue value = addressesMap.get(k);
           AttributeValue cityValue = value.m().get("city");
```

```
            if (cityValue != null) {
                logger.info(cityValue.s());
                // Any Town
            }
        });

        List<AttributeValue> phoneNumbers =
 personDocFromDb.getListOfUnknownType("phoneNumbers");
        phoneNumbers.forEach((AttributeValue av) -> {
            if (av.hasM()) {
                AttributeValue type = av.m().get("type");
                if (type.s() != null) {
                    logger.info("Type of phone: {}", type.s());
                    // Type of phone: Home
                    // Type of phone: Work
                }
            }
        });

        String jsonPerson = personDocFromDb.toJson();
        logger.info(jsonPerson);
        // {"firstName":"Shirley","lastName":"Rodriguez","addresses":
{"home":{"zipCode":"00002","city":"Any Town","street":"123 Any
 Street","state":"ME"}},"hobbies":["Theater","Golf"],
        //     "id":50,"nullAttribute":null,"age":53,"phoneNumbers":
[{"number":"555-0140","type":"Home"},{"number":"555-0155","type":"Work"}]}
```

`EnhancedDocument`las instancias se pueden usar con cualquier método `DynamoDbTable` o `DynamoDbEnhancedClient`en lugar de las clases de datos mapeadas.

Acceder a los atributos mejorados del documento como objetos personalizados

Además de proporcionar una API para leer y escribir atributos con estructuras sin esquema, la API de documentos mejorada te permite convertir atributos desde y hacia instancias de clases personalizadas.

La API del cliente mejorado utiliza `AttributeConverterProviders` y `AttributeConverters` que se mostraron en la sección de conversión de atributos de control como parte de la API del cliente mejorado de DynamoDB.

En el ejemplo siguiente, utilizamos a `CustomAttributeConverterProvider` con su clase `AddressConverter` anidada para convertir objetos `Address`.

En este ejemplo se muestra que se pueden mezclar datos de clases y también datos de estructuras que se crean según sea necesario. En este ejemplo también se muestra que las clases personalizadas se pueden utilizar en cualquier nivel de una estructura anidada. Los objetos `Address` de este ejemplo son valores que se utilizan en un mapa.

```
   public static void attributeToAddressClassMappingExample(DynamoDbEnhancedClient
enhancedClient, DynamoDbClient standardClient) {
       String tableName = "customer";

       // Define the DynamoDbTable for an enhanced document.
       // The schema builder provides methods for attribute converter providers and
keys.
       DynamoDbTable<EnhancedDocument> documentDynamoDbTable =
enhancedClient.table(tableName,
               DocumentTableSchema.builder()
                       // Add the CustomAttributeConverterProvider along with the
default when you build the table schema.
                       .attributeConverterProviders(
                               List.of(
                                       new CustomAttributeConverterProvider(),
                                       AttributeConverterProvider.defaultProvider()))
                       .addIndexPartitionKey(TableMetadata.primaryIndexName(), "id",
AttributeValueType.N)
                       .addIndexSortKey(TableMetadata.primaryIndexName(), "lastName",
AttributeValueType.S)
                       .build());
       // Create the DynamoDB table if needed.
       documentDynamoDbTable.createTable();
       waitForTableCreation(tableName, standardClient);


       // The getAddressesForCustomMappingExample() helper method that provides
'addresses' shows the use of a custom Address class
       // rather than using a Map<String, Map<String, String> to hold the address
data.
       Map<String, Address> addresses = getAddressesForCustomMappingExample();

       // Build an EnhancedDocument instance to save an item with a mix of structures
defined as needed and static classes.
       EnhancedDocument personDocument = EnhancedDocument.builder()
               .putNumber("id", 50)
               .putString("firstName", "Shirley")
               .putString("lastName", "Rodriguez")
```

```
                .putNumber("age", 53)
                .putNull("nullAttribute")
                .putJson("phoneNumbers", phoneNumbersJSONString())
                // Note the use of 'EnhancedType.of(Address.class)' instead of the more
 generic
                // 'EnhancedType.mapOf(EnhancedType.of(String.class),
 EnhancedType.of(String.class))' that was used in a previous example.
                .putMap("addresses", addresses, EnhancedType.of(String.class),
 EnhancedType.of(Address.class))
                .putList("hobbies", List.of("Hobby 1", "Hobby 2"),
 EnhancedType.of(String.class))
                .build();
        // Save the item to DynamoDB.
        documentDynamoDbTable.putItem(personDocument);

        // Retrieve the item just saved.
        EnhancedDocument srPerson =
 documentDynamoDbTable.getItem(Key.builder().partitionValue(50).sortValue("Rodriguez").build())

        // Access the addresses attribute.
        Map<String, Address> srAddresses = srPerson.get("addresses",
                EnhancedType.mapOf(EnhancedType.of(String.class),
 EnhancedType.of(Address.class)));

        srAddresses.keySet().forEach(k -> logger.info(addresses.get(k).toString()));

        documentDynamoDbTable.deleteTable();

// The content logged to the console shows that the saved maps were converted to
 Address instances.
Address{street='123 Main Street', city='Any Town', state='NC', zipCode='00000'}
Address{street='100 Any Street', city='Any Town', state='NC', zipCode='00000'}
```

CustomAttributeConverterProvider code

```
public class CustomAttributeConverterProvider implements AttributeConverterProvider {

    private final Map<EnhancedType<?>, AttributeConverter<?>> converterCache =
 ImmutableMap.of(
            // 1. Add AddressConverter to the internal cache.
            EnhancedType.of(Address.class), new AddressConverter());

    public static CustomAttributeConverterProvider create() {
```

```
        return new CustomAttributeConverterProvider();
    }

    // 2. The enhanced client queries the provider for attribute converters if it
    //    encounters a type that it does not know how to convert.
    @SuppressWarnings("unchecked")
    @Override
    public <T> AttributeConverter<T> converterFor(EnhancedType<T> enhancedType) {
        return (AttributeConverter<T>) converterCache.get(enhancedType);
    }

    // 3. Custom attribute converter
    private class AddressConverter implements AttributeConverter<Address> {
        // 4. Transform an Address object into a DynamoDB map.
        @Override
        public AttributeValue transformFrom(Address address) {

            Map<String, AttributeValue> attributeValueMap = Map.of(
                    "street", AttributeValue.fromS(address.getStreet()),
                    "city", AttributeValue.fromS(address.getCity()),
                    "state", AttributeValue.fromS(address.getState()),
                    "zipCode", AttributeValue.fromS(address.getZipCode()));

            return AttributeValue.fromM(attributeValueMap);
        }

        // 5. Transform the DynamoDB map attribute to an Address oject.
        @Override
        public Address transformTo(AttributeValue attributeValue) {
            Map<String, AttributeValue> m = attributeValue.m();
            Address address = new Address();
            address.setStreet(m.get("street").s());
            address.setCity(m.get("city").s());
            address.setState(m.get("state").s());
            address.setZipCode(m.get("zipCode").s());

            return address;
        }

        @Override
        public EnhancedType<Address> type() {
            return EnhancedType.of(Address.class);
        }
```

```
        @Override
        public AttributeValueType attributeValueType() {
            return AttributeValueType.M;
        }
    }
}
```

Clase **`Address`**

```
public class Address {
                  private String street;
                  private String city;
                  private String state;
                  private String zipCode;

                  public Address() {
                  }

                  public String getStreet() {
                  return this.street;
                  }

                  public String getCity() {
                  return this.city;
                  }

                  public String getState() {
                  return this.state;
                  }

                  public String getZipCode() {
                  return this.zipCode;
                  }

                  public void setStreet(String street) {
                  this.street = street;
                  }

                  public void setCity(String city) {
                  this.city = city;
                  }

                  public void setState(String state) {
```

```
                this.state = state;
                }

                public void setZipCode(String zipCode) {
                this.zipCode = zipCode;
                }
                }
```

Método auxiliar que proporciona direcciones

El siguiente método auxiliar proporciona el mapa que utiliza instancias `Address` personalizadas para los valores en lugar de instancias `Map<String, String>` genéricas para los valores.

```
    private static Map<String, Address> getAddressesForCustomMappingExample() {
        Address homeAddress = new Address();
        homeAddress.setStreet("100 Any Street");
        homeAddress.setCity("Any Town");
        homeAddress.setState("NC");
        homeAddress.setZipCode("00000");

        Address workAddress = new Address();
        workAddress.setStreet("123 Main Street");
        workAddress.setCity("Any Town");
        workAddress.setState("NC");
        workAddress.setZipCode("00000");

        return Map.of("home", homeAddress,
                "work", workAddress);
    }
```

Utilizar un **`EnhancedDocument`** sin DynamoDB

Aunque normalmente se utiliza una instancia de un `EnhancedDocument` para leer y escribir elementos de DynamoDB de tipo documento, también se puede utilizar con independencia de DynamoDB.

Puede utilizar `EnhancedDocuments` por su capacidad de convertir cadenas JSON u objetos personalizados en mapas de `AttributeValues` de bajo nivel, como se muestra en el siguiente ejemplo.

```
    public static void conversionWithoutDynamoDbExample() {
        Address address = new Address();
```

```
        address.setCity("my city");
        address.setState("my state");
        address.setStreet("my street");
        address.setZipCode("00000");

        // Build an EnhancedDocument instance for its conversion functionality alone.
        EnhancedDocument addressEnhancedDoc = EnhancedDocument.builder()
                // Important: You must specify attribute converter providers when you
build an EnhancedDocument instance not used with a DynamoDB table.
                .attributeConverterProviders(new CustomAttributeConverterProvider(),
DefaultAttributeConverterProvider.create())
                .put("addressDoc", address, Address.class)
                .build();

        // Convert address to a low-level item representation.
        final Map<String, AttributeValue> addressAsAttributeMap =
addressEnhancedDoc.getMapOfUnknownType("addressDoc");
        logger.info("addressAsAttributeMap: {}", addressAsAttributeMap.toString());

        // Convert address to a JSON string.
        String addressAsJsonString = addressEnhancedDoc.getJson("addressDoc");
        logger.info("addressAsJsonString: {}", addressAsJsonString);
        // Convert addressEnhancedDoc back to an Address instance.
        Address addressConverted =  addressEnhancedDoc.get("addressDoc",
Address.class);
        logger.info("addressConverted: {}", addressConverted.toString());
    }

  /* Console output:
          addressAsAttributeMap: {zipCode=AttributeValue(S=00000),
state=AttributeValue(S=my state), street=AttributeValue(S=my street),
city=AttributeValue(S=my city)}
          addressAsJsonString: {"zipCode":"00000","state":"my state","street":"my
street","city":"my city"}
          addressConverted: Address{street='my street', city='my city', state='my
state', zipCode='00000'}
  */
```

> **Note**
>
> Cuando utilice un documento mejorado independiente de una tabla de DynamoDB, asegúrese de establecer explícitamente los proveedores de convertidores de atributos en el generador.

Por el contrario, el esquema de la tabla de documentos proporciona los proveedores de conversión cuando se utiliza un documento mejorado con una tabla de DynamoDB.

Uso de extensiones para personalizar operaciones de DynamoDB Enhanced Client

La API del cliente mejorado de DynamoDB admite extensiones de complementos que proporcionan funciones que van más allá de las operaciones de mapeo. Las extensiones utilizan dos métodos de enlace para modificar datos durante las operaciones de lectura y escritura:

- `beforeWrite()`: modifica una operación de escritura antes de que se produzca
- `afterRead()`: modifica los resultados de una operación de lectura después de que se produzca

Algunas operaciones (como las actualizaciones de elementos) realizan una escritura y luego una lectura, por lo que se llama a ambos métodos de enlace.

Cómo se cargan las extensiones

Las extensiones se cargan en el orden que especifique en el compilador del cliente mejorado. El orden de carga puede ser importante porque una extensión puede actuar sobre valores que han sido transformados por una extensión anterior.

De forma predeterminada, el cliente mejorado carga dos extensiones:

- `VersionedRecordExtension`: proporciona bloqueo positivo
- `AtomicCounterExtension`: incrementa automáticamente los atributos del contador

Puede anular el comportamiento predeterminado con el compilador del cliente mejorado y cargar cualquier extensión. También puede no especificar ninguna si no desea utilizar las extensiones predeterminadas.

Important

Si carga sus propias extensiones, el cliente mejorado no carga ninguna extensión predeterminada. Si desea el comportamiento proporcionado por alguna de las extensiones predeterminadas, deberá añadirla explícitamente a la lista de extensiones.

El siguiente ejemplo muestra cómo cargar una extensión personalizada llamada `verifyChecksumExtension` después de la `VersionedRecordExtension`. La `AtomicCounterExtension` no se carga en este ejemplo.

```
DynamoDbEnhancedClientExtension versionedRecordExtension =
 VersionedRecordExtension.builder().build();

DynamoDbEnhancedClient enhancedClient =
    DynamoDbEnhancedClient.builder()
                          .dynamoDbClient(dynamoDbClient)
                          .extensions(versionedRecordExtension,
 verifyChecksumExtension)
                          .build();
```

Detalles y configuración de extensión disponibles

En las secciones siguientes se proporciona información detallada sobre cada extensión disponible en el SDK.

Implemente bloqueo positivo con **`VersionedRecordExtension`**

La extensión `VersionedRecordExtension` proporciona bloqueo positivo incrementando y rastreando el número de versión de los elemento a medida que estos se escriben en la base de datos. Se añade una condición a cada escritura que hará que esta falle si el número de versión del elemento persistido real no coincide con el valor que la aplicación leyó por última vez.

Configuración

Para especificar qué atributo usar para rastrear el número de versión del elemento, etiquete un atributo numérico en el esquema de la tabla.

El siguiente fragmento especifica que el atributo `version` debe contener el número de versión del artículo.

```
    @DynamoDbVersionAttribute
    public Integer getVersion() {...};
    public void setVersion(Integer version) {...};
```

El enfoque equivalente del esquema de tabla estático se muestra en el siguiente fragmento.

```
    .addAttribute(Integer.class, a -> a.name("version")
```

```
                                        .getter(Customer::getVersion)
                                        .setter(Customer::setVersion)
                                         // Apply the 'version' tag to the attribute.

  .tags(VersionedRecordExtension.AttributeTags.versionAttribute())
```

Funcionamiento

El bloqueo positivo con la `VersionedRecordExtension` tiene el siguiente efecto en estos métodos `DynamoDbEnhancedClient` y `DynamoDbTable`.

`putItem`

A los nuevos elementos se les asigna un valor de versión inicial de 0. Esto se puede configurar con `@DynamoDbVersionAttribute(startAt = X)`.

`updateItem`

Si recupera un elemento, actualiza una o varias de sus propiedades e intenta guardar los cambios, la operación solamente se lleva a cabo si el número de versión del lado del cliente coincide con el número de versión del lado del servidor.

Si la operación es correcta, el número de versión aumenta automáticamente en 1. Esto se puede configurar con `@DynamoDbVersionAttribute(incrementBy = X)`.

`deleteItem`

La anotación `DynamoDbVersionAttribute` no tiene ningún efecto. Debe añadir una expresión de condición manualmente al eliminar un elemento.

En el siguiente ejemplo, se agrega una expresión condicional para garantizar que el elemento eliminado es el elemento que se ha leído. En el siguiente ejemplo, `recordVersion` es el atributo del bean anotado con `@DynamoDbVersionAttribute`.

```
// 1. Read the item and get its current version.
Customer item =
 customerTable.getItem(Key.builder().partitionValue("someId").build());
// `recordVersion` is the bean's attribute that is annotated with
 `@DynamoDbVersionAttribute`.
AttributeValue currentVersion = item.getRecordVersion();

// 2. Create conditional delete with the `currentVersion` value.
DeleteItemEnhancedRequest deleteItemRequest =
```

```
    DeleteItemEnhancedRequest.builder()
       .key(KEY)
       .conditionExpression(Expression.builder()
           .expression("recordVersion = :current_version_value")
           .putExpressionValue(":current_version_value", currentVersion)
           .build()).build();

customerTable.deleteItem(deleteItemRequest);
```

`transactWriteItems`

- `addPutItem`: este método tiene el mismo comportamiento que `putItem`.
- `addUpdateItem`: este método tiene el mismo comportamiento que `updateItem`.
- `addDeleteItem`: este método tiene el mismo comportamiento que `deleteItem`.

`batchWriteItem`

- `addPutItem`: este método tiene el mismo comportamiento que `putItem`.
- `addDeleteItem`: este método tiene el mismo comportamiento que `deleteItem`.

> **Note**
>
> Las tablas globales de DynamoDB usan una conciliación de “el último escritor gana” entre actualizaciones simultáneas. DynamoDB hace todo lo posible para determinar quién realizó la última escritura. Si utiliza tablas globales, esta política de “el último escritor gana” significa que las estrategias de bloqueo pueden no funcionar como se esperaba, ya que todas las réplicas acabarán convergiendo en función de la última escritura determinada por DynamoDB.

Cómo deshabilitar

Para deshabilitar el bloqueo positivo, no utilice la anotación `@DynamoDbVersionAttribute`.

Implemente contadores con la **`AtomicCounterExtension`**

La extensión `AtomicCounterExtension` incrementa un atributo numérico etiquetado cada vez que se escribe un registro en la base de datos. Se pueden especificar los valores de inicio y de incremento. Si no se especifica ningún valor, el valor inicial se establece en 0 y el valor del atributo se incrementa en 1.

Configuración

Para especificar qué atributo es un contador, etiquete un atributo de tipo `Long` en el esquema de la tabla.

En el siguiente fragmento se muestra el uso de los valores de inicio e incremento predeterminados para el atributo `counter`.

```
    @DynamoDbAtomicCounter
    public Long getCounter() {...};
    public void setCounter(Long counter) {...};
```

El enfoque del esquema de tabla estático se muestra en el siguiente fragmento. La extensión del contador atómico utiliza un valor inicial de 10 e incrementa el valor en 5 cada vez que se escribe el registro.

```
    .addAttribute(Integer.class, a -> a.name("counter")
                                       .getter(Customer::getCounter)
                                       .setter(Customer::setCounter)
                                        // Apply the 'atomicCounter' tag to the
attribute with start and increment values.
                                       .tags(StaticAttributeTags.atomicCounter(10L,
5L))
```

Agregue marcas de tiempo con la **`AutoGeneratedTimestampRecordExtension`**.

La extensión `AutoGeneratedTimestampRecordExtension` actualiza automáticamente los atributos de tipo `Instant` con una marca de tiempo actual cada vez que el elemento se escribe correctamente en la base de datos. Esta extensión no se carga de forma predeterminada.

Configuración

Para especificar qué atributo actualizar con la marca de tiempo actual, etiquete el atributo `Instant` en el esquema de la tabla.

El atributo `lastUpdate` es el objetivo del comportamiento de la extensión en el siguiente fragmento. Tenga en cuenta el requisito de que el atributo debe ser de tipo `Instant`.

```
    @DynamoDbAutoGeneratedTimestampAttribute
    public Instant getLastUpdate() {...}
    public void setLastUpdate(Instant lastUpdate) {...}
```

El enfoque equivalente del esquema de tabla estático se muestra en el siguiente fragmento.

```
    .addAttribute(Instant.class, a -> a.name("lastUpdate")
                                       .getter(Customer::getLastUpdate)
                                       .setter(Customer::setLastUpdate)
                                       // Applying the 'autoGeneratedTimestamp' tag to
the attribute.

.tags(AutoGeneratedTimestampRecordExtension.AttributeTags.autoGeneratedTimestampAttribute())
```

Genere un UUID con AutoGeneratedUuidExtension

La extensión `AutoGeneratedUuidExtension` genera un UUID (identificador único universal) único para un atributo cuando se escribe un registro nuevo en la base de datos. Utiliza el método UUID.randomUUID() de Java JDK y lo aplica a los atributos de tipo `java.lang.String`. Esta extensión no se carga de forma predeterminada.

Configuración

El atributo `uniqueId` es el objetivo del comportamiento de la extensión en el siguiente fragmento.

```
   @AutoGeneratedUuidExtension
   public String getUniqueId() {...}
   public void setUniqueId(String uniqueId) {...}
```

El enfoque equivalente del esquema de tabla estático se muestra en el siguiente fragmento.

```
    .addAttribute(String.class, a -> a.name("uniqueId")
                                      .getter(Customer::getUniqueId)
                                      .setter(Customer::setUniqueId)
                                      // Applying the 'autoGeneratedUuid' tag to the
attribute.

.tags(AutoGeneratedUuidExtension.AttributeTags.autoGeneratedUuidAttribute())
```

Si quiere que la extensión rellene el UUID solo para los métodos `putItem` y no para los métodos `updateItem`, añade la anotación comportamiento de actualización como se muestra en el siguiente fragmento.

```
   @AutoGeneratedUuidExtension
   @DynamoDbUpdateBehavior(UpdateBehavior.WRITE_IF_NOT_EXISTS)
   public String getUniqueId() {...}
```

```
    public void setUniqueId(String uniqueId) {...}
```

Si utiliza el método de esquema de tabla estática, use el siguiente código equivalente.

```
     .addAttribute(String.class, a -> a.name("uniqueId")
                                       .getter(Customer::getUniqueId)
                                       .setter(Customer::setUniqueId)
                                       // Applying the 'autoGeneratedUuid' tag to the
 attribute.

 .tags(AutoGeneratedUuidExtension.AttributeTags.autoGeneratedUuidAttribute(),

 StaticAttributeTags.updateBehavior(UpdateBehavior.WRITE_IF_NOT_EXISTS))
```

Ejemplo de extensión personalizada

Puede crear extensiones personalizadas implementando la interfaz `DynamoDbEnhancedClientExtension`. La siguiente clase de extensión personalizada muestra un método `beforeWrite()` que usa una expresión de actualización para establecer un atributo `registrationDate` si el elemento de la base de datos aún no tiene uno.

```
public final class CustomExtension implements DynamoDbEnhancedClientExtension {

    // 1. In a custom extension, use an UpdateExpression to define what action to take
 before
    //    an item is updated.
    @Override
    public WriteModification beforeWrite(DynamoDbExtensionContext.BeforeWrite context)
 {
        if ( context.operationContext().tableName().equals("Customer")
                && context.operationName().equals(OperationName.UPDATE_ITEM)) {
            return WriteModification.builder()
                    .updateExpression(createUpdateExpression())
                    .build();
        }
        return WriteModification.builder().build();  // Return an "empty"
 WriteModification instance if the extension should not be applied.
                                                     // In this case, if the code is
 not updating an item on the Customer table.
    }

    private static UpdateExpression createUpdateExpression() {
```

```
        // 2. Use a SetAction, a subclass of UpdateAction, to provide the values in the
 update.
        SetAction setAction =
                SetAction.builder()
                        .path("registrationDate")
                        .value("if_not_exists(registrationDate, :regValue)")
                        .putExpressionValue(":regValue",
 AttributeValue.fromS(Instant.now().toString()))
                        .build();
        // 3. Build the UpdateExpression with one or more UpdateAction.
        return UpdateExpression.builder()
                .addAction(setAction)
                .build();
    }
}
```

Utilizar la API de cliente mejorado de DynamoDB de forma asíncrona

Si la aplicación requiere llamadas asíncronas y sin bloqueo a DynamoDB, puede usar DynamoDBEnhancedAsyncClient. Es similar a la implementación síncrona, pero con las siguientes diferencias clave:

1. Al compilar `DynamoDbEnhancedAsyncClient`, debe proporcionar la versión asíncrona del cliente estándar, `DynamoDbAsyncClient`, como se muestra en el siguiente fragmento.

```
DynamoDbEnhancedAsyncClient enhancedClient =
    DynamoDbEnhancedAsyncClient.builder()
                               .dynamoDbClient(dynamoDbAsyncClient)
                               .build();
```

2. Los métodos que devuelven un único objeto de datos devuelven un `CompletableFuture` del resultado en lugar de solo el resultado. De este modo, la aplicación podrá hacer otras tareas sin bloquear el resultado. En el siguiente fragmento se muestra el método `getItem()` asíncrono.

```
CompletableFuture<Customer> result = customerDynamoDbTable.getItem(customer);
// Perform other work here.
return result.join();   // Now block and wait for the result.
```

3. Los métodos que devuelven listas paginadas de resultados devuelven un `SdkPublisher`, en lugar de un `SdkIterable` que el método sincrónico `DynamoDbEnhanceClient` devuelve

para los mismos métodos. A continuación, su aplicación puede suscribir un controlador a ese publicador para tratar los resultados de forma asíncrona sin tener que bloquearse.

```
PagePublisher<Customer> results = customerDynamoDbTable.query(r ->
 r.queryConditional(keyEqualTo(k -> k.partitionValue("Smith"))));
results.subscribe(myCustomerResultsProcessor);
// Perform other work and let the processor handle the results asynchronously.
```

Para ver un ejemplo más completo de cómo trabajar con el `SdkPublisher API`, consulte el ejemplo de la sección que trata sobre el método `scan()` asíncrono de esta guía.

Anotaciones de clases de datos

En la tabla siguiente se enumeran las anotaciones que se pueden usar en las clases de datos y se proporcionan enlaces a información y ejemplos en esta guía. La tabla está ordenada alfabéticamente en orden ascendente por nombre de anotación.

Anotaciones de clases de datos utilizadas en esta guía

Nombre de la anotación	La anotación se aplica a [1]	¿Qué hace?	Dónde aparece en esta guía
DynamoDbAtomicCounter	atributo [2]	Incrementa un atributo numérico etiquetado cada vez que se escribe un registro en la base de datos.	Introducción y discusión.
DynamoDbAttribute	atributo	Define o cambia el nombre de una propiedad de bean que está asignada a un atributo de tabla de DynamoDB.	• Discusión inicial. • Sección de introducción: consulte la nota. • En la clase MovieActor, ejemplos del método Query.

Nombre de la anotación	La anotación se aplica a [1]	¿Qué hace?	Dónde aparece en esta guía
DynamoDbAutoGeneratedTimestampAttribute	atributo	Actualiza un atributo etiquetado con una marca de tiempo actual cada vez que el elemento se escribe correctamente en la base de datos.	Introducción y discusión.
DynamoDbAutoGeneratedUuid	atributo	Genere un UUID (identificador único universal) único para un atributo cuando se escriba un registro nuevo en la base de datos.	Introducción y discusión.
DynamoDbBean	class	Marca una clase de datos como asignable a un esquema de tabla.	Primer uso en la clase Customer en la sección Comenzar. A lo largo de la guía aparecen varios usos.
DynamoDbConvertedBy	atributo	Asocia un `AttributeConverter` personalizado al atributo anotado.	Discusión inicial y ejemplo.

Nombre de la anotación	La anotación se aplica a [1]	¿Qué hace?	Dónde aparece en esta guía
DynamoDbFlatten	atributo	Aplana todos los atributos de una clase de datos de DynamoDB independiente y los agrega como atributos de nivel superior al registro que se lee y escribe en la base de datos.	• Discusión inicial. • Implicaciones para otro código.
DynamoDBIgnore	atributo	Hace que el atributo quede sin asignar.	• Discusión inicial. • Uso en la clase ProductCatalog.
DynamoDbIgnoreNulls	atributo	Impide guardar los atributos nulos de los objetos anidados de DynamoDB.	Discusión y ejemplos.
DynamoDbImmutable	class	Marca una clase de datos inmutable como asignable a un esquema de tabla.	• Introducción a la anotación. • Uso en la clase ProductCatalog. • Uso con Lombok.
DynamoDbPartitionKey	atributo	Marca un atributo como clave de partición principal (clave hash) de la tabla de DynamoDB.	• Primer uso en la clase Customer en la sección Comenzar. • Con Lombok.

Nombre de la anotación	La anotación se aplica a [1]	¿Qué hace?	Dónde aparece en esta guía
DynamoDbPreserveEmptyObject	atributo	Especifica que, si no hay datos presentes para el objeto asignado al atributo anotado, el objeto debe inicializarse con todos los campos nulos.	Discusión y ejemplos.
DynamoDbSecondaryPartitionKey	atributo	Marca un atributo como clave de partición para un índice secundario global.	• Uso en índices secundarios y ejemplo. • En ejemplos del método Query. • En ejemplo de Lombok • Con clases inmutables.
DynamoDbSecondarySortKey	atributo	Marca un atributo como clave de clasificación opcional para un índice secundario global o local.	• Uso en índices secundarios y ejemplo. • En ejemplos del método Query. • En ejemplo de Lombok. • Con clases inmutables.

Nombre de la anotación	La anotación se aplica a [1]	¿Qué hace?	Dónde aparece en esta guía
DynamoDbSortKey	atributo	Marca un atributo como clave de clasificación principal opcional (clave de rango).	• Sección de introducción sobre la clase Customer. • Con clases inmutables. • En ejemplo de Lombok. • En ejemplos del método Query.
DynamoDbUpdateBehavior	atributo	Especifica el comportamiento cuando este atributo se actualiza como parte de una operación de «actualización», como UpdateItem.	Introducción y ejemplo.
DynamoDbVersionAttribute	atributo	Incrementa el número de versión de un artículo.	Introducción y discusión.

[1]Puede aplicar anotaciones de nivel de atributo al getter o setter, pero no a ambos. Esta guía muestra las anotaciones en getters

[2]El término `property` se utiliza normalmente para un valor encapsulado en una clase de datos JavaBean. Sin embargo, en esta guía se utiliza el término `attribute` en su lugar para mantener la coherencia con la terminología utilizada por DynamoDB.

Trabajar con de Amazon EC2

En esta sección se proporcionan ejemplos de programación de Amazon EC2 que usan el AWS SDK para Java 2.x.

Temas

- Administrar Amazon EC2 instancias
- Zonas de uso Regiones de AWS y disponibilidad
- Trabajar con grupos de seguridad en Amazon EC2
- Trabajar con metadatos de la instancia de Amazon EC2

Administrar Amazon EC2 instancias

Creación de una instancia

Cree una nueva Amazon EC2 instancia llamando al `runInstances`método de Ec2Client y proporcionándole la imagen de máquina RunInstancesRequestde Amazon (AMI) que va a utilizar y un tipo de instancia.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.InstanceType;
import software.amazon.awssdk.services.ec2.model.RunInstancesRequest;
import software.amazon.awssdk.services.ec2.model.RunInstancesResponse;
import software.amazon.awssdk.services.ec2.model.Tag;
import software.amazon.awssdk.services.ec2.model.CreateTagsRequest;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
```

Código

```
   public static String createEC2Instance(Ec2Client ec2,String name, String amiId ) {

        RunInstancesRequest runRequest = RunInstancesRequest.builder()
                .imageId(amiId)
                .instanceType(InstanceType.T1_MICRO)
                .maxCount(1)
```

```
                .minCount(1)
                .build();

        RunInstancesResponse response = ec2.runInstances(runRequest);
        String instanceId = response.instances().get(0).instanceId();

        Tag tag = Tag.builder()
                .key("Name")
                .value(name)
                .build();

        CreateTagsRequest tagRequest = CreateTagsRequest.builder()
                .resources(instanceId)
                .tags(tag)
                .build();

        try {
            ec2.createTags(tagRequest);
            System.out.printf(
                    "Successfully started EC2 Instance %s based on AMI %s",
                    instanceId, amiId);

          return instanceId;

        } catch (Ec2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return "";
    }
```

Consulte el ejemplo completo en. GitHub

Inicio de una instancia

Para iniciar una Amazon EC2 instancia, llama al `startInstances`método Ec2Client e incluye el ID de StartInstancesRequestla instancia que se va a iniciar.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
```

```
import software.amazon.awssdk.services.ec2.model.StartInstancesRequest;
import software.amazon.awssdk.services.ec2.model.StopInstancesRequest;
```

Código

```
    public static void startInstance(Ec2Client ec2, String instanceId) {

        StartInstancesRequest request = StartInstancesRequest.builder()
                .instanceIds(instanceId)
                .build();

        ec2.startInstances(request);
        System.out.printf("Successfully started instance %s", instanceId);
    }
```

Consulta el ejemplo completo en. GitHub

Detener una instancia

Para detener una Amazon EC2 instancia, llama al `stopInstances`método Ec2Client e incluye el ID de StopInstancesRequestla instancia que se va a detener.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.StartInstancesRequest;
import software.amazon.awssdk.services.ec2.model.StopInstancesRequest;
```

Código

```
    public static void stopInstance(Ec2Client ec2, String instanceId) {

        StopInstancesRequest request = StopInstancesRequest.builder()
                .instanceIds(instanceId)
                .build();

        ec2.stopInstances(request);
        System.out.printf("Successfully stopped instance %s", instanceId);
    }
```

Consulta el ejemplo completo en. GitHub

Reinicio de una instancia

Para reiniciar una Amazon EC2 instancia, llama al `rebootInstances`método Ec2Client e incluye el ID de RebootInstancesRequestla instancia que se va a reiniciar.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.RebootInstancesRequest;
```

Código

```
    public static void rebootEC2Instance(Ec2Client ec2, String instanceId) {

      try {
            RebootInstancesRequest request = RebootInstancesRequest.builder()
                .instanceIds(instanceId)
                    .build();

            ec2.rebootInstances(request);
            System.out.printf(
                "Successfully rebooted instance %s", instanceId);
    } catch (Ec2Exception e) {
          System.err.println(e.awsErrorDetails().errorMessage());
          System.exit(1);
     }
  }
```

Consulta el ejemplo completo en. GitHub

Descripción de instancias

Para enumerar sus instancias, cree un método de Ec2Client DescribeInstancesRequesty llámelo. `describeInstances` Devolverá un DescribeInstancesResponseobjeto que puede usar para enumerar las Amazon EC2 instancias de su cuenta y región.

Las instancias se agrupan por reserva. Cada reserva se corresponde con la llamada a `startInstances` que lanzó la instancia. Para mostrar sus instancias, primero debe llamar

al método `reservations` de la clase `DescribeInstancesResponse` y después llamar a `instances` en cada objeto Reservation devuelto.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesRequest;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesResponse;
import software.amazon.awssdk.services.ec2.model.Instance;
import software.amazon.awssdk.services.ec2.model.Reservation;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
```

Código

```
    public static void describeEC2Instances( Ec2Client ec2){

        String nextToken = null;

        try {

            do {
                DescribeInstancesRequest request =
DescribeInstancesRequest.builder().maxResults(6).nextToken(nextToken).build();
                DescribeInstancesResponse response = ec2.describeInstances(request);

                for (Reservation reservation : response.reservations()) {
                    for (Instance instance : reservation.instances()) {
                        System.out.println("Instance Id is " + instance.instanceId());
                        System.out.println("Image id is "+  instance.imageId());
                        System.out.println("Instance type is "+
instance.instanceType());
                        System.out.println("Instance state name is "+
instance.state().name());
                        System.out.println("monitoring information is "+
instance.monitoring().state());

                }
            }
                nextToken = response.nextToken();
            } while (nextToken != null);

        } catch (Ec2Exception e) {
```

```
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Los resultados se paginan; puede obtener más resultados pasando el valor devuelto del método `nextToken` del objeto resultante al método `nextToken` del nuevo objeto de la solicitud, usando el nuevo objeto de la solicitud en la siguiente llamada a `describeInstances`.

Consulta el ejemplo completo en GitHub.

Monitorear una instancia

Puede supervisar varios aspectos de las Amazon EC2 instancias, como el uso de la CPU y la red, la memoria disponible y el espacio en disco restante. Para obtener más información sobre la supervisión de instancias, consulta la sección Supervisión Amazon EC2 en la Guía del Amazon EC2 usuario de instancias de Linux.

Para empezar a monitorizar una instancia, debes crear una MonitorInstancesRequestcon el ID de la instancia que quieres monitorizar y pasarla al método de Ec2Client. `monitorInstances`

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.MonitorInstancesRequest;
import software.amazon.awssdk.services.ec2.model.UnmonitorInstancesRequest;
```

Código

```
    public static void monitorInstance( Ec2Client ec2, String instanceId) {

        MonitorInstancesRequest request = MonitorInstancesRequest.builder()
                .instanceIds(instanceId).build();

        ec2.monitorInstances(request);
        System.out.printf(
                "Successfully enabled monitoring for instance %s",
                instanceId);
    }
```

Consulta el ejemplo completo en. GitHub

Detener la monitorización de instancias

Para detener la supervisión de una instancia, cree una UnmonitorInstancesRequestcon el ID de la instancia que desee detener la supervisión y pásela al método de Ec2Client. `unmonitorInstances`

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.MonitorInstancesRequest;
import software.amazon.awssdk.services.ec2.model.UnmonitorInstancesRequest;
```

Código

```
    public static void unmonitorInstance(Ec2Client ec2, String instanceId) {
        UnmonitorInstancesRequest request = UnmonitorInstancesRequest.builder()
                .instanceIds(instanceId).build();

        ec2.unmonitorInstances(request);

        System.out.printf(
                "Successfully disabled monitoring for instance %s",
                instanceId);
    }
```

Consulta el ejemplo completo en. GitHub

Más información

- RunInstancesen la referencia Amazon EC2 de la API
- DescribeInstancesen la referencia Amazon EC2 de la API
- StartInstancesen la referencia Amazon EC2 de la API
- StopInstancesen la referencia Amazon EC2 de la API
- RebootInstancesen la referencia Amazon EC2 de la API
- MonitorInstancesen la referencia Amazon EC2 de la API
- UnmonitorInstancesen la referencia Amazon EC2 de la API

Zonas de uso Regiones de AWS y disponibilidad

Descripción de regiones

Para mostrar las regiones disponibles para su cuenta, llame al método `describeRegions` de Ec2Client. Este método devuelve un objeto DescribeRegionsResponse. Llame al método `regions` del objeto devuelto para obtener una lista de objetos Region que representan cada región.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeRegionsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesResponse;
import java.util.concurrent.CompletableFuture;
```

Código

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeRegionsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesResponse;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeRegionsAndZones {
    public static void main(String[] args) {
        Ec2AsyncClient ec2AsyncClient = Ec2AsyncClient.builder()
            .region(Region.US_EAST_1)
            .build();

        try {
            CompletableFuture<Void> future =
 describeEC2RegionsAndZonesAsync(ec2AsyncClient);
            future.join(); // Wait for both async operations to complete.
        } catch (RuntimeException rte) {
```

```
            System.err.println("An exception occurred: " + (rte.getCause() != null ?
rte.getCause().getMessage() : rte.getMessage()));
        }
    }

    /**
     * Asynchronously describes the EC2 regions and availability zones.
     *
     * @param ec2AsyncClient the EC2 async client used to make the API calls
     * @return a {@link CompletableFuture} that completes when both the region and
availability zone descriptions are complete
     */
    public static CompletableFuture<Void>
describeEC2RegionsAndZonesAsync(Ec2AsyncClient ec2AsyncClient) {
        // Initiate the asynchronous request to describe regions
        CompletableFuture<DescribeRegionsResponse> regionsResponse =
ec2AsyncClient.describeRegions();

        // Handle the response or exception for regions
        CompletableFuture<DescribeRegionsResponse> regionsFuture =
regionsResponse.whenComplete((regionsResp, ex) -> {
            if (ex != null) {
                // Handle the exception by throwing a RuntimeException
                throw new RuntimeException("Failed to describe EC2 regions.", ex);
            } else if (regionsResp == null || regionsResp.regions().isEmpty()) {
                // Throw an exception if the response is null or the result is empty
                throw new RuntimeException("No EC2 regions found.");
            } else {
                // Process the response if no exception occurred and the result is not
empty
                regionsResp.regions().forEach(region -> {
                    System.out.printf(
                        "Found Region %s with endpoint %s%n",
                        region.regionName(),
                        region.endpoint());
                });
            }
        });

        CompletableFuture<DescribeAvailabilityZonesResponse> zonesResponse =
ec2AsyncClient.describeAvailabilityZones();
        CompletableFuture<DescribeAvailabilityZonesResponse> zonesFuture =
zonesResponse.whenComplete((zonesResp, ex) -> {
            if (ex != null) {
```

```
                throw new RuntimeException("Failed to describe EC2 availability
 zones.", ex);
            } else if (zonesResp == null || zonesResp.availabilityZones().isEmpty()) {
                throw new RuntimeException("No EC2 availability zones found.");
            } else {
                zonesResp.availabilityZones().forEach(zone -> {
                    System.out.printf(
                        "Found Availability Zone %s with status %s in region %s%n",
                        zone.zoneName(),
                        zone.state(),
                        zone.regionName()
                    );
                });
            }
        });

        return CompletableFuture.allOf(regionsFuture, zonesFuture);
    }
}
```

Consulte el ejemplo completo en. GitHub

Describir zonas de disponibilidad

Para mostrar las zonas de disponibilidad disponibles para su cuenta, llame al método `describeAvailabilityZones` de Ec2Client. Este método devuelve un objeto DescribeAvailabilityZonesResponse. Llame a su `availabilityZones` método para obtener una lista de AvailabilityZoneobjetos que representan cada zona de disponibilidad.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeRegionsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesResponse;
import java.util.concurrent.CompletableFuture;
```

Código

Crear el Ec2Client.

```
        Ec2AsyncClient ec2AsyncClient = Ec2AsyncClient.builder()
            .region(Region.US_EAST_1)
```

```
            .build();
```

A continuación, llame a describeAvailabilityZones () y recupere los resultados.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeRegionsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesResponse;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeRegionsAndZones {
    public static void main(String[] args) {
        Ec2AsyncClient ec2AsyncClient = Ec2AsyncClient.builder()
            .region(Region.US_EAST_1)
            .build();

        try {
            CompletableFuture<Void> future =
 describeEC2RegionsAndZonesAsync(ec2AsyncClient);
            future.join(); // Wait for both async operations to complete.
        } catch (RuntimeException rte) {
            System.err.println("An exception occurred: " + (rte.getCause() != null ?
 rte.getCause().getMessage() : rte.getMessage()));
        }
    }

    /**
     * Asynchronously describes the EC2 regions and availability zones.
     *
     * @param ec2AsyncClient the EC2 async client used to make the API calls
     * @return a {@link CompletableFuture} that completes when both the region and
 availability zone descriptions are complete
     */
    public static CompletableFuture<Void>
 describeEC2RegionsAndZonesAsync(Ec2AsyncClient ec2AsyncClient) {
```

```
        // Initiate the asynchronous request to describe regions
        CompletableFuture<DescribeRegionsResponse> regionsResponse =
ec2AsyncClient.describeRegions();

        // Handle the response or exception for regions
        CompletableFuture<DescribeRegionsResponse> regionsFuture =
regionsResponse.whenComplete((regionsResp, ex) -> {
            if (ex != null) {
                // Handle the exception by throwing a RuntimeException
                throw new RuntimeException("Failed to describe EC2 regions.", ex);
            } else if (regionsResp == null || regionsResp.regions().isEmpty()) {
                // Throw an exception if the response is null or the result is empty
                throw new RuntimeException("No EC2 regions found.");
            } else {
                // Process the response if no exception occurred and the result is not
empty
                regionsResp.regions().forEach(region -> {
                    System.out.printf(
                        "Found Region %s with endpoint %s%n",
                        region.regionName(),
                        region.endpoint());
                });
            }
        });

        CompletableFuture<DescribeAvailabilityZonesResponse> zonesResponse =
ec2AsyncClient.describeAvailabilityZones();
        CompletableFuture<DescribeAvailabilityZonesResponse> zonesFuture =
zonesResponse.whenComplete((zonesResp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to describe EC2 availability
zones.", ex);
            } else if (zonesResp == null || zonesResp.availabilityZones().isEmpty()) {
                throw new RuntimeException("No EC2 availability zones found.");
            } else {
                zonesResp.availabilityZones().forEach(zone -> {
                    System.out.printf(
                        "Found Availability Zone %s with status %s in region %s%n",
                        zone.zoneName(),
                        zone.state(),
                        zone.regionName()
                    );
                });
            }
```

```
        });

        return CompletableFuture.allOf(regionsFuture, zonesFuture);
    }
}
```

Consulte el ejemplo completo en GitHub.

Describir cuentas

Para ver información EC2 relacionada con su cuenta, llame al método Ec2Client. `describeAccountAttributes` Este método devuelve un objeto DescribeAccountAttributesResponse. Invoca este `accountAttributes` método de objetos para obtener una lista de objetos. AccountAttribute Puede recorrer en iteración la lista para recuperar un objeto `AccountAttribute`.

Puede obtener los valores de los atributos de su cuenta invocando el método `attributeValues` del objeto `AccountAttribute`. Este método devuelve una lista de AccountAttributeValueobjetos. Puede recorrer en iteración esta segunda lista para mostrar el valor de los atributos (consulte el siguiente ejemplo de código).

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeAccountAttributesResponse;
import java.util.concurrent.CompletableFuture;
```

Código

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeAccountAttributesResponse;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class DescribeAccount {
    public static void main(String[] args) {
        Ec2AsyncClient ec2AsyncClient = Ec2AsyncClient.builder()
            .region(Region.US_EAST_1)
            .build();

        try {
            CompletableFuture<DescribeAccountAttributesResponse> future =
 describeEC2AccountAsync(ec2AsyncClient);
            future.join();
            System.out.println("EC2 Account attributes described successfully.");
        } catch (RuntimeException rte) {
            System.err.println("An exception occurred: " + (rte.getCause() != null ?
 rte.getCause().getMessage() : rte.getMessage()));
        }
    }

    /**
     * Describes the EC2 account attributes asynchronously.
     *
     * @param ec2AsyncClient the EC2 asynchronous client to use for the operation
     * @return a {@link CompletableFuture} containing the {@link
 DescribeAccountAttributesResponse} with the account attributes
     */
    public static CompletableFuture<DescribeAccountAttributesResponse>
 describeEC2AccountAsync(Ec2AsyncClient ec2AsyncClient) {
        CompletableFuture<DescribeAccountAttributesResponse> response =
 ec2AsyncClient.describeAccountAttributes();
        return response.whenComplete((accountResults, ex) -> {
            if (ex != null) {
                // Handle the exception by throwing a RuntimeException.
                throw new RuntimeException("Failed to describe EC2 account
 attributes.", ex);
            } else if (accountResults == null ||
 accountResults.accountAttributes().isEmpty()) {
                // Throw an exception if the response is null or no account attributes
 are found.
                throw new RuntimeException("No account attributes found.");
            } else {
                // Process the response if no exception occurred.
                accountResults.accountAttributes().forEach(attribute -> {
                    System.out.println("\nThe name of the attribute is " +
 attribute.attributeName());
```

```
                    attribute.attributeValues().forEach(
                        myValue -> System.out.println("The value of the attribute is "
 + myValue.attributeValue()));
                });
            }
        });
    }
}
```

Consulte el ejemplo completo en GitHub.

Más información

- Regiones y zonas de disponibilidad en la guía Amazon EC2 del usuario de instancias de Linux
- DescribeRegionsen la referencia Amazon EC2 de la API
- DescribeAvailabilityZonesen la referencia Amazon EC2 de la API

Trabajar con grupos de seguridad en Amazon EC2

Creación de un grupo de seguridad

Para crear un grupo de seguridad, llame al método `createSecurityGroup` de Ec2Client con un objeto CreateSecurityGroupRequest que contenga el nombre de la clave.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.CreateSecurityGroupRequest;
import software.amazon.awssdk.services.ec2.model.AuthorizeSecurityGroupIngressRequest;
import software.amazon.awssdk.services.ec2.model.AuthorizeSecurityGroupIngressResponse;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.IpPermission;
import software.amazon.awssdk.services.ec2.model.CreateSecurityGroupResponse;
import software.amazon.awssdk.services.ec2.model.IpRange;
```

Código de

```
            CreateSecurityGroupRequest createRequest =
 CreateSecurityGroupRequest.builder()
                .groupName(groupName)
```

```
                .description(groupDesc)
                .vpcId(vpcId)
                .build();

            CreateSecurityGroupResponse resp= ec2.createSecurityGroup(createRequest);
```

Consulte el ejemplo completo en GitHub.

Configuración de un grupo de seguridad

Un grupo de seguridad puede controlar el tráfico de entrada y salida a sus instancias Amazon EC2.

Para añadir reglas de entrada al grupo de seguridad, utilice el método `authorizeSecurityGroupIngress` de Ec2Client, proporcionando el nombre del grupo de seguridad y las reglas de acceso (IpPermission) que desea asignar al grupo dentro de un objeto AuthorizeSecurityGroupIngressRequest. El siguiente ejemplo muestra cómo añadir permisos de IP a un grupo de seguridad.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.CreateSecurityGroupRequest;
import software.amazon.awssdk.services.ec2.model.AuthorizeSecurityGroupIngressRequest;
import software.amazon.awssdk.services.ec2.model.AuthorizeSecurityGroupIngressResponse;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.IpPermission;
import software.amazon.awssdk.services.ec2.model.CreateSecurityGroupResponse;
import software.amazon.awssdk.services.ec2.model.IpRange;
```

Código de

Primero, cree un Ec2Client

```
        Region region = Region.US_WEST_2;
        Ec2Client ec2 = Ec2Client.builder()
                .region(region)
                .build();
```

Luego, use el método `authorizeSecurityGroupIngress` de Ec2Client,

```
            IpRange ipRange = IpRange.builder()
```

```
                .cidrIp("0.0.0.0/0").build();

            IpPermission ipPerm = IpPermission.builder()
                .ipProtocol("tcp")
                .toPort(80)
                .fromPort(80)
                .ipRanges(ipRange)
                .build();

            IpPermission ipPerm2 = IpPermission.builder()
                .ipProtocol("tcp")
                .toPort(22)
                .fromPort(22)
                .ipRanges(ipRange)
                .build();

            AuthorizeSecurityGroupIngressRequest authRequest =
                AuthorizeSecurityGroupIngressRequest.builder()
                        .groupName(groupName)
                        .ipPermissions(ipPerm, ipPerm2)
                        .build();

            AuthorizeSecurityGroupIngressResponse authResponse =
            ec2.authorizeSecurityGroupIngress(authRequest);

            System.out.printf(
                "Successfully added ingress policy to Security Group %s",
                groupName);

            return resp.groupId();

        } catch (Ec2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

Para añadir una regla de salida al grupo de seguridad, proporcione datos similares en un objeto AuthorizeSecurityGroupEgressRequest al método `authorizeSecurityGroupEgress` de Ec2Client.

Consulte el ejemplo completo en GitHub.

Describir grupos de seguridad

Para describir los grupos de seguridad o para obtener información sobre ellos, llame al método `describeSecurityGroups` de Ec2Client. Este método devuelve DescribeSecurityGroupsResponse, que puede usar para obtener acceso a la lista de grupos de seguridad llamando a su método `securityGroups`, que devuelve una lista de objetos SecurityGroup.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.DescribeSecurityGroupsRequest;
import software.amazon.awssdk.services.ec2.model.DescribeSecurityGroupsResponse;
import software.amazon.awssdk.services.ec2.model.SecurityGroup;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
```

Código de

```
    public static void describeEC2SecurityGroups(Ec2Client ec2, String groupId) {

       try {
           DescribeSecurityGroupsRequest request =
               DescribeSecurityGroupsRequest.builder()
                       .groupIds(groupId).build();

           DescribeSecurityGroupsResponse response =
               ec2.describeSecurityGroups(request);

            for(SecurityGroup group : response.securityGroups()) {
               System.out.printf(
                   "Found Security Group with id %s, " +
                           "vpc id %s " +
                           "and description %s",
                   group.groupId(),
                   group.vpcId(),
                   group.description());
           }
       } catch (Ec2Exception e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
```

```
    }
```

Consulte el ejemplo completo en GitHub.

Eliminación de un grupo de seguridad

Para eliminar un grupo de seguridad, llame al método `deleteSecurityGroup` de Ec2Client pasando un objeto DeleteSecurityGroupRequest que contenga el ID del grupo de seguridad que desea eliminar.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.DeleteSecurityGroupRequest;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
```

Código de

```
    public static void deleteEC2SecGroup(Ec2Client ec2,String groupId) {

        try {
            DeleteSecurityGroupRequest request = DeleteSecurityGroupRequest.builder()
                .groupId(groupId)
                .build();

            ec2.deleteSecurityGroup(request);
            System.out.printf(
                "Successfully deleted Security Group with id %s", groupId);

        } catch (Ec2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
     }
```

Consulte el ejemplo completo en GitHub.

Más información

- Grupos de seguridad de Amazon EC2 en la Guía del usuario de Amazon EC2 para instancias de Linux

- Autorización del tráfico entrante para sus instancias de Linux en la Guía del usuario de Amazon EC2 para instancias de Linux
- CreateSecurityGroup en la Referencia de la API de Amazon EC2
- DescribeSecurityGroups en la Referencia de la API de Amazon EC2
- DeleteSecurityGroup en la Referencia de la API de Amazon EC2
- AuthorizeSecurityGroupIngress en la Referencia de la API de Amazon EC2

Trabajar con metadatos de la instancia de Amazon EC2

Un cliente Java SDK para el servicio de metadatos de la instancia de Amazon EC2 (cliente de metadatos) permite a sus aplicaciones acceder a los metadatos de su instancia EC2 local. El cliente de metadatos funciona con la instancia local de IMDSv2(Instance Metadata Service v2) y utiliza solicitudes orientadas a la sesión.

Hay dos clases de clientes disponibles en el SDK. El síncrono `Ec2MetadataClient` es para operaciones de bloqueo, y el `Ec2MetadataAsyncClient` es para casos prácticos asíncronos, no de bloqueo.

Introducción

Para usar el cliente de metadatos, agregue el artefacto Maven `imds` a su proyecto. También necesita clases para una `SdkHttpClient` (o una `SdkAsyncHttpClient` para la variante asíncrona) de la ruta de clases.

El siguiente XML de Maven muestra fragmentos de dependencia para usar el cliente síncrono UrlConnectionHttpClientjunto con la dependencia para los clientes de metadatos.

```
<dependencyManagement>
   <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>VERSION</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
```

```
<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>imds</artifactId>
    </dependency>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>url-connection-client</artifactId>
    </dependency>
    <!-- other dependencies -->
</dependencies>
```

Busca en el repositorio central de Maven la última versión del artefacto `bom`.

Para usar un cliente HTTP asíncrono, sustituya el fragmento de dependencia del artefacto `url-connection-client`. Por ejemplo, el siguiente fragmento incluye la implementación. NettyNioAsyncHttpClient

```
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>netty-nio-client</artifactId>
    </dependency>
```

Utilizar el cliente de metadatos

Crear una instancia de un cliente de metadatos

Puede crear una instancia de un sistema síncrono `Ec2MetadataClient` cuando solo haya una implementación de la interfaz `SdkHttpClient` en la ruta de clases. Para ello, llame al método estático `Ec2MetadataClient#create()`, como se muestra en el siguiente fragmento de código.

```
Ec2MetadataClient client = Ec2MetadataClient.create(); //
 'Ec2MetadataAsyncClient#create' is the asynchronous version.
```

Si su aplicación tiene varias implementaciones de la interfaz `SdkHttpClient` o `SdkHttpAsyncClient`, debe especificar una implementación para que la utilice el cliente de metadatos, como se muestra en la sección the section called “Cliente HTTP configurable”.

> **Note**
>
> Para la mayoría de los clientes de servicios, como Amazon S3, el SDK para Java añade automáticamente las implementaciones de la interfaz `SdkHttpClient` o `SdkHttpAsyncClient`. Si su cliente de metadatos usa la misma implementación, `Ec2MetadataClient#create()` funcionará. Si necesita una implementación diferente, debe especificarla al crear el cliente de metadatos.

Enviar solicitudes

Para recuperar metadatos de la instancia, instancie la clase `EC2MetadataClient` y llame al método `get` con un parámetro de ruta que especifique la categoría de metadatos de la instancia.

En el siguiente ejemplo, se imprime el valor asociado a la clave `ami-id` de la consola.

```
Ec2MetadataClient client = Ec2MetadataClient.create();
Ec2MetadataResponse response = client.get("/latest/meta-data/ami-id");
System.out.println(response.asString());
client.close(); // Closes the internal resources used by the Ec2MetadataClient class.
```

Si la ruta no es válida, el método `get` genera una excepción.

Puede reutilizar la misma instancia de cliente para varias solicitudes, pero ejecute `close` en el cliente cuando ya no sea necesario, con el fin de liberar recursos. Después de llamar al método close, la instancia de cliente ya no se puede usar.

Analizar las respuestas

Los metadatos de la instancia EC2 se pueden generar en diferentes formatos. Los más utilizados son el texto sin formato y JSON. Los clientes de metadatos ofrecen formas de trabajar con esos formatos.

Como se muestra en el ejemplo siguiente, utilice el método `asString` para obtener los datos como una cadena Java. También puede usar el método `asList` para separar una respuesta de texto sin formato que devuelva varias líneas.

```
Ec2MetadataClient client = Ec2MetadataClient.create();
Ec2MetadataResponse response = client.get("/latest/meta-data/");
String fullResponse = response.asString();
```

```
List<String> splits = response.asList();
```

Si la respuesta está en JSON, use el método `Ec2MetadataResponse#asDocument` para analizarla y convertirla en una instancia de Document, como se muestra en el fragmento de código siguiente.

```
Document fullResponse = response.asDocument();
```

Si el formato de los metadatos no está en JSON, se producirá una excepción. Si la respuesta se ha analizado correctamente, puede utilizar la API de documentos para inspeccionarla con más detalle. Consulte la tabla de categorías de metadatos de instancia para saber qué categorías de metadatos ofrecen respuestas con formato JSON.

Configurar un cliente de metadatos

Reintentos

Puede configurar un cliente de metadatos con un mecanismo de reintento. Si lo hace, el cliente podrá reintentar automáticamente las solicitudes que no puedan completarse por motivos inesperados. De forma predeterminada, el cliente lo vuelve a intentar tres veces en caso de una solicitud fallida, con un tiempo de retroceso exponencial entre intentos.

Si su caso de uso requiere un mecanismo de reintento diferente, puede personalizar el cliente mediante el método `retryPolicy` de su generador. Por ejemplo, el siguiente ejemplo muestra un cliente síncrono configurado con un retraso fijo de dos segundos entre intentos y cinco reintentos.

```
BackoffStrategy fixedBackoffStrategy =
 FixedDelayBackoffStrategy.create(Duration.ofSeconds(2));
Ec2MetadataClient client =
    Ec2MetadataClient.builder()
                     .retryPolicy(retryPolicyBuilder ->
 retryPolicyBuilder.numRetries(5)

 .backoffStrategy(fixedBackoffStrategy))
                     .build();
```

Hay varios BackoffStrategiesque puede usar con un cliente de metadatos.

También puede inhabilitar por completo el mecanismo de reintento, como se muestra en el siguiente fragmento de código.

```
Ec2MetadataClient client =
    Ec2MetadataClient.builder()
                     .retryPolicy(Ec2MetadataRetryPolicy.none())
                     .build();
```

El uso de `Ec2MetadataRetryPolicy#none()` desactiva la política de reintentos predeterminada para que el cliente de metadatos no efectúe reintentos.

Versión de IP

De forma predeterminada, un cliente de metadatos usa el IPV4 punto final en`http://169.254.169.254`. Para cambiar el cliente y usar la IPV6 versión, utilice el `endpoint` método `endpointMode` o el del generador. Si se llaman ambos métodos en el constructor se produce una excepción.

En los ejemplos siguientes se muestran ambas IPV6 opciones.

```
Ec2MetadataClient client =
    Ec2MetadataClient.builder()
                     .endpointMode(EndpointMode.IPV6)
                     .build();
```

```
Ec2MetadataClient client =
    Ec2MetadataClient.builder()
                     .endpoint(URI.create("http://[fd00:ec2::254]"))
                     .build();
```

Características principales de

Cliente asíncrono

Para utilizar la versión no bloqueante del cliente, instancie una instancia de la clase `Ec2MetadataAsyncClient`. El código del siguiente ejemplo crea un cliente asíncrono con la configuración predeterminada y utiliza el método `get` para recuperar el valor de la clave `ami-id`.

```
Ec2MetadataAsyncClient asyncClient = Ec2MetadataAsyncClient.create();
CompletableFuture<Ec2MetadataResponse> response = asyncClient.get("/latest/meta-data/
ami-id");
```

El valor de `java.util.concurrent.CompletableFuture` devuelto por el método `get` se completa cuando se devuelve la respuesta. En el ejemplo siguiente, se imprimen los metadatos `ami-id` en la consola.

```
response.thenAccept(metadata -> System.out.println(metadata.asString()));
```

Cliente HTTP configurable

El generador de cada cliente de metadatos tiene un método `httpClient` que puede utilizar para proporcionar un cliente HTTP personalizado.

El ejemplo siguiente muestra el código para una instancia `UrlConnectionHttpClient` personalizada.

```
SdkHttpClient httpClient =
    UrlConnectionHttpClient.builder()
                           .socketTimeout(Duration.ofMinutes(5))
                           .proxyConfiguration(proxy ->
 proxy.endpoint(URI.create("http://proxy.example.net:8888"))))
                           .build();
Ec2MetadataClient metaDataClient =
    Ec2MetadataClient.builder()
                     .httpClient(httpClient)
                     .build();
// Use the metaDataClient instance.
metaDataClient.close();   // Close the instance when no longer needed.
```

En el ejemplo siguiente, se muestra el código de una instancia `NettyNioAsyncHttpClient` personalizada con un cliente de metadatos asíncrono.

```
SdkAsyncHttpClient httpAsyncClient =
    NettyNioAsyncHttpClient.builder()
                           .connectionTimeout(Duration.ofMinutes(5))
                           .maxConcurrency(100)
                           .build();
Ec2MetadataAsyncClient asyncMetaDataClient =
    Ec2MetadataAsyncClient.builder()
                          .httpClient(httpAsyncClient)
                          .build();
// Use the asyncMetaDataClient instance.
asyncMetaDataClient.close();   // Close the instance when no longer needed.
```

El tema the section called “Configuración de clientes de HTTP” de esta guía proporciona detalles sobre cómo configurar los clientes de HTTP disponibles en el SDK para Java.

Almacenamiento en caché de tokens

Como los metadatos que utilizan los clientes IMDSv2, todas las solicitudes están asociadas a una sesión. Una sesión se define mediante un token que tiene una caducidad, que el cliente de metadatos administra en su lugar. Cada solicitud de metadatos reutiliza automáticamente el token hasta que caduque.

De forma predeterminada, un token dura seis horas (21 600 segundos). Le recomendamos que mantenga el time-to-live valor predeterminado, a menos que su caso de uso específico requiera una configuración avanzada.

Si es necesario, configure la duración utilizando el método de generador `tokenTtl`. Por ejemplo, el código del siguiente fragmento crea un cliente con una duración de sesión de cinco minutos.

```
Ec2MetadataClient client =
    Ec2MetadataClient.builder()
                     .tokenTtl(Duration.ofMinutes(5))
                     .build();
```

Si omite llamar al método `tokenTtl` en el generador, se utilizará en su lugar la duración predeterminada de 21 600.

Trabaja con IAM

En esta sección se proporcionan ejemplos de programación AWS Identity and Access Management (IAM) mediante la versión AWS SDK para Java 2.x.

AWS Identity and Access Management (IAM) le permite controlar de forma segura el acceso de sus AWS usuarios a los servicios y recursos. Con IAMél, puede crear y administrar AWS usuarios y grupos, y utilizar los permisos para permitir o denegar su acceso a AWS los recursos. Para obtener una guía completa IAM, visita la Guía IAM del usuario.

Los siguientes ejemplos incluyen únicamente el código necesario para demostrar cada técnica. El código de ejemplo completo está disponible en GitHub. Desde allí, puede descargar un único archivo de código fuente o clonar el repositorio localmente para obtener todos los ejemplos para compilarlos y ejecutarlos.

Temas

- Administrar claves de acceso de IAM
- Administrar usuarios de IAM
- Cree políticas de IAM con AWS SDK for Java 2.x
- Trabajar con políticas de IAM
- Trabajar con certificados IAM de servidor

Administrar claves de acceso de IAM

Creación de una clave de acceso

Para crear una clave de acceso de IAM, llame al método `IamClient's` de `createAccessKey` con un objeto `CreateAccessKeyRequest`.

> **Note**
>
> Debe establecer la región en AWS_GLOBAL para que las llamadas a `IamClient` funcionen, porque IAM es un servicio global.

Importaciones

```
import software.amazon.awssdk.services.iam.model.CreateAccessKeyRequest;
import software.amazon.awssdk.services.iam.model.CreateAccessKeyResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
```

Código de

```
    public static String createIAMAccessKey(IamClient iam,String user) {

        try {
            CreateAccessKeyRequest request = CreateAccessKeyRequest.builder()
                .userName(user).build();

            CreateAccessKeyResponse response = iam.createAccessKey(request);
           String keyId = response.accessKey().accessKeyId();
           return keyId;
```

```
        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

Consulte el ejemplo completo en GitHub.

Mostrar claves de acceso

Para mostrar las claves de acceso de un determinado usuario, cree un objeto `ListAccessKeysRequest` que contenga el nombre de usuario para el que se desean mostrar la claves y páselo al método `listAccessKeys` de `IamClient's`.

> **Note**
>
> Si no proporciona un nombre de usuario a `listAccessKeys`, intentará enumerar las claves de acceso asociadas a la Cuenta de AWS que firmó la solicitud.

Importaciones

```
import software.amazon.awssdk.services.iam.model.AccessKeyMetadata;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.ListAccessKeysRequest;
import software.amazon.awssdk.services.iam.model.ListAccessKeysResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
```

Código de

```
    public static void listKeys( IamClient iam,String userName ){

        try {
            boolean done = false;
            String newMarker = null;

            while (!done) {
                ListAccessKeysResponse response;

            if(newMarker == null) {
```

```
                ListAccessKeysRequest request = ListAccessKeysRequest.builder()
                        .userName(userName).build();
                response = iam.listAccessKeys(request);
            } else {
                ListAccessKeysRequest request = ListAccessKeysRequest.builder()
                        .userName(userName)
                        .marker(newMarker).build();
                response = iam.listAccessKeys(request);
            }

            for (AccessKeyMetadata metadata :
                    response.accessKeyMetadata()) {
                System.out.format("Retrieved access key %s",
                        metadata.accessKeyId());
            }

            if (!response.isTruncated()) {
                done = true;
            } else {
                newMarker = response.marker();
            }
        }

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Los resultados de `listAccessKeys` están paginados (con un máximo de 100 registros por llamada). Puede llamar a `isTruncated` en el objeto `ListAccessKeysResponse` devuelto para saber si la consulta ha devuelto menos resultados de los que están disponibles. En tal caso, llame a `marker` en el objeto `ListAccessKeysResponse` y úselo al crear una nueva solicitud. Utilice esta nueva solicitud en la siguiente invocación de `listAccessKeys`.

Consulte el ejemplo completo en GitHub.

Recuperar el momento en que se usó por última vez una clave de acceso

Para obtener la hora en que se utilizó una clave de acceso por última vez, llame al método `getAccessKeyLastUsed` de `IamClient's` con el ID de clave de acceso (que se puede pasar mediante un objeto `GetAccessKeyLastUsedRequest`).

A continuación, puede utilizar el objeto `GetAccessKeyLastUsedResponse` devuelto para recuperar el momento en que se usó por última vez la clave.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.GetAccessKeyLastUsedRequest;
import software.amazon.awssdk.services.iam.model.GetAccessKeyLastUsedResponse;
import software.amazon.awssdk.services.iam.model.IamException;
```

Código de

```
    public static void getAccessKeyLastUsed(IamClient iam, String accessId ){

        try {
            GetAccessKeyLastUsedRequest request = GetAccessKeyLastUsedRequest.builder()
                    .accessKeyId(accessId).build();

            GetAccessKeyLastUsedResponse response = iam.getAccessKeyLastUsed(request);

            System.out.println("Access key was last used at: " +
                    response.accessKeyLastUsed().lastUsedDate());

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }
```

Consulte el ejemplo completo en GitHub.

Activar o desactivar claves de acceso

Puede activar o desactivar una clave de acceso creando un objeto `UpdateAccessKeyRequest`, proporcionando el ID de clave de acceso, el nombre de usuario (de forma opcional) y el `status` deseado y, a continuación, pasando el objeto de la solicitud al método `updateAccessKey` de `IamClient's`.

Importaciones

```
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.StatusType;
import software.amazon.awssdk.services.iam.model.UpdateAccessKeyRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
```

Código de

```
      public static void updateKey(IamClient iam, String username, String accessId,
 String status ) {

         try {
             if (status.toLowerCase().equalsIgnoreCase("active")) {
                 statusType = StatusType.ACTIVE;
             } else if (status.toLowerCase().equalsIgnoreCase("inactive")) {
                 statusType = StatusType.INACTIVE;
             } else {
                 statusType = StatusType.UNKNOWN_TO_SDK_VERSION;
             }
             UpdateAccessKeyRequest request = UpdateAccessKeyRequest.builder()
               .accessKeyId(accessId)
               .userName(username)
               .status(statusType)
               .build();

             iam.updateAccessKey(request);

             System.out.printf(
               "Successfully updated the status of access key %s to" +
                       "status %s for user %s", accessId, status, username);

       } catch (IamException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

Consulte el ejemplo completo en GitHub.

Eliminación de una clave de acceso

Para eliminar de forma permanente una clave de acceso, llame al método `deleteKey` de `IamClient's`, proporcionándole un `DeleteAccessKeyRequest` que contenga el ID y el nombre de usuario de la clave de acceso.

> **Note**
>
> Una vez eliminada una clave, ya no se puede recuperar ni utilizar. Para desactivar temporalmente una clave de forma que pueda activarse de nuevo más adelante, utilice el método `updateAccessKey` en su lugar.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.DeleteAccessKeyRequest;
import software.amazon.awssdk.services.iam.model.IamException;
```

Código de

```
    public static void deleteKey(IamClient iam ,String username, String accessKey ) {

        try {
            DeleteAccessKeyRequest request = DeleteAccessKeyRequest.builder()
                    .accessKeyId(accessKey)
                    .userName(username)
                    .build();

            iam.deleteAccessKey(request);
            System.out.println("Successfully deleted access key " + accessKey +
                " from user " + username);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Más información

- CreateAccessKey en la Referencia de la API de IAM
- ListAccessKeys en la referencia de la API IAM
- GetAccessKeyLastUsed en la referencia de la API de IAM
- UpdateAccessKey en la Referencia de la API de IAM
- DeleteAccessKey en la Referencia de la API de IAM

Administrar usuarios de IAM

Crear un usuario

Para crear un nuevo usuario de IAM, proporcione el nombre al método `createUser` de IamClient mediante un objeto CreateUserRequest que contenga el nombre de usuario.

Importaciones

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.services.iam.model.CreateUserRequest;
import software.amazon.awssdk.services.iam.model.CreateUserResponse;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.waiters.IamWaiter;
import software.amazon.awssdk.services.iam.model.GetUserRequest;
import software.amazon.awssdk.services.iam.model.GetUserResponse;
```

Código de

```
    public static String createIAMUser(IamClient iam, String username ) {

        try {
            // Create an IamWaiter object
            IamWaiter iamWaiter = iam.waiter();

            CreateUserRequest request = CreateUserRequest.builder()
                    .userName(username)
                    .build();
```

```
            CreateUserResponse response = iam.createUser(request);

            // Wait until the user is created
            GetUserRequest userRequest = GetUserRequest.builder()
                    .userName(response.user().userName())
                    .build();

            WaiterResponse<GetUserResponse> waitUntilUserExists =
iamWaiter.waitUntilUserExists(userRequest);
            waitUntilUserExists.matched().response().ifPresent(System.out::println);
            return response.user().userName();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
       return "";
    }
```

Consulte el ejemplo completo en GitHub.

Enumerar usuarios

Para enumerar los usuarios de IAM de su cuenta, cree un nuevo objeto ListUsersRequest y páselo al método `listUsers` de i. Puede recuperar la lista de usuarios llamando a `users` en el objeto ListUsersResponse devuelto.

La lista de usuarios devuelta por `listUsers` está paginada. Puede comprobar que no haya más resultados que recuperar llamando al método `isTruncated` del objeto de respuesta. Si devuelve `true`, llame al método `marker()` del objeto de respuesta. Utilice el valor del marcador para crear un nuevo objeto de solicitud. Llame entonces al método `listUsers` de nuevo con la nueva solicitud.

Importaciones

```
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.ListUsersRequest;
import software.amazon.awssdk.services.iam.model.ListUsersResponse;
import software.amazon.awssdk.services.iam.model.User;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
```

Código de

```
    public static void listAllUsers(IamClient iam ) {

        try {

             boolean done = false;
             String newMarker = null;

             while(!done) {
                ListUsersResponse response;

                if (newMarker == null) {
                    ListUsersRequest request = ListUsersRequest.builder().build();
                    response = iam.listUsers(request);
                } else {
                    ListUsersRequest request = ListUsersRequest.builder()
                        .marker(newMarker).build();
                    response = iam.listUsers(request);
                }

                for(User user : response.users()) {
                 System.out.format("\n Retrieved user %s", user.userName());
                }

                if(!response.isTruncated()) {
                  done = true;
                } else {
                    newMarker = response.marker();
                }
            }
        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Actualizar un usuario

Para actualizar un usuario, llame al método `updateUser` de IamClient, que toma un objeto UpdateUserRequest que puede utilizar para cambiar el nombre o la ruta del usuario.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.UpdateUserRequest;
```

Código de

```
    public static void updateIAMUser(IamClient iam, String curName,String newName ) {

        try {
            UpdateUserRequest request = UpdateUserRequest.builder()
                    .userName(curName)
                    .newUserName(newName)
                    .build();

            iam.updateUser(request);
            System.out.printf("Successfully updated user to username %s",
                newName);
        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
      }
```

Consulte el ejemplo completo en GitHub.

Eliminación de un usuario

Para eliminar un usuario, llame a la solicitud `deleteUser` de IamClient con un objeto UpdateUserRequest definido con el nombre de usuario que desea eliminar.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.DeleteUserRequest;
import software.amazon.awssdk.services.iam.model.IamException;
```

Código de

```
    public static void deleteIAMUser(IamClient iam, String userName) {
```

```
        try {
            DeleteUserRequest request = DeleteUserRequest.builder()
                    .userName(userName)
                    .build();

            iam.deleteUser(request);
            System.out.println("Successfully deleted IAM user " + userName);
        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Más información

- Usuarios de IAM en la Guía del usuario de IAM
- Gestión de usuarios de IAM en la Guía del usuario de IAM
- CreateUser en la Referencia de la API de IAM
- ListUsers en la Referencia de la API de IAM
- UpdateUser en la Referencia de la API de IAM
- DeleteUser en la Referencia de la API de IAM

Cree políticas de IAM con AWS SDK for Java 2.x

La API IAM Policy Builder es una biblioteca que puede utilizar para crear políticas de IAM en Java y cargarlas en AWS Identity and Access Management (IAM).

En lugar de crear una política de IAM mediante el ensamblaje manual de una cadena JSON o la lectura de un archivo, la API proporciona un enfoque del cliente y orientado a los objetos para generar la cadena JSON. Al leer una política de IAM existente en formato JSON, la API la convierte en una IamPolicyinstancia para su gestión.

La API Policy Builder de IAM comenzó a estar disponible con la versión 2.20.105 del SDK, así que utilice esa versión o una posterior en su archivo de compilación de Maven. El número de versión más reciente del SDK aparece en Maven Central.

En el fragmento siguiente, se muestra un bloque de dependencia de ejemplo para un archivo `pom.xml` Maven. Esto le permite utilizar la API del creador de políticas de IAM en su proyecto.

```
<dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>iam-policy-builder</artifactId>
    <version>2.27.21</version>
</dependency>
```

Crear un **`IamPolicy`**

En esta sección se muestran varios ejemplos de cómo crear políticas mediante la API del creador de políticas de IAM.

En cada uno de los ejemplos siguientes, comience con el `IamPolicy.Builder` y añada una o más instrucciones mediante el método `addStatement`. Siguiendo este patrón, el IamStatement.Builder tiene métodos para añadir el efecto, las acciones, los recursos y las condiciones a la declaración.

Ejemplo: crear una política basada en el tiempo.

El siguiente ejemplo crea una política basada en la identidad que permite la acción `GetItem` de Amazon DynamoDB entre dos momentos.

```
    public String timeBasedPolicyExample() {
        IamPolicy policy = IamPolicy.builder()
                .addStatement(b -> b
                        .effect(IamEffect.ALLOW)
                        .addAction("dynamodb:GetItem")
                        .addResource(IamResource.ALL)
                        .addCondition(b1 -> b1
                                .operator(IamConditionOperator.DATE_GREATER_THAN)
                                .key("aws:CurrentTime")
                                .value("2020-04-01T00:00:00Z"))
                        .addCondition(b1 -> b1
                                .operator(IamConditionOperator.DATE_LESS_THAN)
                                .key("aws:CurrentTime")
                                .value("2020-06-30T23:59:59Z")))
                .build();

        // Use an IamPolicyWriter to write out the JSON string to a more readable
 format.
```

```
        return policy.toJson(IamPolicyWriter.builder()
                        .prettyPrint(true)
                        .build());
    }
```

Salida de JSON

La última instrucción del ejemplo anterior devuelve la siguiente cadena JSON.

Para obtener más información sobre este ejemplo, consulte la Guía del usuario de AWS Identity and Access Management .

JSON

```
{
    "Version":"2012-10-17",
    "Statement": {
        "Effect": "Allow",
        "Action": "dynamodb:GetItem",
        "Resource": "*",
        "Condition": {
            "DateGreaterThan": {
                "aws:CurrentTime": "2020-04-01T00:00:00Z"
            },
            "DateLessThan": {
                "aws:CurrentTime": "2020-06-30T23:59:59Z"
            }
        }
    }
}
```

Ejemplo: especificar varias condiciones

En el ejemplo siguiente se muestra cómo crear una política basada en identidad que permita el acceso a los atributos específicos de DynamoDB. La política contiene dos condiciones.

```
    public String multipleConditionsExample() {
        IamPolicy policy = IamPolicy.builder()
                .addStatement(b -> b
                        .effect(IamEffect.ALLOW)
                        .addAction("dynamodb:GetItem")
```

```
                        .addAction("dynamodb:BatchGetItem")
                        .addAction("dynamodb:Query")
                        .addAction("dynamodb:PutItem")
                        .addAction("dynamodb:UpdateItem")
                        .addAction("dynamodb:DeleteItem")
                        .addAction("dynamodb:BatchWriteItem")
                        .addResource("arn:aws:dynamodb:*:*:table/table-name")

 .addConditions(IamConditionOperator.STRING_EQUALS.addPrefix("ForAllValues:"),
                                "dynamodb:Attributes",
                                List.of("column-name1", "column-name2", "column-
name3"))
                        .addCondition(b1 ->
 b1.operator(IamConditionOperator.STRING_EQUALS.addSuffix("IfExists"))
                                .key("dynamodb:Select")
                                .value("SPECIFIC_ATTRIBUTES")))
                .build();

        return policy.toJson(IamPolicyWriter.builder()
                .prettyPrint(true).build());
    }
```

Salida de JSON

La última instrucción del ejemplo anterior devuelve la siguiente cadena JSON.

Para obtener más información sobre este ejemplo consulte la Guía del usuario de AWS Identity and Access Management .

JSON

```
{
    "Version":"2012-10-17",
    "Statement": {
        "Effect": "Allow",
        "Action": [
            "dynamodb:GetItem",
            "dynamodb:BatchGetItem",
            "dynamodb:Query",
            "dynamodb:PutItem",
            "dynamodb:UpdateItem",
            "dynamodb:DeleteItem",
            "dynamodb:BatchWriteItem"
```

```
        ],
        "Resource": "arn:aws:dynamodb:*:*:table/table-name",
        "Condition": {
            "ForAllValues:StringEquals": {
                "dynamodb:Attributes": [
                    "column-name1",
                    "column-name2",
                    "column-name3"
                ]
            },
            "StringEqualsIfExists": {
                "dynamodb:Select": "SPECIFIC_ATTRIBUTES"
            }
        }
    }
}
```

Ejemplo: especificar entidades principales

En el siguiente ejemplo, se muestra cómo crear una política basada en recursos que deniegue el acceso a un bucket a todas las entidades principales, excepto a las especificadas en la condición.

```
public String specifyPrincipalsExample() {
    IamPolicy policy = IamPolicy.builder()
            .addStatement(b -> b
                    .effect(IamEffect.DENY)
                    .addAction("s3:*")
                    .addPrincipal(IamPrincipal.ALL)
                    .addResource("arn:aws:s3:::BUCKETNAME/*")
                    .addResource("arn:aws:s3:::BUCKETNAME")
                    .addCondition(b1 -> b1
                            .operator(IamConditionOperator.ARN_NOT_EQUALS)
                            .key("aws:PrincipalArn")
                            .value("arn:aws:iam::444455556666:user/user-name")))
            .build();
    return policy.toJson(IamPolicyWriter.builder()
            .prettyPrint(true).build());
}
```

Salida de JSON

La última instrucción del ejemplo anterior devuelve la siguiente cadena JSON.

Para obtener más información sobre este ejemplo consulte la Guía del usuario de AWS Identity and Access Management .

JSON

```
{
  "Version":"2012-10-17",
  "Statement" : {
    "Effect" : "Deny",
    "Principal" : "*",
    "Action" : "s3:*",
    "Resource" : [ "arn:aws:s3:::BUCKETNAME/*", "arn:aws:s3:::BUCKETNAME" ],
    "Condition" : {
      "ArnNotEquals" : {
        "aws:PrincipalArn" : "arn:aws:iam::444455556666:user/user-name"
      }
    }
  }
}
```

Ejemplo: permitir el acceso entre cuentas

En el siguiente ejemplo, se muestra cómo permitir que otra persona Cuenta de AWS cargue objetos en tu bucket y, al mismo tiempo, mantener el control total del propietario de los objetos cargados.

```
    public String allowCrossAccountAccessExample() {
        IamPolicy policy = IamPolicy.builder()
                .addStatement(b -> b
                        .effect(IamEffect.ALLOW)
                        .addPrincipal(IamPrincipalType.AWS, "111122223333")
                        .addAction("s3:PutObject")
                        .addResource("arn:aws:s3:::amzn-s3-demo-bucket/*")
                        .addCondition(b1 -> b1
                                .operator(IamConditionOperator.STRING_EQUALS)
                                .key("s3:x-amz-acl")
                                .value("bucket-owner-full-control")))
                .build();
        return policy.toJson(IamPolicyWriter.builder()
                .prettyPrint(true).build());
    }
```

Salida de JSON

La última instrucción del ejemplo anterior devuelve la siguiente cadena JSON.

Para más información sobre este ejemplo, consulte la Guía del usuario de Amazon Simple Storage Service.

JSON

```
{
  "Version":"2012-10-17",
  "Statement" : {
    "Effect" : "Allow",
    "Principal" : {
      "AWS" : "111122223333"
    },
    "Action" : "s3:PutObject",
    "Resource" : "arn:aws:s3:::amzn-s3-demo-bucket/*",
    "Condition" : {
      "StringEquals" : {
        "s3:x-amz-acl" : "bucket-owner-full-control"
      }
    }
  }
}
```

Utilizar una **`IamPolicy`** con IAM

Tras crear una instancia de `IamPolicy`, utilice un `IamClient` para trabajar con el servicio de IAM.

El ejemplo siguiente crea una política que permite a una identidad de IAM escribir elementos en una tabla de DynamoDB de la cuenta que se especifica con el parámetro `accountID`. A continuación, la política se carga en IAM como una cadena JSON.

```
   public String createAndUploadPolicyExample(IamClient iam, String accountID, String
policyName) {
       // Build the policy.
       IamPolicy policy =
               IamPolicy.builder() // 'version' defaults to "2012-10-17".
                       .addStatement(IamStatement.builder()
                               .effect(IamEffect.ALLOW)
```

```
                                .addAction("dynamodb:PutItem")
                                .addResource("arn:aws:dynamodb:us-east-1:" + accountID
+ ":table/exampleTableName")
                                .build())
                        .build();
        // Upload the policy.
        iam.createPolicy(r ->
r.policyName(policyName).policyDocument(policy.toJson()));
        return policy.toJson(IamPolicyWriter.builder().prettyPrint(true).build());
    }
```

El ejemplo siguiente se basa en el anterior. El código descarga la política y la utiliza como base para una nueva política copiando y modificando la declaración. A continuación, se carga la nueva política.

```
    public String createNewBasedOnExistingPolicyExample(IamClient iam, String
accountID, String policyName, String newPolicyName) {

        String policyArn = "arn:aws:iam::" + accountID + ":policy/" + policyName;
        GetPolicyResponse getPolicyResponse = iam.getPolicy(r ->
r.policyArn(policyArn));

        String policyVersion = getPolicyResponse.policy().defaultVersionId();
        GetPolicyVersionResponse getPolicyVersionResponse =
                iam.getPolicyVersion(r ->
r.policyArn(policyArn).versionId(policyVersion));

        // Create an IamPolicy instance from the JSON string returned from IAM.
        String decodedPolicy =
URLDecoder.decode(getPolicyVersionResponse.policyVersion().document(),
StandardCharsets.UTF_8);
        IamPolicy policy = IamPolicy.fromJson(decodedPolicy);

            /*
             All IamPolicy components are immutable, so use the copy method that
creates a new instance that
             can be altered in the same method call.

             Add the ability to get an item from DynamoDB as an additional action.
            */
        IamStatement newStatement = policy.statements().get(0).copy(s ->
s.addAction("dynamodb:GetItem"));

        // Create a new statement that replaces the original statement.
```

```
        IamPolicy newPolicy = policy.copy(p ->
 p.statements(Arrays.asList(newStatement)));

        // Upload the new policy. IAM now has both policies.
        iam.createPolicy(r -> r.policyName(newPolicyName)
                .policyDocument(newPolicy.toJson()));

        return newPolicy.toJson(IamPolicyWriter.builder().prettyPrint(true).build());
    }
```

IamClient

Los ejemplos anteriores utilizan un argumento `IamClient` que se crea tal y como se muestra en el siguiente fragmento.

```
IamClient iam = IamClient.builder().region(Region.AWS_GLOBAL).build();
```

Políticas en JSON

Los ejemplos devuelven las siguientes cadenas JSON.

```
First example
{
  "Version": "2012-10-17",
  "Statement" : {
    "Effect" : "Allow",
    "Action" : "dynamodb:PutItem",
    "Resource" : "arn:aws:dynamodb:us-east-1:111122223333:table/exampleTableName"
  }
}

Second example
{
  "Version": "2012-10-17",
  "Statement" : {
    "Effect" : "Allow",
    "Action" : [ "dynamodb:PutItem", "dynamodb:GetItem" ],
    "Resource" : "arn:aws:dynamodb:us-east-1:111122223333:table/exampleTableName"
  }
}
```

Trabajar con políticas de IAM

Crear una política.

Para crear una nueva política, proporcione el nombre de la política y un documento de política en formato JSON en un objeto CreatePolicyRequest al método `createPolicy` de IamClient

Importaciones

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.services.iam.model.CreatePolicyRequest;
import software.amazon.awssdk.services.iam.model.CreatePolicyResponse;
import software.amazon.awssdk.services.iam.model.GetPolicyRequest;
import software.amazon.awssdk.services.iam.model.GetPolicyResponse;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.waiters.IamWaiter;
```

Código de

```
    public static String createIAMPolicy(IamClient iam, String policyName ) {

        try {
            // Create an IamWaiter object
            IamWaiter iamWaiter = iam.waiter();

            CreatePolicyRequest request = CreatePolicyRequest.builder()
                .policyName(policyName)
                .policyDocument(PolicyDocument).build();

            CreatePolicyResponse response = iam.createPolicy(request);

            // Wait until the policy is created
            GetPolicyRequest polRequest = GetPolicyRequest.builder()
                    .policyArn(response.policy().arn())
                    .build();

            WaiterResponse<GetPolicyResponse> waitUntilPolicyExists =
iamWaiter.waitUntilPolicyExists(polRequest);
            waitUntilPolicyExists.matched().response().ifPresent(System.out::println);
            return response.policy().arn();
```

```
         } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "" ;
    }
```

Consulte el ejemplo completo en GitHub.

Obtención de una política

Para recuperar una política existente, llame al método `getPolicy` de IamClient proporcionando el ARN de la política en un objeto GetPolicyRequest.

Importaciones

```
import software.amazon.awssdk.services.iam.model.GetPolicyRequest;
import software.amazon.awssdk.services.iam.model.GetPolicyResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
```

Código de

```
    public static void getIAMPolicy(IamClient iam, String policyArn) {

        try {
            GetPolicyRequest request = GetPolicyRequest.builder()
                .policyArn(policyArn).build();

            GetPolicyResponse response = iam.getPolicy(request);
            System.out.format("Successfully retrieved policy %s",
                response.policy().policyName());

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Asociar una política de rol

Puede asociar una política a un rol de IAM llamando al método `attachRolePolicy` de IamClient, con el nombre de rol y el ARN de política en un objeto AttachRolePolicyRequest.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.AttachRolePolicyRequest;
import software.amazon.awssdk.services.iam.model.AttachedPolicy;
import software.amazon.awssdk.services.iam.model.ListAttachedRolePoliciesRequest;
import software.amazon.awssdk.services.iam.model.ListAttachedRolePoliciesResponse;
import java.util.List;
```

Código de

```
   public static void attachIAMRolePolicy(IamClient iam, String roleName, String
policyArn ) {

       try {

            ListAttachedRolePoliciesRequest request =
ListAttachedRolePoliciesRequest.builder()
                  .roleName(roleName)
                  .build();

           ListAttachedRolePoliciesResponse  response =
iam.listAttachedRolePolicies(request);
           List<AttachedPolicy> attachedPolicies = response.attachedPolicies();

           // Ensure that the policy is not attached to this role
           String polArn = "";
           for (AttachedPolicy policy: attachedPolicies) {
               polArn = policy.policyArn();
               if (polArn.compareTo(policyArn)==0) {
                  System.out.println(roleName +
                          " policy is already attached to this role.");
                   return;
               }
         }
```

```
            AttachRolePolicyRequest attachRequest =
                AttachRolePolicyRequest.builder()
                        .roleName(roleName)
                        .policyArn(policyArn)
                        .build();

            iam.attachRolePolicy(attachRequest);

            System.out.println("Successfully attached policy " + policyArn +
                " to role " + roleName);

        } catch (IamException e) {
                System.err.println(e.awsErrorDetails().errorMessage());
                System.exit(1);
         }

     System.out.println("Done");
    }
```

Consulte el ejemplo completo en GitHub.

Mostrar las políticas de rol asociadas

Enumere las políticas asociadas a un rol llamando al método `listAttachedRolePolicies` de IamClient. Este método toma un objeto ListAttachedRolePoliciesRequest que contiene el nombre del rol para el que se desea mostrar las políticas.

Llame a `getAttachedPolicies` en el objeto ListAttachedRolePoliciesResponse devuelto para obtener la lista de políticas asociadas. Los resultados pueden aparecer truncados; si el método `ListAttachedRolePoliciesResponse`del objeto `isTruncated` devuelve `true`, llame al método `ListAttachedRolePoliciesResponse` del objeto `marker`. Utilice el marcador devuelto para crear una nueva solicitud y use esta solicitud para llamar de nuevo a `listAttachedRolePolicies` para obtener el siguiente lote de resultados.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.AttachRolePolicyRequest;
import software.amazon.awssdk.services.iam.model.AttachedPolicy;
import software.amazon.awssdk.services.iam.model.ListAttachedRolePoliciesRequest;
```

```
import software.amazon.awssdk.services.iam.model.ListAttachedRolePoliciesResponse;
import java.util.List;
```

Código de

```
   public static void attachIAMRolePolicy(IamClient iam, String roleName, String
policyArn ) {

       try {

            ListAttachedRolePoliciesRequest request =
ListAttachedRolePoliciesRequest.builder()
                  .roleName(roleName)
                  .build();

           ListAttachedRolePoliciesResponse  response =
iam.listAttachedRolePolicies(request);
           List<AttachedPolicy> attachedPolicies = response.attachedPolicies();

           // Ensure that the policy is not attached to this role
           String polArn = "";
           for (AttachedPolicy policy: attachedPolicies) {
               polArn = policy.policyArn();
               if (polArn.compareTo(policyArn)==0) {
                  System.out.println(roleName +
                           " policy is already attached to this role.");
                   return;
               }
         }

           AttachRolePolicyRequest attachRequest =
               AttachRolePolicyRequest.builder()
                       .roleName(roleName)
                       .policyArn(policyArn)
                       .build();

           iam.attachRolePolicy(attachRequest);

           System.out.println("Successfully attached policy " + policyArn +
               " to role " + roleName);

        } catch (IamException e) {
               System.err.println(e.awsErrorDetails().errorMessage());
```

```
                System.exit(1);
          }

     System.out.println("Done");
    }
```

Consulte el ejemplo completo en GitHub.

Desasociar una política de rol

Para desvincular una política de un rol, llame al método `detachRolePolicy` de IamClient proporcionando el nombre de rol y el ARN de política en un objeto DetachRolePolicyRequest.

Importaciones

```
import software.amazon.awssdk.services.iam.model.DetachRolePolicyRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
```

Código de

```
    public static void detachPolicy(IamClient iam, String roleName, String policyArn )
 {

        try {
            DetachRolePolicyRequest request = DetachRolePolicyRequest.builder()
                    .roleName(roleName)
                    .policyArn(policyArn)
                    .build();

            iam.detachRolePolicy(request);
            System.out.println("Successfully detached policy " + policyArn +
                " from role " + roleName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Más información

- Información general sobre políticas de IAM en la Guía del usuario de IAM.
- Referencia de políticas de AWS IAM en la Guía del usuario de IAM.
- CreatePolicy en la Referencia de la API de IAM
- GetPolicy en la referencia de la API de IAM
- AttachrolePolicy en la referencia de la API de IAM
- ListatTachedrolePolicies en la referencia de la API de IAM
- DetachRolePolicy en la referencia de la API de IAM

Trabajar con certificados IAM de servidor

Para habilitar las conexiones HTTPS a su sitio web o aplicación AWS, necesita un certificado de SSL/TLS servidor. Puede utilizar un certificado de servidor proporcionado AWS Certificate Manager o obtenido de un proveedor externo.

Le recomendamos que lo utilice ACM para aprovisionar, administrar e implementar sus certificados de servidor. Con él ACM puede solicitar un certificado, implementarlo en sus AWS recursos y ACM encargarse de las renovaciones de los certificados por usted. Los certificados proporcionados por ACM son gratuitos. Para obtener más información al respecto ACM, consulte la Guía AWS Certificate Manager del usuario.

Obtener un certificado de servidor

Para recuperar un certificado de servidor, llame al `getServerCertificate` método IamClient es y páselo GetServerCertificateRequestcon el nombre del certificado.

Importaciones

```
import software.amazon.awssdk.services.iam.model.GetServerCertificateRequest;
import software.amazon.awssdk.services.iam.model.GetServerCertificateResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
```

Código

```
    public static void getCertificate(IamClient iam,String certName ) {
```

```
        try {
            GetServerCertificateRequest request = GetServerCertificateRequest.builder()
                    .serverCertificateName(certName)
                    .build();

            GetServerCertificateResponse response = iam.getServerCertificate(request);
            System.out.format("Successfully retrieved certificate with body %s",
                response.serverCertificate().certificateBody());

         } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulta el ejemplo completo en GitHub.

Elaborar listas de certificados de servidor

Para ver una lista de los certificados de su servidor, llame al `listServerCertificates` método IamClient's con un ListServerCertificatesRequest. Este método devuelve un objeto ListServerCertificatesResponse.

Llama al `serverCertificateMetadataList` método del `ListServerCertificateResponse` objeto devuelto para obtener una lista de ServerCertificateMetadataobjetos que puedes usar para obtener información sobre cada certificado.

Los resultados pueden aparecer truncados; si el método `ListServerCertificateResponse` del objeto `isTruncated` devuelve `true`, llame al método `ListServerCertificatesResponse` del objeto `marker` y use el marcador para crear una nueva solicitud. Utilice la nueva solicitud para llamar de nuevo a `listServerCertificates` para obtener el siguiente lote de resultados.

Importaciones

```
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.ListServerCertificatesRequest;
import software.amazon.awssdk.services.iam.model.ListServerCertificatesResponse;
import software.amazon.awssdk.services.iam.model.ServerCertificateMetadata;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
```

Código

```
    public static void listCertificates(IamClient iam) {

        try {
            boolean done = false;
            String newMarker = null;

            while(!done) {
              ListServerCertificatesResponse response;

            if (newMarker == null) {
                ListServerCertificatesRequest request =
                        ListServerCertificatesRequest.builder().build();
                response = iam.listServerCertificates(request);
            } else {
                ListServerCertificatesRequest request =
                        ListServerCertificatesRequest.builder()
                                .marker(newMarker).build();
                response = iam.listServerCertificates(request);
            }

            for(ServerCertificateMetadata metadata :
                    response.serverCertificateMetadataList()) {
                System.out.printf("Retrieved server certificate %s",
                        metadata.serverCertificateName());
            }

            if(!response.isTruncated()) {
                done = true;
            } else {
                newMarker = response.marker();
            }
        }

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Actualizar un certificado de servidor

Puede actualizar el nombre o la ruta de un certificado IamClient de servidor llamando al `updateServerCertificate` método. Se necesita un conjunto de UpdateServerCertificateRequestobjetos con el nombre actual del certificado de servidor y un nombre nuevo o una nueva ruta para su uso.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.UpdateServerCertificateRequest;
import software.amazon.awssdk.services.iam.model.UpdateServerCertificateResponse;
```

Código

```
    public static void updateCertificate(IamClient iam, String curName, String newName)
{

        try {
            UpdateServerCertificateRequest request =
                UpdateServerCertificateRequest.builder()
                        .serverCertificateName(curName)
                        .newServerCertificateName(newName)
                        .build();

            UpdateServerCertificateResponse response =
                iam.updateServerCertificate(request);


            System.out.printf("Successfully updated server certificate to name %s",
                newName);

        } catch (IamException e) {
             System.err.println(e.awsErrorDetails().errorMessage());
             System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Eliminar un certificado de servidor

Para eliminar un certificado de servidor, llame al IamClient `deleteServerCertificate` método DeleteServerCertificateRequestque contenga el nombre del certificado.

Importaciones

```
import software.amazon.awssdk.services.iam.model.DeleteServerCertificateRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
```

Código

```
    public static void deleteCert(IamClient iam,String certName ) {

        try {
            DeleteServerCertificateRequest request =
                DeleteServerCertificateRequest.builder()
                        .serverCertificateName(certName)
                        .build();

            iam.deleteServerCertificate(request);
            System.out.println("Successfully deleted server certificate " +
                    certName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Más información

- Cómo trabajar con certificados de servidor en la Guía IAM del usuario
- GetServerCertificateen la referencia IAM de la API
- ListServerCertificatesen la referencia IAM de la API
- UpdateServerCertificateen la referencia IAM de la API
- DeleteServerCertificateen la referencia IAM de la API

- AWS Certificate Manager Guía del usuario

Trabajar con de Kinesis

En esta sección se proporcionan ejemplos de programación Amazon Kinesis mediante AWS SDK para Java 2.x.

Para obtener más información sobre Kinesis, consulte la Guía para desarrolladores de Amazon Kinesis.

Los siguientes ejemplos incluyen únicamente el código necesario para demostrar cada técnica. El código de ejemplo completo está disponible en GitHub. Desde allí, puede descargar un único archivo de código fuente o clonar el repositorio localmente para obtener todos los ejemplos para compilarlos y ejecutarlos.

Temas

- Suscripción a Amazon Kinesis Data Streams

Suscripción a Amazon Kinesis Data Streams

Los siguientes ejemplos muestran cómo recuperar y procesar datos de flujos de datos de Amazon Kinesis con el método `subscribeToShard`. Kinesis Data Streams ahora emplea la característica de distribución ramificada mejorada y una API de recuperación de datos de HTTP/2 de baja latencia, que permite a los desarrolladores ejecutar fácilmente varias aplicaciones de baja latencia y de alto desempeño en la misma secuencia de datos de Kinesis.

Configuración

En primer lugar, cree un cliente de Kinesis asíncrono y un objeto SubscribeToShardRequest. Estos objetos se utilizan en cada uno de los siguientes ejemplos para suscribirse a eventos de Kinesis.

Importaciones

```
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.atomic.AtomicInteger;
import org.reactivestreams.Subscriber;
import org.reactivestreams.Subscription;
import software.amazon.awssdk.core.async.SdkPublisher;
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.kinesis.KinesisAsyncClient;
import software.amazon.awssdk.services.kinesis.model.ShardIteratorType;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardEvent;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardEventStream;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardRequest;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardResponse;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardResponseHandler;
```

Código de

```
        Region region = Region.US_EAST_1;
        KinesisAsyncClient client = KinesisAsyncClient.builder()
        .region(region)
        .build();

        SubscribeToShardRequest request = SubscribeToShardRequest.builder()
                .consumerARN(CONSUMER_ARN)
                .shardId("arn:aws:kinesis:us-east-1:111122223333:stream/
StockTradeStream")
                .startingPosition(s -> s.type(ShardIteratorType.LATEST)).build();
```

Usar la interfaz del compilador

Puede utilizar el método `builder` para simplificar la creación de SubscribeToShardResponseHandler.

Con el creador, puede configurar cada devolución de llamada de ciclo de vida con una llamada de método en lugar de implementar la interfaz completa.

Código de

```
   private static CompletableFuture<Void> responseHandlerBuilder(KinesisAsyncClient
client, SubscribeToShardRequest request) {
        SubscribeToShardResponseHandler responseHandler =
SubscribeToShardResponseHandler
                .builder()
                .onError(t -> System.err.println("Error during stream - " +
t.getMessage()))
                .onComplete(() -> System.out.println("All records stream
successfully"))
                // Must supply some type of subscriber
                .subscriber(e -> System.out.println("Received event - " + e))
```

```
                .build();
        return client.subscribeToShard(request, responseHandler);
    }
```

Para tener más control sobre publicador, puede usar el método `publisherTransformer` para personalizar el publicador.

Código de

```
   private static CompletableFuture<Void>
responseHandlerBuilderPublisherTransformer(KinesisAsyncClient client,
SubscribeToShardRequest request) {
       SubscribeToShardResponseHandler responseHandler =
SubscribeToShardResponseHandler
               .builder()
               .onError(t -> System.err.println("Error during stream - " +
t.getMessage()))
               .publisherTransformer(p -> p.filter(e -> e instanceof
SubscribeToShardEvent).limit(100))
               .subscriber(e -> System.out.println("Received event - " + e))
               .build();
       return client.subscribeToShard(request, responseHandler);
   }
```

Consulte el ejemplo completo en GitHub.

Usa un controlador de respuesta personalizado

Para tener un control completo del suscriptor y el publicador, implemente la interfaz de `SubscribeToShardResponseHandler`.

En este ejemplo, se implementa el método `onEventStream`, lo que le permite el acceso completo al publicador. Esto demuestra cómo transformar el publicador en registros de eventos para su impresión por parte del suscriptor.

Código de

```
   private static CompletableFuture<Void>
responseHandlerBuilderClassic(KinesisAsyncClient client, SubscribeToShardRequest
request) {
       SubscribeToShardResponseHandler responseHandler = new
SubscribeToShardResponseHandler() {
```

```
            @Override
            public void responseReceived(SubscribeToShardResponse response) {
                System.out.println("Receieved initial response");
            }

            @Override
            public void onEventStream(SdkPublisher<SubscribeToShardEventStream>
publisher) {
                publisher
                        // Filter to only SubscribeToShardEvents
                        .filter(SubscribeToShardEvent.class)
                        // Flat map into a publisher of just records
                        .flatMapIterable(SubscribeToShardEvent::records)
                        // Limit to 1000 total records
                        .limit(1000)
                        // Batch records into lists of 25
                        .buffer(25)
                        // Print out each record batch
                        .subscribe(batch -> System.out.println("Record Batch - " +
batch));
            }

            @Override
            public void complete() {
                System.out.println("All records stream successfully");
            }

            @Override
            public void exceptionOccurred(Throwable throwable) {
                System.err.println("Error during stream - " + throwable.getMessage());
            }
        };
        return client.subscribeToShard(request, responseHandler);
    }
```

Consulte el ejemplo completo en GitHub.

Usa la interfaz de visitante

Puede utilizar un objeto Visitor para suscribirse a eventos específicos que le interese ver.

Código de

```
   private static CompletableFuture<Void>
responseHandlerBuilderVisitorBuilder(KinesisAsyncClient client,
SubscribeToShardRequest request) {
       SubscribeToShardResponseHandler.Visitor visitor =
SubscribeToShardResponseHandler.Visitor
               .builder()
               .onSubscribeToShardEvent(e -> System.out.println("Received subscribe to
shard event " + e))
               .build();
       SubscribeToShardResponseHandler responseHandler =
SubscribeToShardResponseHandler
               .builder()
               .onError(t -> System.err.println("Error during stream - " +
t.getMessage()))
               .subscriber(visitor)
               .build();
       return client.subscribeToShard(request, responseHandler);
   }
```

Consulte el ejemplo completo en GitHub.

Usa un suscriptor personalizado

También puede implementar su propio suscriptor personalizado para suscribirse a la secuencia.

Este fragmento de código muestra un ejemplo de suscriptor.

Código de

```
   private static class MySubscriber implements
Subscriber<SubscribeToShardEventStream> {

       private Subscription subscription;
       private AtomicInteger eventCount = new AtomicInteger(0);

       @Override
       public void onSubscribe(Subscription subscription) {
           this.subscription = subscription;
           this.subscription.request(1);
       }

       @Override
```

```
        public void onNext(SubscribeToShardEventStream shardSubscriptionEventStream) {
            System.out.println("Received event " + shardSubscriptionEventStream);
            if (eventCount.incrementAndGet() >= 100) {
                // You can cancel the subscription at any time if you wish to stop
receiving events.
                subscription.cancel();
            }
            subscription.request(1);
        }

        @Override
        public void onError(Throwable throwable) {
            System.err.println("Error occurred while stream - " +
throwable.getMessage());
        }

        @Override
        public void onComplete() {
            System.out.println("Finished streaming all events");
        }
    }
```

Puede pasar el suscriptor personalizado al método `subscribe`, como se muestra en el siguiente fragmento de código.

Código de

```
    private static CompletableFuture<Void>
responseHandlerBuilderSubscriber(KinesisAsyncClient client, SubscribeToShardRequest
request) {
        SubscribeToShardResponseHandler responseHandler =
SubscribeToShardResponseHandler
                .builder()
                .onError(t -> System.err.println("Error during stream - " +
t.getMessage()))
                .subscriber(MySubscriber::new)
                .build();
        return client.subscribeToShard(request, responseHandler);
    }
```

Consulte el ejemplo completo en GitHub.

Escribir registros de datos en una secuencia de datos de Kinesis

Puede utilizar el objeto KinesisClient para escribir registros de datos en una secuencia de datos de Kinesis mediante el método `putRecords`. Para invocar correctamente este método, cree un objeto PutRecordsRequest. Debe pasar el nombre de la secuencia de datos al método `streamName`. También debe pasar los datos mediante el método `putRecords` (como se muestra en el siguiente ejemplo de código).

Importaciones

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisClient;
import software.amazon.awssdk.services.kinesis.model.PutRecordRequest;
import software.amazon.awssdk.services.kinesis.model.KinesisException;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamRequest;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamResponse;
```

En el siguiente ejemplo de código Java, observe que el objeto StockTrade se utiliza como los datos para escribir en la secuencia de datos de Kinesis. Antes de ejecutar este ejemplo, asegúrese de haber creado la secuencia de datos.

Código de

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisClient;
import software.amazon.awssdk.services.kinesis.model.PutRecordRequest;
import software.amazon.awssdk.services.kinesis.model.KinesisException;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamRequest;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class StockTradesWriter {
    public static void main(String[] args) {
```

```
        final String usage = """

                Usage:
                    <streamName>

                Where:
                    streamName - The Amazon Kinesis data stream to which records are
written (for example, StockTradeStream)
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String streamName = args[0];
        Region region = Region.US_EAST_1;
        KinesisClient kinesisClient = KinesisClient.builder()
                .region(region)
                .build();

        // Ensure that the Kinesis Stream is valid.
        validateStream(kinesisClient, streamName);
        setStockData(kinesisClient, streamName);
        kinesisClient.close();
    }

    public static void setStockData(KinesisClient kinesisClient, String streamName) {
        try {
            // Repeatedly send stock trades with a 100 milliseconds wait in between.
            StockTradeGenerator stockTradeGenerator = new StockTradeGenerator();

            // Put in 50 Records for this example.
            int index = 50;
            for (int x = 0; x < index; x++) {
                StockTrade trade = stockTradeGenerator.getRandomTrade();
                sendStockTrade(trade, kinesisClient, streamName);
                Thread.sleep(100);
            }

        } catch (KinesisException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
```

```
        System.out.println("Done");
    }

    private static void sendStockTrade(StockTrade trade, KinesisClient kinesisClient,
            String streamName) {
        byte[] bytes = trade.toJsonAsBytes();

        // The bytes could be null if there is an issue with the JSON serialization by
        // the Jackson JSON library.
        if (bytes == null) {
            System.out.println("Could not get JSON bytes for stock trade");
            return;
        }

        System.out.println("Putting trade: " + trade);
        PutRecordRequest request = PutRecordRequest.builder()
                .partitionKey(trade.getTickerSymbol()) // We use the ticker symbol as
the partition key, explained in
                                                       // the Supplemental Information
section below.
                .streamName(streamName)
                .data(SdkBytes.fromByteArray(bytes))
                .build();

        try {
            kinesisClient.putRecord(request);
        } catch (KinesisException e) {
            System.err.println(e.getMessage());
        }
    }

    private static void validateStream(KinesisClient kinesisClient, String streamName)
{
        try {
            DescribeStreamRequest describeStreamRequest =
DescribeStreamRequest.builder()
                    .streamName(streamName)
                    .build();

            DescribeStreamResponse describeStreamResponse =
kinesisClient.describeStream(describeStreamRequest);
```

```
            if (!
describeStreamResponse.streamDescription().streamStatus().toString().equals("ACTIVE"))
 {
                System.err.println("Stream " + streamName + " is not active. Please
 wait a few moments and try again.");
                System.exit(1);
            }

        } catch (KinesisException e) {
            System.err.println("Error found while describing the stream " +
 streamName);
            System.err.println(e);
            System.exit(1);
        }
    }
}
```

Consulte el ejemplo completo en GitHub.

Usar una biblioteca de terceros

Puede utilizar otras bibliotecas de terceros en lugar de implementar un suscriptor personalizado. Este ejemplo muestra el uso de la implementación RxJava, pero puede utilizar cualquier biblioteca que implemente las interfaces de secuencias reactivas. Consulte la página wiki de RxJava en Github para obtener más información acerca de dicha biblioteca.

Para utilizar la biblioteca, añádala como una dependencia. Si está utilizando Maven, el ejemplo muestra el fragmento de POM que se debe utilizar.

Entrada de POM

```
<dependency>
 <groupId>io.reactivex.rxjava2</groupId>
 <artifactId>rxjava</artifactId>
 <version>2.2.21</version>
</dependency>
```

Importaciones

```
import java.net.URI;
import java.util.concurrent.CompletableFuture;
```

```
import io.reactivex.Flowable;
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.core.async.SdkPublisher;
import software.amazon.awssdk.http.Protocol;
import software.amazon.awssdk.http.SdkHttpConfigurationOption;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisAsyncClient;
import software.amazon.awssdk.services.kinesis.model.ShardIteratorType;
import software.amazon.awssdk.services.kinesis.model.StartingPosition;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardEvent;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardRequest;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardResponseHandler;
import software.amazon.awssdk.utils.AttributeMap;
```

En este ejemplo se utiliza RxJava en el método de ciclo de vida `onEventStream`. Esto le ofrece acceso completo al publicador, que se puede utilizar para crear un Rx Flowable.

Código de

```
       SubscribeToShardResponseHandler responseHandler =
SubscribeToShardResponseHandler
           .builder()
           .onError(t -> System.err.println("Error during stream - " +
t.getMessage()))
           .onEventStream(p -> Flowable.fromPublisher(p)
                                       .ofType(SubscribeToShardEvent.class)

.flatMapIterable(SubscribeToShardEvent::records)
                                       .limit(1000)
                                       .buffer(25)
                                       .subscribe(e -> System.out.println("Record
batch = " + e)))
           .build();
```

También puede usar el método `publisherTransformer` con el publicador `Flowable`. Debe adaptar el publicador `Flowable` a un SdkPublisher, tal y como se muestra en el siguiente ejemplo.

Código de

```
       SubscribeToShardResponseHandler responseHandler =
SubscribeToShardResponseHandler
```

```
            .builder()
            .onError(t -> System.err.println("Error during stream - " +
t.getMessage()))
            .publisherTransformer(p ->
SdkPublisher.adapt(Flowable.fromPublisher(p).limit(100)))
            .build();
```

Consulte el ejemplo completo en GitHub.

Más información

- SubscribeToShardEvent en la referencia de la API de Amazon Kinesis
- SubscribeToShard en la referencia de la API de Amazon Kinesis

Invocar, enumerar y eliminar funciones AWS Lambda

En esta sección se proporcionan ejemplos de programación con el cliente Lambda de servicio mediante la versión AWS SDK para Java 2.x.

Temas

- Invocar una función Lambda
- Enumerar funciones de Lambda
- Eliminación de una función de Lambda

Invocar una función Lambda

Para invocar una Lambda función, cree un `LambdaClient`objeto e invoque su método. `invoke` Crea un `InvokeRequest`objeto para especificar información adicional, como el nombre de la función y la carga útil que se transferirá a la función. Lambda Los nombres de las funciones aparecen como arn:aws:lambda:us-east- 1:123456789012:function:. HelloFunction Puede recuperar el valor viendo la función en la Consola de administración de AWS.

Para pasar datos de carga útil a una función, cree un objeto `SdkBytes` que contenga información. Por ejemplo, en el siguiente ejemplo de código, observe los datos JSON pasados a la función Lambda .

Importaciones

```
import software.amazon.awssdk.services.lambda.LambdaClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.lambda.model.InvokeRequest;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.services.lambda.model.InvokeResponse;
import software.amazon.awssdk.services.lambda.model.LambdaException;
```

Código

El siguiente ejemplo de código muestra cómo invocar una función. Lambda

```
    public static void invokeFunction(LambdaClient awsLambda, String functionName) {

         InvokeResponse res = null ;
        try {
            //Need a SdkBytes instance for the payload
            String json = "{\"Hello \":\"Paris\"}";
            SdkBytes payload = SdkBytes.fromUtf8String(json) ;

            //Setup an InvokeRequest
            InvokeRequest request = InvokeRequest.builder()
                    .functionName(functionName)
                    .payload(payload)
                    .build();

            res = awsLambda.invoke(request);
            String value = res.payload().asUtf8String() ;
            System.out.println(value);

        } catch(LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en. GitHub

Enumerar funciones de Lambda

Construya un objeto de `Lambda Client` e invoque su método `listFunctions`. Este método devuelve un objeto `ListFunctionsResponse`. Puede invocar el método `functions` de este objeto para obtener una lista de objetos `FunctionConfiguration`. Puede recorrer la lista en

iteración para recuperar información sobre las funciones. Por ejemplo, el siguiente ejemplo de código Java muestra cómo obtener el nombre de cada función.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.lambda.LambdaClient;
import software.amazon.awssdk.services.lambda.model.LambdaException;
import software.amazon.awssdk.services.lambda.model.ListFunctionsResponse;
import software.amazon.awssdk.services.lambda.model.FunctionConfiguration;
import java.util.List;
```

Código

El siguiente ejemplo de código Java muestra cómo recuperar una lista de nombres de funciones de .

```
    public static void listFunctions(LambdaClient awsLambda) {

        try {
            ListFunctionsResponse functionResult = awsLambda.listFunctions();
            List<FunctionConfiguration> list = functionResult.functions();

            for (FunctionConfiguration config: list) {
                System.out.println("The function name is "+config.functionName());
            }

        } catch(LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Eliminación de una función de Lambda

Construya un objeto de `LambdaClient` e invoque su método `deleteFunction`. Cree un objeto `DeleteFunctionRequest` y páselo al método `deleteFunction`. Este objeto contiene información como el nombre de la función que se va a eliminar. Los nombres de las funciones aparecen como arn:aws:lambda:us-east- 1:123456789012:function:. HelloFunction Puede recuperar el valor viendo la función en la Consola de administración de AWS.

Importaciones

```
import software.amazon.awssdk.services.lambda.LambdaClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.lambda.model.DeleteFunctionRequest;
import software.amazon.awssdk.services.lambda.model.LambdaException;
```

Código

El siguiente código de Java muestra cómo eliminar una función. Lambda

```
   public static void deleteLambdaFunction(LambdaClient awsLambda, String
functionName ) {
       try {
           DeleteFunctionRequest request = DeleteFunctionRequest.builder()
                   .functionName(functionName)
                   .build();

           awsLambda.deleteFunction(request);
           System.out.println("The "+functionName +" function was deleted");

       } catch(LambdaException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

Consulte el ejemplo completo en GitHub.

Trabajo con Amazon S3

En esta sección se proporciona información básica para trabajar con Amazon S3 mediante AWS SDK for Java 2.x. Esta sección complementa los ejemplos de Java v2 de Amazon S3 presentados en la sección Ejemplos de código de esta guía.

Clientes S3 en el AWS SDK for Java 2.x

AWS SDK for Java 2.x Proporciona diferentes tipos de clientes S3. La siguiente tabla muestra las diferencias y puede ayudarle a decidir qué es lo mejor para sus casos de uso.

Diferentes tipos de clientes de Amazon S3

Cliente de S3	Descripción breve	Cuándo se debe usar	Limitación o inconveniente
AWS Cliente S3 basado en CRT Interfaz: S3 AsyncClient Constructor: S3CrtAsyncClientBuilder	• Proporciona las mismas operaciones de API asincrónicas que el cliente asincrónico de S3 basado en Java, pero con mayor rendimiento. • Requiere la dependencia de `aws-crt`. • Admite transferencias paralelas automáticas (multiparte). Consulte the section called “Utilizar un cliente S3 de alto rendimiento”.	• La aplicación transfiere objetos grandes (más de 8 MB) y desea maximizar el rendimiento. • Desea cargar objetos con una longitud de contenido desconocida. • Desea mejorar la agrupación de conexiones y el equilibrio de carga de DNS, lo que mejora el rendimiento. • Desea mejorar la fiabilidad de las transferencias en caso de que se produzca un fallo en la red. Las partes individuales fallidas se reintentan sin reiniciar la transferencia desde el principio.	• Admite menos ajustes de configuración que los clientes de S3 basados en Java. • Requiere una dependencia adicional.

Cliente de S3	Descripción breve	Cuándo se debe usar	Limitación o inconveniente
Cliente asincrónico S3 basado en Java con multiparte habilitada Interfaz: S3 AsyncClient Constructor: S3 AsyncClientBuilder	• Proporciona una API asincrónica. • Admite transferencias paralelas automáticas (multiparte) cuando se habilita la multiparte en el momento de la creación. Consulte the section called “Configuración de la compatibilidad con la transferencia paralela”.	• La aplicación transfiere objetos grandes y desea maximizar el rendimiento. • Desea cargar objetos con una longitud de contenido desconocida. • Desea mejorar la fiabilidad de las transferencias en caso de que se produzca un fallo en la red. Las partes individuales fallidas se reintentan sin reiniciar la transferencia desde el principio. • Necesita opciones de configuración que no estén disponibles en el cliente S3 AWS basado en CRT.	Tiene menos rendimiento que el cliente S3 basado en AWS CRT.

Cliente de S3	Descripción breve	Cuándo se debe usar	Limitación o inconveniente
Cliente asincrónico de S3 basado en Java sin multiparte habilitada Interfaz: S3 AsyncClient Constructor: S3 AsyncClientBuilder	• Proporciona una API asincrónica.	• Transfiere objetos con menos de 8 MB. • Desea una API asincrónica.	Sin optimización del rendimiento
Cliente asincrónico de S3 basado en Java Interfaz: S3Client Constructor: S3 ClientBuilder	• Proporciona una API asincrónica.	• Transfiere objetos con menos de 8 MB. • Desea una API asincrónica.	Sin optimización del rendimiento

Note

A partir de la versión 2.18.x, AWS SDK for Java 2.x utiliza un direccionamiento de tipo alojamiento virtual al incluir una anulación de punto final. Esto se aplica siempre que el nombre del bucket sea una etiqueta DNS válida.
Llame al método `forcePathStyle` con `true` en su constructor de clientes para forzar al cliente a utilizar el direccionamiento estilo ruta para los buckets.
En el siguiente ejemplo se muestra un cliente de servicio configurado con una anulación de punto de conexión y utilizando direccionamiento estilo ruta.

```
S3Client client = S3Client.builder()
                          .region(Region.US_WEST_2)
                          .endpointOverride(URI.create("https://s3.us-
west-2.amazonaws.com"))
                          .forcePathStyle(true)
```

```
                .build();
```

Temas

- Carga de transmisiones a Amazon S3 mediante AWS SDK for Java 2.x
- Trabaja con Amazon S3 prefirmado URLs
- Acceso entre regiones de Amazon S3
- Protección de la integridad de los datos con sumas de comprobación
- Utilice un cliente S3 de alto rendimiento: cliente S3 basado en AWS CRT
- Configuración del cliente asincrónico S3 basado en Java para usar transferencias paralelas
- Transferir archivos y directorios con Amazon S3 Transfer Manager
- Uso de notificaciones de eventos de S3

Carga de transmisiones a Amazon S3 mediante AWS SDK for Java 2.x

Cuando se utiliza un flujo para cargar contenido en S3 utilizando `putObject` o `uploadPart`, se utiliza una clase de fábrica `RequestBody` para que la API sincrónica suministre el flujo. Para la API asincrónica, `AsyncRequestBody` es la clase de fábrica equivalente.

¿Qué métodos cargan flujos?

En la API sincrónica, puede usar los siguientes métodos de fábrica de `RequestBody` para suministrar el flujo:

- `fromInputStream(InputStream inputStream, long contentLength)`

  `fromContentProvider(ContentStreamProvider provider, long contentLength, String mimeType)`

  - El `ContentStreamProvider` tiene el método de fábrica `fromInputStream(InputStream inputStream)`
- `fromContentProvider(ContentStreamProvider provider, String mimeType)`

En la API asincrónica, puede usar los siguientes métodos de fábrica de `AsyncRequestBody`.

- `fromInputStream(InputStream inputStream, Long contentLength, ExecutorService executor)`
- `fromInputStream(AsyncRequestBodyFromInputStreamConfiguration configuration)`
  - Utiliza el AsyncRequestBodyFromInputStreamConfiguration .Builder para suministrar la transmisión
- `fromInputStream(Consumer<AsyncRequestBodyFromInputStreamConfiguration.Builder> configuration)`
- `forBlockingInputStream(Long contentLength)`
  - El `BlockingInputStreamAsyncRequestBody` resultante contiene el método `writeInputStream(InputStream inputStream)` que puede utilizar para proporcionar el flujo

Realización de la carga

Si conoce la longitud del flujo

Como puede ver en la firma de los métodos mostrados anteriormente, la mayoría de los métodos aceptan un parámetro de longitud del contenido.

Si conoce la longitud del contenido en bytes, proporcione el valor exacto:

```
// Always provide the exact content length when it's available.
long contentLength = 1024; // Exact size in bytes.
s3Client.putObject(req -> req
    .bucket("amzn-s3-demo-bucket")
    .key("my-key"),
RequestBody.fromInputStream(inputStream, contentLength));
```

Warning

Al cargar desde un flujo de entrada, si la longitud del contenido especificada no coincide con el recuento real de bytes, es posible que se produzca lo siguiente:

- Objetos truncados si la longitud especificada es demasiado pequeña
- Errores de carga o conexiones bloqueadas si la longitud especificada es demasiado grande

Si no conoce la longitud del flujo

Uso de la API sincrónica

Usa: `fromContentProvider(ContentStreamProvider provider, String mimeType)`

```
public PutObjectResponse syncClient_stream_unknown_size(String bucketName, String key,
 InputStream inputStream) {

    S3Client s3Client = S3Client.create();

    RequestBody body =
 RequestBody.fromContentProvider(ContentStreamProvider.fromInputStream(inputStream),
 "text/plain");
    PutObjectResponse putObjectResponse = s3Client.putObject(b ->
 b.bucket(BUCKET_NAME).key(KEY_NAME), body);
    return putObjectResponse;
}
```

Dado que el SDK almacena en búfer de memoria todo el flujo para calcular la longitud del contenido, pueden producirse problemas de memoria con flujos grandes. Si necesita cargar flujos de gran tamaño con el cliente sincrónico, considere usar la API multiparte:

Cargue un flujo mediante la API de cliente sincrónica y la API multiparte

```
public static void uploadStreamToS3(String bucketName, String key, InputStream
 inputStream) {
    // Create S3 client
    S3Client s3Client = S3Client.create();
    try {
        // Step 1: Initiate the multipart upload
        CreateMultipartUploadRequest createMultipartUploadRequest =
 CreateMultipartUploadRequest.builder()
                .bucket(bucketName)
                .key(key)
                .build();

        CreateMultipartUploadResponse createResponse =
 s3Client.createMultipartUpload(createMultipartUploadRequest);
        String uploadId = createResponse.uploadId();
        System.out.println("Started multipart upload with ID: " + uploadId);

        // Step 2: Upload parts
```

```
        List<CompletedPart> completedParts = new ArrayList<>();
        int partNumber = 1;
        byte[] buffer = new byte[PART_SIZE];
        int bytesRead;

        try {
            while ((bytesRead = readFullyOrToEnd(inputStream, buffer)) > 0) {
                // Create request to upload a part
                UploadPartRequest uploadPartRequest = UploadPartRequest.builder()
                        .bucket(bucketName)
                        .key(key)
                        .uploadId(uploadId)
                        .partNumber(partNumber)
                        .build();

                // If we didn't read a full buffer, create a properly sized byte array
                RequestBody requestBody;
                if (bytesRead < PART_SIZE) {
                    byte[] lastPartBuffer = new byte[bytesRead];
                    System.arraycopy(buffer, 0, lastPartBuffer, 0, bytesRead);
                    requestBody = RequestBody.fromBytes(lastPartBuffer);
                } else {
                    requestBody = RequestBody.fromBytes(buffer);
                }

                // Upload the part and save the response's ETag
                UploadPartResponse uploadPartResponse =
s3Client.uploadPart(uploadPartRequest, requestBody);
                CompletedPart part = CompletedPart.builder()
                        .partNumber(partNumber)
                        .eTag(uploadPartResponse.eTag())
                        .build();
                completedParts.add(part);

                System.out.println("Uploaded part " + partNumber + " with size " +
bytesRead + " bytes");
                partNumber++;
            }

            // Step 3: Complete the multipart upload
            CompletedMultipartUpload completedMultipartUpload =
CompletedMultipartUpload.builder()
                    .parts(completedParts)
                    .build();
```

```
            CompleteMultipartUploadRequest completeRequest =
 CompleteMultipartUploadRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .multipartUpload(completedMultipartUpload)
                    .build();

            CompleteMultipartUploadResponse completeResponse =
 s3Client.completeMultipartUpload(completeRequest);
            System.out.println("Multipart upload completed. Object URL: " +
 completeResponse.location());

        } catch (Exception e) {
            // If an error occurs, abort the multipart upload
            System.err.println("Error during multipart upload: " + e.getMessage());
            AbortMultipartUploadRequest abortRequest =
 AbortMultipartUploadRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .build();
            s3Client.abortMultipartUpload(abortRequest);
            System.err.println("Multipart upload aborted");
        } finally {
            try {
                inputStream.close();
            } catch (IOException e) {
                System.err.println("Error closing input stream: " + e.getMessage());
            }
        }
    } finally {
        s3Client.close();
    }
}

/**
 * Reads from the input stream into the buffer, attempting to fill the buffer
 completely
 * or until the end of the stream is reached.
 *
 * @param inputStream the input stream to read from
 * @param buffer      the buffer to fill
```

```
 * @return the number of bytes read, or -1 if the end of the stream is reached before
 any bytes are read
 * @throws IOException if an I/O error occurs
 */
private static int readFullyOrToEnd(InputStream inputStream, byte[] buffer) throws
 IOException {
    int totalBytesRead = 0;
    int bytesRead;

    while (totalBytesRead < buffer.length) {
        bytesRead = inputStream.read(buffer, totalBytesRead, buffer.length -
 totalBytesRead);
        if (bytesRead == -1) {
            break; // End of stream
        }
        totalBytesRead += bytesRead;
    }

    return totalBytesRead > 0 ? totalBytesRead : -1;
}
```

> **Note**
>
> Para la mayoría de los casos de uso, recomendamos utilizar la API de cliente asincrónica para los flujos de tamaño desconocido. Este método permite transferencias paralelas y ofrece una interfaz de programación más sencilla, ya que el SDK controla la segmentación de flujos en fragmentos multiparte si el flujo es grande.
>
> Tanto el cliente asincrónico estándar de S3 con mutiparte habilitada como el cliente de S3 basado en AWS CRT implementan este método. Mostramos ejemplos de este método en la siguiente sección.

Uso de la API asincrónica

Puede proporcionar `null` para el argumento `contentLength` a `fromInputStream(InputStream inputStream, Long contentLength, ExecutorService executor)`

Example utilizando el cliente asíncrono AWS basado en CRT:

```
public PutObjectResponse crtClient_stream_unknown_size(String bucketName, String key,
 InputStream inputStream) {

    S3AsyncClient s3AsyncClient = S3AsyncClient.crtCreate();
    ExecutorService executor = Executors.newSingleThreadExecutor();
    AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
 executor);  // 'null' indicates that the

     // content length is unknown.
    CompletableFuture<PutObjectResponse> responseFuture =
            s3AsyncClient.putObject(r -> r.bucket(bucketName).key(key), body)
                    .exceptionally(e -> {
                        if (e != null){
                            logger.error(e.getMessage(), e);
                        }
                        return null;
                    });

    PutObjectResponse response = responseFuture.join(); // Wait for the response.
    executor.shutdown();
    return response;
}
```

Example utilizando el cliente asincrónico estándar con multiparte habilitada:

```
public PutObjectResponse asyncClient_multipart_stream_unknown_size(String bucketName,
 String key, InputStream inputStream) {

    S3AsyncClient s3AsyncClient =
 S3AsyncClient.builder().multipartEnabled(true).build();
    ExecutorService executor = Executors.newSingleThreadExecutor();
    AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
 executor); // 'null' indicates that the

    // content length is unknown.
    CompletableFuture<PutObjectResponse> responseFuture =
            s3AsyncClient.putObject(r -> r.bucket(bucketName).key(key), body)
                    .exceptionally(e -> {
                        if (e != null) {
                            logger.error(e.getMessage(), e);
                        }
```

```
                        return null;
                    });

    PutObjectResponse response = responseFuture.join(); // Wait for the response.
    executor.shutdown();
    return response;
}
```

Trabaja con Amazon S3 prefirmado URLs

Los prefirmados URLs proporcionan acceso temporal a objetos privados de S3 sin necesidad de que los usuarios tengan AWS credenciales o permisos.

Por ejemplo, supongamos que Alice tiene acceso a un objeto S3 y desea compartir temporalmente el acceso a ese objeto con Bob. Alice puede generar una solicitud GET prefirmada para compartir con Bob de forma que pueda descargar el objeto sin requerir acceso a las credenciales de Alice. Puede generar solicitudes prefirmadas URLs para HTTP GET y HTTP PUT.

Genere una URL prefirmada para un objeto y, a continuación, descárguela (solicitud GET)

El siguiente ejemplo consta de dos partes.

- Parte 1: Alice genera la URL prefirmada de un objeto.
- Parte 2: Bob descarga el objeto mediante la URL prefirmada.

Parte 1: Generar la URL

Alice ya tiene un objeto en un bucket S3. Usa el siguiente código para generar una cadena URL que Bob puede usar en una solicitud GET posterior.

Importaciones

```
import com.example.s3.util.PresignUrlUtils;
import org.slf4j.Logger;
import software.amazon.awssdk.http.HttpExecuteRequest;
import software.amazon.awssdk.http.HttpExecuteResponse;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.SdkHttpMethod;
import software.amazon.awssdk.http.SdkHttpRequest;
```

```
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.services.s3.presigner.model.GetObjectPresignRequest;
import software.amazon.awssdk.services.s3.presigner.model.PresignedGetObjectRequest;
import software.amazon.awssdk.utils.IoUtils;

import java.io.ByteArrayOutputStream;
import java.io.File;
import java.io.IOException;
import java.io.InputStream;
import java.net.HttpURLConnection;
import java.net.URISyntaxException;
import java.net.URL;
import java.net.http.HttpClient;
import java.net.http.HttpRequest;
import java.net.http.HttpResponse;
import java.nio.file.Paths;
import java.time.Duration;
import java.util.UUID;
```

```
    /* Create a pre-signed URL to download an object in a subsequent GET request. */
    public String createPresignedGetUrl(String bucketName, String keyName) {
        try (S3Presigner presigner = S3Presigner.create()) {

            GetObjectRequest objectRequest = GetObjectRequest.builder()
                    .bucket(bucketName)
                    .key(keyName)
                    .build();

            GetObjectPresignRequest presignRequest = GetObjectPresignRequest.builder()
                    .signatureDuration(Duration.ofMinutes(10))  // The URL will expire
in 10 minutes.
                    .getObjectRequest(objectRequest)
                    .build();

            PresignedGetObjectRequest presignedRequest =
presigner.presignGetObject(presignRequest);
            logger.info("Presigned URL: [{}]", presignedRequest.url().toString());
            logger.info("HTTP method: [{}]", presignedRequest.httpRequest().method());
```

```
            return presignedRequest.url().toExternalForm();
        }
    }
```

Parte 2: Descargar el objeto

Bob usa una de las siguientes tres opciones de código para descargar el objeto. Como alternativa, podría usar un navegador para realizar la solicitud GET.

Usar JDK **`HttpURLConnection`** (desde la versión 1.1)

```
    /* Use the JDK HttpURLConnection (since v1.1) class to do the download. */
    public byte[] useHttpUrlConnectionToGet(String presignedUrlString) {
        ByteArrayOutputStream byteArrayOutputStream = new ByteArrayOutputStream(); //
Capture the response body to a byte array.

        try {
            URL presignedUrl = new URL(presignedUrlString);
            HttpURLConnection connection = (HttpURLConnection)
presignedUrl.openConnection();
            connection.setRequestMethod("GET");
            // Download the result of executing the request.
            try (InputStream content = connection.getInputStream()) {
                IoUtils.copy(content, byteArrayOutputStream);
            }
            logger.info("HTTP response code is " + connection.getResponseCode());

        } catch (S3Exception | IOException e) {
            logger.error(e.getMessage(), e);
        }
        return byteArrayOutputStream.toByteArray();
    }
```

Usar JDK **`HttpClient`** (desde la v11)

```
    /* Use the JDK HttpClient (since v11) class to do the download. */
    public byte[] useHttpClientToGet(String presignedUrlString) {
        ByteArrayOutputStream byteArrayOutputStream = new ByteArrayOutputStream(); //
Capture the response body to a byte array.

        HttpRequest.Builder requestBuilder = HttpRequest.newBuilder();
        HttpClient httpClient = HttpClient.newHttpClient();
        try {
```

```
            URL presignedUrl = new URL(presignedUrlString);
            HttpResponse<InputStream> response = httpClient.send(requestBuilder
                            .uri(presignedUrl.toURI())
                            .GET()
                            .build(),
                    HttpResponse.BodyHandlers.ofInputStream());

            IoUtils.copy(response.body(), byteArrayOutputStream);

            logger.info("HTTP response code is " + response.statusCode());

        } catch (URISyntaxException | InterruptedException | IOException e) {
            logger.error(e.getMessage(), e);
        }
        return byteArrayOutputStream.toByteArray();
    }
```

Usar **`SdkHttpClient`** desde el SDK para Java

```
    /* Use the AWS SDK for Java SdkHttpClient class to do the download. */
    public byte[] useSdkHttpClientToGet(String presignedUrlString) {

        ByteArrayOutputStream byteArrayOutputStream = new ByteArrayOutputStream(); //
Capture the response body to a byte array.
        try {
            URL presignedUrl = new URL(presignedUrlString);
            SdkHttpRequest request = SdkHttpRequest.builder()
                    .method(SdkHttpMethod.GET)
                    .uri(presignedUrl.toURI())
                    .build();

            HttpExecuteRequest executeRequest = HttpExecuteRequest.builder()
                    .request(request)
                    .build();

            try (SdkHttpClient sdkHttpClient = ApacheHttpClient.create()) {
                HttpExecuteResponse response =
sdkHttpClient.prepareRequest(executeRequest).call();
                response.responseBody().ifPresentOrElse(
                        abortableInputStream -> {
                            try {
                                IoUtils.copy(abortableInputStream,
byteArrayOutputStream);
```

```
                            } catch (IOException e) {
                                throw new RuntimeException(e);
                            }
                        },
                        () -> logger.error("No response body."));

                logger.info("HTTP Response code is {}",
response.httpResponse().statusCode());
            }
        } catch (URISyntaxException | IOException e) {
            logger.error(e.getMessage(), e);
        }
        return byteArrayOutputStream.toByteArray();
    }
```

Consulta el ejemplo completo y pruébalo. GitHub

Genere una URL prefirmada para una carga y, a continuación, cargue un archivo (solicitud PUT)

El siguiente ejemplo consta de dos partes.

- Parte 1: Alice genera la URL prefirmada para cargar un objeto.
- Parte 2: Bob carga un archivo mediante la URL prefirmada.

Parte 1: Generar la URL

Alice ya tiene un bucket de S3. Usa el siguiente código para generar una cadena URL que Bob puede usar en una solicitud PUT posterior.

Importaciones

```
import com.example.s3.util.PresignUrlUtils;
import org.slf4j.Logger;
import software.amazon.awssdk.core.internal.sync.FileContentStreamProvider;
import software.amazon.awssdk.http.HttpExecuteRequest;
import software.amazon.awssdk.http.HttpExecuteResponse;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.SdkHttpMethod;
import software.amazon.awssdk.http.SdkHttpRequest;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
```

```
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.services.s3.presigner.model.PresignedPutObjectRequest;
import software.amazon.awssdk.services.s3.presigner.model.PutObjectPresignRequest;

import java.io.File;
import java.io.IOException;
import java.io.OutputStream;
import java.io.RandomAccessFile;
import java.net.HttpURLConnection;
import java.net.URISyntaxException;
import java.net.URL;
import java.net.http.HttpClient;
import java.net.http.HttpRequest;
import java.net.http.HttpResponse;
import java.nio.ByteBuffer;
import java.nio.channels.FileChannel;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.time.Duration;
import java.util.Map;
import java.util.UUID;
```

```
   /* Create a presigned URL to use in a subsequent PUT request */
   public String createPresignedUrl(String bucketName, String keyName, Map<String,
String> metadata) {
       try (S3Presigner presigner = S3Presigner.create()) {

           PutObjectRequest objectRequest = PutObjectRequest.builder()
                   .bucket(bucketName)
                   .key(keyName)
                   .metadata(metadata)
                   .build();

           PutObjectPresignRequest presignRequest = PutObjectPresignRequest.builder()
                   .signatureDuration(Duration.ofMinutes(10))  // The URL expires in
10 minutes.
                   .putObjectRequest(objectRequest)
                   .build();
```

```
            PresignedPutObjectRequest presignedRequest =
presigner.presignPutObject(presignRequest);
            String myURL = presignedRequest.url().toString();
            logger.info("Presigned URL to upload a file to: [{}]", myURL);
            logger.info("HTTP method: [{}]", presignedRequest.httpRequest().method());

            return presignedRequest.url().toExternalForm();
        }
    }
```

Parte 2: Cargar un objeto de archivo

Bob usa una de las siguientes tres opciones de código para cargar un archivo.

Usar JDK **`HttpURLConnection`** (desde la versión 1.1)

```
    /* Use the JDK HttpURLConnection (since v1.1) class to do the upload. */
    public void useHttpUrlConnectionToPut(String presignedUrlString, File fileToPut,
Map<String, String> metadata) {
        logger.info("Begin [{}] upload", fileToPut.toString());
        try {
            URL presignedUrl = new URL(presignedUrlString);
            HttpURLConnection connection = (HttpURLConnection)
presignedUrl.openConnection();
            connection.setDoOutput(true);
            metadata.forEach((k, v) -> connection.setRequestProperty("x-amz-meta-" + k,
v));
            connection.setRequestMethod("PUT");
            OutputStream out = connection.getOutputStream();

            try (RandomAccessFile file = new RandomAccessFile(fileToPut, "r");
                 FileChannel inChannel = file.getChannel()) {
                ByteBuffer buffer = ByteBuffer.allocate(8192); //Buffer size is 8k

                while (inChannel.read(buffer) > 0) {
                    buffer.flip();
                    for (int i = 0; i < buffer.limit(); i++) {
                        out.write(buffer.get());
                    }
                    buffer.clear();
                }
            } catch (IOException e) {
                logger.error(e.getMessage(), e);
```

```
            }

            out.close();
            connection.getResponseCode();
            logger.info("HTTP response code is " + connection.getResponseCode());

        } catch (S3Exception | IOException e) {
            logger.error(e.getMessage(), e);
        }
    }
```

Usar JDK **`HttpClient`** (desde la v11)

```
    /* Use the JDK HttpClient (since v11) class to do the upload. */
    public void useHttpClientToPut(String presignedUrlString, File fileToPut,
Map<String, String> metadata) {
        logger.info("Begin [{}] upload", fileToPut.toString());

        HttpRequest.Builder requestBuilder = HttpRequest.newBuilder();
        metadata.forEach((k, v) -> requestBuilder.header("x-amz-meta-" + k, v));

        HttpClient httpClient = HttpClient.newHttpClient();
        try {
            final HttpResponse<Void> response = httpClient.send(requestBuilder
                            .uri(new URL(presignedUrlString).toURI())

.PUT(HttpRequest.BodyPublishers.ofFile(Path.of(fileToPut.toURI())))
                            .build(),
                    HttpResponse.BodyHandlers.discarding());

            logger.info("HTTP response code is " + response.statusCode());

        } catch (URISyntaxException | InterruptedException | IOException e) {
            logger.error(e.getMessage(), e);
        }
    }
```

Usar **`SdkHttpClient`** desde el SDK para Java

```
    /* Use the AWS SDK for Java V2 SdkHttpClient class to do the upload. */
    public void useSdkHttpClientToPut(String presignedUrlString, File fileToPut,
Map<String, String> metadata) {
        logger.info("Begin [{}] upload", fileToPut.toString());
```

```
        try {
            URL presignedUrl = new URL(presignedUrlString);

            SdkHttpRequest.Builder requestBuilder = SdkHttpRequest.builder()
                    .method(SdkHttpMethod.PUT)
                    .uri(presignedUrl.toURI());
            // Add headers
            metadata.forEach((k, v) -> requestBuilder.putHeader("x-amz-meta-" + k, v));
            // Finish building the request.
            SdkHttpRequest request = requestBuilder.build();

            HttpExecuteRequest executeRequest = HttpExecuteRequest.builder()
                    .request(request)
                    .contentStreamProvider(new
FileContentStreamProvider(fileToPut.toPath()))
                    .build();

            try (SdkHttpClient sdkHttpClient = ApacheHttpClient.create()) {
                HttpExecuteResponse response =
sdkHttpClient.prepareRequest(executeRequest).call();
                logger.info("Response code: {}", response.httpResponse().statusCode());
            }
        } catch (URISyntaxException | IOException e) {
            logger.error(e.getMessage(), e);
        }
    }
```

Consulta el ejemplo completo y sigue probando GitHub.

Acceso entre regiones de Amazon S3

Cuando trabaja con buckets de Amazon Simple Storage Service (Amazon S3), normalmente sabe cuál es la Región de AWS del bucket. La región con la que trabaja se determina al crear el cliente S3.

Sin embargo, a veces necesitará trabajar con un bucket específico, pero no sabe si se encuentra en la misma región que está configurada para el cliente S3.

En lugar de hacer más llamadas para determinar la región del bucket, puede usar el SDK para habilitar el acceso a los buckets de S3 en distintas regiones.

Configuración

El acceso entre regiones comenzó a estar disponible con la versión `2.20.111` del SDK. Use esta versión o una posterior en su archivo de compilación de Maven para la dependencia `s3`, como se muestra en el siguiente fragmento.

```
<dependency>
  <groupId>software.amazon.awssdk</groupId>
  <artifactId>s3</artifactId>
  <version>2.27.21</version>
</dependency>
```

Después, cuando cree su cliente S3, habilite el acceso entre regiones, como se muestra en el fragmento. El acceso no está habilitado de forma predeterminada.

```
S3AsyncClient client = S3AsyncClient.builder()
                                    .crossRegionAccessEnabled(true)
                                    .build();
```

Cómo proporciona el SDK acceso entre regiones

Al hacer referencia a un bucket existente en una solicitud, como cuando utiliza el método `putObject`, el SDK inicia una solicitud a la Región configurada para el cliente.

Si el bucket no existe en esa región específica, la respuesta al error incluye la región real en la que reside el bucket. A continuación, el SDK utiliza la región correcta en una segunda solicitud.

Para optimizar las futuras solicitudes al mismo bucket, el SDK almacena en caché esta asignación de regiones en el cliente.

Consideraciones

Cuando active el acceso a los buckets entre regiones, tenga en cuenta que la primera llamada a la API puede provocar un aumento de la latencia si el bucket no se encuentra en la región configurada del cliente. Sin embargo, las llamadas posteriores se benefician de la información regional almacenada en caché, lo que mejora el rendimiento.

Al habilitar el acceso entre regiones, el acceso al bucket no se ve afectado. El usuario debe estar autorizado a acceder al bucket en cualquier región en la que resida.

Protección de la integridad de los datos con sumas de comprobación

Amazon Simple Storage Service (Amazon S3) permite especificar una suma de comprobación al cargar un objeto. Cuando se especifica una suma de comprobación, esta se almacena con el objeto y se puede validar cuando se descarga el objeto.

Las sumas de comprobación proporcionan un nivel adicional de integridad de los datos al transferir archivos. Con las sumas de comprobación, puede comprobar la coherencia de datos verificando que el archivo recibido coincide con el archivo original. Para obtener más información sobre las sumas de comprobación con Amazon S3, consulte la Guía del usuario de Amazon Simple Storage Service, que incluye los algoritmos compatibles.

Puede elegir el algoritmo que mejor se adapte a sus necesidades y dejar que el SDK calcule la suma de comprobación. También puede especificar un valor de suma de comprobación precalculada mediante uno de los algoritmos compatibles.

> **Note**
>
> A partir de la versión 2.30.0 de AWS SDK for Java 2.x, el SDK proporciona protecciones de integridad predeterminadas mediante el cálculo automático de una suma de comprobación de `CRC32` para las cargas. El SDK calcula esta suma de comprobación si no se proporciona un valor de suma de comprobación precalculado o si no se especifica un algoritmo que el SDK deba utilizar para calcular una suma de comprobación.
> El SDK también proporciona una configuración global para las protecciones de la integridad de los datos que puede configurar de forma externa, sobre la que puede leer en la Guía de referencia de herramientas AWS SDKs y herramientas.

Analizaremos las sumas de comprobación en dos fases de solicitud: carga del objeto y descarga del objeto.

Cargar un objeto

Al cargar un objeto con el método `putObject` y proporcionar un algoritmo de suma de comprobación, el SDK calcula la suma de comprobación del algoritmo especificado.

El siguiente fragmento de código muestra una solicitud para cargar un objeto con una suma de comprobación `SHA256`. Cuando el SDK envía la solicitud, calcula la suma de comprobación de `SHA256` y carga el objeto. Amazon S3 valida la integridad del contenido calculando la suma

de comprobación y comparándola con la suma de comprobación proporcionada por el SDK. A continuación, Amazon S3 almacena la suma de comprobación con el objeto.

```
public void putObjectWithChecksum() {
        s3Client.putObject(b -> b
                .bucket(bucketName)
                .key(key)
                .checksumAlgorithm(ChecksumAlgorithm.SHA256),
            RequestBody.fromString("This is a test"));
}
```

Si no proporciona un algoritmo de suma de comprobación con la solicitud, el comportamiento de la suma de comprobación varía en función de la versión del SDK que utilice, tal y como se muestra en la siguiente tabla.

Comportamiento de la suma de comprobación cuando no se proporciona ningún algoritmo de suma de comprobación

Versión del SDK de Java	Comportamiento de la suma de comprobación
anterior a la versión 2.30.0	El SDK no calcula automáticamente una suma de comprobación basada en CRC ni la proporciona en la solicitud.
2.30.0 o posterior	El SDK usa el algoritmo `CRC32` para calcular la suma de comprobación y la proporciona en la solicitud. Amazon S3 valida la integridad de la transferencia calculando su propia suma de comprobación `CRC32` y la compara con la suma de comprobación proporcionada por el SDK. Si las sumas de comprobación coinciden , la suma de comprobación se guarda con el objeto.

Utilizar un valor de suma de comprobación calculado previamente

Un valor de suma de comprobación precalculado proporcionado con la solicitud desactiva el cálculo automático por parte del SDK y utiliza el valor proporcionado en su lugar.

El siguiente ejemplo muestra una solicitud con una suma de control calculada previamente SHA256.

```
    public void putObjectWithPrecalculatedChecksum(String filePath) {
        String checksum = calculateChecksum(filePath, "SHA-256");

        s3Client.putObject((b -> b
                .bucket(bucketName)
                .key(key)
                .checksumSHA256(checksum)),
            RequestBody.fromFile(Paths.get(filePath)));
    }
```

Si Amazon S3 determina que el valor de la suma de comprobación es incorrecto para el algoritmo especificado, el servicio devuelve una respuesta de error.

Cargas multiparte

También puede utilizar sumas de comprobación en las cargas multiparte.

El SDK de Java 2.x ofrece dos opciones para usar sumas de comprobación con cargas multiparte. La primera opción usa `S3TransferManager`.

En el siguiente ejemplo de gestor de transferencias se especifica el SHA1 algoritmo de la carga.

```
    public void multipartUploadWithChecksumTm(String filePath) {
        S3TransferManager transferManager = S3TransferManager.create();
        UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
            .putObjectRequest(b -> b
                .bucket(bucketName)
                .key(key)
                .checksumAlgorithm(ChecksumAlgorithm.SHA1))
            .source(Paths.get(filePath))
            .build();
        FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);
        fileUpload.completionFuture().join();
        transferManager.close();
    }
```

Si no proporciona un algoritmo de suma de comprobación al utilizar el administrador de transferencias para cargas, el SDK calcula automáticamente una suma de comprobación basada en el algoritmo `CRC32`. El SDK realiza este cálculo para todas las versiones del SDK.

La segunda opción usa la API `S3Client` (o la API `S3AsyncClient`) para llevar a cabo la carga multiparte. Si especifica una suma de comprobación con este método, debe especificar el algoritmo que se utilizará al iniciar la carga. También debe especificar el algoritmo para cada solicitud de parte y proporcionar la suma de comprobación calculada para cada parte una vez cargada.

```
    public void multipartUploadWithChecksumS3Client(String filePath) {
        ChecksumAlgorithm algorithm = ChecksumAlgorithm.CRC32;

        // Initiate the multipart upload.
        CreateMultipartUploadResponse createMultipartUploadResponse =
s3Client.createMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key)
            .checksumAlgorithm(algorithm)); // Checksum specified on initiation.
        String uploadId = createMultipartUploadResponse.uploadId();

        // Upload the parts of the file.
        int partNumber = 1;
        List<CompletedPart> completedParts = new ArrayList<>();
        ByteBuffer bb = ByteBuffer.allocate(1024 * 1024 * 5); // 5 MB byte buffer

        try (RandomAccessFile file = new RandomAccessFile(filePath, "r")) {
            long fileSize = file.length();
            long position = 0;
            while (position < fileSize) {
                file.seek(position);
                long read = file.getChannel().read(bb);

                bb.flip(); // Swap position and limit before reading from the buffer.
                UploadPartRequest uploadPartRequest = UploadPartRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .checksumAlgorithm(algorithm) // Checksum specified on each part.
                    .partNumber(partNumber)
                    .build();

                UploadPartResponse partResponse = s3Client.uploadPart(
                    uploadPartRequest,
                    RequestBody.fromByteBuffer(bb));

                CompletedPart part = CompletedPart.builder()
                    .partNumber(partNumber)
```

```
                    .checksumCRC32(partResponse.checksumCRC32()) // Provide the
calculated checksum.
                    .eTag(partResponse.eTag())
                    .build();
                completedParts.add(part);

                bb.clear();
                position += read;
                partNumber++;
            }
        } catch (IOException e) {
            System.err.println(e.getMessage());
        }

        // Complete the multipart upload.
        s3Client.completeMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key)
            .uploadId(uploadId)

.multipartUpload(CompletedMultipartUpload.builder().parts(completedParts).build()));
    }
```

El código de los ejemplos y las pruebas completos se encuentra en el repositorio GitHub de ejemplos de código.

Descargar un objeto

Cuando se utiliza el método getObject para descargar un objeto, el SDK valida automáticamente la suma de comprobación cuando el método `checksumMode` del compilador de `GetObjectRequest` se establece como `ChecksumMode.ENABLED`.

La solicitud del siguiente fragmento indica al SDK que valide la suma de comprobación de la respuesta calculándola y comparando los valores.

```
    public GetObjectResponse getObjectWithChecksum() {
        return s3Client.getObject(b -> b
                        .bucket(bucketName)
                        .key(key)
                        .checksumMode(ChecksumMode.ENABLED))
                .response();
    }
```

> **Note**
>
> Si el objeto no se cargó con una suma de comprobación, no se realizará ninguna validación.

Otras opciones de cálculo de la suma de comprobación

> **Note**
>
> Para verificar la integridad de los datos transmitidos e identificar errores de transmisión, recomendamos a los usuarios que mantengan la configuración predeterminada del SDK para las opciones de cálculo de la suma de comprobación. De forma predeterminada, el SDK agrega esta importante comprobación a muchas operaciones de S3, incluidas `PutObject` y `GetObject`.

Sin embargo, si el uso de Amazon S3 requiere una validación mínima de la suma de comprobación, puede deshabilitar muchas comprobaciones cambiando los ajustes de configuración predeterminados.

Deshabilite el cálculo automático de la suma de comprobación a menos que sea necesario

Puede deshabilitar el cálculo automático de la suma de comprobación mediante el SDK para las operaciones que lo admiten, por ejemplo, `PutObject` y `GetObject`. Sin embargo, algunas operaciones de S3 requieren un cálculo de la suma de comprobación; no se puede deshabilitar el cálculo de la suma de comprobación para estas operaciones.

El SDK proporciona ajustes independientes para el cálculo de una suma de comprobación de la carga útil de una solicitud y de la carga útil de una respuesta.

En la siguiente lista se describen las configuraciones que puede usar para minimizar los cálculos de la suma de comprobación en los distintos ámbitos.

- Alcance de todas las aplicaciones: al cambiar la configuración de las variables de entorno o de un perfil en los `credentials` archivos AWS `config` AND compartidos, todas las aplicaciones pueden usar esta configuración. Esta configuración afecta a todos los clientes de servicio de todas las aplicaciones AWS del SDK, a menos que se anule en el ámbito del cliente de la aplicación o del servicio.
  - Adición de la configuración a un perfil:

```
[default]
request_checksum_calculation = WHEN_REQUIRED
response_checksum_validation = WHEN_REQUIRED
```

- Adición de variables de entorno:

```
AWS_REQUEST_CHECKSUM_CALCULATION=WHEN_REQUIRED
AWS_RESPONSE_CHECKSUM_VALIDATION=WHEN_REQUIRED
```

- Ámbito actual de la aplicación: puede establecer la propiedad del sistema Java en `aws.requestChecksumCalculation` a `WHEN_REQUIRED` para limitar el cálculo de la suma de comprobación. La propiedad del sistema correspondiente para respuestas es `aws.responseChecksumValidation`.

  Esta configuración afecta a todos los clientes de servicio del SDK en la aplicación, a menos que se anulen durante la creación del cliente de servicio.

  Defina la propiedad del sistema en el inicio de la aplicación:

```
import software.amazon.awssdk.core.SdkSystemSetting;
import software.amazon.awssdk.core.checksums.RequestChecksumCalculation;
import software.amazon.awssdk.core.checksums.ResponseChecksumValidation;
import software.amazon.awssdk.services.s3.S3Client;

class DemoClass {
    public static void main(String[] args) {


 System.setProperty(SdkSystemSetting.AWS_REQUEST_CHECKSUM_CALCULATION.property(), //
 Resolves to "aws.requestChecksumCalculation".
               "WHEN_REQUIRED");

 System.setProperty(SdkSystemSetting.AWS_RESPONSE_CHECKSUM_VALIDATION.property(), //
 Resolves to "aws.responseChecksumValidation".
               "WHEN_REQUIRED");

        S3Client s3Client = S3Client.builder().build();

        // Use s3Client.
    }
}
```

- Ámbito de cliente de servicio individual de S3: puede configurar un cliente de servicio individual de S3 para calcular la cantidad mínima de sumas de comprobación mediante métodos de creación:

```
import software.amazon.awssdk.core.checksums.RequestChecksumCalculation;
import software.amazon.awssdk.services.s3.S3Client;

public class RequiredChecksums {
    public static void main(String[] args) {
        S3Client s3 = S3Client.builder()
                .requestChecksumCalculation(RequestChecksumCalculation.WHEN_REQUIRED)
                .responseChecksumValidation(ResponseChecksumValidation.WHEN_REQUIRED)
                .build();

        // Use s3Client.
    }
// ...
}
```

Utilícela **`LegacyMd5Plugin`** para simplificar la compatibilidad MD5

Junto con el lanzamiento del comportamiento de las CRC32 sumas de verificación en la versión 2.30.0, el SDK dejó de calcular las MD5 sumas de verificación en las operaciones requeridas.

Si necesitas un comportamiento de MD5 suma de comprobación tradicional para las operaciones de S3, puedes usar el`LegacyMd5Plugin`, que se publicó con la versión 2.31.32 del SDK.

Esto `LegacyMd5Plugin` resulta especialmente útil cuando se necesita mantener la compatibilidad con aplicaciones que dependen del comportamiento anterior de las MD5 sumatorias de comprobación, especialmente cuando se trabaja con proveedores de almacenamiento de terceros compatibles con S3, como los que se utilizan con los conectores de sistemas de archivos S3A (Apache Spark, Iceberg).

Para usar el `LegacyMd5Plugin`, agréguelo al compilador de clientes de S3:

```
// For synchronous S3 client.
S3Client s3Client = S3Client.builder()
                            .addPlugin(LegacyMd5Plugin.create())
                            .build();

// For asynchronous S3 client.
S3AsyncClient asyncClient = S3AsyncClient.builder()
```

```
                                        .addPlugin(LegacyMd5Plugin.create())
                                        .build();
```

Si desea añadir sumas de MD5 comprobación a las operaciones que requieren sumas de comprobación y no quiere añadir las sumas de comprobación predeterminadas del SDK para las operaciones que admiten sumas de comprobación pero que no son obligatorias, puede activar las opciones y como. `ClientBuilder` `requestChecksumCalculation` `responseChecksumValidation` `WHEN_REQUIRED` De este modo se agregarán sumas de comprobación predeterminadas del SDK solo a las operaciones que requieran sumas de comprobación:

```
// Use the `LegacyMd5Plugin` with `requestChecksumCalculation` and
 `responseChecksumValidation` set to WHEN_REQUIRED.
S3AsyncClient asyncClient = S3AsyncClient.builder()
                                        .addPlugin(LegacyMd5Plugin.create())

 .requestChecksumCalculation(RequestChecksumCalculation.WHEN_REQUIRED)

 .responseChecksumValidation(ResponseChecksumValidation.WHEN_REQUIRED)
                                        .build();
```

Esta configuración resulta especialmente útil cuando se trabaja con sistemas de almacenamiento de terceros compatibles con S3 que pueden no ser totalmente compatibles con los algoritmos de suma de comprobación más recientes, pero que aun así requieren sumas de comprobación para determinadas operaciones. MD5

Utilice un cliente S3 de alto rendimiento: cliente S3 basado en AWS CRT

El cliente S3 AWS basado en CRT, creado sobre el AWS Common Runtime (CRT), es un cliente asíncrono S3 alternativo. Transfiere objetos hacia y desde Amazon Simple Storage Service (Amazon S3) con un rendimiento y una fiabilidad mejorados mediante el uso automático de la API de carga multiparte de Amazon S3 y de las recuperaciones por rango de bytes.

El cliente S3 AWS basado en CRT mejora la fiabilidad de la transferencia en caso de que se produzca un fallo en la red. La fiabilidad se mejora reintentando partes individuales fallidas de una transferencia de archivos sin reiniciar la transferencia desde el principio.

Además, el cliente S3 AWS basado en CRT ofrece una mejor agrupación de conexiones y un equilibrio de carga del sistema de nombres de dominio (DNS) mejorados, lo que también mejora el rendimiento.

Puede utilizar el cliente S3 AWS basado en CRT en lugar del cliente asíncrono S3 estándar del SDK y aprovechar su rendimiento mejorado de forma inmediata.

> **Important**
>
> El cliente S3 AWS basado en CRT actualmente no admite la recopilación de métricas del SDK a nivel de cliente ni a nivel de solicitud.

AWS Componentes basados en CRT en el SDK

El cliente S3 AWS basado en CRT, que se describe en este tema, y el cliente HTTP AWS basado en CRT son componentes diferentes del SDK.

El cliente S3 AWS basado en CRT es una implementación de la AsyncClient interfaz S3 y se utiliza para trabajar con el servicio Amazon S3. Es una alternativa a la implementación de la interfaz `S3AsyncClient` basada en Java y ofrece varias ventajas.

El cliente HTTP AWS basado en CRT es una implementación de la SdkAsyncHttpClientinterfaz y se utiliza para la comunicación HTTP general. Es una alternativa a la implementación Netty de la interfaz `SdkAsyncHttpClient` basada en Java y ofrece varias ventajas.

Si bien ambos componentes utilizan bibliotecas del AWS Common Runtime, el cliente S3 AWS basado en CRT utiliza la biblioteca aws-c-s 3 y admite las funciones de la API de carga multiparte de S3. Como el cliente HTTP AWS basado en CRT está diseñado para un uso general, no admite las funciones de la API de carga multiparte de S3.

Agregue dependencias para usar el cliente S3 basado en CRT AWS

Para usar el cliente S3 AWS basado en CRT, añada las dos dependencias siguientes al archivo de proyecto de Maven. En el ejemplo siguiente se muestran las versiones mínimas que se utilizarán. Busque en el repositorio central de Maven las versiones más recientes de los artefactos s3 y aws-crt.

```
<dependency>
  <groupId>software.amazon.awssdk</groupId>
  <artifactId>s3</artifactId>
  <version>2.27.21</version>
</dependency>
<dependency>
  <groupId>software.amazon.awssdk.crt</groupId>
```

```
  <artifactId>aws-crt</artifactId>
  <version>0.30.11</version>
</dependency>
```

Cree una instancia del cliente S3 basado en CRT AWS

Cree una instancia del cliente S3 AWS basado en CRT con la configuración predeterminada, como se muestra en el siguiente fragmento de código.

```
S3AsyncClient s3AsyncClient = S3AsyncClient.crtCreate();
```

Para configurar el cliente, utilice el generador de clientes CRT. AWS Puede cambiar del cliente asíncrono S3 estándar al cliente AWS basado en CRT cambiando el método de creación.

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3AsyncClient;


S3AsyncClient s3AsyncClient =
        S3AsyncClient.crtBuilder()
                     .credentialsProvider(DefaultCredentialsProvider.create())
                     .region(Region.US_WEST_2)
                     .targetThroughputInGbps(20.0)
                     .minimumPartSizeInBytes(8 * 1025 * 1024L)
                     .build();
```

> **Note**
>
> Es posible que algunas de las configuraciones del generador estándar no sean compatibles actualmente con el generador de clientes AWS CRT. Obtener el constructor estándar llamando a `S3AsyncClient#builder()`.

Utilice el cliente S3 basado en CRT AWS

Utilice el cliente S3 AWS basado en CRT para llamar a las operaciones de la API de Amazon S3. En el siguiente ejemplo, se muestran las GetObjectoperaciones PutObjecty disponibles a través de. AWS SDK para Java

```
import software.amazon.awssdk.core.async.AsyncRequestBody;
import software.amazon.awssdk.core.async.AsyncResponseTransformer;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.model.GetObjectResponse;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;


S3AsyncClient s3Client = S3AsyncClient.crtCreate();

// Upload a local file to Amazon S3.
PutObjectResponse putObjectResponse =
      s3Client.putObject(req -> req.bucket(<BUCKET_NAME>)
                                   .key(<KEY_NAME>),
                        AsyncRequestBody.fromFile(Paths.get(<FILE_NAME>)))
              .join();

// Download an object from Amazon S3 to a local file.
GetObjectResponse getObjectResponse =
      s3Client.getObject(req -> req.bucket(<BUCKET_NAME>)
                                   .key(<KEY_NAME>),
                        AsyncResponseTransformer.toFile(Paths.get(<FILE_NAME>)))
              .join();
```

Carga de flujos de tamaño desconocido

Una ventaja importante del cliente S3 AWS AWS basado en CRT es su capacidad para gestionar flujos de entrada de tamaño desconocido de manera eficiente. Esto resulta especialmente útil cuando se deben cargar datos desde una fuente en la que el tamaño total no se puede determinar de antemano.

```
public PutObjectResponse crtClient_stream_unknown_size(String bucketName, String key,
 InputStream inputStream) {

    S3AsyncClient s3AsyncClient = S3AsyncClient.crtCreate();
    ExecutorService executor = Executors.newSingleThreadExecutor();
    AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
 executor);  // 'null' indicates that the

     // content length is unknown.
    CompletableFuture<PutObjectResponse> responseFuture =
            s3AsyncClient.putObject(r -> r.bucket(bucketName).key(key), body)
```

```
                    .exceptionally(e -> {
                        if (e != null){
                            logger.error(e.getMessage(), e);
                        }
                        return null;
                    });

        PutObjectResponse response = responseFuture.join(); // Wait for the response.
        executor.shutdown();
        return response;
    }
```

Esta capacidad ayuda a evitar problemas comunes de las cargas tradicionales, en los que una especificación incorrecta de la longitud del contenido puede provocar que los objetos se trunquen o fallen las cargas.

Limitaciones de la configuración

El cliente S3 AWS basado en CRT y el cliente asíncrono S3 basado en Java ofrecen funciones comparables, mientras que el cliente S3 basado en CRT ofrece una ventaja de AWS rendimiento. Sin embargo, el cliente S3 basado en AWS CRT carece de los ajustes de configuración que tiene el cliente asíncrono S3 basado en Java. Esta configuración incluye:

- Configuración de nivel de cliente: tiempo de espera de intentos de llamada a la API, interceptores de ejecución de compresión, publicadores de métricas, atributos de ejecución personalizados, opciones avanzadas personalizadas, servicio de ejecutor programado personalizado, encabezados personalizados
- Configuración de nivel de solicitud: firmantes personalizados, proveedores de credenciales, tiempo de espera de intentos de llamada a la API

Para obtener una lista completa de las diferencias de configuración, consulte la referencia de la API.

Cliente asincrónico de S3 basado en Java	AWS Cliente S3 basado en CRT
Configuraciones de nivel de cliente • ClientOverrideConfiguration.Builder	Configuraciones de nivel de cliente • S3CrtAsyncClientBuilder
Configuraciones de nivel de solicitud	Configuraciones sin nivel de solicitud

Cliente asincrónico de S3 basado en Java	AWS Cliente S3 basado en CRT
• RequestOverrideConfiguration.Constructor • AwsRequestOverrideConfiguration.Constructor	

Configuración del cliente asincrónico S3 basado en Java para usar transferencias paralelas

Desde la versión 2.27.5, el cliente asincrónico estándar de S3 basado en Java admite transferencias paralelas automáticas (cargas y descargas multiparte). La compatibilidad con las transferencias paralelas se configura al crear el cliente asincrónico de S3 basado en Java.

En esta sección se muestra cómo habilitar las transferencias paralelas y cómo personalizar la configuración.

Cree una instancia de **`S3AsyncClient`**

Cuando se crea una instancia de `S3AsyncClient` sin llamar a ninguno de los métodos `multipart*` en el generador, no se habilitan las transferencias paralelas. Cada una de las siguientes instrucciones crea un cliente asincrónico de S3 basado en Java sin compatibilidad con cargas y descargas multiparte.

Creación sin compatibilidad multiparte

Example

```
import software.amazon.awssdk.auth.credentials.ProcessCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3AsyncClient;


S3AsyncClient s3Client = S3AsyncClient.create();

S3AsyncClient s3Client2 = S3AsyncClient.builder().build();

S3AsyncClient s3Client3 = S3AsyncClient.builder()
        .credentialsProvider(ProcessCredentialsProvider.builder().build())
        .region(Region.EU_NORTH_1)
```

```
        .build();
```

Creación con compatibilidad multiparte

Para habilitar transferencias paralelas con configuración predeterminada, llame al `multipartEnabled` en el generador y pase `true` como se muestra en el siguiente ejemplo.

Example

```
S3AsyncClient s3AsyncClient2 = S3AsyncClient.builder()
        .multipartEnabled(true)
        .build();
```

El valor predeterminado es 8 MiB para la configuración de `thresholdInBytes` y `minimumPartSizeInBytes`.

Si personaliza la configuración multiparte, las transferencias paralelas se habilitan automáticamente, como se muestra a continuación.

Example

```
import software.amazon.awssdk.services.s3.S3AsyncClient;
import static software.amazon.awssdk.transfer.s3.SizeConstant.MB;


S3AsyncClient s3AsyncClient2 = S3AsyncClient.builder()
        .multipartConfiguration(b -> b
                .thresholdInBytes(16 * MB)
                .minimumPartSizeInBytes(10 * MB))
        .build();
```

Carga de flujos de tamaño desconocido

El cliente asincrónico de S3 basado en Java con multiparte habilitada puede controlar eficientemente flujos de entrada cuando el tamaño total no se conozca de antemano:

```
public PutObjectResponse asyncClient_multipart_stream_unknown_size(String bucketName,
 String key, InputStream inputStream) {

    S3AsyncClient s3AsyncClient =
 S3AsyncClient.builder().multipartEnabled(true).build();
```

```
    ExecutorService executor = Executors.newSingleThreadExecutor();
    AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
 executor); // 'null' indicates that the

    // content length is unknown.
    CompletableFuture<PutObjectResponse> responseFuture =
            s3AsyncClient.putObject(r -> r.bucket(bucketName).key(key), body)
                    .exceptionally(e -> {
                        if (e != null) {
                            logger.error(e.getMessage(), e);
                        }
                        return null;
                    });

    PutObjectResponse response = responseFuture.join(); // Wait for the response.
    executor.shutdown();
    return response;
}
```

Este método evita los problemas que pueden surgir al especificar manualmente una longitud de contenido incorrecta, como objetos truncados o cargas fallidas.

Transferir archivos y directorios con Amazon S3 Transfer Manager

Amazon S3 Transfer Manager es una utilidad de transferencia de archivos de alto nivel y de código abierto para el AWS SDK for Java 2.x. Úselo para transferir archivos y directorios desde y hacia Amazon Simple Storage Service (Amazon S3).

Cuando crea sobre el cliente de S3 basado en CRT de AWS o el cliente asincrónico de S3 basado en Java estándar con multiparte habilitada, S3 Transfer Manager puede aprovechar mejoras del rendimiento, como la API de carga multiparte y las recuperaciones de rango de byte.

Con el S3 Transfer Manager, también puede supervisar el progreso de una transferencia en tiempo real y pausarla para su posterior ejecución.

Introducción

Añadir dependencias a su archivo de compilación

Para utilizar el S3 Transfer Manager con rendimiento multiparte mejorado, configure el archivo de compilación con las dependencias necesarias.

Use the AWS CRT-based S3 client

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.27.21[1]</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>s3-transfer-manager</artifactId>
    </dependency>
    <dependency>
        <groupId>software.amazon.awssdk.crt</groupId>
        <artifactId>aws-crt</artifactId>
        <version>0.29.143[2]</version>
    </dependency>
</dependencies>
```

[1] Última versión. [2] Última versión.

Use the Java-based S3 async client

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.27.21[1]</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>s3-transfer-manager</artifactId>
```

```
    </dependency>
</dependencies>
```

[1] Última versión.

Crear una instancia del S3 Transfer Manager

Para habilitar la transferencia paralela, debe pasar un cliente S3 basado en AWS CRT O un cliente asíncrono S3 basado en Java con la función multiparte habilitada. El ejemplo siguiente muestra cómo configurar un S3 Transfer Manager con ajustes personalizados.

Use the AWS CRT-based S3 client

```
        S3AsyncClient s3AsyncClient = S3AsyncClient.crtBuilder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .targetThroughputInGbps(20.0)
                .minimumPartSizeInBytes(8 * MB)
                .build();

        S3TransferManager transferManager = S3TransferManager.builder()
                .s3Client(s3AsyncClient)
                .build();
```

Use the Java-based S3 async client

Si la dependencia `aws-crt` no está incluida en el archivo de compilación, S3 Transfer Manager se crea sobre el cliente asincrónico de S3 estándar que se utiliza en el SDK para Java 2.x.

Configuración personalizada del cliente de S3: requiere multiparte habilitada

```
        S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
                .multipartEnabled(true)
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        S3TransferManager transferManager = S3TransferManager.builder()
                .s3Client(s3AsyncClient)
                .build();
```

Sin configuración del cliente de S3: compatibilidad multiparte habilitada automáticamente

```
S3TransferManager transferManager = S3TransferManager.create();
```

Cargar un archivo en un bucket de S3

El siguiente ejemplo muestra un ejemplo de carga de archivos junto con el uso opcional de a LoggingTransferListener, que registra el progreso de la carga.

Para cargar un archivo en Amazon S3 mediante el S3 Transfer Manager, pase un objeto `UploadFileRequest` al método uploadFile del `S3TransferManager`.

El FileUploadobjeto devuelto por el `uploadFile` método representa el proceso de carga. Una vez finalizada la solicitud, el CompletedFileUploadobjeto contiene información sobre la carga.

```
   public void trackUploadFile(S3TransferManager transferManager, String bucketName,
                               String key, URI filePathURI) {
       UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
               .putObjectRequest(b -> b.bucket(bucketName).key(key))
               .addTransferListener(LoggingTransferListener.create())  // Add
listener.
               .source(Paths.get(filePathURI))
               .build();

       FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);

       fileUpload.completionFuture().join();
       /*
           The SDK provides a LoggingTransferListener implementation of the
TransferListener interface.
           You can also implement the interface to provide your own logic.

           Configure log4J2 with settings such as the following.
               <Configuration status="WARN">
                   <Appenders>
                       <Console name="AlignedConsoleAppender" target="SYSTEM_OUT">
                           <PatternLayout pattern="%m%n"/>
                       </Console>
                   </Appenders>

                   <Loggers>
                       <logger
name="software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener"
level="INFO" additivity="false">
```

```
                        <AppenderRef ref="AlignedConsoleAppender"/>
                    </logger>
                </Loggers>
            </Configuration>

        Log4J2 logs the progress. The following is example output for a 21.3 MB
file upload.
            Transfer initiated...
            |                    | 0.0%
            |====                | 21.1%
            |============        | 60.5%
            |====================| 100.0%
            Transfer complete!
       */
   }
```

Importaciones

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedFileUpload;
import software.amazon.awssdk.transfer.s3.model.FileUpload;
import software.amazon.awssdk.transfer.s3.model.UploadFileRequest;
import software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener;
import java.net.URI;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Paths;
import java.util.UUID;
```

Descargar un archivo de un bucket de S3

El siguiente ejemplo muestra un ejemplo de descarga junto con el uso opcional de un LoggingTransferListener, que registra el progreso de la descarga.

Para descargar un objeto de un bucket de S3 mediante el administrador de transferencias de S3, cree un DownloadFileRequestobjeto y páselo al método downloadFile.

El FileDownloadobjeto devuelto por el `downloadFile` método `S3TransferManager`'s representa la transferencia de archivos. Una vez completada la descarga, CompletedFileDownloadcontiene el acceso a la información sobre la descarga.

```
   public void trackDownloadFile(S3TransferManager transferManager, String bucketName,
                            String key, String downloadedFileWithPath) {
       DownloadFileRequest downloadFileRequest = DownloadFileRequest.builder()
               .getObjectRequest(b -> b.bucket(bucketName).key(key))
               .addTransferListener(LoggingTransferListener.create())  // Add
listener.
               .destination(Paths.get(downloadedFileWithPath))
               .build();

       FileDownload downloadFile = transferManager.downloadFile(downloadFileRequest);

       CompletedFileDownload downloadResult = downloadFile.completionFuture().join();
       /*
           The SDK provides a LoggingTransferListener implementation of the
TransferListener interface.
           You can also implement the interface to provide your own logic.

           Configure log4J2 with settings such as the following.
               <Configuration status="WARN">
                   <Appenders>
                       <Console name="AlignedConsoleAppender" target="SYSTEM_OUT">
                           <PatternLayout pattern="%m%n"/>
                       </Console>
                   </Appenders>

                   <Loggers>
                       <logger
name="software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener"
level="INFO" additivity="false">
                           <AppenderRef ref="AlignedConsoleAppender"/>
                       </logger>
                   </Loggers>
               </Configuration>

           Log4J2 logs the progress. The following is example output for a 21.3 MB
file download.
               Transfer initiated...
               |=======             | 39.4%
               |===============     | 78.8%
               |====================| 100.0%
               Transfer complete!
       */
   }
```

Importaciones

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedFileDownload;
import software.amazon.awssdk.transfer.s3.model.DownloadFileRequest;
import software.amazon.awssdk.transfer.s3.model.FileDownload;
import software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener;

import java.io.IOException;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Files;
import java.nio.file.NoSuchFileException;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.util.UUID;
```

Copiar un objeto de Amazon S3 a otro bucket

En el siguiente ejemplo se muestra cómo copiar un objeto con S3 Transfer Manager.

Para empezar a copiar un objeto de un bucket de S3 a otro bucket, cree una CopyObjectRequestinstancia básica.

A continuación, incluya la básica `CopyObjectRequest` en una CopyRequestque pueda utilizar el S3 Transfer Manager.

El objeto `Copy` devuelto por el método `copy` de `S3TransferManager` representa el proceso de copia. Una vez finalizado el proceso de copia, el CompletedCopyobjeto contiene detalles sobre la respuesta.

```
    public String copyObject(S3TransferManager transferManager, String bucketName,
            String key, String destinationBucket, String destinationKey) {
        CopyObjectRequest copyObjectRequest = CopyObjectRequest.builder()
                .sourceBucket(bucketName)
                .sourceKey(key)
                .destinationBucket(destinationBucket)
```

```
                .destinationKey(destinationKey)
                .build();

        CopyRequest copyRequest = CopyRequest.builder()
                .copyObjectRequest(copyObjectRequest)
                .build();

        Copy copy = transferManager.copy(copyRequest);

        CompletedCopy completedCopy = copy.completionFuture().join();
        return completedCopy.response().copyObjectResult().eTag();
    }
```

> **Note**
>
> Para realizar una copia entre regiones con el administrador de transferencias de S3, habilítelo `crossRegionAccessEnabled` en el generador de clientes S3 AWS basado en CRT, tal y como se muestra en el siguiente fragmento.
>
> ```
> S3AsyncClient s3AsyncClient = S3AsyncClient.crtBuilder()
>                 .crossRegionAccessEnabled(true)
>                 .build();
>
> S3TransferManager transferManager = S3TransferManager.builder()
>                 .s3Client(s3AsyncClient)
>                 .build();
> ```

Importaciones

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.model.CopyObjectRequest;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedCopy;
import software.amazon.awssdk.transfer.s3.model.Copy;
import software.amazon.awssdk.transfer.s3.model.CopyRequest;

import java.util.UUID;
```

Cargar un directorio local en un bucket de S3

En el siguiente ejemplo se muestra cómo se puede cargar un directorio local en S3.

Comience por llamar al método UploadDirectory de la instancia e introduzca un. `S3TransferManager` UploadDirectoryRequest

El DirectoryUploadobjeto representa el proceso de carga, que genera un CompletedDirectoryUploadcuando se completa la solicitud. El objeto `CompleteDirectoryUpload` contiene información sobre los resultados de la transferencia, incluidos los archivos que no se pudieron transferir.

```
    public Integer uploadDirectory(S3TransferManager transferManager,
            URI sourceDirectory, String bucketName) {
        DirectoryUpload directoryUpload =
transferManager.uploadDirectory(UploadDirectoryRequest.builder()
                .source(Paths.get(sourceDirectory))
                .bucket(bucketName)
                .build());

        CompletedDirectoryUpload completedDirectoryUpload =
directoryUpload.completionFuture().join();
        completedDirectoryUpload.failedTransfers()
                .forEach(fail -> logger.warn("Object [{}] failed to transfer",
fail.toString()));
        return completedDirectoryUpload.failedTransfers().size();
    }
```

Importaciones

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedDirectoryUpload;
import software.amazon.awssdk.transfer.s3.model.DirectoryUpload;
import software.amazon.awssdk.transfer.s3.model.UploadDirectoryRequest;

import java.net.URI;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Paths;
```

```
import java.util.UUID;
```

Descargar objetos de bucket S3 en un directorio local

Puede descargar los objetos de un bucket S3 en un directorio local tal y como se muestra en el siguiente ejemplo.

Para descargar los objetos de un bucket de S3 a un directorio local, comience por llamar al método downloadDirectory del Transfer Manager e introduzca un DownloadDirectoryRequest.

El DirectoryDownloadobjeto representa el proceso de descarga, que genera un CompletedDirectoryDownloadcuando se completa la solicitud. El objeto `CompleteDirectoryDownload` contiene información sobre los resultados de la transferencia, incluidos los archivos que no se pudieron transferir.

```
    public Integer downloadObjectsToDirectory(S3TransferManager transferManager,
            URI destinationPathURI, String bucketName) {
        DirectoryDownload directoryDownload =
transferManager.downloadDirectory(DownloadDirectoryRequest.builder()
                .destination(Paths.get(destinationPathURI))
                .bucket(bucketName)
                .build());
        CompletedDirectoryDownload completedDirectoryDownload =
directoryDownload.completionFuture().join();

        completedDirectoryDownload.failedTransfers()
                .forEach(fail -> logger.warn("Object [{}] failed to transfer",
fail.toString()));
        return completedDirectoryDownload.failedTransfers().size();
    }
```

Importaciones

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedDirectoryDownload;
import software.amazon.awssdk.transfer.s3.model.DirectoryDownload;
import software.amazon.awssdk.transfer.s3.model.DownloadDirectoryRequest;
import java.io.IOException;
```

```
import java.net.URI;
import java.net.URISyntaxException;
import java.nio.file.Files;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.util.HashSet;
import java.util.Set;
import java.util.UUID;
import java.util.stream.Collectors;
```

Vea ejemplos completos

GitHub contiene el código completo de todos los ejemplos de esta página.

Uso de notificaciones de eventos de S3

Para ayudarle a monitorizar la actividad de sus buckets, Amazon S3 puede enviar notificaciones cuando se produzcan determinados eventos. La Guía del usuario de Amazon S3 proporciona información sobre las notificaciones que puede enviar un bucket.

Puede configurar un bucket para enviar eventos a cuatro destinos posibles mediante el SDK para Java:

- Temas de Amazon Simple Notification Service
- Colas de Amazon Simple Queue Service
- AWS Lambda funciones
- Amazon EventBridge

Cuando configuras un depósito al que enviar eventos EventBridge, tienes la posibilidad de configurar una EventBridge regla para distribuir el mismo evento a varios destinos. Al configurar el bucket para que se envíe directamente a uno de los tres primeros destinos, solo se puede especificar un tipo de destino para cada evento.

En la siguiente sección, verá cómo configurar un bucket mediante el SDK para Java para enviar notificaciones de eventos de S3 de dos maneras: directamente a una cola de Amazon SQS y a. EventBridge

En la última sección se muestra cómo utilizar la API Notificaciones de eventos de S3 para trabajar con notificaciones de una forma orientada a objetos.

Configuración de un bucket para enviarlo directamente a un destino

En el siguiente ejemplo se configura un bucket para enviar notificaciones cuando se produzcan eventos de creación de objetos o de etiquetado de objetos en un bucket.

```
static void processS3Events(String bucketName, String queueArn) {
    // Configure the bucket to send Object Created and Object Tagging notifications to
 an existing SQS queue.
    s3Client.putBucketNotificationConfiguration(b -> b
            .notificationConfiguration(ncb -> ncb
                    .queueConfigurations(qcb -> qcb
                            .events(Event.S3_OBJECT_CREATED, Event.S3_OBJECT_TAGGING)
                            .queueArn(queueArn)))
                    .bucket(bucketName)
    );
}
```

El código mostrado configura una cola para recibir dos tipos de eventos. Convenientemente, el método `queueConfigurations` permite configurar varios destinos de cola si es necesario. Además, en el método `notificationConfiguration` puede establecer destinos adicionales, como uno o más temas de Amazon SNS o una o más funciones de Lambda. El siguiente fragmento muestra un ejemplo con dos colas y tres tipos de destinos.

```
s3Client.putBucketNotificationConfiguration(b -> b
                .notificationConfiguration(ncb -> ncb
                        .queueConfigurations(qcb -> qcb
                                .events(Event.S3_OBJECT_CREATED,
 Event.S3_OBJECT_TAGGING)
                                .queueArn(queueArn),
                                qcb2 -> qcb2.<...>)
                        .topicConfigurations(tcb -> tcb.<...>)
                        .lambdaFunctionConfigurations(lfcb -> lfcb.<...>))
                        .bucket(bucketName)
        );
```

El GitHub repositorio de ejemplos de código contiene el ejemplo completo para enviar notificaciones de eventos de S3 directamente a una cola.

Configure un bucket al que enviar EventBridge

En el siguiente ejemplo, se configura un depósito al que enviar EventBridge notificaciones.

```
public static String setBucketNotificationToEventBridge(String bucketName) {
    // Enable bucket to emit S3 Event notifications to EventBridge.
    s3Client.putBucketNotificationConfiguration(b -> b
            .bucket(bucketName)
            .notificationConfiguration(b1 -> b1
                    .eventBridgeConfiguration(SdkBuilder::build))
    .build());
```

Al configurar un depósito al que enviar eventos EventBridge, solo tiene que indicar el EventBridge destino, no los tipos de eventos ni el destino final al que EventBridge se enviarán. Los objetivos y los tipos de eventos finales se configuran mediante el EventBridge cliente del SDK de Java.

En el siguiente código se muestra cómo configurar EventBridge para distribuir los eventos creados por objetos en un tema y una cola.

```
   public static String configureEventBridge(String topicArn, String queueArn) {
        try {
            // Create an EventBridge rule to route Object Created notifications.
            PutRuleRequest putRuleRequest = PutRuleRequest.builder()
                    .name(RULE_NAME)
                    .eventPattern("""
                            {
                              "source": ["aws.s3"],
                              "detail-type": ["Object Created"],
                              "detail": {
                                "bucket": {
                                  "name": ["%s"]
                                }
                              }
                            }
                            """.formatted(bucketName))
                    .build();

            // Add the rule to the default event bus.
            PutRuleResponse putRuleResponse = eventBridgeClient.putRule(putRuleRequest)
                    .whenComplete((r, t) -> {
                        if (t != null) {
                            logger.error("Error creating event bus rule: " +
 t.getMessage(), t);
                            throw new RuntimeException(t.getCause().getMessage(), t);
                        }
```

```
                        logger.info("Event bus rule creation request sent successfully.
ARN is: {}", r.ruleArn());
                    }).join();

            // Add the existing SNS topic and SQS queue as targets to the rule.
            eventBridgeClient.putTargets(b -> b
                    .eventBusName("default")
                    .rule(RULE_NAME)
                    .targets(List.of (
                            Target.builder()
                                    .arn(queueArn)
                                    .id("Queue")
                                    .build(),
                            Target.builder()
                                    .arn(topicArn)
                                    .id("Topic")
                                    .build())
                            )
                    ).join();
            return putRuleResponse.ruleArn();
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }
```

Para trabajar con él EventBridge en tu código Java, añade una dependencia del `eventbridge` artefacto a tu archivo `pom.xml` Maven.

```
<dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>eventbridge</artifactId>
</dependency>
```

El GitHub repositorio de ejemplos de código contiene el ejemplo completo para enviar notificaciones de eventos de S3 a, EventBridge y luego, a un tema y una cola.

Uso de la API Notificaciones de eventos de S3 para procesar eventos

Una vez que un destino recibe eventos de notificación de S3, puede procesarlos de forma orientada a objetos mediante la API Notificaciones de eventos de S3. Puedes usar la API de notificaciones

de eventos de S3 para trabajar con las notificaciones de eventos que se envían directamente a un destino (como se muestra en el primer ejemplo), pero no con las notificaciones que se envían directamente. EventBridge Las notificaciones de eventos de S3 se envían mediante buckets para EventBridge contener una estructura diferente que la API de notificaciones de eventos de S3 no gestiona actualmente.

Adición de dependencia

La API Notificaciones de eventos de S3 se publicó con la versión 2.25.11 del SDK para Java 2.x.

Para usar la API Notificaciones de eventos de S3, agregue el elemento de dependencia necesario al `pom.xml` de Maven, como se muestra en el siguiente fragmento.

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.X.X[1]</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>s3-event-notifications</artifactId>
    </dependency>
</dependencies>
```

[1] Última versión.

Uso de la clase **`S3EventNotification`**

Creación de una instancia de **`S3EventNotification`** a partir de una cadena JSON

Para convertir una cadena JSON en un objeto `S3EventNotification`, use los métodos estáticos de la clase `S3EventNotification`, como se muestra en el siguiente ejemplo.

```
import software.amazon.awssdk.eventnotifications.s3.model.S3EventNotification
import software.amazon.awssdk.eventnotifications.s3.model.S3EventNotificationRecord
```

```
import software.amazon.awssdk.services.sqs.model.Message;

public class S3EventNotificationExample {
    ...

    void receiveMessage(Message message) {
       // Message received from SQSClient.
       String sqsEventBody = message.body();
       S3EventNotification s3EventNotification =
 S3EventNotification.fromJson(sqsEventBody);

       // Use getRecords() to access all the records in the notification.


       List<S3EventNotificationRecord> records = s3EventNotification.getRecords();

        S3EventNotificationRecord record = records.stream().findFirst();
        // Use getters on the record to access individual attributes.
        String awsRegion = record.getAwsRegion();
        String eventName = record.getEventName();
        String eventSource = record.getEventSource();

    }
}
```

En este ejemplo, el método `fromJson` convierte la cadena JSON en un objeto `S3EventNotification`. La falta de campos en la cadena JSON generará valores de `null` en los campos de objetos de Java correspondientes y se ignorará cualquier campo adicional del JSON.

Puedes encontrar otras opciones APIs para un registro de notificaciones de eventos en la referencia de la API. `S3EventNotificationRecord`

Conversión de una instancia de **`S3EventNotification`** en una cadena JSON

Utilice el método `toJson` (o `toJsonPretty`) para convertir un objeto `S3EventNotification` en una cadena JSON, como se muestra en el siguiente ejemplo.

```
import software.amazon.awssdk.eventnotifications.s3.model.S3EventNotification

public class S3EventNotificationExample {
    ...

    void toJsonString(S3EventNotification event) {
```

```
        String json = event.toJson();
        String jsonPretty = event.toJsonPretty();

        System.out.println("JSON: " + json);
        System.out.println("Pretty JSON: " + jsonPretty);
    }
}
```

Los campos para `GlacierEventData`, `ReplicationEventData`, `IntelligentTieringEventData` y `LifecycleEventData` se excluyen del JSON si son `null`. Los demás campos `null` se serializarán como `null`.

A continuación, se muestra un ejemplo de la salida del método `toJsonPretty` para un evento de etiquetado de objetos de S3.

```
{
  "Records" : [ {
    "eventVersion" : "2.3",
    "eventSource" : "aws:s3",
    "awsRegion" : "us-east-1",
    "eventTime" : "2024-07-19T20:09:18.551Z",
    "eventName" : "ObjectTagging:Put",
    "userIdentity" : {
      "principalId" : "AWS:XXXXXXXXXXX"
    },
    "requestParameters" : {
      "sourceIPAddress" : "XXX.XX.XX.XX"
    },
    "responseElements" : {
      "x-amz-request-id" : "XXXXXXXXXXXX",
      "x-amz-id-2" : "XXXXXXXXXXXXX"
    },
    "s3" : {
      "s3SchemaVersion" : "1.0",
      "configurationId" : "XXXXXXXXXXXXX",
      "bucket" : {
        "name" : "amzn-s3-demo-bucket",
        "ownerIdentity" : {
          "principalId" : "XXXXXXXXXXX"
        },
        "arn" : "arn:aws:s3:::XXXXXXXXXX"
      },
```

```
      "object" : {
        "key" : "akey",
        "size" : null,
        "eTag" : "XXXXXXXXXX",
        "versionId" : null,
        "sequencer" : null
      }
    }
  } ]
}
```

Hay disponible un ejemplo completo en el GitHub que se muestra cómo utilizar la API para trabajar con las notificaciones recibidas por una cola de Amazon SQS.

Procese eventos de S3 en Lambda con bibliotecas Java: y AWS SDK for Java 2.x **`aws-lambda-java-events`**

En lugar de usar el SDK para Java 2.x para procesar las notificaciones de eventos de Amazon S3 en una función Lambda, puede usar `aws-lambda-java-events` la biblioteca de la versión 3.x.x. AWS mantiene la `aws-lambda-java-events` biblioteca de forma independiente y tiene sus propios requisitos de dependencia. La biblioteca de `aws-lambda-java-events` solo funciona con eventos de S3 en funciones de Lambda, mientras que el SDK para Java 2.x funciona con eventos de S3 en funciones de Lambda, Amazon SNS y Amazon SQS.

Ambos enfoques modelan la carga útil de notificación de eventos de JSON de una manera orientada a objetos con similares. APIs En la tabla siguiente se muestran las notables diferencias entre el uso de los dos métodos.

	AWS SDK para Java	aws-lambda-java-events biblioteca
Nomenclatura del paquete	`software.amazon.awssdk.eventnotifications.s3.model.S3EventNotification`	`com.amazonaws.services.lambda.runtime.events.models.s3.S3EventNotification`
Parámetro `RequestHandler`	Escriba la implementación `RequestHandler` de la	Escriba la implementación `RequestHandler` de la

	AWS SDK para Java	aws-lambda-java-events biblioteca

	función de Lambda para recibir una cadena JSON:
	
	`import com.amazonaws.services.lambda.runtime.Context;`
	`import com.amazonaws.services.lambda.runtime.RequestHandler;`
	`import software.amazon.awssdk.eventnotifications.s3.model.S3EventNotification;`
	
	`public class Handler implements RequestHandler<String, String> {`
	
	`@Override`
	`public String handleRequest(String jsonS3Event, Context context) {`
	`S3EventNotification s3Event = S3EventNotification`
	
	`.fromJson(jsonS3Event);`
	`// Work with the s3Event object.`
	
	`...`
	`}`
	`}`
		función de Lambda para recibir un objeto `S3Event`:
		
		`import com.amazonaws.services.lambda.runtime.Context;`
		`import com.amazonaws.services.lambda.runtime.RequestHandler;`
		`import com.amazonaws.services.lambda.runtime.events.S3Event;`
		
		`public class Handler implements RequestHandler<S3Event, String> {`
		
		`@Override`
		`public String handleRequest(S3Event s3event, Context context) {`
		`// Work with the s3Event object.`
		
		`...`
		`}`
		`}`

	AWS SDK para Java	aws-lambda-java-events biblioteca
dependencias Maven	<dependencyManagement> <dependencies> <dependency> <groupId> software.amazon.aw ssdk</groupId> <artifact Id>bom</artifactId> <version> 2.X.X</version> <type>pom</ type> <scope>im port</scope> </dependency> </dependencies> </dependencyManageme nt> <dependencies> <dependency> <groupId> software.amazon.aw ssdk</groupId> <artifactId>s3- event-notifications</ artifactId> </dependency> <!-- Add other SDK dependencies that you need. --> </dependencies>	<dependencyManagement> <dependencies> <dependency> <groupId> software.amazon.aw ssdk</groupId> <artifact Id>bom</artifactId> <version> 2.X.X</version> <type>pom</ type> <scope>im port</scope> </dependency> </dependencies> </dependencyManageme nt> <dependencies> <!-- The following two dependencies are for the aws-lambda- java-events library. -- > <dependency> <groupId> com.amazonaws</gro upId> <artifact Id>aws-lambda-java- core</artifactId> <version> 1.2.3</version> </dependency> <dependency> <groupId> com.amazonaws</gro upId>

	AWS SDK para Java	aws-lambda-java-events biblioteca

```
        <artifact
Id>aws-lambda-java-
events</artifactId>
        <version>
3.15.0</version>
    </dependency>
    <!-- Add other SDK
 dependencies that you
 need. -->
</dependencies>
```

Trabajar con de Amazon Simple Notification Service

Con Amazon Simple Notification Service, puede enviar fácilmente mensajes de notificación push en tiempo real desde sus aplicaciones a los suscriptores a través de distintos canales de comunicación. En este tema se describe cómo ejecutar algunas de las funciones básicas de Amazon SNS.

Crear un tema

Un tema es una agrupación lógica de canales de comunicación que define a qué sistemas se envía un mensaje (por ejemplo, la difusión de un mensaje a AWS Lambda y un webhook HTTP). Se envían mensajes a Amazon SNS y, a continuación, se distribuyen a los canales definidos en el tema. Esto permite que los mensajes estén disponibles para los suscriptores.

Para crear un tema, primero cree un objeto CreateTopicRequest con el nombre del conjunto de temas utilizando el método `name()` en el creador. A continuación, envíe el objeto de solicitud a Amazon SNS mediante el método `createTopic()` de SnsClient. Puede capturar el resultado de esta solicitud como un objeto CreateTopicResponse, como se muestra en el siguiente fragmento de código.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.CreateTopicRequest;
import software.amazon.awssdk.services.sns.model.CreateTopicResponse;
```

```
import software.amazon.awssdk.services.sns.model.SnsException;
```

Código de

```
    public static String createSNSTopic(SnsClient snsClient, String topicName ) {

        CreateTopicResponse result = null;
        try {
            CreateTopicRequest request = CreateTopicRequest.builder()
                    .name(topicName)
                    .build();

            result = snsClient.createTopic(request);
            return result.topicArn();
        } catch (SnsException e) {

            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

Consulte el ejemplo completo en GitHub.

Enumerar sus temas de Amazon SNS

Para recuperar una lista de los temas de Amazon SNS existentes, cree un objeto ListTopicsRequest. A continuación, envíe el objeto de solicitud a Amazon SNS mediante el método `listTopics()` de `SnsClient`. Puede capturar el resultado de esta solicitud como un objeto ListTopicsResponse.

El siguiente fragmento de código imprime el código de estado HTTP de la solicitud y una lista de nombres de recursos de Amazon (ARN) para los temas de Amazon SNS.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.ListTopicsRequest;
import software.amazon.awssdk.services.sns.model.ListTopicsResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
```

Código de

```
    public static void listSNSTopics(SnsClient snsClient) {

        try {
            ListTopicsRequest request = ListTopicsRequest.builder()
                    .build();

            ListTopicsResponse result = snsClient.listTopics(request);
            System.out.println("Status was " + result.sdkHttpResponse().statusCode() +
"\n\nTopics\n\n" + result.topics());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Suscribir un punto de enlace a un tema

Después de crear un tema, puede configurar los canales de comunicación que serán los puntos de enlace de ese tema. Los mensajes se distribuyen a estos puntos de enlace una vez que Amazon SNS los recibe.

Para configurar un canal de comunicación como punto de enlace de un tema, suscriba ese punto de enlace al tema. Para empezar, cree un objeto SubscribeRequest. Especifique el canal de comunicación (por ejemplo, `lambda` o `email`) como `protocol()`. Establezca `endpoint()` en la ubicación de salida correspondiente (por ejemplo, el ARN de una función Lambda o una dirección de correo electrónico) y, a continuación, el ARN del tema al que desea suscribirse como `topicArn()`. Envíe el objeto de solicitud a Amazon SNS mediante el método `subscribe()` del `SnsClient`. Puede capturar el resultado de esta solicitud como un objeto SubscribeResponse.

El siguiente fragmento de código muestra cómo suscribir una dirección de correo electrónico a un tema.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
```

```
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;
```

Código de

```
    public static void subEmail(SnsClient snsClient, String topicArn, String email) {

        try {
            SubscribeRequest request = SubscribeRequest.builder()
                .protocol("email")
                .endpoint(email)
                .returnSubscriptionArn(true)
                .topicArn(topicArn)
                .build();

            SubscribeResponse result = snsClient.subscribe(request);
            System.out.println("Subscription ARN: " + result.subscriptionArn() + "\n\n
 Status is " + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Publicar un mensaje en un tema

Después de haber configurado un tema y uno o varios puntos de enlace para él, puede publicar un mensaje en el tema. Para empezar, cree un objeto PublishRequest. Especifique el `message()` que desea enviar y el ARN del tema (`topicArn()`) al que desea enviarlo. A continuación, envíe el objeto de solicitud a Amazon SNS mediante el método `publish()` de `SnsClient`. Puede capturar el resultado de esta solicitud como un objeto PublishResponse.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.PublishRequest;
import software.amazon.awssdk.services.sns.model.PublishResponse;
```

```
import software.amazon.awssdk.services.sns.model.SnsException;
```

Código de

```
    public static void pubTopic(SnsClient snsClient, String message, String topicArn) {

        try {
            PublishRequest request = PublishRequest.builder()
                .message(message)
                .topicArn(topicArn)
                .build();

            PublishResponse result = snsClient.publish(request);
            System.out.println(result.messageId() + " Message sent. Status is " +
result.sdkHttpResponse().statusCode());

         } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
         }
    }
```

Consulte el ejemplo completo en GitHub.

Cancelar la suscripción de un punto de enlace de un tema

Puede quitar los canales de comunicación configurados como puntos de enlace de un tema. Una vez hecho esto, el tema sigue existiendo y distribuye mensajes a cualquier otro punto de enlace configurado para ese tema.

Para quitar un canal de comunicación como punto de enlace de un tema, cancele la suscripción de dicho punto de enlace del tema. Para empezar, cree un objeto UnsubscribeRequest y establezca el ARN del tema del que desea cancelar la suscripción como `subscriptionArn()`. A continuación, envíe el objeto de solicitud a SNS mediante el método `unsubscribe()` de `SnsClient`. Puede capturar el resultado de esta solicitud como un objeto UnsubscribeResponse.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
```

```
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.UnsubscribeRequest;
import software.amazon.awssdk.services.sns.model.UnsubscribeResponse;
```

Código de

```
    public static void unSub(SnsClient snsClient, String subscriptionArn) {

        try {
            UnsubscribeRequest request = UnsubscribeRequest.builder()
                .subscriptionArn(subscriptionArn)
                .build();

            UnsubscribeResponse result = snsClient.unsubscribe(request);

            System.out.println("\n\nStatus was " +
 result.sdkHttpResponse().statusCode()
                + "\n\nSubscription was removed for " + request.subscriptionArn());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Eliminación de un tema

Para eliminar un tema de Amazon SNS, primero cree un objeto DeleteTopicRequest con el ARN del conjunto de temas como el método `topicArn()` en el creador. A continuación, envíe el objeto de solicitud a Amazon SNS mediante el método `deleteTopic()` de `SnsClient`. Puede capturar el resultado de esta solicitud como un objeto DeleteTopicResponse, como se muestra en el siguiente fragmento de código.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.DeleteTopicRequest;
import software.amazon.awssdk.services.sns.model.DeleteTopicResponse;
```

```
import software.amazon.awssdk.services.sns.model.SnsException;
```

Código de

```
    public static void deleteSNSTopic(SnsClient snsClient, String topicArn ) {

        try {
            DeleteTopicRequest request = DeleteTopicRequest.builder()
                .topicArn(topicArn)
                .build();

            DeleteTopicResponse result = snsClient.deleteTopic(request);
            System.out.println("\n\nStatus was " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Consulte el ejemplo completo en GitHub.

Para obtener más información, consulte Amazon Simple Notification Service Developer Guide.

Trabajar con de Amazon Simple Queue Service

En esta sección se proporcionan ejemplos de programación Amazon Simple Queue Service mediante AWS SDK para Java 2.x.

Los siguientes ejemplos incluyen únicamente el código necesario para demostrar cada técnica. El código de ejemplo completo está disponible en GitHub. Desde allí, puede descargar un único archivo de código fuente o clonar el repositorio localmente para obtener todos los ejemplos para compilarlos y ejecutarlos.

Temas

- Utilice el procesamiento automático por lotes de solicitudes para Amazon SQS con AWS SDK for Java 2.x
- Trabaje con colas de Amazon Simple Queue Service mensajes

- Enviar, recibir y eliminar Amazon Simple Queue Service mensajes

Utilice el procesamiento automático por lotes de solicitudes para Amazon SQS con AWS SDK for Java 2.x

La API Procesamiento automático de solicitudes por lotes para Amazon SQS es una biblioteca de alto nivel que proporciona una forma eficaz de procesar por lotes y almacenar en búfer las solicitudes de operaciones de SQS. Al utilizar la API de procesamiento por lotes, reduce el número de solicitudes a SQS, lo que mejora el rendimiento y minimiza los costos.

Dado que los métodos de la API por lotes coinciden con los métodos de `SqsAsyncClient` (`sendMessage`, `changeMessageVisibility`, `deleteMessage`, `receiveMessage`), puede utilizar la API por lotes como sustitución directa con cambios mínimos.

En este tema se ofrece información general sobre cómo configurar y trabajar con la API Procesamiento automático de solicitudes por lotes para Amazon SQS.

Requisitos previos

Debe usar la versión 2.28.0 o posterior del SDK para Java 2.x para tener acceso a la API de procesamiento por lotes. Su `pom.xml` de Maven debe contener al menos los siguientes elementos.

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.28.23[1]</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>sqs</artifactId>
    </dependency>
</dependencies>
```

[1] Última versión

Creación de un administrador de lotes

La SqsAsyncBatchManagerinterfaz implementa la API automática de procesamiento por lotes de solicitudes. Puede crear una instancia del administrador de dos formas.

Configuración predeterminada mediante **`SqsAsyncClient`**

La forma más sencilla de crear un administrador de lotes es llamar al método de `batchManager` fábrica en una SqsAsyncClientinstancia existente. Este método se muestra en el fragmento de código siguiente.

```
SqsAsyncClient asyncClient = SqsAsyncClient.create();
SqsAsyncBatchManager sqsAsyncBatchManager = asyncClient.batchManager();
```

Al usar este método, la instancia `SqsAsyncBatchManager` usa los valores predeterminados que se muestran en la tabla de la sección the section called “Opciones de configuración”. Además, la instancia `SqsAsyncBatchManager` usa el `ExecutorService` de la instancia de `SqsAsyncClient` desde la que se creó.

Configuración personalizada mediante **`SqsAsyncBatchManager.Builder`**

Para casos de uso más avanzados, puede personalizar el administrador de lotes mediante `SqsAsyncBatchManager.Builder`. Si usa este método para crear una instancia de `SqsAsyncBatchManager`, puede afinar el comportamiento del procesamiento por lotes. El siguiente fragmento de código ofrece un ejemplo de cómo utilizar el compilador para personalizar el comportamiento de procesamiento por lotes.

```
SqsAsyncBatchManager batchManager = SqsAsyncBatchManager.builder()
    .client(SqsAsyncClient.create())
    .scheduledExecutor(Executors.newScheduledThreadPool(5))
    .overrideConfiguration(b -> b
        .receiveMessageMinWaitDuration(Duration.ofSeconds(10))
        .receiveMessageVisibilityTimeout(Duration.ofSeconds(1))
        .receiveMessageAttributeNames(Collections.singletonList("*"))

 .receiveMessageSystemAttributeNames(Collections.singletonList(MessageSystemAttributeName.ALL))
    .build();
```

Si utiliza este método, puede ajustar la configuración del objeto `BatchOverrideConfiguration` que se muestra en la tabla de la sección the section called “Opciones de configuración”. También

puede proporcionar un `ScheduledExecutorService` personalizado para el administrador de lotes mediante este método.

Envío de mensajes

Para enviar mensajes con el administrador de lotes, utilice el método `SqsAsyncBatchManager#sendMessage`. El SDK almacena en búfer las solicitudes y las envía como un lote cuando se alcanzan los valores `maxBatchSize` o `sendRequestFrequency`.

En el siguiente ejemplo, se muestra una solicitud `sendMessage` seguida inmediatamente de otra solicitud. En este caso, el SDK envía ambos mensajes en un único lote.

```
// Sending the first message
CompletableFuture<SendMessageResponse> futureOne =
    sqsAsyncBatchManager.sendMessage(r -> r.messageBody("One").queueUrl("queue"));

// Sending the second message
CompletableFuture<SendMessageResponse> futureTwo =
    sqsAsyncBatchManager.sendMessage(r -> r.messageBody("Two").queueUrl("queue"));

// Waiting for both futures to complete and retrieving the responses
SendMessageResponse messageOne = futureOne.join();
SendMessageResponse messageTwo = futureTwo.join();
```

Cambio del tiempo de espera de visibilidad de mensajes

Puede cambiar el tiempo de espera de visibilidad de los mensajes de un lote utilizando el método `SqsAsyncBatchManager#changeMessageVisibility`. El SDK almacena en búfer las solicitudes y las envía como un lote cuando se alcanzan los valores `maxBatchSize` o `sendRequestFrequency`.

En el siguiente ejemplo, se muestra cómo llamar al método `changeMessageVisibility`.

```
CompletableFuture<ChangeMessageVisibilityResponse> futureOne =
    sqsAsyncBatchManager.changeMessageVisibility(r ->
        r.receiptHandle("receiptHandle")
         .queueUrl("queue"));
ChangeMessageVisibilityResponse response = futureOne.join();
```

Cómo eliminar mensajes

Puede eliminar los mensajes de un lote con el método `SqsAsyncBatchManager#deleteMessage`. El SDK almacena en búfer las solicitudes y las envía como un lote cuando se alcanzan los valores `maxBatchSize` o `sendRequestFrequency`.

En el siguiente ejemplo se muestra cómo llamar al método `deleteMessage`.

```
CompletableFuture<DeleteMessageResponse> futureOne =
    sqsAsyncBatchManager.deleteMessage(r ->
        r.receiptHandle("receiptHandle")
         .queueUrl("queue"));
DeleteMessageResponse response = futureOne.join();
```

Recepción de mensajes

Uso de la configuración predeterminada

Al sondear el método `SqsAsyncBatchManager#receiveMessage` en la aplicación, el administrador de lotes extrae los mensajes de su búfer interno, que el SDK actualiza automáticamente en segundo plano.

En el siguiente ejemplo, se muestra cómo llamar al método `receiveMessage`.

```
CompletableFuture<ReceiveMessageResponse> responseFuture =
    sqsAsyncBatchManager.receiveMessage(r -> r.queueUrl("queueUrl"));
```

Uso de la configuración personalizada

Si quiere personalizar aún más la solicitud, por ejemplo, configurando tiempos de espera personalizados y especificando el número de mensajes que se van a recuperar, puede personalizar la solicitud como se muestra en el siguiente ejemplo.

```
CompletableFuture<ReceiveMessageResponse> response =
    sqsAsyncBatchManager.receiveMessage(r ->
        r.queueUrl("queueUrl")
         .waitTimeSeconds(5)
         .visibilityTimeout(20));
```

> **Note**
>
> Si llama a `receiveMessage` con un parámetro `ReceiveMessageRequest` que incluya alguno de los siguientes parámetros, el SDK omite el administrador de lotes y envía una solicitud asincrónica `receiveMessage` normal:
>
> - `messageAttributeNames`
> - `messageSystemAttributeNames`
> - `messageSystemAttributeNamesWithStrings`
> - `overrideConfiguration`

Anulación de los ajustes de configuración de **`SqsAsyncBatchManager`**

Puede ajustar la configuración siguiente al crear una instancia `SqsAsyncBatchManager`. La siguiente lista de ajustes está disponible en `BatchOverrideConfiguration.Builder`.

Opción	Description (Descripción)	Predeterminado
`maxBatchSize`	Número máximo de solicitudes por lote para cada `SendMessageBatchRequest` , `ChangeMessageVisibilityBatchRequest` o `DeleteMessageBatchRequest` . El valor máximo es 10.	10
`sendRequestFrequency`	Tiempo antes de enviar un lote, a menos que se alcance antes `maxBatchSize` . Los valores más altos pueden reducir las solicitudes pero aumentar la latencia.	200 ms
`receiveMessageVisibilityTimeout`	Tiempo de espera de visibilidad para los mensajes. Si no	Configuración predeterminada de la cola

Opción	Description (Descripción)	Predeterminado
	se especifica, se utiliza la configuración predeterminada de la cola.	
`receiveMessageMinWaitDuration`	Tiempo mínimo de espera para solicitudes `receiveMessage` . Evite establecer el valor en 0 para evitar un uso excesivo de la CPU.	50 ms
`receiveMessageSystemAttributeNames`	Lista de nombres de atributos del sistema para solicitar para llamadas `receiveMessage` .	Ninguno
`receiveMessageAttributeNames`	Lista de nombres de atributos para solicitar para llamadas `receiveMessage` .	Ninguno

Trabaje con colas de Amazon Simple Queue Service mensajes

Una cola de mensajes es el contenedor lógico que se utiliza para enviar mensajes de forma fiable. Amazon Simple Queue Service Existen dos tipos de colas: estándar y primero en entrar, primero en salir (FIFO). Para obtener más información sobre las colas y las diferencias entre estos tipos, consulte la Guía para desarrolladores de Amazon Simple Queue Service.

En este tema se describe cómo crear, enumerar, eliminar y obtener la URL de una Amazon Simple Queue Service cola mediante el. AWS SDK para Java

La variable `sqsClient` que se utiliza en los ejemplos a continuación se puede crear a partir del siguiente fragmento.

```
SqsClient sqsClient = SqsClient.create();
```

Al crear un `SqsClient` utilizando el método `create()` estático, el SDK configura la región mediante la cadena de proveedores de regiones predeterminada y las credenciales mediante la cadena de proveedores de credenciales predeterminada.

Creación de una cola

Use el `createQueue` método de `SqsClient's` y proporcione un objeto `CreateQueueRequest` que describa los parámetros de la cola, como se muestra en el siguiente fragmento de código.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Código

```
            CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                .queueName(queueName)
                .build();

            sqsClient.createQueue(createQueueRequest);
```

Consulte el ejemplo completo en. GitHub

Lista de colas

Para ver las Amazon Simple Queue Service colas de tu cuenta, llama al `SqsClient's` `listQueues` método con un `ListQueuesRequest` objeto.

Si utiliza la forma del método `listQueues` que no acepta parámetros, el servicio devuelve todas las colas hasta un máximo de 1000.

Puede proporcionar un prefijo de nombre de cola al objeto `ListQueuesRequest` para limitar los resultados a las colas que coinciden con ese prefijo, como se muestra en el código siguiente.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Código

```
        String prefix = "que";

        try {
            ListQueuesRequest listQueuesRequest =
ListQueuesRequest.builder().queueNamePrefix(prefix).build();
            ListQueuesResponse listQueuesResponse =
sqsClient.listQueues(listQueuesRequest);

            for (String url : listQueuesResponse.queueUrls()) {
                System.out.println(url);
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

Consulta el ejemplo completo en. GitHub

Obtener la URL de una cola

El código siguiente muestra cómo obtener la URL de una cola llamando al `getQueueUrl` método de `SqsClient`'s con un objeto `GetQueueUrlRequest`.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Código

```
            GetQueueUrlResponse getQueueUrlResponse =

sqsClient.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
            String queueUrl = getQueueUrlResponse.queueUrl();
            return queueUrl;
```

Vea el ejemplo completo en GitHub.

Eliminar una cola

Proporcione la URL de la cola al objeto `DeleteQueueRequest`. A continuación, llame al método `deleteQueue` de `SqsClient`'s para eliminar una cola, como se muestra en el código siguiente.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Código

```
    public static void deleteSQSQueue(SqsClient sqsClient, String queueName) {

        try {

            GetQueueUrlRequest getQueueRequest = GetQueueUrlRequest.builder()
                    .queueName(queueName)
                    .build();

            String queueUrl = sqsClient.getQueueUrl(getQueueRequest).queueUrl();

            DeleteQueueRequest deleteQueueRequest = DeleteQueueRequest.builder()
                    .queueUrl(queueUrl)
                    .build();

            sqsClient.deleteQueue(deleteQueueRequest);

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Vea el ejemplo completo en GitHub.

Más información

- CreateQueueen la referencia Amazon Simple Queue Service de la API
- GetQueueUrlen la referencia Amazon Simple Queue Service de la API

- ListQueuesen la referencia Amazon Simple Queue Service de la API
- DeleteQueueen la referencia Amazon Simple Queue Service de la API

Enviar, recibir y eliminar Amazon Simple Queue Service mensajes

Un mensaje es un segmento de datos que los componentes distribuidos pueden enviar y recibir. Los mensajes se envían siempre a través de una cola de SQS.

La variable `sqsClient` que se utiliza en los ejemplos a continuación se puede crear a partir del siguiente fragmento.

```
SqsClient sqsClient = SqsClient.create();
```

Al crear un `SqsClient` utilizando el método `create()` estático, el SDK configura la región mediante la cadena de proveedores de regiones predeterminada y las credenciales mediante la cadena de proveedores de credenciales predeterminada.

Enviar un mensaje

Agrega un solo mensaje a una Amazon Simple Queue Service cola llamando al `sendMessage` método SqsClient cliente. Proporcione un SendMessageRequestobjeto que contenga la URL de la cola, el cuerpo del mensaje y el valor de retraso opcional (en segundos).

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Código

```
            sqsClient.sendMessage(SendMessageRequest.builder()
                .queueUrl(queueUrl)
                .messageBody("Hello world!")
                .delaySeconds(10)
                .build());

            sqsClient.sendMessage(sendMsgRequest);
```

Enviar varios mensajes en una solicitud

Envíe varios mensajes en una sola solicitud mediante el método SqsClient `sendMessageBatch`. Este método toma una SendMessageBatchRequestque contiene la URL de la cola y una lista de los mensajes que se van a enviar. (Cada mensaje es un SendMessageBatchRequestEntry.) También puede retrasar el envío de un mensaje específico estableciendo un valor de retraso en el mensaje.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Código

```
            SendMessageBatchRequest sendMessageBatchRequest =
 SendMessageBatchRequest.builder()
                .queueUrl(queueUrl)

 .entries(SendMessageBatchRequestEntry.builder().id("id1").messageBody("Hello from msg
 1").build(),

 SendMessageBatchRequestEntry.builder().id("id2").messageBody("msg
 2").delaySeconds(10).build())
                .build();
            sqsClient.sendMessageBatch(sendMessageBatchRequest);
```

Vea el ejemplo completo en GitHub.

Recuperar mensajes

Recupere todos los mensajes que se encuentran actualmente en la cola llamando al método SqsClient `receiveMessage`. Este método toma una ReceiveMessageRequestque contiene la URL de la cola. También puede especificar el número máximo de mensajes que se devuelven. Los mensajes se devuelven como una lista de objetos Message.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
```

```
import java.util.List;
```

Código

```
        try {
            ReceiveMessageRequest receiveMessageRequest =
ReceiveMessageRequest.builder()
                .queueUrl(queueUrl)
                .maxNumberOfMessages(5)
                .build();
            List<Message> messages =
sqsClient.receiveMessage(receiveMessageRequest).messages();
            return messages;
        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
```

Consulte el ejemplo completo en. GitHub

Eliminar un mensaje después de su recepción

Tras recibir un mensaje y procesar su contenido, elimine el mensaje de la cola enviando el identificador de recepción y la URL de la cola del mensaje al método `deleteMessage` de `SqsClient's`.

Importaciones

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Código

```
        try {
            for (Message message : messages) {
                DeleteMessageRequest deleteMessageRequest =
DeleteMessageRequest.builder()
                        .queueUrl(queueUrl)
                        .receiptHandle(message.receiptHandle())
```

```
                        .build();
                sqsClient.deleteMessage(deleteMessageRequest);
            }
```

Vea el ejemplo completo en GitHub.

Más información

- Cómo funcionan Amazon Simple Queue Service las colas en la guía Amazon Simple Queue Service para desarrolladores
- SendMessageen la referencia de la Amazon Simple Queue Service API
- SendMessageBatchen la referencia Amazon Simple Queue Service de la API
- ReceiveMessageen la referencia Amazon Simple Queue Service de la API
- DeleteMessageen la referencia Amazon Simple Queue Service de la API

Trabaja con Amazon Transcribe

En el siguiente ejemplo se muestra cómo funciona el streaming bidireccional con Amazon Transcribe. El streaming bidireccional implica que hay una secuencia de datos que se envía al servicio y que se recibe en tiempo real. El ejemplo utiliza la transcripción Amazon Transcribe en streaming para enviar una transmisión de audio y recibir una secuencia de texto transcrito en tiempo real.

Consulta la transcripción en streaming en la guía para Amazon Transcribe desarrolladores para obtener más información sobre esta función.

Consulte Primeros pasos en la Guía para Amazon Transcribe desarrolladores para empezar a utilizarla Amazon Transcribe.

Configurar el micrófono

Este código utiliza el paquete javax.sound.sampled para transmitir audio desde un dispositivo de entrada.

Código

```
import javax.sound.sampled.AudioFormat;
import javax.sound.sampled.AudioSystem;
import javax.sound.sampled.DataLine;
import javax.sound.sampled.TargetDataLine;
```

```
public class Microphone {

    public static TargetDataLine get() throws Exception {
        AudioFormat format = new AudioFormat(16000, 16, 1, true, false);
        DataLine.Info datalineInfo = new DataLine.Info(TargetDataLine.class, format);

        TargetDataLine dataLine = (TargetDataLine) AudioSystem.getLine(datalineInfo);
        dataLine.open(format);

        return dataLine;
    }
}
```

Consulte el ejemplo completo en GitHub.

Crear un editor

Este código implementa un editor que publica los datos de audio de la transmisión Amazon Transcribe de audio.

Código

```
package com.amazonaws.transcribe;

import java.io.IOException;
import java.io.InputStream;
import java.io.UncheckedIOException;
import java.nio.ByteBuffer;
import java.util.concurrent.ExecutorService;
import java.util.concurrent.Executors;
import java.util.concurrent.atomic.AtomicLong;
import org.reactivestreams.Publisher;
import org.reactivestreams.Subscriber;
import org.reactivestreams.Subscription;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.services.transcribestreaming.model.AudioEvent;
import software.amazon.awssdk.services.transcribestreaming.model.AudioStream;
import
 software.amazon.awssdk.services.transcribestreaming.model.TranscribeStreamingException;


public class AudioStreamPublisher implements Publisher<AudioStream> {
```

```
    private final InputStream inputStream;

    public AudioStreamPublisher(InputStream inputStream) {
        this.inputStream = inputStream;
    }

    @Override
    public void subscribe(Subscriber<? super AudioStream> s) {
        s.onSubscribe(new SubscriptionImpl(s, inputStream));
    }

    private class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024 * 1;
        private ExecutorService executor = Executors.newFixedThreadPool(1);
        private AtomicLong demand = new AtomicLong(0);

        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;

        private SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream
inputStream) {
            this.subscriber = s;
            this.inputStream = inputStream;
        }

        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);

            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
                            AudioEvent audioEvent = audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
```

```
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (TranscribeStreamingException e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {

        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];

            int len = 0;
            try {
                len = inputStream.read(audioBytes);

                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                    .audioChunk(SdkBytes.fromByteBuffer(bb))
                    .build();
        }
    }
}
```

Consulte el ejemplo completo en GitHub.

Cree el cliente e inicie la secuencia

En el método principal, cree un objeto de solicitud, inicie la secuencia de entrada de audio y cree instancias del editor con la entrada de audio.

También debe crear un StartStreamTranscriptionResponseHandlerpara especificar cómo gestionar la respuesta desde Amazon Transcribe.

A continuación, utilice el `startStreamTranscription` método TranscribeStreamingAsyncClient's para iniciar la transmisión bidireccional.

Importaciones

```
import javax.sound.sampled.AudioFormat;
import javax.sound.sampled.AudioSystem;
import javax.sound.sampled.DataLine;
import javax.sound.sampled.TargetDataLine;
import javax.sound.sampled.AudioInputStream;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.transcribestreaming.TranscribeStreamingAsyncClient;
import
 software.amazon.awssdk.services.transcribestreaming.model.TranscribeStreamingException ;
import
 software.amazon.awssdk.services.transcribestreaming.model.StartStreamTranscriptionRequest;
import software.amazon.awssdk.services.transcribestreaming.model.MediaEncoding;
import software.amazon.awssdk.services.transcribestreaming.model.LanguageCode;
import
 software.amazon.awssdk.services.transcribestreaming.model.StartStreamTranscriptionResponseHand
import software.amazon.awssdk.services.transcribestreaming.model.TranscriptEvent;
```

Código

```
   public static void convertAudio(TranscribeStreamingAsyncClient client) throws
Exception {

       try {

           StartStreamTranscriptionRequest request =
StartStreamTranscriptionRequest.builder()
                   .mediaEncoding(MediaEncoding.PCM)
                   .languageCode(LanguageCode.EN_US)
```

```
                    .mediaSampleRateHertz(16_000).build();

            TargetDataLine mic = Microphone.get();
            mic.start();

            AudioStreamPublisher publisher = new AudioStreamPublisher(new
AudioInputStream(mic));

            StartStreamTranscriptionResponseHandler response =
                    StartStreamTranscriptionResponseHandler.builder().subscriber(e -> {
                        TranscriptEvent event = (TranscriptEvent) e;
                        event.transcript().results().forEach(r ->
r.alternatives().forEach(a -> System.out.println(a.transcript())));
                    }).build();

            // Keeps Streaming until you end the Java program
            client.startStreamTranscription(request, publisher, response);

        } catch (TranscribeStreamingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
         }
    }
```

Consulta el ejemplo completo en. GitHub

Más información

- Cómo funciona en la guía para Amazon Transcribe desarrolladores.
- Introducción al audio en streaming en la Guía para desarrolladores de Amazon Transcribe .

Ejemplos de código de AWS SDK para Java 2.x

En los ejemplos de código de este tema se muestra cómo utilizar el AWS SDK for Java 2.x with AWS.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

Algunos servicios contienen categorías de ejemplo adicionales que muestran cómo aprovechar las bibliotecas o funciones específicas del servicio.

Services

- Ejemplos de ACM con SDK para Java 2.x
- Ejemplos de puerta de enlace de API con SDK para Java 2.x
- Ejemplos de escalado automático con SDK para Java 2.x
- Ejemplos de controlador de recuperación de aplicaciones con SDK para Java 2.x
- Ejemplos de Aurora usando SDK para Java 2.x
- Ejemplos de escalado automático usando SDK para Java 2.x
- AWS Batch ejemplos de uso de SDK for Java 2.x
- Ejemplos de Amazon Bedrock usando SDK para Java 2.x
- Ejemplos de Amazon Bedrock Runtime usando SDK para Java 2.x
- CloudFront ejemplos de uso de SDK for Java 2.x
- CloudWatch ejemplos de uso de SDK for Java 2.x
- CloudWatch Ejemplos de eventos con SDK for Java 2.x
- CloudWatch Ejemplos de registros mediante SDK for Java 2.x
- Ejemplos de identidad de Amazon Cognito usando SDK para Java 2.x
- Ejemplos de Amazon Cognito Identity Provider usando SDK para Java 2.x
- Ejemplos de Amazon Comprehend usando SDK para Java 2.x

- AWS Control Tower ejemplos de uso de SDK for Java 2.x
- Ejemplos de Firehose con SDK para Java 2.x
- Ejemplos de Amazon DocumentDB con SDK para Java 2.x
- Ejemplos de DynamoDB usando SDK para Java 2.x
- Ejemplos de Amazon EC2 usando SDK para Java 2.x
- Ejemplos de Amazon ECR con SDK para Java 2.x
- Ejemplos de Amazon ECS usando SDK para Java 2.x
- Ejemplos de Elastic Load Balancing, versión 2, con SDK para Java 2.x
- MediaStore ejemplos de uso de SDK for Java 2.x
- AWS Entity Resolution ejemplos de uso de SDK for Java 2.x
- OpenSearch Ejemplos de servicios que utilizan SDK for Java 2.x
- EventBridge ejemplos de uso de SDK for Java 2.x
- EventBridge Ejemplos de planificadores que utilizan SDK for Java 2.x
- Ejemplos de pronóstico usando SDK para Java 2.x
- Ejemplos de Amazon Glacier usando SDK para Java 2.x
- AWS Glue ejemplos de uso de SDK for Java 2.x
- HealthImaging ejemplos de uso de SDK for Java 2.x
- Ejemplos de IAM usando SDK para Java 2.x
- Ejemplos de Amazon Inspector con el SDK para Java 2.x
- AWS IoT ejemplos de uso de SDK for Java 2.x
- AWS IoT data ejemplos de uso de SDK for Java 2.x
- AWS IoT FleetWise ejemplos de uso de SDK for Java 2.x
- AWS IoT SiteWise ejemplos de uso de SDK for Java 2.x
- Ejemplos de Amazon Keyspaces usando SDK para Java 2.x
- Ejemplos de Kinesis que utilizan SDK para Java 2.x
- AWS KMS ejemplos de uso de SDK for Java 2.x
- Ejemplos de Lambda usando SDK para Java 2.x
- Ejemplos de Amazon Lex con SDK para Java 2.x
- Ejemplos de Amazon Location con SDK para Java 2.x
- Ejemplos básicos de Location Service Places con SDK para Java 2.x

- AWS Marketplace Ejemplos de API de catálogo con SDK for Java 2.x
- AWS Marketplace Ejemplos de API de acuerdos con SDK for Java 2.x
- MediaConvert ejemplos de uso de SDK for Java 2.x
- Ejemplos de Migration Hub usando SDK para Java 2.x
- Ejemplos de Amazon MSK con SDK para Java 2.x
- Ejemplos de Neptune con SDK para Java 2.x
- Ejemplos de Centro de socios con SDK para Java 2.x
- Ejemplos de Amazon Personalize usando SDK para Java 2.x
- Ejemplos de eventos de Amazon Personalize usando SDK para Java 2.x
- Ejemplos de Amazon Personalize Runtime usando SDK para Java 2.x
- Ejemplos de Amazon Pinpoint usando SDK para Java 2.x
- Ejemplos de código de la API de SMS y voz de Amazon Pinpoint usando SDK para Java 2.x
- Ejemplos de Amazon Polly usando SDK para Java 2.x
- Ejemplos de Amazon RDS usando SDK para Java 2.x
- Ejemplos de Amazon RDS Data Service con SDK para Java 2.x
- Ejemplos de Amazon Redshift usando SDK para Java 2.x
- Ejemplos de Amazon Rekognition usando SDK para Java 2.x
- Ejemplos de registro de dominios de Route 53 usando SDK para Java 2.x
- Ejemplos de Amazon S3 usando SDK para Java 2.x
- Ejemplos de Amazon S3 Control con SDK para Java 2.x
- Ejemplos de S3 Directory Buckets con SDK para Java 2.x
- SageMaker Ejemplos de IA con SDK for Java 2.x
- Ejemplos de Secrets Manager usando SDK para Java 2.x
- Ejemplos de Amazon SES usando SDK para Java 2.x
- Ejemplos de SES API v2 usando SDK para Java 2.x
- Ejemplos de Amazon SNS usando SDK para Java 2.x
- Ejemplos de Amazon SQS usando SDK para Java 2.x
- Ejemplos de funciones de pasos usando SDK para Java 2.x
- AWS STS ejemplos de uso de SDK for Java 2.x
- Soporte ejemplos de uso de SDK for Java 2.x

- Ejemplos de Systems Manager usando SDK para Java 2.x
- Ejemplos de Amazon Textract usando SDK para Java 2.x
- Ejemplos de Amazon Transcribe usando SDK para Java 2.x
- Ejemplos de Amazon Transcribe Streaming con SDK para Java 2.x
- Ejemplos de Amazon Translate con SDK para Java 2.x

Ejemplos de ACM con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso de AWS SDK for Java 2.x ACM.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`AddTagsToCertificate`

En el siguiente ejemplo de código, se muestra cómo utilizar `AddTagsToCertificate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class AddTagsToCertificate {

    public static void main(String[] args) {
        final String usage = """

            Usage:    <certArn>

            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
            System.out.println(usage);
            return;
        }

        String certArn = args[0];
        addTags(certArn);
    }

    /**
     * Adds tags to a certificate in AWS Certificate Manager (ACM).
     *
     * @param certArn the Amazon Resource Name (ARN) of the certificate to add tags
 to
     */
    public static void addTags(String certArn) {
        AcmClient acmClient = AcmClient.create();
        List<Tag> expectedTags =
 List.of(Tag.builder().key("key").value("value").build());
        AddTagsToCertificateRequest addTagsToCertificateRequest =
 AddTagsToCertificateRequest.builder()
            .certificateArn(certArn)
            .tags(expectedTags)
            .build();

        try {
            acmClient.addTagsToCertificate(addTagsToCertificateRequest);
            System.out.println("Successfully added tags to a certificate");
```

```
        } catch (AcmException e) {
            System.out.println(e.getMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta AddTagsToCertificatela Referencia AWS SDK for Java 2.x de la API.

`DeleteCertificate`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteCertificate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteCert {

    public static void main(String[] args) {
        final String usage = """

            Usage:    <certArn>

            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
```

```
            System.out.println(usage);
            return;
        }

        String certArn = args[0];
        deleteCertificate(certArn);
    }

    /**
     * Deletes an SSL/TLS certificate from the AWS Certificate Manager (ACM).
     *
     * @param certArn the Amazon Resource Name (ARN) of the certificate to be
 deleted
     */
    public static void deleteCertificate( String certArn) {
        AcmClient acmClient = AcmClient.create();
        DeleteCertificateRequest request = DeleteCertificateRequest.builder()
            .certificateArn(certArn)
            .build();

        try {
            acmClient.deleteCertificate(request);
            System.out.println("The certificate was deleted");

        } catch (AcmException e) {
            System.out.println(e.getMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteCertificatela Referencia AWS SDK for Java 2.x de la API.

`DescribeCertificate`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeCertificate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DescribeCert {

    public static void main(String[] args) {
        final String usage = """

            Usage:    <certArn>

            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
            System.out.println(usage);
            return;
        }

        String certArn = args[0];
        describeCertificate(certArn);
    }

    /**
     * Describes the details of an SSL/TLS certificate.
     *
     * @param certArn the Amazon Resource Name (ARN) of the certificate to describe
     * @throws AcmException if an error occurs while describing the certificate
```

```
     */
    public static void describeCertificate(String certArn) {
        AcmClient acmClient = AcmClient.create();
        DescribeCertificateRequest req = DescribeCertificateRequest.builder()
            .certificateArn(certArn)
            .build();

        try {
            DescribeCertificateResponse response =
 acmClient.describeCertificate(req);

            // Print the certificate details.
            System.out.println("Certificate ARN: " +
 response.certificate().certificateArn());
            System.out.println("Domain Name: " +
 response.certificate().domainName());
            System.out.println("Issued By: " + response.certificate().issuer());
            System.out.println("Issued On: " + response.certificate().issuedAt());
            System.out.println("Status: " + response.certificate().status());
        } catch (AcmException e) {
            System.out.println(e.getMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta DescribeCertificatela Referencia AWS SDK for Java 2.x de la API.

`ExportCertificate`

En el siguiente ejemplo de código, se muestra cómo utilizar `ExportCertificate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ExportCertificate {

    public static void main(String[] args) throws Exception {
        final String usage = """

            Usage:    <certArn>

            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
            System.out.println(usage);
            return;
        }

        String certArn = args[0];
        exportCert(certArn);
    }

    /**
     * Exports an SSL/TLS certificate and its associated private key and certificate
 chain from AWS Certificate Manager (ACM).
     *
     * @param certArn The Amazon Resource Name (ARN) of the certificate that you
 want to export.
     * @throws IOException If an I/O error occurs while reading the private key
 passphrase file or exporting the certificate.
     */
    public static void exportCert(String certArn) throws IOException {
        AcmClient acmClient = AcmClient.create();

        // Initialize a file descriptor for the passphrase file.
        RandomAccessFile filePassphrase = null;
        ByteBuffer bufPassphrase = null;
```

```
        // Create a file stream for reading the private key passphrase.
        try {
            filePassphrase = new RandomAccessFile("C:\\AWS\\password.txt", "r");
        } catch (IllegalArgumentException | SecurityException |
FileNotFoundException ex) {
            throw ex;
        }

        // Create a channel to map the file.
        FileChannel channelPassphrase = filePassphrase.getChannel();

        // Map the file to the buffer.
        try {
            bufPassphrase = channelPassphrase.map(FileChannel.MapMode.READ_ONLY, 0,
channelPassphrase.size());
            channelPassphrase.close();
            filePassphrase.close();
        } catch (IOException ex) {
            throw ex;
        }

        // Create a request object.
        ExportCertificateRequest req = ExportCertificateRequest.builder()
            .certificateArn(certArn)
            .passphrase(SdkBytes.fromByteBuffer(bufPassphrase))
            .build();

        // Export the certificate.
        ExportCertificateResponse result = null;
        try {
            result = acmClient.exportCertificate(req);
        } catch (InvalidArnException | InvalidTagException |
ResourceNotFoundException ex) {
            throw ex;
        }

        // Clear the buffer.
        bufPassphrase.clear();

        // Display the certificate and certificate chain.
        String certificate = result.certificate();
        System.out.println(certificate);
```

```
        String certificateChain = result.certificateChain();
        System.out.println(certificateChain);

        // This example retrieves but does not display the private key.
        String privateKey = result.privateKey();
        System.out.println("The example is complete");
    }
}
```

- Para obtener más información sobre la API, consulta ExportCertificatela Referencia AWS SDK for Java 2.x de la API.

`ImportCertificate`

En el siguiente ejemplo de código, se muestra cómo utilizar `ImportCertificate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ImportCert {

    public static void main(String[] args) {
        final String usage = """
            Usage: <bucketName> <certificateKey> <privateKeyKey>

            Where:
```

```
                bucketName - The name of the S3 bucket containing the certificate
and private key.
                certificateKey - The object key for the SSL/TLS certificate file in
S3.
                privateKeyKey - The object key for the private key file in S3.
            """;

        if (args.length != 3) {
            System.out.println(usage);
            return;
        }

        String bucketName = args[0];
        String certificateKey = args[1];
        String privateKeyKey = args[2];

        String certificateArn = importCertificate(bucketName, certificateKey,
privateKeyKey);
        System.out.println("Certificate imported with ARN: " + certificateArn);
    }

    /**
     * Imports an SSL/TLS certificate and private key from S3 into AWS Certificate
Manager (ACM).
     *
     * @param bucketName     The name of the S3 bucket.
     * @param certificateKey The key for the SSL/TLS certificate file in S3.
     * @param privateKeyKey  The key for the private key file in S3.
     * @return The ARN of the imported certificate.
     */
    public static String importCertificate(String bucketName, String certificateKey,
String privateKeyKey) {
        AcmClient acmClient = AcmClient.create();
        S3Client s3Client = S3Client.create();

        try {
            byte[] certificateBytes = downloadFileFromS3(s3Client, bucketName,
certificateKey);
            byte[] privateKeyBytes = downloadFileFromS3(s3Client, bucketName,
privateKeyKey);

            ImportCertificateRequest request = ImportCertificateRequest.builder()

.certificate(SdkBytes.fromByteBuffer(ByteBuffer.wrap(certificateBytes)))
```

```
 .privateKey(SdkBytes.fromByteBuffer(ByteBuffer.wrap(privateKeyBytes)))
                     .build();

             ImportCertificateResponse response =
 acmClient.importCertificate(request);
             return response.certificateArn();

        } catch (IOException e) {
             System.err.println("Error downloading certificate or private key from
 S3: " + e.getMessage());
        } catch (S3Exception e) {
             System.err.println("S3 error: " + e.awsErrorDetails().errorMessage());
        }
        return "";
    }

    /**
     * Downloads a file from Amazon S3 and returns its contents as a byte array.
     *
     * @param s3Client   The S3 client.
     * @param bucketName The name of the S3 bucket.
     * @param objectKey  The key of the object in S3.
     * @return The file contents as a byte array.
     * @throws IOException If an I/O error occurs.
     */
    private static byte[] downloadFileFromS3(S3Client s3Client, String bucketName,
 String objectKey) throws IOException {
        GetObjectRequest getObjectRequest = GetObjectRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .build();

        try (ResponseInputStream<GetObjectResponse> s3Object =
 s3Client.getObject(getObjectRequest);
             ByteArrayOutputStream byteArrayOutputStream = new
 ByteArrayOutputStream()) {
             IoUtils.copy(s3Object, byteArrayOutputStream);
             return byteArrayOutputStream.toByteArray();
        }
    }
}
```

- Para obtener más información sobre la API, consulta ImportCertificatela Referencia AWS SDK for Java 2.x de la API.

`ListCertificates`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListCertificates`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListCerts {
    public static void main(String[] args) {
        listCertificates();
    }

    /**
     * Lists all the certificates managed by AWS Certificate Manager (ACM) that have
 a status of "ISSUED".
     */
    public static void listCertificates() {
        AcmClient acmClient = AcmClient.create();
        try {
            ListCertificatesRequest listRequest = ListCertificatesRequest.builder()
                .certificateStatuses(CertificateStatus.ISSUED)
                .maxItems(100)
                .build();
            ListCertificatesIterable listResponse =
 acmClient.listCertificatesPaginator(listRequest);
```

```
            // Print the certificate details using streams
            listResponse.certificateSummaryList().stream()
                .forEach(certificate -> {
                    System.out.println("Certificate ARN: " +
 certificate.certificateArn());
                    System.out.println("Certificate Domain Name: " +
 certificate.domainName());
                    System.out.println("Certificate Status: " +
 certificate.statusAsString());
                    System.out.println("---");
                });

        } catch (AcmException e) {
            System.err.println(e.getMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListCertificatesla Referencia AWS SDK for Java 2.x de la API.

`ListTagsForCertificate`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListTagsForCertificate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListCertTags {

    public static void main(String[] args) {

        final String usage = """

            Usage:    <certArn>

            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
            System.out.println(usage);
            return;
        }

        String certArn = args[0];
        listCertTags(certArn);
    }

    /**
     * Lists the tags associated with an AWS Certificate Manager (ACM) certificate.
     *
     * @param certArn the Amazon Resource Name (ARN) of the ACM certificate
     */
    public static void listCertTags(String certArn) {
        AcmClient acmClient = AcmClient.create();

        ListTagsForCertificateRequest request =
 ListTagsForCertificateRequest.builder()
            .certificateArn(certArn)
            .build();

        ListTagsForCertificateResponse response =
 acmClient.listTagsForCertificate(request);
        List<Tag> tagList = response.tags();
        tagList.forEach(tag -> {
            System.out.println("Key: " + tag.key());
            System.out.println("Value: " + tag.value());
        });
    }
}
```

- Para obtener más información sobre la API, consulta ListTagsForCertificatela Referencia AWS SDK for Java 2.x de la API.

`RemoveTagsFromCertificate`

En el siguiente ejemplo de código, se muestra cómo utilizar `RemoveTagsFromCertificate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class RemoveTagsFromCert {

    public static void main(String[] args) {
        final String usage = """

            Usage:    <certArn>

            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
            System.out.println(usage);
            return;
        }
```

```
        String certArn = args[0];
        removeTags(certArn);
    }

    /**
     * Removes tags from an AWS Certificate Manager (ACM) certificate.
     *
     * @param certArn the Amazon Resource Name (ARN) of the certificate from which
 to remove tags
     */
    public static void removeTags(String certArn) {
        AcmClient acmClient = AcmClient.create();
        List<Tag> expectedTags =
 List.of(Tag.builder().key("key").value("value").build());
        RemoveTagsFromCertificateRequest req =
 RemoveTagsFromCertificateRequest.builder()
            .certificateArn(certArn)
            .tags(expectedTags)
            .build();

        try {
            acmClient.removeTagsFromCertificate(req);
            System.out.println("Successfully removed tags from the certificate");
        } catch (AcmException e) {
            System.err.println(e.getMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta RemoveTagsFromCertificatela Referencia AWS SDK for Java 2.x de la API.

`RenewCertificate`

En el siguiente ejemplo de código, se muestra cómo utilizar `RenewCertificate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class RenewCert {
    public static void main(String[] args) {
        final String usage = """

            Usage:    <certArn>

            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
            System.out.println(usage);
            return;
        }

        String certArn = args[0];
        renewCertificate(certArn);
    }

    /**
     * Renews an existing SSL/TLS certificate in AWS Certificate Manager (ACM).
     *
     * @param certArn The Amazon Resource Name (ARN) of the certificate to be
 renewed.
     * @throws AcmException If there is an error renewing the certificate.
     */
```

```
    public static void renewCertificate(String certArn) {
        AcmClient acmClient = AcmClient.create();

        RenewCertificateRequest certificateRequest =
 RenewCertificateRequest.builder()
            .certificateArn(certArn)
            .build();

        try {
            acmClient.renewCertificate(certificateRequest);
            System.out.println("The certificate was renewed");
        } catch(AcmException e){
            System.out.println(e.getMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta RenewCertificatela Referencia AWS SDK for Java 2.x de la API.

`RequestCertificate`

En el siguiente ejemplo de código, se muestra cómo utilizar `RequestCertificate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class RequestCert {

    public static void main(String[] args) {
        requestCertificate();
    }

    /**
     * Requests a certificate from the AWS Certificate Manager (ACM) service.
     */
    public static void requestCertificate() {
        AcmClient acmClient = AcmClient.create();
        ArrayList<String> san = new ArrayList<>();
        san.add("www.example.com");

        RequestCertificateRequest req = RequestCertificateRequest.builder()
            .domainName("example.com")
            .idempotencyToken("1Aq25pTy")
            .subjectAlternativeNames(san)
            .build();

        try {
            RequestCertificateResponse response = acmClient.requestCertificate(req);
            System.out.println("Cert ARN IS " + response.certificateArn());
        } catch (AcmException e) {
            System.err.println(e.getMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta RequestCertificatela Referencia AWS SDK for Java 2.x de la API.

Ejemplos de puerta de enlace de API con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante API Gateway.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

AWS Las contribuciones de la comunidad son ejemplos que fueron creados y mantenidos por varios equipos AWS. Para enviar comentarios, utilice el mecanismo previsto en los repositorios vinculados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios
- AWS contribuciones de la comunidad

Acciones

`CreateDeployment`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDeployment`.

SDK para Java 2.x

> **Note**
>
> Hay más información sobre GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createNewDeployment(ApiGatewayClient apiGateway, String
restApiId, String stageName) {

       try {
           CreateDeploymentRequest request = CreateDeploymentRequest.builder()
                   .restApiId(restApiId)
                   .description("Created using the AWS API Gateway Java API")
                   .stageName(stageName)
                   .build();

           CreateDeploymentResponse response =
apiGateway.createDeployment(request);
```

```
            System.out.println("The id of the deployment is " + response.id());
            return response.id();

        } catch (ApiGatewayException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

- Para obtener más información sobre la API, consulta CreateDeploymentla Referencia AWS SDK for Java 2.x de la API.

`CreateRestApi`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateRestApi`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createAPI(ApiGatewayClient apiGateway, String restApiId,
String restApiName) {

        try {
            CreateRestApiRequest request = CreateRestApiRequest.builder()
                    .cloneFrom(restApiId)
                    .description("Created using the Gateway Java API")
                    .name(restApiName)
                    .build();

            CreateRestApiResponse response = apiGateway.createRestApi(request);
            System.out.println("The id of the new api is " + response.id());
            return response.id();

        } catch (ApiGatewayException e) {
```

```
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

- Para obtener más información sobre la API, consulta CreateRestApila Referencia AWS SDK for Java 2.x de la API.

`DeleteDeployment`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDeployment`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void deleteSpecificDeployment(ApiGatewayClient apiGateway, String
restApiId, String deploymentId) {

        try {
            DeleteDeploymentRequest request = DeleteDeploymentRequest.builder()
                    .restApiId(restApiId)
                    .deploymentId(deploymentId)
                    .build();

            apiGateway.deleteDeployment(request);
            System.out.println("Deployment was deleted");

        } catch (ApiGatewayException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteDeploymentla Referencia AWS SDK for Java 2.x de la API.

`DeleteRestApi`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteRestApi`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public static void deleteAPI(ApiGatewayClient apiGateway, String restApiId) {

    try {
        DeleteRestApiRequest request = DeleteRestApiRequest.builder()
                .restApiId(restApiId)
                .build();

        apiGateway.deleteRestApi(request);
        System.out.println("The API was successfully deleted");

    } catch (ApiGatewayException e) {
        System.err.println(e.awsErrorDetails().errorMessage());
        System.exit(1);
    }
}
```

- Para obtener más información sobre la API, consulta DeleteRestApila Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación de una aplicación sin servidor para administrar fotos

En el siguiente ejemplo de código se muestra cómo crear una aplicación sin servidor que permita a los usuarios administrar fotos mediante etiquetas.

SDK para Java 2.x

Muestra cómo desarrollar una aplicación de administración de activos fotográficos que detecte las etiquetas de las imágenes mediante Amazon Rekognition y las almacene para su posterior recuperación.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Para profundizar en el origen de este ejemplo, consulte la publicación en Comunidad de AWS.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB
- Lambda
- Amazon Rekognition
- Amazon S3
- Amazon SNS

Uso de API Gateway para invocar una función de Lambda

El siguiente ejemplo de código muestra cómo crear una AWS Lambda función invocada por Amazon API Gateway.

SDK para Java 2.x

Muestra cómo crear una AWS Lambda función mediante la API de tiempo de ejecución Lambda Java. En este ejemplo, se invocan diferentes AWS servicios para realizar un caso de uso específico. En este ejemplo se indica cómo crear una función de Lambda invocada por Amazon API Gateway que escanea una tabla de Amazon DynamoDB en busca de aniversarios laborales y utiliza Amazon Simple Notification Service (Amazon SNS) para enviar un mensaje de texto a sus empleados que les felicite en la fecha de su primer aniversario.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB
- Lambda
- Amazon SNS

AWS contribuciones de la comunidad

Cómo crear y probar una aplicación sin servidor

El siguiente ejemplo de código muestra cómo crear y probar una aplicación sin servidor mediante API Gateway con Lambda y DynamoDB.

SDK para Java 2.x

Muestra cómo crear y probar una aplicación sin servidor que consta de una API Gateway con Lambda y DynamoDB mediante el SDK de Java.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB
- Lambda

Ejemplos de escalado automático con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante Application Auto Scaling. AWS SDK for Java 2.x

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`DeleteScalingPolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteScalingPolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.applicationautoscaling.ApplicationAutoScalingClient;
import
 software.amazon.awssdk.services.applicationautoscaling.model.ApplicationAutoScalingExceptio
import
 software.amazon.awssdk.services.applicationautoscaling.model.DeleteScalingPolicyRequest;
import
 software.amazon.awssdk.services.applicationautoscaling.model.DeregisterScalableTargetReques
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalableTargetsRequest
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalableTargetsRespons
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalingPoliciesRequest
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalingPoliciesRespons
import
 software.amazon.awssdk.services.applicationautoscaling.model.ScalableDimension;
import
 software.amazon.awssdk.services.applicationautoscaling.model.ServiceNamespace;
```

```
/**
 * Before running this Java V2 code example, set up your development environment,
 including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DisableDynamoDBAutoscaling {
    public static void main(String[] args) {
        final String usage = """

            Usage:
               <tableId> <policyName>\s

            Where:
               tableId - The table Id value (for example, table/Music).\s
               policyName - The name of the policy (for example, $Music5-scaling-
policy).

            """;
        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        ApplicationAutoScalingClient appAutoScalingClient =
 ApplicationAutoScalingClient.builder()
            .region(Region.US_EAST_1)
            .build();

        ServiceNamespace ns = ServiceNamespace.DYNAMODB;
        ScalableDimension tableWCUs =
 ScalableDimension.DYNAMODB_TABLE_WRITE_CAPACITY_UNITS;
        String tableId = args[0];
        String policyName = args[1];

        deletePolicy(appAutoScalingClient, policyName, tableWCUs, ns, tableId);
        verifyScalingPolicies(appAutoScalingClient, tableId, ns, tableWCUs);
        deregisterScalableTarget(appAutoScalingClient, tableId, ns, tableWCUs);
        verifyTarget(appAutoScalingClient, tableId, ns, tableWCUs);
    }
```

```
   public static void deletePolicy(ApplicationAutoScalingClient
appAutoScalingClient, String policyName, ScalableDimension tableWCUs,
ServiceNamespace ns, String tableId) {
       try {
           DeleteScalingPolicyRequest delSPRequest =
DeleteScalingPolicyRequest.builder()
               .policyName(policyName)
               .scalableDimension(tableWCUs)
               .serviceNamespace(ns)
               .resourceId(tableId)
               .build();

           appAutoScalingClient.deleteScalingPolicy(delSPRequest);
           System.out.println(policyName +" was deleted successfully.");

       } catch (ApplicationAutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
       }
   }

   // Verify that the scaling policy was deleted
   public static void verifyScalingPolicies(ApplicationAutoScalingClient
appAutoScalingClient, String tableId, ServiceNamespace ns, ScalableDimension
tableWCUs) {
       DescribeScalingPoliciesRequest dscRequest =
DescribeScalingPoliciesRequest.builder()
           .scalableDimension(tableWCUs)
           .serviceNamespace(ns)
           .resourceId(tableId)
           .build();

       DescribeScalingPoliciesResponse response =
appAutoScalingClient.describeScalingPolicies(dscRequest);
       System.out.println("DescribeScalableTargets result: ");
       System.out.println(response);
   }

   public static void deregisterScalableTarget(ApplicationAutoScalingClient
appAutoScalingClient, String tableId, ServiceNamespace ns, ScalableDimension
tableWCUs) {
       try {
           DeregisterScalableTargetRequest targetRequest =
DeregisterScalableTargetRequest.builder()
```

```
                .scalableDimension(tableWCUs)
                .serviceNamespace(ns)
                .resourceId(tableId)
                .build();

            appAutoScalingClient.deregisterScalableTarget(targetRequest);
            System.out.println("The scalable target was deregistered.");

        } catch (ApplicationAutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
    }

    public static void verifyTarget(ApplicationAutoScalingClient
 appAutoScalingClient, String tableId, ServiceNamespace ns, ScalableDimension
 tableWCUs) {
        DescribeScalableTargetsRequest dscRequest =
 DescribeScalableTargetsRequest.builder()
            .scalableDimension(tableWCUs)
            .serviceNamespace(ns)
            .resourceIds(tableId)
            .build();

        DescribeScalableTargetsResponse response =
 appAutoScalingClient.describeScalableTargets(dscRequest);
        System.out.println("DescribeScalableTargets result: ");
        System.out.println(response);
    }
}
```

- Para obtener más información sobre la API, consulta DeleteScalingPolicyla Referencia AWS SDK for Java 2.x de la API.

`RegisterScalableTarget`

En el siguiente ejemplo de código, se muestra cómo utilizar `RegisterScalableTarget`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.applicationautoscaling.ApplicationAutoScalingClient;
import
 software.amazon.awssdk.services.applicationautoscaling.model.ApplicationAutoScalingExceptio
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalableTargetsRequest
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalableTargetsRespons
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalingPoliciesRequest
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalingPoliciesRespons
import software.amazon.awssdk.services.applicationautoscaling.model.PolicyType;
import
 software.amazon.awssdk.services.applicationautoscaling.model.PredefinedMetricSpecification;
import
 software.amazon.awssdk.services.applicationautoscaling.model.PutScalingPolicyRequest;
import
 software.amazon.awssdk.services.applicationautoscaling.model.RegisterScalableTargetRequest;
import software.amazon.awssdk.services.applicationautoscaling.model.ScalingPolicy;
import
 software.amazon.awssdk.services.applicationautoscaling.model.ServiceNamespace;
import
 software.amazon.awssdk.services.applicationautoscaling.model.ScalableDimension;
import software.amazon.awssdk.services.applicationautoscaling.model.MetricType;
import
 software.amazon.awssdk.services.applicationautoscaling.model.TargetTrackingScalingPolicyCon
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development environment,
 including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class EnableDynamoDBAutoscaling {
    public static void main(String[] args) {
        final String usage = """

            Usage:
               <tableId> <roleARN> <policyName>\s

            Where:
               tableId - The table Id value (for example, table/Music).
               roleARN - The ARN of the role that has ApplicationAutoScaling
 permissions.
               policyName - The name of the policy to create.

            """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        System.out.println("This example registers an Amazon DynamoDB table, which
 is the resource to scale.");
        String tableId = args[0];
        String roleARN = args[1];
        String policyName = args[2];
        ServiceNamespace ns = ServiceNamespace.DYNAMODB;
        ScalableDimension tableWCUs =
 ScalableDimension.DYNAMODB_TABLE_WRITE_CAPACITY_UNITS;
        ApplicationAutoScalingClient appAutoScalingClient =
 ApplicationAutoScalingClient.builder()
            .region(Region.US_EAST_1)
            .build();

        registerScalableTarget(appAutoScalingClient, tableId, roleARN, ns,
 tableWCUs);
        verifyTarget(appAutoScalingClient, tableId, ns, tableWCUs);
        configureScalingPolicy(appAutoScalingClient, tableId, ns, tableWCUs,
 policyName);
    }
```

```
   public static void registerScalableTarget(ApplicationAutoScalingClient
appAutoScalingClient, String tableId, String roleARN, ServiceNamespace ns,
ScalableDimension tableWCUs) {
       try {
           RegisterScalableTargetRequest targetRequest =
RegisterScalableTargetRequest.builder()
               .serviceNamespace(ns)
               .scalableDimension(tableWCUs)
               .resourceId(tableId)
               .roleARN(roleARN)
               .minCapacity(5)
               .maxCapacity(10)
               .build();

           appAutoScalingClient.registerScalableTarget(targetRequest);
           System.out.println("You have registered " + tableId);

       } catch (ApplicationAutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
       }
   }

   // Verify that the target was created.
   public static void verifyTarget(ApplicationAutoScalingClient
appAutoScalingClient, String tableId, ServiceNamespace ns, ScalableDimension
tableWCUs) {
       DescribeScalableTargetsRequest dscRequest =
DescribeScalableTargetsRequest.builder()
           .scalableDimension(tableWCUs)
           .serviceNamespace(ns)
           .resourceIds(tableId)
           .build();

       DescribeScalableTargetsResponse response =
appAutoScalingClient.describeScalableTargets(dscRequest);
       System.out.println("DescribeScalableTargets result: ");
       System.out.println(response);
   }

   // Configure a scaling policy.
   public static void configureScalingPolicy(ApplicationAutoScalingClient
appAutoScalingClient, String tableId, ServiceNamespace ns, ScalableDimension
tableWCUs, String policyName) {
       // Check if the policy exists before creating a new one.
```

```
        DescribeScalingPoliciesResponse describeScalingPoliciesResponse =
appAutoScalingClient.describeScalingPolicies(DescribeScalingPoliciesRequest.builder()
            .serviceNamespace(ns)
            .resourceId(tableId)
            .scalableDimension(tableWCUs)
            .build());

        if (!describeScalingPoliciesResponse.scalingPolicies().isEmpty()) {
            // If policies exist, consider updating an existing policy instead of
creating a new one.
            System.out.println("Policy already exists. Consider updating it
instead.");
            List<ScalingPolicy> polList =
describeScalingPoliciesResponse.scalingPolicies();
            for (ScalingPolicy pol : polList) {
                System.out.println("Policy name:" +pol.policyName());
            }
        } else {
            // If no policies exist, proceed with creating a new policy.
            PredefinedMetricSpecification specification =
PredefinedMetricSpecification.builder()

.predefinedMetricType(MetricType.DYNAMO_DB_WRITE_CAPACITY_UTILIZATION)
                .build();

            TargetTrackingScalingPolicyConfiguration policyConfiguration =
TargetTrackingScalingPolicyConfiguration.builder()
                .predefinedMetricSpecification(specification)
                .targetValue(50.0)
                .scaleInCooldown(60)
                .scaleOutCooldown(60)
                .build();

            PutScalingPolicyRequest putScalingPolicyRequest =
PutScalingPolicyRequest.builder()
                .targetTrackingScalingPolicyConfiguration(policyConfiguration)
                .serviceNamespace(ns)
                .scalableDimension(tableWCUs)
                .resourceId(tableId)
                .policyName(policyName)
                .policyType(PolicyType.TARGET_TRACKING_SCALING)
                .build();

            try {
```

```
                appAutoScalingClient.putScalingPolicy(putScalingPolicyRequest);
                System.out.println("You have successfully created a scaling policy
 for an Application Auto Scaling scalable target");
            } catch (ApplicationAutoScalingException e) {
                System.err.println("Error: " + e.awsErrorDetails().errorMessage());
            }
        }
    }
}
```

- Para obtener más información sobre la API, consulta RegisterScalableTargetla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de controlador de recuperación de aplicaciones con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes mediante el AWS SDK for Java 2.x uso de Application Recovery Controller.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`GetRoutingControlState`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetRoutingControlState`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static GetRoutingControlStateResponse
 getRoutingControlState(List<ClusterEndpoint> clusterEndpoints,
            String routingControlArn) {
        // As a best practice, we recommend choosing a random cluster endpoint to
 get or
        // set routing control states.
        // For more information, see
        // https://docs.aws.amazon.com/r53recovery/latest/dg/route53-arc-best-
practices.html#route53-arc-best-practices.regional
        Collections.shuffle(clusterEndpoints);
        for (ClusterEndpoint clusterEndpoint : clusterEndpoints) {
            try {
                System.out.println(clusterEndpoint);
                Route53RecoveryClusterClient client =
 Route53RecoveryClusterClient.builder()
                        .endpointOverride(URI.create(clusterEndpoint.endpoint()))
                        .region(Region.of(clusterEndpoint.region())).build();
                return client.getRoutingControlState(
                        GetRoutingControlStateRequest.builder()
                                .routingControlArn(routingControlArn).build());
            } catch (Exception exception) {
                System.out.println(exception);
            }
        }
        return null;
    }
```

- Para obtener más información sobre la API, consulta GetRoutingControlStatela Referencia AWS SDK for Java 2.x de la API.

`UpdateRoutingControlState`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateRoutingControlState`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static UpdateRoutingControlStateResponse
 updateRoutingControlState(List<ClusterEndpoint> clusterEndpoints,
            String routingControlArn,
            String routingControlState) {
        // As a best practice, we recommend choosing a random cluster endpoint to
 get or
        // set routing control states.
        // For more information, see
        // https://docs.aws.amazon.com/r53recovery/latest/dg/route53-arc-best-
practices.html#route53-arc-best-practices.regional
        Collections.shuffle(clusterEndpoints);
        for (ClusterEndpoint clusterEndpoint : clusterEndpoints) {
            try {
                System.out.println(clusterEndpoint);
                Route53RecoveryClusterClient client =
 Route53RecoveryClusterClient.builder()
                        .endpointOverride(URI.create(clusterEndpoint.endpoint()))
                        .region(Region.of(clusterEndpoint.region()))
                        .build();
                return client.updateRoutingControlState(
                        UpdateRoutingControlStateRequest.builder()

 .routingControlArn(routingControlArn).routingControlState(routingControlState).build());
            } catch (Exception exception) {
                System.out.println(exception);
            }
        }
        return null;
    }
```

- Para obtener más información sobre la API, consulta UpdateRoutingControlStatela Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Aurora usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso AWS SDK for Java 2.x de Aurora.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios

Introducción

Introducción a Aurora

En el siguiente ejemplo de código, se muestra cómo empezar a utilizar Aurora.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.paginators.DescribeDBClustersIterable;

public class DescribeDbClusters {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        describeClusters(rdsClient);
        rdsClient.close();
    }

    public static void describeClusters(RdsClient rdsClient) {
        DescribeDBClustersIterable clustersIterable =
 rdsClient.describeDBClustersPaginator();
        clustersIterable.stream()
                .flatMap(r -> r.dbClusters().stream())
                .forEach(cluster -> System.out
                        .println("Database name: " + cluster.databaseName() + " Arn
 = " + cluster.dbClusterArn()));
    }
}
```

- Para obtener más información sobre la API, consulta la sección Describir DBClusters en la referencia de la AWS SDK for Java 2.x API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Cree un grupo de parámetros de clúster de base de datos de Aurora y defina los valores de los parámetros.
- Cree un clúster de base de datos que utilice el grupo de parámetros.
- Cree una instancia de base de datos que contenga una base de datos.
- Realice una instantánea del clúster de base de datos y luego limpie los recursos.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This example requires an AWS Secrets Manager secret that contains the
 * database credentials. If you do not create a
 * secret, this example will not work. For details, see:
 *
 * https://docs.aws.amazon.com/secretsmanager/latest/userguide/integrating_how-
services-use-secrets_RS.html
 *
 * This Java example performs the following tasks:
 *
 * 1. Gets available engine families for Amazon Aurora MySQL-Compatible Edition
 * by calling the DescribeDbEngineVersions(Engine='aurora-mysql') method.
 * 2. Selects an engine family and creates a custom DB cluster parameter group
```

```
 * by invoking the describeDBClusterParameters method.
 * 3. Gets the parameter groups by invoking the describeDBClusterParameterGroups
 * method.
 * 4. Gets parameters in the group by invoking the describeDBClusterParameters
 * method.
 * 5. Modifies the auto_increment_offset parameter by invoking the
 * modifyDbClusterParameterGroupRequest method.
 * 6. Gets and displays the updated parameters.
 * 7. Gets a list of allowed engine versions by invoking the
 * describeDbEngineVersions method.
 * 8. Creates an Aurora DB cluster database cluster that contains a MySQL
 * database.
 * 9. Waits for DB instance to be ready.
 * 10. Gets a list of instance classes available for the selected engine.
 * 11. Creates a database instance in the cluster.
 * 12. Waits for DB instance to be ready.
 * 13. Creates a snapshot.
 * 14. Waits for DB snapshot to be ready.
 * 15. Deletes the DB cluster.
 * 16. Deletes the DB cluster group.
 */
public class AuroraScenario {
    public static long sleepTime = 20;
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws InterruptedException {
        final String usage = "\n" +
                "Usage:\n" +
                "    <dbClusterGroupName> <dbParameterGroupFamily>
 <dbInstanceClusterIdentifier> <dbInstanceIdentifier> <dbName>
 <dbSnapshotIdentifier><secretName>"
                +
                "Where:\n" +
                "    dbClusterGroupName - The name of the DB cluster parameter
 group. \n" +
                "    dbParameterGroupFamily - The DB cluster parameter group family
 name (for example, aurora-mysql5.7). \n"
                +
                "    dbInstanceClusterIdentifier - The instance cluster identifier
 value.\n" +
                "    dbInstanceIdentifier - The database instance identifier.\n" +
                "    dbName - The database name.\n" +
                "    dbSnapshotIdentifier - The snapshot identifier.\n" +
```

```
                "    secretName - The name of the AWS Secrets Manager secret that
contains the database credentials\"\n";
        ;

        if (args.length != 7) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbClusterGroupName = args[0];
        String dbParameterGroupFamily = args[1];
        String dbInstanceClusterIdentifier = args[2];
        String dbInstanceIdentifier = args[3];
        String dbName = args[4];
        String dbSnapshotIdentifier = args[5];
        String secretName = args[6];

        // Retrieve the database credentials using AWS Secrets Manager.
        Gson gson = new Gson();
        User user = gson.fromJson(String.valueOf(getSecretValues(secretName)),
User.class);
        String username = user.getUsername();
        String userPassword = user.getPassword();

        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon Aurora example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Return a list of the available DB engines");
        describeDBEngines(rdsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create a custom parameter group");
        createDBClusterParameterGroup(rdsClient, dbClusterGroupName,
dbParameterGroupFamily);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("3. Get the parameter group");
        describeDbClusterParameterGroups(rdsClient, dbClusterGroupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Get the parameters in the group");
        describeDbClusterParameters(rdsClient, dbClusterGroupName, 0);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Modify the auto_increment_offset parameter");
        modifyDBClusterParas(rdsClient, dbClusterGroupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Display the updated parameter value");
        describeDbClusterParameters(rdsClient, dbClusterGroupName, -1);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Get a list of allowed engine versions");
        getAllowedEngines(rdsClient, dbParameterGroupFamily);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Create an Aurora DB cluster database");
        String arnClusterVal = createDBCluster(rdsClient, dbClusterGroupName,
dbName, dbInstanceClusterIdentifier,
                username, userPassword);
        System.out.println("The ARN of the cluster is " + arnClusterVal);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Wait for DB instance to be ready");
        waitForInstanceReady(rdsClient, dbInstanceClusterIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Get a list of instance classes available for the
selected engine");
        String instanceClass = getListInstanceClasses(rdsClient);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("11. Create a database instance in the cluster.");
        String clusterDBARN = createDBInstanceCluster(rdsClient,
dbInstanceIdentifier, dbInstanceClusterIdentifier,
                instanceClass);
        System.out.println("The ARN of the database is " + clusterDBARN);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Wait for DB instance to be ready");
        waitDBInstanceReady(rdsClient, dbInstanceIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("13. Create a snapshot");
        createDBClusterSnapshot(rdsClient, dbInstanceClusterIdentifier,
dbSnapshotIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("14. Wait for DB snapshot to be ready");
        waitForSnapshotReady(rdsClient, dbSnapshotIdentifier,
dbInstanceClusterIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("14. Delete the DB instance");
        deleteDatabaseInstance(rdsClient, dbInstanceIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("15. Delete the DB cluster");
        deleteCluster(rdsClient, dbInstanceClusterIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("16. Delete the DB cluster group");
        deleteDBClusterGroup(rdsClient, dbClusterGroupName, clusterDBARN);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The Scenario has successfully completed.");
        System.out.println(DASHES);
        rdsClient.close();
```

```
    }

    private static SecretsManagerClient getSecretClient() {
        Region region = Region.US_WEST_2;
        return SecretsManagerClient.builder()
                .region(region)

.credentialsProvider(EnvironmentVariableCredentialsProvider.create())
                .build();
    }

    private static String getSecretValues(String secretName) {
        SecretsManagerClient secretClient = getSecretClient();
        GetSecretValueRequest valueRequest = GetSecretValueRequest.builder()
                .secretId(secretName)
                .build();

        GetSecretValueResponse valueResponse =
secretClient.getSecretValue(valueRequest);
        return valueResponse.secretString();
    }

    public static void deleteDBClusterGroup(RdsClient rdsClient, String
dbClusterGroupName, String clusterDBARN)
            throws InterruptedException {
        try {
            boolean isDataDel = false;
            boolean didFind;
            String instanceARN;

            // Make sure that the database has been deleted.
            while (!isDataDel) {
                DescribeDbInstancesResponse response =
rdsClient.describeDBInstances();
                List<DBInstance> instanceList = response.dbInstances();
                int listSize = instanceList.size();
                didFind = false;
                int index = 1;
                for (DBInstance instance : instanceList) {
                    instanceARN = instance.dbInstanceArn();
                    if (instanceARN.compareTo(clusterDBARN) == 0) {
                        System.out.println(clusterDBARN + " still exists");
                        didFind = true;
                    }
```

```
                    if ((index == listSize) && (!didFind)) {
                        // Went through the entire list and did not find the
database ARN.
                        isDataDel = true;
                    }
                    Thread.sleep(sleepTime * 1000);
                    index++;
                }
            }

            DeleteDbClusterParameterGroupRequest clusterParameterGroupRequest =
DeleteDbClusterParameterGroupRequest
                    .builder()
                    .dbClusterParameterGroupName(dbClusterGroupName)
                    .build();

            rdsClient.deleteDBClusterParameterGroup(clusterParameterGroupRequest);
            System.out.println(dbClusterGroupName + " was deleted.");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void deleteCluster(RdsClient rdsClient, String
dbInstanceClusterIdentifier) {
        try {
            DeleteDbClusterRequest deleteDbClusterRequest =
DeleteDbClusterRequest.builder()
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .skipFinalSnapshot(true)
                    .build();

            rdsClient.deleteDBCluster(deleteDbClusterRequest);
            System.out.println(dbInstanceClusterIdentifier + " was deleted!");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

```
   public static void deleteDatabaseInstance(RdsClient rdsClient, String
dbInstanceIdentifier) {
       try {
           DeleteDbInstanceRequest deleteDbInstanceRequest =
DeleteDbInstanceRequest.builder()
                   .dbInstanceIdentifier(dbInstanceIdentifier)
                   .deleteAutomatedBackups(true)
                   .skipFinalSnapshot(true)
                   .build();

           DeleteDbInstanceResponse response =
rdsClient.deleteDBInstance(deleteDbInstanceRequest);
           System.out.println("The status of the database is " +
response.dbInstance().dbInstanceStatus());

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }

   public static void waitForSnapshotReady(RdsClient rdsClient, String
dbSnapshotIdentifier,
           String dbInstanceClusterIdentifier) {
       try {
           boolean snapshotReady = false;
           String snapshotReadyStr;
           System.out.println("Waiting for the snapshot to become available.");

           DescribeDbClusterSnapshotsRequest snapshotsRequest =
DescribeDbClusterSnapshotsRequest.builder()
                   .dbClusterSnapshotIdentifier(dbSnapshotIdentifier)
                   .dbClusterIdentifier(dbInstanceClusterIdentifier)
                   .build();

           while (!snapshotReady) {
               DescribeDbClusterSnapshotsResponse response =
rdsClient.describeDBClusterSnapshots(snapshotsRequest);
               List<DBClusterSnapshot> snapshotList =
response.dbClusterSnapshots();
               for (DBClusterSnapshot snapshot : snapshotList) {
                   snapshotReadyStr = snapshot.status();
                   if (snapshotReadyStr.contains("available")) {
                       snapshotReady = true;
```

```
                    } else {
                        System.out.println(".");
                        Thread.sleep(sleepTime * 5000);
                    }
                }
            }

            System.out.println("The Snapshot is available!");

        } catch (RdsException | InterruptedException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void createDBClusterSnapshot(RdsClient rdsClient, String
dbInstanceClusterIdentifier,
            String dbSnapshotIdentifier) {
        try {
            CreateDbClusterSnapshotRequest snapshotRequest =
CreateDbClusterSnapshotRequest.builder()
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .dbClusterSnapshotIdentifier(dbSnapshotIdentifier)
                    .build();

            CreateDbClusterSnapshotResponse response =
rdsClient.createDBClusterSnapshot(snapshotRequest);
            System.out.println("The Snapshot ARN is " +
response.dbClusterSnapshot().dbClusterSnapshotArn());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void waitDBInstanceReady(RdsClient rdsClient, String
dbInstanceIdentifier) {
        boolean instanceReady = false;
        String instanceReadyStr;
        System.out.println("Waiting for instance to become available.");
        try {
            DescribeDbInstancesRequest instanceRequest =
DescribeDbInstancesRequest.builder()
```

```
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .build();

            String endpoint = "";
            while (!instanceReady) {
                DescribeDbInstancesResponse response =
rdsClient.describeDBInstances(instanceRequest);
                List<DBInstance> instanceList = response.dbInstances();
                for (DBInstance instance : instanceList) {
                    instanceReadyStr = instance.dbInstanceStatus();
                    if (instanceReadyStr.contains("available")) {
                        endpoint = instance.endpoint().address();
                        instanceReady = true;
                    } else {
                        System.out.print(".");
                        Thread.sleep(sleepTime * 1000);
                    }
                }
            }
            System.out.println("Database instance is available! The connection
endpoint is " + endpoint);

        } catch (RdsException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static String createDBInstanceCluster(RdsClient rdsClient,
            String dbInstanceIdentifier,
            String dbInstanceClusterIdentifier,
            String instanceClass) {
        try {
            CreateDbInstanceRequest instanceRequest =
CreateDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .engine("aurora-mysql")
                    .dbInstanceClass(instanceClass)
                    .build();

            CreateDbInstanceResponse response =
rdsClient.createDBInstance(instanceRequest);
```

```
            System.out.print("The status is " +
response.dbInstance().dbInstanceStatus());
            return response.dbInstance().dbInstanceArn();

        } catch (RdsException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }

    public static String getListInstanceClasses(RdsClient rdsClient) {
        try {
            DescribeOrderableDbInstanceOptionsRequest optionsRequest =
DescribeOrderableDbInstanceOptionsRequest
                    .builder()
                    .engine("aurora-mysql")
                    .maxRecords(20)
                    .build();

            DescribeOrderableDbInstanceOptionsResponse response = rdsClient
                    .describeOrderableDBInstanceOptions(optionsRequest);
            List<OrderableDBInstanceOption> instanceOptions =
response.orderableDBInstanceOptions();
            String instanceClass = "";
            for (OrderableDBInstanceOption instanceOption : instanceOptions) {
                instanceClass = instanceOption.dbInstanceClass();
                System.out.println("The instance class is " +
instanceOption.dbInstanceClass());
                System.out.println("The engine version is " +
instanceOption.engineVersion());
            }
            return instanceClass;

        } catch (RdsException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }

    // Waits until the database instance is available.
    public static void waitForInstanceReady(RdsClient rdsClient, String
dbClusterIdentifier) {
```

```
        boolean instanceReady = false;
        String instanceReadyStr;
        System.out.println("Waiting for instance to become available.");
        try {
            DescribeDbClustersRequest instanceRequest =
DescribeDbClustersRequest.builder()
                    .dbClusterIdentifier(dbClusterIdentifier)
                    .build();

            while (!instanceReady) {
                DescribeDbClustersResponse response =
rdsClient.describeDBClusters(instanceRequest);
                List<DBCluster> clusterList = response.dbClusters();
                for (DBCluster cluster : clusterList) {
                    instanceReadyStr = cluster.status();
                    if (instanceReadyStr.contains("available")) {
                        instanceReady = true;
                    } else {
                        System.out.print(".");
                        Thread.sleep(sleepTime * 1000);
                    }
                }
            }
            System.out.println("Database cluster is available!");

        } catch (RdsException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static String createDBCluster(RdsClient rdsClient, String
dbParameterGroupFamily, String dbName,
            String dbClusterIdentifier, String userName, String password) {
        try {
            CreateDbClusterRequest clusterRequest = CreateDbClusterRequest.builder()
                    .databaseName(dbName)
                    .dbClusterIdentifier(dbClusterIdentifier)
                    .dbClusterParameterGroupName(dbParameterGroupFamily)
                    .engine("aurora-mysql")
                    .masterUsername(userName)
                    .masterUserPassword(password)
                    .build();
```

```
            CreateDbClusterResponse response =
rdsClient.createDBCluster(clusterRequest);
            return response.dbCluster().dbClusterArn();

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
    }

    // Get a list of allowed engine versions.
    public static void getAllowedEngines(RdsClient rdsClient, String
dbParameterGroupFamily) {
        try {
            DescribeDbEngineVersionsRequest versionsRequest =
DescribeDbEngineVersionsRequest.builder()
                    .dbParameterGroupFamily(dbParameterGroupFamily)
                    .engine("aurora-mysql")
                    .build();

            DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(versionsRequest);
            List<DBEngineVersion> dbEngines = response.dbEngineVersions();
            for (DBEngineVersion dbEngine : dbEngines) {
                System.out.println("The engine version is " +
dbEngine.engineVersion());
                System.out.println("The engine description is " +
dbEngine.dbEngineDescription());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Modify the auto_increment_offset parameter.
    public static void modifyDBClusterParas(RdsClient rdsClient, String
dClusterGroupName) {
        try {
            Parameter parameter1 = Parameter.builder()
                    .parameterName("auto_increment_offset")
                    .applyMethod("immediate")
```

```
                    .parameterValue("5")
                    .build();

            List<Parameter> paraList = new ArrayList<>();
            paraList.add(parameter1);
            ModifyDbClusterParameterGroupRequest groupRequest =
ModifyDbClusterParameterGroupRequest.builder()
                    .dbClusterParameterGroupName(dClusterGroupName)
                    .parameters(paraList)
                    .build();

            ModifyDbClusterParameterGroupResponse response =
rdsClient.modifyDBClusterParameterGroup(groupRequest);
            System.out.println(
                    "The parameter group " + response.dbClusterParameterGroupName()
+ " was successfully modified");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void describeDbClusterParameters(RdsClient rdsClient, String
dbCLusterGroupName, int flag) {
        try {
            DescribeDbClusterParametersRequest dbParameterGroupsRequest;
            if (flag == 0) {
                dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                        .dbClusterParameterGroupName(dbCLusterGroupName)
                        .build();
            } else {
                dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                        .dbClusterParameterGroupName(dbCLusterGroupName)
                        .source("user")
                        .build();
            }

            DescribeDbClusterParametersResponse response = rdsClient
                    .describeDBClusterParameters(dbParameterGroupsRequest);
            List<Parameter> dbParameters = response.parameters();
            String paraName;
```

```
            for (Parameter para : dbParameters) {
                // Only print out information about either auto_increment_offset or
                // auto_increment_increment.
                paraName = para.parameterName();
                if ((paraName.compareTo("auto_increment_offset") == 0)
                        || (paraName.compareTo("auto_increment_increment ") == 0)) {
                    System.out.println("*** The parameter name is  " + paraName);
                    System.out.println("*** The parameter value is  " +
para.parameterValue());
                    System.out.println("*** The parameter data type is " +
para.dataType());
                    System.out.println("*** The parameter description is " +
para.description());
                    System.out.println("*** The parameter allowed values  is " +
para.allowedValues());
                }
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void describeDbClusterParameterGroups(RdsClient rdsClient, String
dbClusterGroupName) {
        try {
            DescribeDbClusterParameterGroupsRequest groupsRequest =
DescribeDbClusterParameterGroupsRequest.builder()
                    .dbClusterParameterGroupName(dbClusterGroupName)
                    .maxRecords(20)
                    .build();

            List<DBClusterParameterGroup> groups =
rdsClient.describeDBClusterParameterGroups(groupsRequest)
                    .dbClusterParameterGroups();
            for (DBClusterParameterGroup group : groups) {
                System.out.println("The group name is " +
group.dbClusterParameterGroupName());
                System.out.println("The group ARN is " +
group.dbClusterParameterGroupArn());
            }

        } catch (RdsException e) {
```

```
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void createDBClusterParameterGroup(RdsClient rdsClient, String
dbClusterGroupName,
            String dbParameterGroupFamily) {
        try {
            CreateDbClusterParameterGroupRequest groupRequest =
CreateDbClusterParameterGroupRequest.builder()
                    .dbClusterParameterGroupName(dbClusterGroupName)
                    .dbParameterGroupFamily(dbParameterGroupFamily)
                    .description("Created by using the AWS SDK for Java")
                    .build();

            CreateDbClusterParameterGroupResponse response =
rdsClient.createDBClusterParameterGroup(groupRequest);
            System.out.println("The group name is " +
response.dbClusterParameterGroup().dbClusterParameterGroupName());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void describeDBEngines(RdsClient rdsClient) {
        try {
            DescribeDbEngineVersionsRequest engineVersionsRequest =
DescribeDbEngineVersionsRequest.builder()
                    .engine("aurora-mysql")
                    .defaultOnly(true)
                    .maxRecords(20)
                    .build();

            DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(engineVersionsRequest);
            List<DBEngineVersion> engines = response.dbEngineVersions();

            // Get all DBEngineVersion objects.
            for (DBEngineVersion engineOb : engines) {
                System.out.println("The name of the DB parameter group family for
the database engine is "
```

```
                        + engineOb.dbParameterGroupFamily());
                System.out.println("The name of the database engine " +
 engineOb.engine());
                System.out.println("The version number of the database engine " +
 engineOb.engineVersion());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CrearDBCluster
  - CrearDBClusterParameterGroup
  - Crear DBCluster instantánea
  - CrearDBInstance
  - DeleteDBCluster
  - DeleteDBClusterParameterGroup
  - DeleteDBInstance
  - DescribirDBClusterParameterGroups
  - Describa DBCluster los parámetros
  - Describa las DBCluster instantáneas
  - DescribirDBClusters
  - Describa las versiones DBEngine
  - DescribirDBInstances
  - DescribeOrderableDBInstanceOpciones
  - ModifyDBClusterParameterGroup

Acciones

`CreateDBCluster`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDBCluster`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createDBCluster(RdsClient rdsClient, String
dbParameterGroupFamily, String dbName,
           String dbClusterIdentifier, String userName, String password) {
       try {
           CreateDbClusterRequest clusterRequest = CreateDbClusterRequest.builder()
                   .databaseName(dbName)
                   .dbClusterIdentifier(dbClusterIdentifier)
                   .dbClusterParameterGroupName(dbParameterGroupFamily)
                   .engine("aurora-mysql")
                   .masterUsername(userName)
                   .masterUserPassword(password)
                   .build();

           CreateDbClusterResponse response =
rdsClient.createDBCluster(clusterRequest);
           return response.dbCluster().dbClusterArn();

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
       return "";
   }
```

- Para obtener más información sobre la API, consulta la sección Crear DBCluster en la referencia de la AWS SDK for Java 2.x API.

`CreateDBClusterParameterGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDBClusterParameterGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void createDBClusterParameterGroup(RdsClient rdsClient, String
dbClusterGroupName,
           String dbParameterGroupFamily) {
       try {
           CreateDbClusterParameterGroupRequest groupRequest =
CreateDbClusterParameterGroupRequest.builder()
                   .dbClusterParameterGroupName(dbClusterGroupName)
                   .dbParameterGroupFamily(dbParameterGroupFamily)
                   .description("Created by using the AWS SDK for Java")
                   .build();

           CreateDbClusterParameterGroupResponse response =
rdsClient.createDBClusterParameterGroup(groupRequest);
           System.out.println("The group name is " +
response.dbClusterParameterGroup().dbClusterParameterGroupName());

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta la sección Crear DBCluster ParameterGroup en la referencia de la AWS SDK for Java 2.x API.

`CreateDBClusterSnapshot`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDBClusterSnapshot`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void createDBClusterSnapshot(RdsClient rdsClient, String
dbInstanceClusterIdentifier,
           String dbSnapshotIdentifier) {
       try {
           CreateDbClusterSnapshotRequest snapshotRequest =
CreateDbClusterSnapshotRequest.builder()
                   .dbClusterIdentifier(dbInstanceClusterIdentifier)
                   .dbClusterSnapshotIdentifier(dbSnapshotIdentifier)
                   .build();

           CreateDbClusterSnapshotResponse response =
rdsClient.createDBClusterSnapshot(snapshotRequest);
           System.out.println("The Snapshot ARN is " +
response.dbClusterSnapshot().dbClusterSnapshotArn());

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta Crear DBCluster una instantánea en la referencia AWS SDK for Java 2.x de la API.

`CreateDBInstance`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDBInstance`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createDBInstanceCluster(RdsClient rdsClient,
           String dbInstanceIdentifier,
           String dbInstanceClusterIdentifier,
           String instanceClass) {
       try {
           CreateDbInstanceRequest instanceRequest =
CreateDbInstanceRequest.builder()
                   .dbInstanceIdentifier(dbInstanceIdentifier)
                   .dbClusterIdentifier(dbInstanceClusterIdentifier)
                   .engine("aurora-mysql")
                   .dbInstanceClass(instanceClass)
                   .build();

           CreateDbInstanceResponse response =
rdsClient.createDBInstance(instanceRequest);
           System.out.print("The status is " +
response.dbInstance().dbInstanceStatus());
           return response.dbInstance().dbInstanceArn();

       } catch (RdsException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
       return "";
   }
```

- Para obtener más información sobre la API, consulta la sección Crear DBInstance en la referencia de la AWS SDK for Java 2.x API.

`DeleteDBCluster`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDBCluster`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void deleteCluster(RdsClient rdsClient, String
dbInstanceClusterIdentifier) {
       try {
           DeleteDbClusterRequest deleteDbClusterRequest =
DeleteDbClusterRequest.builder()
                   .dbClusterIdentifier(dbInstanceClusterIdentifier)
                   .skipFinalSnapshot(true)
                   .build();

           rdsClient.deleteDBCluster(deleteDbClusterRequest);
           System.out.println(dbInstanceClusterIdentifier + " was deleted!");

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta Eliminar DBCluster en la referencia AWS SDK for Java 2.x de la API.

`DeleteDBClusterParameterGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDBClusterParameterGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void deleteDBClusterGroup(RdsClient rdsClient, String
dbClusterGroupName, String clusterDBARN)
           throws InterruptedException {
       try {
           boolean isDataDel = false;
           boolean didFind;
           String instanceARN;

           // Make sure that the database has been deleted.
           while (!isDataDel) {
               DescribeDbInstancesResponse response =
rdsClient.describeDBInstances();
               List<DBInstance> instanceList = response.dbInstances();
               int listSize = instanceList.size();
               didFind = false;
               int index = 1;
               for (DBInstance instance : instanceList) {
                   instanceARN = instance.dbInstanceArn();
                   if (instanceARN.compareTo(clusterDBARN) == 0) {
                       System.out.println(clusterDBARN + " still exists");
                       didFind = true;
                   }
                   if ((index == listSize) && (!didFind)) {
                       // Went through the entire list and did not find the
database ARN.
                       isDataDel = true;
                   }
                   Thread.sleep(sleepTime * 1000);
                   index++;
               }
           }

           DeleteDbClusterParameterGroupRequest clusterParameterGroupRequest =
DeleteDbClusterParameterGroupRequest
                   .builder()
                   .dbClusterParameterGroupName(dbClusterGroupName)
                   .build();

           rdsClient.deleteDBClusterParameterGroup(clusterParameterGroupRequest);
           System.out.println(dbClusterGroupName + " was deleted.");

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
```

```
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta Eliminar DBCluster ParameterGroup en la referencia AWS SDK for Java 2.x de la API.

`DeleteDBInstance`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDBInstance`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void deleteDatabaseInstance(RdsClient rdsClient, String
dbInstanceIdentifier) {
       try {
           DeleteDbInstanceRequest deleteDbInstanceRequest =
DeleteDbInstanceRequest.builder()
                   .dbInstanceIdentifier(dbInstanceIdentifier)
                   .deleteAutomatedBackups(true)
                   .skipFinalSnapshot(true)
                   .build();

           DeleteDbInstanceResponse response =
rdsClient.deleteDBInstance(deleteDbInstanceRequest);
           System.out.println("The status of the database is " +
response.dbInstance().dbInstanceStatus());

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta Eliminar DBInstance en la referencia AWS SDK for Java 2.x de la API.

`DescribeDBClusterParameterGroups`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDBClusterParameterGroups`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void describeDbClusterParameterGroups(RdsClient rdsClient, String
dbClusterGroupName) {
       try {
           DescribeDbClusterParameterGroupsRequest groupsRequest =
DescribeDbClusterParameterGroupsRequest.builder()
                   .dbClusterParameterGroupName(dbClusterGroupName)
                   .maxRecords(20)
                   .build();

           List<DBClusterParameterGroup> groups =
rdsClient.describeDBClusterParameterGroups(groupsRequest)
                   .dbClusterParameterGroups();
           for (DBClusterParameterGroup group : groups) {
               System.out.println("The group name is " +
group.dbClusterParameterGroupName());
               System.out.println("The group ARN is " +
group.dbClusterParameterGroupArn());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta la sección Describir DBCluster ParameterGroups en la referencia de la AWS SDK for Java 2.x API.

`DescribeDBClusterParameters`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDBClusterParameters`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void describeDbClusterParameters(RdsClient rdsClient, String
dbCLusterGroupName, int flag) {
       try {
           DescribeDbClusterParametersRequest dbParameterGroupsRequest;
           if (flag == 0) {
               dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                       .dbClusterParameterGroupName(dbCLusterGroupName)
                       .build();
           } else {
               dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                       .dbClusterParameterGroupName(dbCLusterGroupName)
                       .source("user")
                       .build();
           }

           DescribeDbClusterParametersResponse response = rdsClient
                   .describeDBClusterParameters(dbParameterGroupsRequest);
           List<Parameter> dbParameters = response.parameters();
           String paraName;
           for (Parameter para : dbParameters) {
               // Only print out information about either auto_increment_offset or
               // auto_increment_increment.
               paraName = para.parameterName();
               if ((paraName.compareTo("auto_increment_offset") == 0)
                       || (paraName.compareTo("auto_increment_increment ") == 0)) {
```

```
                    System.out.println("*** The parameter name is  " + paraName);
                    System.out.println("*** The parameter value is  " +
para.parameterValue());
                    System.out.println("*** The parameter data type is " +
para.dataType());
                    System.out.println("*** The parameter description is " +
para.description());
                    System.out.println("*** The parameter allowed values  is " +
para.allowedValues());
                }
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Para obtener información detallada sobre la API, consulta Describir DBCluster los parámetros en la referencia de la AWS SDK for Java 2.x API.

`DescribeDBClusterSnapshots`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDBClusterSnapshots`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void waitForSnapshotReady(RdsClient rdsClient, String
dbSnapshotIdentifier,
            String dbInstanceClusterIdentifier) {
        try {
            boolean snapshotReady = false;
            String snapshotReadyStr;
            System.out.println("Waiting for the snapshot to become available.");
```

```
            DescribeDbClusterSnapshotsRequest snapshotsRequest =
DescribeDbClusterSnapshotsRequest.builder()
                    .dbClusterSnapshotIdentifier(dbSnapshotIdentifier)
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .build();

            while (!snapshotReady) {
                DescribeDbClusterSnapshotsResponse response =
rdsClient.describeDBClusterSnapshots(snapshotsRequest);
                List<DBClusterSnapshot> snapshotList =
response.dbClusterSnapshots();
                for (DBClusterSnapshot snapshot : snapshotList) {
                    snapshotReadyStr = snapshot.status();
                    if (snapshotReadyStr.contains("available")) {
                        snapshotReady = true;
                    } else {
                        System.out.println(".");
                        Thread.sleep(sleepTime * 5000);
                    }
                }
            }

            System.out.println("The Snapshot is available!");

        } catch (RdsException | InterruptedException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulte Describir DBCluster las instantáneas en la referencia de AWS SDK for Java 2.x la API.

`DescribeDBClusters`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDBClusters`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void describeDbClusterParameters(RdsClient rdsClient, String
dbCLusterGroupName, int flag) {
       try {
           DescribeDbClusterParametersRequest dbParameterGroupsRequest;
           if (flag == 0) {
               dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                       .dbClusterParameterGroupName(dbCLusterGroupName)
                       .build();
           } else {
               dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                       .dbClusterParameterGroupName(dbCLusterGroupName)
                       .source("user")
                       .build();
           }

           DescribeDbClusterParametersResponse response = rdsClient
                   .describeDBClusterParameters(dbParameterGroupsRequest);
           List<Parameter> dbParameters = response.parameters();
           String paraName;
           for (Parameter para : dbParameters) {
               // Only print out information about either auto_increment_offset or
               // auto_increment_increment.
               paraName = para.parameterName();
               if ((paraName.compareTo("auto_increment_offset") == 0)
                       || (paraName.compareTo("auto_increment_increment ") == 0)) {
                   System.out.println("*** The parameter name is  " + paraName);
                   System.out.println("*** The parameter value is  " +
para.parameterValue());
                   System.out.println("*** The parameter data type is " +
para.dataType());
                   System.out.println("*** The parameter description is " +
para.description());
```

```
                    System.out.println("*** The parameter allowed values  is " +
para.allowedValues());
                }
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta la sección Describir DBClusters en la referencia de la AWS SDK for Java 2.x API.

`DescribeDBEngineVersions`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDBEngineVersions`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void describeDBEngines(RdsClient rdsClient) {
        try {
            DescribeDbEngineVersionsRequest engineVersionsRequest =
DescribeDbEngineVersionsRequest.builder()
                    .engine("aurora-mysql")
                    .defaultOnly(true)
                    .maxRecords(20)
                    .build();

            DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(engineVersionsRequest);
            List<DBEngineVersion> engines = response.dbEngineVersions();

            // Get all DBEngineVersion objects.
```

```
            for (DBEngineVersion engineOb : engines) {
                System.out.println("The name of the DB parameter group family for
the database engine is "
                        + engineOb.dbParameterGroupFamily());
                System.out.println("The name of the database engine " +
engineOb.engine());
                System.out.println("The version number of the database engine " +
engineOb.engineVersion());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta la sección Describir DBEngine las versiones en la referencia de la AWS SDK for Java 2.x API.

`DescribeDBInstances`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDBInstances`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    // Waits until the database instance is available.
    public static void waitForInstanceReady(RdsClient rdsClient, String
dbClusterIdentifier) {
        boolean instanceReady = false;
        String instanceReadyStr;
        System.out.println("Waiting for instance to become available.");
        try {
            DescribeDbClustersRequest instanceRequest =
DescribeDbClustersRequest.builder()
```

```
                    .dbClusterIdentifier(dbClusterIdentifier)
                    .build();

            while (!instanceReady) {
                DescribeDbClustersResponse response =
rdsClient.describeDBClusters(instanceRequest);
                List<DBCluster> clusterList = response.dbClusters();
                for (DBCluster cluster : clusterList) {
                    instanceReadyStr = cluster.status();
                    if (instanceReadyStr.contains("available")) {
                        instanceReady = true;
                    } else {
                        System.out.print(".");
                        Thread.sleep(sleepTime * 1000);
                    }
                }
            }
            System.out.println("Database cluster is available!");

        } catch (RdsException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta la sección Describir DBInstances en la referencia de la AWS SDK for Java 2.x API.

`DescribeOrderableDBInstanceOptions`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeOrderableDBInstanceOptions`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void describeDBEngines(RdsClient rdsClient) {
       try {
           DescribeDbEngineVersionsRequest engineVersionsRequest =
DescribeDbEngineVersionsRequest.builder()
                   .engine("aurora-mysql")
                   .defaultOnly(true)
                   .maxRecords(20)
                   .build();

           DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(engineVersionsRequest);
           List<DBEngineVersion> engines = response.dbEngineVersions();

           // Get all DBEngineVersion objects.
           for (DBEngineVersion engineOb : engines) {
               System.out.println("The name of the DB parameter group family for
the database engine is "
                       + engineOb.dbParameterGroupFamily());
               System.out.println("The name of the database engine " +
engineOb.engine());
               System.out.println("The version number of the database engine " +
engineOb.engineVersion());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta DescribeOrderableDBInstancelas opciones en la referencia AWS SDK for Java 2.x de la API.

`ModifyDBClusterParameterGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `ModifyDBClusterParameterGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void describeDbClusterParameterGroups(RdsClient rdsClient, String
dbClusterGroupName) {
       try {
           DescribeDbClusterParameterGroupsRequest groupsRequest =
DescribeDbClusterParameterGroupsRequest.builder()
                   .dbClusterParameterGroupName(dbClusterGroupName)
                   .maxRecords(20)
                   .build();

           List<DBClusterParameterGroup> groups =
rdsClient.describeDBClusterParameterGroups(groupsRequest)
                   .dbClusterParameterGroups();
           for (DBClusterParameterGroup group : groups) {
               System.out.println("The group name is " +
group.dbClusterParameterGroupName());
               System.out.println("The group ARN is " +
group.dbClusterParameterGroupArn());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta la sección Modificar DBCluster ParameterGroup en la referencia de la AWS SDK for Java 2.x API.

Escenarios

Crear un rastreador de elementos de trabajo de Aurora Serverless

El siguiente ejemplos de código muestra cómo crear una aplicación web que realice un seguimiento de los elementos de trabajo de una base de datos de Amazon Aurora sin servidor y use Amazon Simple Email Service (Amazon SES) para enviar informes.

SDK para Java 2.x

Muestra cómo crear una aplicación web que haga un seguimiento de los elementos de trabajo almacenados en una base de datos de Amazon RDS e informe al respecto.

Para obtener el código fuente completo y las instrucciones sobre cómo configurar una API REST de Spring que consulte los datos de Amazon Aurora Serverless y para que la utilice una aplicación React, consulte el ejemplo completo en GitHub.

Para obtener el código fuente completo y las instrucciones sobre cómo configurar y ejecutar un ejemplo que utilice la API JDBC, consulte el ejemplo completo en. GitHub

Servicios utilizados en este ejemplo

- Aurora
- Amazon RDS
- Servicio de datos de Amazon RDS
- Amazon SES

Ejemplos de escalado automático usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el AWS SDK for Java 2.x uso de Auto Scaling.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios

Introducción

Introducción al escalado automático

El siguiente ejemplo de código muestra cómo empezar a usar Auto Scaling.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.autoscaling.AutoScalingClient;
import software.amazon.awssdk.services.autoscaling.model.AutoScalingGroup;
import
 software.amazon.awssdk.services.autoscaling.model.DescribeAutoScalingGroupsResponse;
import java.util.List;

/**
 * Before running this SDK for Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeAutoScalingGroups {
    public static void main(String[] args) throws InterruptedException {
        AutoScalingClient autoScalingClient = AutoScalingClient.builder()
                .region(Region.US_EAST_1)
                .build();

        describeGroups(autoScalingClient);
    }

    public static void describeGroups(AutoScalingClient autoScalingClient) {
        DescribeAutoScalingGroupsResponse response =
 autoScalingClient.describeAutoScalingGroups();
        List<AutoScalingGroup> groups = response.autoScalingGroups();
        groups.forEach(group -> {
            System.out.println("Group Name: " + group.autoScalingGroupName());
            System.out.println("Group ARN: " + group.autoScalingGroupARN());
        });
    }
}
```

- Para obtener más información sobre la API, consulta DescribeAutoScalingGroupsla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crear un grupo de Amazon EC2 Auto Scaling con una plantilla de lanzamiento y zonas de disponibilidad y obtener información sobre las instancias en ejecución
- Habilita la recopilación de CloudWatch métricas de Amazon.
- Actualizar la capacidad deseada del grupo y esperar a que una instancia se inicie
- Terminar una instancia del grupo.
- Mostrar las actividades de escalado que se producen como respuesta a las solicitudes de los usuarios y a los cambios de capacidad
- Obtén estadísticas para CloudWatch las métricas y, a continuación, limpia los recursos.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this SDK for Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * In addition, create a launch template. For more information, see the
 * following topic:
 *
 * https://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ec2-launch-
templates.html#create-launch-template
 *
 * This code example performs the following operations:
 * 1. Creates an Auto Scaling group using an AutoScalingWaiter.
 * 2. Gets a specific Auto Scaling group and returns an instance Id value.
 * 3. Describes Auto Scaling with the Id value.
 * 4. Enables metrics collection.
 * 5. Update an Auto Scaling group.
 * 6. Describes Account details.
 * 7. Describe account details"
 * 8. Updates an Auto Scaling group to use an additional instance.
 * 9. Gets the specific Auto Scaling group and gets the number of instances.
 * 10. List the scaling activities that have occurred for the group.
 * 11. Terminates an instance in the Auto Scaling group.
 * 12. Stops the metrics collection.
 * 13. Deletes the Auto Scaling group.
 */

public class AutoScalingScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final String ROLES_STACK = "MyCdkAutoScaleStack";
    public static void main(String[] args) throws InterruptedException {
```

```
        final String usage = """

                Usage:
                    <groupName>

                Where:
                    groupName - The name of the Auto Scaling group.
                """;

        String groupName = "MyAutoScalingGroup2";
        AutoScalingClient autoScalingClient = AutoScalingClient.builder()
                .region(Region.US_WEST_2)
                .build();

        Ec2Client ec2 = Ec2Client.builder()
                .region(Region.US_WEST_2)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon EC2 Auto Scaling example
scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("First, we will create a launch template using a
CloudFormation script");
        CloudFormationHelper.deployCloudFormationStack(ROLES_STACK);
        Map<String, String> stackOutputs =
CloudFormationHelper.getStackOutputsAsync(ROLES_STACK).join();
        String launchTemplateName = stackOutputs.get("LaunchTemplateNameOutput");
        String vpcZoneId = getVPC(ec2);
        updateTemlate(ec2, launchTemplateName );
        System.out.println("The VPC zone id created by the CloudFormation stack
is"+vpcZoneId);

        System.out.println("1. Create an Auto Scaling group named " + groupName);
        createAutoScalingGroup(autoScalingClient, ec2, groupName,
launchTemplateName, vpcZoneId);

        System.out.println(
                "Wait 1 min for the resources, including the instance. Otherwise, an
empty instance Id is returned");
        Thread.sleep(60000);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("2. Get Auto Scale group Id value");
        String instanceId = getSpecificAutoScalingGroups(autoScalingClient,
groupName);
        if (instanceId.compareTo("") == 0) {
            System.out.println("Error - no instance Id value");
            System.exit(1);
        } else {
            System.out.println("The instance Id value is " + instanceId);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Describe Auto Scaling with the Id value " +
instanceId);
        describeAutoScalingInstance(autoScalingClient, instanceId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Enable metrics collection " + instanceId);
        enableMetricsCollection(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Update an Auto Scaling group to update max size to
3");
        updateAutoScalingGroup(autoScalingClient, groupName, launchTemplateName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Describe Auto Scaling groups");
        describeAutoScalingGroups(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Describe account details");
        describeAccountLimits(autoScalingClient);
        System.out.println(
                "Wait 1 min for the resources, including the instance. Otherwise, an
empty instance Id is returned");
        Thread.sleep(60000);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("8. Set desired capacity to 2");
        setDesiredCapacity(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Get the two instance Id values and state");
        getSpecificAutoScalingGroups(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. List the scaling activities that have occurred for
the group");
        describeScalingActivities(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Terminate an instance in the Auto Scaling group");
        terminateInstanceInAutoScalingGroup(autoScalingClient, instanceId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Stop the metrics collection");
        disableMetricsCollection(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("13. Delete the Auto Scaling group and cloud formation
resources");
        CloudFormationHelper.destroyCloudFormationStack(ROLES_STACK);
        deleteAutoScalingGroup(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The Scenario has successfully completed.");
        System.out.println(DASHES);

        autoScalingClient.close();
    }

    public static String getVPC(Ec2Client ec2) {
        try {
            DescribeVpcsRequest request = DescribeVpcsRequest.builder()
                    .filters(f -> f.name("isDefault").values("true"))
```

```
                    .build();

            DescribeVpcsResponse response = ec2.describeVpcs(request);

            if (!response.vpcs().isEmpty()) {
                Vpc defaultVpc = response.vpcs().get(0);
                System.out.println("Default VPC ID: " + defaultVpc.vpcId());
                return defaultVpc.vpcId();
            } else {
                System.out.println("No default VPC found.");
                return null; // Return null if no default VPC is found
            }

        } catch (Ec2Exception e) {
            System.err.println("EC2 error: " + e.awsErrorDetails().errorMessage());
            return null; // Return null in case of an error
        }
    }


    public static void updateTemlate(Ec2Client ec2, String launchTemplateName ) {
        // Step 1: Create new launch template version
        String newAmiId = "ami-0025f0db847eb6254";
        RequestLaunchTemplateData launchTemplateData =
RequestLaunchTemplateData.builder()
                .imageId(newAmiId)
                .build();

        CreateLaunchTemplateVersionRequest createVersionRequest =
CreateLaunchTemplateVersionRequest.builder()
                .launchTemplateName(launchTemplateName)
                .versionDescription("Updated with valid AMI")
                .sourceVersion("1")
                .launchTemplateData(launchTemplateData)
                .build();

        CreateLaunchTemplateVersionResponse createResponse =
ec2.createLaunchTemplateVersion(createVersionRequest);
        int newVersionNumber =
createResponse.launchTemplateVersion().versionNumber().intValue();

        // Step 2: Modify default version
        ModifyLaunchTemplateRequest modifyRequest =
ModifyLaunchTemplateRequest.builder()
```

```
                .launchTemplateName(launchTemplateName)
                .defaultVersion(String.valueOf(newVersionNumber))
                .build();

        ec2.modifyLaunchTemplate(modifyRequest);
        System.out.println("Updated launch template to version " + newVersionNumber
+ " with AMI " + newAmiId);
    }


    public static void describeScalingActivities(AutoScalingClient
autoScalingClient, String groupName) {
        try {
            DescribeScalingActivitiesRequest scalingActivitiesRequest =
DescribeScalingActivitiesRequest.builder()
                    .autoScalingGroupName(groupName)
                    .maxRecords(10)
                    .build();

            DescribeScalingActivitiesResponse response = autoScalingClient
                    .describeScalingActivities(scalingActivitiesRequest);
            List<Activity> activities = response.activities();
            for (Activity activity : activities) {
                System.out.println("The activity Id is " + activity.activityId());
                System.out.println("The activity details are " +
activity.details());
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void setDesiredCapacity(AutoScalingClient autoScalingClient,
String groupName) {
        try {
            SetDesiredCapacityRequest capacityRequest =
SetDesiredCapacityRequest.builder()
                    .autoScalingGroupName(groupName)
                    .desiredCapacity(2)
                    .build();

            autoScalingClient.setDesiredCapacity(capacityRequest);
```

```
            System.out.println("You have set the DesiredCapacity to 2");

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void createAutoScalingGroup(AutoScalingClient autoScalingClient,
                                               Ec2Client ec2Client,
                                               String groupName,
                                               String launchTemplateName,
                                               String vpcId) {
        try {
            // Step 1: Get one subnet ID in the given VPC
            DescribeSubnetsRequest subnetRequest = DescribeSubnetsRequest.builder()
                    .filters(Filter.builder().name("vpc-id").values(vpcId).build())
                    .build();

            DescribeSubnetsResponse subnetResponse =
ec2Client.describeSubnets(subnetRequest);

            if (subnetResponse.subnets().isEmpty()) {
                throw new RuntimeException("No subnets found in VPC: " + vpcId);
            }

            String subnetId = subnetResponse.subnets().get(0).subnetId(); // Use
first subnet
            System.out.println("Using subnet: " + subnetId);

            // Step 2: Create launch template reference
            LaunchTemplateSpecification templateSpecification =
LaunchTemplateSpecification.builder()
                    .launchTemplateName(launchTemplateName)
                    .build();

            // Step 3: Create Auto Scaling group
            CreateAutoScalingGroupRequest request =
CreateAutoScalingGroupRequest.builder()
                    .autoScalingGroupName(groupName)
                    .launchTemplate(templateSpecification)
                    .minSize(1)
                    .maxSize(1)
                    .vpcZoneIdentifier(subnetId)  // Correct: subnet ID, not VPC ID
```

```
                    .build();

            autoScalingClient.createAutoScalingGroup(request);

            // Step 4: Wait until group is created
            AutoScalingWaiter waiter = autoScalingClient.waiter();
            DescribeAutoScalingGroupsRequest groupsRequest =
DescribeAutoScalingGroupsRequest.builder()
                    .autoScalingGroupNames(groupName)
                    .build();

            WaiterResponse<DescribeAutoScalingGroupsResponse> waiterResponse =
                    waiter.waitUntilGroupExists(groupsRequest);

            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Auto Scaling Group created");

        } catch (Ec2Exception | AutoScalingException e) {
            System.err.println("Error: " + e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void describeAutoScalingInstance(AutoScalingClient
autoScalingClient, String id) {
        try {
            DescribeAutoScalingInstancesRequest describeAutoScalingInstancesRequest
= DescribeAutoScalingInstancesRequest
                    .builder()
                    .instanceIds(id)
                    .build();

            DescribeAutoScalingInstancesResponse response = autoScalingClient

.describeAutoScalingInstances(describeAutoScalingInstancesRequest);
            List<AutoScalingInstanceDetails> instances =
response.autoScalingInstances();
            for (AutoScalingInstanceDetails instance : instances) {
                System.out.println("The instance lifecycle state is: " +
instance.lifecycleState());
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
    }

    public static void describeAutoScalingGroups(AutoScalingClient
autoScalingClient, String groupName) {
        try {
            DescribeAutoScalingGroupsRequest groupsRequest =
DescribeAutoScalingGroupsRequest.builder()
                    .autoScalingGroupNames(groupName)
                    .maxRecords(10)
                    .build();

            DescribeAutoScalingGroupsResponse response =
autoScalingClient.describeAutoScalingGroups(groupsRequest);
            List<AutoScalingGroup> groups = response.autoScalingGroups();
            for (AutoScalingGroup group : groups) {
                System.out.println("*** The service to use for the health checks: "
+ group.healthCheckType());
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static String getSpecificAutoScalingGroups(AutoScalingClient
autoScalingClient, String groupName) {
        try {
            String instanceId = "";
            DescribeAutoScalingGroupsRequest scalingGroupsRequest =
DescribeAutoScalingGroupsRequest.builder()
                    .autoScalingGroupNames(groupName)
                    .build();

            DescribeAutoScalingGroupsResponse response = autoScalingClient
                    .describeAutoScalingGroups(scalingGroupsRequest);
            List<AutoScalingGroup> groups = response.autoScalingGroups();
            for (AutoScalingGroup group : groups) {
                System.out.println("The group name is " +
group.autoScalingGroupName());
                System.out.println("The group ARN is " +
group.autoScalingGroupARN());
```

```
                List<Instance> instances = group.instances();

                for (Instance instance : instances) {
                    instanceId = instance.instanceId();
                    System.out.println("The instance id is " + instanceId);
                    System.out.println("The lifecycle state is " +
instance.lifecycleState());
                }
            }

            return instanceId;
        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static void enableMetricsCollection(AutoScalingClient autoScalingClient,
String groupName) {
        try {
            EnableMetricsCollectionRequest collectionRequest =
EnableMetricsCollectionRequest.builder()
                    .autoScalingGroupName(groupName)
                    .metrics("GroupMaxSize")
                    .granularity("1Minute")
                    .build();

            autoScalingClient.enableMetricsCollection(collectionRequest);
            System.out.println("The enable metrics collection operation was
successful");

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void disableMetricsCollection(AutoScalingClient autoScalingClient,
String groupName) {
        try {
            DisableMetricsCollectionRequest disableMetricsCollectionRequest =
DisableMetricsCollectionRequest.builder()
                    .autoScalingGroupName(groupName)
```

```
                    .metrics("GroupMaxSize")
                    .build();


autoScalingClient.disableMetricsCollection(disableMetricsCollectionRequest);
            System.out.println("The disable metrics collection operation was
successful");

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void describeAccountLimits(AutoScalingClient autoScalingClient) {
        try {
            DescribeAccountLimitsResponse response =
autoScalingClient.describeAccountLimits();
            System.out.println("The max number of auto scaling groups is " +
response.maxNumberOfAutoScalingGroups());
            System.out.println("The current number of auto scaling groups is " +
response.numberOfAutoScalingGroups());

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void updateAutoScalingGroup(AutoScalingClient autoScalingClient,
String groupName,
            String launchTemplateName) {
        try {
            AutoScalingWaiter waiter = autoScalingClient.waiter();
            LaunchTemplateSpecification templateSpecification =
LaunchTemplateSpecification.builder()
                    .launchTemplateName(launchTemplateName)
                    .build();

            UpdateAutoScalingGroupRequest groupRequest =
UpdateAutoScalingGroupRequest.builder()
                    .maxSize(3)
                    .autoScalingGroupName(groupName)
                    .launchTemplate(templateSpecification)
```

```
                    .build();

            autoScalingClient.updateAutoScalingGroup(groupRequest);
            DescribeAutoScalingGroupsRequest groupsRequest =
DescribeAutoScalingGroupsRequest.builder()
                    .autoScalingGroupNames(groupName)
                    .build();

            WaiterResponse<DescribeAutoScalingGroupsResponse> waiterResponse =
waiter
                    .waitUntilGroupInService(groupsRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("You successfully updated the auto scaling group  " +
groupName);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void terminateInstanceInAutoScalingGroup(AutoScalingClient
autoScalingClient, String instanceId) {
        try {
            TerminateInstanceInAutoScalingGroupRequest request =
TerminateInstanceInAutoScalingGroupRequest.builder()
                    .instanceId(instanceId)
                    .shouldDecrementDesiredCapacity(false)
                    .build();

            autoScalingClient.terminateInstanceInAutoScalingGroup(request);
            System.out.println("You have terminated instance " + instanceId);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteAutoScalingGroup(AutoScalingClient autoScalingClient,
String groupName) {
        try {
            DeleteAutoScalingGroupRequest deleteAutoScalingGroupRequest =
DeleteAutoScalingGroupRequest.builder()
```

```
                    .autoScalingGroupName(groupName)
                    .forceDelete(true)
                    .build();

            autoScalingClient.deleteAutoScalingGroup(deleteAutoScalingGroupRequest);
            System.out.println("You successfully deleted " + groupName);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateAutoScalingGroup
  - DeleteAutoScalingGroup
  - DescribeAutoScalingGroups
  - DescribeAutoScalingInstances
  - DescribeScalingActivities
  - DisableMetricsCollection
  - EnableMetricsCollection
  - SetDesiredCapacity
  - TerminateInstanceInAutoScalingGroup
  - UpdateAutoScalingGroup

Acciones

`CreateAutoScalingGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateAutoScalingGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.autoscaling.AutoScalingClient;
import software.amazon.awssdk.services.autoscaling.model.AutoScalingException;
import
 software.amazon.awssdk.services.autoscaling.model.CreateAutoScalingGroupRequest;
import
 software.amazon.awssdk.services.autoscaling.model.DescribeAutoScalingGroupsRequest;
import
 software.amazon.awssdk.services.autoscaling.model.DescribeAutoScalingGroupsResponse;
import
 software.amazon.awssdk.services.autoscaling.model.LaunchTemplateSpecification;
import software.amazon.awssdk.services.autoscaling.waiters.AutoScalingWaiter;

/**
 * Before running this SDK for Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateAutoScalingGroup {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <groupName> <launchTemplateName> <serviceLinkedRoleARN>
 <vpcZoneId>

                Where:
                    groupName - The name of the Auto Scaling group.
                    launchTemplateName - The name of the launch template.\s
```

```
                    vpcZoneId - A subnet Id for a virtual private cloud (VPC) where
instances in the Auto Scaling group can be created.
                """";

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String groupName = args[0];
        String launchTemplateName = args[1];
        String vpcZoneId = args[2];
        AutoScalingClient autoScalingClient = AutoScalingClient.builder()
                .region(Region.US_EAST_1)
                .build();

        createAutoScalingGroup(autoScalingClient, groupName, launchTemplateName,
vpcZoneId);
        autoScalingClient.close();
    }

    public static void createAutoScalingGroup(AutoScalingClient autoScalingClient,
            String groupName,
            String launchTemplateName,
            String vpcZoneId) {

        try {
            AutoScalingWaiter waiter = autoScalingClient.waiter();
            LaunchTemplateSpecification templateSpecification =
LaunchTemplateSpecification.builder()
                    .launchTemplateName(launchTemplateName)
                    .build();

            CreateAutoScalingGroupRequest request =
CreateAutoScalingGroupRequest.builder()
                    .autoScalingGroupName(groupName)
                    .availabilityZones("us-east-1a")
                    .launchTemplate(templateSpecification)
                    .maxSize(1)
                    .minSize(1)
                    .vpcZoneIdentifier(vpcZoneId)
                    .build();

            autoScalingClient.createAutoScalingGroup(request);
```

```
            DescribeAutoScalingGroupsRequest groupsRequest =
 DescribeAutoScalingGroupsRequest.builder()
                    .autoScalingGroupNames(groupName)
                    .build();

            WaiterResponse<DescribeAutoScalingGroupsResponse> waiterResponse =
 waiter
                    .waitUntilGroupExists(groupsRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Auto Scaling Group created");

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta CreateAutoScalingGroupla Referencia AWS SDK for Java 2.x de la API.

`DeleteAutoScalingGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteAutoScalingGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.autoscaling.AutoScalingClient;
import software.amazon.awssdk.services.autoscaling.model.AutoScalingException;
import
 software.amazon.awssdk.services.autoscaling.model.DeleteAutoScalingGroupRequest;

/**
```

```
 * Before running this SDK for Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteAutoScalingGroup {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <groupName>

                Where:
                    groupName - The name of the Auto Scaling group.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String groupName = args[0];
        AutoScalingClient autoScalingClient = AutoScalingClient.builder()
                .region(Region.US_EAST_1)
                .build();

        deleteAutoScalingGroup(autoScalingClient, groupName);
        autoScalingClient.close();
    }

    public static void deleteAutoScalingGroup(AutoScalingClient autoScalingClient,
 String groupName) {
        try {
            DeleteAutoScalingGroupRequest deleteAutoScalingGroupRequest =
 DeleteAutoScalingGroupRequest.builder()
                    .autoScalingGroupName(groupName)
                    .forceDelete(true)
                    .build();

            autoScalingClient.deleteAutoScalingGroup(deleteAutoScalingGroupRequest);
            System.out.println("You successfully deleted " + groupName);
```

```
        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteAutoScalingGroupla Referencia AWS SDK for Java 2.x de la API.

`DescribeAutoScalingGroups`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeAutoScalingGroups`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.autoscaling.AutoScalingClient;
import software.amazon.awssdk.services.autoscaling.model.AutoScalingException;
import software.amazon.awssdk.services.autoscaling.model.AutoScalingGroup;
import
 software.amazon.awssdk.services.autoscaling.model.DescribeAutoScalingGroupsResponse;
import
 software.amazon.awssdk.services.autoscaling.model.DescribeAutoScalingGroupsRequest;
import software.amazon.awssdk.services.autoscaling.model.Instance;
import java.util.List;

/**
 * Before running this SDK for Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class DescribeAutoScalingInstances {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <groupName>

                Where:
                    groupName - The name of the Auto Scaling group.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String groupName = args[0];
        AutoScalingClient autoScalingClient = AutoScalingClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String instanceId = getAutoScaling(autoScalingClient, groupName);
        System.out.println(instanceId);
        autoScalingClient.close();
    }

    public static String getAutoScaling(AutoScalingClient autoScalingClient, String
 groupName) {
        try {
            String instanceId = "";
            DescribeAutoScalingGroupsRequest scalingGroupsRequest =
 DescribeAutoScalingGroupsRequest.builder()
                    .autoScalingGroupNames(groupName)
                    .build();

            DescribeAutoScalingGroupsResponse response = autoScalingClient
                    .describeAutoScalingGroups(scalingGroupsRequest);
            List<AutoScalingGroup> groups = response.autoScalingGroups();
            for (AutoScalingGroup group : groups) {
                System.out.println("The group name is " +
 group.autoScalingGroupName());
                System.out.println("The group ARN is " +
 group.autoScalingGroupARN());
```

```
                List<Instance> instances = group.instances();
                for (Instance instance : instances) {
                    instanceId = instance.instanceId();
                }
            }
            return instanceId;
        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulta DescribeAutoScalingGroupsla Referencia AWS SDK for Java 2.x de la API.

`DescribeAutoScalingInstances`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeAutoScalingInstances`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void describeAutoScalingInstance(AutoScalingClient
autoScalingClient, String id) {
        try {
            DescribeAutoScalingInstancesRequest describeAutoScalingInstancesRequest
= DescribeAutoScalingInstancesRequest
                    .builder()
                    .instanceIds(id)
                    .build();

            DescribeAutoScalingInstancesResponse response = autoScalingClient
```

```
.describeAutoScalingInstances(describeAutoScalingInstancesRequest);
           List<AutoScalingInstanceDetails> instances =
response.autoScalingInstances();
           for (AutoScalingInstanceDetails instance : instances) {
               System.out.println("The instance lifecycle state is: " +
instance.lifecycleState());
           }

       } catch (AutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta DescribeAutoScalingInstancesla Referencia AWS SDK for Java 2.x de la API.

`DescribeScalingActivities`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeScalingActivities`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void describeScalingActivities(AutoScalingClient
autoScalingClient, String groupName) {
       try {
           DescribeScalingActivitiesRequest scalingActivitiesRequest =
DescribeScalingActivitiesRequest.builder()
                   .autoScalingGroupName(groupName)
                   .maxRecords(10)
                   .build();

           DescribeScalingActivitiesResponse response = autoScalingClient
```

```
                    .describeScalingActivities(scalingActivitiesRequest);
            List<Activity> activities = response.activities();
            for (Activity activity : activities) {
                System.out.println("The activity Id is " + activity.activityId());
                System.out.println("The activity details are " +
activity.details());
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta DescribeScalingActivitiesla Referencia AWS SDK for Java 2.x de la API.

`DisableMetricsCollection`

En el siguiente ejemplo de código, se muestra cómo utilizar `DisableMetricsCollection`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void disableMetricsCollection(AutoScalingClient autoScalingClient,
String groupName) {
        try {
            DisableMetricsCollectionRequest disableMetricsCollectionRequest =
DisableMetricsCollectionRequest.builder()
                    .autoScalingGroupName(groupName)
                    .metrics("GroupMaxSize")
                    .build();


autoScalingClient.disableMetricsCollection(disableMetricsCollectionRequest);
```

```
            System.out.println("The disable metrics collection operation was
successful");

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta DisableMetricsCollectionla Referencia AWS SDK for Java 2.x de la API.

`EnableMetricsCollection`

En el siguiente ejemplo de código, se muestra cómo utilizar `EnableMetricsCollection`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void enableMetricsCollection(AutoScalingClient autoScalingClient,
String groupName) {
        try {
            EnableMetricsCollectionRequest collectionRequest =
EnableMetricsCollectionRequest.builder()
                    .autoScalingGroupName(groupName)
                    .metrics("GroupMaxSize")
                    .granularity("1Minute")
                    .build();

            autoScalingClient.enableMetricsCollection(collectionRequest);
            System.out.println("The enable metrics collection operation was
successful");

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta EnableMetricsCollectionla Referencia AWS SDK for Java 2.x de la API.

`SetDesiredCapacity`

En el siguiente ejemplo de código, se muestra cómo utilizar `SetDesiredCapacity`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void setDesiredCapacity(AutoScalingClient autoScalingClient,
String groupName) {
       try {
           SetDesiredCapacityRequest capacityRequest =
SetDesiredCapacityRequest.builder()
                   .autoScalingGroupName(groupName)
                   .desiredCapacity(2)
                   .build();

           autoScalingClient.setDesiredCapacity(capacityRequest);
           System.out.println("You have set the DesiredCapacity to 2");

       } catch (AutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta SetDesiredCapacityla Referencia AWS SDK for Java 2.x de la API.

`TerminateInstanceInAutoScalingGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `TerminateInstanceInAutoScalingGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void terminateInstanceInAutoScalingGroup(AutoScalingClient
autoScalingClient, String instanceId) {
       try {
           TerminateInstanceInAutoScalingGroupRequest request =
TerminateInstanceInAutoScalingGroupRequest.builder()
                   .instanceId(instanceId)
                   .shouldDecrementDesiredCapacity(false)
                   .build();

           autoScalingClient.terminateInstanceInAutoScalingGroup(request);
           System.out.println("You have terminated instance " + instanceId);

       } catch (AutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta TerminateInstanceInAutoScalingGroupla Referencia AWS SDK for Java 2.x de la API.

`UpdateAutoScalingGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateAutoScalingGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void updateAutoScalingGroup(AutoScalingClient autoScalingClient,
String groupName,
           String launchTemplateName) {
       try {
           AutoScalingWaiter waiter = autoScalingClient.waiter();
           LaunchTemplateSpecification templateSpecification =
LaunchTemplateSpecification.builder()
                   .launchTemplateName(launchTemplateName)
                   .build();

           UpdateAutoScalingGroupRequest groupRequest =
UpdateAutoScalingGroupRequest.builder()
                   .maxSize(3)
                   .autoScalingGroupName(groupName)
                   .launchTemplate(templateSpecification)
                   .build();

           autoScalingClient.updateAutoScalingGroup(groupRequest);
           DescribeAutoScalingGroupsRequest groupsRequest =
DescribeAutoScalingGroupsRequest.builder()
                   .autoScalingGroupNames(groupName)
                   .build();

           WaiterResponse<DescribeAutoScalingGroupsResponse> waiterResponse =
waiter
                   .waitUntilGroupInService(groupsRequest);
           waiterResponse.matched().response().ifPresent(System.out::println);
           System.out.println("You successfully updated the auto scaling group  " +
groupName);

       } catch (AutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
```

```
    }
```

- Para obtener más información sobre la API, consulta UpdateAutoScalingGroupla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación y administración de un servicio resiliente

El siguiente ejemplo de código muestra cómo crear un servicio web con equilibrio de carga que muestre recomendaciones de libros, películas y canciones. El ejemplo muestra cómo responde el servicio a los errores y cómo reestructurarlo para aumentar la resiliencia cuando se produzcan errores.

- Utilice un grupo de Amazon EC2 Auto Scaling para crear instancias de Amazon Elastic Compute Cloud (Amazon EC2) basadas en una plantilla de lanzamiento y para mantener el número de instancias dentro de un rango específico.
- Administre y distribuya las solicitudes HTTP con Elastic Load Balancing.
- Supervise el estado de las instancias de un grupo de escalado automático y reenvíe las solicitudes solo a las instancias en buen estado.
- Ejecute un servidor web Python en cada instancia de EC2 para administrar las solicitudes HTTP. El servidor web responde con recomendaciones y comprobaciones de estado.
- Simule un servicio de recomendaciones con una tabla de Amazon DynamoDB.
- Controle la respuesta del servidor web a las solicitudes y las comprobaciones de estado actualizando AWS Systems Manager los parámetros.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute el escenario interactivo en un símbolo del sistema.

```
public class Main {

    public static final String fileName = "C:\\AWS\\resworkflow\
\recommendations.json"; // Modify file location.
    public static final String tableName = "doc-example-recommendation-service";
    public static final String startScript = "C:\\AWS\\resworkflow\
\server_startup_script.sh"; // Modify file location.
    public static final String policyFile = "C:\\AWS\\resworkflow\
\instance_policy.json"; // Modify file location.
    public static final String ssmJSON = "C:\\AWS\\resworkflow\
\ssm_only_policy.json"; // Modify file location.
    public static final String failureResponse = "doc-example-resilient-
architecture-failure-response";
    public static final String healthCheck = "doc-example-resilient-architecture-
health-check";
    public static final String templateName = "doc-example-resilience-template";
    public static final String roleName = "doc-example-resilience-role";
    public static final String policyName = "doc-example-resilience-pol";
    public static final String profileName = "doc-example-resilience-prof";

    public static final String badCredsProfileName = "doc-example-resilience-prof-
bc";

    public static final String targetGroupName = "doc-example-resilience-tg";
    public static final String autoScalingGroupName = "doc-example-resilience-
group";
    public static final String lbName = "doc-example-resilience-lb";
    public static final String protocol = "HTTP";
    public static final int port = 80;

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws IOException, InterruptedException
 {
        Scanner in = new Scanner(System.in);
        Database database = new Database();
        AutoScaler autoScaler = new AutoScaler();
        LoadBalancer loadBalancer = new LoadBalancer();

        System.out.println(DASHES);
        System.out.println("Welcome to the demonstration of How to Build and Manage
 a Resilient Service!");
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("A - SETUP THE RESOURCES");
        System.out.println("Press Enter when you're ready to start deploying
resources.");
        in.nextLine();
        deploy(loadBalancer);
        System.out.println(DASHES);
        System.out.println(DASHES);
        System.out.println("B - DEMO THE RESILIENCE FUNCTIONALITY");
        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        demo(loadBalancer);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("C - DELETE THE RESOURCES");
        System.out.println("""
                This concludes the demo of how to build and manage a resilient
service.
                To keep things tidy and to avoid unwanted charges on your account,
we can clean up all AWS resources
                that were created for this demo.
                """);

        System.out.println("\n Do you want to delete the resources (y/n)? ");
        String userInput = in.nextLine().trim().toLowerCase(); // Capture user input

        if (userInput.equals("y")) {
            // Delete resources here
            deleteResources(loadBalancer, autoScaler, database);
            System.out.println("Resources deleted.");
        } else {
            System.out.println("""
                    Okay, we'll leave the resources intact.
                    Don't forget to delete them when you're done with them or you
might incur unexpected charges.
                    """);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The example has completed. ");
        System.out.println("\n Thanks for watching!");
```

```
        System.out.println(DASHES);
    }

    // Deletes the AWS resources used in this example.
    private static void deleteResources(LoadBalancer loadBalancer, AutoScaler
autoScaler, Database database)
            throws IOException, InterruptedException {
        loadBalancer.deleteLoadBalancer(lbName);
        System.out.println("*** Wait 30 secs for resource to be deleted");
        TimeUnit.SECONDS.sleep(30);
        loadBalancer.deleteTargetGroup(targetGroupName);
        autoScaler.deleteAutoScaleGroup(autoScalingGroupName);
        autoScaler.deleteRolesPolicies(policyName, roleName, profileName);
        autoScaler.deleteTemplate(templateName);
        database.deleteTable(tableName);
    }

    private static void deploy(LoadBalancer loadBalancer) throws
InterruptedException, IOException {
        Scanner in = new Scanner(System.in);
        System.out.println(
                """
                        For this demo, we'll use the AWS SDK for Java (v2) to create
several AWS resources
                        to set up a load-balanced web service endpoint and explore
some ways to make it resilient
                        against various kinds of failures.

                        Some of the resources create by this demo are:
                        \t* A DynamoDB table that the web service depends on to
provide book, movie, and song recommendations.
                        \t* An EC2 launch template that defines EC2 instances that
each contain a Python web server.
                        \t* An EC2 Auto Scaling group that manages EC2 instances
across several Availability Zones.
                        \t* An Elastic Load Balancing (ELB) load balancer that
targets the Auto Scaling group to distribute requests.
                        """);

        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("Creating and populating a DynamoDB table named " +
tableName);
        Database database = new Database();
        database.createTable(tableName, fileName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
                Creating an EC2 launch template that runs '{startup_script}' when an
instance starts.
                This script starts a Python web server defined in the `server.py`
script. The web server
                listens to HTTP requests on port 80 and responds to requests to '/'
and to '/healthcheck'.
                For demo purposes, this server is run as the root user. In
production, the best practice is to
                run a web server, such as Apache, with least-privileged credentials.

                The template also defines an IAM policy that each instance uses to
assume a role that grants
                permissions to access the DynamoDB recommendation table and Systems
Manager parameters
                that control the flow of the demo.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        templateCreator.createTemplate(policyFile, policyName, profileName,
startScript, templateName, roleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(
                "Creating an EC2 Auto Scaling group that maintains three EC2
instances, each in a different Availability Zone.");
        System.out.println("*** Wait 30 secs for the VPC to be created");
        TimeUnit.SECONDS.sleep(30);
        AutoScaler autoScaler = new AutoScaler();
        String[] zones = autoScaler.createGroup(3, templateName,
autoScalingGroupName);

        System.out.println("""
                At this point, you have EC2 instances created. Once each instance
starts, it listens for
```

```
                HTTP requests. You can see these instances in the console or
continue with the demo.
                Press Enter when you're ready to continue.
                """);

        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Creating variables that control the flow of the demo.");
        ParameterHelper paramHelper = new ParameterHelper();
        paramHelper.reset();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
                Creating an Elastic Load Balancing target group and load balancer.
The target group
                defines how the load balancer connects to instances. The load
balancer provides a
                single endpoint where clients connect and dispatches requests to
instances in the group.
                """);

        String vpcId = autoScaler.getDefaultVPC();
        List<Subnet> subnets = autoScaler.getSubnets(vpcId, zones);
        System.out.println("You have retrieved a list with " + subnets.size() + "
subnets");
        String targetGroupArn = loadBalancer.createTargetGroup(protocol, port,
vpcId, targetGroupName);
        String elbDnsName = loadBalancer.createLoadBalancer(subnets, targetGroupArn,
lbName, port, protocol);
        autoScaler.attachLoadBalancerTargetGroup(autoScalingGroupName,
targetGroupArn);
        System.out.println("Verifying access to the load balancer endpoint...");
        boolean wasSuccessul = loadBalancer.verifyLoadBalancerEndpoint(elbDnsName);
        if (!wasSuccessul) {
            System.out.println("Couldn't connect to the load balancer, verifying
that the port is open...");
            CloseableHttpClient httpClient = HttpClients.createDefault();

            // Create an HTTP GET request to "http://checkip.amazonaws.com"
            HttpGet httpGet = new HttpGet("http://checkip.amazonaws.com");
            try {
```

```
                // Execute the request and get the response
                HttpResponse response = httpClient.execute(httpGet);

                // Read the response content.
                String ipAddress =
IOUtils.toString(response.getEntity().getContent(), StandardCharsets.UTF_8).trim();

                // Print the public IP address.
                System.out.println("Public IP Address: " + ipAddress);
                GroupInfo groupInfo = autoScaler.verifyInboundPort(vpcId, port,
ipAddress);
                if (!groupInfo.isPortOpen()) {
                    System.out.println("""
                            For this example to work, the default security group for
your default VPC must
                            allow access from this computer. You can either add it
automatically from this
                            example or add it yourself using the AWS Management
Console.
                            """);

                    System.out.println(
                            "Do you want to add a rule to security group " +
groupInfo.getGroupName() + " to allow");
                    System.out.println("inbound traffic on port " + port + " from
your computer's IP address (y/n) ");
                    String ans = in.nextLine();
                    if ("y".equalsIgnoreCase(ans)) {
                        autoScaler.openInboundPort(groupInfo.getGroupName(),
String.valueOf(port), ipAddress);
                        System.out.println("Security group rule added.");
                    } else {
                        System.out.println("No security group rule added.");
                    }
                }

            } catch (AutoScalingException e) {
                e.printStackTrace();
            }
        } else if (wasSuccessul) {
            System.out.println("Your load balancer is ready. You can access it by
browsing to:");
            System.out.println("\t http://" + elbDnsName);
        } else {
```

```
            System.out.println("Couldn't get a successful response from the load
balancer endpoint. Troubleshoot by");
            System.out.println("manually verifying that your VPC and security group
are configured correctly and that");
            System.out.println("you can successfully make a GET request to the load
balancer.");
        }

        System.out.println("Press Enter when you're ready to continue with the
demo.");
        in.nextLine();
    }

    // A method that controls the demo part of the Java program.
    public static void demo(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        ParameterHelper paramHelper = new ParameterHelper();
        System.out.println("Read the ssm_only_policy.json file");
        String ssmOnlyPolicy = readFileAsString(ssmJSON);

        System.out.println("Resetting parameters to starting values for demo.");
        paramHelper.reset();

        System.out.println(
                """
                        This part of the demonstration shows how to toggle
different parts of the system
                        to create situations where the web service fails, and shows
how using a resilient
                        architecture can keep the web service running in spite of
these failures.

                        At the start, the load balancer endpoint returns
recommendations and reports that all targets are healthy.
                       """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        The web service running on the EC2 instances gets
recommendations by querying a DynamoDB table.
                        The table name is contained in a Systems Manager parameter
named self.param_helper.table.
```

```
                        To simulate a failure of the recommendation service, let's
set this parameter to name a non-existent table.
                        """);
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        System.out.println(
                """
                        \nNow, sending a GET request to the load balancer endpoint
returns a failure code. But, the service reports as
                        healthy to the load balancer because shallow health checks
don't check for failure of the recommendation service.
                        """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        Instead of failing when the recommendation service fails,
the web service can return a static response.
                        While this is not a perfect solution, it presents the
customer with a somewhat better experience than failure.
                        """);
        paramHelper.put(paramHelper.failureResponse, "static");

        System.out.println("""
                Now, sending a GET request to the load balancer endpoint returns a
static response.
                The service still reports as healthy because health checks are still
shallow.
                """);
        demoChoices(loadBalancer);

        System.out.println("Let's reinstate the recommendation service.");
        paramHelper.put(paramHelper.tableName, paramHelper.dyntable);

        System.out.println("""
                Let's also substitute bad credentials for one of the instances in
the target group so that it can't
                access the DynamoDB recommendation table. We will get an instance id
value.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        AutoScaler autoScaler = new AutoScaler();
```

```
        // Create a new instance profile based on badCredsProfileName.
        templateCreator.createInstanceProfile(policyFile, policyName,
badCredsProfileName, roleName);
        String badInstanceId = autoScaler.getBadInstance(autoScalingGroupName);
        System.out.println("The bad instance id values used for this demo is " +
badInstanceId);

        String profileAssociationId = autoScaler.getInstanceProfile(badInstanceId);
        System.out.println("The association Id value is " + profileAssociationId);
        System.out.println("Replacing the profile for instance " + badInstanceId
                + " with a profile that contains bad credentials");
        autoScaler.replaceInstanceProfile(badInstanceId, badCredsProfileName,
profileAssociationId);

        System.out.println(
                """
                        Now, sending a GET request to the load balancer endpoint
returns either a recommendation or a static response,
                        depending on which instance is selected by the load
balancer.
                        """);

        demoChoices(loadBalancer);

        System.out.println("""
                Let's implement a deep health check. For this demo, a deep health
check tests whether
                the web service can access the DynamoDB table that it depends on for
recommendations. Note that
                the deep health check is only for ELB routing and not for Auto
Scaling instance health.
                This kind of deep health check is not recommended for Auto Scaling
instance health, because it
                risks accidental termination of all instances in the Auto Scaling
group when a dependent service fails.
                """);

        System.out.println("""
                By implementing deep health checks, the load balancer can detect
when one of the instances is failing
                and take that instance out of rotation.
                """);

        paramHelper.put(paramHelper.healthCheck, "deep");
```

```
        System.out.println("""
                Now, checking target health indicates that the instance with bad
credentials
                is unhealthy. Note that it might take a minute or two for the load
balancer to detect the unhealthy
                instance. Sending a GET request to the load balancer endpoint always
returns a recommendation, because
                the load balancer takes unhealthy instances out of its rotation.
                """);

        demoChoices(loadBalancer);

        System.out.println(
                """
                        Because the instances in this demo are controlled by an auto
scaler, the simplest way to fix an unhealthy
                        instance is to terminate it and let the auto scaler start a
new instance to replace it.
                        """);
        autoScaler.terminateInstance(badInstanceId);

        System.out.println("""
                Even while the instance is terminating and the new instance is
starting, sending a GET
                request to the web service continues to get a successful
recommendation response because
                the load balancer routes requests to the healthy instances. After
the replacement instance
                starts and reports as healthy, it is included in the load balancing
rotation.
                Note that terminating and replacing an instance typically takes
several minutes, during which time you
                can see the changing health check status until the new instance is
running and healthy.
                """);

        demoChoices(loadBalancer);
        System.out.println(
                "If the recommendation service fails now, deep health checks mean
all instances report as unhealthy.");
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        demoChoices(loadBalancer);
```

```
        paramHelper.reset();
    }

    public static void demoChoices(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        String[] actions = {
                "Send a GET request to the load balancer endpoint.",
                "Check the health of load balancer targets.",
                "Go to the next part of the demo."
        };
        Scanner scanner = new Scanner(System.in);

        while (true) {
            System.out.println("-".repeat(88));
            System.out.println("See the current state of the service by selecting
one of the following choices:");
            for (int i = 0; i < actions.length; i++) {
                System.out.println(i + ": " + actions[i]);
            }

            try {
                System.out.print("\nWhich action would you like to take? ");
                int choice = scanner.nextInt();
                System.out.println("-".repeat(88));

                switch (choice) {
                    case 0 -> {
                        System.out.println("Request:\n");
                        System.out.println("GET http://" +
loadBalancer.getEndpoint(lbName));
                        CloseableHttpClient httpClient =
HttpClients.createDefault();

                        // Create an HTTP GET request to the ELB.
                        HttpGet httpGet = new HttpGet("http://" +
loadBalancer.getEndpoint(lbName));

                        // Execute the request and get the response.
                        HttpResponse response = httpClient.execute(httpGet);
                        int statusCode = response.getStatusLine().getStatusCode();
                        System.out.println("HTTP Status Code: " + statusCode);

                        // Display the JSON response
                        BufferedReader reader = new BufferedReader(
```

```
                                new
InputStreamReader(response.getEntity().getContent()));
                        StringBuilder jsonResponse = new StringBuilder();
                        String line;
                        while ((line = reader.readLine()) != null) {
                            jsonResponse.append(line);
                        }
                        reader.close();

                        // Print the formatted JSON response.
                        System.out.println("Full Response:\n");
                        System.out.println(jsonResponse.toString());

                        // Close the HTTP client.
                        httpClient.close();

                    }
                    case 1 -> {
                        System.out.println("\nChecking the health of load balancer
targets:\n");
                        List<TargetHealthDescription> health =
loadBalancer.checkTargetHealth(targetGroupName);
                        for (TargetHealthDescription target : health) {
                            System.out.printf("\tTarget %s on port %d is %s%n",
target.target().id(),
                                    target.target().port(),
target.targetHealth().stateAsString());
                        }
                        System.out.println("""
                                Note that it can take a minute or two for the health
check to update
                                after changes are made.
                                """);
                    }
                    case 2 -> {
                        System.out.println("\nOkay, let's move on.");
                        System.out.println("-".repeat(88));
                        return; // Exit the method when choice is 2
                    }
                    default -> System.out.println("You must choose a value between
0-2. Please select again.");
                }

            } catch (java.util.InputMismatchException e) {
```

```
                System.out.println("Invalid input. Please select again.");
                scanner.nextLine(); // Clear the input buffer.
            }
        }
    }

    public static String readFileAsString(String filePath) throws IOException {
        byte[] bytes = Files.readAllBytes(Paths.get(filePath));
        return new String(bytes);
    }
}
```

Cree una clase que agrupe las acciones de escalado automático y Amazon EC2.

```
public class AutoScaler {

    private static Ec2Client ec2Client;
    private static AutoScalingClient autoScalingClient;
    private static IamClient iamClient;

    private static SsmClient ssmClient;

    private IamClient getIAMClient() {
        if (iamClient == null) {
            iamClient = IamClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return iamClient;
    }

    private SsmClient getSSMClient() {
        if (ssmClient == null) {
            ssmClient = SsmClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ssmClient;
    }

    private Ec2Client getEc2Client() {
        if (ec2Client == null) {
```

```
            ec2Client = Ec2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ec2Client;
    }

    private AutoScalingClient getAutoScalingClient() {
        if (autoScalingClient == null) {
            autoScalingClient = AutoScalingClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return autoScalingClient;
    }

    /**
     * Terminates and instances in an EC2 Auto Scaling group. After an instance is
     * terminated, it can no longer be accessed.
     */
    public void terminateInstance(String instanceId) {
        TerminateInstanceInAutoScalingGroupRequest terminateInstanceIRequest =
TerminateInstanceInAutoScalingGroupRequest
                .builder()
                .instanceId(instanceId)
                .shouldDecrementDesiredCapacity(false)
                .build();


getAutoScalingClient().terminateInstanceInAutoScalingGroup(terminateInstanceIRequest);
        System.out.format("Terminated instance %s.", instanceId);
    }

    /**
     * Replaces the profile associated with a running instance. After the profile is
     * replaced, the instance is rebooted to ensure that it uses the new profile.
     * When
     * the instance is ready, Systems Manager is used to restart the Python web
     * server.
     */
    public void replaceInstanceProfile(String instanceId, String
newInstanceProfileName, String profileAssociationId)
            throws InterruptedException {
        // Create an IAM instance profile specification.
```

```
        software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
iamInstanceProfile =
software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
                .builder()
                .name(newInstanceProfileName) // Make sure 'newInstanceProfileName'
is a valid IAM Instance Profile
                                                // name.
                .build();

        // Replace the IAM instance profile association for the EC2 instance.
        ReplaceIamInstanceProfileAssociationRequest replaceRequest =
ReplaceIamInstanceProfileAssociationRequest
                .builder()
                .iamInstanceProfile(iamInstanceProfile)
                .associationId(profileAssociationId) // Make sure
'profileAssociationId' is a valid association ID.
                .build();

        try {
            getEc2Client().replaceIamInstanceProfileAssociation(replaceRequest);
            // Handle the response as needed.
        } catch (Ec2Exception e) {
            // Handle exceptions, log, or report the error.
            System.err.println("Error: " + e.getMessage());
        }
        System.out.format("Replaced instance profile for association %s with profile
%s.", profileAssociationId,
                newInstanceProfileName);
        TimeUnit.SECONDS.sleep(15);
        boolean instReady = false;
        int tries = 0;

        // Reboot after 60 seconds
        while (!instReady) {
            if (tries % 6 == 0) {
                getEc2Client().rebootInstances(RebootInstancesRequest.builder()
                        .instanceIds(instanceId)
                        .build());
                System.out.println("Rebooting instance " + instanceId + " and
waiting for it to be ready.");
            }
            tries++;
            try {
                TimeUnit.SECONDS.sleep(10);
```

```
            } catch (InterruptedException e) {
                e.printStackTrace();
            }

            DescribeInstanceInformationResponse informationResponse =
getSSMClient().describeInstanceInformation();
            List<InstanceInformation> instanceInformationList =
informationResponse.instanceInformationList();
            for (InstanceInformation info : instanceInformationList) {
                if (info.instanceId().equals(instanceId)) {
                    instReady = true;
                    break;
                }
            }
        }

        SendCommandRequest sendCommandRequest = SendCommandRequest.builder()
                .instanceIds(instanceId)
                .documentName("AWS-RunShellScript")
                .parameters(Collections.singletonMap("commands",
                        Collections.singletonList("cd / && sudo python3 server.py
80")))
                .build();

        getSSMClient().sendCommand(sendCommandRequest);
        System.out.println("Restarted the Python web server on instance " +
instanceId + ".");
    }

    public void openInboundPort(String secGroupId, String port, String ipAddress) {
        AuthorizeSecurityGroupIngressRequest ingressRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                .groupName(secGroupId)
                .cidrIp(ipAddress)
                .fromPort(Integer.parseInt(port))
                .build();

        getEc2Client().authorizeSecurityGroupIngress(ingressRequest);
        System.out.format("Authorized ingress to %s on port %s from %s.",
secGroupId, port, ipAddress);
    }

    /**
     * Detaches a role from an instance profile, detaches policies from the role,
```

```
     * and deletes all the resources.
     */
    public void deleteInstanceProfile(String roleName, String profileName) {
        try {
            software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
getInstanceProfileRequest =
software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
                    .builder()
                    .instanceProfileName(profileName)
                    .build();

            GetInstanceProfileResponse response =
getIAMClient().getInstanceProfile(getInstanceProfileRequest);
            String name = response.instanceProfile().instanceProfileName();
            System.out.println(name);

            RemoveRoleFromInstanceProfileRequest profileRequest =
RemoveRoleFromInstanceProfileRequest.builder()
                    .instanceProfileName(profileName)
                    .roleName(roleName)
                    .build();

            getIAMClient().removeRoleFromInstanceProfile(profileRequest);
            DeleteInstanceProfileRequest deleteInstanceProfileRequest =
DeleteInstanceProfileRequest.builder()
                    .instanceProfileName(profileName)
                    .build();

            getIAMClient().deleteInstanceProfile(deleteInstanceProfileRequest);
            System.out.println("Deleted instance profile " + profileName);

            DeleteRoleRequest deleteRoleRequest = DeleteRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            // List attached role policies.
            ListAttachedRolePoliciesResponse rolesResponse = getIAMClient()
                    .listAttachedRolePolicies(role -> role.roleName(roleName));
            List<AttachedPolicy> attachedPolicies =
rolesResponse.attachedPolicies();
            for (AttachedPolicy attachedPolicy : attachedPolicies) {
                DetachRolePolicyRequest request = DetachRolePolicyRequest.builder()
                        .roleName(roleName)
                        .policyArn(attachedPolicy.policyArn())
```

```
                        .build();

                getIAMClient().detachRolePolicy(request);
                System.out.println("Detached and deleted policy " +
attachedPolicy.policyName());
            }

            getIAMClient().deleteRole(deleteRoleRequest);
            System.out.println("Instance profile and role deleted.");

        } catch (IamException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public void deleteTemplate(String templateName) {
        getEc2Client().deleteLaunchTemplate(name ->
name.launchTemplateName(templateName));
        System.out.format(templateName + " was deleted.");
    }

    public void deleteAutoScaleGroup(String groupName) {
        DeleteAutoScalingGroupRequest deleteAutoScalingGroupRequest =
DeleteAutoScalingGroupRequest.builder()
                .autoScalingGroupName(groupName)
                .forceDelete(true)
                .build();


getAutoScalingClient().deleteAutoScalingGroup(deleteAutoScalingGroupRequest);
        System.out.println(groupName + " was deleted.");
    }

    /*
     * Verify the default security group of the specified VPC allows ingress from
     * this
     * computer. This can be done by allowing ingress from this computer's IP
     * address. In some situations, such as connecting from a corporate network, you
     * must instead specify a prefix list ID. You can also temporarily open the port
     * to
     * any IP address while running this example. If you do, be sure to remove
     * public
     * access when you're done.
```

```
     *
     */
    public GroupInfo verifyInboundPort(String VPC, int port, String ipAddress) {
        boolean portIsOpen = false;
        GroupInfo groupInfo = new GroupInfo();
        try {
            Filter filter = Filter.builder()
                    .name("group-name")
                    .values("default")
                    .build();

            Filter filter1 = Filter.builder()
                    .name("vpc-id")
                    .values(VPC)
                    .build();

            DescribeSecurityGroupsRequest securityGroupsRequest =
DescribeSecurityGroupsRequest.builder()
                    .filters(filter, filter1)
                    .build();

            DescribeSecurityGroupsResponse securityGroupsResponse = getEc2Client()
                    .describeSecurityGroups(securityGroupsRequest);
            String securityGroup =
securityGroupsResponse.securityGroups().get(0).groupName();
            groupInfo.setGroupName(securityGroup);

            for (SecurityGroup secGroup : securityGroupsResponse.securityGroups()) {
                System.out.println("Found security group: " + secGroup.groupId());

                for (IpPermission ipPermission : secGroup.ipPermissions()) {
                    if (ipPermission.fromPort() == port) {
                        System.out.println("Found inbound rule: " + ipPermission);
                        for (IpRange ipRange : ipPermission.ipRanges()) {
                            String cidrIp = ipRange.cidrIp();
                            if (cidrIp.startsWith(ipAddress) ||
cidrIp.equals("0.0.0.0/0")) {
                                System.out.println(cidrIp + " is applicable");
                                portIsOpen = true;
                            }
                        }

                        if (!ipPermission.prefixListIds().isEmpty()) {
                            System.out.println("Prefix lList is applicable");
```

```
                            portIsOpen = true;
                        }

                        if (!portIsOpen) {
                            System.out
                                    .println("The inbound rule does not appear to be
open to either this computer's IP,"
                                            + " all IP addresses (0.0.0.0/0), or to
a prefix list ID.");
                        } else {
                            break;
                        }
                    }
                }
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }

        groupInfo.setPortOpen(portIsOpen);
        return groupInfo;
    }

    /*
     * Attaches an Elastic Load Balancing (ELB) target group to this EC2 Auto
     * Scaling group.
     * The target group specifies how the load balancer forward requests to the
     * instances
     * in the group.
     */
    public void attachLoadBalancerTargetGroup(String asGroupName, String
targetGroupARN) {
        try {
            AttachLoadBalancerTargetGroupsRequest targetGroupsRequest =
AttachLoadBalancerTargetGroupsRequest.builder()
                    .autoScalingGroupName(asGroupName)
                    .targetGroupARNs(targetGroupARN)
                    .build();


getAutoScalingClient().attachLoadBalancerTargetGroups(targetGroupsRequest);
            System.out.println("Attached load balancer to " + asGroupName);
```

```
        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Creates an EC2 Auto Scaling group with the specified size.
    public String[] createGroup(int groupSize, String templateName, String
autoScalingGroupName) {

        // Get availability zones.
        software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
zonesRequest =
software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
                .builder()
                .build();

        DescribeAvailabilityZonesResponse zonesResponse =
getEc2Client().describeAvailabilityZones(zonesRequest);
        List<String> availabilityZoneNames =
zonesResponse.availabilityZones().stream()

.map(software.amazon.awssdk.services.ec2.model.AvailabilityZone::zoneName)
                .collect(Collectors.toList());

        String availabilityZones = String.join(",", availabilityZoneNames);
        LaunchTemplateSpecification specification =
LaunchTemplateSpecification.builder()
                .launchTemplateName(templateName)
                .version("$Default")
                .build();

        String[] zones = availabilityZones.split(",");
        CreateAutoScalingGroupRequest groupRequest =
CreateAutoScalingGroupRequest.builder()
                .launchTemplate(specification)
                .availabilityZones(zones)
                .maxSize(groupSize)
                .minSize(groupSize)
                .autoScalingGroupName(autoScalingGroupName)
                .build();

        try {
            getAutoScalingClient().createAutoScalingGroup(groupRequest);
```

```
        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Created an EC2 Auto Scaling group named " +
autoScalingGroupName);
        return zones;
    }

    public String getDefaultVPC() {
        // Define the filter.
        Filter defaultFilter = Filter.builder()
                .name("is-default")
                .values("true")
                .build();

        software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest request =
software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest
                .builder()
                .filters(defaultFilter)
                .build();

        DescribeVpcsResponse response = getEc2Client().describeVpcs(request);
        return response.vpcs().get(0).vpcId();
    }

    // Gets the default subnets in a VPC for a specified list of Availability Zones.
    public List<Subnet> getSubnets(String vpcId, String[] availabilityZones) {
        List<Subnet> subnets = null;
        Filter vpcFilter = Filter.builder()
                .name("vpc-id")
                .values(vpcId)
                .build();

        Filter azFilter = Filter.builder()
                .name("availability-zone")
                .values(availabilityZones)
                .build();

        Filter defaultForAZ = Filter.builder()
                .name("default-for-az")
                .values("true")
                .build();
```

```
        DescribeSubnetsRequest request = DescribeSubnetsRequest.builder()
                .filters(vpcFilter, azFilter, defaultForAZ)
                .build();

        DescribeSubnetsResponse response = getEc2Client().describeSubnets(request);
        subnets = response.subnets();
        return subnets;
    }

    // Gets data about the instances in the EC2 Auto Scaling group.
    public String getBadInstance(String groupName) {
        DescribeAutoScalingGroupsRequest request =
DescribeAutoScalingGroupsRequest.builder()
                .autoScalingGroupNames(groupName)
                .build();

        DescribeAutoScalingGroupsResponse response =
getAutoScalingClient().describeAutoScalingGroups(request);
        AutoScalingGroup autoScalingGroup = response.autoScalingGroups().get(0);
        List<String> instanceIds = autoScalingGroup.instances().stream()
                .map(instance -> instance.instanceId())
                .collect(Collectors.toList());

        String[] instanceIdArray = instanceIds.toArray(new String[0]);
        for (String instanceId : instanceIdArray) {
            System.out.println("Instance ID: " + instanceId);
            return instanceId;
        }
        return "";
    }

    // Gets data about the profile associated with an instance.
    public String getInstanceProfile(String instanceId) {
        Filter filter = Filter.builder()
                .name("instance-id")
                .values(instanceId)
                .build();

        DescribeIamInstanceProfileAssociationsRequest associationsRequest =
DescribeIamInstanceProfileAssociationsRequest
                .builder()
                .filters(filter)
                .build();
```

```
        DescribeIamInstanceProfileAssociationsResponse response = getEc2Client()
                .describeIamInstanceProfileAssociations(associationsRequest);
        return response.iamInstanceProfileAssociations().get(0).associationId();
    }

    public void deleteRolesPolicies(String policyName, String roleName, String
 InstanceProfile) {
        ListPoliciesRequest listPoliciesRequest =
 ListPoliciesRequest.builder().build();
        ListPoliciesResponse listPoliciesResponse =
 getIAMClient().listPolicies(listPoliciesRequest);
        for (Policy policy : listPoliciesResponse.policies()) {
            if (policy.policyName().equals(policyName)) {
                // List the entities (users, groups, roles) that are attached to the
 policy.

 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
 listEntitiesRequest =
 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
                        .builder()
                        .policyArn(policy.arn())
                        .build();
                ListEntitiesForPolicyResponse listEntitiesResponse = iamClient
                        .listEntitiesForPolicy(listEntitiesRequest);
                if (!listEntitiesResponse.policyGroups().isEmpty() || !
listEntitiesResponse.policyUsers().isEmpty()
                        || !listEntitiesResponse.policyRoles().isEmpty()) {
                    // Detach the policy from any entities it is attached to.
                    DetachRolePolicyRequest detachPolicyRequest =
 DetachRolePolicyRequest.builder()
                            .policyArn(policy.arn())
                            .roleName(roleName) // Specify the name of the IAM role
                            .build();

                    getIAMClient().detachRolePolicy(detachPolicyRequest);
                    System.out.println("Policy detached from entities.");
                }

                // Now, you can delete the policy.
                DeletePolicyRequest deletePolicyRequest =
 DeletePolicyRequest.builder()
                        .policyArn(policy.arn())
                        .build();
```

```
                getIAMClient().deletePolicy(deletePolicyRequest);
                System.out.println("Policy deleted successfully.");
                break;
            }
        }

        // List the roles associated with the instance profile
        ListInstanceProfilesForRoleRequest listRolesRequest =
 ListInstanceProfilesForRoleRequest.builder()
                .roleName(roleName)
                .build();

        // Detach the roles from the instance profile
        ListInstanceProfilesForRoleResponse listRolesResponse =
 iamClient.listInstanceProfilesForRole(listRolesRequest);
        for (software.amazon.awssdk.services.iam.model.InstanceProfile profile :
 listRolesResponse.instanceProfiles()) {
            RemoveRoleFromInstanceProfileRequest removeRoleRequest =
 RemoveRoleFromInstanceProfileRequest.builder()
                    .instanceProfileName(InstanceProfile)
                    .roleName(roleName) // Remove the extra dot here
                    .build();

            getIAMClient().removeRoleFromInstanceProfile(removeRoleRequest);
            System.out.println("Role " + roleName + " removed from instance profile
 " + InstanceProfile);
        }

        // Delete the instance profile after removing all roles
        DeleteInstanceProfileRequest deleteInstanceProfileRequest =
 DeleteInstanceProfileRequest.builder()
                .instanceProfileName(InstanceProfile)
                .build();

        getIAMClient().deleteInstanceProfile(r ->
 r.instanceProfileName(InstanceProfile));
        System.out.println(InstanceProfile + " Deleted");
        System.out.println("All roles and policies are deleted.");
    }
}
```

Cree una clase que resuma las acciones de Elastic Load Balancing.

```
public class LoadBalancer {
    public ElasticLoadBalancingV2Client elasticLoadBalancingV2Client;

    public ElasticLoadBalancingV2Client getLoadBalancerClient() {
        if (elasticLoadBalancingV2Client == null) {
            elasticLoadBalancingV2Client = ElasticLoadBalancingV2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }

        return elasticLoadBalancingV2Client;
    }

    // Checks the health of the instances in the target group.
    public List<TargetHealthDescription> checkTargetHealth(String targetGroupName) {
        DescribeTargetGroupsRequest targetGroupsRequest =
 DescribeTargetGroupsRequest.builder()
                .names(targetGroupName)
                .build();

        DescribeTargetGroupsResponse tgResponse =
 getLoadBalancerClient().describeTargetGroups(targetGroupsRequest);

        DescribeTargetHealthRequest healthRequest =
 DescribeTargetHealthRequest.builder()
                .targetGroupArn(tgResponse.targetGroups().get(0).targetGroupArn())
                .build();

        DescribeTargetHealthResponse healthResponse =
 getLoadBalancerClient().describeTargetHealth(healthRequest);
        return healthResponse.targetHealthDescriptions();
    }

    // Gets the HTTP endpoint of the load balancer.
    public String getEndpoint(String lbName) {
        DescribeLoadBalancersResponse res = getLoadBalancerClient()
                .describeLoadBalancers(describe -> describe.names(lbName));
        return res.loadBalancers().get(0).dnsName();
    }

    // Deletes a load balancer.
    public void deleteLoadBalancer(String lbName) {
```

```
        try {
            // Use a waiter to delete the Load Balancer.
            DescribeLoadBalancersResponse res = getLoadBalancerClient()
                    .describeLoadBalancers(describe -> describe.names(lbName));
            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                    .loadBalancerArns(res.loadBalancers().get(0).loadBalancerArn())
                    .build();

            getLoadBalancerClient().deleteLoadBalancer(
                    builder ->
builder.loadBalancerArn(res.loadBalancers().get(0).loadBalancerArn()));
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancersDeleted(request);
            waiterResponse.matched().response().ifPresent(System.out::println);

        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(lbName + " was deleted.");
    }

    // Deletes the target group.
    public void deleteTargetGroup(String targetGroupName) {
        try {
            DescribeTargetGroupsResponse res = getLoadBalancerClient()
                    .describeTargetGroups(describe ->
describe.names(targetGroupName));
            getLoadBalancerClient()
                    .deleteTargetGroup(builder ->
builder.targetGroupArn(res.targetGroups().get(0).targetGroupArn()));
        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(targetGroupName + " was deleted.");
    }

    // Verify this computer can successfully send a GET request to the load balancer
    // endpoint.
    public boolean verifyLoadBalancerEndpoint(String elbDnsName) throws IOException,
InterruptedException {
```

```
        boolean success = false;
        int retries = 3;
        CloseableHttpClient httpClient = HttpClients.createDefault();

        // Create an HTTP GET request to the ELB.
        HttpGet httpGet = new HttpGet("http://" + elbDnsName);
        try {
            while ((!success) && (retries > 0)) {
                // Execute the request and get the response.
                HttpResponse response = httpClient.execute(httpGet);
                int statusCode = response.getStatusLine().getStatusCode();
                System.out.println("HTTP Status Code: " + statusCode);
                if (statusCode == 200) {
                    success = true;
                } else {
                    retries--;
                    System.out.println("Got connection error from load balancer
endpoint, retrying...");
                    TimeUnit.SECONDS.sleep(15);
                }
            }

        } catch (org.apache.http.conn.HttpHostConnectException e) {
            System.out.println(e.getMessage());
        }

        System.out.println("Status.." + success);
        return success;
    }

    /*
     * Creates an Elastic Load Balancing target group. The target group specifies
     * how
     * the load balancer forward requests to instances in the group and how instance
     * health is checked.
     */
    public String createTargetGroup(String protocol, int port, String vpcId, String
targetGroupName) {
        CreateTargetGroupRequest targetGroupRequest =
CreateTargetGroupRequest.builder()
                .healthCheckPath("/healthcheck")
                .healthCheckTimeoutSeconds(5)
                .port(port)
                .vpcId(vpcId)
```

```
                .name(targetGroupName)
                .protocol(protocol)
                .build();

        CreateTargetGroupResponse targetGroupResponse =
getLoadBalancerClient().createTargetGroup(targetGroupRequest);
        String targetGroupArn =
targetGroupResponse.targetGroups().get(0).targetGroupArn();
        String targetGroup =
targetGroupResponse.targetGroups().get(0).targetGroupName();
        System.out.println("The " + targetGroup + " was created with ARN" +
targetGroupArn);
        return targetGroupArn;
    }

    /*
     * Creates an Elastic Load Balancing load balancer that uses the specified
     * subnets
     * and forwards requests to the specified target group.
     */
    public String createLoadBalancer(List<Subnet> subnetIds, String targetGroupARN,
String lbName, int port,
            String protocol) {
        try {
            List<String> subnetIdStrings = subnetIds.stream()
                    .map(Subnet::subnetId)
                    .collect(Collectors.toList());

            CreateLoadBalancerRequest balancerRequest =
CreateLoadBalancerRequest.builder()
                    .subnets(subnetIdStrings)
                    .name(lbName)
                    .scheme("internet-facing")
                    .build();

            // Create and wait for the load balancer to become available.
            CreateLoadBalancerResponse lsResponse =
getLoadBalancerClient().createLoadBalancer(balancerRequest);
            String lbARN = lsResponse.loadBalancers().get(0).loadBalancerArn();

            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
```

```
                    .loadBalancerArns(lbARN)
                    .build();

            System.out.println("Waiting for Load Balancer " + lbName + " to become
 available.");
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
 loadBalancerWaiter
                    .waitUntilLoadBalancerAvailable(request);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Load Balancer " + lbName + " is available.");

            // Get the DNS name (endpoint) of the load balancer.
            String lbDNSName = lsResponse.loadBalancers().get(0).dnsName();
            System.out.println("*** Load Balancer DNS Name: " + lbDNSName);

            // Create a listener for the load balance.
            Action action = Action.builder()
                    .targetGroupArn(targetGroupARN)
                    .type("forward")
                    .build();

            CreateListenerRequest listenerRequest = CreateListenerRequest.builder()

 .loadBalancerArn(lsResponse.loadBalancers().get(0).loadBalancerArn())
                    .defaultActions(action)
                    .port(port)
                    .protocol(protocol)
                    .build();

            getLoadBalancerClient().createListener(listenerRequest);
            System.out.println("Created listener to forward traffic from load
 balancer " + lbName + " to target group "
                    + targetGroupARN);

            // Return the load balancer DNS name.
            return lbDNSName;

        } catch (ElasticLoadBalancingV2Exception e) {
            e.printStackTrace();
        }
        return "";
    }
}
```

Cree una clase que utilice DynamoDB para simular un servicio de recomendaciones.

```
public class Database {

    private static DynamoDbClient dynamoDbClient;

    public static DynamoDbClient getDynamoDbClient() {
        if (dynamoDbClient == null) {
            dynamoDbClient = DynamoDbClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return dynamoDbClient;
    }

    // Checks to see if the Amazon DynamoDB table exists.
    private boolean doesTableExist(String tableName) {
        try {
            // Describe the table and catch any exceptions.
            DescribeTableRequest describeTableRequest =
 DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            getDynamoDbClient().describeTable(describeTableRequest);
            System.out.println("Table '" + tableName + "' exists.");
            return true;

        } catch (ResourceNotFoundException e) {
            System.out.println("Table '" + tableName + "' does not exist.");
        } catch (DynamoDbException e) {
            System.err.println("Error checking table existence: " + e.getMessage());
        }
        return false;
    }

    /*
     * Creates a DynamoDB table to use a recommendation service. The table has a
     * hash key named 'MediaType' that defines the type of media recommended, such
     * as
     * Book or Movie, and a range key named 'ItemId' that, combined with the
```

```
     * MediaType,
     * forms a unique identifier for the recommended item.
     */
    public void createTable(String tableName, String fileName) throws IOException {
        // First check to see if the table exists.
        boolean doesExist = doesTableExist(tableName);
        if (!doesExist) {
            DynamoDbWaiter dbWaiter = getDynamoDbClient().waiter();
            CreateTableRequest createTableRequest = CreateTableRequest.builder()
                    .tableName(tableName)
                    .attributeDefinitions(
                            AttributeDefinition.builder()
                                    .attributeName("MediaType")
                                    .attributeType(ScalarAttributeType.S)
                                    .build(),
                            AttributeDefinition.builder()
                                    .attributeName("ItemId")
                                    .attributeType(ScalarAttributeType.N)
                                    .build())
                    .keySchema(
                            KeySchemaElement.builder()
                                    .attributeName("MediaType")
                                    .keyType(KeyType.HASH)
                                    .build(),
                            KeySchemaElement.builder()
                                    .attributeName("ItemId")
                                    .keyType(KeyType.RANGE)
                                    .build())
                    .provisionedThroughput(
                            ProvisionedThroughput.builder()
                                    .readCapacityUnits(5L)
                                    .writeCapacityUnits(5L)
                                    .build())
                    .build();

            getDynamoDbClient().createTable(createTableRequest);
            System.out.println("Creating table " + tableName + "...");

            // Wait until the Amazon DynamoDB table is created.
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();
```

```
            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Table " + tableName + " created.");

            // Add records to the table.
            populateTable(fileName, tableName);
        }
    }

    public void deleteTable(String tableName) {
        getDynamoDbClient().deleteTable(table -> table.tableName(tableName));
        System.out.println("Table " + tableName + " deleted.");
    }

    // Populates the table with data located in a JSON file using the DynamoDB
    // enhanced client.
    public void populateTable(String fileName, String tableName) throws IOException
{
        DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
                .dynamoDbClient(getDynamoDbClient())
                .build();
        ObjectMapper objectMapper = new ObjectMapper();
        File jsonFile = new File(fileName);
        JsonNode rootNode = objectMapper.readTree(jsonFile);

        DynamoDbTable<Recommendation> mappedTable = enhancedClient.table(tableName,
                TableSchema.fromBean(Recommendation.class));
        for (JsonNode currentNode : rootNode) {
            String mediaType = currentNode.path("MediaType").path("S").asText();
            int itemId = currentNode.path("ItemId").path("N").asInt();
            String title = currentNode.path("Title").path("S").asText();
            String creator = currentNode.path("Creator").path("S").asText();

            // Create a Recommendation object and set its properties.
            Recommendation rec = new Recommendation();
            rec.setMediaType(mediaType);
            rec.setItemId(itemId);
            rec.setTitle(title);
            rec.setCreator(creator);

            // Put the item into the DynamoDB table.
            mappedTable.putItem(rec); // Add the Recommendation to the list.
        }
```

```
        System.out.println("Added all records to the " + tableName);
    }
}
```

Cree una clase que agrupe las acciones de Systems Manager.

```
public class ParameterHelper {

    String tableName = "doc-example-resilient-architecture-table";
    String dyntable = "doc-example-recommendation-service";
    String failureResponse = "doc-example-resilient-architecture-failure-response";
    String healthCheck = "doc-example-resilient-architecture-health-check";

    public void reset() {
        put(dyntable, tableName);
        put(failureResponse, "none");
        put(healthCheck, "shallow");
    }

    public void put(String name, String value) {
        SsmClient ssmClient = SsmClient.builder()
                .region(Region.US_EAST_1)
                .build();

        PutParameterRequest parameterRequest = PutParameterRequest.builder()
                .name(name)
                .value(value)
                .overwrite(true)
                .type("String")
                .build();

        ssmClient.putParameter(parameterRequest);
        System.out.printf("Setting demo parameter %s to '%s'.", name, value);
    }
}
```

- Para obtener información sobre la API, consulte los siguientes temas en la referencia de la API de AWS SDK for Java 2.x .
  - AttachLoadBalancerTargetGroups
  - CreateAutoScalingGroup

- CreateInstanceProfile
- CreateLaunchTemplate
- CreateListener
- CreateLoadBalancer
- CreateTargetGroup
- DeleteAutoScalingGroup
- DeleteInstanceProfile
- DeleteLaunchTemplate
- DeleteLoadBalancer
- DeleteTargetGroup
- DescribeAutoScalingGroups
- DescribeAvailabilityZones
- DescribeIamInstanceProfileAssociations
- DescribeInstances
- DescribeLoadBalancers
- DescribeSubnets
- DescribeTargetGroups
- DescribeTargetHealth
- DescribeVpcs
- RebootInstances
- ReplaceIamInstanceProfileAssociation
- TerminateInstanceInAutoScalingGroup
- UpdateAutoScalingGroup

AWS Batch ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with AWS Batch.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hola AWS Batch

En el siguiente ejemplo de código se muestra cómo empezar a utilizar AWS Batch.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.core.retry.RetryPolicy;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.batch.BatchAsyncClient;
import software.amazon.awssdk.services.batch.model.JobStatus;
import software.amazon.awssdk.services.batch.model.JobSummary;
import software.amazon.awssdk.services.batch.model.ListJobsRequest;
import software.amazon.awssdk.services.batch.paginators.ListJobsPublisher;
import java.time.Duration;
import java.util.ArrayList;
import java.util.List;
import java.util.concurrent.CompletableFuture;
```

```
public class HelloBatch {
    private static BatchAsyncClient batchClient;

    public static void main(String[] args) {
        List<JobSummary> jobs = listJobs("my-job-queue");
        jobs.forEach(job ->
            System.out.printf("Job ID: %s, Job Name: %s, Job Status: %s%n",
                job.jobId(), job.jobName(), job.status())
        );
    }

    public static List<JobSummary> listJobs(String jobQueue) {
        if (jobQueue == null || jobQueue.isEmpty()) {
            throw new IllegalArgumentException("Job queue cannot be null or empty");
        }

        ListJobsRequest listJobsRequest = ListJobsRequest.builder()
            .jobQueue(jobQueue)
            .jobStatus(JobStatus.SUCCEEDED)
            .build();

        List<JobSummary> jobSummaries = new ArrayList<>();
        ListJobsPublisher listJobsPaginator =
 getAsyncClient().listJobsPaginator(listJobsRequest);
        CompletableFuture<Void> future = listJobsPaginator.subscribe(response -> {
            jobSummaries.addAll(response.jobSummaryList());
        });

        future.join();
        return jobSummaries;
    }

    private static BatchAsyncClient getAsyncClient() {
        SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
            .maxConcurrency(100)  // Increase max concurrency to handle more
 simultaneous connections.
            .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
 timeout.
            .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
            .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
            .build();
```

```
        ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
            .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
 timeout.
            .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the individual
 call attempt timeout.
            .retryPolicy(RetryPolicy.builder()  // Add a retry policy to handle
 transient errors.
                .numRetries(3)  // Number of retry attempts.
                .build())
            .build();

        if (batchClient == null) {
            batchClient = BatchAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return batchClient;
    }
}
```

- Para obtener más información sobre la API, consulta listJobsPaginatorla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Cree un entorno de AWS Batch cómputo.
- Comprobar el estado del entorno de computación.
- Configure una cola de AWS Batch trabajos y una definición de trabajos.
- Registrar una definición de trabajo.
- Presente un AWS Batch trabajo.
- Obtener una lista de trabajos aplicables a la cola de trabajos.
- Comprobar el estado de un trabajo.

- Eliminar AWS Batch recursos.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario interactivo que demuestre AWS Batch las funciones.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.batch.model.BatchException;
import software.amazon.awssdk.services.batch.model.ClientException;
import software.amazon.awssdk.services.batch.model.CreateComputeEnvironmentResponse;
import software.amazon.awssdk.services.batch.model.JobSummary;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeSecurityGroupsRequest;
import software.amazon.awssdk.services.ec2.model.DescribeSecurityGroupsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeSubnetsRequest;
import software.amazon.awssdk.services.ec2.model.DescribeSubnetsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest;
import software.amazon.awssdk.services.ec2.model.Filter;
import software.amazon.awssdk.services.ec2.model.SecurityGroup;
import software.amazon.awssdk.services.ec2.model.Subnet;
import software.amazon.awssdk.services.ec2.model.Vpc;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import java.util.List;
import java.util.Map;
import java.util.Scanner;
import java.util.UUID;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * NOTE
 * This scenario submits a job that pulls a Docker image named echo-text from Amazon
 ECR to Amazon Fargate.
 *
 * To place this Docker image on Amazon ECR, run the following Basics scenario.
 *
 * https://github.com/awsdocs/aws-doc-sdk-examples/tree/main/javav2/example_code/ecr
 *
 */
public class BatchScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    // Define two stacks used in this Basics Scenario.
    private static final String ROLES_STACK = "RolesStack";
    private static String defaultSubnet;
    private static String defaultSecurityGroup;

    private static final Logger logger =
 LoggerFactory.getLogger(BatchScenario.class);

    public static void main(String[] args) throws InterruptedException {

        BatchActions batchActions = new BatchActions();
        Scanner scanner = new Scanner(System.in);
        String computeEnvironmentName = "my-compute-environment";
        String jobQueueName = "my-job-queue";
        String jobDefinitionName = "my-job-definition";


        // See the NOTE in this Java code example (at start).
        String dockerImage = "dkr.ecr.us-east-1.amazonaws.com/echo-text:echo-text";

        logger.info("""
            AWS Batch is a fully managed batch processing service that dynamically
 provisions the required compute
            resources for batch computing workloads. The Java V2 `BatchAsyncClient`
 allows
            developers to automate the submission, monitoring, and management of
 batch jobs.
```

```
            This scenario provides an example of setting up a compute environment,
 job queue and job definition,
            and then submitting a job.

            This scenario submits a job that pulls a Docker image named echo-text
 from Amazon ECR to Amazon Fargate.

            To place this Docker image on Amazon ECR, run the following Basics
 scenario.

            https://github.com/awsdocs/aws-doc-sdk-examples/tree/main/javav2/
example_code/ecr

            Let's get started...

            You have two choices:

            1 - Run the entire program.
            2 - Delete an existing Compute Environment (created from a previous
 execution of
            this program that did not complete).
            """);

        while (true) {
            String input = scanner.nextLine();
            if (input.trim().equalsIgnoreCase("1")) {
                logger.info("Continuing with the program...");
               // logger.info("");
                break;
            } else if (input.trim().equalsIgnoreCase("2")) {
                String jobQueueARN = String.valueOf(batchActions.
 describeJobQueueAsync(computeEnvironmentName));
                if (!jobQueueARN.isEmpty()) {
                    batchActions.disableJobQueueAsync(jobQueueARN);
                    countdown(1);
                    batchActions.deleteJobQueueAsync(jobQueueARN);
                }

                try {

 batchActions.disableComputeEnvironmentAsync(computeEnvironmentName)
                        .exceptionally(ex -> {
                            logger.info("Disable compute environment failed: " +
 ex.getMessage());
```

```
                            return null;
                        })
                        .join();
                } catch (CompletionException ex) {
                    logger.info("Failed to disable compute environment: " +
ex.getMessage());
                }
                countdown(2);

batchActions.deleteComputeEnvironmentAsync(computeEnvironmentName).join();
                return;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
        System.out.println(DASHES);

        waitForInputToContinue(scanner);
        // Get an AWS Account id used to retrieve the docker image from Amazon ECR.
        // Create a single-element array to store the `accountId` value.
        String[] accId = new String[1];
        CompletableFuture<String> accountIdFuture = batchActions.getAccountId();
        accountIdFuture.thenAccept(accountId -> {
            logger.info("Account ID: " + accountId);
            accId[0] = accountId;
        }).join();

        dockerImage = accId[0]+"."+dockerImage;

        // Get a default subnet and default security associated with the default
VPC.
        getSubnetSecurityGroup();

        logger.info("Use AWS CloudFormation to create two IAM roles that are
required for this scenario.");
        CloudFormationHelper.deployCloudFormationStack(ROLES_STACK);

        Map<String, String> stackOutputs =
CloudFormationHelper.getStackOutputs(ROLES_STACK);
        String batchIAMRole = stackOutputs.get("BatchRoleArn");
        String executionRoleARN = stackOutputs.get("EcsRoleArn");
```

```
        logger.info("The IAM role needed to interact with AWS Batch is
"+batchIAMRole);
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("1. Create a Batch compute environment");
        logger.info("""
            A compute environment is a resource where you can run your batch jobs.
            After creating a compute environment, you can define job queues and job
definitions to submit jobs for
            execution.

            The benefit of creating a compute environment is it allows you to easily
configure and manage the compute
            resources that will be used to run your Batch jobs. By separating the
compute environment from the job definitions,
            you can easily scale your compute resources up or down as needed,
without having to modify your job definitions.
            This makes it easier to manage your Batch workloads and ensures that
your jobs have the necessary
            compute resources to run efficiently.
            """);

        waitForInputToContinue(scanner);
        try {
            CompletableFuture<CreateComputeEnvironmentResponse> future =
batchActions.createComputeEnvironmentAsync(computeEnvironmentName, batchIAMRole,
defaultSubnet, defaultSecurityGroup);
            CreateComputeEnvironmentResponse response = future.join();
            logger.info("Compute Environment ARN: " +
response.computeEnvironmentArn());
        } catch (RuntimeException rte) {
            Throwable cause = rte.getCause();
            if (cause instanceof ClientException batchExceptionEx) {
                String myErrorCode =
batchExceptionEx.awsErrorDetails().errorMessage();
                if ("Object already exists".contains(myErrorCode)) {
                    logger.info("The compute environment '" + computeEnvironmentName
+ "' already exists. Moving on...");
                } else {
                    logger.info("Batch error occurred: {} (Code: {})",
batchExceptionEx.getMessage(), batchExceptionEx.awsErrorDetails().errorCode());
                    return;
                }
```

```
            } else {
                    logger.info("An unexpected error occurred: {}", (cause != null ?
cause.getMessage() : rte.getMessage()));
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("2. Check the status of the "+computeEnvironmentName +" Compute
Environment.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<String> future =
batchActions.checkComputeEnvironmentsStatus(computeEnvironmentName);
            String status = future.join();
            logger.info("Compute Environment Status: " + status);

        } catch (RuntimeException rte) {
            Throwable cause = rte.getCause();
            if (cause instanceof ClientException batchExceptionEx) {
                logger.info("Batch error occurred: {} (Code: {})",
batchExceptionEx.getMessage(), batchExceptionEx.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: " + (cause != null ?
cause.getMessage() : rte.getMessage()));
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Create a job queue");
        logger.info("""
             A job queue is an essential component that helps manage the execution
of your batch jobs.
             It acts as a buffer, where jobs are placed and then scheduled for
execution based on their
             priority and the available resources in the compute environment.
             """);
        waitForInputToContinue(scanner);
```

```
        String jobQueueArn = null;
        try {
            CompletableFuture<String> jobQueueFuture =
batchActions.createJobQueueAsync(jobQueueName, computeEnvironmentName);
            jobQueueArn = jobQueueFuture.join();
            logger.info("Job Queue ARN: " + jobQueueArn);

        } catch (RuntimeException rte) {
            Throwable cause = rte.getCause();
            if (cause instanceof BatchException batchExceptionEx) {
                String myErrorCode =
batchExceptionEx.awsErrorDetails().errorMessage();
                if ("Object already exists".contains(myErrorCode)) {
                    logger.info("The job queue '" + jobQueueName + "' already
exists. Moving on...");
                    // Retrieve the ARN of the job queue.
                    CompletableFuture<String> jobQueueArnFuture =
batchActions.getJobQueueARN(jobQueueName);
                    jobQueueArn = jobQueueArnFuture.join();
                    logger.info("Job Queue ARN: " + jobQueueArn);
                } else {
                    logger.info("Batch error occurred: {} (Code: {})",
batchExceptionEx.getMessage(), batchExceptionEx.awsErrorDetails().errorCode());
                    return;
                }
            } else {
                logger.info("An unexpected error occurred: " + (cause != null ?
cause.getMessage() : rte.getMessage()));
                return; // End the execution
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("4. Register a Job Definition.");
        logger.info("""
            Registering a job in AWS Batch using the Fargate launch type ensures
that all
            necessary parameters, such as the execution role, command to run, and so
on
            are specified and reused across multiple job submissions.

             The job definition pulls a Docker image from Amazon ECR and executes
the Docker image.
```

```
            """);

        waitForInputToContinue(scanner);
        String jobARN;
        try {
            String platform = "";
            while (true) {
                logger.info("""
                    On which platform/CPU architecture combination did you build the
Docker image?:
                    1. Windows       X86_64
                    2. Mac or Linux  ARM64
                    3. Mac or Linux  X86_64

                    Please select 1, 2, or 3.
                    """);
                String platAns = scanner.nextLine().trim();
                if (platAns.equals("1")) {
                    platform = "X86_64";
                    break; // Exit loop since a valid option is selected
                } else if (platAns.equals("2")) {
                    platform = "ARM64";
                    break; // Exit loop since a valid option is selected
                } else if (platAns.equals("3")) {
                    platform = "X86_64";
                    break; // Exit loop since a valid option is selected
                } else {
                    System.out.println("Invalid input. Please select either 1 or
2.");
                }
            }

            jobARN = batchActions.registerJobDefinitionAsync(jobDefinitionName,
executionRoleARN, dockerImage, platform)
                .exceptionally(ex -> {
                    System.err.println("Register job definition failed: " +
ex.getMessage());
                    return null;
                })
                .join();
            if (jobARN != null) {
                logger.info("Job ARN: " + jobARN);
            }
        } catch (RuntimeException rte) {
```

```
            logger.error("A Batch exception occurred while registering the job: {}",
rte.getCause() != null ? rte.getCause().getMessage() : rte.getMessage());
            return;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. Submit an AWS Batch job from a job definition.");
        waitForInputToContinue(scanner);
        String jobId;
        try {
            jobId = batchActions.submitJobAsync(jobDefinitionName, jobQueueName,
jobARN)
                .exceptionally(ex -> {
                    System.err.println("Submit job failed: " + ex.getMessage());
                    return null;
                })
                .join();

            logger.info("The job id is "+jobId);
            logger.info("Let's wait 2 minutes for the job to complete");
            countdown(2);

        } catch (RuntimeException rte) {
            logger.error("A Batch exception occurred while submitting the job: {}",
rte.getCause() != null ? rte.getCause().getMessage() : rte.getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        logger.info(DASHES);
        logger.info("6. Get a list of jobs applicable to the job queue.");

        waitForInputToContinue(scanner);
        try {
            List<JobSummary> jobs = batchActions.listJobsAsync(jobQueueName);
            jobs.forEach(job ->
                logger.info("Job ID: {}, Job Name: {}, Job Status: {}", job.jobId(),
job.jobName(), job.status()));

        } catch (RuntimeException rte) {
            logger.info("A Batch exception occurred while submitting the job: {}",
rte.getCause() != null ? rte.getCause().getMessage() : rte.getMessage());
```

```
            return;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Check the status of job "+jobId);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<String> future = batchActions.describeJobAsync(jobId);
            String jobStatus = future.join();
            logger.info("Job Status: " + jobStatus);

        } catch (RuntimeException rte) {
            logger.info("A Batch exception occurred while submitting the job: {}",
rte.getCause() != null ? rte.getCause().getMessage() : rte.getMessage());
            return;
        }

        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        logger.info("8. Delete Batch resources");
        logger.info(
            """
            When deleting an AWS Batch compute environment, it does not happen
instantaneously.
            There is typically a delay, similar to some other AWS resources.
            AWS Batch starts the deletion process.
            """);
        logger.info("Would you like to delete the AWS Batch resources such as the
compute environment? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            logger.info("You selected to delete the AWS ECR resources.");
            logger.info("First, we will deregister the Job Definition.");
            waitForInputToContinue(scanner);
            try {
                batchActions.deregisterJobDefinitionAsync(jobARN)
                    .exceptionally(ex -> {
                        logger.info("Deregister job definition failed: " +
ex.getMessage());
                        return null;
```

```
                    })
                    .join();
                logger.info(jobARN + " was deregistered");
            } catch (RuntimeException rte) {
                logger.error("A Batch exception occurred: {}", rte.getCause() !=
null ? rte.getCause().getMessage() : rte.getMessage());
                return;
            }

            logger.info("Second, we will disable and then delete the Job Queue.");
            waitForInputToContinue(scanner);
            try {
                batchActions.disableJobQueueAsync(jobQueueArn)
                    .exceptionally(ex -> {
                        logger.info("Disable job queue failed: " + ex.getMessage());
                        return null;
                    })
                    .join();
                logger.info(jobQueueArn + " was disabled");
            } catch (RuntimeException rte) {
                logger.info("A Batch exception occurred: {}", rte.getCause() !=
null ? rte.getCause().getMessage() : rte.getMessage());
                return;
            }

            batchActions.waitForJobQueueToBeDisabledAsync(jobQueueArn);
            try {
                CompletableFuture<Void> future =
batchActions.waitForJobQueueToBeDisabledAsync(jobQueueArn);
                future.join();
                logger.info("Job queue is now disabled.");
            } catch (RuntimeException rte) {
                logger.info("A Batch exception occurred: {}", rte.getCause() !=
null ? rte.getCause().getMessage() : rte.getMessage());
                return;
            }

            waitForInputToContinue(scanner);
            try {
                batchActions.deleteJobQueueAsync(jobQueueArn);
                logger.info(jobQueueArn +" was deleted");
            } catch (RuntimeException rte) {
                logger.info("A Batch exception occurred: {}", rte.getCause() !=
null ? rte.getCause().getMessage() : rte.getMessage());
```

```
                return;
            }
            logger.info("Let's wait 2 minutes for the job queue to be deleted");
            countdown(2);
            waitForInputToContinue(scanner);

            logger.info("Third, we will delete the Compute Environment.");
            waitForInputToContinue(scanner);
            try {
                batchActions.disableComputeEnvironmentAsync(computeEnvironmentName)
                    .exceptionally(ex -> {
                        System.err.println("Disable compute environment failed: " +
ex.getMessage());
                        return null;
                    })
                    .join();
                logger.info("Compute environment disabled") ;
            } catch (RuntimeException rte) {
                logger.info("A Batch exception occurred: {}", rte.getCause() !=
null ? rte.getCause().getMessage() : rte.getMessage());
                return;
            }


batchActions.checkComputeEnvironmentsStatus(computeEnvironmentName).thenAccept(state
-> {
                logger.info("Current State: " + state);
            }).join();

            logger.info("Lets wait 1 min for the compute environment to be
deleted");
            countdown(1);

            try {

batchActions.deleteComputeEnvironmentAsync(computeEnvironmentName).join();
                logger.info(computeEnvironmentName +" was deleted.");

            } catch (RuntimeException rte) {
                logger.info("A Batch exception occurred: {}", rte.getCause() !=
null ? rte.getCause().getMessage() : rte.getMessage());
                return;
            }
            waitForInputToContinue(scanner);
```

```
            CloudFormationHelper.destroyCloudFormationStack(ROLES_STACK);
        }

        logger.info(DASHES);
        logger.info("This concludes the AWS Batch SDK scenario");
        logger.info(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }

    public static void countdown(int minutes) throws InterruptedException {
        int seconds = 0;
        for (int i = minutes * 60 + seconds; i >= 0; i--) {
            int displayMinutes = i / 60;
            int displaySeconds = i % 60;
            System.out.print(String.format("\r%02d:%02d", displayMinutes,
displaySeconds));
            Thread.sleep(1000); // Wait for 1 second
        }
        logger.info("Countdown complete!");
    }

    private static void getSubnetSecurityGroup() {
        try (Ec2AsyncClient ec2Client = Ec2AsyncClient.create()) {
            CompletableFuture<Vpc> defaultVpcFuture =
ec2Client.describeVpcs(DescribeVpcsRequest.builder()
                            .filters(Filter.builder()
                                    .name("is-default")
                                    .values("true")
```

```
                                    .build())
                            .build())
                    .thenApply(response -> response.vpcs().stream()
                            .findFirst()
                            .orElseThrow(() -> new RuntimeException("Default VPC not
found")));

            CompletableFuture<String> defaultSubnetFuture = defaultVpcFuture
                    .thenCompose(vpc ->
ec2Client.describeSubnets(DescribeSubnetsRequest.builder()
                                    .filters(Filter.builder()
                                                    .name("vpc-id")
                                                    .values(vpc.vpcId())
                                                    .build(),
                                            Filter.builder()
                                                    .name("default-for-az")
                                                    .values("true")
                                                    .build())
                                    .build())
                            .thenApply(DescribeSubnetsResponse::subnets)
                            .thenApply(subnets -> subnets.stream()
                                    .findFirst()
                                    .map(Subnet::subnetId)
                                    .orElseThrow(() -> new RuntimeException("No
default subnet found"))));

            CompletableFuture<String> defaultSecurityGroupFuture = defaultVpcFuture
                    .thenCompose(vpc ->
ec2Client.describeSecurityGroups(DescribeSecurityGroupsRequest.builder()
                                    .filters(Filter.builder()
                                                    .name("group-name")
                                                    .values("default")
                                                    .build(),
                                            Filter.builder()
                                                    .name("vpc-id")
                                                    .values(vpc.vpcId())
                                                    .build())
                                    .build())

.thenApply(DescribeSecurityGroupsResponse::securityGroups)
                            .thenApply(securityGroups -> securityGroups.stream()
                                    .findFirst()
                                    .map(SecurityGroup::groupId)
```

```
                                    .orElseThrow(() -> new RuntimeException("No
 default security group found"))));

            defaultSubnet = defaultSubnetFuture.join();
            defaultSecurityGroup = defaultSecurityGroupFuture.join();
        }
    }
}
```

Una clase contenedora para los métodos AWS Batch del SDK.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.core.retry.RetryPolicy;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.batch.BatchAsyncClient;
import software.amazon.awssdk.services.batch.BatchClient;
import software.amazon.awssdk.services.batch.model.AssignPublicIp;
import software.amazon.awssdk.services.batch.model.BatchException;
import software.amazon.awssdk.services.batch.model.CEState;
import software.amazon.awssdk.services.batch.model.CEType;
import software.amazon.awssdk.services.batch.model.CRType;
import software.amazon.awssdk.services.batch.model.ComputeEnvironmentOrder;
import software.amazon.awssdk.services.batch.model.ComputeResource;
import software.amazon.awssdk.services.batch.model.ContainerProperties;
import software.amazon.awssdk.services.batch.model.CreateComputeEnvironmentRequest;
import software.amazon.awssdk.services.batch.model.CreateComputeEnvironmentResponse;
import software.amazon.awssdk.services.batch.model.CreateJobQueueRequest;
import software.amazon.awssdk.services.batch.model.DeleteComputeEnvironmentRequest;
import software.amazon.awssdk.services.batch.model.DeleteComputeEnvironmentResponse;
import software.amazon.awssdk.services.batch.model.DeleteJobQueueRequest;
import software.amazon.awssdk.services.batch.model.DeleteJobQueueResponse;
import software.amazon.awssdk.services.batch.model.DeregisterJobDefinitionRequest;
import software.amazon.awssdk.services.batch.model.DeregisterJobDefinitionResponse;
import
 software.amazon.awssdk.services.batch.model.DescribeComputeEnvironmentsRequest;
import
 software.amazon.awssdk.services.batch.model.DescribeComputeEnvironmentsResponse;
import software.amazon.awssdk.services.batch.model.DescribeJobQueuesRequest;
```

```
import software.amazon.awssdk.services.batch.model.DescribeJobQueuesResponse;
import software.amazon.awssdk.services.batch.model.DescribeJobsRequest;
import software.amazon.awssdk.services.batch.model.DescribeJobsResponse;
import software.amazon.awssdk.services.batch.model.JQState;
import software.amazon.awssdk.services.batch.model.JobDefinitionType;
import software.amazon.awssdk.services.batch.model.JobDetail;
import software.amazon.awssdk.services.batch.model.JobQueueDetail;
import software.amazon.awssdk.services.batch.model.JobStatus;
import software.amazon.awssdk.services.batch.model.JobSummary;
import software.amazon.awssdk.services.batch.model.ListJobsRequest;
import software.amazon.awssdk.services.batch.model.RegisterJobDefinitionResponse;
import software.amazon.awssdk.services.batch.model.NetworkConfiguration;
import software.amazon.awssdk.services.batch.model.PlatformCapability;
import software.amazon.awssdk.services.batch.model.RegisterJobDefinitionRequest;
import software.amazon.awssdk.services.batch.model.ResourceRequirement;
import software.amazon.awssdk.services.batch.model.ResourceType;
import software.amazon.awssdk.services.batch.model.RuntimePlatform;
import software.amazon.awssdk.services.batch.model.SubmitJobRequest;
import software.amazon.awssdk.services.batch.model.CreateJobQueueResponse;
import java.time.Duration;
import java.util.ArrayList;
import java.util.Arrays;
import java.util.Collections;
import java.util.List;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.atomic.AtomicBoolean;
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.services.batch.model.SubmitJobResponse;
import software.amazon.awssdk.services.batch.model.UpdateComputeEnvironmentRequest;
import software.amazon.awssdk.services.batch.model.UpdateComputeEnvironmentResponse;
import software.amazon.awssdk.services.batch.model.UpdateJobQueueRequest;
import software.amazon.awssdk.services.batch.model.UpdateJobQueueResponse;
import software.amazon.awssdk.services.batch.paginators.ListJobsPublisher;
import software.amazon.awssdk.services.sts.StsAsyncClient;
import software.amazon.awssdk.services.sts.model.GetCallerIdentityResponse;

public class BatchActions {
    private static BatchAsyncClient batchClient;

    private static final Logger logger =
 LoggerFactory.getLogger(BatchActions.class);

    private static BatchAsyncClient getAsyncClient() {
```

```
        if (batchClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryPolicy(RetryPolicy.builder()
                    .numRetries(3)
                    .build())
                .build();

            batchClient = BatchAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return batchClient;
    }

    /**
     * Asynchronously creates a new compute environment in AWS Batch.
     *
     * @param computeEnvironmentName the name of the compute environment to create
     * @param batchIAMRole the IAM role to be used by the compute environment
     * @param subnet the subnet ID to be used for the compute environment
     * @param secGroup the security group ID to be used for the compute environment
     * @return a {@link CompletableFuture} representing the asynchronous operation,
which will complete with the
     *         {@link CreateComputeEnvironmentResponse} when the compute environment
has been created
     * @throws BatchException if there is an error creating the compute environment
     * @throws RuntimeException if there is an unexpected error during the operation
     */
    public CompletableFuture<CreateComputeEnvironmentResponse>
createComputeEnvironmentAsync(
        String computeEnvironmentName, String batchIAMRole, String subnet, String
secGroup) {
```

```
        CreateComputeEnvironmentRequest environmentRequest =
CreateComputeEnvironmentRequest.builder()
            .computeEnvironmentName(computeEnvironmentName)
            .type(CEType.MANAGED)
            .state(CEState.ENABLED)
            .computeResources(ComputeResource.builder()
                .type(CRType.FARGATE)
                .maxvCpus(256)
                .subnets(Collections.singletonList(subnet))
                .securityGroupIds(Collections.singletonList(secGroup))
                .build())
            .serviceRole(batchIAMRole)
            .build();

        CompletableFuture<CreateComputeEnvironmentResponse> response =
getAsyncClient().createComputeEnvironment(environmentRequest);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
               String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
               throw new RuntimeException(errorMessage, ex);
            }
        });

        return response;
    }

    public CompletableFuture<DeleteComputeEnvironmentResponse>
deleteComputeEnvironmentAsync(String computeEnvironmentName) {
        DeleteComputeEnvironmentRequest deleteComputeEnvironment =
DeleteComputeEnvironmentRequest.builder()
            .computeEnvironment(computeEnvironmentName)
            .build();

        return getAsyncClient().deleteComputeEnvironment(deleteComputeEnvironment)
            .whenComplete((response, ex) -> {
                if (ex != null) {
                    Throwable cause = ex.getCause();
                    if (cause instanceof BatchException) {
                        throw new RuntimeException(cause);
                    } else {
                        throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
                    }
```

```
                }
            });
    }

    /**
     * Checks the status of the specified compute environment.
     *
     * @param computeEnvironmentName the name of the compute environment to check
     * @return a CompletableFuture containing the status of the compute environment,
or "ERROR" if an exception occurs
     */
    public CompletableFuture<String> checkComputeEnvironmentsStatus(String
computeEnvironmentName) {
        if (computeEnvironmentName == null || computeEnvironmentName.isEmpty()) {
            throw new IllegalArgumentException("Compute environment name cannot be
null or empty");
        }

        DescribeComputeEnvironmentsRequest environmentsRequest =
DescribeComputeEnvironmentsRequest.builder()
            .computeEnvironments(computeEnvironmentName)
            .build();

        CompletableFuture<DescribeComputeEnvironmentsResponse> response =
getAsyncClient().describeComputeEnvironments(environmentsRequest);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
                String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                throw new RuntimeException(errorMessage, ex);
            }
        });

        return response.thenApply(resp -> resp.computeEnvironments().stream()
            .map(env -> env.statusAsString())
            .findFirst()
            .orElse("UNKNOWN"));
    }

    /**
     * Creates a job queue asynchronously.
     *
     * @param jobQueueName the name of the job queue to create
```

```
    * @param computeEnvironmentName the name of the compute environment to
associate with the job queue
    * @return a CompletableFuture that completes with the Amazon Resource Name
(ARN) of the job queue
    */
   public CompletableFuture<String> createJobQueueAsync(String jobQueueName, String
computeEnvironmentName) {
       if (jobQueueName == null || jobQueueName.isEmpty()) {
           throw new IllegalArgumentException("Job queue name cannot be null or
empty");
       }
       if (computeEnvironmentName == null || computeEnvironmentName.isEmpty()) {
           throw new IllegalArgumentException("Compute environment name cannot be
null or empty");
       }

       CreateJobQueueRequest request = CreateJobQueueRequest.builder()
           .jobQueueName(jobQueueName)
           .priority(1)
           .computeEnvironmentOrder(ComputeEnvironmentOrder.builder()
               .computeEnvironment(computeEnvironmentName)
               .order(1)
               .build())
           .build();

       CompletableFuture<CreateJobQueueResponse> response =
getAsyncClient().createJobQueue(request);
       response.whenComplete((resp, ex) -> {
           if (ex != null) {
               String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
               throw new RuntimeException(errorMessage, ex);
           }
       });

       return response.thenApply(CreateJobQueueResponse::jobQueueArn);
   }

   /**
    * Asynchronously lists the jobs in the specified job queue with the given job
status.
    *
    * @param jobQueue the name of the job queue to list jobs from
    * @return a List<JobSummary> that contains the jobs that succeeded
```

```
     */
    public List<JobSummary> listJobsAsync(String jobQueue) {
        if (jobQueue == null || jobQueue.isEmpty()) {
            throw new IllegalArgumentException("Job queue cannot be null or empty");
        }

        ListJobsRequest listJobsRequest = ListJobsRequest.builder()
            .jobQueue(jobQueue)
            .jobStatus(JobStatus.SUCCEEDED)  // Filter jobs by status.
            .build();

        List<JobSummary> jobSummaries = new ArrayList<>();
        ListJobsPublisher listJobsPaginator =
getAsyncClient().listJobsPaginator(listJobsRequest);
        CompletableFuture<Void> future = listJobsPaginator.subscribe(response -> {
            jobSummaries.addAll(response.jobSummaryList());
        });
        future.join();
        return jobSummaries;
    }

    /**
     * Registers a new job definition asynchronously in AWS Batch.
     * <p>
     * When using Fargate as the compute environment, it is crucial to set the
     * {@link NetworkConfiguration} with {@link AssignPublicIp#ENABLED} to
     * ensure proper networking configuration for the Fargate tasks. This
     * allows the tasks to communicate with external services, access the
     * internet, or communicate within a VPC.
     *
     * @param jobDefinitionName the name of the job definition to be registered
     * @param executionRoleARN the ARN (Amazon Resource Name) of the execution role
     *                         that provides permissions for the containers in the
job
     * @param cpuArch a value of either X86_64 or ARM64 required for the service
call
     * @return a CompletableFuture that completes with the ARN of the registered
     *         job definition upon successful execution, or completes exceptionally
with
     *         an error if the registration fails
     */
    public CompletableFuture<String> registerJobDefinitionAsync(String
jobDefinitionName, String executionRoleARN, String image, String cpuArch) {
        NetworkConfiguration networkConfiguration = NetworkConfiguration.builder()
```

```
                .assignPublicIp(AssignPublicIp.ENABLED)
                .build();

        ContainerProperties containerProperties = ContainerProperties.builder()
                .image(image)
                .executionRoleArn(executionRoleARN)
                .resourceRequirements(
                        Arrays.asList(
                                ResourceRequirement.builder()
                                        .type(ResourceType.VCPU)
                                        .value("1")
                                        .build(),
                                ResourceRequirement.builder()
                                        .type(ResourceType.MEMORY)
                                        .value("2048")
                                        .build()
                        )
                )
                .networkConfiguration(networkConfiguration)
               .runtimePlatform(b -> b
                        .cpuArchitecture(cpuArch)
                        .operatingSystemFamily("LINUX"))
                .build();

        RegisterJobDefinitionRequest request =
RegisterJobDefinitionRequest.builder()
                .jobDefinitionName(jobDefinitionName)
                .type(JobDefinitionType.CONTAINER)
                .containerProperties(containerProperties)
                .platformCapabilities(PlatformCapability.FARGATE)
                .build();

        CompletableFuture<String> future = new CompletableFuture<>();
        getAsyncClient().registerJobDefinition(request)
                .thenApply(RegisterJobDefinitionResponse::jobDefinitionArn)
                .whenComplete((result, ex) -> {
                    if (ex != null) {
                        future.completeExceptionally(ex);
                    } else {
                        future.complete(result);
                    }
                });

        return future;
```

```
    }

    /**
     * Deregisters a job definition asynchronously.
     *
     * @param jobDefinition the name of the job definition to be deregistered
     * @return a CompletableFuture that completes when the job definition has been
deregistered
     * or an exception has occurred
     */
    public CompletableFuture<DeregisterJobDefinitionResponse>
deregisterJobDefinitionAsync(String jobDefinition) {
        DeregisterJobDefinitionRequest jobDefinitionRequest =
DeregisterJobDefinitionRequest.builder()
            .jobDefinition(jobDefinition)
            .build();

        CompletableFuture<DeregisterJobDefinitionResponse> responseFuture =
getAsyncClient().deregisterJobDefinition(jobDefinitionRequest);
        responseFuture.whenComplete((response, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Unexpected error occurred: " +
ex.getMessage(), ex);
            }
        });

        return responseFuture;
    }

    /**
     * Disables the specified job queue asynchronously.
     *
     * @param jobQueueArn the Amazon Resource Name (ARN) of the job queue to be
disabled
     * @return a {@link CompletableFuture} that completes when the job queue update
operation is complete,
     *         or completes exceptionally if an error occurs during the operation
     */
    public CompletableFuture<Void> disableJobQueueAsync(String jobQueueArn) {
        UpdateJobQueueRequest updateRequest = UpdateJobQueueRequest.builder()
            .jobQueue(jobQueueArn)
            .state(JQState.DISABLED)
            .build();
```

```
        CompletableFuture<UpdateJobQueueResponse> responseFuture =
getAsyncClient().updateJobQueue(updateRequest);
        return responseFuture.whenComplete((updateResponse, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to update job queue: " +
ex.getMessage(), ex);
            }
        }).thenApply(updateResponse -> null);
    }

    /**
     * Deletes a Batch job queue asynchronously.
     *
     * @param jobQueueArn The Amazon Resource Name (ARN) of the job queue to delete.
     * @return A CompletableFuture that represents the asynchronous deletion of the
job queue.
     *         The future completes when the job queue has been successfully deleted
or if an error occurs.
     *         If successful, the future will be completed with a {@code Void}
value.
     *         If an error occurs, the future will be completed exceptionally with
the thrown exception.
     */
    public CompletableFuture<Void> deleteJobQueueAsync(String jobQueueArn) {
        DeleteJobQueueRequest deleteRequest = DeleteJobQueueRequest.builder()
            .jobQueue(jobQueueArn)
            .build();

        CompletableFuture<DeleteJobQueueResponse> responseFuture =
getAsyncClient().deleteJobQueue(deleteRequest);
        return responseFuture.whenComplete((deleteResponse, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to delete job queue: " +
ex.getMessage(), ex);
            }
        }).thenApply(deleteResponse -> null);
    }

    /**
     * Asynchronously describes the job queue associated with the specified compute
environment.
     *
     * @param computeEnvironmentName the name of the compute environment to find the
associated job queue for
```

```
    * @return a {@link CompletableFuture} that, when completed, contains the job
queue ARN associated with the specified compute environment
    * @throws RuntimeException if the job queue description fails
    */
   public CompletableFuture<String> describeJobQueueAsync(String
computeEnvironmentName) {
       DescribeJobQueuesRequest describeJobQueuesRequest =
DescribeJobQueuesRequest.builder()
           .build();

       CompletableFuture<DescribeJobQueuesResponse> responseFuture =
getAsyncClient().describeJobQueues(describeJobQueuesRequest);
       return responseFuture.whenComplete((describeJobQueuesResponse, ex) -> {
           if (describeJobQueuesResponse != null) {
               String jobQueueARN;
               for (JobQueueDetail jobQueueDetail :
describeJobQueuesResponse.jobQueues()) {
                   for (ComputeEnvironmentOrder computeEnvironmentOrder :
jobQueueDetail.computeEnvironmentOrder()) {
                       String computeEnvironment =
computeEnvironmentOrder.computeEnvironment();
                       String name = getComputeEnvironmentName(computeEnvironment);
                       if (name.equals(computeEnvironmentName)) {
                           jobQueueARN = jobQueueDetail.jobQueueArn();
                           logger.info("Job queue ARN associated with the compute
environment: " + jobQueueARN);
                       }
                   }
               }
           } else {
               throw new RuntimeException("Failed to describe job queue: " +
ex.getMessage(), ex);
           }
       }).thenApply(describeJobQueuesResponse -> {
           String jobQueueARN = "";
           for (JobQueueDetail jobQueueDetail :
describeJobQueuesResponse.jobQueues()) {
               for (ComputeEnvironmentOrder computeEnvironmentOrder :
jobQueueDetail.computeEnvironmentOrder()) {
                   String computeEnvironment =
computeEnvironmentOrder.computeEnvironment();
                   String name = getComputeEnvironmentName(computeEnvironment);
                   if (name.equals(computeEnvironmentName)) {
                       jobQueueARN = jobQueueDetail.jobQueueArn();
```

```
                    }
                }
            }
            return jobQueueARN;
        });
    }

    /**
     * Disables the specified compute environment asynchronously.
     *
     * @param computeEnvironmentName the name of the compute environment to disable
     * @return a CompletableFuture that completes when the compute environment is
disabled
     */
    public CompletableFuture<UpdateComputeEnvironmentResponse>
disableComputeEnvironmentAsync(String computeEnvironmentName) {
        UpdateComputeEnvironmentRequest updateRequest =
UpdateComputeEnvironmentRequest.builder()
            .computeEnvironment(computeEnvironmentName)
            .state(CEState.DISABLED)
            .build();

        CompletableFuture<UpdateComputeEnvironmentResponse> responseFuture =
getAsyncClient().updateComputeEnvironment(updateRequest);
        responseFuture.whenComplete((response, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to disable compute environment: "
+ ex.getMessage(), ex);
            }
        });

        return responseFuture;
    }

    /**
     * Submits a job asynchronously to the AWS Batch service.
     *
     * @param jobDefinitionName the name of the job definition to use
     * @param jobQueueName the name of the job queue to submit the job to
     * @param jobARN the Amazon Resource Name (ARN) of the job definition
     * @return a CompletableFuture that, when completed, contains the job ID of the
submitted job
     */
```

```
    public CompletableFuture<String> submitJobAsync(String jobDefinitionName, String
jobQueueName, String jobARN) {
        SubmitJobRequest jobRequest = SubmitJobRequest.builder()
            .jobDefinition(jobARN)
            .jobName(jobDefinitionName)
            .jobQueue(jobQueueName)
            .build();

        CompletableFuture<SubmitJobResponse> responseFuture =
getAsyncClient().submitJob(jobRequest);
        responseFuture.whenComplete((response, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Unexpected error occurred: " +
ex.getMessage(), ex);
            }
        });

        return responseFuture.thenApply(SubmitJobResponse::jobId);
    }

    /**
     * Asynchronously retrieves the status of a specific job.
     *
     * @param jobId the ID of the job to retrieve the status for
     * @return a CompletableFuture that completes with the job status
     */
    public CompletableFuture<String> describeJobAsync(String jobId) {
        DescribeJobsRequest describeJobsRequest = DescribeJobsRequest.builder()
            .jobs(jobId)
            .build();

        CompletableFuture<DescribeJobsResponse> responseFuture =
getAsyncClient().describeJobs(describeJobsRequest);
        return responseFuture.whenComplete((response, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Unexpected error occurred: " +
ex.getMessage(), ex);
            }
        }).thenApply(response -> response.jobs().get(0).status().toString());
    }

    /**
     * Disables the specific job queue using the asynchronous Java client.
     *
```

```
    * @param jobQueueArn the Amazon Resource Name (ARN) of the job queue to wait
for
    * @return a {@link CompletableFuture} that completes when the job queue is
disabled
    */
   public CompletableFuture<Void> waitForJobQueueToBeDisabledAsync(String
jobQueueArn) {
       AtomicBoolean isDisabled = new AtomicBoolean(false);
       return CompletableFuture.runAsync(() -> {
           while (!isDisabled.get()) {
               DescribeJobQueuesRequest describeRequest =
DescribeJobQueuesRequest.builder()
                   .jobQueues(jobQueueArn)
                   .build();

               CompletableFuture<DescribeJobQueuesResponse> responseFuture =
getAsyncClient().describeJobQueues(describeRequest);
               responseFuture.whenComplete((describeResponse, ex) -> {
                   if (describeResponse != null) {
                       for (JobQueueDetail jobQueue : describeResponse.jobQueues())
{
                           if (jobQueue.jobQueueArn().equals(jobQueueArn) &&
jobQueue.state() == JQState.DISABLED) {
                               isDisabled.set(true);
                               break;
                           }
                       }
                   } else {
                       throw new RuntimeException("Error describing job queues",
ex);
                   }
               }).join();

               if (!isDisabled.get()) {
                   try {
                       logger.info("Waiting for job queue to be disabled...");
                       Thread.sleep(5000);
                   } catch (InterruptedException e) {
                       Thread.currentThread().interrupt();
                       throw new RuntimeException("Thread interrupted while waiting
for job queue to be disabled", e);
                   }
               }
           }
```

```
        }).whenComplete((result, throwable) -> {
            if (throwable != null) {
                throw new RuntimeException("Error while waiting for job queue to be
disabled", throwable);
            }
        });
    }

    public CompletableFuture<String> getJobQueueARN(String jobQueueName) {
        // Describe the job queue asynchronously
        CompletableFuture<DescribeJobQueuesResponse> describeJobQueuesFuture =
batchClient.describeJobQueues(
            DescribeJobQueuesRequest.builder()
                .jobQueues(jobQueueName)
                .build()
        );

        // Handle the asynchronous response and return the Job Queue ARN in the
CompletableFuture<String>
        CompletableFuture<String> jobQueueArnFuture = new CompletableFuture<>();
        describeJobQueuesFuture.whenComplete((response, error) -> {
            if (error != null) {
                if (error instanceof BatchException) {
                    logger.info("Batch error: " + ((BatchException)
error).awsErrorDetails().errorMessage());
                } else {
                    logger.info("Error describing job queue: " +
error.getMessage());
                }
                jobQueueArnFuture.completeExceptionally(new RuntimeException("Failed
to retrieve Job Queue ARN", error));
            } else {
                if (response.jobQueues().isEmpty()) {
                    jobQueueArnFuture.completeExceptionally(new
RuntimeException("Job queue not found: " + jobQueueName));
                } else {
                    // Assuming only one job queue is returned for the given name
                    String jobQueueArn = response.jobQueues().get(0).jobQueueArn();
                    jobQueueArnFuture.complete(jobQueueArn);
                }
            }
        });

        return jobQueueArnFuture;
```

```
    }

    private static String getComputeEnvironmentName(String computeEnvironment) {
        String[] parts = computeEnvironment.split("/");
        if (parts.length == 2) {
            return parts[1];
        }
        return null;
    }

    public CompletableFuture<String> getAccountId() {
        StsAsyncClient stsAsyncClient = StsAsyncClient.builder()
            .region(Region.US_EAST_1)
            .build();

        return stsAsyncClient.getCallerIdentity()
            .thenApply(GetCallerIdentityResponse::account);
    }


}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateComputeEnvironment
  - CreateJobQueue
  - DeleteComputeEnvironment
  - DeleteJobQueue
  - DeregisterJobDefinition
  - DescribeComputeEnvironments
  - DescribeJobQueues
  - DescribeJobs
  - ListJobsPaginator
  - RegisterJobDefinition
  - SubmitJob
  - UpdateComputeEnvironment
  - UpdateJobQueue

Acciones

`CreateComputeEnvironment`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateComputeEnvironment`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously creates a new compute environment in AWS Batch.
    *
    * @param computeEnvironmentName the name of the compute environment to create
    * @param batchIAMRole the IAM role to be used by the compute environment
    * @param subnet the subnet ID to be used for the compute environment
    * @param secGroup the security group ID to be used for the compute environment
    * @return a {@link CompletableFuture} representing the asynchronous operation,
which will complete with the
    *         {@link CreateComputeEnvironmentResponse} when the compute environment
has been created
    * @throws BatchException if there is an error creating the compute environment
    * @throws RuntimeException if there is an unexpected error during the operation
    */
   public CompletableFuture<CreateComputeEnvironmentResponse>
createComputeEnvironmentAsync(
       String computeEnvironmentName, String batchIAMRole, String subnet, String
secGroup) {
       CreateComputeEnvironmentRequest environmentRequest =
CreateComputeEnvironmentRequest.builder()
           .computeEnvironmentName(computeEnvironmentName)
           .type(CEType.MANAGED)
           .state(CEState.ENABLED)
           .computeResources(ComputeResource.builder()
               .type(CRType.FARGATE)
               .maxvCpus(256)
               .subnets(Collections.singletonList(subnet))
               .securityGroupIds(Collections.singletonList(secGroup))
```

```
                .build())
            .serviceRole(batchIAMRole)
            .build();

        CompletableFuture<CreateComputeEnvironmentResponse> response =
getAsyncClient().createComputeEnvironment(environmentRequest);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
                String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                throw new RuntimeException(errorMessage, ex);
            }
        });

        return response;
    }
```

- Para obtener más información sobre la API, consulta CreateComputeEnvironmentla Referencia AWS SDK for Java 2.x de la API.

`CreateJobQueue`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateJobQueue`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a job queue asynchronously.
     *
     * @param jobQueueName the name of the job queue to create
     * @param computeEnvironmentName the name of the compute environment to
associate with the job queue
     * @return a CompletableFuture that completes with the Amazon Resource Name
(ARN) of the job queue
```

```
     */
    public CompletableFuture<String> createJobQueueAsync(String jobQueueName, String
computeEnvironmentName) {
        if (jobQueueName == null || jobQueueName.isEmpty()) {
            throw new IllegalArgumentException("Job queue name cannot be null or
empty");
        }
        if (computeEnvironmentName == null || computeEnvironmentName.isEmpty()) {
            throw new IllegalArgumentException("Compute environment name cannot be
null or empty");
        }

        CreateJobQueueRequest request = CreateJobQueueRequest.builder()
            .jobQueueName(jobQueueName)
            .priority(1)
            .computeEnvironmentOrder(ComputeEnvironmentOrder.builder()
                .computeEnvironment(computeEnvironmentName)
                .order(1)
                .build())
            .build();

        CompletableFuture<CreateJobQueueResponse> response =
getAsyncClient().createJobQueue(request);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
                String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                throw new RuntimeException(errorMessage, ex);
            }
        });

        return response.thenApply(CreateJobQueueResponse::jobQueueArn);
    }
```

- Para obtener más información sobre la API, consulta CreateJobQueuela Referencia AWS SDK for Java 2.x de la API.

`DeleteComputeEnvironment`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteComputeEnvironment`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public CompletableFuture<DeleteComputeEnvironmentResponse>
deleteComputeEnvironmentAsync(String computeEnvironmentName) {
       DeleteComputeEnvironmentRequest deleteComputeEnvironment =
DeleteComputeEnvironmentRequest.builder()
           .computeEnvironment(computeEnvironmentName)
           .build();

       return getAsyncClient().deleteComputeEnvironment(deleteComputeEnvironment)
           .whenComplete((response, ex) -> {
               if (ex != null) {
                   Throwable cause = ex.getCause();
                   if (cause instanceof BatchException) {
                       throw new RuntimeException(cause);
                   } else {
                       throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
                   }
               }
           });
   }
```

- Para obtener más información sobre la API, consulta DeleteComputeEnvironmentla Referencia AWS SDK for Java 2.x de la API.

`DeleteJobQueue`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteJobQueue`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a Batch job queue asynchronously.
     *
     * @param jobQueueArn The Amazon Resource Name (ARN) of the job queue to delete.
     * @return A CompletableFuture that represents the asynchronous deletion of the
job queue.
     *         The future completes when the job queue has been successfully deleted
or if an error occurs.
     *         If successful, the future will be completed with a {@code Void}
value.
     *         If an error occurs, the future will be completed exceptionally with
the thrown exception.
     */
    public CompletableFuture<Void> deleteJobQueueAsync(String jobQueueArn) {
        DeleteJobQueueRequest deleteRequest = DeleteJobQueueRequest.builder()
            .jobQueue(jobQueueArn)
            .build();

        CompletableFuture<DeleteJobQueueResponse> responseFuture =
getAsyncClient().deleteJobQueue(deleteRequest);
        return responseFuture.whenComplete((deleteResponse, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to delete job queue: " +
ex.getMessage(), ex);
            }
        }).thenApply(deleteResponse -> null);
    }
```

- Para obtener más información sobre la API, consulta DeleteJobQueuela Referencia AWS SDK for Java 2.x de la API.

`DeregisterJobDefinition`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeregisterJobDefinition`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deregisters a job definition asynchronously.
    *
    * @param jobDefinition the name of the job definition to be deregistered
    * @return a CompletableFuture that completes when the job definition has been
deregistered
    * or an exception has occurred
    */
   public CompletableFuture<DeregisterJobDefinitionResponse>
deregisterJobDefinitionAsync(String jobDefinition) {
       DeregisterJobDefinitionRequest jobDefinitionRequest =
DeregisterJobDefinitionRequest.builder()
           .jobDefinition(jobDefinition)
           .build();

       CompletableFuture<DeregisterJobDefinitionResponse> responseFuture =
getAsyncClient().deregisterJobDefinition(jobDefinitionRequest);
       responseFuture.whenComplete((response, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Unexpected error occurred: " +
ex.getMessage(), ex);
           }
       });

       return responseFuture;
   }
```

- Para obtener más información sobre la API, consulta DeregisterJobDefinitionla Referencia AWS SDK for Java 2.x de la API.

`DescribeComputeEnvironments`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeComputeEnvironments`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Checks the status of the specified compute environment.
    *
    * @param computeEnvironmentName the name of the compute environment to check
    * @return a CompletableFuture containing the status of the compute environment,
or "ERROR" if an exception occurs
    */
   public CompletableFuture<String> checkComputeEnvironmentsStatus(String
computeEnvironmentName) {
       if (computeEnvironmentName == null || computeEnvironmentName.isEmpty()) {
           throw new IllegalArgumentException("Compute environment name cannot be
null or empty");
       }

       DescribeComputeEnvironmentsRequest environmentsRequest =
DescribeComputeEnvironmentsRequest.builder()
           .computeEnvironments(computeEnvironmentName)
           .build();

       CompletableFuture<DescribeComputeEnvironmentsResponse> response =
getAsyncClient().describeComputeEnvironments(environmentsRequest);
       response.whenComplete((resp, ex) -> {
           if (ex != null) {
               String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
               throw new RuntimeException(errorMessage, ex);
           }
       });

       return response.thenApply(resp -> resp.computeEnvironments().stream()
           .map(env -> env.statusAsString())
```

```
            .findFirst()
            .orElse("UNKNOWN"));
    }
```

- Para obtener más información sobre la API, consulta DescribeComputeEnvironmentsla Referencia AWS SDK for Java 2.x de la API.

`DescribeJobQueues`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeJobQueues`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously describes the job queue associated with the specified compute
environment.
     *
     * @param computeEnvironmentName the name of the compute environment to find the
associated job queue for
     * @return a {@link CompletableFuture} that, when completed, contains the job
queue ARN associated with the specified compute environment
     * @throws RuntimeException if the job queue description fails
     */
    public CompletableFuture<String> describeJobQueueAsync(String
computeEnvironmentName) {
        DescribeJobQueuesRequest describeJobQueuesRequest =
DescribeJobQueuesRequest.builder()
            .build();

        CompletableFuture<DescribeJobQueuesResponse> responseFuture =
getAsyncClient().describeJobQueues(describeJobQueuesRequest);
        return responseFuture.whenComplete((describeJobQueuesResponse, ex) -> {
            if (describeJobQueuesResponse != null) {
                String jobQueueARN;
```

```
                for (JobQueueDetail jobQueueDetail :
describeJobQueuesResponse.jobQueues()) {
                    for (ComputeEnvironmentOrder computeEnvironmentOrder :
jobQueueDetail.computeEnvironmentOrder()) {
                        String computeEnvironment =
computeEnvironmentOrder.computeEnvironment();
                        String name = getComputeEnvironmentName(computeEnvironment);
                        if (name.equals(computeEnvironmentName)) {
                            jobQueueARN = jobQueueDetail.jobQueueArn();
                            logger.info("Job queue ARN associated with the compute
environment: " + jobQueueARN);
                        }
                    }
                }
            } else {
                throw new RuntimeException("Failed to describe job queue: " +
ex.getMessage(), ex);
            }
        }).thenApply(describeJobQueuesResponse -> {
            String jobQueueARN = "";
            for (JobQueueDetail jobQueueDetail :
describeJobQueuesResponse.jobQueues()) {
                for (ComputeEnvironmentOrder computeEnvironmentOrder :
jobQueueDetail.computeEnvironmentOrder()) {
                    String computeEnvironment =
computeEnvironmentOrder.computeEnvironment();
                    String name = getComputeEnvironmentName(computeEnvironment);
                    if (name.equals(computeEnvironmentName)) {
                        jobQueueARN = jobQueueDetail.jobQueueArn();
                    }
                }
            }
            return jobQueueARN;
        });
    }
```

- Para obtener más información sobre la API, consulta DescribeJobQueuesla Referencia AWS SDK for Java 2.x de la API.

`DescribeJobs`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeJobs`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously retrieves the status of a specific job.
     *
     * @param jobId the ID of the job to retrieve the status for
     * @return a CompletableFuture that completes with the job status
     */
    public CompletableFuture<String> describeJobAsync(String jobId) {
        DescribeJobsRequest describeJobsRequest = DescribeJobsRequest.builder()
            .jobs(jobId)
            .build();

        CompletableFuture<DescribeJobsResponse> responseFuture =
getAsyncClient().describeJobs(describeJobsRequest);
        return responseFuture.whenComplete((response, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Unexpected error occurred: " +
ex.getMessage(), ex);
            }
        }).thenApply(response -> response.jobs().get(0).status().toString());
    }
```

- Para obtener más información sobre la API, consulta DescribeJobsla Referencia AWS SDK for Java 2.x de la API.

`ListJobsPaginator`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListJobsPaginator`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously lists the jobs in the specified job queue with the given job
status.
    *
    * @param jobQueue the name of the job queue to list jobs from
    * @return a List<JobSummary> that contains the jobs that succeeded
    */
   public List<JobSummary> listJobsAsync(String jobQueue) {
       if (jobQueue == null || jobQueue.isEmpty()) {
           throw new IllegalArgumentException("Job queue cannot be null or empty");
       }

       ListJobsRequest listJobsRequest = ListJobsRequest.builder()
           .jobQueue(jobQueue)
           .jobStatus(JobStatus.SUCCEEDED)  // Filter jobs by status.
           .build();

       List<JobSummary> jobSummaries = new ArrayList<>();
       ListJobsPublisher listJobsPaginator =
getAsyncClient().listJobsPaginator(listJobsRequest);
       CompletableFuture<Void> future = listJobsPaginator.subscribe(response -> {
           jobSummaries.addAll(response.jobSummaryList());
       });
       future.join();
       return jobSummaries;
   }
```

- Para obtener más información sobre la API, consulta ListJobsPaginatorla Referencia AWS SDK for Java 2.x de la API.

`RegisterJobDefinition`

En el siguiente ejemplo de código, se muestra cómo utilizar `RegisterJobDefinition`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Registers a new job definition asynchronously in AWS Batch.
    * <p>
    * When using Fargate as the compute environment, it is crucial to set the
    * {@link NetworkConfiguration} with {@link AssignPublicIp#ENABLED} to
    * ensure proper networking configuration for the Fargate tasks. This
    * allows the tasks to communicate with external services, access the
    * internet, or communicate within a VPC.
    *
    * @param jobDefinitionName the name of the job definition to be registered
    * @param executionRoleARN the ARN (Amazon Resource Name) of the execution role
    *                         that provides permissions for the containers in the
job
    * @param cpuArch a value of either X86_64 or ARM64 required for the service
call
    * @return a CompletableFuture that completes with the ARN of the registered
    *         job definition upon successful execution, or completes exceptionally
with
    *         an error if the registration fails
    */
   public CompletableFuture<String> registerJobDefinitionAsync(String
jobDefinitionName, String executionRoleARN, String image, String cpuArch) {
       NetworkConfiguration networkConfiguration = NetworkConfiguration.builder()
               .assignPublicIp(AssignPublicIp.ENABLED)
               .build();

       ContainerProperties containerProperties = ContainerProperties.builder()
               .image(image)
               .executionRoleArn(executionRoleARN)
               .resourceRequirements(
                       Arrays.asList(
```

```
                                ResourceRequirement.builder()
                                        .type(ResourceType.VCPU)
                                        .value("1")
                                        .build(),
                                ResourceRequirement.builder()
                                        .type(ResourceType.MEMORY)
                                        .value("2048")
                                        .build()
                        )
                )
                .networkConfiguration(networkConfiguration)
               .runtimePlatform(b -> b
                        .cpuArchitecture(cpuArch)
                        .operatingSystemFamily("LINUX"))
                .build();

        RegisterJobDefinitionRequest request =
RegisterJobDefinitionRequest.builder()
                .jobDefinitionName(jobDefinitionName)
                .type(JobDefinitionType.CONTAINER)
                .containerProperties(containerProperties)
                .platformCapabilities(PlatformCapability.FARGATE)
                .build();

        CompletableFuture<String> future = new CompletableFuture<>();
        getAsyncClient().registerJobDefinition(request)
                .thenApply(RegisterJobDefinitionResponse::jobDefinitionArn)
                .whenComplete((result, ex) -> {
                    if (ex != null) {
                        future.completeExceptionally(ex);
                    } else {
                        future.complete(result);
                    }
                });

        return future;
    }
```

- Para obtener más información sobre la API, consulta RegisterJobDefinitionla Referencia AWS SDK for Java 2.x de la API.

`SubmitJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `SubmitJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Submits a job asynchronously to the AWS Batch service.
    *
    * @param jobDefinitionName the name of the job definition to use
    * @param jobQueueName the name of the job queue to submit the job to
    * @param jobARN the Amazon Resource Name (ARN) of the job definition
    * @return a CompletableFuture that, when completed, contains the job ID of the
submitted job
    */
   public CompletableFuture<String> submitJobAsync(String jobDefinitionName, String
jobQueueName, String jobARN) {
       SubmitJobRequest jobRequest = SubmitJobRequest.builder()
           .jobDefinition(jobARN)
           .jobName(jobDefinitionName)
           .jobQueue(jobQueueName)
           .build();

       CompletableFuture<SubmitJobResponse> responseFuture =
getAsyncClient().submitJob(jobRequest);
       responseFuture.whenComplete((response, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Unexpected error occurred: " +
ex.getMessage(), ex);
           }
       });

       return responseFuture.thenApply(SubmitJobResponse::jobId);
   }
```

- Para obtener más información sobre la API, consulta SubmitJobla Referencia AWS SDK for Java 2.x de la API.

`UpdateComputeEnvironment`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateComputeEnvironment`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Disables the specified compute environment asynchronously.
    *
    * @param computeEnvironmentName the name of the compute environment to disable
    * @return a CompletableFuture that completes when the compute environment is
disabled
    */
   public CompletableFuture<UpdateComputeEnvironmentResponse>
disableComputeEnvironmentAsync(String computeEnvironmentName) {
       UpdateComputeEnvironmentRequest updateRequest =
UpdateComputeEnvironmentRequest.builder()
           .computeEnvironment(computeEnvironmentName)
           .state(CEState.DISABLED)
           .build();

       CompletableFuture<UpdateComputeEnvironmentResponse> responseFuture =
getAsyncClient().updateComputeEnvironment(updateRequest);
       responseFuture.whenComplete((response, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to disable compute environment: "
+ ex.getMessage(), ex);
           }
       });

       return responseFuture;
   }
```

- Para obtener más información sobre la API, consulta UpdateComputeEnvironmentla Referencia AWS SDK for Java 2.x de la API.

`UpdateJobQueue`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateJobQueue`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Disables the specified job queue asynchronously.
    *
    * @param jobQueueArn the Amazon Resource Name (ARN) of the job queue to be
disabled
    * @return a {@link CompletableFuture} that completes when the job queue update
operation is complete,
    *         or completes exceptionally if an error occurs during the operation
    */
   public CompletableFuture<Void> disableJobQueueAsync(String jobQueueArn) {
       UpdateJobQueueRequest updateRequest = UpdateJobQueueRequest.builder()
           .jobQueue(jobQueueArn)
           .state(JQState.DISABLED)
           .build();

       CompletableFuture<UpdateJobQueueResponse> responseFuture =
getAsyncClient().updateJobQueue(updateRequest);
       return responseFuture.whenComplete((updateResponse, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to update job queue: " +
ex.getMessage(), ex);
           }
       }).thenApply(updateResponse -> null);
   }
```

- Para obtener más información sobre la API, consulta UpdateJobQueuela Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon Bedrock usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Amazon Bedrock.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`GetFoundationModel`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetFoundationModel`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Obtenga detalles sobre un modelo fundacional mediante el cliente sincrónico de Amazon Bedrock.

```
/**
 * Get details about an Amazon Bedrock foundation model.
```

```
     *
     * @param bedrockClient   The service client for accessing Amazon Bedrock.
     * @param modelIdentifier The model identifier.
     * @return An object containing the foundation model's details.
     */
    public static FoundationModelDetails getFoundationModel(BedrockClient
bedrockClient, String modelIdentifier) {
        try {
            GetFoundationModelResponse response = bedrockClient.getFoundationModel(
                    r -> r.modelIdentifier(modelIdentifier)
            );

            FoundationModelDetails model = response.modelDetails();

            System.out.println(" Model ID:                    " + model.modelId());
            System.out.println(" Model ARN:                   " +
model.modelArn());
            System.out.println(" Model Name:                  " +
model.modelName());
            System.out.println(" Provider Name:               " +
model.providerName());
            System.out.println(" Lifecycle status:            " +
model.modelLifecycle().statusAsString());
            System.out.println(" Input modalities:            " +
model.inputModalities());
            System.out.println(" Output modalities:           " +
model.outputModalities());
            System.out.println(" Supported customizations:    " +
model.customizationsSupported());
            System.out.println(" Supported inference types:   " +
model.inferenceTypesSupported());
            System.out.println(" Response streaming supported: " +
model.responseStreamingSupported());

            return model;

        } catch (ValidationException e) {
            throw new IllegalArgumentException(e.getMessage());
        } catch (SdkException e) {
            System.err.println(e.getMessage());
            throw new RuntimeException(e);
        }
    }
```

Obtenga detalles sobre un modelo fundacional mediante el cliente asincrónico de Amazon Bedrock.

```
   /**
    * Get details about an Amazon Bedrock foundation model.
    *
    * @param bedrockClient   The async service client for accessing Amazon Bedrock.
    * @param modelIdentifier The model identifier.
    * @return An object containing the foundation model's details.
    */
   public static FoundationModelDetails getFoundationModel(BedrockAsyncClient
bedrockClient, String modelIdentifier) {
       try {
           CompletableFuture<GetFoundationModelResponse> future =
bedrockClient.getFoundationModel(
                   r -> r.modelIdentifier(modelIdentifier)
           );

           FoundationModelDetails model = future.get().modelDetails();

           System.out.println(" Model ID:                    " + model.modelId());
           System.out.println(" Model ARN:                   " +
model.modelArn());
           System.out.println(" Model Name:                  " +
model.modelName());
           System.out.println(" Provider Name:               " +
model.providerName());
           System.out.println(" Lifecycle status:            " +
model.modelLifecycle().statusAsString());
           System.out.println(" Input modalities:            " +
model.inputModalities());
           System.out.println(" Output modalities:           " +
model.outputModalities());
           System.out.println(" Supported customizations:    " +
model.customizationsSupported());
           System.out.println(" Supported inference types:   " +
model.inferenceTypesSupported());
           System.out.println(" Response streaming supported: " +
model.responseStreamingSupported());

           return model;
```

```
        } catch (ExecutionException e) {
            if (e.getMessage().contains("ValidationException")) {
                throw new IllegalArgumentException(e.getMessage());
            } else {
                System.err.println(e.getMessage());
                throw new RuntimeException(e);
            }
        } catch (InterruptedException e) {
            Thread.currentThread().interrupt();
            System.err.println(e.getMessage());
            throw new RuntimeException(e);
        }
    }
```

- Para obtener más información sobre la API, consulta GetFoundationModella Referencia AWS SDK for Java 2.x de la API.

`ListFoundationModels`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListFoundationModels`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Enumere los modelos fundacionales de Amazon Bedrock disponibles con el cliente sincrónico de Amazon Bedrock.

```
    /**
     * Lists Amazon Bedrock foundation models that you can use.
     * You can filter the results with the request parameters.
     *
     * @param bedrockClient The service client for accessing Amazon Bedrock.
     * @return A list of objects containing the foundation models' details
     */
```

```
   public static List<FoundationModelSummary> listFoundationModels(BedrockClient
bedrockClient) {

       try {
           ListFoundationModelsResponse response =
bedrockClient.listFoundationModels(r -> {});

           List<FoundationModelSummary> models = response.modelSummaries();

           if (models.isEmpty()) {
               System.out.println("No available foundation models in " +
region.toString());
           } else {
               for (FoundationModelSummary model : models) {
                   System.out.println("Model ID: " + model.modelId());
                   System.out.println("Provider: " + model.providerName());
                   System.out.println("Name:     " + model.modelName());
                   System.out.println();
               }
           }

           return models;

       } catch (SdkClientException e) {
           System.err.println(e.getMessage());
           throw new RuntimeException(e);
       }
   }
```

Enumere los modelos fundacionales de Amazon Bedrock disponibles con el cliente asincrónico de Amazon Bedrock.

```
   /**
    * Lists Amazon Bedrock foundation models that you can use.
    * You can filter the results with the request parameters.
    *
    * @param bedrockClient The async service client for accessing Amazon Bedrock.
    * @return A list of objects containing the foundation models' details
    */
   public static List<FoundationModelSummary>
listFoundationModels(BedrockAsyncClient bedrockClient) {
       try {
```

```
            CompletableFuture<ListFoundationModelsResponse> future =
bedrockClient.listFoundationModels(r -> {});

            List<FoundationModelSummary> models = future.get().modelSummaries();

            if (models.isEmpty()) {
                System.out.println("No available foundation models in " +
region.toString());
            } else {
                for (FoundationModelSummary model : models) {
                    System.out.println("Model ID: " + model.modelId());
                    System.out.println("Provider: " + model.providerName());
                    System.out.println("Name:     " + model.modelName());
                    System.out.println();
                }
            }

            return models;

        } catch (InterruptedException e) {
            Thread.currentThread().interrupt();
            System.err.println(e.getMessage());
            throw new RuntimeException(e);
        } catch (ExecutionException e) {
            System.err.println(e.getMessage());
            throw new RuntimeException(e);
        }
    }
```

- Para obtener más información sobre la API, consulta ListFoundationModelsla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon Bedrock Runtime usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante Amazon Bedrock Runtime. AWS SDK for Java 2.x

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Escenarios
- Amazon Nova
- Amazon Nova Canvas
- Amazon Titan Image Generator
- Incrustaciones de texto de Amazon Titan
- Anthropic Claude
- Cohere Command
- Meta Llama
- Mistral AI
- Stable Diffusion

Escenarios

Crear una aplicación de sitio de pruebas que interactúe con modelos fundacionales de Amazon Bedrock

En el siguiente ejemplo de código se muestra cómo crear sitios de pruebas que interactúan con modelos fundacionales de Amazon Bedrock a través de diferentes modalidades.

SDK para Java 2.x

> El sitio de pruebas del modelo fundacional (FM) de Java es una aplicación de muestra de Spring Boot que muestra cómo utilizar Amazon Bedrock con Java. En este ejemplo se muestra cómo los desarrolladores de Java pueden utilizar Amazon Bedrock para crear aplicaciones habilitadas para IA generativa. Puede probar los modelos fundacionales de Amazon Bedrock e interactuar con ellos mediante los tres sitios de pruebas siguientes:
>
> - Un sitio de pruebas de texto.
> - Un sitio de pruebas de chat.
> - Un sitio de pruebas de imágenes.

En el ejemplo también se enumeran y muestran los modelos fundacionales a los que tiene acceso y sus características. Para obtener el código fuente y las instrucciones de implementación, consulte el proyecto en GitHub.

Servicios utilizados en este ejemplo

- Amazon Bedrock Runtime

Generación de vídeos a partir de peticiones de texto con Amazon Bedrock

El siguiente ejemplo de código muestra cómo crear una aplicación de Spring Boot que genera vídeos a partir de peticiones de texto con Amazon Bedrock y el modelo Nova-Reel.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Generar vídeos a partir de peticiones de texto con Amazon Bedrock y Nova-Reel.

```
import org.springframework.stereotype.Service;
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.core.document.Document;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

import java.util.concurrent.CompletableFuture;

@Service
public class VideoGenerationService {

    public GenerateVideoResponse generateVideo(String prompt) {

        // add S3 bucket you want to store your generated videos
        String s3Bucket = "s3://mygeneratedvidoenovatest";


        //Create json request as an instance of Document class
```

```
        Document novaRequest = prepareDocument(prompt);

        // Create request
        StartAsyncInvokeRequest request = StartAsyncInvokeRequest.builder()
                .modelId("amazon.nova-reel-v1:0")
                .modelInput(novaRequest)
                .outputDataConfig(AsyncInvokeOutputDataConfig.builder()

.s3OutputDataConfig(AsyncInvokeS3OutputDataConfig.builder().s3Uri(s3Bucket).build())
                        .build())
                .build();

        try (BedrockRuntimeAsyncClient bedrockClient =
getBedrockRuntimeAsyncClient()) {
            CompletableFuture<StartAsyncInvokeResponse>
startAsyncInvokeResponseCompletableFuture =
bedrockClient.startAsyncInvoke(request);

            //blocking operation to wait for the AWS API response
            StartAsyncInvokeResponse startAsyncInvokeResponse =
startAsyncInvokeResponseCompletableFuture.get();
            System.out.println("invocation ARN: " +
startAsyncInvokeResponse.invocationArn());

            GenerateVideoResponse response = new GenerateVideoResponse();
            response.setStatus("inProgress");
            response.setExecutionArn(startAsyncInvokeResponse.invocationArn());

            return response;
        } catch (Exception e) {
            System.out.println(e);
            throw new RuntimeException(e);
        }

    }

    public GenerateVideoResponse checkGenerationStatus(String invocationArn) {
        GenerateVideoResponse response = new GenerateVideoResponse();

        try (BedrockRuntimeAsyncClient bedrockClient =
getBedrockRuntimeAsyncClient()) {
            //creating async request to fetch status by invocation Arn
            GetAsyncInvokeRequest asyncRequest =
GetAsyncInvokeRequest.builder().invocationArn(invocationArn).build();
```

```
            CompletableFuture<GetAsyncInvokeResponse> asyncInvoke =
bedrockClient.getAsyncInvoke(asyncRequest);

            //blocking operation to wait for the AWS API response
            GetAsyncInvokeResponse asyncInvokeResponse = asyncInvoke.get();
            System.out.println("Invocation status =" +
asyncInvokeResponse.statusAsString());

            response.setExecutionArn(invocationArn);
            response.setStatus(asyncInvokeResponse.statusAsString());
            return response;
        } catch (Exception e) {
            e.printStackTrace();
            throw new RuntimeException(e);
        }

    }

    private static BedrockRuntimeAsyncClient getBedrockRuntimeAsyncClient() {
        BedrockRuntimeAsyncClient bedrockClient =
BedrockRuntimeAsyncClient.builder()
                .region(Region.US_EAST_1)
                .credentialsProvider(ProfileCredentialsProvider.create())
                .build();
        return bedrockClient;
    }

    private static Document prepareDocument(String prompt) {
        Document textToVideoParams = Document.mapBuilder()
                .putString("text", prompt)
                .build();

        Document videoGenerationConfig = Document.mapBuilder()
                .putNumber("durationSeconds", 6)
                .putNumber("fps", 24)
                .putString("dimension", "1280x720")
                .build();

        Document novaRequest = Document.mapBuilder()
                .putString("taskType", "TEXT_VIDEO")
                .putDocument("textToVideoParams", textToVideoParams)
                .putDocument("videoGenerationConfig", videoGenerationConfig)
                .build();
```

```
        return novaRequest;
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - GetAsyncInvoke
  - StartAsyncInvoke

Uso de la herramienta con la API de Converse

El siguiente ejemplo de código muestra cómo crear una interacción típica entre una aplicación, un modelo de IA generativo y herramientas conectadas o cómo APIs mediar en las interacciones entre la IA y el mundo exterior. Se presenta un ejemplo sobre cómo conectar una API meteorológica externa al modelo de IA para que pueda proporcionar información meteorológica en tiempo real en función de las entradas del usuario.

SDK para Java 2.x

> **Note**
>
> Hay más información. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

La ejecución principal del flujo de la situación. En esta situación, se orquesta la conversación entre el usuario, la API de Converse de Amazon Bedrock y una herramienta de previsión meteorológica.

```
/*
 This demo illustrates a tool use scenario using Amazon Bedrock's Converse API and a
 weather tool.
 The program interacts with a foundation model on Amazon Bedrock to provide weather
 information based on user
 input. It uses the Open-Meteo API (https://open-meteo.com) to retrieve current
 weather data for a given location.
 */
public class BedrockScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
```

```
    private static String modelId = "amazon.nova-lite-v1:0";
    private static String defaultPrompt = "What is the weather like in Seattle?";
    private static WeatherTool weatherTool = new WeatherTool();

    // The maximum number of recursive calls allowed in the tool use function.
    // This helps prevent infinite loops and potential performance issues.
    private static int maxRecursions = 5;
    static BedrockActions bedrockActions = new BedrockActions();
    public static boolean interactive = true;

    private static final String systemPrompt = """
            You are a weather assistant that provides current weather data for user-
specified locations using only
            the Weather_Tool, which expects latitude and longitude. Infer the
 coordinates from the location yourself.
            If the user provides coordinates, infer the approximate location and
 refer to it in your response.
            To use the tool, you strictly apply the provided tool specification.

            - Explain your step-by-step process, and give brief updates before each
 step.
            - Only use the Weather_Tool for data. Never guess or make up
 information.
            - Repeat the tool use for subsequent requests if necessary.
            - If the tool errors, apologize, explain weather is unavailable, and
 suggest other options.
            - Report temperatures in °C (°F) and wind in km/h (mph). Keep weather
 reports concise. Sparingly use
              emojis where appropriate.
            - Only respond to weather queries. Remind off-topic users of your
 purpose.
            - Never claim to search online, access external data, or use tools
 besides Weather_Tool.
            - Complete the entire process until you have all required data before
 sending the complete response.
            """;

   public static void main(String[] args) {
       Scanner scanner = new Scanner(System.in);
       System.out.println("""
               ================================================
               Welcome to the Amazon Bedrock Tool Use demo!
               ================================================
```

```
                This assistant provides current weather information for user-
specified locations.
                You can ask for weather details by providing the location name or
 coordinates.

                Example queries:
                - What's the weather like in New York?
                - Current weather for latitude 40.70, longitude -74.01
                - Is it warmer in Rome or Barcelona today?

                To exit the program, simply type 'x' and press Enter.

                P.S.: You're not limited to single locations, or even to using
 English!
                Have fun and experiment with the app!
                """);
        System.out.println(DASHES);

        try {
            runConversation(scanner);

        } catch (Exception ex) {
            System.out.println("There was a problem running the scenario: " +
ex.getMessage());
        }

        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("Amazon Bedrock Converse API with Tool Use Feature
 Scenario is complete.");
        System.out.println(DASHES);
    }

    /**
     * Starts the conversation with the user and handles the interaction with
 Bedrock.
     */
    private static List<Message> runConversation(Scanner scanner) {
        List<Message> conversation = new ArrayList<>();

        // Get the first user input
        String userInput = getUserInput("Your weather info request:", scanner);
        System.out.println(userInput);
```

```
        while (userInput != null) {
            ContentBlock block = ContentBlock.builder()
                    .text(userInput)
                    .build();

            List<ContentBlock> blockList = new ArrayList<>();
            blockList.add(block);

            Message message = Message.builder()
                    .role(ConversationRole.USER)
                    .content(blockList)
                    .build();

            conversation.add(message);

            // Send the conversation to Amazon Bedrock.
            ConverseResponse bedrockResponse =
sendConversationToBedrock(conversation);

            // Recursively handle the model's response until the model has returned
its final response or the recursion counter has reached 0.
            processModelResponse(bedrockResponse, conversation, maxRecursions);

            // Repeat the loop until the user decides to exit the application.
            userInput = getUserInput("Your weather info request:", scanner);
        }
        printFooter();
        return conversation;
    }

    /**
     * Processes the response from the model and updates the conversation
accordingly.
     *
     * @param modelResponse the response from the model
     * @param conversation  the ongoing conversation
     * @param maxRecursion  the maximum number of recursions allowed
     */
    private static void processModelResponse(ConverseResponse modelResponse,
List<Message> conversation, int maxRecursion) {
        if (maxRecursion <= 0) {
            // Stop the process, the number of recursive calls could indicate an
infinite loop
```

```
            System.out.println("\tWarning: Maximum number of recursions reached.
Please try again.");
        }

        // Append the model's response to the ongoing conversation
        conversation.add(modelResponse.output().message());

        String modelResponseVal = modelResponse.stopReasonAsString();
        if (modelResponseVal.compareTo("tool_use") == 0) {
            // If the stop reason is "tool_use", forward everything to the tool use
handler
            handleToolUse(modelResponse.output(), conversation, maxRecursion - 1);
        }

        if (modelResponseVal.compareTo("end_turn") == 0) {
            // If the stop reason is "end_turn", print the model's response text,
and finish the process

PrintModelResponse(modelResponse.output().message().content().get(0).text());
            if (!interactive) {
                defaultPrompt = "x";
            }
        }
    }

    /**
     * Handles the use of a tool by the model in a conversation.
     *
     * @param modelResponse the response from the model, which may include a tool
use request
     * @param conversation  the current conversation, which will be updated with the
tool use results
     * @param maxRecursion  the maximum number of recursive calls allowed to handle
the model's response
     */
    private static void handleToolUse(ConverseOutput modelResponse, List<Message>
conversation, int maxRecursion) {
        List<ContentBlock> toolResults = new ArrayList<>();

        // The model's response can consist of multiple content blocks
        for (ContentBlock contentBlock : modelResponse.message().content()) {
            if (contentBlock.text() != null && !contentBlock.text().isEmpty()) {
                // If the content block contains text, print it to the console
                PrintModelResponse(contentBlock.text());
```

```
            }

            if (contentBlock.toolUse() != null) {
                ToolResponse toolResponse = invokeTool(contentBlock.toolUse());

                // Add the tool use ID and the tool's response to the list of
results
                List<ToolResultContentBlock> contentBlockList = new ArrayList<>();
                ToolResultContentBlock block = ToolResultContentBlock.builder()
                        .json(toolResponse.getContent())
                        .build();
                contentBlockList.add(block);

                ToolResultBlock toolResultBlock = ToolResultBlock.builder()
                        .toolUseId(toolResponse.getToolUseId())
                        .content(contentBlockList)
                        .build();

                ContentBlock contentBlock1 = ContentBlock.builder()
                        .toolResult(toolResultBlock)
                        .build();

                toolResults.add(contentBlock1);
            }
        }

        // Embed the tool results in a new user message
        Message message = Message.builder()
                .role(ConversationRole.USER)
                .content(toolResults)
                .build();

        // Append the new message to the ongoing conversation
        //conversation.add(message);
        conversation.add(message);

        // Send the conversation to Amazon Bedrock
        var response = sendConversationToBedrock(conversation);

        // Recursively handle the model's response until the model has returned its
final response or the recursion counter has reached 0
        processModelResponse(response, conversation, maxRecursion);
    }
```

```
   // Invokes the specified tool with the given payload and returns the tool's
response.
   // If the requested tool does not exist, an error message is returned.
   private static ToolResponse invokeTool(ToolUseBlock payload) {
       String toolName = payload.name();

       if (Objects.equals(toolName, "Weather_Tool")) {
           Map<String, Document> inputData = payload.input().asMap();
           printToolUse(toolName, inputData);

           // Invoke the weather tool with the input data provided
           Document weatherResponse =
weatherTool.fetchWeatherData(inputData.get("latitude").toString(),
inputData.get("longitude").toString());

           ToolResponse toolResponse = new ToolResponse();
           toolResponse.setContent(weatherResponse);
           toolResponse.setToolUseId(payload.toolUseId());
           return toolResponse;
       } else {
           String errorMessage = "The requested tool with name " + toolName + "
does not exist.";
           System.out.println(errorMessage);
           return null;
       }
   }

   public static void printToolUse(String toolName, Map<String, Document>
inputData) {
       System.out.println("Invoking tool: " + toolName + " with input: " +
inputData.get("latitude").toString() + ", " + inputData.get("longitude").toString()
+ "...");
   }

   private static void PrintModelResponse(String message) {
       System.out.println("\tThe model's response:\n");
       System.out.println(message);
       System.out.println("");
   }

   private static ConverseResponse sendConversationToBedrock(List<Message>
conversation) {
       System.out.println("Calling Bedrock...");
```

```
        try {
            return bedrockActions.sendConverseRequestAsync(modelId, systemPrompt,
conversation, weatherTool.getToolSpec());
        } catch (ModelNotReadyException ex) {
             System.err.println("Model is not ready. Please try again later: " +
ex.getMessage());
            throw ex;
        } catch (BedrockRuntimeException ex) {
            System.err.println("Bedrock service error: " + ex.getMessage());
            throw ex;
        } catch (RuntimeException ex) {
            System.err.println("Unexpected error occurred: " + ex.getMessage());
            throw ex;
        }
    }

    private static ConverseResponse sendConversationToBedrockwithSpec(List<Message>
conversation, ToolSpecification toolSpec) {
        System.out.println("Calling Bedrock...");

        // Send the conversation, system prompt, and tool configuration, and return
the response
        return bedrockActions.sendConverseRequestAsync(modelId, systemPrompt,
conversation, toolSpec);
    }

    public static String getUserInput(String prompt, Scanner scanner) {
        String userInput = defaultPrompt;
        if (interactive) {
            System.out.println("*".repeat(80));
            System.out.println(prompt + " (x to exit): \n\t");
            userInput = scanner.nextLine();
        }

        if (userInput == null || userInput.trim().isEmpty()) {
            return getUserInput("\tPlease enter your weather info request, e.g., the
name of a city", scanner);
        }

        if (userInput.equalsIgnoreCase("x")) {
            return null;
        }

        return userInput;
```

```
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println("");
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }

    public static void printFooter() {
        System.out.println("""
                ================================================
                Thank you for checking out the Amazon Bedrock Tool Use demo. We hope
 you
                learned something new, or got some inspiration for your own apps
 today!

                For more Bedrock examples in different programming languages, have a
 look at:
                https://docs.aws.amazon.com/bedrock/latest/userguide/
service_code_examples.html
                ================================================
                """);
    }
}
```

Es la herramienta de previsión meteorológica que se utiliza en la demostración. Este archivo define la especificación de la herramienta e implementa la lógica para obtener los datos meteorológicos mediante la API de Open-Meteo.

```
public class WeatherTool {
```

```
    private static final Logger logger = LoggerFactory.getLogger(WeatherTool.class);
    private static java.net.http.HttpClient httpClient = null;

    /**
     * Returns the JSON Schema specification for the Weather tool. The tool
 specification
     * defines the input schema and describes the tool's functionality.
     * For more information, see https://json-schema.org/understanding-json-schema/
reference.
     *
     * @return The tool specification for the Weather tool.
     */
    public ToolSpecification getToolSpec() {
        Map<String, Document> latitudeMap = new HashMap<>();
        latitudeMap.put("type", Document.fromString("string"));
        latitudeMap.put("description", Document.fromString("Geographical WGS84
 latitude of the location."));

        // Create the nested "longitude" object
        Map<String, Document> longitudeMap = new HashMap<>();
        longitudeMap.put("type", Document.fromString("string"));
        longitudeMap.put("description", Document.fromString("Geographical WGS84
 longitude of the location."));

        // Create the "properties" object
        Map<String, Document> propertiesMap = new HashMap<>();
        propertiesMap.put("latitude", Document.fromMap(latitudeMap));
        propertiesMap.put("longitude", Document.fromMap(longitudeMap));

        // Create the "required" array
        List<Document> requiredList = new ArrayList<>();
        requiredList.add(Document.fromString("latitude"));
        requiredList.add(Document.fromString("longitude"));

        // Create the root object
        Map<String, Document> rootMap = new HashMap<>();
        rootMap.put("type", Document.fromString("object"));
        rootMap.put("properties", Document.fromMap(propertiesMap));
        rootMap.put("required", Document.fromList(requiredList));

        // Now create the Document representing the JSON schema
        Document document = Document.fromMap(rootMap);

        ToolSpecification specification = ToolSpecification.builder()
```

```
            .name("Weather_Tool")
            .description("Get the current weather for a given location, based on its
 WGS84 coordinates.")
            .inputSchema(ToolInputSchema.builder()
                .json(document)
                .build())
            .build();

        return specification;
    }

    /**
     * Fetches weather data for the given latitude and longitude.
     *
     * @param latitude  the latitude coordinate
     * @param longitude the longitude coordinate
     * @return a {@link CompletableFuture} containing the weather data as a JSON
 string
     */
    public Document fetchWeatherData(String latitude, String longitude) {
        HttpClient httpClient = HttpClient.newHttpClient();

        // Ensure no extra double quotes
        latitude = latitude.replace("\"", "");
        longitude = longitude.replace("\"", "");

        String endpoint = "https://api.open-meteo.com/v1/forecast";
        String url = String.format("%s?latitude=%s&longitude=
%s&current_weather=True", endpoint, latitude, longitude);

        HttpRequest request = HttpRequest.newBuilder()
            .uri(URI.create(url))
            .build();

        try {
            HttpResponse<String> response = httpClient.send(request,
 HttpResponse.BodyHandlers.ofString());
            if (response.statusCode() == 200) {
                String weatherJson = response.body();
                System.out.println(weatherJson);
                ObjectMapper objectMapper = new ObjectMapper();
                Map<String, Object> rawMap = objectMapper.readValue(weatherJson, new
 TypeReference<Map<String, Object>>() {});
                Map<String, Document> documentMap = convertToDocumentMap(rawMap);
```

```
                Document weatherDocument = Document.fromMap(documentMap);
                System.out.println(weatherDocument);
                return weatherDocument;
            } else {
                throw new RuntimeException("Error fetching weather data: " +
 response.statusCode());
            }
        } catch (Exception e) {
            System.out.println("Error fetching weather data: " + e.getMessage());
            throw new RuntimeException("Error fetching weather data", e);
        }

    }

    private static Map<String, Document> convertToDocumentMap(Map<String, Object>
 inputMap) {
        Map<String, Document> result = new HashMap<>();
        for (Map.Entry<String, Object> entry : inputMap.entrySet()) {
            result.put(entry.getKey(), convertToDocument(entry.getValue()));
        }
        return result;
    }

    // Convert different types of Objects to Document
    private static Document convertToDocument(Object value) {
        if (value instanceof Map) {
            return Document.fromMap(convertToDocumentMap((Map<String, Object>)
 value));
        } else if (value instanceof Integer) {
            return Document.fromNumber(SdkNumber.fromInteger((Integer) value));
        } else if (value instanceof Double) {  //
            return Document.fromNumber(SdkNumber.fromDouble((Double) value));
        } else if (value instanceof Boolean) {
            return Document.fromBoolean((Boolean) value);
        } else if (value instanceof String) {
            return Document.fromString((String) value);
        }
        return Document.fromNull(); // Handle null values safely
    }
}
```

La acción de la API de Converse con una configuración de herramientas.

```
   /**
    * Sends an asynchronous converse request to the AI model.
    *
    * @param modelId      the unique identifier of the AI model to be used for the
converse request
    * @param systemPrompt the system prompt to be included in the converse request
    * @param conversation a list of messages representing the conversation history
    * @param toolSpec     the specification of the tool to be used in the converse
request
    * @return the converse response received from the AI model
    */
   public ConverseResponse sendConverseRequestAsync(String modelId, String
systemPrompt, List<Message> conversation, ToolSpecification toolSpec) {
       List<Tool> toolList = new ArrayList<>();
       Tool tool = Tool.builder()
           .toolSpec(toolSpec)
           .build();

       toolList.add(tool);

       ToolConfiguration configuration = ToolConfiguration.builder()
           .tools(toolList)
           .build();

       SystemContentBlock block = SystemContentBlock.builder()
           .text(systemPrompt)
           .build();

       ConverseRequest request = ConverseRequest.builder()
           .modelId(modelId)
           .system(block)
           .messages(conversation)
           .toolConfig(configuration)
           .build();

       try {
           ConverseResponse response = getClient().converse(request).join();
           return response;

       } catch (ModelNotReadyException ex) {
           throw new RuntimeException("Model is not ready: " + ex.getMessage(),
ex);
```

```
        } catch (BedrockRuntimeException ex) {
            throw new RuntimeException("Failed to converse with Bedrock model: " +
ex.getMessage(), ex);
        }
    }
```

- Para obtener información sobre la API, consulte Converse en la Referencia de la API de AWS SDK for Java 2.x .

Amazon Nova

Converse

El siguiente ejemplos de código muestra cómo enviar un mensaje de texto a Amazon Nova con la API de Converse de Bedrock.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Envíe un mensaje de texto a Amazon Nova mediante la API de Converse de Bedrock con el cliente asincrónico de Java.

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

import java.util.concurrent.CompletableFuture;

/**
 * This example demonstrates how to use the Amazon Nova foundation models
 * with an asynchronous Amazon Bedrock runtime client to generate text.
 * It shows how to:
 * - Set up the Amazon Bedrock runtime client
```

```
 * - Create a message
 * - Configure and send a request
 * - Process the response
 */
public class ConverseAsync {

    public static String converseAsync() {

        // Step 1: Create the Amazon Bedrock runtime client
        // The runtime client handles the communication with AI models on Amazon
 Bedrock
        BedrockRuntimeAsyncClient client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Step 2: Specify which model to use
        // Available Amazon Nova models and their characteristics:
        // - Amazon Nova Micro: Text-only model optimized for lowest latency and
 cost
        // - Amazon Nova Lite:  Fast, low-cost multimodal model for image, video,
 and text
        // - Amazon Nova Pro:   Advanced multimodal model balancing accuracy, speed,
 and cost
        //
        // For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        String modelId = "amazon.nova-lite-v1:0";

        // Step 3: Create the message
        // The message includes the text prompt and specifies that it comes from the
 user
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Step 4: Configure the request
        // Optional parameters to control the model's response:
        // - maxTokens: maximum number of tokens to generate
        // - temperature: randomness (max: 1.0, default: 0.7)
```

```
        //   OR
        // - topP: diversity of word choice (max: 1.0, default: 0.9)
        // Note: Use either temperature OR topP, but not both
        ConverseRequest request = ConverseRequest.builder()
                .modelId(modelId)
                .messages(message)
                .inferenceConfig(config -> config
                                .maxTokens(500)     // The maximum response length
                                .temperature(0.5F)  // Using temperature for
 randomness control
                        //.topP(0.9F)       // Alternative: use topP instead of
 temperature
                ).build();

        // Step 5: Send and process the request asynchronously
        // - Send the request to the model
        // - Extract and return the generated text from the response
        try {
            CompletableFuture<ConverseResponse> asyncResponse =
 client.converse(request);
            return asyncResponse.thenApply(
                    response -> response.output().message().content().get(0).text()
            ).get();

        } catch (Exception e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        String response = converseAsync();
        System.out.println(response);
    }
}
```

Envíe un mensaje de texto a Amazon Nova con la API de Converse de Bedrock.

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.exception.SdkClientException;
```

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

/**
 * This example demonstrates how to use the Amazon Nova foundation models
 * with a synchronous Amazon Bedrock runtime client to generate text.
 * It shows how to:
 * - Set up the Amazon Bedrock runtime client
 * - Create a message
 * - Configure and send a request
 * - Process the response
 */
public class Converse {

    public static String converse() {

        // Step 1: Create the Amazon Bedrock runtime client
        // The runtime client handles the communication with AI models on Amazon
 Bedrock
        BedrockRuntimeClient client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Step 2: Specify which model to use
        // Available Amazon Nova models and their characteristics:
        // - Amazon Nova Micro: Text-only model optimized for lowest latency and
 cost
        // - Amazon Nova Lite:  Fast, low-cost multimodal model for image, video,
 and text
        // - Amazon Nova Pro:   Advanced multimodal model balancing accuracy, speed,
 and cost
        //
        // For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        String modelId = "amazon.nova-lite-v1:0";

        // Step 3: Create the message
        // The message includes the text prompt and specifies that it comes from the
 user
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
```

```
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Step 4: Configure the request
        // Optional parameters to control the model's response:
        // - maxTokens: maximum number of tokens to generate
        // - temperature: randomness (max: 1.0, default: 0.7)
        //   OR
        // - topP: diversity of word choice (max: 1.0, default: 0.9)
        // Note: Use either temperature OR topP, but not both
        ConverseRequest request = ConverseRequest.builder()
                .modelId(modelId)
                .messages(message)
                .inferenceConfig(config -> config
                                .maxTokens(500)     // The maximum response length
                                .temperature(0.5F)  // Using temperature for
 randomness control
                        //.topP(0.9F)       // Alternative: use topP instead of
 temperature
                ).build();

        // Step 5: Send and process the request
        // - Send the request to the model
        // - Extract and return the generated text from the response
        try {
            ConverseResponse response = client.converse(request);
            return response.output().message().content().get(0).text();

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        String response = converse();
        System.out.println(response);
    }
}
```

- Para obtener información sobre la API, consulte Converse en la Referencia de la API de AWS SDK for Java 2.x .

ConverseStream

El siguiente ejemplo de código muestra cómo enviar un mensaje de texto a Amazon Nova con la API de Converse de Bedrock y procesar el flujo de respuesta en tiempo real.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Envíe un mensaje de texto a Amazon Nova con la API de Converse de Bedrock y procese el flujo de respuesta en tiempo real.

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

import java.util.concurrent.ExecutionException;

/**
 * This example demonstrates how to use the Amazon Nova foundation models with an
 * asynchronous Amazon Bedrock runtime client to generate streaming text responses.
 * It shows how to:
 * - Set up the Amazon Bedrock runtime client
 * - Create a message
 * - Configure a streaming request
 * - Set up a stream handler to process the response chunks
 * - Process the streaming response
 */
public class ConverseStream {
```

```
    public static void converseStream() {

        // Step 1: Create the Amazon Bedrock runtime client
        // The runtime client handles the communication with AI models on Amazon
 Bedrock
        BedrockRuntimeAsyncClient client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Step 2: Specify which model to use
        // Available Amazon Nova models and their characteristics:
        // - Amazon Nova Micro: Text-only model optimized for lowest latency and
 cost
        // - Amazon Nova Lite:  Fast, low-cost multimodal model for image, video,
 and text
        // - Amazon Nova Pro:   Advanced multimodal model balancing accuracy, speed,
 and cost
        //
        // For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        String modelId = "amazon.nova-lite-v1:0";

        // Step 3: Create the message
        // The message includes the text prompt and specifies that it comes from the
 user
        var inputText = "Describe the purpose of a 'hello world' program in one
 paragraph";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Step 4: Configure the request
        // Optional parameters to control the model's response:
        // - maxTokens: maximum number of tokens to generate
        // - temperature: randomness (max: 1.0, default: 0.7)
        //   OR
        // - topP: diversity of word choice (max: 1.0, default: 0.9)
        // Note: Use either temperature OR topP, but not both
        ConverseStreamRequest request = ConverseStreamRequest.builder()
                .modelId(modelId)
                .messages(message)
```

```
                .inferenceConfig(config -> config
                                .maxTokens(500)     // The maximum response length
                                .temperature(0.5F)  // Using temperature for
 randomness control
                        //.topP(0.9F)       // Alternative: use topP instead of
 temperature
                ).build();

        // Step 5: Set up the stream handler
        // The stream handler processes chunks of the response as they arrive
        // - onContentBlockDelta: Processes each text chunk
        // - onError: Handles any errors during streaming
        var streamHandler = ConverseStreamResponseHandler.builder()
                .subscriber(ConverseStreamResponseHandler.Visitor.builder()
                        .onContentBlockDelta(chunk -> {
                            System.out.print(chunk.delta().text());
                            System.out.flush();  // Ensure immediate output of each
 chunk
                        }).build())
                .onError(err -> System.err.printf("Can't invoke '%s': %s", modelId,
 err.getMessage()))
                .build();

        // Step 6: Send the streaming request and process the response
        // - Send the request to the model
        // - Attach the handler to process response chunks as they arrive
        // - Handle any errors during streaming
        try {
            client.converseStream(request, streamHandler).get();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
        }
    }

    public static void main(String[] args) {
        converseStream();
    }
}
```

- Para obtener más información sobre la API, consulta ConverseStreamla Referencia AWS SDK for Java 2.x de la API.

Escenario: uso de la herramienta con la API de Converse

El siguiente ejemplo de código muestra cómo crear una interacción típica entre una aplicación, un modelo de IA generativo y las herramientas conectadas o cómo APIs mediar en las interacciones entre la IA y el mundo exterior. Se presenta un ejemplo sobre cómo conectar una API meteorológica externa al modelo de IA para que pueda proporcionar información meteorológica en tiempo real en función de las entradas del usuario.

SDK para Java 2.x

> **Note**
>
> Hay más información. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

La ejecución principal del flujo de la situación. En esta situación, se orquesta la conversación entre el usuario, la API de Converse de Amazon Bedrock y una herramienta de previsión meteorológica.

```
/*
 This demo illustrates a tool use scenario using Amazon Bedrock's Converse API and a
 weather tool.
 The program interacts with a foundation model on Amazon Bedrock to provide weather
 information based on user
 input. It uses the Open-Meteo API (https://open-meteo.com) to retrieve current
 weather data for a given location.
 */
public class BedrockScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static String modelId = "amazon.nova-lite-v1:0";
    private static String defaultPrompt = "What is the weather like in Seattle?";
    private static WeatherTool weatherTool = new WeatherTool();

    // The maximum number of recursive calls allowed in the tool use function.
    // This helps prevent infinite loops and potential performance issues.
    private static int maxRecursions = 5;
    static BedrockActions bedrockActions = new BedrockActions();
```

```
    public static boolean interactive = true;

    private static final String systemPrompt = """
            You are a weather assistant that provides current weather data for user-
specified locations using only
            the Weather_Tool, which expects latitude and longitude. Infer the
 coordinates from the location yourself.
            If the user provides coordinates, infer the approximate location and
 refer to it in your response.
            To use the tool, you strictly apply the provided tool specification.

            - Explain your step-by-step process, and give brief updates before each
 step.
            - Only use the Weather_Tool for data. Never guess or make up
 information.
            - Repeat the tool use for subsequent requests if necessary.
            - If the tool errors, apologize, explain weather is unavailable, and
 suggest other options.
            - Report temperatures in °C (°F) and wind in km/h (mph). Keep weather
 reports concise. Sparingly use
              emojis where appropriate.
            - Only respond to weather queries. Remind off-topic users of your
 purpose.
            - Never claim to search online, access external data, or use tools
 besides Weather_Tool.
            - Complete the entire process until you have all required data before
 sending the complete response.
            """;

    public static void main(String[] args) {
        Scanner scanner = new Scanner(System.in);
        System.out.println("""
                ==================================================
                Welcome to the Amazon Bedrock Tool Use demo!
                ==================================================

                This assistant provides current weather information for user-
specified locations.
                You can ask for weather details by providing the location name or
 coordinates.

                Example queries:
                - What's the weather like in New York?
                - Current weather for latitude 40.70, longitude -74.01
```

```
                - Is it warmer in Rome or Barcelona today?

                To exit the program, simply type 'x' and press Enter.

                P.S.: You're not limited to single locations, or even to using
English!
                Have fun and experiment with the app!
                """);
        System.out.println(DASHES);

        try {
            runConversation(scanner);

        } catch (Exception ex) {
            System.out.println("There was a problem running the scenario: " +
ex.getMessage());
        }

        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("Amazon Bedrock Converse API with Tool Use Feature
Scenario is complete.");
        System.out.println(DASHES);
    }

    /**
     * Starts the conversation with the user and handles the interaction with
Bedrock.
     */
    private static List<Message> runConversation(Scanner scanner) {
        List<Message> conversation = new ArrayList<>();

        // Get the first user input
        String userInput = getUserInput("Your weather info request:", scanner);
        System.out.println(userInput);

        while (userInput != null) {
            ContentBlock block = ContentBlock.builder()
                    .text(userInput)
                    .build();

            List<ContentBlock> blockList = new ArrayList<>();
            blockList.add(block);
```

```
            Message message = Message.builder()
                    .role(ConversationRole.USER)
                    .content(blockList)
                    .build();

            conversation.add(message);

            // Send the conversation to Amazon Bedrock.
            ConverseResponse bedrockResponse =
sendConversationToBedrock(conversation);

            // Recursively handle the model's response until the model has returned
its final response or the recursion counter has reached 0.
            processModelResponse(bedrockResponse, conversation, maxRecursions);

            // Repeat the loop until the user decides to exit the application.
            userInput = getUserInput("Your weather info request:", scanner);
        }
        printFooter();
        return conversation;
    }

    /**
     * Processes the response from the model and updates the conversation
accordingly.
     *
     * @param modelResponse the response from the model
     * @param conversation  the ongoing conversation
     * @param maxRecursion  the maximum number of recursions allowed
     */
    private static void processModelResponse(ConverseResponse modelResponse,
List<Message> conversation, int maxRecursion) {
        if (maxRecursion <= 0) {
            // Stop the process, the number of recursive calls could indicate an
infinite loop
            System.out.println("\tWarning: Maximum number of recursions reached.
Please try again.");
        }

        // Append the model's response to the ongoing conversation
        conversation.add(modelResponse.output().message());

        String modelResponseVal = modelResponse.stopReasonAsString();
```

```
        if (modelResponseVal.compareTo("tool_use") == 0) {
            // If the stop reason is "tool_use", forward everything to the tool use
handler
            handleToolUse(modelResponse.output(), conversation, maxRecursion - 1);
        }

        if (modelResponseVal.compareTo("end_turn") == 0) {
            // If the stop reason is "end_turn", print the model's response text,
and finish the process

PrintModelResponse(modelResponse.output().message().content().get(0).text());
            if (!interactive) {
                defaultPrompt = "x";
            }
        }
    }

    /**
     * Handles the use of a tool by the model in a conversation.
     *
     * @param modelResponse the response from the model, which may include a tool
use request
     * @param conversation  the current conversation, which will be updated with the
tool use results
     * @param maxRecursion  the maximum number of recursive calls allowed to handle
the model's response
     */
    private static void handleToolUse(ConverseOutput modelResponse, List<Message>
conversation, int maxRecursion) {
        List<ContentBlock> toolResults = new ArrayList<>();

        // The model's response can consist of multiple content blocks
        for (ContentBlock contentBlock : modelResponse.message().content()) {
            if (contentBlock.text() != null && !contentBlock.text().isEmpty()) {
                // If the content block contains text, print it to the console
                PrintModelResponse(contentBlock.text());
            }

            if (contentBlock.toolUse() != null) {
                ToolResponse toolResponse = invokeTool(contentBlock.toolUse());

                // Add the tool use ID and the tool's response to the list of
results
                List<ToolResultContentBlock> contentBlockList = new ArrayList<>();
```

```
                ToolResultContentBlock block = ToolResultContentBlock.builder()
                        .json(toolResponse.getContent())
                        .build();
                contentBlockList.add(block);

                ToolResultBlock toolResultBlock = ToolResultBlock.builder()
                        .toolUseId(toolResponse.getToolUseId())
                        .content(contentBlockList)
                        .build();

                ContentBlock contentBlock1 = ContentBlock.builder()
                        .toolResult(toolResultBlock)
                        .build();

                toolResults.add(contentBlock1);
            }
        }

        // Embed the tool results in a new user message
        Message message = Message.builder()
                .role(ConversationRole.USER)
                .content(toolResults)
                .build();

        // Append the new message to the ongoing conversation
        //conversation.add(message);
        conversation.add(message);

        // Send the conversation to Amazon Bedrock
        var response = sendConversationToBedrock(conversation);

        // Recursively handle the model's response until the model has returned its
final response or the recursion counter has reached 0
        processModelResponse(response, conversation, maxRecursion);
    }

    // Invokes the specified tool with the given payload and returns the tool's
response.
    // If the requested tool does not exist, an error message is returned.
    private static ToolResponse invokeTool(ToolUseBlock payload) {
        String toolName = payload.name();

        if (Objects.equals(toolName, "Weather_Tool")) {
            Map<String, Document> inputData = payload.input().asMap();
```

```
            printToolUse(toolName, inputData);

            // Invoke the weather tool with the input data provided
            Document weatherResponse =
weatherTool.fetchWeatherData(inputData.get("latitude").toString(),
inputData.get("longitude").toString());

            ToolResponse toolResponse = new ToolResponse();
            toolResponse.setContent(weatherResponse);
            toolResponse.setToolUseId(payload.toolUseId());
            return toolResponse;
        } else {
            String errorMessage = "The requested tool with name " + toolName + "
does not exist.";
            System.out.println(errorMessage);
            return null;
        }
    }

    public static void printToolUse(String toolName, Map<String, Document>
inputData) {
        System.out.println("Invoking tool: " + toolName + " with input: " +
inputData.get("latitude").toString() + ", " + inputData.get("longitude").toString()
+ "...");
    }

    private static void PrintModelResponse(String message) {
        System.out.println("\tThe model's response:\n");
        System.out.println(message);
        System.out.println("");
    }

    private static ConverseResponse sendConversationToBedrock(List<Message>
conversation) {
        System.out.println("Calling Bedrock...");

        try {
            return bedrockActions.sendConverseRequestAsync(modelId, systemPrompt,
conversation, weatherTool.getToolSpec());
        } catch (ModelNotReadyException ex) {
             System.err.println("Model is not ready. Please try again later: " +
ex.getMessage());
            throw ex;
        } catch (BedrockRuntimeException ex) {
```

```
            System.err.println("Bedrock service error: " + ex.getMessage());
            throw ex;
        } catch (RuntimeException ex) {
            System.err.println("Unexpected error occurred: " + ex.getMessage());
            throw ex;
        }
    }

    private static ConverseResponse sendConversationToBedrockwithSpec(List<Message>
conversation, ToolSpecification toolSpec) {
        System.out.println("Calling Bedrock...");

        // Send the conversation, system prompt, and tool configuration, and return
the response
        return bedrockActions.sendConverseRequestAsync(modelId, systemPrompt,
conversation, toolSpec);
    }

    public static String getUserInput(String prompt, Scanner scanner) {
        String userInput = defaultPrompt;
        if (interactive) {
            System.out.println("*".repeat(80));
            System.out.println(prompt + " (x to exit): \n\t");
            userInput = scanner.nextLine();
        }

        if (userInput == null || userInput.trim().isEmpty()) {
            return getUserInput("\tPlease enter your weather info request, e.g., the
name of a city", scanner);
        }

        if (userInput.equalsIgnoreCase("x")) {
            return null;
        }

        return userInput;
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println("");
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();
```

```
            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }

    public static void printFooter() {
        System.out.println("""
                ================================================
                Thank you for checking out the Amazon Bedrock Tool Use demo. We hope
 you
                learned something new, or got some inspiration for your own apps
 today!

                For more Bedrock examples in different programming languages, have a
 look at:
                https://docs.aws.amazon.com/bedrock/latest/userguide/
service_code_examples.html
                ================================================
                """);
    }
}
```

Es la herramienta de previsión meteorológica que se utiliza en la demostración. Este archivo define la especificación de la herramienta e implementa la lógica para obtener los datos meteorológicos mediante la API de Open-Meteo.

```
public class WeatherTool {

    private static final Logger logger = LoggerFactory.getLogger(WeatherTool.class);
    private static java.net.http.HttpClient httpClient = null;

    /**
     * Returns the JSON Schema specification for the Weather tool. The tool
 specification
     * defines the input schema and describes the tool's functionality.
```

```
     * For more information, see https://json-schema.org/understanding-json-schema/
reference.
     *
     * @return The tool specification for the Weather tool.
     */
    public ToolSpecification getToolSpec() {
        Map<String, Document> latitudeMap = new HashMap<>();
        latitudeMap.put("type", Document.fromString("string"));
        latitudeMap.put("description", Document.fromString("Geographical WGS84
 latitude of the location."));

        // Create the nested "longitude" object
        Map<String, Document> longitudeMap = new HashMap<>();
        longitudeMap.put("type", Document.fromString("string"));
        longitudeMap.put("description", Document.fromString("Geographical WGS84
 longitude of the location."));

        // Create the "properties" object
        Map<String, Document> propertiesMap = new HashMap<>();
        propertiesMap.put("latitude", Document.fromMap(latitudeMap));
        propertiesMap.put("longitude", Document.fromMap(longitudeMap));

        // Create the "required" array
        List<Document> requiredList = new ArrayList<>();
        requiredList.add(Document.fromString("latitude"));
        requiredList.add(Document.fromString("longitude"));

        // Create the root object
        Map<String, Document> rootMap = new HashMap<>();
        rootMap.put("type", Document.fromString("object"));
        rootMap.put("properties", Document.fromMap(propertiesMap));
        rootMap.put("required", Document.fromList(requiredList));

        // Now create the Document representing the JSON schema
        Document document = Document.fromMap(rootMap);

        ToolSpecification specification = ToolSpecification.builder()
            .name("Weather_Tool")
            .description("Get the current weather for a given location, based on its
 WGS84 coordinates.")
            .inputSchema(ToolInputSchema.builder()
                .json(document)
                .build())
            .build();
```

```
        return specification;
    }

    /**
     * Fetches weather data for the given latitude and longitude.
     *
     * @param latitude  the latitude coordinate
     * @param longitude the longitude coordinate
     * @return a {@link CompletableFuture} containing the weather data as a JSON
 string
     */
    public Document fetchWeatherData(String latitude, String longitude) {
        HttpClient httpClient = HttpClient.newHttpClient();

        // Ensure no extra double quotes
        latitude = latitude.replace("\"", "");
        longitude = longitude.replace("\"", "");

        String endpoint = "https://api.open-meteo.com/v1/forecast";
        String url = String.format("%s?latitude=%s&longitude=
%s&current_weather=True", endpoint, latitude, longitude);

        HttpRequest request = HttpRequest.newBuilder()
            .uri(URI.create(url))
            .build();

        try {
            HttpResponse<String> response = httpClient.send(request,
 HttpResponse.BodyHandlers.ofString());
            if (response.statusCode() == 200) {
                String weatherJson = response.body();
                System.out.println(weatherJson);
                ObjectMapper objectMapper = new ObjectMapper();
                Map<String, Object> rawMap = objectMapper.readValue(weatherJson, new
 TypeReference<Map<String, Object>>() {});
                Map<String, Document> documentMap = convertToDocumentMap(rawMap);


                Document weatherDocument = Document.fromMap(documentMap);
                System.out.println(weatherDocument);
                return weatherDocument;
            } else {
```

```
                throw new RuntimeException("Error fetching weather data: " +
 response.statusCode());
            }
        } catch (Exception e) {
            System.out.println("Error fetching weather data: " + e.getMessage());
            throw new RuntimeException("Error fetching weather data", e);
        }

    }

    private static Map<String, Document> convertToDocumentMap(Map<String, Object>
 inputMap) {
        Map<String, Document> result = new HashMap<>();
        for (Map.Entry<String, Object> entry : inputMap.entrySet()) {
            result.put(entry.getKey(), convertToDocument(entry.getValue()));
        }
        return result;
    }

    // Convert different types of Objects to Document
    private static Document convertToDocument(Object value) {
        if (value instanceof Map) {
            return Document.fromMap(convertToDocumentMap((Map<String, Object>)
 value));
        } else if (value instanceof Integer) {
            return Document.fromNumber(SdkNumber.fromInteger((Integer) value));
        } else if (value instanceof Double) {  //
            return Document.fromNumber(SdkNumber.fromDouble((Double) value));
        } else if (value instanceof Boolean) {
            return Document.fromBoolean((Boolean) value);
        } else if (value instanceof String) {
            return Document.fromString((String) value);
        }
        return Document.fromNull(); // Handle null values safely
    }
}
```

La acción de la API de Converse con una configuración de herramientas.

```
    /**
     * Sends an asynchronous converse request to the AI model.
     *
```

```
    * @param modelId      the unique identifier of the AI model to be used for the
converse request
    * @param systemPrompt the system prompt to be included in the converse request
    * @param conversation a list of messages representing the conversation history
    * @param toolSpec     the specification of the tool to be used in the converse
request
    * @return the converse response received from the AI model
    */
   public ConverseResponse sendConverseRequestAsync(String modelId, String
systemPrompt, List<Message> conversation, ToolSpecification toolSpec) {
       List<Tool> toolList = new ArrayList<>();
       Tool tool = Tool.builder()
           .toolSpec(toolSpec)
           .build();

       toolList.add(tool);

       ToolConfiguration configuration = ToolConfiguration.builder()
           .tools(toolList)
           .build();

       SystemContentBlock block = SystemContentBlock.builder()
           .text(systemPrompt)
           .build();

       ConverseRequest request = ConverseRequest.builder()
           .modelId(modelId)
           .system(block)
           .messages(conversation)
           .toolConfig(configuration)
           .build();

       try {
           ConverseResponse response = getClient().converse(request).join();
           return response;

       } catch (ModelNotReadyException ex) {
           throw new RuntimeException("Model is not ready: " + ex.getMessage(),
ex);
       } catch (BedrockRuntimeException ex) {
           throw new RuntimeException("Failed to converse with Bedrock model: " +
ex.getMessage(), ex);
       }
   }
```

- Para obtener información sobre la API, consulte Converse en la Referencia de la API de AWS SDK for Java 2.x .

Amazon Nova Canvas

InvokeModel

El siguiente ejemplo de código muestra cómo invocar Amazon Nova Canvas en Amazon Bedrock para generar una imagen.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Cree una imagen con Amazon Nova Canvas.

```
import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.InvokeModelResponse;

import java.security.SecureRandom;
import java.util.Base64;

import static com.example.bedrockruntime.libs.ImageTools.displayImage;

/**
 * This example demonstrates how to use Amazon Nova Canvas to generate images.
 * It shows how to:
 * - Set up the Amazon Bedrock runtime client
```

```
 * - Configure the image generation parameters
 * - Send a request to generate an image
 * - Process the response and handle the generated image
 */
public class InvokeModel {

    public static byte[] invokeModel() {

        // Step 1: Create the Amazon Bedrock runtime client
        // The runtime client handles the communication with AI models on Amazon
 Bedrock
        BedrockRuntimeClient client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Step 2: Specify which model to use
        // For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        String modelId = "amazon.nova-canvas-v1:0";

        // Step 3: Configure the generation parameters and create the request
        // First, set the main parameters:
        // - prompt: Text description of the image to generate
        // - seed: Random number for reproducible generation (0 to 858,993,459)
        String prompt = "A stylized picture of a cute old steampunk robot";
        int seed = new SecureRandom().nextInt(858_993_460);

        // Then, create the request using a template with the following structure:
        // - taskType: TEXT_IMAGE (specifies text-to-image generation)
        // - textToImageParams: Contains the text prompt
        // - imageGenerationConfig: Contains optional generation settings (seed,
 quality, etc.)
        // For a list of available request parameters, see:
        // https://docs.aws.amazon.com/nova/latest/userguide/image-gen-req-resp-
structure.html
        String request = """
                {
                    "taskType": "TEXT_IMAGE",
                    "textToImageParams": {
                        "text": "{{prompt}}"
                    },
                    "imageGenerationConfig": {
```

```
                        "seed": {{seed}},
                        "quality": "standard"
                    }
                }"""
                .replace("{{prompt}}", prompt)
                .replace("{{seed}}", String.valueOf(seed));

        // Step 4: Send and process the request
        // - Send the request to the model using InvokeModelResponse
        // - Extract the Base64-encoded image from the JSON response
        // - Convert the encoded image to a byte array and return it
        try {
            InvokeModelResponse response = client.invokeModel(builder -> builder
                    .modelId(modelId)
                    .body(SdkBytes.fromUtf8String(request))
            );

            JSONObject responseBody = new
 JSONObject(response.body().asUtf8String());
            // Convert the Base64 string to byte array for better handling
            return Base64.getDecoder().decode(
                    new JSONPointer("/images/0").queryFrom(responseBody).toString()
            );

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s%n", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        System.out.println("Generating image. This may take a few seconds...");
        byte[] imageData = invokeModel();
        displayImage(imageData);
    }
}
```

- Para obtener más información sobre la API, consulta InvokeModella Referencia AWS SDK for Java 2.x de la API.

Amazon Titan Image Generator

InvokeModel

El siguiente ejemplo de código muestra cómo invocar Amazon Titan Image en Amazon Bedrock para generar una imagen.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Cree una imagen con Amazon Titan Image Generator.

```
// Create an image with the Amazon Titan Image Generator.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

import java.math.BigInteger;
import java.security.SecureRandom;

import static com.example.bedrockruntime.libs.ImageTools.displayImage;

public class InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
```

```
                .build();

        // Set the model ID, e.g., Titan Image G2.
        var modelId = "amazon.titan-image-generator-v2:0";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
titan-image.html
        var nativeRequestTemplate = """
                {
                    "taskType": "TEXT_IMAGE",
                    "textToImageParams": { "text": "{{prompt}}" },
                    "imageGenerationConfig": { "seed": {{seed}} }
                }""";

        // Define the prompt for the image generation.
        var prompt = "A stylized picture of a cute old steampunk robot";

        // Get a random 31-bit seed for the image generation (max. 2,147,483,647).
        var seed = new BigInteger(31, new SecureRandom());

        // Embed the prompt and seed in the model's native request payload.
        var nativeRequest = nativeRequestTemplate
                .replace("{{prompt}}", prompt)
                .replace("{{seed}}", seed.toString());

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated image data from the model's response.
            var base64ImageData = new JSONPointer("/
images/0").queryFrom(responseBody).toString();

            return base64ImageData;
```

```
        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        System.out.println("Generating image. This may take a few seconds...");

        String base64ImageData = invokeModel();

        displayImage(base64ImageData);
    }
}
```

- Para obtener más información sobre la API, consulta InvokeModella Referencia AWS SDK for Java 2.x de la API.

Incrustaciones de texto de Amazon Titan

InvokeModel

En el siguiente ejemplo de código, se muestra cómo:

- Comience a crear su primera incrustación.
- Para crear incrustaciones, configure el número de dimensiones y la normalización (solo en la versión 2).

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Cree su primera incrustación con Titan Text Embeddings V2.

```
// Generate and print an embedding with Amazon Titan Text Embeddings.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

public class InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Titan Text Embeddings V2.
        var modelId = "amazon.titan-embed-text-v2:0";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
titan-embed-text.html
        var nativeRequestTemplate = "{ \"inputText\": \"{{inputText}}\" }";

        // The text to convert into an embedding.
        var inputText = "Please recommend books with a theme similar to the movie
 'Inception'.";

        // Embed the prompt in the model's native request payload.
        String nativeRequest = nativeRequestTemplate.replace("{{inputText}}",
 inputText);

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
```

```
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated text from the model's response.
            var text = new JSONPointer("/
embedding").queryFrom(responseBody).toString();
            System.out.println(text);

            return text;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        invokeModel();
    }
}
```

Para crear incrustaciones, configure el número de dimensiones y la normalización (solo en la versión 2).

```
    /**
     * Invoke Amazon Titan Text Embeddings V2 with additional inference parameters.
     *
     * @param inputText  - The text to convert to an embedding.
     * @param dimensions - The number of dimensions the output embeddings should
 have.
     *                   Values accepted by the model: 256, 512, 1024.
     * @param normalize  - A flag indicating whether or not to normalize the output
 embeddings.
     * @return The {@link JSONObject} representing the model's response.
     */
```

```
    public static JSONObject invokeModel(String inputText, int dimensions, boolean
normalize) {

        // Create a Bedrock Runtime client in the AWS Region of your choice.
        var client = BedrockRuntimeClient.builder()
                .region(Region.US_WEST_2)
                .build();

        // Set the model ID, e.g., Titan Embed Text v2.0.
        var modelId = "amazon.titan-embed-text-v2:0";

        // Create the request for the model.
        var nativeRequest = """
                {
                    "inputText": "%s",
                    "dimensions": %d,
                    "normalize": %b
                }
                """.formatted(inputText, dimensions, normalize);

        // Encode and send the request.
        var response = client.invokeModel(request -> {
            request.body(SdkBytes.fromUtf8String(nativeRequest));
            request.modelId(modelId);
        });

        // Decode the model's response.
        var modelResponse = new JSONObject(response.body().asUtf8String());

        // Extract and print the generated embedding and the input text token count.
        var embedding = modelResponse.getJSONArray("embedding");
        var inputTokenCount = modelResponse.getBigInteger("inputTextTokenCount");
        System.out.println("Embedding: " + embedding);
        System.out.println("\nInput token count: " + inputTokenCount);

        // Return the model's native response.
        return modelResponse;
    }
```

- Para obtener más información sobre la API, consulta InvokeModella Referencia AWS SDK for Java 2.x de la API.

Anthropic Claude

Converse

El siguiente ejemplo de código muestra cómo enviar un mensaje de texto a Anthropic Claude con la API de Converse de Bedrock.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Envíe un mensaje de texto a Anthropic Claude mediante la API de Converse de Bedrock.

```
// Use the Converse API to send a text message to Anthropic Claude.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.ConverseResponse;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

public class Converse {

    public static String converse() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Claude 3 Haiku.
        var modelId = "anthropic.claude-3-haiku-20240307-v1:0";
```

```
        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();


        try {
            // Send the message with a basic inference configuration.
            ConverseResponse response = client.converse(request -> request
                    .modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)));

            // Retrieve the generated text from Bedrock's response object.
            var responseText =
 response.output().message().content().getFirst().text();
            System.out.println(responseText);

            return responseText;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converse();
    }
}
```

Envíe un mensaje de texto a Amazon Claude mediante la API de Converse de Bedrock con el cliente asincrónico de Java.

```
// Use the Converse API to send a text message to Anthropic Claude
// with the async Java client.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutionException;

public class ConverseAsync {

    public static String converseAsync() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Claude 3 Haiku.
        var modelId = "anthropic.claude-3-haiku-20240307-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Send the message with a basic inference configuration.
        var request = client.converse(params -> params
                .modelId(modelId)
                .messages(message)
                .inferenceConfig(config -> config
                        .maxTokens(512)
```

```
                        .temperature(0.5F)
                        .topP(0.9F))
        );

        // Prepare a future object to handle the asynchronous response.
        CompletableFuture<String> future = new CompletableFuture<>();

        // Handle the response or error using the future object.
        request.whenComplete((response, error) -> {
            if (error == null) {
                // Extract the generated text from Bedrock's response object.
                String responseText =
 response.output().message().content().getFirst().text();
                future.complete(responseText);
            } else {
                future.completeExceptionally(error);
            }
        });

        try {
            // Wait for the future object to complete and retrieve the generated
 text.
            String responseText = future.get();
            System.out.println(responseText);

            return responseText;

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converseAsync();
    }
}
```

- Para obtener información sobre la API, consulte Converse en la Referencia de la API de AWS SDK for Java 2.x .

ConverseStream

El siguiente ejemplos de código muestra cómo enviar un mensaje de texto a Anthropic Claude con la API de Converse de Bedrock y procesar el flujo de respuesta en tiempo real.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Envíe un mensaje de texto a Anthropic Claude con la API de Converse de Bedrock y procese el flujo de respuesta en tiempo real.

```
// Use the Converse API to send a text message to Anthropic Claude
// and print the response stream.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import
 software.amazon.awssdk.services.bedrockruntime.model.ConverseStreamResponseHandler;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.ExecutionException;

public class ConverseStream {

    public static void main(String[] args) {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();
```

```
        // Set the model ID, e.g., Claude 3 Haiku.
        var modelId = "anthropic.claude-3-haiku-20240307-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Create a handler to extract and print the response text in real-time.
        var responseStreamHandler = ConverseStreamResponseHandler.builder()
                .subscriber(ConverseStreamResponseHandler.Visitor.builder()
                        .onContentBlockDelta(chunk -> {
                            String responseText = chunk.delta().text();
                            System.out.print(responseText);
                        }).build()
                ).onError(err ->
                        System.err.printf("Can't invoke '%s': %s", modelId,
 err.getMessage())
                ).build();

        try {
            // Send the message with a basic inference configuration and attach the
 handler.
            client.converseStream(request -> request.modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)
                    ), responseStreamHandler).get();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta ConverseStreamla Referencia AWS SDK for Java 2.x de la API.

InvokeModel

El siguiente ejemplo de código muestra cómo enviar un mensaje de texto a Anthropic Claude con la API de Invoke Model.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Use la API de Invoke Model para enviar un mensaje de texto.

```
// Use the native inference API to send a text message to Anthropic Claude.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

public class InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Claude 3 Haiku.
        var modelId = "anthropic.claude-3-haiku-20240307-v1:0";
```

```
        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
anthropic-claude-messages.html
        var nativeRequestTemplate = """
                {
                    "anthropic_version": "bedrock-2023-05-31",
                    "max_tokens": 512,
                    "temperature": 0.5,
                    "messages": [{
                        "role": "user",
                        "content": "{{prompt}}"
                    }]
                }""";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in the model's native request payload.
        String nativeRequest = nativeRequestTemplate.replace("{{prompt}}", prompt);

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated text from the model's response.
            var text = new JSONPointer("/content/0/
text").queryFrom(responseBody).toString();
            System.out.println(text);

            return text;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
```

```
        }
    }

    public static void main(String[] args) {
        invokeModel();
    }
}
```

- Para obtener más información sobre la API, consulta InvokeModella Referencia AWS SDK for Java 2.x de la API.

InvokeModelWithResponseStream

El siguiente ejemplos de código muestran cómo enviar un mensaje de texto a los modelos de Anthropic Claude mediante la API de Invoke Model e imprimir el flujo de respuesta.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Utilice la API de Invoke Model para enviar un mensaje de texto y procesar el flujo de respuesta en tiempo real.

```
// Use the native inference API to send a text message to Anthropic Claude
// and print the response stream.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamRequest;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH
```

```
import java.util.Objects;
import java.util.concurrent.ExecutionException;

import static
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

public class InvokeModelWithResponseStream {

    public static String invokeModelWithResponseStream() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Claude 3 Haiku.
        var modelId = "anthropic.claude-3-haiku-20240307-v1:0";

        // The InvokeModelWithResponseStream API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
anthropic-claude-messages.html
        var nativeRequestTemplate = """
                {
                    "anthropic_version": "bedrock-2023-05-31",
                    "max_tokens": 512,
                    "temperature": 0.5,
                    "messages": [{
                        "role": "user",
                        "content": "{{prompt}}"
                    }]
                }""";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in the model's native request payload.
        String nativeRequest = nativeRequestTemplate.replace("{{prompt}}", prompt);
```

```
        // Create a request with the model ID and the model's native request
 payload.
        var request = InvokeModelWithResponseStreamRequest.builder()
                .body(SdkBytes.fromUtf8String(nativeRequest))
                .modelId(modelId)
                .build();

        // Prepare a buffer to accumulate the generated response text.
        var completeResponseTextBuffer = new StringBuilder();

        // Prepare a handler to extract, accumulate, and print the response text in
 real-time.
        var responseStreamHandler =
 InvokeModelWithResponseStreamResponseHandler.builder()
                .subscriber(Visitor.builder().onChunk(chunk -> {
                    var response = new JSONObject(chunk.bytes().asUtf8String());

                    // Extract and print the text from the content blocks.
                    if (Objects.equals(response.getString("type"),
 "content_block_delta")) {
                        var text = new JSONPointer("/delta/
text").queryFrom(response);
                        System.out.print(text);

                        // Append the text to the response text buffer.
                        completeResponseTextBuffer.append(text);
                    }
                }).build()).build();

        try {
            // Send the request and wait for the handler to process the response.
            client.invokeModelWithResponseStream(request,
 responseStreamHandler).get();

            // Return the complete response text.
            return completeResponseTextBuffer.toString();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
            throw new RuntimeException(e);
        }
    }
```

```
    public static void main(String[] args) throws ExecutionException,
 InterruptedException {
        invokeModelWithResponseStream();
    }
}
```

- Para obtener más información sobre la API, consulta InvokeModelWithResponseStreamla Referencia AWS SDK for Java 2.x de la API.

Razonamiento

El siguiente ejemplo de código muestra cómo utilizar la capacidad de razonamiento de Anthropic Claude 3.7 Sonnet en Amazon Bedrock.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Usar la capacidad de razonamiento de Anthropic Claude 3.7 Sonnet con el cliente asíncrono del tiempo de ejecución de Bedrock.

```
import com.example.bedrockruntime.models.anthropicClaude.lib.ReasoningResponse;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.document.Document;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

import java.util.concurrent.CompletableFuture;

/**
 * This example demonstrates how to use Anthropic Claude 3.7 Sonnet's reasoning
 capability
 * with an asynchronous Amazon Bedrock runtime client.
 * It shows how to:
```

```
 * - Set up the Amazon Bedrock async runtime client
 * - Create a message
 * - Configure reasoning parameters
 * - Send an asynchronous request with reasoning enabled
 * - Process both the reasoning output and final response
 */
public class ReasoningAsync {

    public static ReasoningResponse reasoningAsync() {

        // Create the Amazon Bedrock runtime client
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Specify the model ID. For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        var modelId = "us.anthropic.claude-3-7-sonnet-20250219-v1:0";

        // Create the message with the user's prompt
        var prompt = "Describe the purpose of a 'hello world' program in one line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(prompt))
                .role(ConversationRole.USER)
                .build();

        // Configure reasoning parameters with a 2000 token budget
        Document reasoningConfig = Document.mapBuilder()
                .putDocument("thinking", Document.mapBuilder()
                        .putString("type", "enabled")
                        .putNumber("budget_tokens", 2000)
                        .build())
                .build();

        try {
            // Send message and reasoning configuration to the model
            CompletableFuture<ConverseResponse> asyncResponse =
 client.converse(request -> request
                    .additionalModelRequestFields(reasoningConfig)
                    .messages(message)
                    .modelId(modelId)
            );
```

```
            // Process the response asynchronously
            return asyncResponse.thenApply(response -> {

                        var content = response.output().message().content();
                        ReasoningContentBlock reasoning = null;
                        String text = null;

                        // Process each content block to find reasoning and response
 text
                        for (ContentBlock block : content) {
                            if (block.reasoningContent() != null) {
                                reasoning = block.reasoningContent();
                            } else if (block.text() != null) {
                                text = block.text();
                            }
                        }

                        return new ReasoningResponse(reasoning, text);
                    }
            ).get();

        } catch (Exception e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        // Execute the example and display reasoning and final response
        ReasoningResponse response = reasoningAsync();
        System.out.println("\n<thinking>");
        System.out.println(response.reasoning().reasoningText());
        System.out.println("</thinking>\n");
        System.out.println(response.text());
    }
}
```

Usar la capacidad de razonamiento de Anthropic Claude 3.7 Sonnet con el cliente sincrónico del tiempo de ejecución de Bedrock.

```
import com.example.bedrockruntime.models.anthropicClaude.lib.ReasoningResponse;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.document.Document;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

/**
 * This example demonstrates how to use Anthropic Claude 3.7 Sonnet's reasoning
 capability
 * with the synchronous Amazon Bedrock runtime client.
 * It shows how to:
 * - Set up the Amazon Bedrock runtime client
 * - Create a message
 * - Configure reasoning parameters
 * - Send a request with reasoning enabled
 * - Process both the reasoning output and final response
 */
public class Reasoning {

    public static ReasoningResponse reasoning() {

        // Create the Amazon Bedrock runtime client
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Specify the model ID. For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        var modelId = "us.anthropic.claude-3-7-sonnet-20250219-v1:0";

        // Create the message with the user's prompt
        var prompt = "Describe the purpose of a 'hello world' program in one line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(prompt))
                .role(ConversationRole.USER)
                .build();

        // Configure reasoning parameters with a 2000 token budget
        Document reasoningConfig = Document.mapBuilder()
                .putDocument("thinking", Document.mapBuilder()
```

```
                        .putString("type", "enabled")
                        .putNumber("budget_tokens", 2000)
                        .build())
                .build();

        try {
            // Send message and reasoning configuration to the model
            ConverseResponse bedrockResponse = client.converse(request -> request
                    .additionalModelRequestFields(reasoningConfig)
                    .messages(message)
                    .modelId(modelId)
            );


            // Extract both reasoning and final response
            var content = bedrockResponse.output().message().content();
            ReasoningContentBlock reasoning = null;
            String text = null;

            // Process each content block to find reasoning and response text
            for (ContentBlock block : content) {
                if (block.reasoningContent() != null) {
                    reasoning = block.reasoningContent();
                } else if (block.text() != null) {
                    text = block.text();
                }
            }

            return new ReasoningResponse(reasoning, text);

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        // Execute the example and display reasoning and final response
        ReasoningResponse response = reasoning();
        System.out.println("\n<thinking>");
        System.out.println(response.reasoning().reasoningText());
        System.out.println("</thinking>\n");
        System.out.println(response.text());
```

```
    }
}
```

- Para obtener información sobre la API, consulte Converse en la Referencia de la API de AWS SDK for Java 2.x .

Razonamiento con una respuesta en streaming

El siguiente ejemplo de código muestra cómo utilizar la capacidad de razonamiento de Anthropic Claude 3.7 Sonnet en Amazon Bedrock.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Usar la capacidad de razonamiento de Anthropic Claude 3.7 Sonnet para generar respuestas de texto en streaming.

```
import com.example.bedrockruntime.models.anthropicClaude.lib.ReasoningResponse;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.document.Document;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

import java.util.concurrent.ExecutionException;
import java.util.concurrent.atomic.AtomicReference;

/**
 * This example demonstrates how to use Anthropic Claude 3.7 Sonnet's reasoning
 * capability to generate streaming text responses.
 * It shows how to:
 * - Set up the Amazon Bedrock runtime client
 * - Create a message
```

```
 * - Configure a streaming request
 * - Set up a stream handler to process the response chunks
 * - Process the streaming response
 */
public class ReasoningStream {

    public static ReasoningResponse reasoningStream() {

        // Create the Amazon Bedrock runtime client
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Specify the model ID. For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        var modelId = "us.anthropic.claude-3-7-sonnet-20250219-v1:0";

        // Create the message with the user's prompt
        var prompt = "Describe the purpose of a 'hello world' program in one line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(prompt))
                .role(ConversationRole.USER)
                .build();

        // Configure reasoning parameters with a 2000 token budget
        Document reasoningConfig = Document.mapBuilder()
                .putDocument("thinking", Document.mapBuilder()
                        .putString("type", "enabled")
                        .putNumber("budget_tokens", 2000)
                        .build())
                .build();

        // Configure the request with the message, model ID, and reasoning config
        ConverseStreamRequest request = ConverseStreamRequest.builder()
                .additionalModelRequestFields(reasoningConfig)
                .messages(message)
                .modelId(modelId)
                .build();

        StringBuilder reasoning = new StringBuilder();
        StringBuilder text = new StringBuilder();
        AtomicReference<ReasoningResponse> finalresponse = new AtomicReference<>();
```

```
        // Set up the stream handler to processes chunks of the response as they
arrive
        var streamHandler = ConverseStreamResponseHandler.builder()
                .subscriber(ConverseStreamResponseHandler.Visitor.builder()
                        .onContentBlockDelta(chunk -> {
                            ContentBlockDelta delta = chunk.delta();
                            if (delta.reasoningContent() != null) {
                                if (reasoning.isEmpty()) {
                                    System.out.println("\n<thinking>");
                                }
                                if (delta.reasoningContent().text() != null) {

System.out.print(delta.reasoningContent().text());

reasoning.append(delta.reasoningContent().text());
                                }
                            } else if (delta.text() != null) {
                                if (text.isEmpty()) {
                                    System.out.println("\n</thinking>\n");
                                }
                                System.out.print(delta.text());
                                text.append(delta.text());
                            }
                            System.out.flush();  // Ensure immediate output of each
chunk
                        }).build())
                .onComplete(() -> finalresponse.set(new ReasoningResponse(
                        ReasoningContentBlock.fromReasoningText(t ->
t.text(reasoning.toString())),
                        text.toString()
                )))
                .onError(err -> System.err.printf("Can't invoke '%s': %s", modelId,
err.getMessage()))
                .build();

        // Step 6: Send the streaming request and process the response
        // - Send the request to the model
        // - Attach the handler to process response chunks as they arrive
        // - Handle any errors during streaming
        try {
            client.converseStream(request, streamHandler).get();
            return finalresponse.get();
```

```
        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
            throw new RuntimeException(e);
        } catch (Exception e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        reasoningStream();
    }
}
```

- Para obtener información sobre la API, consulte Converse en la Referencia de la API de AWS SDK for Java 2.x .

Cohere Command

Converse

El siguiente ejemplo de código muestra cómo enviar un mensaje de texto a Cohere Command con la API de Converse de Bedrock.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Envíe un mensaje de texto a Cohere Command mediante la API de Converse de Bedrock.

```
// Use the Converse API to send a text message to Cohere Command.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.exception.SdkClientException;
```

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.ConverseResponse;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

public class Converse {

    public static String converse() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Command R.
        var modelId = "cohere.command-r-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();


        try {
            // Send the message with a basic inference configuration.
            ConverseResponse response = client.converse(request -> request
                    .modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)));

            // Retrieve the generated text from Bedrock's response object.
            var responseText = response.output().message().content().get(0).text();
```

```
            System.out.println(responseText);

            return responseText;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converse();
    }
}
```

Envíe un mensaje de texto a Cohere Command mediante la API de Converse de Bedrock con el cliente asincrónico de Java.

```
// Use the Converse API to send a text message to Cohere Command
// with the async Java client.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutionException;

public class ConverseAsync {

    public static String converseAsync() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
```

```
                .build();

        // Set the model ID, e.g., Command R.
        var modelId = "cohere.command-r-v1:0";

        // Create the input text and embed it in a message object with the user
role.
        var inputText = "Describe the purpose of a 'hello world' program in one
line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Send the message with a basic inference configuration.
        var request = client.converse(params -> params
                .modelId(modelId)
                .messages(message)
                .inferenceConfig(config -> config
                        .maxTokens(512)
                        .temperature(0.5F)
                        .topP(0.9F))
        );

        // Prepare a future object to handle the asynchronous response.
        CompletableFuture<String> future = new CompletableFuture<>();

        // Handle the response or error using the future object.
        request.whenComplete((response, error) -> {
            if (error == null) {
                // Extract the generated text from Bedrock's response object.
                String responseText =
response.output().message().content().get(0).text();
                future.complete(responseText);
            } else {
                future.completeExceptionally(error);
            }
        });

        try {
            // Wait for the future object to complete and retrieve the generated
text.
            String responseText = future.get();
            System.out.println(responseText);
```

```
            return responseText;

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converseAsync();
    }
}
```

- Para obtener información sobre la API, consulte Converse en la Referencia de la API de AWS SDK for Java 2.x .

ConverseStream

El siguiente ejemplo de código muestra cómo enviar un mensaje de texto a Cohere Command con la API de Converse de Bedrock y procesar el flujo de respuesta en tiempo real.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Envíe un mensaje de texto a Cohere Command con la API de Converse de Bedrock y procese el flujo de respuesta en tiempo real.

```
// Use the Converse API to send a text message to Cohere Command
// and print the response stream.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
```

```
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import
 software.amazon.awssdk.services.bedrockruntime.model.ConverseStreamResponseHandler;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.ExecutionException;

public class ConverseStream {

    public static void main(String[] args) {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Command R.
        var modelId = "cohere.command-r-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Create a handler to extract and print the response text in real-time.
        var responseStreamHandler = ConverseStreamResponseHandler.builder()
                .subscriber(ConverseStreamResponseHandler.Visitor.builder()
                        .onContentBlockDelta(chunk -> {
                            String responseText = chunk.delta().text();
                            System.out.print(responseText);
                        }).build()
                ).onError(err ->
                        System.err.printf("Can't invoke '%s': %s", modelId,
 err.getMessage())
                ).build();

        try {
```

```
            // Send the message with a basic inference configuration and attach the
 handler.
            client.converseStream(request -> request.modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)
                    ), responseStreamHandler).get();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta ConverseStreamla Referencia AWS SDK for Java 2.x de la API.

InvokeModel: Comando R y R+

El siguiente ejemplo de código muestra cómo enviar un mensaje de texto a Cohere Command R y R + con la API Invoke Model.

SDK para Java 2.x

> **Note**
>
> Hay más información. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Use la API de Invoke Model para enviar un mensaje de texto.

```
// Use the native inference API to send a text message to Cohere Command R.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
```

```
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

public class Command_R_InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Command R.
        var modelId = "cohere.command-r-v1:0";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
cohere-command-r-plus.html
        var nativeRequestTemplate = "{ \"message\": \"{{prompt}}\" }";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in the model's native request payload.
        String nativeRequest = nativeRequestTemplate.replace("{{prompt}}", prompt);

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated text from the model's response.
            var text = new JSONPointer("/text").queryFrom(responseBody).toString();
```

```
            System.out.println(text);

            return text;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        invokeModel();
    }
}
```

- Para obtener más información sobre la API, consulta InvokeModella Referencia AWS SDK for Java 2.x de la API.

InvokeModelWithResponseStream: Comando R y R+

El siguiente ejemplo de código muestra cómo enviar un mensaje de texto a Cohere Command mediante la API Invoke Model con un flujo de respuesta.

SDK para Java 2.x

> **Note**
>
> Hay más información. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Utilice la API de Invoke Model para enviar un mensaje de texto y procesar el flujo de respuesta en tiempo real.

```
// Use the native inference API to send a text message to Cohere Command R
// and print the response stream.

import org.json.JSONObject;
import org.json.JSONPointer;
```

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamRequest;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

import java.util.concurrent.ExecutionException;

import static
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

public class Command_R_InvokeModelWithResponseStream {

    public static String invokeModelWithResponseStream() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Command R.
        var modelId = "cohere.command-r-v1:0";

        // The InvokeModelWithResponseStream API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
cohere-command-r-plus.html
        var nativeRequestTemplate = "{ \"message\": \"{{prompt}}\" }";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in the model's native request payload.
        String nativeRequest = nativeRequestTemplate.replace("{{prompt}}", prompt);

        // Create a request with the model ID and the model's native request
 payload.
```

```
        var request = InvokeModelWithResponseStreamRequest.builder()
                .body(SdkBytes.fromUtf8String(nativeRequest))
                .modelId(modelId)
                .build();

        // Prepare a buffer to accumulate the generated response text.
        var completeResponseTextBuffer = new StringBuilder();

        // Prepare a handler to extract, accumulate, and print the response text in
 real-time.
        var responseStreamHandler =
 InvokeModelWithResponseStreamResponseHandler.builder()
                .subscriber(Visitor.builder().onChunk(chunk -> {
                    // Extract and print the text from the model's native response.
                    var response = new JSONObject(chunk.bytes().asUtf8String());
                    var text = new JSONPointer("/text").queryFrom(response);
                    System.out.print(text);

                    // Append the text to the response text buffer.
                    completeResponseTextBuffer.append(text);
                }).build()).build();

        try {
            // Send the request and wait for the handler to process the response.
            client.invokeModelWithResponseStream(request,
 responseStreamHandler).get();

            // Return the complete response text.
            return completeResponseTextBuffer.toString();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) throws ExecutionException,
 InterruptedException {
        invokeModelWithResponseStream();
    }
}
```

- Para obtener más información sobre la API, consulta InvokeModella Referencia AWS SDK for Java 2.x de la API.

Meta Llama

Converse

El siguiente ejemplo de código muestra cómo enviar un mensaje de texto a Meta Llama con la API de Converse de Bedrock.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Envíe un mensaje de texto a Meta Llama mediante la API de Converse de Bedrock.

```
// Use the Converse API to send a text message to Meta Llama.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.ConverseResponse;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

public class Converse {

    public static String converse() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
```

```
                .build();

        // Set the model ID, e.g., Llama 3 8b Instruct.
        var modelId = "meta.llama3-8b-instruct-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();


        try {
            // Send the message with a basic inference configuration.
            ConverseResponse response = client.converse(request -> request
                    .modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)));

            // Retrieve the generated text from Bedrock's response object.
            var responseText = response.output().message().content().get(0).text();
            System.out.println(responseText);

            return responseText;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converse();
    }
}
```

Envíe un mensaje de texto a Meta Llama mediante la API de Converse de Bedrock con el cliente asincrónico de Java.

```
// Use the Converse API to send a text message to Meta Llama
// with the async Java client.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutionException;

public class ConverseAsync {

    public static String converseAsync() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Llama 3 8b Instruct.
        var modelId = "meta.llama3-8b-instruct-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Send the message with a basic inference configuration.
        var request = client.converse(params -> params
                .modelId(modelId)
```

```
                .messages(message)
                .inferenceConfig(config -> config
                        .maxTokens(512)
                        .temperature(0.5F)
                        .topP(0.9F))
        );

        // Prepare a future object to handle the asynchronous response.
        CompletableFuture<String> future = new CompletableFuture<>();

        // Handle the response or error using the future object.
        request.whenComplete((response, error) -> {
            if (error == null) {
                // Extract the generated text from Bedrock's response object.
                String responseText =
 response.output().message().content().get(0).text();
                future.complete(responseText);
            } else {
                future.completeExceptionally(error);
            }
        });

        try {
            // Wait for the future object to complete and retrieve the generated
 text.
            String responseText = future.get();
            System.out.println(responseText);

            return responseText;

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converseAsync();
    }
}
```

- Para obtener información sobre la API, consulte Converse en la Referencia de la API de AWS SDK for Java 2.x .

ConverseStream

El siguiente ejemplo de código muestra cómo enviar un mensaje de texto a Meta Llama con la API de Converse de Bedrock y procesar el flujo de respuesta en tiempo real.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Envíe un mensaje de texto a Meta Llama con la API de Converse de Bedrock y procese el flujo de respuesta en tiempo real.

```
// Use the Converse API to send a text message to Meta Llama
// and print the response stream.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import
 software.amazon.awssdk.services.bedrockruntime.model.ConverseStreamResponseHandler;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.ExecutionException;

public class ConverseStream {

    public static void main(String[] args) {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
```

```
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Llama 3 8b Instruct.
        var modelId = "meta.llama3-8b-instruct-v1:0";

        // Create the input text and embed it in a message object with the user
role.
        var inputText = "Describe the purpose of a 'hello world' program in one
line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Create a handler to extract and print the response text in real-time.
        var responseStreamHandler = ConverseStreamResponseHandler.builder()
                .subscriber(ConverseStreamResponseHandler.Visitor.builder()
                        .onContentBlockDelta(chunk -> {
                            String responseText = chunk.delta().text();
                            System.out.print(responseText);
                        }).build()
                ).onError(err ->
                        System.err.printf("Can't invoke '%s': %s", modelId,
err.getMessage())
                ).build();

        try {
            // Send the message with a basic inference configuration and attach the
handler.
            client.converseStream(request -> request
                    .modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)
                    ), responseStreamHandler).get();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
e.getCause().getMessage());
        }
```

```
    }
}
```

- Para obtener más información sobre la API, consulta ConverseStreamla Referencia AWS SDK for Java 2.x de la API.

InvokeModel

El siguiente ejemplos de código muestra cómo enviar un mensaje de texto a Meta Llama con la API de Invoke Model.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Use la API de Invoke Model para enviar un mensaje de texto.

```
// Use the native inference API to send a text message to Meta Llama 3.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

public class Llama3_InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_WEST_2)
```

```
                .build();

        // Set the model ID, e.g., Llama 3 70b Instruct.
        var modelId = "meta.llama3-70b-instruct-v1:0";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
meta.html
        var nativeRequestTemplate = "{ \"prompt\": \"{{instruction}}\" }";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in Llama 3's instruction format.
        var instruction = (
                "<|begin_of_text|><|start_header_id|>user<|end_header_id|>\\n" +
                "{{prompt}} <|eot_id|>\\n" +
                "<|start_header_id|>assistant<|end_header_id|>\\n"
        ).replace("{{prompt}}", prompt);

        // Embed the instruction in the the native request payload.
        var nativeRequest = nativeRequestTemplate.replace("{{instruction}}",
 instruction);

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated text from the model's response.
            var text = new JSONPointer("/
generation").queryFrom(responseBody).toString();
            System.out.println(text);

            return text;

        } catch (SdkClientException e) {
```

```
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        invokeModel();
    }
}
```

- Para obtener más información sobre la API, consulta InvokeModella Referencia AWS SDK for Java 2.x de la API.

InvokeModelWithResponseStream

El siguiente ejemplos de código muestra cómo enviar un mensaje de texto a Meta Llama mediante la API de Invoke Model e imprimir el flujo de respuesta.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Utilice la API de Invoke Model para enviar un mensaje de texto y procesar el flujo de respuesta en tiempo real.

```
// Use the native inference API to send a text message to Meta Llama 3
// and print the response stream.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
```

```
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamRequest;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

import java.util.concurrent.ExecutionException;

import static
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

public class Llama3_InvokeModelWithResponseStream {

    public static String invokeModelWithResponseStream() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_WEST_2)
                .build();

        // Set the model ID, e.g., Llama 3 70b Instruct.
        var modelId = "meta.llama3-70b-instruct-v1:0";

        // The InvokeModelWithResponseStream API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
meta.html
        var nativeRequestTemplate = "{ \"prompt\": \"{{instruction}}\" }";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in Llama 3's instruction format.
        var instruction = (
                "<|begin_of_text|><|start_header_id|>user<|end_header_id|>\\n" +
                "{{prompt}} <|eot_id|>\\n" +
                "<|start_header_id|>assistant<|end_header_id|>\\n"
        ).replace("{{prompt}}", prompt);

        // Embed the instruction in the the native request payload.
```

```
        var nativeRequest = nativeRequestTemplate.replace("{{instruction}}",
instruction);

        // Create a request with the model ID and the model's native request
payload.
        var request = InvokeModelWithResponseStreamRequest.builder()
                .body(SdkBytes.fromUtf8String(nativeRequest))
                .modelId(modelId)
                .build();

        // Prepare a buffer to accumulate the generated response text.
        var completeResponseTextBuffer = new StringBuilder();

        // Prepare a handler to extract, accumulate, and print the response text in
real-time.
        var responseStreamHandler =
InvokeModelWithResponseStreamResponseHandler.builder()
                .subscriber(Visitor.builder().onChunk(chunk -> {
                    // Extract and print the text from the model's native response.
                    var response = new JSONObject(chunk.bytes().asUtf8String());
                    var text = new JSONPointer("/generation").queryFrom(response);
                    System.out.print(text);

                    // Append the text to the response text buffer.
                    completeResponseTextBuffer.append(text);
                }).build()).build();

        try {
            // Send the request and wait for the handler to process the response.
            client.invokeModelWithResponseStream(request,
responseStreamHandler).get();

            // Return the complete response text.
            return completeResponseTextBuffer.toString();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
e.getCause().getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) throws ExecutionException,
InterruptedException {
```

```
        invokeModelWithResponseStream();
    }
}
```

- Para obtener más información sobre la API, consulta InvokeModelWithResponseStreamla Referencia AWS SDK for Java 2.x de la API.

Mistral AI

Converse

El siguiente ejemplo de código muestra cómo enviar un mensaje de texto a Mistral con la API de Converse de Bedrock.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Envíe un mensaje de texto a Mistral mediante la API de Converse de Bedrock.

```
// Use the Converse API to send a text message to Mistral.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.ConverseResponse;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

public class Converse {

    public static String converse() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
```

```
        // Replace the DefaultCredentialsProvider with your preferred credentials
provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Mistral Large.
        var modelId = "mistral.mistral-large-2402-v1:0";

        // Create the input text and embed it in a message object with the user
role.
        var inputText = "Describe the purpose of a 'hello world' program in one
line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();


        try {
            // Send the message with a basic inference configuration.
            ConverseResponse response = client.converse(request -> request
                    .modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)));

            // Retrieve the generated text from Bedrock's response object.
            var responseText = response.output().message().content().get(0).text();
            System.out.println(responseText);

            return responseText;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
e.getMessage());
            throw new RuntimeException(e);
        }

    }
```

```
    public static void main(String[] args) {
        converse();
    }
}
```

Envíe un mensaje de texto a Mistral mediante la API de Converse de Bedrock con el cliente asincrónico de Java.

```
// Use the Converse API to send a text message to Mistral
// with the async Java client.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutionException;

public class ConverseAsync {

    public static String converseAsync() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Mistral Large.
        var modelId = "mistral.mistral-large-2402-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
```

```
                .role(ConversationRole.USER)
                .build();

        // Send the message with a basic inference configuration.
        var request = client.converse(params -> params
                .modelId(modelId)
                .messages(message)
                .inferenceConfig(config -> config
                        .maxTokens(512)
                        .temperature(0.5F)
                        .topP(0.9F))
        );

        // Prepare a future object to handle the asynchronous response.
        CompletableFuture<String> future = new CompletableFuture<>();

        // Handle the response or error using the future object.
        request.whenComplete((response, error) -> {
            if (error == null) {
                // Extract the generated text from Bedrock's response object.
                String responseText =
response.output().message().content().get(0).text();
                future.complete(responseText);
            } else {
                future.completeExceptionally(error);
            }
        });

        try {
            // Wait for the future object to complete and retrieve the generated
text.
            String responseText = future.get();
            System.out.println(responseText);

            return responseText;

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converseAsync();
```

```
    }
}
```

- Para obtener información sobre la API, consulte Converse en la Referencia de la API de AWS SDK for Java 2.x .

ConverseStream

El siguiente ejemplo de código muestra cómo enviar un mensaje de texto a Mistral con la API de Converse de Bedrock y procesar el flujo de respuesta en tiempo real.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Envíe un mensaje de texto a Mistral mediante la API de Converse de Bedrock y procese el flujo de respuesta en tiempo real.

```
// Use the Converse API to send a text message to Mistral
// and print the response stream.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import
 software.amazon.awssdk.services.bedrockruntime.model.ConverseStreamResponseHandler;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.ExecutionException;

public class ConverseStream {

    public static void main(String[] args) {
```

```
        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Mistral Large.
        var modelId = "mistral.mistral-large-2402-v1:0";

        // Create the input text and embed it in a message object with the user
role.
        var inputText = "Describe the purpose of a 'hello world' program in one
line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Create a handler to extract and print the response text in real-time.
        var responseStreamHandler = ConverseStreamResponseHandler.builder()
                .subscriber(ConverseStreamResponseHandler.Visitor.builder()
                        .onContentBlockDelta(chunk -> {
                            String responseText = chunk.delta().text();
                            System.out.print(responseText);
                        }).build()
                ).onError(err ->
                        System.err.printf("Can't invoke '%s': %s", modelId,
err.getMessage())
                ).build();

        try {
            // Send the message with a basic inference configuration and attach the
handler.
            client.converseStream(request -> request.modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)
                    ), responseStreamHandler).get();

        } catch (ExecutionException | InterruptedException e) {
```

```
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta ConverseStreamla Referencia AWS SDK for Java 2.x de la API.

InvokeModel

Los siguientes ejemplos de código muestran cómo enviar un mensaje de texto a los modelos Mistral con la API de Invoke Model.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Use la API de Invoke Model para enviar un mensaje de texto.

```
// Use the native inference API to send a text message to Mistral.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

public class InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
```

```
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Mistral Large.
        var modelId = "mistral.mistral-large-2402-v1:0";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
mistral-text-completion.html
        var nativeRequestTemplate = "{ \"prompt\": \"{{instruction}}\" }";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in Mistral's instruction format.
        var instruction = "<s>[INST] {{prompt}} [/INST]\\n".replace("{{prompt}}",
 prompt);

        // Embed the instruction in the the native request payload.
        var nativeRequest = nativeRequestTemplate.replace("{{instruction}}",
 instruction);

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated text from the model's response.
            var text = new JSONPointer("/outputs/0/
text").queryFrom(responseBody).toString();
            System.out.println(text);

            return text;

        } catch (SdkClientException e) {
```

```
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        invokeModel();
    }
}
```

- Para obtener más información sobre la API, consulta InvokeModella Referencia AWS SDK for Java 2.x de la API.

InvokeModelWithResponseStream

El siguiente ejemplo de código muestra cómo enviar un mensaje de texto a los modelos de Mistral AI mediante la API Invoke Model e imprimir el flujo de respuesta.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Utilice la API de Invoke Model para enviar un mensaje de texto y procesar el flujo de respuesta en tiempo real.

```
// Use the native inference API to send a text message to Mistral
// and print the response stream.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
```

```
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamRequest;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

import java.util.concurrent.ExecutionException;

import static
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

public class InvokeModelWithResponseStream {

    public static String invokeModelWithResponseStream() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Mistral Large.
        var modelId = "mistral.mistral-large-2402-v1:0";

        // The InvokeModelWithResponseStream API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
mistral-text-completion.html
        var nativeRequestTemplate = "{ \"prompt\": \"{{instruction}}\" }";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in Mistral's instruction format.
        var instruction = "<s>[INST] {{prompt}} [/INST]\\n".replace("{{prompt}}",
 prompt);

        // Embed the instruction in the the native request payload.
        var nativeRequest = nativeRequestTemplate.replace("{{instruction}}",
 instruction);
```

```
        // Create a request with the model ID and the model's native request
 payload.
        var request = InvokeModelWithResponseStreamRequest.builder()
                .body(SdkBytes.fromUtf8String(nativeRequest))
                .modelId(modelId)
                .build();

        // Prepare a buffer to accumulate the generated response text.
        var completeResponseTextBuffer = new StringBuilder();

        // Prepare a handler to extract, accumulate, and print the response text in
 real-time.
        var responseStreamHandler =
 InvokeModelWithResponseStreamResponseHandler.builder()
                .subscriber(Visitor.builder().onChunk(chunk -> {
                    // Extract and print the text from the model's native response.
                    var response = new JSONObject(chunk.bytes().asUtf8String());
                    var text = new JSONPointer("/outputs/0/
text").queryFrom(response);
                    System.out.print(text);

                    // Append the text to the response text buffer.
                    completeResponseTextBuffer.append(text);
                }).build()).build();

        try {
            // Send the request and wait for the handler to process the response.
            client.invokeModelWithResponseStream(request,
 responseStreamHandler).get();

            // Return the complete response text.
            return completeResponseTextBuffer.toString();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) throws ExecutionException,
 InterruptedException {
        invokeModelWithResponseStream();
    }
```

```
}
```

- Para obtener más información sobre la API, consulta InvokeModelWithResponseStreamla Referencia AWS SDK for Java 2.x de la API.

Stable Diffusion

InvokeModel

El siguiente ejemplo de código muestra cómo invocar el modelo Stability.ai Stable Diffusion XL en Amazon Bedrock para generar una imagen.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Cree una imagen con Stable Diffusion.

```
// Create an image with Stable Diffusion.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

import java.math.BigInteger;
import java.security.SecureRandom;

import static com.example.bedrockruntime.libs.ImageTools.displayImage;

public class InvokeModel {

    public static String invokeModel() {
```

```
        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Stable Diffusion XL v1.
        var modelId = "stability.stable-diffusion-xl-v1";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
diffusion-1-0-text-image.html
        var nativeRequestTemplate = """
                {
                    "text_prompts": [{ "text": "{{prompt}}" }],
                    "style_preset": "{{style}}",
                    "seed": {{seed}}
                }""";

        // Define the prompt for the image generation.
        var prompt = "A stylized picture of a cute old steampunk robot";

        // Get a random 32-bit seed for the image generation (max. 4,294,967,295).
        var seed = new BigInteger(31, new SecureRandom());

        // Choose a style preset.
        var style = "cinematic";

        // Embed the prompt, seed, and style in the model's native request payload.
        String nativeRequest = nativeRequestTemplate
                .replace("{{prompt}}", prompt)
                .replace("{{seed}}", seed.toString())
                .replace("{{style}}", style);

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
```

```
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated image data from the model's response.
            var base64ImageData = new JSONPointer("/artifacts/0/base64")
                    .queryFrom(responseBody)
                    .toString();

            return base64ImageData;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        System.out.println("Generating image. This may take a few seconds...");

        String base64ImageData = invokeModel();

        displayImage(base64ImageData);
    }


}
```

- Para obtener más información sobre la API, consulta InvokeModella Referencia AWS SDK for Java 2.x de la API.

CloudFront ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with CloudFront.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`CreateDistribution`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDistribution`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

El siguiente ejemplo utiliza un bucket de Amazon Simple Storage Service (Amazon S3) como un origen de contenido.

Tras crear la distribución, el código crea un modo de esperar CloudFrontWaitera que se despliegue la distribución antes de devolverla.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.internal.waiters.ResponseOrException;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.CreateDistributionResponse;
import software.amazon.awssdk.services.cloudfront.model.Distribution;
import software.amazon.awssdk.services.cloudfront.model.GetDistributionResponse;
import software.amazon.awssdk.services.cloudfront.model.ItemSelection;
import software.amazon.awssdk.services.cloudfront.model.Method;
```

```
import software.amazon.awssdk.services.cloudfront.model.ViewerProtocolPolicy;
import software.amazon.awssdk.services.cloudfront.waiters.CloudFrontWaiter;
import software.amazon.awssdk.services.s3.S3Client;

import java.time.Instant;

public class CreateDistribution {

        private static final Logger logger =
 LoggerFactory.getLogger(CreateDistribution.class);

        public static Distribution createDistribution(CloudFrontClient
 cloudFrontClient, S3Client s3Client,
                        final String bucketName, final String keyGroupId, final
 String originAccessControlId) {

                final String region = s3Client.headBucket(b ->
 b.bucket(bucketName)).sdkHttpResponse().headers()
                                .get("x-amz-bucket-region").get(0);
                final String originDomain = bucketName + ".s3." + region +
 ".amazonaws.com";
                String originId = originDomain; // Use the originDomain value for
 the originId.

                // The service API requires some deprecated methods, such as
                // DefaultCacheBehavior.Builder#minTTL and #forwardedValue.
                CreateDistributionResponse createDistResponse =
 cloudFrontClient.createDistribution(builder -> builder
                                .distributionConfig(b1 -> b1
                                                .origins(b2 -> b2
                                                                .quantity(1)
                                                                .items(b3 -> b3

 .domainName(originDomain)

 .id(originId)

 .s3OriginConfig(builder4 -> builder4

           .originAccessIdentity(

                           ""))

 .originAccessControlId(
```

```
            originAccessControlId)))
                                                .defaultCacheBehavior(b2 -> b2

  .viewerProtocolPolicy(ViewerProtocolPolicy.ALLOW_ALL)

  .targetOriginId(originId)
                                                                    .minTTL(200L)
                                                                    .forwardedValues(b5
  -> b5

  .cookies(cp -> cp

            .forward(ItemSelection.NONE))

  .queryString(true))
                                                                    .trustedKeyGroups(b3
  -> b3

  .quantity(1)

  .items(keyGroupId)

  .enabled(true))
                                                                    .allowedMethods(b4 -
> b4

  .quantity(2)

  .items(Method.HEAD, Method.GET)

  .cachedMethods(b5 -> b5

            .quantity(2)

            .items(Method.HEAD,

                           Method.GET))))
                                                .cacheBehaviors(b -> b
                                                                    .quantity(1)
                                                                    .items(b2 -> b2

  .pathPattern("/index.html")
```

```
.viewerProtocolPolicy(
           ViewerProtocolPolicy.ALLOW_ALL)
.targetOriginId(originId)
.trustedKeyGroups(b3 -> b3
           .quantity(1)
           .items(keyGroupId)
           .enabled(true))
.minTTL(200L)
.forwardedValues(b4 -> b4
           .cookies(cp -> cp
                           .forward(ItemSelection.NONE))
           .queryString(true))
.allowedMethods(b5 -> b5.quantity(2)
           .items(Method.HEAD,
                           Method.GET)
           .cachedMethods(b6 -> b6
                           .quantity(2)
                           .items(Method.HEAD,
                                           Method.GET)))))
                                               .enabled(true)
                                               .comment("Distribution built with
java")
.callerReference(Instant.now().toString())));
```

```
                final Distribution distribution = createDistResponse.distribution();
                logger.info("Distribution created. DomainName: [{}]  Id: [{}]",
 distribution.domainName(),
                                distribution.id());
                logger.info("Waiting for distribution to be deployed ...");
                try (CloudFrontWaiter cfWaiter =
 CloudFrontWaiter.builder().client(cloudFrontClient).build()) {
                        ResponseOrException<GetDistributionResponse>
 responseOrException = cfWaiter
                                        .waitUntilDistributionDeployed(builder ->
 builder.id(distribution.id()))
                                        .matched();
                        responseOrException.response()
                                        .orElseThrow(() -> new
 RuntimeException("Distribution not created"));
                        logger.info("Distribution deployed. DomainName: [{}]  Id:
 [{}]", distribution.domainName(),
                                        distribution.id());
                }
                return distribution;
        }
}
```

- Para obtener más información sobre la API, consulte CreateDistributionla Referencia AWS SDK for Java 2.x de la API.

`CreateFunction`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateFunction`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.CloudFrontException;
import software.amazon.awssdk.services.cloudfront.model.CreateFunctionRequest;
import software.amazon.awssdk.services.cloudfront.model.CreateFunctionResponse;
import software.amazon.awssdk.services.cloudfront.model.FunctionConfig;
import software.amazon.awssdk.services.cloudfront.model.FunctionRuntime;
import java.io.InputStream;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateFunction {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <functionName> <filePath>

                Where:
                    functionName - The name of the function to create.\s
                    filePath - The path to a file that contains the application
 logic for the function.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String functionName = args[0];
        String filePath = args[1];
        CloudFrontClient cloudFrontClient = CloudFrontClient.builder()
                .region(Region.AWS_GLOBAL)
                .build();

        String funArn = createNewFunction(cloudFrontClient, functionName, filePath);
        System.out.println("The function ARN is " + funArn);
        cloudFrontClient.close();
```

```
    }

    public static String createNewFunction(CloudFrontClient cloudFrontClient, String
 functionName, String filePath) {
        try {
            InputStream fileIs =
 CreateFunction.class.getClassLoader().getResourceAsStream(filePath);
            SdkBytes functionCode = SdkBytes.fromInputStream(fileIs);

            FunctionConfig config = FunctionConfig.builder()
                    .comment("Created by using the CloudFront Java API")
                    .runtime(FunctionRuntime.CLOUDFRONT_JS_1_0)
                    .build();

            CreateFunctionRequest functionRequest = CreateFunctionRequest.builder()
                    .name(functionName)
                    .functionCode(functionCode)
                    .functionConfig(config)
                    .build();

            CreateFunctionResponse response =
 cloudFrontClient.createFunction(functionRequest);
            return response.functionSummary().functionMetadata().functionARN();

        } catch (CloudFrontException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulta CreateFunctionla Referencia AWS SDK for Java 2.x de la API.

`CreateKeyGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateKeyGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Un grupo de claves requiere al menos una clave pública que se utilice para verificar las cookies URLs firmadas.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;

import java.util.UUID;

public class CreateKeyGroup {
    private static final Logger logger =
 LoggerFactory.getLogger(CreateKeyGroup.class);

    public static String createKeyGroup(CloudFrontClient cloudFrontClient, String
 publicKeyId) {
        String keyGroupId = cloudFrontClient.createKeyGroup(b -> b.keyGroupConfig(c
 -> c
                .items(publicKeyId)
                .name("JavaKeyGroup" + UUID.randomUUID())))
                .keyGroup().id();
        logger.info("KeyGroup created with ID: [{}]", keyGroupId);
        return keyGroupId;
    }
}
```

- Para obtener más información sobre la API, consulte CreateKeyGroupla Referencia AWS SDK for Java 2.x de la API.

`CreatePublicKey`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreatePublicKey`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

El siguiente ejemplo de código lee una clave pública y la carga en Amazon CloudFront.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.CreatePublicKeyResponse;
import software.amazon.awssdk.utils.IoUtils;

import java.io.IOException;
import java.io.InputStream;
import java.util.UUID;

public class CreatePublicKey {
    private static final Logger logger =
 LoggerFactory.getLogger(CreatePublicKey.class);

    public static String createPublicKey(CloudFrontClient cloudFrontClient, String
 publicKeyFileName) {
        try (InputStream is =
 CreatePublicKey.class.getClassLoader().getResourceAsStream(publicKeyFileName)) {
            String publicKeyString = IoUtils.toUtf8String(is);
            CreatePublicKeyResponse createPublicKeyResponse = cloudFrontClient
                    .createPublicKey(b -> b.publicKeyConfig(c -> c
                            .name("JavaCreatedPublicKey" + UUID.randomUUID())
                            .encodedKey(publicKeyString)
                            .callerReference(UUID.randomUUID().toString())));
            String createdPublicKeyId = createPublicKeyResponse.publicKey().id();
            logger.info("Public key created with id: [{}]", createdPublicKeyId);
            return createdPublicKeyId;

        } catch (IOException e) {
            throw new RuntimeException(e);
        }
    }
}
```

- Para obtener más información sobre la API, consulta CreatePublicKeyla Referencia de AWS SDK for Java 2.x la API.

`DeleteDistribution`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDistribution`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

El siguiente ejemplo de código actualiza una distribución a deshabilitada, utiliza un esperador que espera a que se implemente el cambio y, a continuación, elimina la distribución.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.internal.waiters.ResponseOrException;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.DeleteDistributionResponse;
import software.amazon.awssdk.services.cloudfront.model.DistributionConfig;
import software.amazon.awssdk.services.cloudfront.model.GetDistributionResponse;
import software.amazon.awssdk.services.cloudfront.waiters.CloudFrontWaiter;

public class DeleteDistribution {
        private static final Logger logger =
 LoggerFactory.getLogger(DeleteDistribution.class);

        public static void deleteDistribution(final CloudFrontClient
 cloudFrontClient, final String distributionId) {
                // First, disable the distribution by updating it.
                GetDistributionResponse response =
 cloudFrontClient.getDistribution(b -> b
                                .id(distributionId));
                String etag = response.eTag();
                DistributionConfig distConfig =
 response.distribution().distributionConfig();
```

```
                cloudFrontClient.updateDistribution(builder -> builder
                                .id(distributionId)
                                .distributionConfig(builder1 -> builder1

.cacheBehaviors(distConfig.cacheBehaviors())

.defaultCacheBehavior(distConfig.defaultCacheBehavior())
                                                .enabled(false)
                                                .origins(distConfig.origins())
                                                .comment(distConfig.comment())

.callerReference(distConfig.callerReference())

.defaultCacheBehavior(distConfig.defaultCacheBehavior())
                                                .priceClass(distConfig.priceClass())
                                                .aliases(distConfig.aliases())
                                                .logging(distConfig.logging())

.defaultRootObject(distConfig.defaultRootObject())

.customErrorResponses(distConfig.customErrorResponses())

.httpVersion(distConfig.httpVersion())

.isIPV6Enabled(distConfig.isIPV6Enabled())

.restrictions(distConfig.restrictions())

.viewerCertificate(distConfig.viewerCertificate())
                                                .webACLId(distConfig.webACLId())

.originGroups(distConfig.originGroups()))
                                .ifMatch(etag));

                logger.info("Distribution [{}] is DISABLED, waiting for deployment
before deleting ...",
                                distributionId);
                GetDistributionResponse distributionResponse;
                try (CloudFrontWaiter cfWaiter =
CloudFrontWaiter.builder().client(cloudFrontClient).build()) {
                        ResponseOrException<GetDistributionResponse>
responseOrException = cfWaiter
```

```
                                        .waitUntilDistributionDeployed(builder ->
 builder.id(distributionId)).matched();
                        distributionResponse = responseOrException.response()
                                        .orElseThrow(() -> new
 RuntimeException("Could not disable distribution"));
                }

                DeleteDistributionResponse deleteDistributionResponse =
 cloudFrontClient
                                .deleteDistribution(builder -> builder
                                                .id(distributionId)

 .ifMatch(distributionResponse.eTag()));
                if (deleteDistributionResponse.sdkHttpResponse().isSuccessful()) {
                        logger.info("Distribution [{}] DELETED", distributionId);
                }
        }
}
```

- Para obtener más información sobre la API, consulta DeleteDistributionla Referencia AWS SDK for Java 2.x de la API.

`UpdateDistribution`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateDistribution`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.GetDistributionRequest;
import software.amazon.awssdk.services.cloudfront.model.GetDistributionResponse;
import software.amazon.awssdk.services.cloudfront.model.Distribution;
import software.amazon.awssdk.services.cloudfront.model.DistributionConfig;
```

```
import software.amazon.awssdk.services.cloudfront.model.UpdateDistributionRequest;
import software.amazon.awssdk.services.cloudfront.model.CloudFrontException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ModifyDistribution {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <id>\s

                Where:
                    id - the id value of the distribution.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String id = args[0];
        CloudFrontClient cloudFrontClient = CloudFrontClient.builder()
                .region(Region.AWS_GLOBAL)
                .build();

        modDistribution(cloudFrontClient, id);
        cloudFrontClient.close();
    }

    public static void modDistribution(CloudFrontClient cloudFrontClient, String
 idVal) {
        try {
            // Get the Distribution to modify.
            GetDistributionRequest disRequest = GetDistributionRequest.builder()
                    .id(idVal)
                    .build();
```

```
            GetDistributionResponse response =
 cloudFrontClient.getDistribution(disRequest);
            Distribution disObject = response.distribution();
            DistributionConfig config = disObject.distributionConfig();

            // Create a new DistributionConfig object and add new values to comment
 and
            // aliases
            DistributionConfig config1 = DistributionConfig.builder()
                    .aliases(config.aliases()) // You can pass in new values here
                    .comment("New Comment")
                    .cacheBehaviors(config.cacheBehaviors())
                    .priceClass(config.priceClass())
                    .defaultCacheBehavior(config.defaultCacheBehavior())
                    .enabled(config.enabled())
                    .callerReference(config.callerReference())
                    .logging(config.logging())
                    .originGroups(config.originGroups())
                    .origins(config.origins())
                    .restrictions(config.restrictions())
                    .defaultRootObject(config.defaultRootObject())
                    .webACLId(config.webACLId())
                    .httpVersion(config.httpVersion())
                    .viewerCertificate(config.viewerCertificate())
                    .customErrorResponses(config.customErrorResponses())
                    .build();

            UpdateDistributionRequest updateDistributionRequest =
 UpdateDistributionRequest.builder()
                    .distributionConfig(config1)
                    .id(disObject.id())
                    .ifMatch(response.eTag())
                    .build();

            cloudFrontClient.updateDistribution(updateDistributionRequest);

        } catch (CloudFrontException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta UpdateDistributionla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación de una distribución de varios inquilinos y un inquilino de distribución

El siguiente ejemplo de código muestra cómo crear una distribución de varios inquilinos y un inquilino de distribución con varias configuraciones.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

El siguiente ejemplo demuestra cómo crear una distribución de varios inquilino con parámetros y un certificado comodín.

```
import software.amazon.awssdk.core.internal.waiters.ResponseOrException;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.ConnectionMode;
import software.amazon.awssdk.services.cloudfront.model.CreateDistributionResponse;
import software.amazon.awssdk.services.cloudfront.model.Distribution;
import software.amazon.awssdk.services.cloudfront.model.GetDistributionResponse;
import software.amazon.awssdk.services.cloudfront.model.HttpVersion;
import software.amazon.awssdk.services.cloudfront.model.Method;
import software.amazon.awssdk.services.cloudfront.model.SSLSupportMethod;
import software.amazon.awssdk.services.cloudfront.model.ViewerProtocolPolicy;
import software.amazon.awssdk.services.cloudfront.waiters.CloudFrontWaiter;
import software.amazon.awssdk.services.s3.S3Client;

import java.time.Instant;

public class CreateMultiTenantDistribution {
    public static Distribution
 CreateMultiTenantDistributionWithCert(CloudFrontClient cloudFrontClient,
```

```
                                                                    S3Client
s3Client,
                                                                    final String
bucketName,
                                                                    final String
certificateArn) {
        // fetch the origin info if necessary
        final String region = s3Client.headBucket(b ->
b.bucket(bucketName)).sdkHttpResponse().headers()
                .get("x-amz-bucket-region").get(0);
        final String originDomain = bucketName + ".s3." + region + ".amazonaws.com";
        String originId = originDomain; // Use the originDomain value for the
originId.

        CreateDistributionResponse createDistResponse =
cloudFrontClient.createDistribution(builder -> builder
                .distributionConfig(b1 -> b1
                        .httpVersion(HttpVersion.HTTP2)
                        .enabled(true)
                        .comment("Template Distribution with cert built with java")
                        .connectionMode(ConnectionMode.TENANT_ONLY)
                        .callerReference(Instant.now().toString())
                        .viewerCertificate(certBuilder -> certBuilder
                                .acmCertificateArn(certificateArn)
                                .sslSupportMethod(SSLSupportMethod.SNI_ONLY))
                        .origins(b2 -> b2
                                .quantity(1)
                                .items(b3 -> b3
                                        .domainName(originDomain)
                                        .id(originId)
                                        .originPath("/{{tenantName}}")
                                        .s3OriginConfig(builder4 -> builder4
                                                .originAccessIdentity(
                                                        ""))))
                        .tenantConfig(b5 -> b5
                                .parameterDefinitions(b6 -> b6
                                        .name("tenantName")
                                        .definition(b7 -> b7
                                                .stringSchema(b8 -> b8
                                                        .comment("tenantName value")
                                                        .defaultValue("root")
                                                        .required(false)))))
                        .defaultCacheBehavior(b2 -> b2
```

```
 .viewerProtocolPolicy(ViewerProtocolPolicy.ALLOW_ALL)
                                .targetOriginId(originId)
                                .cachePolicyId("658327ea-f89d-4fab-
a63d-7e88639e58f6") // CachingOptimized Policy
                                .allowedMethods(b4 -> b4
                                        .quantity(2)
                                        .items(Method.HEAD, Method.GET)))
                ));

        final Distribution distribution = createDistResponse.distribution();
        try (CloudFrontWaiter cfWaiter =
 CloudFrontWaiter.builder().client(cloudFrontClient).build()) {
            ResponseOrException<GetDistributionResponse> responseOrException =
 cfWaiter
                    .waitUntilDistributionDeployed(builder ->
 builder.id(distribution.id()))
                    .matched();
            responseOrException.response()
                    .orElseThrow(() -> new RuntimeException("Distribution not
 created"));
        }
        return distribution;
    }

    public static Distribution CreateMultiTenantDistributionNoCert(CloudFrontClient
 cloudFrontClient,
                                                                   S3Client s3Client,
                                                                   final String
 bucketName) {
        // fetch the origin info if necessary
        final String region = s3Client.headBucket(b ->
 b.bucket(bucketName)).sdkHttpResponse().headers()
                .get("x-amz-bucket-region").get(0);
        final String originDomain = bucketName + ".s3." + region + ".amazonaws.com";
        String originId = originDomain; // Use the originDomain value for the
 originId.

        CreateDistributionResponse createDistResponse =
 cloudFrontClient.createDistribution(builder -> builder
                .distributionConfig(b1 -> b1
                        .httpVersion(HttpVersion.HTTP2)
                        .enabled(true)
                        .comment("Template Distribution with cert built with java")
```

```
                        .connectionMode(ConnectionMode.TENANT_ONLY)
                        .callerReference(Instant.now().toString())
                        .origins(b2 -> b2
                                .quantity(1)
                                .items(b3 -> b3
                                        .domainName(originDomain)
                                        .id(originId)
                                        .originPath("/{{tenantName}}")
                                        .s3OriginConfig(builder4 -> builder4
                                                .originAccessIdentity(
                                                        ""))))
                        .tenantConfig(b5 -> b5
                                .parameterDefinitions(b6 -> b6
                                        .name("tenantName")
                                        .definition(b7 -> b7
                                                .stringSchema(b8 -> b8
                                                        .comment("tenantName value")
                                                        .defaultValue("root")
                                                        .required(false)))))
                        .defaultCacheBehavior(b2 -> b2

 .viewerProtocolPolicy(ViewerProtocolPolicy.ALLOW_ALL)
                                .targetOriginId(originId)
                                .cachePolicyId("658327ea-f89d-4fab-
a63d-7e88639e58f6") // CachingOptimized Policy
                                .allowedMethods(b4 -> b4
                                        .quantity(2)
                                        .items(Method.HEAD, Method.GET)))
                ));

        final Distribution distribution = createDistResponse.distribution();
        try (CloudFrontWaiter cfWaiter =
 CloudFrontWaiter.builder().client(cloudFrontClient).build()) {
            ResponseOrException<GetDistributionResponse> responseOrException =
 cfWaiter
                    .waitUntilDistributionDeployed(builder ->
 builder.id(distribution.id()))
                    .matched();
            responseOrException.response()
                    .orElseThrow(() -> new RuntimeException("Distribution not
 created"));
        }
        return distribution;
    }
```

```
}
```

El siguiente ejemplo demuestra cómo crear un inquilino de distribución asociado con esa plantilla, incluida la utilización del parámetro que hemos declarado anteriormente. Tenga en cuenta que no es necesario agregar información del certificado aquí, ya que nuestro dominio ya está cubierto por la plantilla principal.

```
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import
 software.amazon.awssdk.services.cloudfront.model.CreateConnectionGroupResponse;
import
 software.amazon.awssdk.services.cloudfront.model.CreateDistributionTenantResponse;
import software.amazon.awssdk.services.cloudfront.model.DistributionTenant;
import software.amazon.awssdk.services.cloudfront.model.GetConnectionGroupResponse;
import software.amazon.awssdk.services.cloudfront.model.ValidationTokenHost;
import software.amazon.awssdk.services.route53.Route53Client;
import software.amazon.awssdk.services.route53.model.RRType;

import java.time.Instant;

public class CreateDistributionTenant {

    public static DistributionTenant createDistributionTenantNoCert(CloudFrontClient
 cloudFrontClient,
                                                                     Route53Client
 route53Client,
                                                                     String
 distributionId,
                                                                     String domain,
                                                                     String
 hostedZoneId) {
        CreateDistributionTenantResponse createResponse =
 cloudFrontClient.createDistributionTenant(builder -> builder
                .distributionId(distributionId)
                .domains(b1 -> b1
                        .domain(domain))
                .parameters(b2 -> b2
                        .name("tenantName")
                        .value("myTenant"))
                .enabled(false)
                .name("no-cert-tenant")
```

```
        );

        final DistributionTenant distributionTenant =
 createResponse.distributionTenant();

        // Then update the Route53 hosted zone to point your domain at the
 distribution tenant
        // We fetch the RoutingEndpoint to point to via the default connection group
 that was created for your tenant
        final GetConnectionGroupResponse fetchedConnectionGroup =
 cloudFrontClient.getConnectionGroup(builder -> builder
                .identifier(distributionTenant.connectionGroupId()));

        route53Client.changeResourceRecordSets(builder -> builder
                .hostedZoneId(hostedZoneId)
                .changeBatch(b1 -> b1
                        .comment("ChangeBatch comment")
                        .changes(b2 -> b2
                                .resourceRecordSet(b3 -> b3
                                        .name(domain)
                                        .type("CNAME")
                                        .ttl(300L)
                                        .resourceRecords(b4 -> b4

 .value(fetchedConnectionGroup.connectionGroup().routingEndpoint())))
                                .action("CREATE"))
                ));
        return distributionTenant;
    }

}
```

Si el certificado del lector se ha omitido en la plantilla principal, deberá agregar la información del certificado en los inquilinos asociados a ella. El siguiente ejemplo muestra cómo hacerlo mediante un certificado arn de ACM que cubre el dominio necesario para el inquilino.

```
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import
 software.amazon.awssdk.services.cloudfront.model.CreateConnectionGroupResponse;
import
 software.amazon.awssdk.services.cloudfront.model.CreateDistributionTenantResponse;
```

```
import software.amazon.awssdk.services.cloudfront.model.DistributionTenant;
import software.amazon.awssdk.services.cloudfront.model.GetConnectionGroupResponse;
import software.amazon.awssdk.services.cloudfront.model.ValidationTokenHost;
import software.amazon.awssdk.services.route53.Route53Client;
import software.amazon.awssdk.services.route53.model.RRType;

import java.time.Instant;

public class CreateDistributionTenant {

    public static DistributionTenant
 createDistributionTenantWithCert(CloudFrontClient cloudFrontClient,
                                                                    Route53Client
 route53Client,
                                                                    String
 distributionId,
                                                                    String domain,
                                                                    String
 hostedZoneId,
                                                                    String
 certificateArn) {
        CreateDistributionTenantResponse createResponse =
 cloudFrontClient.createDistributionTenant(builder -> builder
                .distributionId(distributionId)
                .domains(b1 -> b1
                        .domain(domain))
                .enabled(false)
                .name("tenant-with-cert")
                .parameters(b2 -> b2
                        .name("tenantName")
                        .value("myTenant"))
                .customizations(b3 -> b3
                        .certificate(b4 -> b4
                                .arn(certificateArn))) // NOTE: Cert must be in Us-
East-1 and cover the domain provided in this request

        );

        final DistributionTenant distributionTenant =
 createResponse.distributionTenant();

        // Then update the Route53 hosted zone to point your domain at the
 distribution tenant
```

```
        // We fetch the RoutingEndpoint to point to via the default connection group
 that was created for your tenant
        final GetConnectionGroupResponse fetchedConnectionGroup =
 cloudFrontClient.getConnectionGroup(builder -> builder
                .identifier(distributionTenant.connectionGroupId()));

        route53Client.changeResourceRecordSets(builder -> builder
                .hostedZoneId(hostedZoneId)
                .changeBatch(b1 -> b1
                        .comment("ChangeBatch comment")
                        .changes(b2 -> b2
                                .resourceRecordSet(b3 -> b3
                                        .name(domain)
                                        .type("CNAME")
                                        .ttl(300L)
                                        .resourceRecords(b4 -> b4

 .value(fetchedConnectionGroup.connectionGroup().routingEndpoint())))
                                .action("CREATE"))
                ));
        return distributionTenant;
    }

}
```

En el siguiente ejemplo, se muestra cómo hacerlo con una solicitud de certificado CloudFront gestionada alojada. Esto es ideal si aún no tiene tráfico hacia el dominio. En este caso, creamos un ConnectionGroup para generar un RoutingEndpoint. Luego lo usamos RoutingEndpoint para crear registros DNS que verifican la propiedad del dominio y apuntan a CloudFront. CloudFront luego, entregará automáticamente un token para validar la propiedad del dominio y crear un certificado administrado.

```
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import
 software.amazon.awssdk.services.cloudfront.model.CreateConnectionGroupResponse;
import
 software.amazon.awssdk.services.cloudfront.model.CreateDistributionTenantResponse;
import software.amazon.awssdk.services.cloudfront.model.DistributionTenant;
import software.amazon.awssdk.services.cloudfront.model.GetConnectionGroupResponse;
import software.amazon.awssdk.services.cloudfront.model.ValidationTokenHost;
```

```
import software.amazon.awssdk.services.route53.Route53Client;
import software.amazon.awssdk.services.route53.model.RRType;

import java.time.Instant;

public class CreateDistributionTenant {

    public static DistributionTenant
 createDistributionTenantCfHosted(CloudFrontClient cloudFrontClient,
                                                                    Route53Client
 route53Client,
                                                                    String
 distributionId,
                                                                    String domain,
                                                                    String
 hostedZoneId) throws InterruptedException {
        CreateConnectionGroupResponse createConnectionGroupResponse =
 cloudFrontClient.createConnectionGroup(builder -> builder
                .ipv6Enabled(true)
                .name("cf-hosted-connection-group")
                .enabled(true));

        route53Client.changeResourceRecordSets(builder -> builder
                .hostedZoneId(hostedZoneId)
                .changeBatch(b1 -> b1
                        .comment("cf-hosted domain validation record")
                        .changes(b2 -> b2
                                .resourceRecordSet(b3 -> b3
                                        .name(domain)
                                        .type(RRType.CNAME)
                                        .ttl(300L)
                                        .resourceRecords(b4 -> b4

 .value(createConnectionGroupResponse.connectionGroup().routingEndpoint())))
                                .action("CREATE"))
                ));

        // Give the R53 record time to propagate, if it isn't being returned by
 servers yet, the following call will fail
        Thread.sleep(60000);

        CreateDistributionTenantResponse createResponse =
 cloudFrontClient.createDistributionTenant(builder -> builder
                .distributionId(distributionId)
```

```
                .domains(b1 -> b1
                        .domain(domain))

 .connectionGroupId(createConnectionGroupResponse.connectionGroup().id())
                .enabled(false)
                .name("cf-hosted-tenant")
                .parameters(b2 -> b2
                        .name("tenantName")
                        .value("myTenant"))
                .managedCertificateRequest(b3 -> b3
                        .validationTokenHost(ValidationTokenHost.CLOUDFRONT)
                )
        );

        return createResponse.distributionTenant();
    }

}
```

El siguiente ejemplo demuestra cómo hacerlo con una solicitud de certificado autoadministrada. Esto es ideal si tiene tráfico hacia el dominio y no puede tolerar el tiempo de inactividad durante una migración. Al final de este ejemplo, el inquilino se creará con un estado de espera de la validación del dominio y la configuración de DNS. Siga los pasos [aquí] (https://docs.aws.amazon.com/AmazonCloudFront/latest/DeveloperGuide/managed-cloudfront-certificates.html#complete-domain-ownership) para completar la configuración cuando esté listo para migrar el tráfico.

```
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import
 software.amazon.awssdk.services.cloudfront.model.CreateConnectionGroupResponse;
import
 software.amazon.awssdk.services.cloudfront.model.CreateDistributionTenantResponse;
import software.amazon.awssdk.services.cloudfront.model.DistributionTenant;
import software.amazon.awssdk.services.cloudfront.model.GetConnectionGroupResponse;
import software.amazon.awssdk.services.cloudfront.model.ValidationTokenHost;
import software.amazon.awssdk.services.route53.Route53Client;
import software.amazon.awssdk.services.route53.model.RRType;

import java.time.Instant;
```

```
public class CreateDistributionTenant {

    public static DistributionTenant
 createDistributionTenantSelfHosted(CloudFrontClient cloudFrontClient,
                                                                    String
 distributionId,
                                                                    String
 domain) {
        CreateDistributionTenantResponse createResponse =
 cloudFrontClient.createDistributionTenant(builder -> builder
                .distributionId(distributionId)
                .domains(b1 -> b1
                        .domain(domain))
                .parameters(b2 -> b2
                        .name("tenantName")
                        .value("myTenant"))
                .enabled(false)
                .name("self-hosted-tenant")
                .managedCertificateRequest(b3 -> b3
                        .validationTokenHost(ValidationTokenHost.SELF_HOSTED)
                        .primaryDomainName(domain)
                )
        );

        return createResponse.distributionTenant();
    }

}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateDistribution
  - CreateDistributionTenant

Eliminar recursos de firma

En el siguiente ejemplo de código, se muestra cómo eliminar los recursos que se utilizan para acceder a contenido restringido de un bucket de Amazon Simple Storage Service (Amazon S3).

SDK para Java 2.x

> **Note**
>
> Hay más información. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.DeleteKeyGroupResponse;
import
 software.amazon.awssdk.services.cloudfront.model.DeleteOriginAccessControlResponse;
import software.amazon.awssdk.services.cloudfront.model.DeletePublicKeyResponse;
import software.amazon.awssdk.services.cloudfront.model.GetKeyGroupResponse;
import
 software.amazon.awssdk.services.cloudfront.model.GetOriginAccessControlResponse;
import software.amazon.awssdk.services.cloudfront.model.GetPublicKeyResponse;

public class DeleteSigningResources {
    private static final Logger logger =
 LoggerFactory.getLogger(DeleteSigningResources.class);

    public static void deleteOriginAccessControl(final CloudFrontClient
 cloudFrontClient,
            final String originAccessControlId) {
        GetOriginAccessControlResponse getResponse = cloudFrontClient
                .getOriginAccessControl(b -> b.id(originAccessControlId));
        DeleteOriginAccessControlResponse deleteResponse =
 cloudFrontClient.deleteOriginAccessControl(builder -> builder
                .id(originAccessControlId)
                .ifMatch(getResponse.eTag()));
        if (deleteResponse.sdkHttpResponse().isSuccessful()) {
            logger.info("Successfully deleted Origin Access Control [{}]",
 originAccessControlId);
        }
    }

    public static void deleteKeyGroup(final CloudFrontClient cloudFrontClient, final
 String keyGroupId) {
```

```
        GetKeyGroupResponse getResponse = cloudFrontClient.getKeyGroup(b ->
 b.id(keyGroupId));
        DeleteKeyGroupResponse deleteResponse =
 cloudFrontClient.deleteKeyGroup(builder -> builder
                .id(keyGroupId)
                .ifMatch(getResponse.eTag()));
        if (deleteResponse.sdkHttpResponse().isSuccessful()) {
            logger.info("Successfully deleted Key Group [{}]", keyGroupId);
        }
    }

    public static void deletePublicKey(final CloudFrontClient cloudFrontClient,
 final String publicKeyId) {
        GetPublicKeyResponse getResponse = cloudFrontClient.getPublicKey(b ->
 b.id(publicKeyId));

        DeletePublicKeyResponse deleteResponse =
 cloudFrontClient.deletePublicKey(builder -> builder
                .id(publicKeyId)
                .ifMatch(getResponse.eTag()));

        if (deleteResponse.sdkHttpResponse().isSuccessful()) {
            logger.info("Successfully deleted Public Key [{}]", publicKeyId);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - DeleteKeyGroup
  - DeleteOriginAccessControl
  - DeletePublicKey

Letrero URLs y cookies

El siguiente ejemplo de código muestra cómo crear cookies firmadas URLs y cookies que permitan el acceso a recursos restringidos.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Usa la CannedSignerRequestclase para firmar URLs o usar cookies con una política preestablecida.

```
import software.amazon.awssdk.services.cloudfront.model.CannedSignerRequest;

import java.net.URL;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.time.Instant;
import java.time.temporal.ChronoUnit;

public class CreateCannedPolicyRequest {

    public static CannedSignerRequest createRequestForCannedPolicy(String
 distributionDomainName,
            String fileNameToUpload,
            String privateKeyFullPath, String publicKeyId) throws Exception {
        String protocol = "https";
        String resourcePath = "/" + fileNameToUpload;

        String cloudFrontUrl = new URL(protocol, distributionDomainName,
 resourcePath).toString();
        Instant expirationDate = Instant.now().plus(7, ChronoUnit.DAYS);
        Path path = Paths.get(privateKeyFullPath);

        return CannedSignerRequest.builder()
                .resourceUrl(cloudFrontUrl)
                .privateKey(path)
                .keyPairId(publicKeyId)
                .expirationDate(expirationDate)
                .build();
    }
}
```

Usa la CustomSignerRequestclase para firmar URLs o usar cookies con una política personalizada. `activeDate` y `ipRange` son métodos opcionales.

```
import software.amazon.awssdk.services.cloudfront.model.CustomSignerRequest;

import java.net.URL;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.time.Instant;
import java.time.temporal.ChronoUnit;

public class CreateCustomPolicyRequest {

    public static CustomSignerRequest createRequestForCustomPolicy(String
 distributionDomainName,
            String fileNameToUpload,
            String privateKeyFullPath, String publicKeyId) throws Exception {
        String protocol = "https";
        String resourcePath = "/" + fileNameToUpload;

        String cloudFrontUrl = new URL(protocol, distributionDomainName,
 resourcePath).toString();
        Instant expireDate = Instant.now().plus(7, ChronoUnit.DAYS);
        // URL will be accessible tomorrow using the signed URL.
        Instant activeDate = Instant.now().plus(1, ChronoUnit.DAYS);
        Path path = Paths.get(privateKeyFullPath);

        return CustomSignerRequest.builder()
                .resourceUrl(cloudFrontUrl)
                // .resourceUrlPattern("https://*.example.com/*")  // Optional.
                .privateKey(path)
                .keyPairId(publicKeyId)
                .expirationDate(expireDate)
                .activeDate(activeDate) // Optional.
                // .ipRange("192.168.0.1/24") // Optional.
                .build();
    }
}
```

El siguiente ejemplo demuestra el uso de la CloudFrontUtilitiesclase para producir cookies firmadas y URLs. Vea este ejemplo de código en GitHub.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.cloudfront.CloudFrontUtilities;
import software.amazon.awssdk.services.cloudfront.cookie.CookiesForCannedPolicy;
import software.amazon.awssdk.services.cloudfront.cookie.CookiesForCustomPolicy;
import software.amazon.awssdk.services.cloudfront.model.CannedSignerRequest;
import software.amazon.awssdk.services.cloudfront.model.CustomSignerRequest;
import software.amazon.awssdk.services.cloudfront.url.SignedUrl;

public class SigningUtilities {
    private static final Logger logger =
 LoggerFactory.getLogger(SigningUtilities.class);
    private static final CloudFrontUtilities cloudFrontUtilities =
 CloudFrontUtilities.create();

    public static SignedUrl signUrlForCannedPolicy(CannedSignerRequest
 cannedSignerRequest) {
        SignedUrl signedUrl =
 cloudFrontUtilities.getSignedUrlWithCannedPolicy(cannedSignerRequest);
        logger.info("Signed URL: [{}]", signedUrl.url());
        return signedUrl;
    }

    public static SignedUrl signUrlForCustomPolicy(CustomSignerRequest
 customSignerRequest) {
        SignedUrl signedUrl =
 cloudFrontUtilities.getSignedUrlWithCustomPolicy(customSignerRequest);
        logger.info("Signed URL: [{}]", signedUrl.url());
        return signedUrl;
    }

    public static CookiesForCannedPolicy
 getCookiesForCannedPolicy(CannedSignerRequest cannedSignerRequest) {
        CookiesForCannedPolicy cookiesForCannedPolicy = cloudFrontUtilities
                .getCookiesForCannedPolicy(cannedSignerRequest);
        logger.info("Cookie EXPIRES header [{}]",
 cookiesForCannedPolicy.expiresHeaderValue());
        logger.info("Cookie KEYPAIR header [{}]",
 cookiesForCannedPolicy.keyPairIdHeaderValue());
        logger.info("Cookie SIGNATURE header [{}]",
 cookiesForCannedPolicy.signatureHeaderValue());
        return cookiesForCannedPolicy;
    }
```

```
    public static CookiesForCustomPolicy
 getCookiesForCustomPolicy(CustomSignerRequest customSignerRequest) {
        CookiesForCustomPolicy cookiesForCustomPolicy = cloudFrontUtilities
                .getCookiesForCustomPolicy(customSignerRequest);
        logger.info("Cookie POLICY header [{}]",
 cookiesForCustomPolicy.policyHeaderValue());
        logger.info("Cookie KEYPAIR header [{}]",
 cookiesForCustomPolicy.keyPairIdHeaderValue());
        logger.info("Cookie SIGNATURE header [{}]",
 cookiesForCustomPolicy.signatureHeaderValue());
        return cookiesForCustomPolicy;
    }
}
```

- Para obtener más información sobre la API, consulte CloudFrontUtilitiesla referencia AWS SDK for Java 2.x de la API.

CloudWatch ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with CloudWatch.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos

- Acciones
- Escenarios

Introducción

Hola CloudWatch

En el siguiente ejemplo de código se muestra cómo empezar a utilizar CloudWatch.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatch.model.ListMetricsRequest;
import software.amazon.awssdk.services.cloudwatch.paginators.ListMetricsIterable;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloService {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <namespace>\s

                Where:
                  namespace - The namespace to filter against (for example, AWS/
EC2).\s
```

```
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String namespace = args[0];
        Region region = Region.US_EAST_1;
        CloudWatchClient cw = CloudWatchClient.builder()
                .region(region)
                .build();

        listMets(cw, namespace);
        cw.close();
    }

    public static void listMets(CloudWatchClient cw, String namespace) {
        try {
            ListMetricsRequest request = ListMetricsRequest.builder()
                    .namespace(namespace)
                    .build();

            ListMetricsIterable listRes = cw.listMetricsPaginator(request);
            listRes.stream()
                    .flatMap(r -> r.metrics().stream())
                    .forEach(metrics -> System.out.println(" Retrieved metric is: "
 + metrics.metricName()));

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListMetricsla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Enumera los espacios de CloudWatch nombres y las métricas.
- Obtener estadísticas para una métrica y para la facturación estimada.
- Crear y actualizar un panel.
- Crear y agregar datos a una métrica.
- Crear y activar una alarma y, a continuación, consultar el historial de alarmas.
- Crear un detector de anomalías.
- Realice una imagen métrica y, luego, limpie los recursos.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario interactivo que demuestre CloudWatch las funciones.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import
 software.amazon.awssdk.services.cloudwatch.model.DashboardInvalidInputErrorException;
import software.amazon.awssdk.services.cloudwatch.model.DeleteAlarmsResponse;
import
 software.amazon.awssdk.services.cloudwatch.model.DeleteAnomalyDetectorResponse;
import software.amazon.awssdk.services.cloudwatch.model.DeleteDashboardsResponse;
import software.amazon.awssdk.services.cloudwatch.model.Dimension;
import software.amazon.awssdk.services.cloudwatch.model.GetMetricStatisticsResponse;
import software.amazon.awssdk.services.cloudwatch.model.LimitExceededException;
import software.amazon.awssdk.services.cloudwatch.model.PutDashboardResponse;
import software.amazon.awssdk.services.cloudwatch.model.PutMetricDataResponse;
import java.io.IOException;
```

```
import java.util.ArrayList;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To enable billing metrics and statistics for this example, make sure billing
 * alerts are enabled for your account:
 * https://docs.aws.amazon.com/AmazonCloudWatch/latest/monitoring/
monitor_estimated_charges_with_cloudwatch.html#turning_on_billing_metrics
 *
 * This Java code example performs the following tasks:
 *
 * 1. List available namespaces from Amazon CloudWatch.
 * 2. List available metrics within the selected Namespace.
 * 3. Get statistics for the selected metric over the last day.
 * 4. Get CloudWatch estimated billing for the last week.
 * 5. Create a new CloudWatch dashboard with metrics.
 * 6. List dashboards using a paginator.
 * 7. Create a new custom metric by adding data for it.
 * 8. Add the custom metric to the dashboard.
 * 9. Create an alarm for the custom metric.
 * 10. Describe current alarms.
 * 11. Get current data for the new custom metric.
 * 12. Push data into the custom metric to trigger the alarm.
 * 13. Check the alarm state using the action DescribeAlarmsForMetric.
 * 14. Get alarm history for the new alarm.
 * 15. Add an anomaly detector for the custom metric.
 * 16. Describe current anomaly detectors.
 * 17. Get a metric image for the custom metric.
 * 18. Clean up the Amazon CloudWatch resources.
 */
public class CloudWatchScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    static CloudWatchActions cwActions = new CloudWatchActions();
```

```
   private static final Logger logger =
LoggerFactory.getLogger(CloudWatchScenario.class);
   static Scanner scanner = new Scanner(System.in);
   public static void main(String[] args) throws Throwable {

       final String usage = """

           Usage:
             <myDate> <costDateWeek> <dashboardName> <dashboardJson> <dashboardAdd>
<settings> <metricImage> \s

           Where:
             myDate - The start date to use to get metric statistics. (For example,
2023-01-11T18:35:24.00Z.)\s
             costDateWeek - The start date to use to get AWS/Billing statistics.
(For example, 2023-01-11T18:35:24.00Z.)\s
             dashboardName - The name of the dashboard to create.\s
             dashboardJson - The location of a JSON file to use to create a
dashboard. (See jsonWidgets.json in javav2/example_code/cloudwatch.)\s
             dashboardAdd - The location of a JSON file to use to update a
dashboard. (See CloudDashboard.json in javav2/example_code/cloudwatch.)\s
             settings - The location of a JSON file from which various values are
read. (See settings.json in javav2/example_code/cloudwatch.)\s
             metricImage - The location of a BMP file that is used to create a
graph.\s
           """;

       if (args.length != 7) {
           logger.info(usage);
           return;
       }
       String myDate = args[0];
       String costDateWeek = args[1];
       String dashboardName = args[2];
       String dashboardJson = args[3];
       String dashboardAdd = args[4];
       String settings = args[5];
       String metricImage = args[6];

       logger.info(DASHES);
       logger.info("Welcome to the Amazon CloudWatch Basics scenario.");
       logger.info("""
           Amazon CloudWatch is a comprehensive monitoring and observability
service
```

```
            provided by Amazon Web Services (AWS). It is designed to help you
monitor your
            AWS resources, applications, and services, as well as on-premises
resources,
            in real-time.

            CloudWatch collects and tracks various types of data, including
metrics,
            logs, and events, from your AWS and on-premises resources. It allows you
to set
            alarms and automatically respond to changes in your environment,
            enabling you to quickly identify and address issues before they impact
your
            applications or services.

            With CloudWatch, you can gain visibility into your entire
infrastructure, from the cloud
            to the edge, and use this information to make informed decisions and
optimize your
            resource utilization.

            This scenario guides you through how to perform Amazon CloudWatch tasks
by using the
            AWS SDK for Java v2. Let's get started...
            """);
        waitForInputToContinue(scanner);

        try {
            runScenario(myDate, costDateWeek, dashboardName, dashboardJson,
dashboardAdd, settings, metricImage);
        } catch (RuntimeException e) {
            e.printStackTrace();
        }
        logger.info(DASHES);
    }

    private static void runScenario(String myDate, String costDateWeek, String
dashboardName, String dashboardJson, String dashboardAdd, String settings, String
metricImage ) throws Throwable {
        Double dataPoint = Double.parseDouble("10.0");
        logger.info(DASHES);
        logger.info("""
        1. List at least five available unique namespaces from Amazon CloudWatch.
        Select one from the list.
```

```
        """);
        String selectedNamespace;
        String selectedMetrics;
        int num;
        try {
            CompletableFuture<ArrayList<String>> future =
cwActions.listNameSpacesAsync();
            ArrayList<String> list = future.join();
            for (int z = 0; z < 5; z++) {
                int index = z + 1;
                logger.info("    " + index + ". {}", list.get(z));
            }

            num = Integer.parseInt(scanner.nextLine());
            if (1 <= num && num <= 5) {
                selectedNamespace = list.get(num - 1);
            } else {
                logger.info("You did not select a valid option.");
                return;
            }
            logger.info("You selected {}", selectedNamespace);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("2. List available metrics within the selected namespace.");
        logger.info("""
            A metric is a measure of the performance or health of your AWS
resources,
            applications, or custom resources. Metrics are the basic building blocks
of CloudWatch
            and provide data points that represent a specific aspect of your system
or application over time.
```

```
            Select a metric from the list.
            """);

        Dimension myDimension = null;
        try {
            CompletableFuture<ArrayList<String>> future =
cwActions.listMetsAsync(selectedNamespace);
            ArrayList<String> metList = future.join();
            logger.info("Metrics successfully retrieved. Total metrics: {}",
metList.size());
            for (int z = 0; z < 5; z++) {
                int index = z + 1;
                logger.info("    " + index + ". " + metList.get(z));
            }
            num = Integer.parseInt(scanner.nextLine());
            if (1 <= num && num <= 5) {
                selectedMetrics = metList.get(num - 1);
            } else {
                logger.info("You did not select a valid option.");
                return;
            }
            logger.info("You selected {}", selectedMetrics);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }

        try {
            myDimension = cwActions.getSpecificMetAsync(selectedNamespace).join();
            logger.info("Metric statistics successfully retrieved and displayed.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
```

```
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Get statistics for the selected metric over the last day.");
        logger.info("""
            Statistics refer to the various mathematical calculations that can be
performed on the
            collected metrics to derive meaningful insights. Statistics provide a
way to summarize and
            analyze the data collected for a specific metric over a specified time
period.
            """);
        waitForInputToContinue(scanner);
        String metricOption = "";
        ArrayList<String> statTypes = new ArrayList<>();
        statTypes.add("SampleCount");
        statTypes.add("Average");
        statTypes.add("Sum");
        statTypes.add("Minimum");
        statTypes.add("Maximum");

        for (int t = 0; t < 5; t++) {
            logger.info("    " + (t + 1) + ". {}", statTypes.get(t));
        }
        logger.info("Select a metric statistic by entering a number from the
preceding list:");
        num = Integer.parseInt(scanner.nextLine());
        if (1 <= num && num <= 5) {
            metricOption = statTypes.get(num - 1);
        } else {
            logger.info("You did not select a valid option.");
            return;
        }
        logger.info("You selected " + metricOption);
        waitForInputToContinue(scanner);
        try {
```

```
            CompletableFuture<GetMetricStatisticsResponse> future =
cwActions.getAndDisplayMetricStatisticsAsync(selectedNamespace, selectedMetrics,
metricOption, myDate, myDimension);
            future.join();
            logger.info("Metric statistics retrieved successfully.");

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Get CloudWatch estimated billing for the last week.");
        waitForInputToContinue(scanner);
         try {
            CompletableFuture<GetMetricStatisticsResponse> future =
cwActions.getMetricStatisticsAsync(costDateWeek);
            future.join();

            logger.info("Metric statistics successfully retrieved and displayed.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
             throw cause;
         }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. Create a new CloudWatch dashboard with metrics.");
        waitForInputToContinue(scanner);
```

```
        try {
            CompletableFuture<PutDashboardResponse> future =
cwActions.createDashboardWithMetricsAsync(dashboardName, dashboardJson);
            future.join();

        } catch (RuntimeException | IOException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof DashboardInvalidInputErrorException cwEx) {
                logger.info("Invalid CloudWatch data. Error message: {}, Error code
{}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("6. List dashboards using a paginator.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future = cwActions.listDashboardsAsync();
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Create a new custom metric by adding data to it.");
        logger.info("""
            The primary benefit of using a custom metric in Amazon CloudWatch is the
ability to
```

```
            monitor and collect data that is specific to your application or
infrastructure.
            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<PutMetricDataResponse> future =
cwActions.createNewCustomMetricAsync(dataPoint);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. Add an additional metric to the dashboard.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<PutDashboardResponse> future =
cwActions.addMetricToDashboardAsync(dashboardAdd, dashboardName);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof DashboardInvalidInputErrorException cwEx) {
                logger.info("Invalid CloudWatch data. Error message: {}, Error code
{}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("9. Create an alarm for the custom metric.");
```

```
        waitForInputToContinue(scanner);
        String alarmName = "" ;
        try {
            CompletableFuture<String> future = cwActions.createAlarmAsync(settings);
            alarmName = future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof LimitExceededException cwEx) {
                logger.info("The quota for alarms has been reached: Error message:
{}, Error code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("10. Describe ten current alarms.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future = cwActions.describeAlarmsAsync();
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("11. Get current data for new custom metric.");
        try {
            CompletableFuture<Void> future =
cwActions.getCustomMetricDataAsync(settings);
```

```
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("12. Push data into the custom metric to trigger the alarm.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<PutMetricDataResponse> future =
cwActions.addMetricDataForAlarmAsync(settings);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("13. Check the alarm state using the action
DescribeAlarmsForMetric.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
cwActions.checkForMetricAlarmAsync(settings);
            future.join();
```

```
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("14. Get alarm history for the new alarm.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
cwActions.getAlarmHistoryAsync(settings, myDate);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("15. Add an anomaly detector for the custom metric.");
        logger.info("""
            An anomaly detector is a feature that automatically detects unusual
patterns or deviations in your
            monitored metrics. It uses machine learning algorithms to analyze the
historical behavior
            of your metrics and establish a baseline.
```

```
            The anomaly detector then compares the current metric values against
this baseline and
            identifies any anomalies or outliers that may indicate potential issues
or unexpected changes
            in your system's performance or behavior.

            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
cwActions.addAnomalyDetectorAsync(settings);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("16. Describe current anomaly detectors.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
cwActions.describeAnomalyDetectorsAsync(settings);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
```

```
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("17. Get a metric image for the custom metric.");
        try {
            CompletableFuture<Void> future =
cwActions.downloadAndSaveMetricImageAsync(metricImage);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("18. Clean up the Amazon CloudWatch resources.");

        try {
            logger.info(". Delete the Dashboard.");
            waitForInputToContinue(scanner);
            CompletableFuture<DeleteDashboardsResponse> future =
cwActions.deleteDashboardAsync(dashboardName);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }

        try {
```

```
            logger.info("Delete the alarm.");
            waitForInputToContinue(scanner);
            CompletableFuture<DeleteAlarmsResponse> future =
cwActions.deleteCWAlarmAsync(alarmName);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }

        try {
            logger.info("Delete the anomaly detector.");
            waitForInputToContinue(scanner);
            CompletableFuture<DeleteAnomalyDetectorResponse> future =
cwActions.deleteAnomalyDetectorAsync(settings);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("The Amazon CloudWatch example scenario is complete.");
        logger.info(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
```

```
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();
            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Una clase contenedora para los métodos CloudWatch del SDK.

```
public class CloudWatchActions {

    private static CloudWatchAsyncClient cloudWatchAsyncClient;

    private static final Logger logger =
 LoggerFactory.getLogger(CloudWatchActions.class);

    /**
     * Retrieves an asynchronous CloudWatch client instance.
     *
     * <p>
     * This method ensures that the CloudWatch client is initialized with the
 following configurations:
     * <ul>
     *     <li>Maximum concurrency: 100</li>
     *     <li>Connection timeout: 60 seconds</li>
     *     <li>Read timeout: 60 seconds</li>
     *     <li>Write timeout: 60 seconds</li>
     *     <li>API call timeout: 2 minutes</li>
     *     <li>API call attempt timeout: 90 seconds</li>
     *     <li>Retry strategy: STANDARD</li>
     * </ul>
     * </p>
     *
     * @return the asynchronous CloudWatch client instance
```

```
     */
    private static CloudWatchAsyncClient getAsyncClient() {
        if (cloudWatchAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            cloudWatchAsyncClient = CloudWatchAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return cloudWatchAsyncClient;
    }

    /**
     * Deletes an Anomaly Detector.
     *
     * @param fileName the name of the file containing the Anomaly Detector
configuration
     * @return a CompletableFuture that represents the asynchronous deletion of the
Anomaly Detector
     */
    public CompletableFuture<DeleteAnomalyDetectorResponse>
deleteAnomalyDetectorAsync(String fileName) {
        CompletableFuture<JsonNode> readFileFuture =
CompletableFuture.supplyAsync(() -> {
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                return new ObjectMapper().readTree(parser); // Return the root node
            } catch (IOException e) {
                throw new RuntimeException("Failed to read or parse the file", e);
            }
```

```
        });

        return readFileFuture.thenCompose(rootNode -> {
            String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
            String customMetricName =
rootNode.findValue("customMetricName").asText();

            SingleMetricAnomalyDetector singleMetricAnomalyDetector =
SingleMetricAnomalyDetector.builder()
                .metricName(customMetricName)
                .namespace(customMetricNamespace)
                .stat("Maximum")
                .build();

            DeleteAnomalyDetectorRequest request =
DeleteAnomalyDetectorRequest.builder()
                .singleMetricAnomalyDetector(singleMetricAnomalyDetector)
                .build();

            return getAsyncClient().deleteAnomalyDetector(request);
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Failed to delete the Anomaly Detector",
exception);
            } else {
                logger.info("Successfully deleted the Anomaly Detector.");
            }
        });
    }

    /**
     * Deletes a CloudWatch alarm.
     *
     * @param alarmName the name of the alarm to be deleted
     * @return a {@link CompletableFuture} representing the asynchronous operation
to delete the alarm
     * the {@link DeleteAlarmsResponse} is returned when the operation completes
successfully,
     * or a {@link RuntimeException} is thrown if the operation fails
     */
    public CompletableFuture<DeleteAlarmsResponse> deleteCWAlarmAsync(String
alarmName) {
        DeleteAlarmsRequest request = DeleteAlarmsRequest.builder()
```

```
            .alarmNames(alarmName)
            .build();

        return getAsyncClient().deleteAlarms(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to delete the alarm:{} " +
alarmName, exception);
                } else {
                    logger.info("Successfully deleted alarm {} ", alarmName);
                }
            });
    }

    /**
     * Deletes the specified dashboard.
     *
     * @param dashboardName the name of the dashboard to be deleted
     * @return a {@link CompletableFuture} representing the asynchronous operation
of deleting the dashboard
     * @throws RuntimeException if the dashboard deletion fails
     */
    public CompletableFuture<DeleteDashboardsResponse> deleteDashboardAsync(String
dashboardName) {
        DeleteDashboardsRequest dashboardsRequest =
DeleteDashboardsRequest.builder()
            .dashboardNames(dashboardName)
            .build();

        return getAsyncClient().deleteDashboards(dashboardsRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to delete the dashboard: " +
dashboardName, exception);
                } else {
                    logger.info("{} was successfully deleted.", dashboardName);
                }
            });
    }


    /**
     * Retrieves and saves a custom metric image to a file.
     *
```

```
    * @param fileName the name of the file to save the metric image to
    * @return a {@link CompletableFuture} that completes when the image has been
saved to the file
    */
   public CompletableFuture<Void> downloadAndSaveMetricImageAsync(String fileName)
{
       logger.info("Getting Image data for custom metric.");
       String myJSON = """
             {
                 "title": "Example Metric Graph",
                 "view": "timeSeries",
                 "stacked ": false,
                 "period": 10,
                 "width": 1400,
                 "height": 600,
                 "metrics": [
                     [
                     "AWS/Billing",
                     "EstimatedCharges",
                     "Currency",
                     "USD"
                    ]
                 ]
             }
            """;

       GetMetricWidgetImageRequest imageRequest =
GetMetricWidgetImageRequest.builder()
           .metricWidget(myJSON)
           .build();

       return getAsyncClient().getMetricWidgetImage(imageRequest)
           .thenCompose(response -> {
               SdkBytes sdkBytes = response.metricWidgetImage();
               byte[] bytes = sdkBytes.asByteArray();
               return CompletableFuture.runAsync(() -> {
                   try {
                       File outputFile = new File(fileName);
                       try (FileOutputStream outputStream = new
FileOutputStream(outputFile)) {
                           outputStream.write(bytes);
                       }
                   } catch (IOException e) {
```

```
                        throw new RuntimeException("Failed to write image to file",
e);
                    }
                });
            })
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Error getting and saving metric
image", exception);
                } else {
                    logger.info("Image data saved successfully to {}", fileName);
                }
            });
    }


    /**
     * Describes the anomaly detectors based on the specified JSON file.
     *
     * @param fileName the name of the JSON file containing the custom metric
namespace and name
     * @return a {@link CompletableFuture} that completes when the anomaly detectors
have been described
     * @throws RuntimeException if there is a failure during the operation, such as
when reading or parsing the JSON file,
     *                          or when describing the anomaly detectors
     */
    public CompletableFuture<Void> describeAnomalyDetectorsAsync(String fileName) {
        CompletableFuture<JsonNode> readFileFuture =
CompletableFuture.supplyAsync(() -> {
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                return new ObjectMapper().readTree(parser);
            } catch (IOException e) {
                throw new RuntimeException("Failed to read or parse the file", e);
            }
        });

        return readFileFuture.thenCompose(rootNode -> {
            try {
                String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
```

```
                String customMetricName =
rootNode.findValue("customMetricName").asText();

                DescribeAnomalyDetectorsRequest detectorsRequest =
DescribeAnomalyDetectorsRequest.builder()
                    .maxResults(10)
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .build();

                return
getAsyncClient().describeAnomalyDetectors(detectorsRequest).thenAccept(response ->
{
                    List<AnomalyDetector> anomalyDetectorList =
response.anomalyDetectors();
                    for (AnomalyDetector detector : anomalyDetectorList) {
                        logger.info("Metric name: {} ",
detector.singleMetricAnomalyDetector().metricName());
                        logger.info("State: {} ", detector.stateValue());
                    }
                });
            } catch (RuntimeException e) {
                throw new RuntimeException("Failed to describe anomaly detectors",
e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error describing anomaly detectors",
exception);
            }
        });
    }


    /**
     * Adds an anomaly detector for the given file.
     *
     * @param fileName the name of the file containing the anomaly detector
configuration
     * @return a {@link CompletableFuture} that completes when the anomaly detector
has been added
     */
    public CompletableFuture<Void> addAnomalyDetectorAsync(String fileName) {
```

```
        CompletableFuture<JsonNode> readFileFuture =
CompletableFuture.supplyAsync(() -> {
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                return new ObjectMapper().readTree(parser); // Return the root node
            } catch (IOException e) {
                throw new RuntimeException("Failed to read or parse the file", e);
            }
        });

        return readFileFuture.thenCompose(rootNode -> {
            try {
                String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
                String customMetricName =
rootNode.findValue("customMetricName").asText();

                SingleMetricAnomalyDetector singleMetricAnomalyDetector =
SingleMetricAnomalyDetector.builder()
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .stat("Maximum")
                    .build();

                PutAnomalyDetectorRequest anomalyDetectorRequest =
PutAnomalyDetectorRequest.builder()
                    .singleMetricAnomalyDetector(singleMetricAnomalyDetector)
                    .build();

                return
getAsyncClient().putAnomalyDetector(anomalyDetectorRequest).thenAccept(response ->
{
                    logger.info("Added anomaly detector for metric {}",
customMetricName);
                });
            } catch (Exception e) {
                throw new RuntimeException("Failed to create anomaly detector", e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error adding anomaly detector",
exception);
            }
```

```
        });
    }


    /**
     * Retrieves the alarm history for a given alarm name and date range.
     *
     * @param fileName the path to the JSON file containing the alarm name
     * @param date     the date to start the alarm history search (in the format
"yyyy-MM-dd'T'HH:mm:ss'Z'")
     * @return a {@code CompletableFuture<Void>} that completes when the alarm
history has been retrieved and processed
     */
    public CompletableFuture<Void> getAlarmHistoryAsync(String fileName, String
date) {
        CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
                return rootNode.findValue("exampleAlarmName").asText(); // Return
alarmName from the JSON file
            } catch (IOException e) {
                throw new RuntimeException("Failed to read or parse the file", e);
            }
        });

        // Use the alarm name to describe alarm history with a paginator.
        return readFileFuture.thenCompose(alarmName -> {
            try {
                Instant start = Instant.parse(date);
                Instant endDate = Instant.now();
                DescribeAlarmHistoryRequest historyRequest =
DescribeAlarmHistoryRequest.builder()
                    .startDate(start)
                    .endDate(endDate)
                    .alarmName(alarmName)
                    .historyItemType(HistoryItemType.ACTION)
                    .build();

                // Use the paginator to paginate through alarm history pages.
```

```
                DescribeAlarmHistoryPublisher historyPublisher =
getAsyncClient().describeAlarmHistoryPaginator(historyRequest);
                CompletableFuture<Void> future = historyPublisher
                    .subscribe(response -> response.alarmHistoryItems().forEach(item
-> {
                        logger.info("History summary: {}", item.historySummary());
                        logger.info("Timestamp: {}", item.timestamp());
                    }))
                    .whenComplete((result, exception) -> {
                        if (exception != null) {
                            logger.error("Error occurred while getting alarm
history: " + exception.getMessage(), exception);
                        } else {
                            logger.info("Successfully retrieved all alarm
history.");
                        }
                    });

                // Return the future to the calling code for further handling
                return future;
            } catch (Exception e) {
                throw new RuntimeException("Failed to process alarm history", e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error completing alarm history
processing", exception);
            }
        });
    }



    /**
     * Checks for a metric alarm in AWS CloudWatch.
     *
     * @param fileName the name of the file containing the JSON configuration for
the custom metric
     * @return a {@link CompletableFuture} that completes when the check for the
metric alarm is complete
     */
    public CompletableFuture<Void> checkForMetricAlarmAsync(String fileName) {
        CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
```

```
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
                return rootNode.toString(); // Return JSON as a string for further
processing
            } catch (IOException e) {
                throw new RuntimeException("Failed to read file", e);
            }
        });

        return readFileFuture.thenCompose(jsonContent -> {
            try {
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(jsonContent);
                String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
                String customMetricName =
rootNode.findValue("customMetricName").asText();

                DescribeAlarmsForMetricRequest metricRequest =
DescribeAlarmsForMetricRequest.builder()
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .build();

                return checkForAlarmAsync(metricRequest, customMetricName, 10);

            } catch (IOException e) {
                throw new RuntimeException("Failed to parse JSON content", e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error checking metric alarm",
exception);
            }
        });
    }

    // Recursive method to check for the alarm.

    /**
     * Checks for the existence of an alarm asynchronously for the specified metric.
```

```
    *
    * @param metricRequest    the request to describe the alarms for the specified
metric
    * @param customMetricName the name of the custom metric to check for an alarm
    * @param retries          the number of retries to perform if no alarm is found
    * @return a {@link CompletableFuture} that completes when an alarm is found or
the maximum number of retries has been reached
    */
   private static CompletableFuture<Void>
checkForAlarmAsync(DescribeAlarmsForMetricRequest metricRequest, String
customMetricName, int retries) {
       if (retries == 0) {
           return CompletableFuture.completedFuture(null).thenRun(() ->
               logger.info("No Alarm state found for {} after 10 retries.",
customMetricName)
           );
       }

       return
(getAsyncClient().describeAlarmsForMetric(metricRequest).thenCompose(response -> {
           if (response.hasMetricAlarms()) {
               logger.info("Alarm state found for {}", customMetricName);
               return CompletableFuture.completedFuture(null); // Alarm found,
complete the future
           } else {
               return CompletableFuture.runAsync(() -> {
                   try {
                       Thread.sleep(20000);
                       logger.info(".");
                   } catch (InterruptedException e) {
                       throw new RuntimeException("Interrupted while waiting to
retry", e);
                   }
               }).thenCompose(v -> checkForAlarmAsync(metricRequest,
customMetricName, retries - 1)); // Recursive call
           }
       }));
   }


   /**
    * Adds metric data for an alarm asynchronously.
    *
    * @param fileName the name of the JSON file containing the metric data
```

```
    * @return a CompletableFuture that asynchronously returns the
PutMetricDataResponse
    */
   public CompletableFuture<PutMetricDataResponse>
addMetricDataForAlarmAsync(String fileName) {
       CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
           try {
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
               return rootNode.toString(); // Return JSON as a string for further
processing
           } catch (IOException e) {
               throw new RuntimeException("Failed to read file", e);
           }
       });

       return readFileFuture.thenCompose(jsonContent -> {
           try {
               com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(jsonContent);
               String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
               String customMetricName =
rootNode.findValue("customMetricName").asText();
               Instant instant = Instant.now();

               // Create MetricDatum objects.
               MetricDatum datum1 = MetricDatum.builder()
                   .metricName(customMetricName)
                   .unit(StandardUnit.NONE)
                   .value(1001.00)
                   .timestamp(instant)
                   .build();

               MetricDatum datum2 = MetricDatum.builder()
                   .metricName(customMetricName)
                   .unit(StandardUnit.NONE)
                   .value(1002.00)
                   .timestamp(instant)
                   .build();
```

```
                List<MetricDatum> metricDataList = new ArrayList<>();
                metricDataList.add(datum1);
                metricDataList.add(datum2);

                // Build the PutMetricData request.
                PutMetricDataRequest request = PutMetricDataRequest.builder()
                    .namespace(customMetricNamespace)
                    .metricData(metricDataList)
                    .build();

                // Send the request asynchronously.
                return getAsyncClient().putMetricData(request);

            } catch (IOException e) {
                CompletableFuture<PutMetricDataResponse> failedFuture = new
CompletableFuture<>();
                failedFuture.completeExceptionally(new RuntimeException("Failed to
parse JSON content", e));
                return failedFuture;
            }
        }).whenComplete((response, exception) -> {
            if (exception != null) {
                logger.error("Failed to put metric data: " + exception.getMessage(),
exception);
            } else {
                logger.info("Added metric values for metric.");
            }
        });
    }


    /**
     * Retrieves custom metric data from the AWS CloudWatch service.
     *
     * @param fileName the name of the file containing the custom metric information
     * @return a {@link CompletableFuture} that completes when the metric data has
been retrieved
     */
    public CompletableFuture<Void> getCustomMetricDataAsync(String fileName) {
        CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
            try {
                // Read values from the JSON file.
```

```
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
                return rootNode.toString(); // Return JSON as a string for further
processing
            } catch (IOException e) {
                throw new RuntimeException("Failed to read file", e);
            }
        });

        return readFileFuture.thenCompose(jsonContent -> {
            try {
                // Parse the JSON string to extract relevant values.
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(jsonContent);
                String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
                String customMetricName =
rootNode.findValue("customMetricName").asText();

                // Set the current time and date range for metric query.
                Instant nowDate = Instant.now();
                long hours = 1;
                long minutes = 30;
                Instant endTime = nowDate.plus(hours,
ChronoUnit.HOURS).plus(minutes, ChronoUnit.MINUTES);

                Metric met = Metric.builder()
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .build();

                MetricStat metStat = MetricStat.builder()
                    .stat("Maximum")
                    .period(60)  // Assuming period in seconds
                    .metric(met)
                    .build();

                MetricDataQuery dataQuery = MetricDataQuery.builder()
                    .metricStat(metStat)
                    .id("foo2")
                    .returnData(true)
                    .build();
```

```
                List<MetricDataQuery> dq = new ArrayList<>();
                dq.add(dataQuery);

                GetMetricDataRequest getMetricDataRequest =
GetMetricDataRequest.builder()
                    .maxDatapoints(10)
                    .scanBy(ScanBy.TIMESTAMP_DESCENDING)
                    .startTime(nowDate)
                    .endTime(endTime)
                    .metricDataQueries(dq)
                    .build();

                // Call the async method for CloudWatch data retrieval.
                return getAsyncClient().getMetricData(getMetricDataRequest);

            } catch (IOException e) {
                throw new RuntimeException("Failed to parse JSON content", e);
            }
        }).thenAccept(response -> {
            List<MetricDataResult> data = response.metricDataResults();
            for (MetricDataResult item : data) {
                logger.info("The label is: {}", item.label());
                logger.info("The status code is: {}", item.statusCode().toString());
            }
        }).exceptionally(exception -> {
            throw new RuntimeException("Failed to get metric data", exception);
        });
    }


    /**
     * Describes the CloudWatch alarms of the 'METRIC_ALARM' type.
     *
     * @return a {@link CompletableFuture} that represents the asynchronous
operation
     * of describing the CloudWatch alarms. The future completes when the
     * operation is finished, either successfully or with an error.
     */
    public CompletableFuture<Void> describeAlarmsAsync() {
        List<AlarmType> typeList = new ArrayList<>();
        typeList.add(AlarmType.METRIC_ALARM);
        DescribeAlarmsRequest alarmsRequest = DescribeAlarmsRequest.builder()
            .alarmTypes(typeList)
```

```
            .maxRecords(10)
            .build();

        return getAsyncClient().describeAlarms(alarmsRequest)
            .thenAccept(response -> {
                List<MetricAlarm> alarmList = response.metricAlarms();
                for (MetricAlarm alarm : alarmList) {
                    logger.info("Alarm name: {}", alarm.alarmName());
                    logger.info("Alarm description: {} ", alarm.alarmDescription());
                }
            })
            .whenComplete((response, ex) -> {
                if (ex != null) {
                    logger.info("Failed to describe alarms: {}", ex.getMessage());
                } else {
                    logger.info("Successfully described alarms.");
                }
            });
    }

    /**
     * Creates an alarm based on the configuration provided in a JSON file.
     *
     * @param fileName the name of the JSON file containing the alarm configuration
     * @return a CompletableFuture that represents the asynchronous operation of
creating the alarm
     * @throws RuntimeException if an exception occurs while reading the JSON file
or creating the alarm
     */
    public CompletableFuture<String> createAlarmAsync(String fileName) {
        com.fasterxml.jackson.databind.JsonNode rootNode;
        try {
            JsonParser parser = new JsonFactory().createParser(new File(fileName));
            rootNode = new ObjectMapper().readTree(parser);
        } catch (IOException e) {
            throw new RuntimeException("Failed to read the alarm configuration
file", e);
        }

        // Extract values from the JSON node.
        String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
        String customMetricName = rootNode.findValue("customMetricName").asText();
        String alarmName = rootNode.findValue("exampleAlarmName").asText();
```

```
        String emailTopic = rootNode.findValue("emailTopic").asText();
        String accountId = rootNode.findValue("accountId").asText();
        String region = rootNode.findValue("region").asText();

        // Create a List for alarm actions.
        List<String> alarmActions = new ArrayList<>();
        alarmActions.add("arn:aws:sns:" + region + ":" + accountId + ":" +
emailTopic);

        PutMetricAlarmRequest alarmRequest = PutMetricAlarmRequest.builder()
            .alarmActions(alarmActions)
            .alarmDescription("Example metric alarm")
            .alarmName(alarmName)

.comparisonOperator(ComparisonOperator.GREATER_THAN_OR_EQUAL_TO_THRESHOLD)
            .threshold(100.00)
            .metricName(customMetricName)
            .namespace(customMetricNamespace)
            .evaluationPeriods(1)
            .period(10)
            .statistic("Maximum")
            .datapointsToAlarm(1)
            .treatMissingData("ignore")
            .build();

        // Call the putMetricAlarm asynchronously and handle the result.
        return getAsyncClient().putMetricAlarm(alarmRequest)
            .handle((response, ex) -> {
                if (ex != null) {
                    logger.info("Failed to create alarm: {}", ex.getMessage());
                    throw new RuntimeException("Failed to create alarm", ex);
                } else {
                    logger.info("{} was successfully created!", alarmName);
                    return alarmName;
                }
            });
    }

    /**
     * Adds a metric to a dashboard asynchronously.
     *
     * @param fileName      the name of the file containing the dashboard content
     * @param dashboardName the name of the dashboard to be updated
```

```
    * @return a {@link CompletableFuture} representing the asynchronous operation,
which will complete with a
    * {@link PutDashboardResponse} when the dashboard is successfully updated
    */
   public CompletableFuture<PutDashboardResponse> addMetricToDashboardAsync(String
fileName, String dashboardName) {
       String dashboardBody;
       try {
           dashboardBody = readFileAsString(fileName);
       } catch (IOException e) {
           throw new RuntimeException("Failed to read the dashboard file", e);
       }

       PutDashboardRequest dashboardRequest = PutDashboardRequest.builder()
           .dashboardName(dashboardName)
           .dashboardBody(dashboardBody)
           .build();

       return getAsyncClient().putDashboard(dashboardRequest)
           .handle((response, ex) -> {
               if (ex != null) {
                   logger.info("Failed to update dashboard: {}", ex.getMessage());
                   throw new RuntimeException("Error updating dashboard", ex);
               } else {
                   logger.info("{} was successfully updated.", dashboardName);
                   return response;
               }
           });
   }

   /**
    * Creates a new custom metric.
    *
    * @param dataPoint the data point to be added to the custom metric
    * @return a {@link CompletableFuture} representing the asynchronous operation
of adding the custom metric
    */
   public CompletableFuture<PutMetricDataResponse>
createNewCustomMetricAsync(Double dataPoint) {
       Dimension dimension = Dimension.builder()
           .name("UNIQUE_PAGES")
           .value("URLS")
           .build();
```

```
        // Set an Instant object for the current time in UTC.
        String time =
ZonedDateTime.now(ZoneOffset.UTC).format(DateTimeFormatter.ISO_INSTANT);
        Instant instant = Instant.parse(time);

        // Create the MetricDatum.
        MetricDatum datum = MetricDatum.builder()
            .metricName("PAGES_VISITED")
            .unit(StandardUnit.NONE)
            .value(dataPoint)
            .timestamp(instant)
            .dimensions(dimension)
            .build();

        PutMetricDataRequest request = PutMetricDataRequest.builder()
            .namespace("SITE/TRAFFIC")
            .metricData(datum)
            .build();

        return getAsyncClient().putMetricData(request)
            .whenComplete((response, ex) -> {
                if (ex != null) {
                    throw new RuntimeException("Error adding custom metric", ex);
                } else {
                    logger.info("Successfully added metric values for
PAGES_VISITED.");
                }
            });
    }

    /**
     * Lists the available dashboards.
     *
     * @return a {@link CompletableFuture} that completes when the operation is
finished.
     * The future will complete exceptionally if an error occurs while listing the
dashboards.
     */
    public CompletableFuture<Void> listDashboardsAsync() {
        ListDashboardsRequest listDashboardsRequest =
ListDashboardsRequest.builder().build();
        ListDashboardsPublisher paginator =
getAsyncClient().listDashboardsPaginator(listDashboardsRequest);
        return paginator.subscribe(response -> {
```

```
            response.dashboardEntries().forEach(entry -> {
                logger.info("Dashboard name is: {} ", entry.dashboardName());
                logger.info("Dashboard ARN is: {} ", entry.dashboardArn());
            });
        }).exceptionally(ex -> {
            logger.info("Failed to list dashboards: {} ", ex.getMessage());
            throw new RuntimeException("Error occurred while listing dashboards",
ex);
        });
    }


    /**
     * Creates a new dashboard with the specified name and metrics from the given
file.
     *
     * @param dashboardName the name of the dashboard to be created
     * @param fileName      the name of the file containing the dashboard body
     * @return a {@link CompletableFuture} representing the asynchronous operation
of creating the dashboard
     * @throws IOException if there is an error reading the dashboard body from the
file
     */
    public CompletableFuture<PutDashboardResponse>
createDashboardWithMetricsAsync(String dashboardName, String fileName) throws
IOException {
        String dashboardBody = readFileAsString(fileName);
        PutDashboardRequest dashboardRequest = PutDashboardRequest.builder()
            .dashboardName(dashboardName)
            .dashboardBody(dashboardBody)
            .build();

        return getAsyncClient().putDashboard(dashboardRequest)
            .handle((response, ex) -> {
                if (ex != null) {
                    logger.info("Failed to create dashboard: {}", ex.getMessage());
                    throw new RuntimeException("Dashboard creation failed", ex);
                } else {
                    // Handle the normal response case
                    logger.info("{} was successfully created.", dashboardName);
                    List<DashboardValidationMessage> messages =
response.dashboardValidationMessages();
                    if (messages.isEmpty()) {
                        logger.info("There are no messages in the new Dashboard.");
```

```
                    } else {
                        for (DashboardValidationMessage message : messages) {
                            logger.info("Message: {}", message.message());
                        }
                    }
                    return response; // Return the response for further use
                }
            });
    }


    /**
     * Retrieves the metric statistics for the "EstimatedCharges" metric in the
"AWS/Billing" namespace.
     *
     * @param costDateWeek the start date for the metric statistics, in the format
of an ISO-8601 date string (e.g., "2023-04-05")
     * @return a {@link CompletableFuture} that, when completed, contains the {@link
GetMetricStatisticsResponse} with the retrieved metric statistics
     * @throws RuntimeException if the metric statistics cannot be retrieved
successfully
     */
    public CompletableFuture<GetMetricStatisticsResponse>
getMetricStatisticsAsync(String costDateWeek) {
        Instant start = Instant.parse(costDateWeek);
        Instant endDate = Instant.now();

        // Define dimension
        Dimension dimension = Dimension.builder()
            .name("Currency")
            .value("USD")
            .build();

        List<Dimension> dimensionList = new ArrayList<>();
        dimensionList.add(dimension);

        GetMetricStatisticsRequest statisticsRequest =
GetMetricStatisticsRequest.builder()
            .metricName("EstimatedCharges")
            .namespace("AWS/Billing")
            .dimensions(dimensionList)
            .statistics(Statistic.MAXIMUM)
            .startTime(start)
            .endTime(endDate)
```

```
            .period(86400) // One day period
            .build();

        return getAsyncClient().getMetricStatistics(statisticsRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    List<Datapoint> data = response.datapoints();
                    if (!data.isEmpty()) {
                        for (Datapoint datapoint : data) {
                            logger.info("Timestamp: {} Maximum value: {})",
datapoint.timestamp(), datapoint.maximum());
                        }
                    } else {
                        logger.info("The returned data list is empty");
                    }
                } else {
                    throw new RuntimeException("Failed to get metric statistics: " +
exception.getMessage(), exception);
                }
            });
    }


    /**
     * Retrieves and displays metric statistics for the specified parameters.
     *
     * @param nameSpace    the namespace for the metric
     * @param metVal       the name of the metric
     * @param metricOption the statistic to retrieve for the metric (e.g.,
"Maximum", "Average")
     * @param date         the date for which to retrieve the metric statistics, in
the format "yyyy-MM-dd'T'HH:mm:ss'Z'"
     * @param myDimension  the dimension(s) to filter the metric statistics by
     * @return a {@link CompletableFuture} that completes when the metric statistics
have been retrieved and displayed
     */
    public CompletableFuture<GetMetricStatisticsResponse>
getAndDisplayMetricStatisticsAsync(String nameSpace, String metVal,

            String metricOption, String date, Dimension myDimension) {

        Instant start = Instant.parse(date);
        Instant endDate = Instant.now();
```

```
        // Building the request for metric statistics.
        GetMetricStatisticsRequest statisticsRequest =
GetMetricStatisticsRequest.builder()
            .endTime(endDate)
            .startTime(start)
            .dimensions(myDimension)
            .metricName(metVal)
            .namespace(nameSpace)
            .period(86400) // 1 day period
            .statistics(Statistic.fromValue(metricOption))
            .build();

        return getAsyncClient().getMetricStatistics(statisticsRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    List<Datapoint> data = response.datapoints();
                    if (!data.isEmpty()) {
                        for (Datapoint datapoint : data) {
                            logger.info("Timestamp: {} Maximum value: {}",
datapoint.timestamp(), datapoint.maximum());
                        }
                    } else {
                        logger.info("The returned data list is empty");
                    }
                } else {
                    logger.info("Failed to get metric statistics: {} ",
exception.getMessage());
                }
            })
            .exceptionally(exception -> {
                throw new RuntimeException("Error while getting metric statistics: "
+ exception.getMessage(), exception);
            });
    }


    /**
     * Retrieves a list of metric names for the specified namespace.
     *
     * @param namespace the namespace for which to retrieve the metric names
     * @return a {@link CompletableFuture} that, when completed, contains an {@link
ArrayList} of
     * the metric names in the specified namespace
     * @throws RuntimeException if an error occurs while listing the metrics
```

```
     */
    public CompletableFuture<ArrayList<String>> listMetsAsync(String namespace) {
        ListMetricsRequest request = ListMetricsRequest.builder()
            .namespace(namespace)
            .build();

        ListMetricsPublisher metricsPaginator =
getAsyncClient().listMetricsPaginator(request);
        Set<String> metSet = new HashSet<>();
        CompletableFuture<Void> future = metricsPaginator.subscribe(response -> {
            response.metrics().forEach(metric -> {
                String metricName = metric.metricName();
                metSet.add(metricName);
            });
        });

        return future
            .thenApply(ignored -> new ArrayList<>(metSet))
            .exceptionally(exception -> {
                throw new RuntimeException("Failed to list metrics: " +
exception.getMessage(), exception);
            });
    }

    /**
     * Lists the available namespaces for the current AWS account.
     *
     * @return a {@link CompletableFuture} that, when completed, contains an {@link
ArrayList} of the available namespace names.
     * @throws RuntimeException if an error occurs while listing the namespaces.
     */
    public CompletableFuture<ArrayList<String>> listNameSpacesAsync() {
        ArrayList<String> nameSpaceList = new ArrayList<>();
        ListMetricsRequest request = ListMetricsRequest.builder().build();

        ListMetricsPublisher metricsPaginator =
getAsyncClient().listMetricsPaginator(request);
        CompletableFuture<Void> future = metricsPaginator.subscribe(response -> {
            response.metrics().forEach(metric -> {
                String namespace = metric.namespace();
                if (!nameSpaceList.contains(namespace)) {
                    nameSpaceList.add(namespace);
                }
            });
```

```
        });

        return future
            .thenApply(ignored -> nameSpaceList)
            .exceptionally(exception -> {
                throw new RuntimeException("Failed to list namespaces: " +
exception.getMessage(), exception);
            });
    }
    /**
     * Retrieves the specific metric asynchronously.
     *
     * @param namespace the namespace of the metric to retrieve
     * @return a CompletableFuture that completes with the first dimension of the
first metric found in the specified namespace,
     * or throws a RuntimeException if an error occurs or no metrics or dimensions
are found
     */
    public CompletableFuture<Dimension> getSpecificMetAsync(String namespace) {
        ListMetricsRequest request = ListMetricsRequest.builder()
            .namespace(namespace)
            .build();

        return getAsyncClient().listMetrics(request).handle((response, exception) ->
{
            if (exception != null) {
                logger.info("Error occurred while listing metrics: {} ",
exception.getMessage());
                throw new RuntimeException("Failed to retrieve specific metric
dimension", exception);
            } else {
                List<Metric> myList = response.metrics();
                if (!myList.isEmpty()) {
                    Metric metric = myList.get(0);
                    if (!metric.dimensions().isEmpty()) {
                        return metric.dimensions().get(0); // Return the first
dimension
                    }
                }
                throw new RuntimeException("No metrics or dimensions found");
            }
        });
    }
```

```
    public static String readFileAsString(String file) throws IOException {
        return new String(Files.readAllBytes(Paths.get(file)));
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - DeleteAlarms
  - DeleteAnomalyDetector
  - DeleteDashboards
  - DescribeAlarmHistory
  - DescribeAlarms
  - DescribeAlarmsForMetric
  - DescribeAnomalyDetectors
  - GetMetricData
  - GetMetricStatistics
  - GetMetricWidgetImage
  - ListMetrics
  - PutAnomalyDetector
  - PutDashboard
  - PutMetricAlarm
  - PutMetricData

Acciones

`DeleteAlarms`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteAlarms`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deletes a CloudWatch alarm.
    *
    * @param alarmName the name of the alarm to be deleted
    * @return a {@link CompletableFuture} representing the asynchronous operation
to delete the alarm
    * the {@link DeleteAlarmsResponse} is returned when the operation completes
successfully,
    * or a {@link RuntimeException} is thrown if the operation fails
    */
   public CompletableFuture<DeleteAlarmsResponse> deleteCWAlarmAsync(String
alarmName) {
       DeleteAlarmsRequest request = DeleteAlarmsRequest.builder()
           .alarmNames(alarmName)
           .build();

       return getAsyncClient().deleteAlarms(request)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   throw new RuntimeException("Failed to delete the alarm:{} " +
alarmName, exception);
               } else {
                   logger.info("Successfully deleted alarm {} ", alarmName);
               }
           });
   }
```

- Para obtener más información sobre la API, consulta DeleteAlarmsla Referencia AWS SDK for Java 2.x de la API.

`DeleteAnomalyDetector`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteAnomalyDetector`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deletes an Anomaly Detector.
    *
    * @param fileName the name of the file containing the Anomaly Detector
configuration
    * @return a CompletableFuture that represents the asynchronous deletion of the
Anomaly Detector
    */
   public CompletableFuture<DeleteAnomalyDetectorResponse>
deleteAnomalyDetectorAsync(String fileName) {
       CompletableFuture<JsonNode> readFileFuture =
CompletableFuture.supplyAsync(() -> {
           try {
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               return new ObjectMapper().readTree(parser); // Return the root node
           } catch (IOException e) {
               throw new RuntimeException("Failed to read or parse the file", e);
           }
       });

       return readFileFuture.thenCompose(rootNode -> {
           String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
           String customMetricName =
rootNode.findValue("customMetricName").asText();

           SingleMetricAnomalyDetector singleMetricAnomalyDetector =
SingleMetricAnomalyDetector.builder()
               .metricName(customMetricName)
               .namespace(customMetricNamespace)
```

```
                .stat("Maximum")
                .build();

            DeleteAnomalyDetectorRequest request =
DeleteAnomalyDetectorRequest.builder()
                .singleMetricAnomalyDetector(singleMetricAnomalyDetector)
                .build();

            return getAsyncClient().deleteAnomalyDetector(request);
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Failed to delete the Anomaly Detector",
exception);
            } else {
                logger.info("Successfully deleted the Anomaly Detector.");
            }
        });
    }
```

- Para obtener más información sobre la API, consulta DeleteAnomalyDetectorla Referencia AWS SDK for Java 2.x de la API.

`DeleteDashboards`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDashboards`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes the specified dashboard.
     *
     * @param dashboardName the name of the dashboard to be deleted
     * @return a {@link CompletableFuture} representing the asynchronous operation
of deleting the dashboard
```

```
     * @throws RuntimeException if the dashboard deletion fails
     */
    public CompletableFuture<DeleteDashboardsResponse> deleteDashboardAsync(String
dashboardName) {
        DeleteDashboardsRequest dashboardsRequest =
DeleteDashboardsRequest.builder()
            .dashboardNames(dashboardName)
            .build();

        return getAsyncClient().deleteDashboards(dashboardsRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to delete the dashboard: " +
dashboardName, exception);
                } else {
                    logger.info("{} was successfully deleted.", dashboardName);
                }
            });
    }
```

- Para obtener más información sobre la API, consulta DeleteDashboardsla Referencia AWS SDK for Java 2.x de la API.

`DescribeAlarmHistory`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeAlarmHistory`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Retrieves the alarm history for a given alarm name and date range.
     *
     * @param fileName the path to the JSON file containing the alarm name
```

```
    * @param date     the date to start the alarm history search (in the format
"yyyy-MM-dd'T'HH:mm:ss'Z'")
    * @return a {@code CompletableFuture<Void>} that completes when the alarm
history has been retrieved and processed
    */
   public CompletableFuture<Void> getAlarmHistoryAsync(String fileName, String
date) {
       CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
           try {
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
               return rootNode.findValue("exampleAlarmName").asText(); // Return
alarmName from the JSON file
           } catch (IOException e) {
               throw new RuntimeException("Failed to read or parse the file", e);
           }
       });

       // Use the alarm name to describe alarm history with a paginator.
       return readFileFuture.thenCompose(alarmName -> {
           try {
               Instant start = Instant.parse(date);
               Instant endDate = Instant.now();
               DescribeAlarmHistoryRequest historyRequest =
DescribeAlarmHistoryRequest.builder()
                   .startDate(start)
                   .endDate(endDate)
                   .alarmName(alarmName)
                   .historyItemType(HistoryItemType.ACTION)
                   .build();

               // Use the paginator to paginate through alarm history pages.
               DescribeAlarmHistoryPublisher historyPublisher =
getAsyncClient().describeAlarmHistoryPaginator(historyRequest);
               CompletableFuture<Void> future = historyPublisher
                   .subscribe(response -> response.alarmHistoryItems().forEach(item
-> {
                       logger.info("History summary: {}", item.historySummary());
                       logger.info("Timestamp: {}", item.timestamp());
                   }))
                   .whenComplete((result, exception) -> {
```

```
                        if (exception != null) {
                            logger.error("Error occurred while getting alarm
history: " + exception.getMessage(), exception);
                        } else {
                            logger.info("Successfully retrieved all alarm
history.");
                        }
                    });

                // Return the future to the calling code for further handling
                return future;
            } catch (Exception e) {
                throw new RuntimeException("Failed to process alarm history", e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error completing alarm history
processing", exception);
            }
        });
    }
```

- Para obtener más información sobre la API, consulta DescribeAlarmHistorylla Referencia AWS SDK for Java 2.x de la API.

`DescribeAlarms`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeAlarms`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
```

```
    * Describes the CloudWatch alarms of the 'METRIC_ALARM' type.
    *
    * @return a {@link CompletableFuture} that represents the asynchronous
operation
    * of describing the CloudWatch alarms. The future completes when the
    * operation is finished, either successfully or with an error.
    */
   public CompletableFuture<Void> describeAlarmsAsync() {
       List<AlarmType> typeList = new ArrayList<>();
       typeList.add(AlarmType.METRIC_ALARM);
       DescribeAlarmsRequest alarmsRequest = DescribeAlarmsRequest.builder()
           .alarmTypes(typeList)
           .maxRecords(10)
           .build();

       return getAsyncClient().describeAlarms(alarmsRequest)
           .thenAccept(response -> {
               List<MetricAlarm> alarmList = response.metricAlarms();
               for (MetricAlarm alarm : alarmList) {
                   logger.info("Alarm name: {}", alarm.alarmName());
                   logger.info("Alarm description: {} ", alarm.alarmDescription());
               }
           })
           .whenComplete((response, ex) -> {
               if (ex != null) {
                   logger.info("Failed to describe alarms: {}", ex.getMessage());
               } else {
                   logger.info("Successfully described alarms.");
               }
           });
   }
```

- Para obtener más información sobre la API, consulta DescribeAlarmsla Referencia AWS SDK for Java 2.x de la API.

`DescribeAlarmsForMetric`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeAlarmsForMetric`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Checks for a metric alarm in AWS CloudWatch.
    *
    * @param fileName the name of the file containing the JSON configuration for
the custom metric
    * @return a {@link CompletableFuture} that completes when the check for the
metric alarm is complete
    */
   public CompletableFuture<Void> checkForMetricAlarmAsync(String fileName) {
       CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
           try {
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
               return rootNode.toString(); // Return JSON as a string for further
processing
           } catch (IOException e) {
               throw new RuntimeException("Failed to read file", e);
           }
       });

       return readFileFuture.thenCompose(jsonContent -> {
           try {
               com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(jsonContent);
               String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
               String customMetricName =
rootNode.findValue("customMetricName").asText();
```

```
                DescribeAlarmsForMetricRequest metricRequest =
DescribeAlarmsForMetricRequest.builder()
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .build();

                return checkForAlarmAsync(metricRequest, customMetricName, 10);

            } catch (IOException e) {
                throw new RuntimeException("Failed to parse JSON content", e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error checking metric alarm",
exception);
            }
        });
    }

    // Recursive method to check for the alarm.

    /**
     * Checks for the existence of an alarm asynchronously for the specified metric.
     *
     * @param metricRequest    the request to describe the alarms for the specified
metric
     * @param customMetricName the name of the custom metric to check for an alarm
     * @param retries          the number of retries to perform if no alarm is found
     * @return a {@link CompletableFuture} that completes when an alarm is found or
the maximum number of retries has been reached
     */
    private static CompletableFuture<Void>
checkForAlarmAsync(DescribeAlarmsForMetricRequest metricRequest, String
customMetricName, int retries) {
        if (retries == 0) {
            return CompletableFuture.completedFuture(null).thenRun(() ->
                logger.info("No Alarm state found for {} after 10 retries.",
customMetricName)
            );
        }

        return
(getAsyncClient().describeAlarmsForMetric(metricRequest).thenCompose(response -> {
            if (response.hasMetricAlarms()) {
```

```
                logger.info("Alarm state found for {}", customMetricName);
                return CompletableFuture.completedFuture(null); // Alarm found,
complete the future
            } else {
                return CompletableFuture.runAsync(() -> {
                    try {
                        Thread.sleep(20000);
                        logger.info(".");
                    } catch (InterruptedException e) {
                        throw new RuntimeException("Interrupted while waiting to
retry", e);
                    }
                }).thenCompose(v -> checkForAlarmAsync(metricRequest,
customMetricName, retries - 1)); // Recursive call
            }
        }));
    }
```

- Para obtener más información sobre la API, consulta DescribeAlarmsForMetricla Referencia AWS SDK for Java 2.x de la API.

`DescribeAnomalyDetectors`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeAnomalyDetectors`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Describes the anomaly detectors based on the specified JSON file.
     *
     * @param fileName the name of the JSON file containing the custom metric
namespace and name
```

```
    * @return a {@link CompletableFuture} that completes when the anomaly detectors
have been described
    * @throws RuntimeException if there is a failure during the operation, such as
when reading or parsing the JSON file,
    *                           or when describing the anomaly detectors
    */
   public CompletableFuture<Void> describeAnomalyDetectorsAsync(String fileName) {
       CompletableFuture<JsonNode> readFileFuture =
CompletableFuture.supplyAsync(() -> {
           try {
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               return new ObjectMapper().readTree(parser);
           } catch (IOException e) {
               throw new RuntimeException("Failed to read or parse the file", e);
           }
       });

       return readFileFuture.thenCompose(rootNode -> {
           try {
               String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
               String customMetricName =
rootNode.findValue("customMetricName").asText();

               DescribeAnomalyDetectorsRequest detectorsRequest =
DescribeAnomalyDetectorsRequest.builder()
                   .maxResults(10)
                   .metricName(customMetricName)
                   .namespace(customMetricNamespace)
                   .build();

               return
getAsyncClient().describeAnomalyDetectors(detectorsRequest).thenAccept(response ->
{
                   List<AnomalyDetector> anomalyDetectorList =
response.anomalyDetectors();
                   for (AnomalyDetector detector : anomalyDetectorList) {
                       logger.info("Metric name: {} ",
detector.singleMetricAnomalyDetector().metricName());
                       logger.info("State: {} ", detector.stateValue());
                   }
               });
           } catch (RuntimeException e) {
```

```
                throw new RuntimeException("Failed to describe anomaly detectors",
 e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error describing anomaly detectors",
 exception);
            }
        });
    }
```

- Para obtener más información sobre la API, consulta DescribeAnomalyDetectorsla Referencia AWS SDK for Java 2.x de la API.

`DisableAlarmActions`

En el siguiente ejemplo de código, se muestra cómo utilizar `DisableAlarmActions`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatch.model.DisableAlarmActionsRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DisableAlarmActions {
```

```
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <alarmName>

                Where:
                  alarmName - An alarm name to disable (for example, MyAlarm).
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String alarmName = args[0];
        Region region = Region.US_EAST_1;
        CloudWatchClient cw = CloudWatchClient.builder()
                .region(region)
                .build();

        disableActions(cw, alarmName);
        cw.close();
    }

    public static void disableActions(CloudWatchClient cw, String alarmName) {
        try {
            DisableAlarmActionsRequest request =
 DisableAlarmActionsRequest.builder()
                    .alarmNames(alarmName)
                    .build();

            cw.disableAlarmActions(request);
            System.out.printf("Successfully disabled actions on alarm %s",
 alarmName);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DisableAlarmActionsla Referencia AWS SDK for Java 2.x de la API.

`EnableAlarmActions`

En el siguiente ejemplo de código, se muestra cómo utilizar `EnableAlarmActions`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatch.model.EnableAlarmActionsRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class EnableAlarmActions {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <alarmName>

                Where:
                  alarmName - An alarm name to enable (for example, MyAlarm).
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
```

```
        }

        String alarm = args[0];
        Region region = Region.US_EAST_1;
        CloudWatchClient cw = CloudWatchClient.builder()
                .region(region)
                .build();

        enableActions(cw, alarm);
        cw.close();
    }

    public static void enableActions(CloudWatchClient cw, String alarm) {
        try {
            EnableAlarmActionsRequest request = EnableAlarmActionsRequest.builder()
                    .alarmNames(alarm)
                    .build();

            cw.enableAlarmActions(request);
            System.out.printf("Successfully enabled actions on alarm %s", alarm);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta EnableAlarmActionsla Referencia AWS SDK for Java 2.x de la API.

`GetMetricData`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetMetricData`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Retrieves custom metric data from the AWS CloudWatch service.
    *
    * @param fileName the name of the file containing the custom metric information
    * @return a {@link CompletableFuture} that completes when the metric data has
been retrieved
    */
   public CompletableFuture<Void> getCustomMetricDataAsync(String fileName) {
       CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
           try {
               // Read values from the JSON file.
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
               return rootNode.toString(); // Return JSON as a string for further
processing
           } catch (IOException e) {
               throw new RuntimeException("Failed to read file", e);
           }
       });

       return readFileFuture.thenCompose(jsonContent -> {
           try {
               // Parse the JSON string to extract relevant values.
               com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(jsonContent);
               String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
               String customMetricName =
rootNode.findValue("customMetricName").asText();
```

```
                // Set the current time and date range for metric query.
                Instant nowDate = Instant.now();
                long hours = 1;
                long minutes = 30;
                Instant endTime = nowDate.plus(hours,
ChronoUnit.HOURS).plus(minutes, ChronoUnit.MINUTES);

                Metric met = Metric.builder()
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .build();

                MetricStat metStat = MetricStat.builder()
                    .stat("Maximum")
                    .period(60)  // Assuming period in seconds
                    .metric(met)
                    .build();

                MetricDataQuery dataQuery = MetricDataQuery.builder()
                    .metricStat(metStat)
                    .id("foo2")
                    .returnData(true)
                    .build();

                List<MetricDataQuery> dq = new ArrayList<>();
                dq.add(dataQuery);

                GetMetricDataRequest getMetricDataRequest =
GetMetricDataRequest.builder()
                    .maxDatapoints(10)
                    .scanBy(ScanBy.TIMESTAMP_DESCENDING)
                    .startTime(nowDate)
                    .endTime(endTime)
                    .metricDataQueries(dq)
                    .build();

                // Call the async method for CloudWatch data retrieval.
                return getAsyncClient().getMetricData(getMetricDataRequest);

            } catch (IOException e) {
                throw new RuntimeException("Failed to parse JSON content", e);
            }
        }).thenAccept(response -> {
            List<MetricDataResult> data = response.metricDataResults();
```

```
            for (MetricDataResult item : data) {
                logger.info("The label is: {}", item.label());
                logger.info("The status code is: {}", item.statusCode().toString());
            }
        }).exceptionally(exception -> {
            throw new RuntimeException("Failed to get metric data", exception);
        });
    }
```

- Para obtener más información sobre la API, consulta GetMetricDatala Referencia AWS SDK for Java 2.x de la API.

`GetMetricStatistics`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetMetricStatistics`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Retrieves and displays metric statistics for the specified parameters.
     *
     * @param nameSpace    the namespace for the metric
     * @param metVal       the name of the metric
     * @param metricOption the statistic to retrieve for the metric (e.g.,
"Maximum", "Average")
     * @param date         the date for which to retrieve the metric statistics, in
the format "yyyy-MM-dd'T'HH:mm:ss'Z'"
     * @param myDimension  the dimension(s) to filter the metric statistics by
     * @return a {@link CompletableFuture} that completes when the metric statistics
have been retrieved and displayed
     */
    public CompletableFuture<GetMetricStatisticsResponse>
getAndDisplayMetricStatisticsAsync(String nameSpace, String metVal,
```

```
         String metricOption, String date, Dimension myDimension) {

       Instant start = Instant.parse(date);
       Instant endDate = Instant.now();

       // Building the request for metric statistics.
       GetMetricStatisticsRequest statisticsRequest =
GetMetricStatisticsRequest.builder()
           .endTime(endDate)
           .startTime(start)
           .dimensions(myDimension)
           .metricName(metVal)
           .namespace(nameSpace)
           .period(86400) // 1 day period
           .statistics(Statistic.fromValue(metricOption))
           .build();

       return getAsyncClient().getMetricStatistics(statisticsRequest)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   List<Datapoint> data = response.datapoints();
                   if (!data.isEmpty()) {
                       for (Datapoint datapoint : data) {
                           logger.info("Timestamp: {} Maximum value: {}",
datapoint.timestamp(), datapoint.maximum());
                       }
                   } else {
                       logger.info("The returned data list is empty");
                   }
               } else {
                   logger.info("Failed to get metric statistics: {} ",
exception.getMessage());
               }
           })
           .exceptionally(exception -> {
               throw new RuntimeException("Error while getting metric statistics: "
+ exception.getMessage(), exception);
           });
   }
```

- Para obtener más información sobre la API, consulta GetMetricStatisticsla Referencia AWS SDK for Java 2.x de la API.

`GetMetricWidgetImage`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetMetricWidgetImage`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Retrieves and saves a custom metric image to a file.
    *
    * @param fileName the name of the file to save the metric image to
    * @return a {@link CompletableFuture} that completes when the image has been
saved to the file
    */
   public CompletableFuture<Void> downloadAndSaveMetricImageAsync(String fileName)
{
       logger.info("Getting Image data for custom metric.");
       String myJSON = """
             {
                 "title": "Example Metric Graph",
                 "view": "timeSeries",
                 "stacked ": false,
                 "period": 10,
                 "width": 1400,
                 "height": 600,
                 "metrics": [
                     [
                     "AWS/Billing",
                     "EstimatedCharges",
                     "Currency",
                     "USD"
                    ]
                 ]
```

```
              }
            """;

        GetMetricWidgetImageRequest imageRequest =
GetMetricWidgetImageRequest.builder()
            .metricWidget(myJSON)
            .build();

        return getAsyncClient().getMetricWidgetImage(imageRequest)
            .thenCompose(response -> {
                SdkBytes sdkBytes = response.metricWidgetImage();
                byte[] bytes = sdkBytes.asByteArray();
                return CompletableFuture.runAsync(() -> {
                    try {
                        File outputFile = new File(fileName);
                        try (FileOutputStream outputStream = new
FileOutputStream(outputFile)) {
                            outputStream.write(bytes);
                        }
                    } catch (IOException e) {
                        throw new RuntimeException("Failed to write image to file",
e);
                    }
                });
            })
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Error getting and saving metric
image", exception);
                } else {
                    logger.info("Image data saved successfully to {}", fileName);
                }
            });
    }
```

- Para obtener más información sobre la API, consulta GetMetricWidgetImagela Referencia AWS SDK for Java 2.x de la API.

`ListDashboards`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListDashboards`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Lists the available dashboards.
    *
    * @return a {@link CompletableFuture} that completes when the operation is
finished.
    * The future will complete exceptionally if an error occurs while listing the
dashboards.
    */
   public CompletableFuture<Void> listDashboardsAsync() {
       ListDashboardsRequest listDashboardsRequest =
ListDashboardsRequest.builder().build();
       ListDashboardsPublisher paginator =
getAsyncClient().listDashboardsPaginator(listDashboardsRequest);
       return paginator.subscribe(response -> {
           response.dashboardEntries().forEach(entry -> {
               logger.info("Dashboard name is: {} ", entry.dashboardName());
               logger.info("Dashboard ARN is: {} ", entry.dashboardArn());
           });
       }).exceptionally(ex -> {
           logger.info("Failed to list dashboards: {} ", ex.getMessage());
           throw new RuntimeException("Error occurred while listing dashboards",
ex);
       });
   }
```

- Para obtener más información sobre la API, consulta ListDashboardsla Referencia AWS SDK for Java 2.x de la API.

`ListMetrics`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListMetrics`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Retrieves a list of metric names for the specified namespace.
    *
    * @param namespace the namespace for which to retrieve the metric names
    * @return a {@link CompletableFuture} that, when completed, contains an {@link
ArrayList} of
    * the metric names in the specified namespace
    * @throws RuntimeException if an error occurs while listing the metrics
    */
   public CompletableFuture<ArrayList<String>> listMetsAsync(String namespace) {
       ListMetricsRequest request = ListMetricsRequest.builder()
           .namespace(namespace)
           .build();

       ListMetricsPublisher metricsPaginator =
getAsyncClient().listMetricsPaginator(request);
       Set<String> metSet = new HashSet<>();
       CompletableFuture<Void> future = metricsPaginator.subscribe(response -> {
           response.metrics().forEach(metric -> {
               String metricName = metric.metricName();
               metSet.add(metricName);
           });
       });

       return future
           .thenApply(ignored -> new ArrayList<>(metSet))
           .exceptionally(exception -> {
               throw new RuntimeException("Failed to list metrics: " +
exception.getMessage(), exception);
           });
   }
```

- Para obtener más información sobre la API, consulta ListMetricsla Referencia AWS SDK for Java 2.x de la API.

`PutAnomalyDetector`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutAnomalyDetector`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Adds an anomaly detector for the given file.
    *
    * @param fileName the name of the file containing the anomaly detector
configuration
    * @return a {@link CompletableFuture} that completes when the anomaly detector
has been added
    */
   public CompletableFuture<Void> addAnomalyDetectorAsync(String fileName) {
       CompletableFuture<JsonNode> readFileFuture =
CompletableFuture.supplyAsync(() -> {
           try {
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               return new ObjectMapper().readTree(parser); // Return the root node
           } catch (IOException e) {
               throw new RuntimeException("Failed to read or parse the file", e);
           }
       });

       return readFileFuture.thenCompose(rootNode -> {
           try {
               String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
               String customMetricName =
rootNode.findValue("customMetricName").asText();
```

```
                SingleMetricAnomalyDetector singleMetricAnomalyDetector =
SingleMetricAnomalyDetector.builder()
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .stat("Maximum")
                    .build();

                PutAnomalyDetectorRequest anomalyDetectorRequest =
PutAnomalyDetectorRequest.builder()
                    .singleMetricAnomalyDetector(singleMetricAnomalyDetector)
                    .build();

                return
getAsyncClient().putAnomalyDetector(anomalyDetectorRequest).thenAccept(response ->
{
                    logger.info("Added anomaly detector for metric {}",
customMetricName);
                });
            } catch (Exception e) {
                throw new RuntimeException("Failed to create anomaly detector", e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error adding anomaly detector",
exception);
            }
        });
    }
```

- Para obtener más información sobre la API, consulta PutAnomalyDetectorla Referencia AWS SDK for Java 2.x de la API.

`PutDashboard`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutDashboard`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates a new dashboard with the specified name and metrics from the given
file.
    *
    * @param dashboardName the name of the dashboard to be created
    * @param fileName      the name of the file containing the dashboard body
    * @return a {@link CompletableFuture} representing the asynchronous operation
of creating the dashboard
    * @throws IOException if there is an error reading the dashboard body from the
file
    */
   public CompletableFuture<PutDashboardResponse>
createDashboardWithMetricsAsync(String dashboardName, String fileName) throws
IOException {
       String dashboardBody = readFileAsString(fileName);
       PutDashboardRequest dashboardRequest = PutDashboardRequest.builder()
           .dashboardName(dashboardName)
           .dashboardBody(dashboardBody)
           .build();

       return getAsyncClient().putDashboard(dashboardRequest)
           .handle((response, ex) -> {
               if (ex != null) {
                   logger.info("Failed to create dashboard: {}", ex.getMessage());
                   throw new RuntimeException("Dashboard creation failed", ex);
               } else {
                   // Handle the normal response case
                   logger.info("{} was successfully created.", dashboardName);
                   List<DashboardValidationMessage> messages =
response.dashboardValidationMessages();
                   if (messages.isEmpty()) {
                       logger.info("There are no messages in the new Dashboard.");
                   } else {
```

```
                    for (DashboardValidationMessage message : messages) {
                        logger.info("Message: {}", message.message());
                    }
                }
                return response; // Return the response for further use
            }
        });
    }
```

- Para obtener más información sobre la API, consulta PutDashboardla Referencia AWS SDK for Java 2.x de la API.

`PutMetricAlarm`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutMetricAlarm`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates an alarm based on the configuration provided in a JSON file.
     *
     * @param fileName the name of the JSON file containing the alarm configuration
     * @return a CompletableFuture that represents the asynchronous operation of
creating the alarm
     * @throws RuntimeException if an exception occurs while reading the JSON file
or creating the alarm
     */
    public CompletableFuture<String> createAlarmAsync(String fileName) {
        com.fasterxml.jackson.databind.JsonNode rootNode;
        try {
            JsonParser parser = new JsonFactory().createParser(new File(fileName));
            rootNode = new ObjectMapper().readTree(parser);
        } catch (IOException e) {
```

```
            throw new RuntimeException("Failed to read the alarm configuration
file", e);
        }

        // Extract values from the JSON node.
        String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
        String customMetricName = rootNode.findValue("customMetricName").asText();
        String alarmName = rootNode.findValue("exampleAlarmName").asText();
        String emailTopic = rootNode.findValue("emailTopic").asText();
        String accountId = rootNode.findValue("accountId").asText();
        String region = rootNode.findValue("region").asText();

        // Create a List for alarm actions.
        List<String> alarmActions = new ArrayList<>();
        alarmActions.add("arn:aws:sns:" + region + ":" + accountId + ":" +
emailTopic);

        PutMetricAlarmRequest alarmRequest = PutMetricAlarmRequest.builder()
            .alarmActions(alarmActions)
            .alarmDescription("Example metric alarm")
            .alarmName(alarmName)

.comparisonOperator(ComparisonOperator.GREATER_THAN_OR_EQUAL_TO_THRESHOLD)
            .threshold(100.00)
            .metricName(customMetricName)
            .namespace(customMetricNamespace)
            .evaluationPeriods(1)
            .period(10)
            .statistic("Maximum")
            .datapointsToAlarm(1)
            .treatMissingData("ignore")
            .build();

        // Call the putMetricAlarm asynchronously and handle the result.
        return getAsyncClient().putMetricAlarm(alarmRequest)
            .handle((response, ex) -> {
                if (ex != null) {
                    logger.info("Failed to create alarm: {}", ex.getMessage());
                    throw new RuntimeException("Failed to create alarm", ex);
                } else {
                    logger.info("{} was successfully created!", alarmName);
                    return alarmName;
                }
```

```
            });
    }
```

- Para obtener más información sobre la API, consulta PutMetricAlarmla Referencia AWS SDK for Java 2.x de la API.

`PutMetricData`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutMetricData`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Adds metric data for an alarm asynchronously.
     *
     * @param fileName the name of the JSON file containing the metric data
     * @return a CompletableFuture that asynchronously returns the
PutMetricDataResponse
     */
    public CompletableFuture<PutMetricDataResponse>
addMetricDataForAlarmAsync(String fileName) {
        CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
                return rootNode.toString(); // Return JSON as a string for further
processing
            } catch (IOException e) {
                throw new RuntimeException("Failed to read file", e);
            }
```

```
        });

        return readFileFuture.thenCompose(jsonContent -> {
            try {
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(jsonContent);
                String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
                String customMetricName =
rootNode.findValue("customMetricName").asText();
                Instant instant = Instant.now();

                // Create MetricDatum objects.
                MetricDatum datum1 = MetricDatum.builder()
                    .metricName(customMetricName)
                    .unit(StandardUnit.NONE)
                    .value(1001.00)
                    .timestamp(instant)
                    .build();

                MetricDatum datum2 = MetricDatum.builder()
                    .metricName(customMetricName)
                    .unit(StandardUnit.NONE)
                    .value(1002.00)
                    .timestamp(instant)
                    .build();

                List<MetricDatum> metricDataList = new ArrayList<>();
                metricDataList.add(datum1);
                metricDataList.add(datum2);

                // Build the PutMetricData request.
                PutMetricDataRequest request = PutMetricDataRequest.builder()
                    .namespace(customMetricNamespace)
                    .metricData(metricDataList)
                    .build();

                // Send the request asynchronously.
                return getAsyncClient().putMetricData(request);

            } catch (IOException e) {
                CompletableFuture<PutMetricDataResponse> failedFuture = new
CompletableFuture<>();
```

```
                failedFuture.completeExceptionally(new RuntimeException("Failed to
parse JSON content", e));
                return failedFuture;
            }
        }).whenComplete((response, exception) -> {
            if (exception != null) {
                logger.error("Failed to put metric data: " + exception.getMessage(),
exception);
            } else {
                logger.info("Added metric values for metric.");
            }
        });
    }
```

- Para obtener más información sobre la API, consulta PutMetricDatala Referencia AWS SDK for Java 2.x de la API.

Escenarios

Supervisión del rendimiento de DynamoDB

En el siguiente ejemplo se muestra cómo configurar el uso de DynamoDB en una aplicación para supervisar el rendimiento.

SDK para Java 2.x

En este ejemplo se muestra cómo configurar una aplicación Java para supervisar el rendimiento de DynamoDB. La aplicación envía los datos de las métricas a los CloudWatch que puedes supervisar el rendimiento.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- CloudWatch
- DynamoDB

CloudWatch Ejemplos de eventos con SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso de AWS SDK for Java 2.x with CloudWatch Events.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`PutEvents`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutEvents`.

SDK para Java 2.x

> **Note**
>
> Hay más información sobre GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient;
import software.amazon.awssdk.services.cloudwatchevents.model.PutEventsRequest;
import software.amazon.awssdk.services.cloudwatchevents.model.PutEventsRequestEntry;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PutEvents {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                   <resourceArn>

                Where:
                   resourceArn - An Amazon Resource Name (ARN) related to the
 events.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String resourceArn = args[0];
        CloudWatchEventsClient cwe = CloudWatchEventsClient.builder()
                .build();

        putCWEvents(cwe, resourceArn);
        cwe.close();
    }

    public static void putCWEvents(CloudWatchEventsClient cwe, String resourceArn) {
        try {
            final String EVENT_DETAILS = "{ \"key1\": \"value1\", \"key2\":
 \"value2\" }";

            PutEventsRequestEntry requestEntry = PutEventsRequestEntry.builder()
                    .detail(EVENT_DETAILS)
                    .detailType("sampleSubmitted")
                    .resources(resourceArn)
                    .source("aws-sdk-java-cloudwatch-example")
                    .build();

            PutEventsRequest request = PutEventsRequest.builder()
                    .entries(requestEntry)
                    .build();

            cwe.putEvents(request);
```

```
            System.out.println("Successfully put CloudWatch event");

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta PutEventsla Referencia AWS SDK for Java 2.x de la API.

`PutRule`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutRule`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient;
import software.amazon.awssdk.services.cloudwatchevents.model.PutRuleRequest;
import software.amazon.awssdk.services.cloudwatchevents.model.PutRuleResponse;
import software.amazon.awssdk.services.cloudwatchevents.model.RuleState;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PutRule {
    public static void main(String[] args) {
```

```
        final String usage = """

                Usage:
                  <ruleName> roleArn>\s

                Where:
                  ruleName - A rule name (for example, myrule).
                  roleArn - A role ARN value (for example,
arn:aws:iam::xxxxxx047983:user/MyUser).
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String ruleName = args[0];
        String roleArn = args[1];
        CloudWatchEventsClient cwe = CloudWatchEventsClient.builder()
                .build();

        putCWRule(cwe, ruleName, roleArn);
        cwe.close();
    }

    public static void putCWRule(CloudWatchEventsClient cwe, String ruleName, String
roleArn) {
        try {
            PutRuleRequest request = PutRuleRequest.builder()
                    .name(ruleName)
                    .roleArn(roleArn)
                    .scheduleExpression("rate(5 minutes)")
                    .state(RuleState.ENABLED)
                    .build();

            PutRuleResponse response = cwe.putRule(request);
            System.out.printf(
                    "Successfully created CloudWatch events rule %s with arn %s",
                    roleArn, response.ruleArn());

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }
}
```

- Para obtener más información sobre la API, consulta PutRulela Referencia AWS SDK for Java 2.x de la API.

`PutTargets`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutTargets`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient;
import software.amazon.awssdk.services.cloudwatchevents.model.PutTargetsRequest;
import software.amazon.awssdk.services.cloudwatchevents.model.Target;

/**
 * To run this Java V2 code example, ensure that you have setup your development
 * environment, including your credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PutTargets {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <ruleName> <functionArn> <targetId>\s

                Where:
                  ruleName - A rule name (for example, myrule).
```

```
                  functionArn - An AWS Lambda function ARN (for example,
 arn:aws:lambda:us-west-2:xxxxxx047983:function:lamda1).
                  targetId - A target id value.
                """";

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String ruleName = args[0];
        String functionArn = args[1];
        String targetId = args[2];
        CloudWatchEventsClient cwe = CloudWatchEventsClient.builder()
                .build();

        putCWTargets(cwe, ruleName, functionArn, targetId);
        cwe.close();
    }

    public static void putCWTargets(CloudWatchEventsClient cwe, String ruleName,
 String functionArn, String targetId) {
        try {
            Target target = Target.builder()
                    .arn(functionArn)
                    .id(targetId)
                    .build();

            PutTargetsRequest request = PutTargetsRequest.builder()
                    .targets(target)
                    .rule(ruleName)
                    .build();

            cwe.putTargets(request);
            System.out.printf(
                    "Successfully created CloudWatch events target for rule %s",
                    ruleName);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta PutTargetsla Referencia AWS SDK for Java 2.x de la API.

CloudWatch Ejemplos de registros mediante SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso AWS SDK for Java 2.x de CloudWatch registros.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`DeleteSubscriptionFilter`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteSubscriptionFilter`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
```

```
import software.amazon.awssdk.services.cloudwatchlogs.CloudWatchLogsClient;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.DeleteSubscriptionFilterRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteSubscriptionFilter {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <filter> <logGroup>

                Where:
                  filter - The name of the subscription filter (for example,
 MyFilter).
                  logGroup - The name of the log group. (for example, testgroup).
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String filter = args[0];
        String logGroup = args[1];
        CloudWatchLogsClient logs = CloudWatchLogsClient.builder()
                .build();

        deleteSubFilter(logs, filter, logGroup);
        logs.close();
    }

    public static void deleteSubFilter(CloudWatchLogsClient logs, String filter,
 String logGroup) {
        try {
            DeleteSubscriptionFilterRequest request =
 DeleteSubscriptionFilterRequest.builder()
```

```
                    .filterName(filter)
                    .logGroupName(logGroup)
                    .build();

            logs.deleteSubscriptionFilter(request);
            System.out.printf("Successfully deleted CloudWatch logs subscription
 filter %s", filter);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteSubscriptionFilterla Referencia AWS SDK for Java 2.x de la API.

`DescribeLogStreams`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeLogStreams`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Busca flujos de registro dentro de un grupo de registros específico que coincidan con un prefijo determinado.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class CloudWatchLogsSearch {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <logGroupName> <logStreamName>

                Where:
                  logGroupName - The name of the log group (for example,
 WeathertopJavaContainerLogs).
                  logStreamName - The name of the log stream (for example,
 weathertop-java-stream).
                  pattern - the pattern to use (for example, INFO)

                """;

        if (args.length != 3) {
            System.out.print(usage);
            System.exit(1);
        }

        String logGroupName = args[0] ;
        String logStreamName = args[1] ;
        String pattern = args[2] ;

        CloudWatchLogsClient cwlClient = CloudWatchLogsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        searchLogStreamsAndFilterEvents(cwlClient, logGroupName, logStreamName,
 pattern);
    }

    /**
     * Searches for log streams with a specific prefix within a log group and
 filters log events based on a specified pattern.
     *
     * @param cwlClient       the CloudWatchLogsClient used to interact with AWS
 CloudWatch Logs
     * @param logGroupName    the name of the log group to search within
     * @param logStreamPrefix the prefix of the log streams to search for
     * @param pattern         the pattern to filter log events by
```

```
     */
    public static void searchLogStreamsAndFilterEvents(CloudWatchLogsClient
 cwlClient, String logGroupName, String logStreamPrefix, String pattern) {
        DescribeLogStreamsRequest describeLogStreamsRequest =
 DescribeLogStreamsRequest.builder()
                .logGroupName(logGroupName)
                .logStreamNamePrefix(logStreamPrefix)
                .build();

        DescribeLogStreamsResponse describeLogStreamsResponse =
 cwlClient.describeLogStreams(describeLogStreamsRequest);
        List<LogStream> logStreams = describeLogStreamsResponse.logStreams();

        for (LogStream logStream : logStreams) {
            String logStreamName = logStream.logStreamName();
            System.out.println("Searching in log stream: " + logStreamName);

            FilterLogEventsRequest filterLogEventsRequest =
 FilterLogEventsRequest.builder()
                    .logGroupName(logGroupName)
                    .logStreamNames(logStreamName)
                    .filterPattern(pattern)
                    .build();

            FilterLogEventsResponse filterLogEventsResponse =
 cwlClient.filterLogEvents(filterLogEventsRequest);

            for (FilteredLogEvent event : filterLogEventsResponse.events()) {
                System.out.println(event.message());
            }


 System.out.println("--------------------------------------------------"); //
 Separator for better readability
        }
    }
}
```

Imprime los metadatos sobre el flujo de registro más reciente de un grupo de registros especificado.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CloudWatchLogQuery {
    public static void main(final String[] args) {
        final String usage = """
                Usage:
                  <logGroupName>

                Where:
                  logGroupName - The name of the log group (for example, /aws/
lambda/ChatAIHandler).
                """;

        if (args.length != 1) {
            System.out.print(usage);
            System.exit(1);
        }

        String logGroupName = "/aws/lambda/ChatAIHandler" ; //args[0];
        CloudWatchLogsClient logsClient = CloudWatchLogsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        describeMostRecentLogStream(logsClient, logGroupName);
    }

    /**
     * Describes and prints metadata about the most recent log stream in the
 specified log group.
     *
     * @param logsClient   the CloudWatchLogsClient used to interact with AWS
 CloudWatch Logs
     * @param logGroupName the name of the log group
     */
    public static void describeMostRecentLogStream(CloudWatchLogsClient logsClient,
 String logGroupName) {
        DescribeLogStreamsRequest streamsRequest =
 DescribeLogStreamsRequest.builder()
```

```
                .logGroupName(logGroupName)
                .orderBy(OrderBy.LAST_EVENT_TIME)
                .descending(true)
                .limit(1)
                .build();

        try {
            DescribeLogStreamsResponse streamsResponse =
 logsClient.describeLogStreams(streamsRequest);
            List<LogStream> logStreams = streamsResponse.logStreams();

            if (logStreams.isEmpty()) {
                System.out.println("No log streams found for log group: " +
 logGroupName);
                return;
            }

            LogStream stream = logStreams.get(0);
            System.out.println("Most Recent Log Stream:");
            System.out.println("  Name: " + stream.logStreamName());
            System.out.println("  ARN: " + stream.arn());
            System.out.println("  Creation Time: " + stream.creationTime());
            System.out.println("  First Event Time: " +
 stream.firstEventTimestamp());
            System.out.println("  Last Event Time: " + stream.lastEventTimestamp());
            System.out.println("  Stored Bytes: " + stream.storedBytes());
            System.out.println("  Upload Sequence Token: " +
 stream.uploadSequenceToken());

        } catch (CloudWatchLogsException e) {
            System.err.println("Failed to describe log stream: " +
 e.awsErrorDetails().errorMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta DescribeLogStreamsla Referencia AWS SDK for Java 2.x de la API.

`DescribeSubscriptionFilters`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeSubscriptionFilters`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchlogs.CloudWatchLogsClient;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.DescribeSubscriptionFiltersRequest;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.DescribeSubscriptionFiltersResponse;
import software.amazon.awssdk.services.cloudwatchlogs.model.SubscriptionFilter;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeSubscriptionFilters {
    public static void main(String[] args) {

        final String usage = """

                Usage:
                  <logGroup>

                Where:
                  logGroup - A log group name (for example, myloggroup).
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }
```

```
        String logGroup = args[0];
        CloudWatchLogsClient logs = CloudWatchLogsClient.builder()
                .credentialsProvider(ProfileCredentialsProvider.create())
                .build();

        describeFilters(logs, logGroup);
        logs.close();
    }

    public static void describeFilters(CloudWatchLogsClient logs, String logGroup) {
        try {
            boolean done = false;
            String newToken = null;

            while (!done) {
                DescribeSubscriptionFiltersResponse response;
                if (newToken == null) {
                    DescribeSubscriptionFiltersRequest request =
DescribeSubscriptionFiltersRequest.builder()
                            .logGroupName(logGroup)
                            .limit(1).build();

                    response = logs.describeSubscriptionFilters(request);
                } else {
                    DescribeSubscriptionFiltersRequest request =
DescribeSubscriptionFiltersRequest.builder()
                            .nextToken(newToken)
                            .logGroupName(logGroup)
                            .limit(1).build();
                    response = logs.describeSubscriptionFilters(request);
                }

                for (SubscriptionFilter filter : response.subscriptionFilters()) {
                    System.out.printf("Retrieved filter with name %s, " + "pattern
%s " + "and destination arn %s",
                            filter.filterName(),
                            filter.filterPattern(),
                            filter.destinationArn());
                }

                if (response.nextToken() == null) {
                    done = true;
                } else {
                    newToken = response.nextToken();
```

```
                }
            }

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.printf("Done");
    }
}
```

- Para obtener más información sobre la API, consulta DescribeSubscriptionFiltersla Referencia AWS SDK for Java 2.x de la API.

`GetLogEvents`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetLogEvents`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchlogs.CloudWatchLogsClient;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.DescribeLogStreamsRequest;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.DescribeLogStreamsResponse;
import software.amazon.awssdk.services.cloudwatchlogs.model.GetLogEventsRequest;
import software.amazon.awssdk.services.cloudwatchlogs.model.GetLogEventsResponse;

import java.time.Instant;
import java.time.temporal.ChronoUnit;

/**
```

```
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetLogEvents {

    public static void main(String[] args) {

        final String usage = """

                Usage:
                  <logGroupName> <logStreamName>

                Where:
                  logGroupName - The name of the log group (for example,
 myloggroup).
                  logStreamName - The name of the log stream (for example,
 mystream).

                """;

       // if (args.length != 2) {
       //     System.out.print(usage);
       //     System.exit(1);
//        }

        String logGroupName = "WeathertopJavaContainerLogs" ; //args[0];
        String logStreamName = "weathertop-java-stream" ; //args[1];

        Region region = Region.US_EAST_1 ;
        CloudWatchLogsClient cloudWatchLogsClient = CloudWatchLogsClient.builder()
                .region(region)
                .build();

        getCWLogEvents(cloudWatchLogsClient, logGroupName, logStreamName);
        cloudWatchLogsClient.close();
    }

    public static void getCWLogEvents(CloudWatchLogsClient cloudWatchLogsClient,
                                      String logGroupName,
                                      String logStreamPrefix) {
```

```
        try {
            // First, find the exact log stream name
            DescribeLogStreamsRequest describeRequest =
DescribeLogStreamsRequest.builder()
                    .logGroupName(logGroupName)
                    .logStreamNamePrefix(logStreamPrefix)
                    .limit(1) // get the first matching stream
                    .build();

            DescribeLogStreamsResponse describeResponse =
cloudWatchLogsClient.describeLogStreams(describeRequest);

            if (describeResponse.logStreams().isEmpty()) {
                System.out.println("No matching log streams found for prefix: " +
logStreamPrefix);
                return;
            }

            String exactLogStreamName =
describeResponse.logStreams().get(0).logStreamName();
            System.out.println("Using exact log stream: " + exactLogStreamName);

            long startTime = Instant.now().minus(7, ChronoUnit.DAYS).toEpochMilli();
            long endTime = Instant.now().toEpochMilli();

            GetLogEventsRequest getLogEventsRequest = GetLogEventsRequest.builder()
                    .logGroupName(logGroupName)
                    .logStreamName(exactLogStreamName) // <-- exact name, not prefix
                    .startTime(startTime)
                    .endTime(endTime)
                    .startFromHead(true)
                    .build();

            GetLogEventsResponse response =
cloudWatchLogsClient.getLogEvents(getLogEventsRequest);

            if (response.events().isEmpty()) {
                System.out.println("No log events found in the past 7 days.");
            } else {
                response.events().forEach(e -> System.out.println(e.message()));
            }

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta GetLogEventsla Referencia AWS SDK for Java 2.x de la API.

`PutSubscriptionFilter`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutSubscriptionFilter`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatchlogs.CloudWatchLogsClient;
import software.amazon.awssdk.services.cloudwatchlogs.model.CloudWatchLogsException;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.PutSubscriptionFilterRequest;

/**
 * Before running this code example, you need to grant permission to CloudWatch
 * Logs the right to execute your Lambda function.
 * To perform this task, you can use this CLI command:
 *
 * aws lambda add-permission --function-name "lamda1" --statement-id "lamda1"
 * --principal "logs.us-west-2.amazonaws.com" --action "lambda:InvokeFunction"
 * --source-arn "arn:aws:logs:us-west-2:111111111111:log-group:testgroup:*"
 * --source-account "111111111111"
 *
 * Make sure you replace the function name with your function name and replace
 * '111111111111' with your account details.
 * For more information, see "Subscription Filters with AWS Lambda" in the
 * Amazon CloudWatch Logs Guide.
```

```
 *
 *
 * Also, before running this Java V2 code example,set up your development
 * environment,including your credentials.
 *
 * For more information,see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 */

public class PutSubscriptionFilter {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <filter> <pattern> <logGroup> <functionArn>\s

                Where:
                  filter - A filter name (for example, myfilter).
                  pattern - A filter pattern (for example, ERROR).
                  logGroup - A log group name (testgroup).
                  functionArn - An AWS Lambda function ARN (for example,
 arn:aws:lambda:us-west-2:111111111111:function:lambda1) .
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String filter = args[0];
        String pattern = args[1];
        String logGroup = args[2];
        String functionArn = args[3];
        Region region = Region.US_WEST_2;
        CloudWatchLogsClient cwl = CloudWatchLogsClient.builder()
                .region(region)
                .build();

        putSubFilters(cwl, filter, pattern, logGroup, functionArn);
        cwl.close();
    }
```

```
    public static void putSubFilters(CloudWatchLogsClient cwl,
            String filter,
            String pattern,
            String logGroup,
            String functionArn) {

        try {
            PutSubscriptionFilterRequest request =
 PutSubscriptionFilterRequest.builder()
                    .filterName(filter)
                    .filterPattern(pattern)
                    .logGroupName(logGroup)
                    .destinationArn(functionArn)
                    .build();

            cwl.putSubscriptionFilter(request);
            System.out.printf(
                    "Successfully created CloudWatch logs subscription filter %s",
                    filter);

        } catch (CloudWatchLogsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta PutSubscriptionFilterla Referencia AWS SDK for Java 2.x de la API.

`StartLiveTail`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartLiveTail`.

SDK para Java 2.x

Incluir los archivos requeridos.

```
import io.reactivex.FlowableSubscriber;
import io.reactivex.annotations.NonNull;
import org.reactivestreams.Subscription;
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
```

```
import software.amazon.awssdk.services.cloudwatchlogs.CloudWatchLogsAsyncClient;
import software.amazon.awssdk.services.cloudwatchlogs.model.LiveTailSessionLogEvent;
import software.amazon.awssdk.services.cloudwatchlogs.model.LiveTailSessionStart;
import software.amazon.awssdk.services.cloudwatchlogs.model.LiveTailSessionUpdate;
import software.amazon.awssdk.services.cloudwatchlogs.model.StartLiveTailRequest;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.StartLiveTailResponseHandler;
import software.amazon.awssdk.services.cloudwatchlogs.model.CloudWatchLogsException;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.StartLiveTailResponseStream;

import java.util.Date;
import java.util.List;
import java.util.concurrent.atomic.AtomicReference;
```

Gestione los eventos de la sesión de Live Tail.

```
   private static StartLiveTailResponseHandler
 getStartLiveTailResponseStreamHandler(
           AtomicReference<Subscription> subscriptionAtomicReference) {
       return StartLiveTailResponseHandler.builder()
           .onResponse(r -> System.out.println("Received initial response"))
           .onError(throwable -> {
               CloudWatchLogsException e = (CloudWatchLogsException)
 throwable.getCause();
               System.err.println(e.awsErrorDetails().errorMessage());
               System.exit(1);
           })
           .subscriber(() -> new FlowableSubscriber<>() {
               @Override
               public void onSubscribe(@NonNull Subscription s) {
                   subscriptionAtomicReference.set(s);
                   s.request(Long.MAX_VALUE);
               }

               @Override
               public void onNext(StartLiveTailResponseStream event) {
                   if (event instanceof LiveTailSessionStart) {
                       LiveTailSessionStart sessionStart = (LiveTailSessionStart)
 event;
                       System.out.println(sessionStart);
                   } else if (event instanceof LiveTailSessionUpdate) {
```

```
                        LiveTailSessionUpdate sessionUpdate =
(LiveTailSessionUpdate) event;
                        List<LiveTailSessionLogEvent> logEvents =
sessionUpdate.sessionResults();
                        logEvents.forEach(e -> {
                            long timestamp = e.timestamp();
                            Date date = new Date(timestamp);
                            System.out.println("[" + date + "] " + e.message());
                        });
                    } else {
                        throw CloudWatchLogsException.builder().message("Unknown
event type").build();
                    }
                }

                @Override
                public void onError(Throwable throwable) {
                    System.out.println(throwable.getMessage());
                    System.exit(1);
                }

                @Override
                public void onComplete() {
                    System.out.println("Completed Streaming Session");
                }
            })
            .build();
    }
```

Inicie la sesión de Live Tail.

```
        CloudWatchLogsAsyncClient cloudWatchLogsAsyncClient =
                CloudWatchLogsAsyncClient.builder()
                    .credentialsProvider(ProfileCredentialsProvider.create())
                    .build();

        StartLiveTailRequest request =
                StartLiveTailRequest.builder()
                    .logGroupIdentifiers(logGroupIdentifiers)
                    .logStreamNames(logStreamNames)
                    .logEventFilterPattern(logEventFilterPattern)
                    .build();
```

```
        /* Create a reference to store the subscription */
        final AtomicReference<Subscription> subscriptionAtomicReference = new
AtomicReference<>(null);

        cloudWatchLogsAsyncClient.startLiveTail(request,
getStartLiveTailResponseStreamHandler(subscriptionAtomicReference));
```

Detenga la sesión de Live Tail una vez transcurrido un periodo de tiempo.

```
        /* Set a timeout for the session and cancel the subscription. This will:
         * 1). Close the stream
         * 2). Stop the Live Tail session
         */
        try {
            Thread.sleep(10000);
        } catch (InterruptedException e) {
            throw new RuntimeException(e);
        }
        if (subscriptionAtomicReference.get() != null) {
            subscriptionAtomicReference.get().cancel();
            System.out.println("Subscription to stream closed");
        }
```

- Para obtener más información sobre la API, consulte StartLiveTaillla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Uso de eventos programados para invocar una función de Lambda

El siguiente ejemplo de código muestra cómo crear una AWS Lambda función invocada por un evento EventBridge programado de Amazon.

SDK para Java 2.x

Muestra cómo crear un evento EventBridge programado de Amazon que invoque una AWS Lambda función. Configure EventBridge para usar una expresión cron para programar cuándo se invoca la función Lambda. En este ejemplo, creará una función de Lambda utilizando la API de

tiempo de ejecución de Java de Lambda. En este ejemplo, se invocan diferentes AWS servicios para realizar un caso de uso específico. Este ejemplo indica cómo crear una aplicación que envíe un mensaje de texto a sus empleados para felicitarles por su primer aniversario.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- CloudWatch Registros
- DynamoDB
- EventBridge
- Lambda
- Amazon SNS

Ejemplos de identidad de Amazon Cognito usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes mediante Amazon Cognito Identity. AWS SDK for Java 2.x

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`CreateIdentityPool`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateIdentityPool`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cognitoidentity.CognitoIdentityClient;
import
 software.amazon.awssdk.services.cognitoidentity.model.CreateIdentityPoolRequest;
import
 software.amazon.awssdk.services.cognitoidentity.model.CreateIdentityPoolResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateIdentityPool {
    public static void main(String[] args) {
        final String usage = """
                Usage:
                    <identityPoolName>\s

                Where:
                    identityPoolName - The name to give your identity pool.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String identityPoolName = args[0];
        CognitoIdentityClient cognitoClient = CognitoIdentityClient.builder()
```

```
                .region(Region.US_EAST_1)
                .build();

        String identityPoolId = createIdPool(cognitoClient, identityPoolName);
        System.out.println("Unity pool ID " + identityPoolId);
        cognitoClient.close();
    }

    public static String createIdPool(CognitoIdentityClient cognitoClient, String
 identityPoolName) {
        try {
            CreateIdentityPoolRequest poolRequest =
 CreateIdentityPoolRequest.builder()
                    .allowUnauthenticatedIdentities(false)
                    .identityPoolName(identityPoolName)
                    .build();

            CreateIdentityPoolResponse response =
 cognitoClient.createIdentityPool(poolRequest);
            return response.identityPoolId();

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulta CreateIdentityPoolla Referencia AWS SDK for Java 2.x de la API.

`DeleteIdentityPool`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteIdentityPool`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.awscore.exception.AwsServiceException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cognitoidentity.CognitoIdentityClient;
import
 software.amazon.awssdk.services.cognitoidentity.model.DeleteIdentityPoolRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteIdentityPool {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <identityPoolId>\s

                Where:
                    identityPoolId - The Id value of your identity pool.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String identityPoold = args[0];
        CognitoIdentityClient cognitoIdClient = CognitoIdentityClient.builder()
```

```
                .region(Region.US_EAST_1)
                .credentialsProvider(ProfileCredentialsProvider.create())
                .build();

        deleteIdPool(cognitoIdClient, identityPoold);
        cognitoIdClient.close();
    }

    public static void deleteIdPool(CognitoIdentityClient cognitoIdClient, String
 identityPoold) {
        try {

            DeleteIdentityPoolRequest identityPoolRequest =
 DeleteIdentityPoolRequest.builder()
                    .identityPoolId(identityPoold)
                    .build();

            cognitoIdClient.deleteIdentityPool(identityPoolRequest);
            System.out.println("Done");

        } catch (AwsServiceException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteIdentityPoolla Referencia AWS SDK for Java 2.x de la API.

`GetCredentialsForIdentity`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetCredentialsForIdentity`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cognitoidentity.CognitoIdentityClient;
import
 software.amazon.awssdk.services.cognitoidentity.model.GetCredentialsForIdentityRequest;
import
 software.amazon.awssdk.services.cognitoidentity.model.GetCredentialsForIdentityResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetIdentityCredentials {
    public static void main(String[] args) {

        final String usage = """

                Usage:
                    <identityId>\s

            Where:
                identityId - The Id of an existing identity in the format
 REGION:GUID.
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String identityId = args[0];
        CognitoIdentityClient cognitoClient = CognitoIdentityClient.builder()
                .region(Region.US_EAST_1)
                .build();

        getCredsForIdentity(cognitoClient, identityId);
        cognitoClient.close();
    }
```

```
    public static void getCredsForIdentity(CognitoIdentityClient cognitoClient,
 String identityId) {
        try {
            GetCredentialsForIdentityRequest getCredentialsForIdentityRequest =
 GetCredentialsForIdentityRequest
                    .builder()
                    .identityId(identityId)
                    .build();

            GetCredentialsForIdentityResponse response = cognitoClient
                    .getCredentialsForIdentity(getCredentialsForIdentityRequest);
            System.out.println(
                    "Identity ID " + response.identityId() + ", Access key ID " +
 response.credentials().accessKeyId());

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta GetCredentialsForIdentityla Referencia AWS SDK for Java 2.x de la API.

`ListIdentityPools`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListIdentityPools`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cognitoidentity.CognitoIdentityClient;
```

```
import
 software.amazon.awssdk.services.cognitoidentity.model.ListIdentityPoolsRequest;
import
 software.amazon.awssdk.services.cognitoidentity.model.ListIdentityPoolsResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListIdentityPools {
    public static void main(String[] args) {
        CognitoIdentityClient cognitoClient = CognitoIdentityClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listIdPools(cognitoClient);
        cognitoClient.close();
    }

    public static void listIdPools(CognitoIdentityClient cognitoClient) {
        try {
            ListIdentityPoolsRequest poolsRequest =
 ListIdentityPoolsRequest.builder()
                    .maxResults(15)
                    .build();

            ListIdentityPoolsResponse response =
 cognitoClient.listIdentityPools(poolsRequest);
            response.identityPools().forEach(pool -> {
                System.out.println("Pool ID: " + pool.identityPoolId());
                System.out.println("Pool name: " + pool.identityPoolName());
            });

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

```
}
```

- Para obtener más información sobre la API, consulta ListIdentityPoolsla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon Cognito Identity Provider usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes mediante el AWS SDK for Java 2.x uso de Amazon Cognito Identity Provider.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Acciones
- Escenarios

Introducción

Introducción a Amazon Cognito

En el siguiente ejemplo de código se muestra cómo empezar a utilizar Amazon Cognito.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ListUserPoolsResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ListUserPoolsRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListUserPools {
    public static void main(String[] args) {
        CognitoIdentityProviderClient cognitoClient =
 CognitoIdentityProviderClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listAllUserPools(cognitoClient);
        cognitoClient.close();
    }

    public static void listAllUserPools(CognitoIdentityProviderClient cognitoClient)
 {
        try {
            ListUserPoolsRequest request = ListUserPoolsRequest.builder()
                    .maxResults(10)
```

```
                    .build();

            ListUserPoolsResponse response = cognitoClient.listUserPools(request);
            response.userPools().forEach(userpool -> {
                System.out.println("User pool " + userpool.name() + ", User ID " +
 userpool.id());
            });

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListUserPoolsla Referencia AWS SDK for Java 2.x de la API.

Acciones

`AdminGetUser`

En el siguiente ejemplo de código, se muestra cómo utilizar `AdminGetUser`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void getAdminUser(CognitoIdentityProviderClient
 identityProviderClient, String userName,
            String poolId) {
        try {
            AdminGetUserRequest userRequest = AdminGetUserRequest.builder()
                    .username(userName)
                    .userPoolId(poolId)
                    .build();
```

```
            AdminGetUserResponse response =
identityProviderClient.adminGetUser(userRequest);
            System.out.println("User status " + response.userStatusAsString());

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta AdminGetUserla Referencia AWS SDK for Java 2.x de la API.

`AdminInitiateAuth`

En el siguiente ejemplo de código, se muestra cómo utilizar `AdminInitiateAuth`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static AdminInitiateAuthResponse
initiateAuth(CognitoIdentityProviderClient identityProviderClient,
            String clientId, String userName, String password, String userPoolId) {
        try {
            Map<String, String> authParameters = new HashMap<>();
            authParameters.put("USERNAME", userName);
            authParameters.put("PASSWORD", password);

            AdminInitiateAuthRequest authRequest =
AdminInitiateAuthRequest.builder()
                    .clientId(clientId)
                    .userPoolId(userPoolId)
                    .authParameters(authParameters)
                    .authFlow(AuthFlowType.ADMIN_USER_PASSWORD_AUTH)
```

```
                    .build();

            AdminInitiateAuthResponse response =
identityProviderClient.adminInitiateAuth(authRequest);
            System.out.println("Result Challenge is : " + response.challengeName());
            return response;

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return null;
    }
```

- Para obtener más información sobre la API, consulta AdminInitiateAuthla Referencia AWS SDK for Java 2.x de la API.

`AdminRespondToAuthChallenge`

En el siguiente ejemplo de código, se muestra cómo utilizar `AdminRespondToAuthChallenge`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    // Respond to an authentication challenge.
    public static void adminRespondToAuthChallenge(CognitoIdentityProviderClient
identityProviderClient,
            String userName, String clientId, String mfaCode, String session) {
        System.out.println("SOFTWARE_TOKEN_MFA challenge is generated");
        Map<String, String> challengeResponses = new HashMap<>();

        challengeResponses.put("USERNAME", userName);
        challengeResponses.put("SOFTWARE_TOKEN_MFA_CODE", mfaCode);
```

```
        AdminRespondToAuthChallengeRequest respondToAuthChallengeRequest =
AdminRespondToAuthChallengeRequest.builder()
                .challengeName(ChallengeNameType.SOFTWARE_TOKEN_MFA)
                .clientId(clientId)
                .challengeResponses(challengeResponses)
                .session(session)
                .build();

        AdminRespondToAuthChallengeResponse respondToAuthChallengeResult =
identityProviderClient
                .adminRespondToAuthChallenge(respondToAuthChallengeRequest);
        System.out.println("respondToAuthChallengeResult.getAuthenticationResult()"
                + respondToAuthChallengeResult.authenticationResult());
    }
```

- Para obtener más información sobre la API, consulta AdminRespondToAuthChallengela Referencia AWS SDK for Java 2.x de la API.

`AssociateSoftwareToken`

En el siguiente ejemplo de código, se muestra cómo utilizar `AssociateSoftwareToken`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static String getSecretForAppMFA(CognitoIdentityProviderClient
identityProviderClient, String session) {
        AssociateSoftwareTokenRequest softwareTokenRequest =
AssociateSoftwareTokenRequest.builder()
                .session(session)
                .build();

        AssociateSoftwareTokenResponse tokenResponse = identityProviderClient
                .associateSoftwareToken(softwareTokenRequest);
        String secretCode = tokenResponse.secretCode();
```

```
        System.out.println("Enter this token into Google Authenticator");
        System.out.println(secretCode);
        return tokenResponse.session();
    }
```

- Para obtener más información sobre la API, consulta AssociateSoftwareTokenla Referencia AWS SDK for Java 2.x de la API.

`ConfirmSignUp`

En el siguiente ejemplo de código, se muestra cómo utilizar `ConfirmSignUp`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void confirmSignUp(CognitoIdentityProviderClient
identityProviderClient, String clientId, String code,
           String userName) {
       try {
           ConfirmSignUpRequest signUpRequest = ConfirmSignUpRequest.builder()
                   .clientId(clientId)
                   .confirmationCode(code)
                   .username(userName)
                   .build();

           identityProviderClient.confirmSignUp(signUpRequest);
           System.out.println(userName + " was confirmed");

       } catch (CognitoIdentityProviderException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta ConfirmSignUpla Referencia AWS SDK for Java 2.x de la API.

`CreateUserPool`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateUserPool`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CreateUserPoolRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CreateUserPoolResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateUserPool {
    public static void main(String[] args) {

        final String usage = """

                Usage:
                    <userPoolName>\s

                Where:
```

```
                    userPoolName - The name to give your user pool when it's
 created.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String userPoolName = args[0];
        CognitoIdentityProviderClient cognitoClient =
 CognitoIdentityProviderClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String id = createPool(cognitoClient, userPoolName);
        System.out.println("User pool ID: " + id);
        cognitoClient.close();
    }

    public static String createPool(CognitoIdentityProviderClient cognitoClient,
 String userPoolName) {
        try {
            CreateUserPoolRequest request = CreateUserPoolRequest.builder()
                    .poolName(userPoolName)
                    .build();

            CreateUserPoolResponse response = cognitoClient.createUserPool(request);
            return response.userPool().id();

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulta CreateUserPoolla Referencia AWS SDK for Java 2.x de la API.

`CreateUserPoolClient`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateUserPoolClient`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CreateUserPoolClientRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CreateUserPoolClientResponse;

/**
 * A user pool client app is an application that authenticates with Amazon
 * Cognito user pools.
 * When you create a user pool, you can configure app clients that allow mobile
 * or web applications
 * to call API operations to authenticate users, manage user attributes and
 * profiles,
 * and implement sign-up and sign-in flows.
 *
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateUserPoolClient {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <clientName> <userPoolId>\s
```

```
                Where:
                    clientName - The name for the user pool client to create.
                    userPoolId - The ID for the user pool.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String clientName = args[0];
        String userPoolId = args[1];
        CognitoIdentityProviderClient cognitoClient =
 CognitoIdentityProviderClient.builder()
                .region(Region.US_EAST_1)
                .build();

        createPoolClient(cognitoClient, clientName, userPoolId);
        cognitoClient.close();
    }

    public static void createPoolClient(CognitoIdentityProviderClient cognitoClient,
 String clientName,
            String userPoolId) {
        try {
            CreateUserPoolClientRequest request =
 CreateUserPoolClientRequest.builder()
                    .clientName(clientName)
                    .userPoolId(userPoolId)
                    .build();

            CreateUserPoolClientResponse response =
 cognitoClient.createUserPoolClient(request);
            System.out.println("User pool " + response.userPoolClient().clientName()
 + " created. ID: "
                    + response.userPoolClient().clientId());

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta CreateUserPoolClientla Referencia AWS SDK for Java 2.x de la API.

`ListUserPools`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListUserPools`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ListUserPoolsResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ListUserPoolsRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListUserPools {
    public static void main(String[] args) {
        CognitoIdentityProviderClient cognitoClient =
 CognitoIdentityProviderClient.builder()
                .region(Region.US_EAST_1)
                .build();
```

```
        listAllUserPools(cognitoClient);
        cognitoClient.close();
    }

    public static void listAllUserPools(CognitoIdentityProviderClient cognitoClient)
 {
        try {
            ListUserPoolsRequest request = ListUserPoolsRequest.builder()
                    .maxResults(10)
                    .build();

            ListUserPoolsResponse response = cognitoClient.listUserPools(request);
            response.userPools().forEach(userpool -> {
                System.out.println("User pool " + userpool.name() + ", User ID " +
 userpool.id());
            });

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListUserPoolsla Referencia AWS SDK for Java 2.x de la API.

`ListUsers`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListUsers`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ListUsersRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ListUsersResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListUsers {
    public static void main(String[] args) {

        final String usage = """

                Usage:
                    <userPoolId>\s

                Where:
                    userPoolId - The ID given to your user pool when it's created.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String userPoolId = args[0];
        CognitoIdentityProviderClient cognitoClient =
 CognitoIdentityProviderClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listAllUsers(cognitoClient, userPoolId);
        listUsersFilter(cognitoClient, userPoolId);
```

```
        cognitoClient.close();
    }

    public static void listAllUsers(CognitoIdentityProviderClient cognitoClient,
String userPoolId) {
        try {
            ListUsersRequest usersRequest = ListUsersRequest.builder()
                    .userPoolId(userPoolId)
                    .build();

            ListUsersResponse response = cognitoClient.listUsers(usersRequest);
            response.users().forEach(user -> {
                System.out.println("User " + user.username() + " Status " +
user.userStatus() + " Created "
                        + user.userCreateDate());
            });

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Shows how to list users by using a filter.
    public static void listUsersFilter(CognitoIdentityProviderClient cognitoClient,
String userPoolId) {

        try {
            String filter = "email = \"tblue@noserver.com\"";
            ListUsersRequest usersRequest = ListUsersRequest.builder()
                    .userPoolId(userPoolId)
                    .filter(filter)
                    .build();

            ListUsersResponse response = cognitoClient.listUsers(usersRequest);
            response.users().forEach(user -> {
                System.out.println("User with filter applied " + user.username() + "
Status " + user.userStatus()
                        + " Created " + user.userCreateDate());
            });

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListUsersla Referencia AWS SDK for Java 2.x de la API.

`ResendConfirmationCode`

En el siguiente ejemplo de código, se muestra cómo utilizar `ResendConfirmationCode`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void resendConfirmationCode(CognitoIdentityProviderClient
identityProviderClient, String clientId,
            String userName) {
       try {
            ResendConfirmationCodeRequest codeRequest =
ResendConfirmationCodeRequest.builder()
                    .clientId(clientId)
                    .username(userName)
                    .build();

            ResendConfirmationCodeResponse response =
identityProviderClient.resendConfirmationCode(codeRequest);
            System.out.println("Method of delivery is " +
response.codeDeliveryDetails().deliveryMediumAsString());

       } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta ResendConfirmationCodela Referencia AWS SDK for Java 2.x de la API.

`SignUp`

En el siguiente ejemplo de código, se muestra cómo utilizar `SignUp`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void signUp(CognitoIdentityProviderClient identityProviderClient,
String clientId, String userName,
           String password, String email) {
       AttributeType userAttrs = AttributeType.builder()
               .name("email")
               .value(email)
               .build();

       List<AttributeType> userAttrsList = new ArrayList<>();
       userAttrsList.add(userAttrs);
       try {
           SignUpRequest signUpRequest = SignUpRequest.builder()
                   .userAttributes(userAttrsList)
                   .username(userName)
                   .clientId(clientId)
                   .password(password)
                   .build();

           identityProviderClient.signUp(signUpRequest);
           System.out.println("User has been signed up ");

       } catch (CognitoIdentityProviderException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta SignUpla Referencia AWS SDK for Java 2.x de la API.

`VerifySoftwareToken`

En el siguiente ejemplo de código, se muestra cómo utilizar `VerifySoftwareToken`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   // Verify the TOTP and register for MFA.
   public static void verifyTOTP(CognitoIdentityProviderClient
identityProviderClient, String session, String code) {
       try {
           VerifySoftwareTokenRequest tokenRequest =
VerifySoftwareTokenRequest.builder()
                   .userCode(code)
                   .session(session)
                   .build();

           VerifySoftwareTokenResponse verifyResponse =
identityProviderClient.verifySoftwareToken(tokenRequest);
           System.out.println("The status of the token is " +
verifyResponse.statusAsString());

       } catch (CognitoIdentityProviderException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta VerifySoftwareTokenla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Registro de un usuario en un grupo de usuarios que requiera MFA

En el siguiente ejemplo de código, se muestra cómo:

- Registre y confirme a un usuario con un nombre de usuario, una contraseña y una dirección de correo electrónico.
- Configure la autenticación multifactor asociando una aplicación MFA al usuario.
- Inicie sesión con una contraseña y un código MFA.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AdminGetUserRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AdminGetUserResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AdminInitiateAuthRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AdminInitiateAuthResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AdminRespondToAuthChallengeRe
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AdminRespondToAuthChallengeRe
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AssociateSoftwareTokenRequest
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AssociateSoftwareTokenRespons
import software.amazon.awssdk.services.cognitoidentityprovider.model.AttributeType;
import software.amazon.awssdk.services.cognitoidentityprovider.model.AuthFlowType;
```

```
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ChallengeNameType;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ConfirmSignUpRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ResendConfirmationCodeRequest
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ResendConfirmationCodeRespons
import software.amazon.awssdk.services.cognitoidentityprovider.model.SignUpRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.VerifySoftwareTokenRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.VerifySoftwareTokenResponse;
import java.security.InvalidKeyException;
import java.security.NoSuchAlgorithmException;
import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;
import java.util.Scanner;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * TIP: To set up the required user pool, run the AWS Cloud Development Kit (AWS
 * CDK) script provided in this GitHub repo at
 * resources/cdk/cognito_scenario_user_pool_with_mfa.
 *
 * This code example performs the following operations:
 *
 * 1. Invokes the signUp method to sign up a user.
 * 2. Invokes the adminGetUser method to get the user's confirmation status.
 * 3. Invokes the ResendConfirmationCode method if the user requested another
 * code.
 * 4. Invokes the confirmSignUp method.
 * 5. Invokes the AdminInitiateAuth to sign in. This results in being prompted
 * to set up TOTP (time-based one-time password). (The response is
```

```
 * “ChallengeName”: “MFA_SETUP”).
 * 6. Invokes the AssociateSoftwareToken method to generate a TOTP MFA private
 * key. This can be used with Google Authenticator.
 * 7. Invokes the VerifySoftwareToken method to verify the TOTP and register for
 * MFA.
 * 8. Invokes the AdminInitiateAuth to sign in again. This results in being
 * prompted to submit a TOTP (Response: “ChallengeName”: “SOFTWARE_TOKEN_MFA”).
 * 9. Invokes the AdminRespondToAuthChallenge to get back a token.
 */

public class CognitoMVP {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws NoSuchAlgorithmException,
 InvalidKeyException {
        final String usage = """

                Usage:
                    <clientId> <poolId>

                Where:
                    clientId - The app client Id value that you can get from the AWS
 CDK script.
                    poolId - The pool Id that you can get from the AWS CDK script.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String clientId = args[0];
        String poolId = args[1];
        CognitoIdentityProviderClient identityProviderClient =
 CognitoIdentityProviderClient.builder()
                .region(Region.US_EAST_1)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon Cognito example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("*** Enter your user name");
```

```
        Scanner in = new Scanner(System.in);
        String userName = in.nextLine();

        System.out.println("*** Enter your password");
        String password = in.nextLine();

        System.out.println("*** Enter your email");
        String email = in.nextLine();

        System.out.println("1. Signing up " + userName);
        signUp(identityProviderClient, clientId, userName, password, email);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Getting " + userName + " in the user pool");
        getAdminUser(identityProviderClient, userName, poolId);

        System.out
                .println("*** Conformation code sent to " + userName + ". Would you
like to send a new code? (Yes/No)");
        System.out.println(DASHES);

        System.out.println(DASHES);
        String ans = in.nextLine();

        if (ans.compareTo("Yes") == 0) {
            resendConfirmationCode(identityProviderClient, clientId, userName);
            System.out.println("3. Sending a new confirmation code");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Enter confirmation code that was emailed");
        String code = in.nextLine();
        confirmSignUp(identityProviderClient, clientId, code, userName);
        System.out.println("Rechecking the status of " + userName + " in the user
pool");
        getAdminUser(identityProviderClient, userName, poolId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Invokes the initiateAuth to sign in");
        AdminInitiateAuthResponse authResponse =
initiateAuth(identityProviderClient, clientId, userName, password,
```

```
                poolId);
        String mySession = authResponse.session();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Invokes the AssociateSoftwareToken method to generate
a TOTP key");
        String newSession = getSecretForAppMFA(identityProviderClient, mySession);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("*** Enter the 6-digit code displayed in Google
Authenticator");
        String myCode = in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Verify the TOTP and register for MFA");
        verifyTOTP(identityProviderClient, newSession, myCode);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Re-enter a 6-digit code displayed in Google
Authenticator");
        String mfaCode = in.nextLine();
        AdminInitiateAuthResponse authResponse1 =
initiateAuth(identityProviderClient, clientId, userName, password,
                poolId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9.  Invokes the AdminRespondToAuthChallenge");
        String session2 = authResponse1.session();
        adminRespondToAuthChallenge(identityProviderClient, userName, clientId,
mfaCode, session2);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("All Amazon Cognito operations were successfully
performed");
        System.out.println(DASHES);
    }

    // Respond to an authentication challenge.
```

```
   public static void adminRespondToAuthChallenge(CognitoIdentityProviderClient
identityProviderClient,
           String userName, String clientId, String mfaCode, String session) {
       System.out.println("SOFTWARE_TOKEN_MFA challenge is generated");
       Map<String, String> challengeResponses = new HashMap<>();

       challengeResponses.put("USERNAME", userName);
       challengeResponses.put("SOFTWARE_TOKEN_MFA_CODE", mfaCode);

       AdminRespondToAuthChallengeRequest respondToAuthChallengeRequest =
AdminRespondToAuthChallengeRequest.builder()
               .challengeName(ChallengeNameType.SOFTWARE_TOKEN_MFA)
               .clientId(clientId)
               .challengeResponses(challengeResponses)
               .session(session)
               .build();

       AdminRespondToAuthChallengeResponse respondToAuthChallengeResult =
identityProviderClient
               .adminRespondToAuthChallenge(respondToAuthChallengeRequest);
       System.out.println("respondToAuthChallengeResult.getAuthenticationResult()"
               + respondToAuthChallengeResult.authenticationResult());
   }

   // Verify the TOTP and register for MFA.
   public static void verifyTOTP(CognitoIdentityProviderClient
identityProviderClient, String session, String code) {
       try {
           VerifySoftwareTokenRequest tokenRequest =
VerifySoftwareTokenRequest.builder()
                   .userCode(code)
                   .session(session)
                   .build();

           VerifySoftwareTokenResponse verifyResponse =
identityProviderClient.verifySoftwareToken(tokenRequest);
           System.out.println("The status of the token is " +
verifyResponse.statusAsString());

       } catch (CognitoIdentityProviderException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

```
   public static AdminInitiateAuthResponse
initiateAuth(CognitoIdentityProviderClient identityProviderClient,
           String clientId, String userName, String password, String userPoolId) {
       try {
           Map<String, String> authParameters = new HashMap<>();
           authParameters.put("USERNAME", userName);
           authParameters.put("PASSWORD", password);

           AdminInitiateAuthRequest authRequest =
AdminInitiateAuthRequest.builder()
                   .clientId(clientId)
                   .userPoolId(userPoolId)
                   .authParameters(authParameters)
                   .authFlow(AuthFlowType.ADMIN_USER_PASSWORD_AUTH)
                   .build();

           AdminInitiateAuthResponse response =
identityProviderClient.adminInitiateAuth(authRequest);
           System.out.println("Result Challenge is : " + response.challengeName());
           return response;

       } catch (CognitoIdentityProviderException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }

   public static String getSecretForAppMFA(CognitoIdentityProviderClient
identityProviderClient, String session) {
       AssociateSoftwareTokenRequest softwareTokenRequest =
AssociateSoftwareTokenRequest.builder()
               .session(session)
               .build();

       AssociateSoftwareTokenResponse tokenResponse = identityProviderClient
               .associateSoftwareToken(softwareTokenRequest);
       String secretCode = tokenResponse.secretCode();
       System.out.println("Enter this token into Google Authenticator");
       System.out.println(secretCode);
       return tokenResponse.session();
   }
```

```
   public static void confirmSignUp(CognitoIdentityProviderClient
identityProviderClient, String clientId, String code,
           String userName) {
       try {
           ConfirmSignUpRequest signUpRequest = ConfirmSignUpRequest.builder()
                   .clientId(clientId)
                   .confirmationCode(code)
                   .username(userName)
                   .build();

           identityProviderClient.confirmSignUp(signUpRequest);
           System.out.println(userName + " was confirmed");

       } catch (CognitoIdentityProviderException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }

   public static void resendConfirmationCode(CognitoIdentityProviderClient
identityProviderClient, String clientId,
           String userName) {
       try {
           ResendConfirmationCodeRequest codeRequest =
ResendConfirmationCodeRequest.builder()
                   .clientId(clientId)
                   .username(userName)
                   .build();

           ResendConfirmationCodeResponse response =
identityProviderClient.resendConfirmationCode(codeRequest);
           System.out.println("Method of delivery is " +
response.codeDeliveryDetails().deliveryMediumAsString());

       } catch (CognitoIdentityProviderException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }

   public static void signUp(CognitoIdentityProviderClient identityProviderClient,
String clientId, String userName,
           String password, String email) {
```

```
        AttributeType userAttrs = AttributeType.builder()
                .name("email")
                .value(email)
                .build();

        List<AttributeType> userAttrsList = new ArrayList<>();
        userAttrsList.add(userAttrs);
        try {
            SignUpRequest signUpRequest = SignUpRequest.builder()
                    .userAttributes(userAttrsList)
                    .username(userName)
                    .clientId(clientId)
                    .password(password)
                    .build();

            identityProviderClient.signUp(signUpRequest);
            System.out.println("User has been signed up ");

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void getAdminUser(CognitoIdentityProviderClient
 identityProviderClient, String userName,
            String poolId) {
        try {
            AdminGetUserRequest userRequest = AdminGetUserRequest.builder()
                    .username(userName)
                    .userPoolId(poolId)
                    .build();

            AdminGetUserResponse response =
 identityProviderClient.adminGetUser(userRequest);
            System.out.println("User status " + response.userStatusAsString());

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - AdminGetUser
  - AdminInitiateAuth
  - AdminRespondToAuthChallenge
  - AssociateSoftwareToken
  - ConfirmDevice
  - ConfirmSignUp
  - InitiateAuth
  - ListUsers
  - ResendConfirmationCode
  - RespondToAuthChallenge
  - SignUp
  - VerifySoftwareToken

Ejemplos de Amazon Comprehend usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x con Amazon Comprehend.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`CreateDocumentClassifier`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDocumentClassifier`.

SDK para Java 2.x

> **Note**
>
> Hay más información sobre. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.comprehend.ComprehendClient;
import software.amazon.awssdk.services.comprehend.model.ComprehendException;
import
 software.amazon.awssdk.services.comprehend.model.CreateDocumentClassifierRequest;
import
 software.amazon.awssdk.services.comprehend.model.CreateDocumentClassifierResponse;
import
 software.amazon.awssdk.services.comprehend.model.DocumentClassifierInputDataConfig;

/**
 * Before running this code example, you can setup the necessary resources, such
 * as the CSV file and IAM Roles, by following this document:
 * https://aws.amazon.com/blogs/machine-learning/building-a-custom-classifier-using-
amazon-comprehend/
 *
 * Also, set up your development environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DocumentClassifierDemo {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <dataAccessRoleArn> <s3Uri> <documentClassifierName>
```

```
                Where:
                  dataAccessRoleArn - The ARN value of the role used for this
operation.
                  s3Uri - The Amazon S3 bucket that contains the CSV file.
                  documentClassifierName - The name of the document classifier.
                """;

       if (args.length != 3) {
           System.out.println(usage);
           System.exit(1);
       }

       String dataAccessRoleArn = args[0];
       String s3Uri = args[1];
       String documentClassifierName = args[2];

       Region region = Region.US_EAST_1;
       ComprehendClient comClient = ComprehendClient.builder()
               .region(region)
               .build();

       createDocumentClassifier(comClient, dataAccessRoleArn, s3Uri,
documentClassifierName);
       comClient.close();
   }

   public static void createDocumentClassifier(ComprehendClient comClient, String
dataAccessRoleArn, String s3Uri,
           String documentClassifierName) {
       try {
           DocumentClassifierInputDataConfig config =
DocumentClassifierInputDataConfig.builder()
                   .s3Uri(s3Uri)
                   .build();

           CreateDocumentClassifierRequest createDocumentClassifierRequest =
CreateDocumentClassifierRequest.builder()
                   .documentClassifierName(documentClassifierName)
                   .dataAccessRoleArn(dataAccessRoleArn)
                   .languageCode("en")
                   .inputDataConfig(config)
                   .build();
```

```
            CreateDocumentClassifierResponse createDocumentClassifierResult =
 comClient
                    .createDocumentClassifier(createDocumentClassifierRequest);
            String documentClassifierArn =
 createDocumentClassifierResult.documentClassifierArn();
            System.out.println("Document Classifier ARN: " + documentClassifierArn);

        } catch (ComprehendException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta CreateDocumentClassifierla Referencia AWS SDK for Java 2.x de la API.

`DetectDominantLanguage`

En el siguiente ejemplo de código, se muestra cómo utilizar `DetectDominantLanguage`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.comprehend.ComprehendClient;
import software.amazon.awssdk.services.comprehend.model.ComprehendException;
import
 software.amazon.awssdk.services.comprehend.model.DetectDominantLanguageRequest;
import
 software.amazon.awssdk.services.comprehend.model.DetectDominantLanguageResponse;
import software.amazon.awssdk.services.comprehend.model.DominantLanguage;
import java.util.List;

/**
```

```
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectLanguage {
    public static void main(String[] args) {
        // Specify French text - "It is raining today in Seattle".
        String text = "Il pleut aujourd'hui à Seattle";
        Region region = Region.US_EAST_1;

        ComprehendClient comClient = ComprehendClient.builder()
                .region(region)
                .build();

        System.out.println("Calling DetectDominantLanguage");
        detectTheDominantLanguage(comClient, text);
        comClient.close();
    }

    public static void detectTheDominantLanguage(ComprehendClient comClient, String
 text) {
        try {
            DetectDominantLanguageRequest request =
 DetectDominantLanguageRequest.builder()
                    .text(text)
                    .build();

            DetectDominantLanguageResponse resp =
 comClient.detectDominantLanguage(request);
            List<DominantLanguage> allLanList = resp.languages();
            for (DominantLanguage lang : allLanList) {
                System.out.println("Language is " + lang.languageCode());
            }

        } catch (ComprehendException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DetectDominantLanguagela Referencia AWS SDK for Java 2.x de la API.

`DetectEntities`

En el siguiente ejemplo de código, se muestra cómo utilizar `DetectEntities`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.comprehend.ComprehendClient;
import software.amazon.awssdk.services.comprehend.model.DetectEntitiesRequest;
import software.amazon.awssdk.services.comprehend.model.DetectEntitiesResponse;
import software.amazon.awssdk.services.comprehend.model.Entity;
import software.amazon.awssdk.services.comprehend.model.ComprehendException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectEntities {
    public static void main(String[] args) {
        String text = "Amazon.com, Inc. is located in Seattle, WA and was founded
 July 5th, 1994 by Jeff Bezos, allowing customers to buy everything from books to
 blenders. Seattle is north of Portland and south of Vancouver, BC. Other notable
 Seattle - based companies are Starbucks and Boeing.";
        Region region = Region.US_EAST_1;
        ComprehendClient comClient = ComprehendClient.builder()
```

```
                .region(region)
                .build();

        System.out.println("Calling DetectEntities");
        detectAllEntities(comClient, text);
        comClient.close();
    }

    public static void detectAllEntities(ComprehendClient comClient, String text) {
        try {
            DetectEntitiesRequest detectEntitiesRequest =
 DetectEntitiesRequest.builder()
                    .text(text)
                    .languageCode("en")
                    .build();

            DetectEntitiesResponse detectEntitiesResult =
 comClient.detectEntities(detectEntitiesRequest);
            List<Entity> entList = detectEntitiesResult.entities();
            for (Entity entity : entList) {
                System.out.println("Entity text is " + entity.text());
            }

        } catch (ComprehendException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DetectEntitiesla Referencia AWS SDK for Java 2.x de la API.

`DetectKeyPhrases`

En el siguiente ejemplo de código, se muestra cómo utilizar `DetectKeyPhrases`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.comprehend.ComprehendClient;
import software.amazon.awssdk.services.comprehend.model.DetectKeyPhrasesRequest;
import software.amazon.awssdk.services.comprehend.model.DetectKeyPhrasesResponse;
import software.amazon.awssdk.services.comprehend.model.KeyPhrase;
import software.amazon.awssdk.services.comprehend.model.ComprehendException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectKeyPhrases {
    public static void main(String[] args) {
        String text = "Amazon.com, Inc. is located in Seattle, WA and was founded
 July 5th, 1994 by Jeff Bezos, allowing customers to buy everything from books to
 blenders. Seattle is north of Portland and south of Vancouver, BC. Other notable
 Seattle - based companies are Starbucks and Boeing.";
        Region region = Region.US_EAST_1;
        ComprehendClient comClient = ComprehendClient.builder()
                .region(region)
                .build();

        System.out.println("Calling DetectKeyPhrases");
        detectAllKeyPhrases(comClient, text);
        comClient.close();
    }

    public static void detectAllKeyPhrases(ComprehendClient comClient, String text)
 {
```

```
        try {
            DetectKeyPhrasesRequest detectKeyPhrasesRequest =
 DetectKeyPhrasesRequest.builder()
                    .text(text)
                    .languageCode("en")
                    .build();

            DetectKeyPhrasesResponse detectKeyPhrasesResult =
 comClient.detectKeyPhrases(detectKeyPhrasesRequest);
            List<KeyPhrase> phraseList = detectKeyPhrasesResult.keyPhrases();
            for (KeyPhrase keyPhrase : phraseList) {
                System.out.println("Key phrase text is " + keyPhrase.text());
            }

        } catch (ComprehendException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DetectKeyPhrasesla Referencia AWS SDK for Java 2.x de la API.

`DetectSentiment`

En el siguiente ejemplo de código, se muestra cómo utilizar `DetectSentiment`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.comprehend.ComprehendClient;
import software.amazon.awssdk.services.comprehend.model.ComprehendException;
import software.amazon.awssdk.services.comprehend.model.DetectSentimentRequest;
```

```
import software.amazon.awssdk.services.comprehend.model.DetectSentimentResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectSentiment {
    public static void main(String[] args) {
        String text = "Amazon.com, Inc. is located in Seattle, WA and was founded
 July 5th, 1994 by Jeff Bezos, allowing customers to buy everything from books to
 blenders. Seattle is north of Portland and south of Vancouver, BC. Other notable
 Seattle - based companies are Starbucks and Boeing.";
        Region region = Region.US_EAST_1;
        ComprehendClient comClient = ComprehendClient.builder()
                .region(region)
                .build();

        System.out.println("Calling DetectSentiment");
        detectSentiments(comClient, text);
        comClient.close();
    }

    public static void detectSentiments(ComprehendClient comClient, String text) {
        try {
            DetectSentimentRequest detectSentimentRequest =
 DetectSentimentRequest.builder()
                    .text(text)
                    .languageCode("en")
                    .build();

            DetectSentimentResponse detectSentimentResult =
 comClient.detectSentiment(detectSentimentRequest);
            System.out.println("The Neutral value is " +
 detectSentimentResult.sentimentScore().neutral());

        } catch (ComprehendException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

```
}
```

- Para obtener más información sobre la API, consulta DetectSentimentla Referencia AWS SDK for Java 2.x de la API.

`DetectSyntax`

En el siguiente ejemplo de código, se muestra cómo utilizar `DetectSyntax`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.comprehend.ComprehendClient;
import software.amazon.awssdk.services.comprehend.model.ComprehendException;
import software.amazon.awssdk.services.comprehend.model.DetectSyntaxRequest;
import software.amazon.awssdk.services.comprehend.model.DetectSyntaxResponse;
import software.amazon.awssdk.services.comprehend.model.SyntaxToken;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectSyntax {
    public static void main(String[] args) {
        String text = "Amazon.com, Inc. is located in Seattle, WA and was founded
 July 5th, 1994 by Jeff Bezos, allowing customers to buy everything from books to
 blenders. Seattle is north of Portland and south of Vancouver, BC. Other notable
 Seattle - based companies are Starbucks and Boeing.";
        Region region = Region.US_EAST_1;
```

```
        ComprehendClient comClient = ComprehendClient.builder()
                .region(region)
                .build();

        System.out.println("Calling DetectSyntax");
        detectAllSyntax(comClient, text);
        comClient.close();
    }

    public static void detectAllSyntax(ComprehendClient comClient, String text) {
        try {
            DetectSyntaxRequest detectSyntaxRequest = DetectSyntaxRequest.builder()
                    .text(text)
                    .languageCode("en")
                    .build();

            DetectSyntaxResponse detectSyntaxResult =
 comClient.detectSyntax(detectSyntaxRequest);
            List<SyntaxToken> syntaxTokens = detectSyntaxResult.syntaxTokens();
            for (SyntaxToken token : syntaxTokens) {
                System.out.println("Language is " + token.text());
                System.out.println("Part of speech is " +
 token.partOfSpeech().tagAsString());
            }

        } catch (ComprehendException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DetectSyntaxla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Crear un chatbot de Amazon Lex

En el siguiente ejemplo de código se muestra cómo crear un chatbot para atraer a visitantes a su sitio web.

SDK para Java 2.x

Indica cómo utilizar la API de Amazon Lex para crear un Chatbot dentro de una aplicación web con el fin de atraer visitantes a su sitio web.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Amazon Comprehend
- Amazon Lex
- Amazon Translate

Crear una aplicación de mensajería

El siguiente ejemplo de código muestra cómo crear una aplicación de mensajería con Amazon SQS.

SDK para Java 2.x

Muestra cómo usar la API de Amazon SQS para desarrollar una API de REST de Spring que envíe y recupere mensajes.

Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Amazon Comprehend
- Amazon SQS

Creación de una aplicación para analizar los comentarios de los clientes

El siguiente ejemplo de código muestra cómo crear una aplicación que analice las tarjetas de comentarios de los clientes, las traduzca del idioma original, determine sus opiniones y genere un archivo de audio a partir del texto traducido.

SDK para Java 2.x

Esta aplicación de ejemplo analiza y almacena las tarjetas de comentarios de los clientes. Concretamente, satisface la necesidad de un hotel ficticio en la ciudad de Nueva York. El hotel recibe comentarios de los huéspedes en varios idiomas en forma de tarjetas de comentarios

físicas. Esos comentarios se cargan en la aplicación a través de un cliente web. Una vez cargada la imagen de una tarjeta de comentarios, se llevan a cabo los siguientes pasos:

- El texto se extrae de la imagen mediante Amazon Textract.
- Amazon Comprehend determina la opinión del texto extraído y su idioma.
- El texto extraído se traduce al inglés mediante Amazon Translate.
- Amazon Polly sintetiza un archivo de audio a partir del texto extraído.

La aplicación completa se puede implementar con AWS CDK. Para obtener el código fuente y las instrucciones de implementación, consulte el proyecto en GitHub.

Servicios utilizados en este ejemplo

- Amazon Comprehend
- Lambda
- Amazon Polly
- Amazon Textract
- Amazon Translate

AWS Control Tower ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with AWS Control Tower.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hola AWS Control Tower

En el siguiente ejemplo de código se muestra cómo empezar a utilizar AWS Control Tower.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public class HelloControlTower {

    public static void main(String[] args) {
        try {
            ControlTowerClient controlTowerClient = ControlTowerClient.builder()
                .build() ;
            helloControlTower(controlTowerClient);
        } catch (ControlTowerException e) {
            System.out.println("Control Tower error occurred: " +
 e.awsErrorDetails().errorMessage());
        }
    }

    /**
     * Use the AWS SDK for Java (v2) to create an AWS Control Tower client
     * and list all available baselines.
     * This example uses the default settings specified in your shared credentials
     * and config files.
     *
     * @param controlTowerClient A ControlTowerClient object. This object wraps
     *                           the low-level AWS Control Tower service API.
     */
    public static void helloControlTower(ControlTowerClient controlTowerClient) {
        System.out.println("Hello, AWS Control Tower! Let's list available
 baselines:\n");

        ListBaselinesIterable paginator = controlTowerClient.listBaselinesPaginator(
                ListBaselinesRequest.builder().build());
```

```
        List<String> baselineNames = new ArrayList<>();

        try {
            paginator.stream()
                .flatMap(response -> response.baselines().stream())
                    .forEach(baseline -> baselineNames.add(baseline.name()));

            System.out.println(baselineNames.size() + " baseline(s) retrieved.");
            for (String baselineName : baselineNames) {
                System.out.println("\t" + baselineName);
            }

        } catch (ControlTowerException e) {
            if ("AccessDeniedException".equals(e.awsErrorDetails().errorCode())) {
                System.out.println("Access denied. Please ensure you have the
 necessary permissions.");
            } else {
                System.out.println("An error occurred: " + e.getMessage());
            }
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListBaselinesla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Mostrar las zonas de aterrizaje.
- Mostrar, habilitar, obtener, restablecer y deshabilitar líneas de base.
- Mostrar, habilitar, obtener y deshabilitar controles.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario interactivo que demuestre AWS Control Tower las funciones.

```
public class ControlTowerScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final Scanner scanner = new Scanner(in);

    private static OrganizationsClient orgClient;
    private static ControlCatalogClient catClient;

    private static String ouId = null;
    private static String ouArn = null;
    private static String landingZoneArn = null;
    private static boolean useLandingZone = false;

    private String stack = null;
    private String accountId = null;

    public static void main(String[] args) {

        System.out.println(DASHES);
        System.out.println("Welcome to the AWS Control Tower basics scenario!");
        System.out.println(DASHES);

        try {
            runScenarioAsync();
        } catch (Exception e) {
            e.printStackTrace();
        }
    }

    // ----------------------------
    // Utilities
    // ----------------------------
    private static boolean askYesNo(String msg) {
        System.out.println(msg);
```

```
        return scanner.nextLine().trim().toLowerCase().startsWith("y");
    }

    private static void runScenarioAsync() {
        try {
            ControlTowerActions actions = new ControlTowerActions();

            // ----------------------------
            // Step 1: Landing Zones
            // ----------------------------
            System.out.println(DASHES);
            System.out.println("""
        Some demo operations require the use of a landing zone.
        You can use an existing landing zone or opt out of these operations in the
 demo.
        For instructions on how to set up a landing zone,
        see https://docs.aws.amazon.com/controltower/latest/userguide/getting-
started-from-console.html
        """);

            System.out.println("Step 1: Listing landing zones...");
            waitForInputToContinue(scanner);

            List<LandingZoneSummary> landingZones =
                    actions.listLandingZonesAsync().join();

            if (landingZones.isEmpty()) {
                System.out.println("No landing zones found. Landing-zone-dependent
 steps will be skipped.");
                useLandingZone = false;
                waitForInputToContinue(scanner);
            } else {
                System.out.println("\nAvailable Landing Zones:");
                for (int i = 0; i < landingZones.size(); i++) {
                    System.out.printf("%d) %s%n", i + 1, landingZones.get(i).arn());
                }

                if (askYesNo("Do you want to use the first landing zone in the list
 (" +
                        landingZones.get(0).arn() + ")? (y/n): ")) {
                    useLandingZone = true;
                    landingZoneArn = landingZones.get(0).arn();
                } else if (askYesNo("Do you want to use a different existing Landing
 Zone for this demo? (y/n): ")) {
```

```
                    useLandingZone = true;
                    System.out.println("Enter landing zone ARN: ");
                    landingZoneArn = scanner.nextLine().trim();
                } else {
                    System.out.println("Proceeding without a landing zone.");
                    useLandingZone = false;
                    waitForInputToContinue(scanner);
                }
            }

            // ------------------------------
            // Setup Organization + Sandbox OU
            // ------------------------------
            if (useLandingZone) {
                System.out.println("Using landing zone ARN: " + landingZoneArn);

                ControlTowerActions.OrgSetupResult result =
                        actions.setupOrganizationAsync().join();

                ouArn = result.sandboxOuArn();
                ouId  = result.sandboxOuArn();

                System.out.println("Organization ID: " + result.orgId());
                System.out.println("Using Sandbox OU ARN: " + ouArn);
            }

            // ------------------------------
            // Step 2: Baselines
            // ------------------------------
            System.out.println(DASHES);
            System.out.println("Step 2: Listing available baselines...");
            System.out.println("""
In this step, the program lists available AWS Control Tower baselines and may
 perform
baseline-related operations (enable, disable, reset) if requested.

NOTE:
AWS Control Tower enforces governance through baselines and mandatory controls
(guardrails). Mandatory controls are required for landing zone governance and may
restrict certain operations depending on the account, region, or organizational
 policy.

For more information, see:
- Types of baselines in AWS Control Tower:
```

```
  https://docs.aws.amazon.com/controltower/latest/userguide/types-of-baselines.html
- Mandatory controls (guardrails) in AWS Control Tower:
  https://docs.aws.amazon.com/controltower/latest/controlreference/mandatory-
controls.html
- Baseline API examples:
  https://docs.aws.amazon.com/controltower/latest/userguide/baseline-api-
examples.html
""");



            waitForInputToContinue(scanner);
            List<BaselineSummary> baselines =
                    actions.listBaselinesAsync().join();

            BaselineSummary controlTowerBaseline = null;
            for (BaselineSummary b : baselines) {
                System.out.println("Baseline: " + b.name());
                System.out.println("  ARN: " + b.arn());
                if ("AWSControlTowerBaseline".equals(b.name())) {
                    controlTowerBaseline = b;
                }
            }

            waitForInputToContinue(scanner);

            if (useLandingZone && controlTowerBaseline != null) {

                System.out.println("\nListing enabled baselines:");
                List<EnabledBaselineSummary> enabledBaselines =
                        actions.listEnabledBaselinesAsync().join();

                String enabledBaselineArn = null;
                for (EnabledBaselineSummary eb : enabledBaselines) {
                    System.out.println("Checking enabled baseline ARN: " +
 eb.arn());
                    if (eb.baselineIdentifier().equals(controlTowerBaseline.arn()))
 {
                        enabledBaselineArn = eb.arn(); // correct enabled ARN for
 this baseline
                        break; // stop after finding the matching one
                    }
                }
```

```
                if (enabledBaselineArn == null) {
                    System.out.println("No enabled baseline found for " +
 controlTowerBaseline.arn());
                } else {
                    System.out.println("Selected enabled baseline ARN for reset/
disable: " + enabledBaselineArn);
                }


                // Enable the Baseline
                if (askYesNo("Do you want to enable the Control Tower Baseline? (y/
n): ")) {
                    System.out.println("\nEnabling Control Tower Baseline...");

                    String baselineId = controlTowerBaseline.arn();
                    String enabledBaselineId =
                            actions.enableBaselineAsync(
                                    ouArn,                  // targetIdentifier #
 the OU or account ARN
                                    baselineId,             // baselineIdentifier #
 the Control Tower baseline ARN
                                    "5.0"                   // baselineVersion #
 version string
                            ).join();


                    System.out.println("Enabled baseline operation ID: " +
 enabledBaselineId);
                    if (enabledBaselineId == null) {
                       enabledBaselineId = enabledBaselineArn;
                    }

                    // Reset the Baseline
                    if (askYesNo("Do you want to reset the Control Tower Baseline?
 (y/n): ")) {
                        String operationId =

 actions.resetEnabledBaselineAsync(enabledBaselineId).join();
                        System.out.println("Reset baseline operation ID: " +
 operationId);
                    }

                    if (askYesNo("Do you want to disable the Control Tower Baseline?
 (y/n): ")) {
```

```
                        String operationId =

actions.disableBaselineAsync(enabledBaselineId).join();
                        System.out.println("Disabled baseline operation ID: " +
operationId);

                        System.out.println("Now we will re-enable the baseline and
wait 1 minute before making the call...");
                        try {
                            Thread.sleep(Duration.ofMinutes(1).toMillis());
                        } catch (InterruptedException e) {
                            Thread.currentThread().interrupt();
                            System.out.println("Wait interrupted");
                        }
                        String reEnabledBaselineId = actions.enableBaselineAsync(
                                ouArn,
                                baselineId,  // reuse baseline definition ARN
                                "5.0"
                        ).join();

                        System.out.println("Re-enabled baseline operation ID: " +
reEnabledBaselineId);
                    }
                }
            }

            // ----------------------------
            // Step 3: Controls
            // ----------------------------
            System.out.println(DASHES);
            System.out.println("Step 3: Managing Controls:");
            waitForInputToContinue(scanner);

            List<ControlSummary> controls =
                    actions.listControlsAsync().join();

            System.out.println("\nListing first 5 available Controls:");
            for (int i = 0; i < Math.min(5, controls.size()); i++) {
                ControlSummary c = controls.get(i);
                System.out.println("%d. %s - %s".formatted(i + 1, c.name(),
c.arn()));
            }

            if (useLandingZone) {
```

```
                waitForInputToContinue(scanner);

                List<EnabledControlSummary> enabledControls =
                        actions.listEnabledControlsAsync(ouArn).join();

                System.out.println("\nListing enabled controls:");
                for (int i = 0; i < enabledControls.size(); i++) {
                    System.out.println("%d. %s".formatted(i + 1,
enabledControls.get(i).controlIdentifier()));
                }

                String controlArnToEnable = null;
                for (ControlSummary control : controls) {
                    boolean enabled = enabledControls.stream()
                            .anyMatch(ec ->
ec.controlIdentifier().equals(control.arn()));
                    if (!enabled) {
                        controlArnToEnable = control.arn();
                        break;
                    }
                }

                waitForInputToContinue(scanner);
                if (controlArnToEnable != null &&
                        askYesNo("Do you want to enable the control " +
controlArnToEnable + "? (y/n): ")) {

                    String operationId =
                            actions.enableControlAsync(controlArnToEnable,
ouArn).join();

                    System.out.println("Enabled control with operation ID: " +
operationId);
                }

                waitForInputToContinue(scanner);

                if (controlArnToEnable != null &&
                        askYesNo("Do you want to disable the control? (y/n): ")) {

                    String operationId =
                            actions.disableControlAsync(controlArnToEnable,
ouArn).join();
```

```
                    System.out.println("Disable operation ID: " + operationId);
                }
            }
            System.out.println("\nThis concludes the example scenario.");
            System.out.println("Thanks for watching!");
            System.out.println(DASHES);

        } catch (CompletionException e) {
            Throwable cause = e.getCause() != null ? e.getCause() : e;
            System.out.println("Scenario failed: " + cause.getMessage());
            throw e; // bubble up for tests / callers
        } catch (Exception e) {
            System.out.println("Unexpected error running scenario: " +
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    private static void waitForInputToContinue(Scanner sc) {
        System.out.println("\nEnter 'c' then <ENTER> to continue:");
        while (true) {
            String input = sc.nextLine();
            if ("c".equalsIgnoreCase(input.trim())) {
                System.out.println("Continuing...");
                break;
            }
        }
    }
}

public class ControlTowerActions {
    private static ControlCatalogAsyncClient controlCatalogAsyncClient;
    private static ControlTowerAsyncClient controlTowerAsyncClient;
    private static OrganizationsAsyncClient orgAsyncClient;

    private static OrganizationsAsyncClient getAsyncOrgClient() {
        if (orgAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                    .maxConcurrency(50)
                    .connectionTimeout(Duration.ofSeconds(60))
                    .readTimeout(Duration.ofSeconds(60))
                    .writeTimeout(Duration.ofSeconds(60))
                    .build();
```

```
            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                    .apiCallTimeout(Duration.ofMinutes(2))
                    .apiCallAttemptTimeout(Duration.ofSeconds(90))
                    .build();

            orgAsyncClient = OrganizationsAsyncClient.builder()
                    .httpClient(httpClient)
                    .overrideConfiguration(overrideConfig)
                    .build();
        }
        return orgAsyncClient;
    }

    private static ControlCatalogAsyncClient getAsyncCatClient() {
        if (controlCatalogAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                    .maxConcurrency(100)
                    .connectionTimeout(Duration.ofSeconds(60))
                    .readTimeout(Duration.ofSeconds(60))
                    .writeTimeout(Duration.ofSeconds(60))
                    .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                    .apiCallTimeout(Duration.ofMinutes(2))
                    .apiCallAttemptTimeout(Duration.ofSeconds(90))
                    .retryStrategy(RetryMode.STANDARD)
                    .build();

            controlCatalogAsyncClient = ControlCatalogAsyncClient.builder()
                    .httpClient(httpClient)
                    .overrideConfiguration(overrideConfig)
                    .build();
        }
        return controlCatalogAsyncClient;
    }

    private static ControlTowerAsyncClient getAsyncClient() {
        if (controlTowerAsyncClient == null) {

            SdkAsyncHttpClient httpClient =
                    AwsCrtAsyncHttpClient.builder()
                            .maxConcurrency(100)
```

```
                        .connectionTimeout(Duration.ofSeconds(60))
                        .build();

            ClientOverrideConfiguration overrideConfig =
                    ClientOverrideConfiguration.builder()
                            .apiCallTimeout(Duration.ofMinutes(2))
                            .apiCallAttemptTimeout(Duration.ofSeconds(90))
                            .retryStrategy(RetryMode.STANDARD)
                            .build();

            controlTowerAsyncClient =
                    ControlTowerAsyncClient.builder()
                            .httpClient(httpClient)
                            .overrideConfiguration(overrideConfig)
                            .build();
        }

        return controlTowerAsyncClient;
    }

    public record OrgSetupResult(String orgId, String sandboxOuArn) {
    }

    public CompletableFuture<OrgSetupResult> setupOrganizationAsync() {
        System.out.println("Starting organization setup…");

        OrganizationsAsyncClient client = getAsyncOrgClient();

        // Step 1: Describe or create organization
        CompletableFuture<Organization> orgFuture = client.describeOrganization()
                .thenApply(desc -> {
                    System.out.println("Organization exists: " +
desc.organization().id());
                    return desc.organization();
                })
                .exceptionallyCompose(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;
                    if (cause instanceof AwsServiceException awsEx &&

"AWSOrganizationsNotInUseException".equals(awsEx.awsErrorDetails().errorCode())) {
                        System.out.println("No organization found. Creating one…");
                        return
client.createOrganization(CreateOrganizationRequest.builder()
                                        .featureSet(OrganizationFeatureSet.ALL)
```

```
                                        .build())
                                .thenApply(createResp -> {
                                    System.out.println("Created organization: {}" +
createResp.organization().id());
                                    return createResp.organization();
                                });
                    }
                    return CompletableFuture.failedFuture(
                            new CompletionException("Failed to describe or create
organization", cause)
                    );
                });

        // Step 2: Locate Sandbox OU
        return orgFuture.thenCompose(org -> {
            String orgId = org.id();
            System.out.println("Organization ID: {}" + orgId);

            return client.listRoots()
                    .thenCompose(rootsResp -> {
                        if (rootsResp.roots().isEmpty()) {
                            return CompletableFuture.failedFuture(
                                    new RuntimeException("No root found in
organization")
                            );
                        }
                        String rootId = rootsResp.roots().get(0).id();

                        ListOrganizationalUnitsForParentRequest ouRequest =
                                ListOrganizationalUnitsForParentRequest.builder()
                                        .parentId(rootId)
                                        .build();

                        ListOrganizationalUnitsForParentPublisher paginator =

client.listOrganizationalUnitsForParentPaginator(ouRequest);

                        AtomicReference<String> sandboxOuArnRef = new
AtomicReference<>();
                        return paginator.subscribe(page -> {
                                    for (OrganizationalUnit ou :
page.organizationalUnits()) {
                                        if ("Sandbox".equals(ou.name())) {
                                            sandboxOuArnRef.set(ou.arn());
```

```
                                            System.out.println("Found Sandbox OU: "
 + ou.id());
                                            break;
                                        }
                                    }
                                })
                                .thenApply(v -> {
                                    String sandboxArn = sandboxOuArnRef.get();
                                    if (sandboxArn == null) {
                                        System.out.println("Sandbox OU not found.");
                                    }
                                    return new OrgSetupResult(orgId, sandboxArn);
                                });
                    });
        }).exceptionally(ex -> {
            Throwable cause = ex.getCause() != null ? ex.getCause() : ex;
            System.out.println("Failed to setup organization: {}" +
 cause.getMessage());
            throw new CompletionException(cause);
        });
    }

    /**
     * Lists all landing zones using pagination to retrieve complete results.
     *
     * @return a list of all landing zones
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<LandingZoneSummary>> listLandingZonesAsync() {
        System.out.println("Starting list landing zones paginator…");

        ListLandingZonesRequest request = ListLandingZonesRequest.builder().build();
        ListLandingZonesPublisher paginator =
 getAsyncClient().listLandingZonesPaginator(request);
        List<LandingZoneSummary> landingZones = new ArrayList<>();

        return paginator.subscribe(response -> {
                    if (response.landingZones() != null && !
response.landingZones().isEmpty()) {
                        response.landingZones().forEach(lz -> {
                            System.out.println("Landing zone ARN: " + lz.arn());
                            landingZones.add(lz);
                        });
```

```
                    } else {
                        System.out.println("Page contained no landing zones.");
                    }
                })
                .thenRun(() -> System.out.println("Successfully retrieved "+
landingZones.size() + " landing zones." ))
                .thenApply(v -> landingZones)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();
                        switch (errorCode) {
                            case "AccessDeniedException":
                                throw new CompletionException(
                                        "Access denied when listing landing zones: "
+ e.getMessage(), e);
                            default:
                                throw new CompletionException(
                                        "Error listing landing zones: " +
e.getMessage(), e);
                        }
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error listing landing zones: " +
cause.getMessage(), cause);
                    }

                    throw new CompletionException("Failed to list landing zones",
cause);
                });
    }


    /**
     * Lists all available baselines using pagination to retrieve complete results.
     *
     * @return a list of all baselines
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<BaselineSummary>> listBaselinesAsync() {
```

```
        System.out.println("Starting list baselines paginator…");
        ListBaselinesRequest request = ListBaselinesRequest.builder().build();
        ListBaselinesPublisher paginator =
                getAsyncClient().listBaselinesPaginator(request);

        List<BaselineSummary> baselines = new ArrayList<>();
        return paginator.subscribe(response -> {
                    if (response.baselines() != null && !
response.baselines().isEmpty()) {
                        response.baselines().forEach(baseline -> {
                            baselines.add(baseline);
                        });
                    } else {
                        System.out.println("Page contained no baselines.");
                    }
                })
                .thenRun(() ->
                        System.out.println("Successfully listed baselines. Total: "
 + baselines.size())
                )
                .thenApply(v -> baselines)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        if ("AccessDeniedException".equals(errorCode)) {
                            throw new CompletionException(
                                    "Access denied when listing baselines:
 %s".formatted(e.getMessage()),
                                    e
                            );
                        }

                        throw new CompletionException(
                                "Error listing baselines:
 %s".formatted(e.getMessage()),
                                e
                        );
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
```

```
                                "SDK error listing baselines:
%s".formatted(cause.getMessage()),
                                cause
                        );
                    }

                    throw new CompletionException("Failed to list baselines",
cause);
                });
    }

    /**
     * Lists all enabled baselines using pagination to retrieve complete results.
     *
     * @return a list of all enabled baselines
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<EnabledBaselineSummary>>
listEnabledBaselinesAsync() {
        System.out.println("Starting list enabled baselines paginator…");

        ListEnabledBaselinesRequest request =
                ListEnabledBaselinesRequest.builder().build();

        ListEnabledBaselinesPublisher paginator =
                getAsyncClient().listEnabledBaselinesPaginator(request);

        List<EnabledBaselineSummary> enabledBaselines = new ArrayList<>();
        return paginator.subscribe(response -> {
                    if (response.enabledBaselines() != null
                            && !response.enabledBaselines().isEmpty()) {

                        response.enabledBaselines().forEach(baseline -> {
                            enabledBaselines.add(baseline);
                        });
                    } else {
                        System.out.println("Page contained no enabled baselines.");
                    }
                })
                .thenRun(() ->
                        System.out.println(
                                "Successfully listed enabled baselines. Total: " +
                                        enabledBaselines.size()
```

```
                        )
                )
                .thenApply(v -> enabledBaselines)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        if ("AccessDeniedException".equals(errorCode)) {
                            throw new CompletionException(
                                    "Access denied when listing enabled baselines:
%s".formatted(e.getMessage()), e);
                        }

                        throw new CompletionException(
                                "Error listing enabled baselines: %s"
                                        .formatted(e.getMessage()),
                                e
                        );
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error listing enabled baselines: %s"
                                        .formatted(cause.getMessage()),
                                cause
                        );
                    }

                    throw new CompletionException(
                            "Failed to list enabled baselines",
                            cause
                    );
                });
    }


    /**
     * Asynchronously enables a baseline for the specified target if not already
enabled.
     *
     * @param targetIdentifier       The ARN of the target (OU or account).
     * @param baselineIdentifier     The baseline definition ARN to enable.
```

```
    * @param baselineVersion        The baseline version to enable.
    * @return A CompletableFuture containing the enabled baseline ARN, or null if
already enabled.
    */
   public CompletableFuture<String> enableBaselineAsync(
           String targetIdentifier,
           String baselineIdentifier,
           String baselineVersion
   ) {
       EnableBaselineRequest request = EnableBaselineRequest.builder()
               .baselineIdentifier(baselineIdentifier)
               .baselineVersion(baselineVersion)
               .targetIdentifier(targetIdentifier)
               .build();

       return getAsyncClient().enableBaseline(request)
               .handle((resp, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                       if (cause instanceof ControlTowerException e) {
                           String code = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorCode() : "UNKNOWN";
                           String msg = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorMessage() : e.getMessage();

                           if ("ValidationException".equals(code) &&
msg.contains("already enabled")) {
                               System.out.println("Baseline is already enabled for
this target # fetching ARN...");
                               return fetchEnabledBaselineArn(targetIdentifier,
baselineIdentifier)
                                       .join(); // fetch existing ARN synchronously
                           }

                           throw new RuntimeException("Error enabling baseline: " +
code + " - " + msg, e);
                       }

                       throw new RuntimeException("Unexpected error enabling
baseline: " + cause.getMessage(), cause);
                   }

                   return resp;
```

```
                })
                .thenCompose(result -> {
                    if (result instanceof EnableBaselineResponse resp) {
                        String operationId = resp.operationIdentifier();
                        String enabledBaselineArn = resp.arn();
                        System.out.println("Baseline enable started. ARN: " +
enabledBaselineArn
                                + ", operation ID: " + operationId);

                        // Inline polling
                        return CompletableFuture.supplyAsync(() -> {
                            while (true) {
                                GetBaselineOperationRequest opReq =
GetBaselineOperationRequest.builder()
                                        .operationIdentifier(operationId)
                                        .build();

                                GetBaselineOperationResponse opResp =
getAsyncClient().getBaselineOperation(opReq).join();
                                BaselineOperation op = opResp.baselineOperation();
                                BaselineOperationStatus status = op.status();
                                System.out.println("Operation " + operationId + "
status: " + status);

                                if (status == BaselineOperationStatus.SUCCEEDED) {
                                    return enabledBaselineArn;
                                } else if (status == BaselineOperationStatus.FAILED)
{
                                    String opId = op.operationIdentifier();
                                    String reason = op.statusMessage() != null ?
op.statusMessage() : "No failure reason provided";
                                    throw new RuntimeException("Baseline operation
failed (ID: " + opId + "), status: "
                                            + status + ", reason: " + reason);
                                }

                                try {
                                    Thread.sleep(Duration.ofSeconds(15).toMillis());
                                } catch (InterruptedException e) {
                                    Thread.currentThread().interrupt();
                                    throw new RuntimeException(e);
                                }
                            }
                        });
```

```
                    } else if (result instanceof String existingArn) {
                        // Already enabled branch
                        return CompletableFuture.completedFuture(existingArn);
                    }

                    return CompletableFuture.completedFuture(null);
                });
    }


    /**
     * Fetches the ARN of an already-enabled baseline for the target asynchronously.
     */
    private CompletableFuture<String> fetchEnabledBaselineArn(String
targetIdentifier, String baselineIdentifier) {
        return
getAsyncClient().listEnabledBaselines(ListEnabledBaselinesRequest.builder().build())
                .thenApply(listResp -> {
                    for (EnabledBaselineSummary eb : listResp.enabledBaselines()) {
                        if (baselineIdentifier.equals(eb.baselineIdentifier())
                                && targetIdentifier.equals(eb.targetIdentifier())) {
                            return eb.arn();
                        }
                    }
                    return null; // not yet available
                });
    }


    /**
     * Disables a baseline for a specified target.
     *
     * @param enabledBaselineIdentifier the identifier of the enabled baseline to
disable
     * @return the operation identifier
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<String> disableBaselineAsync(String
enabledBaselineIdentifier) {

        System.out.println("Starting disable of enabled baseline…");
        System.out.println("This operation will check the status every 15 seconds
until it completes (SUCCEEDED or FAILED).");
```

```
        DisableBaselineRequest request = DisableBaselineRequest.builder()
                .enabledBaselineIdentifier(enabledBaselineIdentifier)
                .build();

        return getAsyncClient().disableBaseline(request)
                .thenCompose(response -> {
                    String operationId = response.operationIdentifier();
                    System.out.println("Disable baseline operation ID: " +
operationId);

                    // CompletableFuture that will be completed when operation
finishes
                    CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                    // Polling loop
                    Runnable poller = new Runnable() {
                        @Override
                        public void run() {
                            getBaselineOperationAsync(operationId)
                                    .thenAccept(statusObj -> {
                                        String status = statusObj.toString(); //
Convert enum/status to string for printing
                                        System.out.println("Current disable
operation status: " + status + " # waiting for SUCCEEDED or FAILED...");

                                        if ("SUCCEEDED".equalsIgnoreCase(status) ||
"FAILED".equalsIgnoreCase(status)) {
                                            System.out.println("Disable operation
finished with status: " + status);
                                            resultFuture.complete(operationId);
                                        } else {
                                            // Schedule next poll in 15 seconds
                                            CompletableFuture.delayedExecutor(15,
TimeUnit.SECONDS)
                                                    .execute(this);
                                        }
                                    })
                                    .exceptionally(ex -> {
                                        System.out.println("Error checking baseline
operation status: " + ex.getMessage());
                                        resultFuture.completeExceptionally(ex);
                                        return null;
```

```
                                    });
                        }
                    };

                    // Start first poll immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorCode() : "UNKNOWN";
                        String errorMessage = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorMessage() : e.getMessage();

                        System.out.println("ControlTowerException caught while
disabling baseline: Code=" + errorCode + ", Message=" + errorMessage);
                        return null;
                    }

                    if (cause instanceof SdkException sdkEx) {
                        System.out.println("SDK exception caught while disabling
baseline: " + sdkEx.getMessage());
                        return null;
                    }

                    System.out.println("Unexpected exception while disabling
baseline: " + cause.getMessage());
                    return null;
                });
    }



    /**
     * Gets the status of a baseline operation.
     *
     * @param operationIdentifier the identifier of the operation
     * @return the operation status
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
```

```
     */
    public CompletableFuture<BaselineOperationStatus> getBaselineOperationAsync(
            String operationIdentifier) {

        GetBaselineOperationRequest request = GetBaselineOperationRequest.builder()
                .operationIdentifier(operationIdentifier)
                .build();

        return getAsyncClient().getBaselineOperation(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null
                                ? exception.getCause()
                                : exception;

                        if (cause instanceof ControlTowerException e) {
                            String errorCode = e.awsErrorDetails().errorCode();

                            if ("ResourceNotFoundException".equals(errorCode)) {
                                throw new CompletionException(
                                        "Baseline operation not found: %s"
                                                .formatted(e.getMessage()),
                                        e
                                );
                            }

                            throw new CompletionException(
                                    "Error getting baseline operation status: %s"
                                            .formatted(e.getMessage()),
                                    e
                            );
                        }

                        if (cause instanceof SdkException) {
                            throw new CompletionException(
                                    "SDK error getting baseline operation status:
%s"
                                            .formatted(cause.getMessage()),
                                    cause
                            );
                        }

                        throw new CompletionException(
                                "Failed to get baseline operation status",
```

```
                                cause
                        );
                    }
                })
                .thenApply(response -> {
                    BaselineOperationStatus status =
                            response.baselineOperation().status();
                    return status;
                });
    }


    /**
     * Lists all enabled controls for a specific target using pagination.
     *
     * @param targetIdentifier the identifier of the target (e.g., OU ARN)
     * @return a list of enabled controls
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<EnabledControlSummary>>
 listEnabledControlsAsync(String targetIdentifier) {
        System.out.println("Starting list enabled controls paginator for target " +
 targetIdentifier);
        ListEnabledControlsRequest request = ListEnabledControlsRequest.builder()
                .targetIdentifier(targetIdentifier)
                .build();

        ListEnabledControlsPublisher paginator =
 getAsyncClient().listEnabledControlsPaginator(request);
        List<EnabledControlSummary> enabledControls = new ArrayList<>();

        // Subscribe to the paginator asynchronously
        return paginator.subscribe(response -> {
                    if (response.enabledControls() != null && !
response.enabledControls().isEmpty()) {
                        response.enabledControls().forEach(control -> {
                            enabledControls.add(control);
                        });
                    } else {
                        System.out.println("Page contained no enabled controls.");
                    }
                })
                .thenRun(() -> System.out.println(
```

```
                        "Successfully retrieved "+enabledControls.size() +" enabled
controls for target "+targetIdentifier
                ))
                .thenApply(v -> enabledControls)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        switch (errorCode) {
                            case "AccessDeniedException":
                                throw new CompletionException(
                                        "Access denied when listing enabled
controls: %s".formatted(e.getMessage()), e);

                            case "ResourceNotFoundException":
                                if (e.getMessage() != null &&
e.getMessage().contains("not registered with AWS Control Tower")) {
                                    throw new CompletionException(
                                            "Control Tower must be enabled to work
with controls", e);
                                }
                                throw new CompletionException(
                                        "Target not found when listing enabled
controls: %s".formatted(e.getMessage()), e);

                            default:
                                throw new CompletionException(
                                        "Error listing enabled controls:
%s".formatted(e.getMessage()), e);
                        }
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error listing enabled controls:
%s".formatted(cause.getMessage()), cause);
                    }

                    throw new CompletionException("Failed to list enabled controls",
cause);
                });
    }
```

```
   /**
    * Enables a control for a specified target.
    *
    * @param controlIdentifier the identifier of the control to enable
    * @param targetIdentifier  the identifier of the target (e.g., OU ARN)
    * @return the operation identifier
    * @throws ControlTowerException if a service-specific error occurs
    * @throws SdkException          if an SDK error occurs
    */
   public CompletableFuture<String> enableControlAsync(
           String controlIdentifier,
           String targetIdentifier) {

       EnableControlRequest request = EnableControlRequest.builder()
               .controlIdentifier(controlIdentifier)
               .targetIdentifier(targetIdentifier)
               .build();

       return getAsyncClient().enableControl(request)
               .thenCompose(response -> {
                   String operationId = response.operationIdentifier();
                   System.out.println("Enable control operation started. Operation
ID: " + operationId);

                   CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                   Runnable poller = new Runnable() {
                       @Override
                       public void run() {
                           getControlOperationAsync(operationId)
                                   .thenAccept(status -> {
                                       System.out.println("Control operation
status: " + status);

                                       if (status ==
ControlOperationStatus.SUCCEEDED
                                               || status ==
ControlOperationStatus.FAILED) {
                                           resultFuture.complete(operationId);
                                       } else {
                                           // Poll again after 30 seconds
```

```
                                            CompletableFuture.delayedExecutor(30,
TimeUnit.SECONDS)
                                                    .execute(this);
                                        }
                                    })
                                    .exceptionally(ex -> {
                                        resultFuture.completeExceptionally(ex);
                                        return null;
                                    });
                        }
                    };

                    // Start polling immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();
                        String message = e.getMessage() != null ? e.getMessage() :
"";

                        if ("ValidationException".equals(errorCode)
                                && message.contains("already enabled")) {
                            System.out.println("Control is already enabled for this
target");
                            return null;
                        }

                        if ("ResourceNotFoundException".equals(errorCode)
                                && message.contains("not registered with AWS Control
Tower")) {
                            System.out.println(
                                    "Control Tower must be enabled to work with
controls.");
                            return null;
                        }

                        throw new CompletionException(
                                "Couldn't enable control: %s".formatted(message),
                                e
```

```
                        );
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error enabling control: %s"
                                        .formatted(cause.getMessage()),
                                cause
                        );
                    }

                    throw new CompletionException(
                            "Failed to enable control",
                            cause
                    );
                });
    }


    /**
     * Disables a control for a specified target.
     *
     * @param controlIdentifier the identifier of the control to disable
     * @param targetIdentifier  the identifier of the target (e.g., OU ARN)
     * @return the operation identifier
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<String> disableControlAsync(
            String controlIdentifier,
            String targetIdentifier) {

        DisableControlRequest request = DisableControlRequest.builder()
                .controlIdentifier(controlIdentifier)
                .targetIdentifier(targetIdentifier)
                .build();

        return getAsyncClient().disableControl(request)
                .thenCompose(response -> {
                    String operationId = response.operationIdentifier();
                    System.out.println("Disable control operation started. Operation
ID: " + operationId);
```

```
                    CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                    Runnable poller = new Runnable() {
                        @Override
                        public void run() {
                            getControlOperationAsync(operationId)
                                    .thenAccept(status -> {
                                        System.out.println("Control operation
status: " + status);

                                        if (status ==
ControlOperationStatus.SUCCEEDED
                                                || status ==
ControlOperationStatus.FAILED) {
                                            resultFuture.complete(operationId);
                                        } else {
                                            // poll again after 30 seconds
                                            CompletableFuture.delayedExecutor(30,
TimeUnit.SECONDS)
                                                    .execute(this);
                                        }
                                    })
                                    .exceptionally(ex -> {
                                        resultFuture.completeExceptionally(ex);
                                        return null;
                                    });
                        }
                    };

                    // start polling immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        if ("ResourceNotFoundException".equals(errorCode)) {
                            // SPEC: notify user and continue
```

```
                            System.out.println("Control not found for disabling: " +
e.getMessage());
                            return null;
                        }

                        throw new CompletionException(
                                "Error disabling control: " + e.getMessage(), e);
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error disabling control: " +
cause.getMessage(), cause);
                    }

                    throw new CompletionException(
                            "Failed to disable control", cause);
                });
    }



    /**
     * Gets the status of a control operation.
     *
     * @param operationIdentifier the identifier of the operation
     * @return the operation status
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<ControlOperationStatus> getControlOperationAsync(
            String operationIdentifier) {

        GetControlOperationRequest request = GetControlOperationRequest.builder()
                .operationIdentifier(operationIdentifier)
                .build();

        return getAsyncClient().getControlOperation(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof ControlTowerException e) {
```

```
                            String errorCode = e.awsErrorDetails().errorCode();

                            if ("ResourceNotFoundException".equals(errorCode)) {
                                throw new CompletionException(
                                        "Control operation not found:
%s".formatted(e.getMessage()),
                                        e
                                );
                            }

                            throw new CompletionException(
                                    "Error getting control operation status:
%s".formatted(e.getMessage()),
                                    e
                            );
                        }

                        if (cause instanceof SdkException) {
                            throw new CompletionException(
                                    "SDK error getting control operation status:
%s".formatted(cause.getMessage()),
                                    cause
                            );
                        }

                        throw new CompletionException("Failed to get control
operation status", cause);
                    }
                })
                .thenApply(response -> response.controlOperation().status());
    }


    /**
     * Lists all controls in the Control Tower control catalog.
     *
     * @return a list of controls
     * @throws SdkException if a service-specific error occurs
     */
    public CompletableFuture<List<ControlSummary>> listControlsAsync() {
        System.out.println("Starting list controls paginator…");

        ListControlsRequest request = ListControlsRequest.builder().build();
```

```
        ListControlsPublisher paginator =
 getAsyncCatClient().listControlsPaginator(request);
        List<ControlSummary> controls = new ArrayList<>();

        return paginator.subscribe(response -> {
                    if (response.controls() != null && !
response.controls().isEmpty()) {
                        response.controls().forEach(control -> {
                            controls.add(control);
                        });
                    } else {
                        System.out.println("Page contained no controls.");
                    }
                })
                .thenRun(() -> System.out.println("Successfully retrieved " +
 controls.size() +" controls."))
                .thenApply(v -> controls)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof SdkException sdkEx) {
                        if (sdkEx.getMessage() != null &&
 sdkEx.getMessage().contains("AccessDeniedException")) {
                            throw new CompletionException(
                                    "Access denied when listing controls. Please
 ensure you have the necessary permissions.",
                                    sdkEx
                            );
                        } else {
                            throw new CompletionException(
                                    "SDK error listing controls:
 %s".formatted(sdkEx.getMessage()),
                                    sdkEx
                            );
                        }
                    }

                    throw new CompletionException("Failed to list controls", cause);
                });
    }

    /**
     * Resets an enabled baseline for a specific target.
     *
```

```
    * @param enabledBaselineIdentifier the identifier of the enabled baseline to
reset
    * @return the operation identifier
    * @throws ControlTowerException if a service-specific error occurs
    * @throws SdkException          if an SDK error occurs
    */
   public CompletableFuture<String> resetEnabledBaselineAsync(String
enabledBaselineIdentifier) {

       System.out.println("Starting reset of enabled baseline…");
       System.out.println("This operation will check the status every 15 seconds
until it completes (SUCCEEDED or FAILED).");

       ResetEnabledBaselineRequest request = ResetEnabledBaselineRequest.builder()
               .enabledBaselineIdentifier(enabledBaselineIdentifier)
               .build();

       return getAsyncClient().resetEnabledBaseline(request)
               .thenCompose(response -> {
                   String operationId = response.operationIdentifier();
                   System.out.println("Reset enabled baseline operation ID: " +
operationId);

                   // Polling loop
                   CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                   Runnable poller = new Runnable() {
                       @Override
                       public void run() {
                           getBaselineOperationAsync(operationId)
                                   .thenAccept(statusObj -> {
                                       String status = statusObj.toString(); //
Convert enum/status to string for printing
                                       System.out.println("Current baseline
operation status: " + status + " # waiting for SUCCEEDED or FAILED...");

                                       if ("SUCCEEDED".equalsIgnoreCase(status) ||
"FAILED".equalsIgnoreCase(status)) {
                                           System.out.println("Baseline operation
finished with status: " + status);
                                           resultFuture.complete(operationId);
                                       } else {
                                           // Schedule next poll in 15 seconds
```

```
                                            CompletableFuture.delayedExecutor(15,
TimeUnit.SECONDS)
                                                    .execute(this);
                                        }
                                    })
                                    .exceptionally(ex -> {
                                        System.out.println("Error checking baseline
operation status: " + ex.getMessage());
                                        resultFuture.completeExceptionally(ex);
                                        return null;
                                    });
                        }
                    };

                    // Start first poll immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorCode() : "UNKNOWN";
                        String errorMessage = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorMessage() : e.getMessage();

                        System.out.println("ControlTowerException caught: Code=" +
errorCode + ", Message=" + errorMessage);
                        return null;
                    }

                    if (cause instanceof SdkException sdkEx) {
                        System.out.println("SDK exception caught: " +
sdkEx.getMessage());
                        return null;
                    }

                    System.out.println("Unexpected exception resetting baseline: " +
cause.getMessage());
                    return null;
                });
    }
```

```
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateLandingZone
  - DeleteLandingZone
  - DisableBaseline
  - DisableControl
  - EnableBaseline
  - EnableControl
  - GetControlOperation
  - GetLandingZoneOperation
  - ListBaselines
  - ListEnabledBaselines
  - ListEnabledControls
  - ListLandingZones
  - ResetEnabledBaseline

Acciones

`DisableBaseline`

En el siguiente ejemplo de código, se muestra cómo utilizar `DisableBaseline`.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Disables a baseline for a specified target.
```

```
    *
    * @param enabledBaselineIdentifier the identifier of the enabled baseline to
disable
    * @return the operation identifier
    * @throws ControlTowerException if a service-specific error occurs
    * @throws SdkException          if an SDK error occurs
    */
   public CompletableFuture<String> disableBaselineAsync(String
enabledBaselineIdentifier) {

       System.out.println("Starting disable of enabled baseline…");
       System.out.println("This operation will check the status every 15 seconds
until it completes (SUCCEEDED or FAILED).");

       DisableBaselineRequest request = DisableBaselineRequest.builder()
               .enabledBaselineIdentifier(enabledBaselineIdentifier)
               .build();

       return getAsyncClient().disableBaseline(request)
               .thenCompose(response -> {
                   String operationId = response.operationIdentifier();
                   System.out.println("Disable baseline operation ID: " +
operationId);

                   // CompletableFuture that will be completed when operation
finishes
                   CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                   // Polling loop
                   Runnable poller = new Runnable() {
                       @Override
                       public void run() {
                           getBaselineOperationAsync(operationId)
                                   .thenAccept(statusObj -> {
                                       String status = statusObj.toString(); //
Convert enum/status to string for printing
                                       System.out.println("Current disable
operation status: " + status + " # waiting for SUCCEEDED or FAILED...");

                                       if ("SUCCEEDED".equalsIgnoreCase(status) ||
"FAILED".equalsIgnoreCase(status)) {
                                           System.out.println("Disable operation
finished with status: " + status);
```

```
                                        resultFuture.complete(operationId);
                                    } else {
                                        // Schedule next poll in 15 seconds
                                        CompletableFuture.delayedExecutor(15,
TimeUnit.SECONDS)
                                                .execute(this);
                                    }
                                })
                                .exceptionally(ex -> {
                                    System.out.println("Error checking baseline
operation status: " + ex.getMessage());
                                    resultFuture.completeExceptionally(ex);
                                    return null;
                                });
                        }
                    };

                    // Start first poll immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorCode() : "UNKNOWN";
                        String errorMessage = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorMessage() : e.getMessage();

                        System.out.println("ControlTowerException caught while
disabling baseline: Code=" + errorCode + ", Message=" + errorMessage);
                        return null;
                    }

                    if (cause instanceof SdkException sdkEx) {
                        System.out.println("SDK exception caught while disabling
baseline: " + sdkEx.getMessage());
                        return null;
                    }

                    System.out.println("Unexpected exception while disabling
baseline: " + cause.getMessage());
```

```
                return null;
            });
    }
```

- Para obtener más información sobre la API, consulta DisableBaselinela Referencia AWS SDK for Java 2.x de la API.

`DisableControl`

En el siguiente ejemplo de código, se muestra cómo utilizar `DisableControl`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Disables a control for a specified target.
 *
 * @param controlIdentifier the identifier of the control to disable
 * @param targetIdentifier  the identifier of the target (e.g., OU ARN)
 * @return the operation identifier
 * @throws ControlTowerException if a service-specific error occurs
 * @throws SdkException          if an SDK error occurs
 */
public CompletableFuture<String> disableControlAsync(
        String controlIdentifier,
        String targetIdentifier) {

    DisableControlRequest request = DisableControlRequest.builder()
            .controlIdentifier(controlIdentifier)
            .targetIdentifier(targetIdentifier)
            .build();

    return getAsyncClient().disableControl(request)
```

```
                .thenCompose(response -> {
                    String operationId = response.operationIdentifier();
                    System.out.println("Disable control operation started. Operation
ID: " + operationId);

                    CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                    Runnable poller = new Runnable() {
                        @Override
                        public void run() {
                            getControlOperationAsync(operationId)
                                    .thenAccept(status -> {
                                        System.out.println("Control operation
status: " + status);

                                        if (status ==
ControlOperationStatus.SUCCEEDED
                                                || status ==
ControlOperationStatus.FAILED) {
                                            resultFuture.complete(operationId);
                                        } else {
                                            // poll again after 30 seconds
                                            CompletableFuture.delayedExecutor(30,
TimeUnit.SECONDS)
                                                    .execute(this);
                                        }
                                    })
                                    .exceptionally(ex -> {
                                        resultFuture.completeExceptionally(ex);
                                        return null;
                                    });
                        }
                    };

                    // start polling immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
```

```
                        String errorCode = e.awsErrorDetails().errorCode();

                        if ("ResourceNotFoundException".equals(errorCode)) {
                            // SPEC: notify user and continue
                            System.out.println("Control not found for disabling: " +
e.getMessage());
                            return null;
                        }

                        throw new CompletionException(
                                "Error disabling control: " + e.getMessage(), e);
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error disabling control: " +
cause.getMessage(), cause);
                    }

                    throw new CompletionException(
                            "Failed to disable control", cause);
                });
    }
```

- Para obtener más información sobre la API, consulta DisableControlla Referencia AWS SDK for Java 2.x de la API.

`EnableBaseline`

En el siguiente ejemplo de código, se muestra cómo utilizar `EnableBaseline`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously enables a baseline for the specified target if not already
enabled.
    *
    * @param targetIdentifier       The ARN of the target (OU or account).
    * @param baselineIdentifier     The baseline definition ARN to enable.
    * @param baselineVersion        The baseline version to enable.
    * @return A CompletableFuture containing the enabled baseline ARN, or null if
already enabled.
    */
   public CompletableFuture<String> enableBaselineAsync(
           String targetIdentifier,
           String baselineIdentifier,
           String baselineVersion
   ) {
       EnableBaselineRequest request = EnableBaselineRequest.builder()
               .baselineIdentifier(baselineIdentifier)
               .baselineVersion(baselineVersion)
               .targetIdentifier(targetIdentifier)
               .build();

       return getAsyncClient().enableBaseline(request)
               .handle((resp, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                       if (cause instanceof ControlTowerException e) {
                           String code = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorCode() : "UNKNOWN";
                           String msg = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorMessage() : e.getMessage();

                           if ("ValidationException".equals(code) &&
msg.contains("already enabled")) {
                               System.out.println("Baseline is already enabled for
this target # fetching ARN...");
                               return fetchEnabledBaselineArn(targetIdentifier,
baselineIdentifier)
                                       .join(); // fetch existing ARN synchronously
                           }
```

```
                            throw new RuntimeException("Error enabling baseline: " +
code + " - " + msg, e);
                        }

                        throw new RuntimeException("Unexpected error enabling
baseline: " + cause.getMessage(), cause);
                    }

                    return resp;
                })
                .thenCompose(result -> {
                    if (result instanceof EnableBaselineResponse resp) {
                        String operationId = resp.operationIdentifier();
                        String enabledBaselineArn = resp.arn();
                        System.out.println("Baseline enable started. ARN: " +
enabledBaselineArn
                                + ", operation ID: " + operationId);

                        // Inline polling
                        return CompletableFuture.supplyAsync(() -> {
                            while (true) {
                                GetBaselineOperationRequest opReq =
GetBaselineOperationRequest.builder()
                                        .operationIdentifier(operationId)
                                        .build();

                                GetBaselineOperationResponse opResp =
getAsyncClient().getBaselineOperation(opReq).join();
                                BaselineOperation op = opResp.baselineOperation();
                                BaselineOperationStatus status = op.status();
                                System.out.println("Operation " + operationId + "
status: " + status);

                                if (status == BaselineOperationStatus.SUCCEEDED) {
                                    return enabledBaselineArn;
                                } else if (status == BaselineOperationStatus.FAILED)
{
                                    String opId = op.operationIdentifier();
                                    String reason = op.statusMessage() != null ?
op.statusMessage() : "No failure reason provided";
                                    throw new RuntimeException("Baseline operation
failed (ID: " + opId + "), status: "
                                            + status + ", reason: " + reason);
                                }
```

```
                                try {
                                    Thread.sleep(Duration.ofSeconds(15).toMillis());
                                } catch (InterruptedException e) {
                                    Thread.currentThread().interrupt();
                                    throw new RuntimeException(e);
                                }
                            }
                        });
                    } else if (result instanceof String existingArn) {
                        // Already enabled branch
                        return CompletableFuture.completedFuture(existingArn);
                    }

                    return CompletableFuture.completedFuture(null);
                });
    }


    /**
     * Fetches the ARN of an already-enabled baseline for the target asynchronously.
     */
    private CompletableFuture<String> fetchEnabledBaselineArn(String
targetIdentifier, String baselineIdentifier) {
        return
getAsyncClient().listEnabledBaselines(ListEnabledBaselinesRequest.builder().build())
                .thenApply(listResp -> {
                    for (EnabledBaselineSummary eb : listResp.enabledBaselines()) {
                        if (baselineIdentifier.equals(eb.baselineIdentifier())
                                && targetIdentifier.equals(eb.targetIdentifier())) {
                            return eb.arn();
                        }
                    }
                    return null; // not yet available
                });
    }
```

- Para obtener más información sobre la API, consulta EnableBaselinela Referencia AWS SDK for Java 2.x de la API.

`EnableControl`

En el siguiente ejemplo de código, se muestra cómo utilizar `EnableControl`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Enables a control for a specified target.
     *
     * @param controlIdentifier the identifier of the control to enable
     * @param targetIdentifier  the identifier of the target (e.g., OU ARN)
     * @return the operation identifier
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<String> enableControlAsync(
            String controlIdentifier,
            String targetIdentifier) {

        EnableControlRequest request = EnableControlRequest.builder()
                .controlIdentifier(controlIdentifier)
                .targetIdentifier(targetIdentifier)
                .build();

        return getAsyncClient().enableControl(request)
                .thenCompose(response -> {
                    String operationId = response.operationIdentifier();
                    System.out.println("Enable control operation started. Operation
ID: " + operationId);

                    CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                    Runnable poller = new Runnable() {
                        @Override
                        public void run() {
```

```
                            getControlOperationAsync(operationId)
                                    .thenAccept(status -> {
                                        System.out.println("Control operation
status: " + status);

                                        if (status ==
ControlOperationStatus.SUCCEEDED
                                                || status ==
ControlOperationStatus.FAILED) {
                                            resultFuture.complete(operationId);
                                        } else {
                                            // Poll again after 30 seconds
                                            CompletableFuture.delayedExecutor(30,
TimeUnit.SECONDS)
                                                    .execute(this);
                                        }
                                    })
                                    .exceptionally(ex -> {
                                        resultFuture.completeExceptionally(ex);
                                        return null;
                                    });
                        }
                    };

                    // Start polling immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();
                        String message = e.getMessage() != null ? e.getMessage() :
"";

                        if ("ValidationException".equals(errorCode)
                                && message.contains("already enabled")) {
                            System.out.println("Control is already enabled for this
target");
                            return null;
                        }
```

```
                        if ("ResourceNotFoundException".equals(errorCode)
                                && message.contains("not registered with AWS Control
Tower")) {
                            System.out.println(
                                    "Control Tower must be enabled to work with
controls.");
                            return null;
                        }

                        throw new CompletionException(
                                "Couldn't enable control: %s".formatted(message),
                                e
                        );
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error enabling control: %s"
                                        .formatted(cause.getMessage()),
                                cause
                        );
                    }

                    throw new CompletionException(
                            "Failed to enable control",
                            cause
                    );
                });
    }
```

- Para obtener más información sobre la API, consulta EnableControlla Referencia AWS SDK for Java 2.x de la API.

`GetBaselineOperation`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetBaselineOperation`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Gets the status of a baseline operation.
 *
 * @param operationIdentifier the identifier of the operation
 * @return the operation status
 * @throws ControlTowerException if a service-specific error occurs
 * @throws SdkException          if an SDK error occurs
 */
public CompletableFuture<BaselineOperationStatus> getBaselineOperationAsync(
        String operationIdentifier) {

    GetBaselineOperationRequest request = GetBaselineOperationRequest.builder()
            .operationIdentifier(operationIdentifier)
            .build();

    return getAsyncClient().getBaselineOperation(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause() != null
                            ? exception.getCause()
                            : exception;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        if ("ResourceNotFoundException".equals(errorCode)) {
                            throw new CompletionException(
                                    "Baseline operation not found: %s"
                                            .formatted(e.getMessage()),
                                    e
                            );
                        }
```

```
                            throw new CompletionException(
                                    "Error getting baseline operation status: %s"
                                            .formatted(e.getMessage()),
                                    e
                            );
                        }

                        if (cause instanceof SdkException) {
                            throw new CompletionException(
                                    "SDK error getting baseline operation status:
%s"
                                            .formatted(cause.getMessage()),
                                    cause
                            );
                        }

                        throw new CompletionException(
                                "Failed to get baseline operation status",
                                cause
                        );
                    }
                })
                .thenApply(response -> {
                    BaselineOperationStatus status =
                            response.baselineOperation().status();
                    return status;
                });
    }
```

- Para obtener más información sobre la API, consulta GetBaselineOperationla Referencia AWS SDK for Java 2.x de la API.

`GetControlOperation`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetControlOperation`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Gets the status of a control operation.
     *
     * @param operationIdentifier the identifier of the operation
     * @return the operation status
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<ControlOperationStatus> getControlOperationAsync(
            String operationIdentifier) {

        GetControlOperationRequest request = GetControlOperationRequest.builder()
                .operationIdentifier(operationIdentifier)
                .build();

        return getAsyncClient().getControlOperation(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof ControlTowerException e) {
                            String errorCode = e.awsErrorDetails().errorCode();

                            if ("ResourceNotFoundException".equals(errorCode)) {
                                throw new CompletionException(
                                        "Control operation not found:
%s".formatted(e.getMessage()),
                                        e
                                );
                            }

                            throw new CompletionException(
```

```
                                    "Error getting control operation status:
%s".formatted(e.getMessage()),
                                    e
                            );
                        }

                        if (cause instanceof SdkException) {
                            throw new CompletionException(
                                    "SDK error getting control operation status:
%s".formatted(cause.getMessage()),
                                    cause
                            );
                        }

                        throw new CompletionException("Failed to get control
operation status", cause);
                    }
                })
                .thenApply(response -> response.controlOperation().status());
    }
```

- Para obtener más información sobre la API, consulta GetControlOperationla Referencia AWS SDK for Java 2.x de la API.

`ListBaselines`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListBaselines`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Lists all available baselines using pagination to retrieve complete results.
     *
```

```
     * @return a list of all baselines
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<BaselineSummary>> listBaselinesAsync() {
        System.out.println("Starting list baselines paginator…");
        ListBaselinesRequest request = ListBaselinesRequest.builder().build();
        ListBaselinesPublisher paginator =
                getAsyncClient().listBaselinesPaginator(request);

        List<BaselineSummary> baselines = new ArrayList<>();
        return paginator.subscribe(response -> {
                    if (response.baselines() != null && !
response.baselines().isEmpty()) {
                        response.baselines().forEach(baseline -> {
                            baselines.add(baseline);
                        });
                    } else {
                        System.out.println("Page contained no baselines.");
                    }
                })
                .thenRun(() ->
                        System.out.println("Successfully listed baselines. Total: "
 + baselines.size())
                )
                .thenApply(v -> baselines)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        if ("AccessDeniedException".equals(errorCode)) {
                            throw new CompletionException(
                                    "Access denied when listing baselines:
 %s".formatted(e.getMessage()),
                                    e
                            );
                        }

                        throw new CompletionException(
                                "Error listing baselines:
 %s".formatted(e.getMessage()),
                                e
```

```
                        );
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error listing baselines:
%s".formatted(cause.getMessage()),
                                cause
                        );
                    }

                    throw new CompletionException("Failed to list baselines",
cause);
                });
    }
```

- Para obtener más información sobre la API, consulta ListBaselinesla Referencia AWS SDK for Java 2.x de la API.

`ListEnabledBaselines`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListEnabledBaselines`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Lists all enabled baselines using pagination to retrieve complete results.
     *
     * @return a list of all enabled baselines
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<EnabledBaselineSummary>>
listEnabledBaselinesAsync() {
```

```
        System.out.println("Starting list enabled baselines paginator…");

        ListEnabledBaselinesRequest request =
                ListEnabledBaselinesRequest.builder().build();

        ListEnabledBaselinesPublisher paginator =
                getAsyncClient().listEnabledBaselinesPaginator(request);

        List<EnabledBaselineSummary> enabledBaselines = new ArrayList<>();
        return paginator.subscribe(response -> {
                    if (response.enabledBaselines() != null
                            && !response.enabledBaselines().isEmpty()) {

                        response.enabledBaselines().forEach(baseline -> {
                            enabledBaselines.add(baseline);
                        });
                    } else {
                        System.out.println("Page contained no enabled baselines.");
                    }
                })
                .thenRun(() ->
                        System.out.println(
                                "Successfully listed enabled baselines. Total: " +
                                        enabledBaselines.size()
                        )
                )
                .thenApply(v -> enabledBaselines)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        if ("AccessDeniedException".equals(errorCode)) {
                            throw new CompletionException(
                                    "Access denied when listing enabled baselines:
%s".formatted(e.getMessage()), e);
                        }

                        throw new CompletionException(
                                "Error listing enabled baselines: %s"
                                        .formatted(e.getMessage()),
                                e
                        );
```

```
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error listing enabled baselines: %s"
                                        .formatted(cause.getMessage()),
                                cause
                        );
                    }

                    throw new CompletionException(
                            "Failed to list enabled baselines",
                            cause
                    );
                });
    }
```

- Para obtener más información sobre la API, consulta ListEnabledBaselinesla Referencia AWS SDK for Java 2.x de la API.

`ListEnabledControls`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListEnabledControls`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Lists all enabled controls for a specific target using pagination.
     *
     * @param targetIdentifier the identifier of the target (e.g., OU ARN)
     * @return a list of enabled controls
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
```

```
     */
    public CompletableFuture<List<EnabledControlSummary>>
 listEnabledControlsAsync(String targetIdentifier) {
        System.out.println("Starting list enabled controls paginator for target " +
 targetIdentifier);
        ListEnabledControlsRequest request = ListEnabledControlsRequest.builder()
                .targetIdentifier(targetIdentifier)
                .build();

        ListEnabledControlsPublisher paginator =
 getAsyncClient().listEnabledControlsPaginator(request);
        List<EnabledControlSummary> enabledControls = new ArrayList<>();

        // Subscribe to the paginator asynchronously
        return paginator.subscribe(response -> {
                    if (response.enabledControls() != null && !
response.enabledControls().isEmpty()) {
                        response.enabledControls().forEach(control -> {
                            enabledControls.add(control);
                        });
                    } else {
                        System.out.println("Page contained no enabled controls.");
                    }
                })
                .thenRun(() -> System.out.println(
                        "Successfully retrieved "+enabledControls.size() +" enabled
 controls for target "+targetIdentifier
                ))
                .thenApply(v -> enabledControls)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        switch (errorCode) {
                            case "AccessDeniedException":
                                throw new CompletionException(
                                        "Access denied when listing enabled
 controls: %s".formatted(e.getMessage()), e);

                            case "ResourceNotFoundException":
                                if (e.getMessage() != null &&
 e.getMessage().contains("not registered with AWS Control Tower")) {
```

```
                                    throw new CompletionException(
                                            "Control Tower must be enabled to work
with controls", e);
                                }
                                throw new CompletionException(
                                        "Target not found when listing enabled
controls: %s".formatted(e.getMessage()), e);

                            default:
                                throw new CompletionException(
                                        "Error listing enabled controls:
%s".formatted(e.getMessage()), e);
                            }
                        }

                        if (cause instanceof SdkException) {
                            throw new CompletionException(
                                    "SDK error listing enabled controls:
%s".formatted(cause.getMessage()), cause);
                        }

                        throw new CompletionException("Failed to list enabled controls",
cause);
                    });
        }
```

- Para obtener más información sobre la API, consulta ListEnabledControlsla Referencia AWS SDK for Java 2.x de la API.

`ListLandingZones`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListLandingZones`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Lists all landing zones using pagination to retrieve complete results.
     *
     * @return a list of all landing zones
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<LandingZoneSummary>> listLandingZonesAsync() {
        System.out.println("Starting list landing zones paginator…");

        ListLandingZonesRequest request = ListLandingZonesRequest.builder().build();
        ListLandingZonesPublisher paginator =
 getAsyncClient().listLandingZonesPaginator(request);
        List<LandingZoneSummary> landingZones = new ArrayList<>();

        return paginator.subscribe(response -> {
                    if (response.landingZones() != null && !
response.landingZones().isEmpty()) {
                        response.landingZones().forEach(lz -> {
                            System.out.println("Landing zone ARN: " + lz.arn());
                            landingZones.add(lz);
                        });
                    } else {
                        System.out.println("Page contained no landing zones.");
                    }
                })
                .thenRun(() -> System.out.println("Successfully retrieved "+
 landingZones.size() + " landing zones." ))
                .thenApply(v -> landingZones)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();
                        switch (errorCode) {
                            case "AccessDeniedException":
                                throw new CompletionException(
                                        "Access denied when listing landing zones: "
 + e.getMessage(), e);
                            default:
                                throw new CompletionException(
```

```
                                        "Error listing landing zones: " +
e.getMessage(), e);
                        }
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error listing landing zones: " +
cause.getMessage(), cause);
                    }

                    throw new CompletionException("Failed to list landing zones",
cause);
                });
    }
```

- Para obtener más información sobre la API, consulta ListLandingZones la Referencia AWS SDK for Java 2.x de la API.

`ResetEnabledBaseline`

En el siguiente ejemplo de código, se muestra cómo utilizar `ResetEnabledBaseline`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Resets an enabled baseline for a specific target.
     *
     * @param enabledBaselineIdentifier the identifier of the enabled baseline to
reset
     * @return the operation identifier
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
```

```
   public CompletableFuture<String> resetEnabledBaselineAsync(String
enabledBaselineIdentifier) {

       System.out.println("Starting reset of enabled baseline…");
       System.out.println("This operation will check the status every 15 seconds
until it completes (SUCCEEDED or FAILED).");

       ResetEnabledBaselineRequest request = ResetEnabledBaselineRequest.builder()
               .enabledBaselineIdentifier(enabledBaselineIdentifier)
               .build();

       return getAsyncClient().resetEnabledBaseline(request)
               .thenCompose(response -> {
                   String operationId = response.operationIdentifier();
                   System.out.println("Reset enabled baseline operation ID: " +
operationId);

                   // Polling loop
                   CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                   Runnable poller = new Runnable() {
                       @Override
                       public void run() {
                           getBaselineOperationAsync(operationId)
                                   .thenAccept(statusObj -> {
                                       String status = statusObj.toString(); //
Convert enum/status to string for printing
                                       System.out.println("Current baseline
operation status: " + status + " # waiting for SUCCEEDED or FAILED...");

                                       if ("SUCCEEDED".equalsIgnoreCase(status) ||
"FAILED".equalsIgnoreCase(status)) {
                                           System.out.println("Baseline operation
finished with status: " + status);
                                           resultFuture.complete(operationId);
                                       } else {
                                           // Schedule next poll in 15 seconds
                                           CompletableFuture.delayedExecutor(15,
TimeUnit.SECONDS)
                                                   .execute(this);
                                       }
                                   })
                                   .exceptionally(ex -> {
```

```
                                        System.out.println("Error checking baseline
operation status: " + ex.getMessage());
                                        resultFuture.completeExceptionally(ex);
                                        return null;
                                    });
                        }
                    };

                    // Start first poll immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorCode() : "UNKNOWN";
                        String errorMessage = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorMessage() : e.getMessage();

                        System.out.println("ControlTowerException caught: Code=" +
errorCode + ", Message=" + errorMessage);
                        return null;
                    }

                    if (cause instanceof SdkException sdkEx) {
                        System.out.println("SDK exception caught: " +
sdkEx.getMessage());
                        return null;
                    }

                    System.out.println("Unexpected exception resetting baseline: " +
cause.getMessage());
                    return null;
                });
    }
```

- Para obtener más información sobre la API, consulta ResetEnabledBaselinela Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Firehose con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x con Firehose.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`PutRecord`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutRecord`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Puts a record to the specified Amazon Kinesis Data Firehose delivery stream.
     *
     * @param record The record to be put to the delivery stream. The record must be
a {@link Map} of String keys and Object values.
```

```
    * @param deliveryStreamName The name of the Amazon Kinesis Data Firehose
delivery stream to which the record should be put.
    * @throws IllegalArgumentException if the input record or delivery stream name
is null or empty.
    * @throws RuntimeException if there is an error putting the record to the
delivery stream.
    */
   public static void putRecord(Map<String, Object> record, String
deliveryStreamName) {
       if (record == null || deliveryStreamName == null ||
deliveryStreamName.isEmpty()) {
           throw new IllegalArgumentException("Invalid input: record or delivery
stream name cannot be null/empty");
       }
       try {
           String jsonRecord = new ObjectMapper().writeValueAsString(record);
           Record firehoseRecord = Record.builder()

.data(SdkBytes.fromByteArray(jsonRecord.getBytes(StandardCharsets.UTF_8)))
               .build();

           PutRecordRequest putRecordRequest = PutRecordRequest.builder()
               .deliveryStreamName(deliveryStreamName)
               .record(firehoseRecord)
               .build();

           getFirehoseClient().putRecord(putRecordRequest);
           System.out.println("Record sent: " + jsonRecord);
       } catch (Exception e) {
           throw new RuntimeException("Failed to put record: " + e.getMessage(),
e);
       }
   }
```

- Para obtener más información sobre la API, consulta PutRecordla Referencia AWS SDK for Java 2.x de la API.

`PutRecordBatch`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutRecordBatch`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Puts a batch of records to an Amazon Kinesis Data Firehose delivery stream.
    *
    * @param records           a list of maps representing the records to be sent
    * @param batchSize         the maximum number of records to include in each
batch
    * @param deliveryStreamName the name of the Kinesis Data Firehose delivery
stream
    * @throws IllegalArgumentException if the input parameters are invalid (null or
empty)
    * @throws RuntimeException         if there is an error putting the record
batch
    */
   public static void putRecordBatch(List<Map<String, Object>> records, int
batchSize, String deliveryStreamName) {
       if (records == null || records.isEmpty() || deliveryStreamName == null ||
deliveryStreamName.isEmpty()) {
           throw new IllegalArgumentException("Invalid input: records or delivery
stream name cannot be null/empty");
       }
       ObjectMapper objectMapper = new ObjectMapper();

       try {
           for (int i = 0; i < records.size(); i += batchSize) {
               List<Map<String, Object>> batch = records.subList(i, Math.min(i +
batchSize, records.size()));

               List<Record> batchRecords = batch.stream().map(record -> {
                   try {
                       String jsonRecord = objectMapper.writeValueAsString(record);
                       return Record.builder()

.data(SdkBytes.fromByteArray(jsonRecord.getBytes(StandardCharsets.UTF_8)))
                           .build();
```

```
                    } catch (Exception e) {
                        throw new RuntimeException("Error creating Firehose record",
e);
                    }
                }).collect(Collectors.toList());

                PutRecordBatchRequest request = PutRecordBatchRequest.builder()
                    .deliveryStreamName(deliveryStreamName)
                    .records(batchRecords)
                    .build();

                PutRecordBatchResponse response =
getFirehoseClient().putRecordBatch(request);

                if (response.failedPutCount() > 0) {
                    response.requestResponses().stream()
                        .filter(r -> r.errorCode() != null)
                        .forEach(r -> System.err.println("Failed record: " +
r.errorMessage()));
                }
                System.out.println("Batch sent with size: " + batchRecords.size());
            }
        } catch (Exception e) {
            throw new RuntimeException("Failed to put record batch: " +
e.getMessage(), e);
        }
    }
```

- Para obtener más información sobre la API, consulta PutRecordBatchla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Colocar los registros en Firehose

En el siguiente ejemplo de código, se muestra cómo usar Firehose para procesar registros individuales y por lotes.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Este ejemplo coloca los registros individuales y por lotes en Firehose.

```
/**
 * Amazon Firehose Scenario example using Java V2 SDK.
 *
 * Demonstrates individual and batch record processing,
 * and monitoring Firehose delivery stream metrics.
 */
public class FirehoseScenario {

    private static FirehoseClient firehoseClient;
    private static CloudWatchClient cloudWatchClient;

    public static void main(String[] args) {
        final String usage = """
                Usage:
                    <deliveryStreamName>
                Where:
                    deliveryStreamName - The Firehose delivery stream name.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            return;
        }

        String deliveryStreamName = args[0];

        try {
            // Read and parse sample data.
            String jsonContent = readJsonFile("sample_records.json");
            ObjectMapper objectMapper = new ObjectMapper();
            List<Map<String, Object>> sampleData =
 objectMapper.readValue(jsonContent, new TypeReference<>() {});
```

```
            // Process individual records.
            System.out.println("Processing individual records...");
            sampleData.subList(0, 100).forEach(record -> {
                try {
                    putRecord(record, deliveryStreamName);
                } catch (Exception e) {
                    System.err.println("Error processing record: " +
e.getMessage());
                }
            });

            // Monitor metrics.
            monitorMetrics(deliveryStreamName);

            // Process batch records.
            System.out.println("Processing batch records...");
            putRecordBatch(sampleData.subList(100, sampleData.size()), 500,
deliveryStreamName);
            monitorMetrics(deliveryStreamName);

        } catch (Exception e) {
            System.err.println("Scenario failed: " + e.getMessage());
        } finally {
            closeClients();
        }
    }

    private static FirehoseClient getFirehoseClient() {
        if (firehoseClient == null) {
            firehoseClient = FirehoseClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return firehoseClient;
    }

    private static CloudWatchClient getCloudWatchClient() {
        if (cloudWatchClient == null) {
            cloudWatchClient = CloudWatchClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return cloudWatchClient;
    }
```

```
   /**
    * Puts a record to the specified Amazon Kinesis Data Firehose delivery stream.
    *
    * @param record The record to be put to the delivery stream. The record must be
a {@link Map} of String keys and Object values.
    * @param deliveryStreamName The name of the Amazon Kinesis Data Firehose
delivery stream to which the record should be put.
    * @throws IllegalArgumentException if the input record or delivery stream name
is null or empty.
    * @throws RuntimeException if there is an error putting the record to the
delivery stream.
    */
   public static void putRecord(Map<String, Object> record, String
deliveryStreamName) {
       if (record == null || deliveryStreamName == null ||
deliveryStreamName.isEmpty()) {
           throw new IllegalArgumentException("Invalid input: record or delivery
stream name cannot be null/empty");
       }
       try {
           String jsonRecord = new ObjectMapper().writeValueAsString(record);
           Record firehoseRecord = Record.builder()

.data(SdkBytes.fromByteArray(jsonRecord.getBytes(StandardCharsets.UTF_8)))
               .build();

           PutRecordRequest putRecordRequest = PutRecordRequest.builder()
               .deliveryStreamName(deliveryStreamName)
               .record(firehoseRecord)
               .build();

           getFirehoseClient().putRecord(putRecordRequest);
           System.out.println("Record sent: " + jsonRecord);
       } catch (Exception e) {
           throw new RuntimeException("Failed to put record: " + e.getMessage(),
e);
       }
   }


   /**
    * Puts a batch of records to an Amazon Kinesis Data Firehose delivery stream.
    *
```

```
    * @param records           a list of maps representing the records to be sent
    * @param batchSize         the maximum number of records to include in each
batch
    * @param deliveryStreamName the name of the Kinesis Data Firehose delivery
stream
    * @throws IllegalArgumentException if the input parameters are invalid (null or
empty)
    * @throws RuntimeException         if there is an error putting the record
batch
    */
   public static void putRecordBatch(List<Map<String, Object>> records, int
batchSize, String deliveryStreamName) {
       if (records == null || records.isEmpty() || deliveryStreamName == null ||
deliveryStreamName.isEmpty()) {
           throw new IllegalArgumentException("Invalid input: records or delivery
stream name cannot be null/empty");
       }
       ObjectMapper objectMapper = new ObjectMapper();

       try {
           for (int i = 0; i < records.size(); i += batchSize) {
               List<Map<String, Object>> batch = records.subList(i, Math.min(i +
batchSize, records.size()));

               List<Record> batchRecords = batch.stream().map(record -> {
                   try {
                       String jsonRecord = objectMapper.writeValueAsString(record);
                       return Record.builder()

.data(SdkBytes.fromByteArray(jsonRecord.getBytes(StandardCharsets.UTF_8)))
                               .build();
                   } catch (Exception e) {
                       throw new RuntimeException("Error creating Firehose record",
e);
                   }
               }).collect(Collectors.toList());

               PutRecordBatchRequest request = PutRecordBatchRequest.builder()
                   .deliveryStreamName(deliveryStreamName)
                   .records(batchRecords)
                   .build();

               PutRecordBatchResponse response =
getFirehoseClient().putRecordBatch(request);
```

```
                if (response.failedPutCount() > 0) {
                    response.requestResponses().stream()
                        .filter(r -> r.errorCode() != null)
                        .forEach(r -> System.err.println("Failed record: " +
r.errorMessage()));
                }
                System.out.println("Batch sent with size: " + batchRecords.size());
            }
        } catch (Exception e) {
            throw new RuntimeException("Failed to put record batch: " +
e.getMessage(), e);
        }
    }

    public static void monitorMetrics(String deliveryStreamName) {
        Instant endTime = Instant.now();
        Instant startTime = endTime.minusSeconds(600);

        List<String> metrics = List.of("IncomingBytes", "IncomingRecords",
"FailedPutCount");
        metrics.forEach(metric -> monitorMetric(metric, startTime, endTime,
deliveryStreamName));
    }

    private static void monitorMetric(String metricName, Instant startTime, Instant
endTime, String deliveryStreamName) {
        try {
            GetMetricStatisticsRequest request =
GetMetricStatisticsRequest.builder()
                .namespace("AWS/Firehose")
                .metricName(metricName)

.dimensions(Dimension.builder().name("DeliveryStreamName").value(deliveryStreamName).build(
                .startTime(startTime)
                .endTime(endTime)
                .period(60)
                .statistics(Statistic.SUM)
                .build();

            GetMetricStatisticsResponse response =
getCloudWatchClient().getMetricStatistics(request);
            double totalSum =
response.datapoints().stream().mapToDouble(Datapoint::sum).sum();
```

```
            System.out.println(metricName + ": " + totalSum);
        } catch (Exception e) {
            System.err.println("Failed to monitor metric " + metricName + ": " +
 e.getMessage());
        }
    }

    public static String readJsonFile(String fileName) throws IOException {
        try (InputStream inputStream =
 FirehoseScenario.class.getResourceAsStream("/" + fileName);
             Scanner scanner = new Scanner(inputStream, StandardCharsets.UTF_8)) {
            return scanner.useDelimiter("\\\\A").next();
        } catch (Exception e) {
            throw new RuntimeException("Error reading file: " + fileName, e);
        }
    }

    private static void closeClients() {
        try {
            if (firehoseClient != null) firehoseClient.close();
            if (cloudWatchClient != null) cloudWatchClient.close();
        } catch (Exception e) {
            System.err.println("Error closing clients: " + e.getMessage());
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - PutRecord
  - PutRecordBatch

Ejemplos de Amazon DocumentDB con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante Amazon DocumentDB. AWS SDK for Java 2.x

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Ejemplos de tecnología sin servidor

Ejemplos de tecnología sin servidor

Invocación de una función de Lambda desde un desencadenador de Amazon DocumentDB

El siguiente ejemplo de código muestra cómo implementar una función de Lambda que recibe un evento desencadenado al recibir registros de una secuencia de cambios de DocumentDB. La función recupera la carga útil de DocumentDB y registra el contenido del registro.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Cómo consumir un evento de Amazon DocumentDB con Lambda mediante Java.

```
import java.util.List;
import java.util.Map;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;

public class Example implements RequestHandler<Map<String, Object>, String> {

    @SuppressWarnings("unchecked")
    @Override
    public String handleRequest(Map<String, Object> event, Context context) {
        List<Map<String, Object>> events = (List<Map<String, Object>>)
 event.get("events");
        for (Map<String, Object> record : events) {
            Map<String, Object> eventData = (Map<String, Object>)
 record.get("event");
            processEventData(eventData);
        }
```

```
        return "OK";
    }

    @SuppressWarnings("unchecked")
    private void processEventData(Map<String, Object> eventData) {
        String operationType = (String) eventData.get("operationType");
        System.out.println("operationType: %s".formatted(operationType));

        Map<String, Object> ns = (Map<String, Object>) eventData.get("ns");

        String db = (String) ns.get("db");
        System.out.println("db: %s".formatted(db));
        String coll = (String) ns.get("coll");
        System.out.println("coll: %s".formatted(coll));

        Map<String, Object> fullDocument = (Map<String, Object>)
 eventData.get("fullDocument");
        System.out.println("fullDocument: %s".formatted(fullDocument));
    }

}
```

Ejemplos de DynamoDB usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante DynamoDB. AWS SDK for Java 2.x

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

AWS Las contribuciones de la comunidad son ejemplos que fueron creados y mantenidos por varios equipos. AWS Para enviar comentarios, utilice el mecanismo previsto en los repositorios vinculados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios
- Ejemplos de tecnología sin servidor
- AWS contribuciones de la comunidad

Introducción

Introducción a DynamoDB

En el siguiente ejemplo de código, se muestra cómo empezar a utilizar DynamoDB.

SDK para Java 2.x

> **Note**
>
> Hay más información sobre GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ListTablesRequest;
import software.amazon.awssdk.services.dynamodb.model.ListTablesResponse;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class ListTables {
    public static void main(String[] args) {
        System.out.println("Listing your Amazon DynamoDB tables:\n");
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();
        listAllTables(ddb);
        ddb.close();
    }

    public static void listAllTables(DynamoDbClient ddb) {
        boolean moreTables = true;
        String lastName = null;

        while (moreTables) {
            try {
                ListTablesResponse response = null;
                if (lastName == null) {
                    ListTablesRequest request = ListTablesRequest.builder().build();
                    response = ddb.listTables(request);
                } else {
                    ListTablesRequest request = ListTablesRequest.builder()
                            .exclusiveStartTableName(lastName).build();
                    response = ddb.listTables(request);
                }

                List<String> tableNames = response.tableNames();
                if (tableNames.size() > 0) {
                    for (String curName : tableNames) {
                        System.out.format("* %s\n", curName);
                    }
                } else {
                    System.out.println("No tables found!");
                    System.exit(0);
                }

                lastName = response.lastEvaluatedTableName();
                if (lastName == null) {
                    moreTables = false;
                }

            } catch (DynamoDbException e) {
```

```
                System.err.println(e.getMessage());
                System.exit(1);
            }
        }
        System.out.println("\nDone!");
    }
}
```

- Para obtener más información sobre la API, consulta ListTablesla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Creación de una tabla que pueda contener datos de películas.
- Colocar, obtener y actualizar una sola película en la tabla.
- Escribir los datos de películas en la tabla a partir de un archivo JSON de ejemplo.
- Consultar películas que se hayan estrenado en un año determinado.
- Buscar películas que se hayan estrenado en un intervalo de años.
- Eliminación de una película de la tabla y, a continuación, eliminar la tabla.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Crear una tabla de DynamoDB.

```
    // Create a table with a Sort key.
    public static void createTable(DynamoDbClient ddb, String tableName) {
        DynamoDbWaiter dbWaiter = ddb.waiter();
        ArrayList<AttributeDefinition> attributeDefinitions = new ArrayList<>();
```

```
        // Define attributes.
        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("year")
            .attributeType("N")
            .build());

        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("title")
            .attributeType("S")
            .build());

        ArrayList<KeySchemaElement> tableKey = new ArrayList<>();
        KeySchemaElement key = KeySchemaElement.builder()
            .attributeName("year")
            .keyType(KeyType.HASH)
            .build();

        KeySchemaElement key2 = KeySchemaElement.builder()
            .attributeName("title")
            .keyType(KeyType.RANGE)
            .build();

        // Add KeySchemaElement objects to the list.
        tableKey.add(key);
        tableKey.add(key2);

        CreateTableRequest request = CreateTableRequest.builder()
            .keySchema(tableKey)
            .billingMode(BillingMode.PAY_PER_REQUEST) //  DynamoDB automatically
scales based on traffic.
            .attributeDefinitions(attributeDefinitions)
            .tableName(tableName)
            .build();

        try {
            CreateTableResponse response = ddb.createTable(request);
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                .tableName(tableName)
                .build();

            // Wait until the Amazon DynamoDB table is created.
            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
```

```
            waiterResponse.matched().response().ifPresent(System.out::println);
            String newTable = response.tableDescription().tableName();
            System.out.println("The " + newTable + " was successfully created.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

Crear una función auxiliar para descargar y extraer el archivo JSON de muestra.

```
    // Load data into the table.
    public static void loadData(DynamoDbClient ddb, String tableName, String
fileName) throws IOException {
        DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
            .dynamoDbClient(ddb)
            .build();

        DynamoDbTable<Movies> mappedTable = enhancedClient.table("Movies",
TableSchema.fromBean(Movies.class));
        JsonParser parser = new JsonFactory().createParser(new File(fileName));
        com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
        Iterator<JsonNode> iter = rootNode.iterator();
        ObjectNode currentNode;
        int t = 0;
        while (iter.hasNext()) {
            // Only add 200 Movies to the table.
            if (t == 200)
                break;
            currentNode = (ObjectNode) iter.next();

            int year = currentNode.path("year").asInt();
            String title = currentNode.path("title").asText();
            String info = currentNode.path("info").toString();

            Movies movies = new Movies();
            movies.setYear(year);
            movies.setTitle(title);
            movies.setInfo(info);
```

```
            // Put the data into the Amazon DynamoDB Movie table.
            mappedTable.putItem(movies);
            t++;
        }
    }
```

Obtener un elemento de una tabla.

```
    public static void getItem(DynamoDbClient ddb) {

        HashMap<String, AttributeValue> keyToGet = new HashMap<>();
        keyToGet.put("year", AttributeValue.builder()
            .n("1933")
            .build());

        keyToGet.put("title", AttributeValue.builder()
            .s("King Kong")
            .build());

        GetItemRequest request = GetItemRequest.builder()
            .key(keyToGet)
            .tableName("Movies")
            .build();

        try {
            Map<String, AttributeValue> returnedItem = ddb.getItem(request).item();

            if (returnedItem != null) {
                Set<String> keys = returnedItem.keySet();
                System.out.println("Amazon DynamoDB table attributes: \n");

                for (String key1 : keys) {
                    System.out.format("%s: %s\n", key1,
returnedItem.get(key1).toString());
                }
            } else {
                System.out.format("No item found with the key %s!\n", "year");
            }

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
```

```
        }
    }
```

Ejemplo completo.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 * <p>
 * This Java example performs these tasks:
 * <p>
 * 1. Creates the Amazon DynamoDB Movie table with partition and sort key.
 * 2. Puts data into the Amazon DynamoDB table from a JSON document using the
 * Enhanced client.
 * 3. Gets data from the Movie table.
 * 4. Adds a new item.
 * 5. Updates an item.
 * 6. Uses a Scan to query items using the Enhanced client.
 * 7. Queries all items where the year is 2013 using the Enhanced Client.
 * 8. Deletes the table.
 */

public class Scenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws IOException {
        String tableName = "Movies";
        String fileName = "../../../resources/sample_files/movies.json";
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
            .region(region)
            .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon DynamoDB example scenario.");
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println(
            "1. Creating an Amazon DynamoDB table named Movies with a key named year
and a sort key named title.");
        createTable(ddb, tableName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Loading data into the Amazon DynamoDB table.");
        loadData(ddb, tableName, fileName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Getting data from the Movie table.");
        getItem(ddb);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Putting a record into the Amazon DynamoDB table.");
        putRecord(ddb);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Updating a record.");
        updateTableItem(ddb, tableName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Scanning the Amazon DynamoDB table.");
        scanMovies(ddb, tableName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Querying the Movies released in 2013.");
        queryTable(ddb);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Deleting the Amazon DynamoDB table.");
        deleteDynamoDBTable(ddb, tableName);
        System.out.println(DASHES);

        ddb.close();
    }
```

```
    // Create a table with a Sort key.
    public static void createTable(DynamoDbClient ddb, String tableName) {
        DynamoDbWaiter dbWaiter = ddb.waiter();
        ArrayList<AttributeDefinition> attributeDefinitions = new ArrayList<>();

        // Define attributes.
        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("year")
            .attributeType("N")
            .build());

        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("title")
            .attributeType("S")
            .build());

        ArrayList<KeySchemaElement> tableKey = new ArrayList<>();
        KeySchemaElement key = KeySchemaElement.builder()
            .attributeName("year")
            .keyType(KeyType.HASH)
            .build();

        KeySchemaElement key2 = KeySchemaElement.builder()
            .attributeName("title")
            .keyType(KeyType.RANGE)
            .build();

        // Add KeySchemaElement objects to the list.
        tableKey.add(key);
        tableKey.add(key2);

        CreateTableRequest request = CreateTableRequest.builder()
            .keySchema(tableKey)
            .billingMode(BillingMode.PAY_PER_REQUEST) //  DynamoDB automatically
scales based on traffic.
            .attributeDefinitions(attributeDefinitions)
            .tableName(tableName)
            .build();

        try {
            CreateTableResponse response = ddb.createTable(request);
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                .tableName(tableName)
```

```
                .build();

            // Wait until the Amazon DynamoDB table is created.
            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            String newTable = response.tableDescription().tableName();
            System.out.println("The " + newTable + " was successfully created.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    // Query the table.
    public static void queryTable(DynamoDbClient ddb) {
        try {
            DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
                .dynamoDbClient(ddb)
                .build();

            DynamoDbTable<Movies> custTable = enhancedClient.table("Movies",
TableSchema.fromBean(Movies.class));
            QueryConditional queryConditional = QueryConditional
                .keyEqualTo(Key.builder()
                    .partitionValue(2013)
                    .build());

            // Get items in the table and write out the ID value.
            Iterator<Movies> results =
custTable.query(queryConditional).items().iterator();
            String result = "";

            while (results.hasNext()) {
                Movies rec = results.next();
                System.out.println("The title of the movie is " + rec.getTitle());
                System.out.println("The movie information  is " + rec.getInfo());
            }

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
```

```
    }

    // Scan the table.
    public static void scanMovies(DynamoDbClient ddb, String tableName) {
        System.out.println("******* Scanning all movies.\n");
        try {
            DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
                .dynamoDbClient(ddb)
                .build();

            DynamoDbTable<Movies> custTable = enhancedClient.table("Movies",
TableSchema.fromBean(Movies.class));
            Iterator<Movies> results = custTable.scan().items().iterator();
            while (results.hasNext()) {
                Movies rec = results.next();
                System.out.println("The movie title is " + rec.getTitle());
                System.out.println("The movie year is " + rec.getYear());
            }

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    // Load data into the table.
    public static void loadData(DynamoDbClient ddb, String tableName, String
fileName) throws IOException {
        DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
            .dynamoDbClient(ddb)
            .build();

        DynamoDbTable<Movies> mappedTable = enhancedClient.table("Movies",
TableSchema.fromBean(Movies.class));
        JsonParser parser = new JsonFactory().createParser(new File(fileName));
        com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
        Iterator<JsonNode> iter = rootNode.iterator();
        ObjectNode currentNode;
        int t = 0;
        while (iter.hasNext()) {
            // Only add 200 Movies to the table.
            if (t == 200)
                break;
```

```
            currentNode = (ObjectNode) iter.next();

            int year = currentNode.path("year").asInt();
            String title = currentNode.path("title").asText();
            String info = currentNode.path("info").toString();

            Movies movies = new Movies();
            movies.setYear(year);
            movies.setTitle(title);
            movies.setInfo(info);

            // Put the data into the Amazon DynamoDB Movie table.
            mappedTable.putItem(movies);
            t++;
        }
    }

    // Update the record to include show only directors.
    public static void updateTableItem(DynamoDbClient ddb, String tableName) {
        HashMap<String, AttributeValue> itemKey = new HashMap<>();
        itemKey.put("year", AttributeValue.builder().n("1933").build());
        itemKey.put("title", AttributeValue.builder().s("King Kong").build());

        HashMap<String, AttributeValueUpdate> updatedValues = new HashMap<>();
        updatedValues.put("info", AttributeValueUpdate.builder()
            .value(AttributeValue.builder().s("{\"directors\":[\"Merian C. Cooper\",
\"Ernest B. Schoedsack\"]")
                .build())
            .action(AttributeAction.PUT)
            .build());

        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(itemKey)
            .attributeUpdates(updatedValues)
            .build();

        try {
            ddb.updateItem(request);
        } catch (ResourceNotFoundException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
```

```
            System.exit(1);
        }

        System.out.println("Item was updated!");
    }

    public static void deleteDynamoDBTable(DynamoDbClient ddb, String tableName) {
        DeleteTableRequest request = DeleteTableRequest.builder()
            .tableName(tableName)
            .build();

        try {
            ddb.deleteTable(request);

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println(tableName + " was successfully deleted!");
    }

    public static void putRecord(DynamoDbClient ddb) {
        try {
            DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
                .dynamoDbClient(ddb)
                .build();

            DynamoDbTable<Movies> table = enhancedClient.table("Movies",
TableSchema.fromBean(Movies.class));

            // Populate the Table.
            Movies record = new Movies();
            record.setYear(2020);
            record.setTitle("My Movie2");
            record.setInfo("no info");
            table.putItem(record);

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println("Added a new movie to the table.");
    }
```

```
    public static void getItem(DynamoDbClient ddb) {

        HashMap<String, AttributeValue> keyToGet = new HashMap<>();
        keyToGet.put("year", AttributeValue.builder()
            .n("1933")
            .build());

        keyToGet.put("title", AttributeValue.builder()
            .s("King Kong")
            .build());

        GetItemRequest request = GetItemRequest.builder()
            .key(keyToGet)
            .tableName("Movies")
            .build();

        try {
            Map<String, AttributeValue> returnedItem = ddb.getItem(request).item();

            if (returnedItem != null) {
                Set<String> keys = returnedItem.keySet();
                System.out.println("Amazon DynamoDB table attributes: \n");

                for (String key1 : keys) {
                    System.out.format("%s: %s\n", key1,
 returnedItem.get(key1).toString());
                }
            } else {
                System.out.format("No item found with the key %s!\n", "year");
            }

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener información sobre la API, consulte los siguientes temas en la referencia de la API de AWS SDK for Java 2.x .
  - BatchWriteItem

- CreateTable
- DeleteItem
- DeleteTable
- DescribeTable
- GetItem
- PutItem
- Query
- Scan
- UpdateItem

Acciones

`BatchGetItem`

En el siguiente ejemplo de código, se muestra cómo utilizar `BatchGetItem`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Muestra cómo obtener elementos por lotes mediante el cliente de servicio.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.BatchGetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.BatchGetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.KeysAndAttributes;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

/**
```

```
 * Before running this Java V2 code example, set up your development environment,
 including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class BatchReadItems {
    public static void main(String[] args){
        final String usage = """

                Usage:
                    <tableName>

                Where:
                    tableName - The Amazon DynamoDB table (for example, Music).\s
                """;

        String tableName = "Music";
        Region region = Region.US_EAST_1;
        DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
            .region(region)
            .build();

        getBatchItems(dynamoDbClient, tableName);
    }

    public static void getBatchItems(DynamoDbClient dynamoDbClient, String
 tableName) {
        // Define the primary key values for the items you want to retrieve.
        Map<String, AttributeValue> key1 = new HashMap<>();
        key1.put("Artist", AttributeValue.builder().s("Artist1").build());

        Map<String, AttributeValue> key2 = new HashMap<>();
        key2.put("Artist", AttributeValue.builder().s("Artist2").build());

        // Construct the batchGetItem request.
        Map<String, KeysAndAttributes> requestItems = new HashMap<>();
        requestItems.put(tableName, KeysAndAttributes.builder()
            .keys(List.of(key1, key2))
            .projectionExpression("Artist, SongTitle")
            .build());

        BatchGetItemRequest batchGetItemRequest = BatchGetItemRequest.builder()
```

```
            .requestItems(requestItems)
            .build();

        // Make the batchGetItem request.
        BatchGetItemResponse batchGetItemResponse =
 dynamoDbClient.batchGetItem(batchGetItemRequest);

        // Extract and print the retrieved items.
        Map<String, List<Map<String, AttributeValue>>> responses =
 batchGetItemResponse.responses();
        if (responses.containsKey(tableName)) {
            List<Map<String, AttributeValue>> musicItems = responses.get(tableName);
            for (Map<String, AttributeValue> item : musicItems) {
                System.out.println("Artist: " + item.get("Artist").s() +
                    ", SongTitle: " + item.get("SongTitle").s());
            }
        } else {
            System.out.println("No items retrieved.");
        }
    }
}
```

Muestra cómo obtener elementos por lotes mediante el cliente de servicio y un paginador.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.BatchGetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.KeysAndAttributes;
import java.util.Collections;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

public class BatchGetItemsPaginator {

    public static void main(String[] args){
        final String usage = """

                Usage:
                    <tableName>
```

```
                Where:
                    tableName - The Amazon DynamoDB table (for example, Music).\s
                """;

        String tableName = "Music";
        Region region = Region.US_EAST_1;
        DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
            .region(region)
            .build();

        getBatchItemsPaginator(dynamoDbClient, tableName) ;
    }

    public static void getBatchItemsPaginator(DynamoDbClient dynamoDbClient, String
 tableName) {
        // Define the primary key values for the items you want to retrieve.
        Map<String, AttributeValue> key1 = new HashMap<>();
        key1.put("Artist", AttributeValue.builder().s("Artist1").build());

        Map<String, AttributeValue> key2 = new HashMap<>();
        key2.put("Artist", AttributeValue.builder().s("Artist2").build());

        // Construct the batchGetItem request.
        Map<String, KeysAndAttributes> requestItems = new HashMap<>();
        requestItems.put(tableName, KeysAndAttributes.builder()
            .keys(List.of(key1, key2))
            .projectionExpression("Artist, SongTitle")
            .build());

        BatchGetItemRequest batchGetItemRequest = BatchGetItemRequest.builder()
            .requestItems(requestItems)
            .build();

        // Use batchGetItemPaginator for paginated requests.
        dynamoDbClient.batchGetItemPaginator(batchGetItemRequest).stream()
            .flatMap(response -> response.responses().getOrDefault(tableName,
 Collections.emptyList()).stream())
            .forEach(item -> {
                System.out.println("Artist: " + item.get("Artist").s() +
                    ", SongTitle: " + item.get("SongTitle").s());
            });
    }
}
```

- Para obtener más información sobre la API, consulta BatchGetItemla Referencia AWS SDK for Java 2.x de la API.

`BatchWriteItem`

En el siguiente ejemplo de código, se muestra cómo utilizar `BatchWriteItem`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Inserta muchos elementos en una tabla con el cliente de servicio.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.BatchWriteItemRequest;
import software.amazon.awssdk.services.dynamodb.model.BatchWriteItemResponse;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.PutRequest;
import software.amazon.awssdk.services.dynamodb.model.WriteRequest;
import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development environment,
 including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class BatchWriteItems {
    public static void main(String[] args){
```

```
        final String usage = """

                Usage:
                    <tableName>

                Where:
                    tableName - The Amazon DynamoDB table (for example, Music).\s
                """;

        String tableName = "Music";
        Region region = Region.US_EAST_1;
        DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
            .region(region)
            .build();

        addBatchItems(dynamoDbClient, tableName);
    }

    public static void addBatchItems(DynamoDbClient dynamoDbClient, String
tableName) {
        // Specify the updates you want to perform.
        List<WriteRequest> writeRequests = new ArrayList<>();

        // Set item 1.
        Map<String, AttributeValue> item1Attributes = new HashMap<>();
        item1Attributes.put("Artist",
AttributeValue.builder().s("Artist1").build());
        item1Attributes.put("Rating", AttributeValue.builder().s("5").build());
        item1Attributes.put("Comments", AttributeValue.builder().s("Great
song!").build());
        item1Attributes.put("SongTitle",
AttributeValue.builder().s("SongTitle1").build());

writeRequests.add(WriteRequest.builder().putRequest(PutRequest.builder().item(item1Attribut

        // Set item 2.
        Map<String, AttributeValue> item2Attributes = new HashMap<>();
        item2Attributes.put("Artist",
AttributeValue.builder().s("Artist2").build());
        item2Attributes.put("Rating", AttributeValue.builder().s("4").build());
        item2Attributes.put("Comments", AttributeValue.builder().s("Nice
melody.").build());
        item2Attributes.put("SongTitle",
AttributeValue.builder().s("SongTitle2").build());
```

```
 writeRequests.add(WriteRequest.builder().putRequest(PutRequest.builder().item(item2Attribut

        try {
            // Create the BatchWriteItemRequest.
            BatchWriteItemRequest batchWriteItemRequest =
 BatchWriteItemRequest.builder()
                .requestItems(Map.of(tableName, writeRequests))
                .build();

            // Execute the BatchWriteItem operation.
            BatchWriteItemResponse batchWriteItemResponse =
 dynamoDbClient.batchWriteItem(batchWriteItemRequest);

            // Process the response.
            System.out.println("Batch write successful: " + batchWriteItemResponse);

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

Inserta muchos elementos en una tabla mediante el cliente mejorado.

```
import com.example.dynamodb.Customer;
import com.example.dynamodb.Music;
import software.amazon.awssdk.enhanced.dynamodb.DynamoDbEnhancedClient;
import software.amazon.awssdk.enhanced.dynamodb.DynamoDbTable;
import software.amazon.awssdk.enhanced.dynamodb.Key;
import software.amazon.awssdk.enhanced.dynamodb.TableSchema;
import software.amazon.awssdk.enhanced.dynamodb.model.BatchWriteItemEnhancedRequest;
import software.amazon.awssdk.enhanced.dynamodb.model.WriteBatch;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import java.time.Instant;
import java.time.LocalDate;
import java.time.LocalDateTime;
import java.time.ZoneOffset;
```

```
/*
 * Before running this code example, create an Amazon DynamoDB table named Customer
 with these columns:
 *   - id - the id of the record that is the key
 *   - custName - the customer name
 *   - email - the email value
 *   - registrationDate - an instant value when the item was added to the table
 *
 * Also, ensure that you have set up your development environment, including your
 credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class EnhancedBatchWriteItems {
        public static void main(String[] args) {
                Region region = Region.US_EAST_1;
                DynamoDbClient ddb = DynamoDbClient.builder()
                                .region(region)
                                .build();
                DynamoDbEnhancedClient enhancedClient =
 DynamoDbEnhancedClient.builder()
                                .dynamoDbClient(ddb)
                                .build();
                putBatchRecords(enhancedClient);
                ddb.close();
        }

        public static void putBatchRecords(DynamoDbEnhancedClient enhancedClient) {
                try {
                        DynamoDbTable<Customer> customerMappedTable =
 enhancedClient.table("Customer",
                                        TableSchema.fromBean(Customer.class));
                        DynamoDbTable<Music> musicMappedTable =
 enhancedClient.table("Music",
                                        TableSchema.fromBean(Music.class));
                        LocalDate localDate = LocalDate.parse("2020-04-07");
                        LocalDateTime localDateTime = localDate.atStartOfDay();
                        Instant instant = localDateTime.toInstant(ZoneOffset.UTC);

                        Customer record2 = new Customer();
                        record2.setCustName("Fred Pink");
                        record2.setId("id110");
```

```
                        record2.setEmail("fredp@noserver.com");
                        record2.setRegistrationDate(instant);

                        Customer record3 = new Customer();
                        record3.setCustName("Susan Pink");
                        record3.setId("id120");
                        record3.setEmail("spink@noserver.com");
                        record3.setRegistrationDate(instant);

                        Customer record4 = new Customer();
                        record4.setCustName("Jerry orange");
                        record4.setId("id101");
                        record4.setEmail("jorange@noserver.com");
                        record4.setRegistrationDate(instant);

                        BatchWriteItemEnhancedRequest batchWriteItemEnhancedRequest
= BatchWriteItemEnhancedRequest
                                        .builder()
                                        .writeBatches(

WriteBatch.builder(Customer.class) // add items to the Customer

      // table

.mappedTableResource(customerMappedTable)

.addPutItem(builder -> builder.item(record2))

.addPutItem(builder -> builder.item(record3))

.addPutItem(builder -> builder.item(record4))
                                                                        .build(),

WriteBatch.builder(Music.class) // delete an item from the Music

   // table

.mappedTableResource(musicMappedTable)

.addDeleteItem(builder -> builder.key(

   Key.builder().partitionValue(

                   "Famous Band")
```

```
                    .build()))
                                                                    .build())
                                        .build();

                        // Add three items to the Customer table and delete one item
 from the Music
                        // table.

 enhancedClient.batchWriteItem(batchWriteItemEnhancedRequest);
                        System.out.println("done");

                } catch (DynamoDbException e) {
                        System.err.println(e.getMessage());
                        System.exit(1);
                }
        }
}
```

- Para obtener más información sobre la API, consulta BatchWriteItemla Referencia AWS SDK for Java 2.x de la API.

`CreateTable`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateTable`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.BillingMode;
```

```
import software.amazon.awssdk.services.dynamodb.model.CreateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.CreateTableResponse;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableRequest;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableResponse;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.KeySchemaElement;
import software.amazon.awssdk.services.dynamodb.model.KeyType;
import software.amazon.awssdk.services.dynamodb.model.OnDemandThroughput;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughput;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;
import software.amazon.awssdk.services.dynamodb.waiters.DynamoDbWaiter;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateTable {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <tableName> <key>

            Where:
                tableName - The Amazon DynamoDB table to create (for example,
 Music3).
                key - The key for the Amazon DynamoDB table (for example, Artist).
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        String key = args[1];
        System.out.println("Creating an Amazon DynamoDB table " + tableName + " with
 a simple primary key: " + key);
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
```

```
            .region(region)
            .build();

        String result = createTable(ddb, tableName, key);
        System.out.println("New table is " + result);
        ddb.close();
    }

    public static String createTable(DynamoDbClient ddb, String tableName, String
key) {
        DynamoDbWaiter dbWaiter = ddb.waiter();
        CreateTableRequest request = CreateTableRequest.builder()
            .attributeDefinitions(AttributeDefinition.builder()
                .attributeName(key)
                .attributeType(ScalarAttributeType.S)
                .build())
            .keySchema(KeySchemaElement.builder()
                .attributeName(key)
                .keyType(KeyType.HASH)
                .build())
            .billingMode(BillingMode.PAY_PER_REQUEST) //  DynamoDB automatically
scales based on traffic.
            .tableName(tableName)
            .build();

        String newTable;
        try {
            CreateTableResponse response = ddb.createTable(request);
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                .tableName(tableName)
                .build();

            // Wait until the Amazon DynamoDB table is created.
            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            newTable = response.tableDescription().tableName();
            return newTable;

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
```

```
    }
}
```

- Para obtener más información sobre la API, consulta CreateTablela Referencia AWS SDK for Java 2.x de la API.

`DeleteItem`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteItem`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DeleteItemRequest;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import java.util.HashMap;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteItem {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <tableName> <key> <keyval>
```

```
                Where:
                    tableName - The Amazon DynamoDB table to delete the item from
(for example, Music3).
                    key - The key used in the Amazon DynamoDB table (for example,
Artist).\s
                    keyval - The key value that represents the item to delete (for
example, Famous Band).
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        String key = args[1];
        String keyVal = args[2];
        System.out.format("Deleting item \"%s\" from %s\n", keyVal, tableName);
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        deleteDynamoDBItem(ddb, tableName, key, keyVal);
        ddb.close();
    }

    public static void deleteDynamoDBItem(DynamoDbClient ddb, String tableName,
String key, String keyVal) {
        HashMap<String, AttributeValue> keyToGet = new HashMap<>();
        keyToGet.put(key, AttributeValue.builder()
                .s(keyVal)
                .build());

        DeleteItemRequest deleteReq = DeleteItemRequest.builder()
                .tableName(tableName)
                .key(keyToGet)
                .build();

        try {
            ddb.deleteItem(deleteReq);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
```

```
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteItemla Referencia AWS SDK for Java 2.x de la API.

`DeleteTable`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteTable`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DeleteTableRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DeleteTable {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <tableName>
```

```
                Where:
                    tableName - The Amazon DynamoDB table to delete (for example,
 Music3).

                **Warning** This program will delete the table that you specify!
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        System.out.format("Deleting the Amazon DynamoDB table %s...\n", tableName);
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        deleteDynamoDBTable(ddb, tableName);
        ddb.close();
    }

    public static void deleteDynamoDBTable(DynamoDbClient ddb, String tableName) {
        DeleteTableRequest request = DeleteTableRequest.builder()
                .tableName(tableName)
                .build();

        try {
            ddb.deleteTable(request);

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println(tableName + " was successfully deleted!");
    }
}
```

- Para obtener más información sobre la API, consulta DeleteTablela Referencia AWS SDK for Java 2.x de la API.

`DescribeTable`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeTable`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableRequest;
import
 software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughputDescription;
import software.amazon.awssdk.services.dynamodb.model.TableDescription;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeTable {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <tableName>

                Where:
                    tableName - The Amazon DynamoDB table to get information about
 (for example, Music3).
                """;

        if (args.length != 1) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        System.out.format("Getting description for %s\n\n", tableName);
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        describeDymamoDBTable(ddb, tableName);
        ddb.close();
    }

    public static void describeDymamoDBTable(DynamoDbClient ddb, String tableName) {
        DescribeTableRequest request = DescribeTableRequest.builder()
                .tableName(tableName)
                .build();

        try {
            TableDescription tableInfo = ddb.describeTable(request).table();
            if (tableInfo != null) {
                System.out.format("Table name  : %s\n", tableInfo.tableName());
                System.out.format("Table ARN   : %s\n", tableInfo.tableArn());
                System.out.format("Status      : %s\n", tableInfo.tableStatus());
                System.out.format("Item count  : %d\n", tableInfo.itemCount());
                System.out.format("Size (bytes): %d\n", tableInfo.tableSizeBytes());

                ProvisionedThroughputDescription throughputInfo =
tableInfo.provisionedThroughput();
                System.out.println("Throughput");
                System.out.format("  Read Capacity : %d\n",
throughputInfo.readCapacityUnits());
                System.out.format("  Write Capacity: %d\n",
throughputInfo.writeCapacityUnits());

                List<AttributeDefinition> attributes =
tableInfo.attributeDefinitions();
                System.out.println("Attributes");
                for (AttributeDefinition a : attributes) {
                    System.out.format("  %s (%s)\n", a.attributeName(),
a.attributeType());
                }
```

```
            }

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println("\nDone!");
    }
}
```

- Para obtener más información sobre la API, consulta DescribeTablela Referencia AWS SDK for Java 2.x de la API.

`DescribeTimeToLive`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeTimeToLive`.

SDK para Java 2.x

Se describe la configuración de TTL en una tabla de DynamoDB existente mediante AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DescribeTimeToLiveRequest;
import software.amazon.awssdk.services.dynamodb.model.DescribeTimeToLiveResponse;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.logging.Level;
import java.util.logging.Logger;

    public DescribeTimeToLiveResponse describeTTL(final String tableName, final
 Region region) {
        final DescribeTimeToLiveRequest request =
            DescribeTimeToLiveRequest.builder().tableName(tableName).build();

        try (DynamoDbClient ddb = dynamoDbClient != null
            ? dynamoDbClient
            : DynamoDbClient.builder().region(region).build()) {
            return ddb.describeTimeToLive(request);
        } catch (ResourceNotFoundException e) {
```

```
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulte DescribeTimeToLivela Referencia AWS SDK for Java 2.x de la API.

`GetItem`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetItem`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Obtiene un elemento de una mesa mediante el DynamoDbClient.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import java.util.HashMap;
import java.util.Map;
import java.util.Set;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 *
 * To get an item from an Amazon DynamoDB table using the AWS SDK for Java V2,
 * its better practice to use the
 * Enhanced Client, see the EnhancedGetItem example.
 */
public class GetItem {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <tableName> <key> <keyVal>

                Where:
                    tableName - The Amazon DynamoDB table from which an item is
 retrieved (for example, Music3).\s
                    key - The key used in the Amazon DynamoDB table (for example,
 Artist).\s
                    keyval - The key value that represents the item to get (for
 example, Famous Band).
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        String key = args[1];
        String keyVal = args[2];
        System.out.format("Retrieving item \"%s\" from \"%s\"\n", keyVal,
 tableName);
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        getDynamoDBItem(ddb, tableName, key, keyVal);
        ddb.close();
    }

    public static void getDynamoDBItem(DynamoDbClient ddb, String tableName, String
 key, String keyVal) {
        HashMap<String, AttributeValue> keyToGet = new HashMap<>();
        keyToGet.put(key, AttributeValue.builder()
```

```
                .s(keyVal)
                .build());

        GetItemRequest request = GetItemRequest.builder()
                .key(keyToGet)
                .tableName(tableName)
                .build();

        try {
            // If there is no matching item, GetItem does not return any data.
            Map<String, AttributeValue> returnedItem = ddb.getItem(request).item();
            if (returnedItem.isEmpty())
                System.out.format("No item found with the key %s!\n", key);
            else {
                Set<String> keys = returnedItem.keySet();
                System.out.println("Amazon DynamoDB table attributes: \n");
                for (String key1 : keys) {
                    System.out.format("%s: %s\n", key1,
 returnedItem.get(key1).toString());
                }
            }

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulte GetItemla Referencia AWS SDK for Java 2.x de la API.

`ListTables`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListTables`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ListTablesRequest;
import software.amazon.awssdk.services.dynamodb.model.ListTablesResponse;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListTables {
    public static void main(String[] args) {
        System.out.println("Listing your Amazon DynamoDB tables:\n");
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();
        listAllTables(ddb);
        ddb.close();
    }

    public static void listAllTables(DynamoDbClient ddb) {
        boolean moreTables = true;
        String lastName = null;

        while (moreTables) {
            try {
                ListTablesResponse response = null;
                if (lastName == null) {
```

```
                    ListTablesRequest request = ListTablesRequest.builder().build();
                    response = ddb.listTables(request);
                } else {
                    ListTablesRequest request = ListTablesRequest.builder()
                            .exclusiveStartTableName(lastName).build();
                    response = ddb.listTables(request);
                }

                List<String> tableNames = response.tableNames();
                if (tableNames.size() > 0) {
                    for (String curName : tableNames) {
                        System.out.format("* %s\n", curName);
                    }
                } else {
                    System.out.println("No tables found!");
                    System.exit(0);
                }

                lastName = response.lastEvaluatedTableName();
                if (lastName == null) {
                    moreTables = false;
                }

            } catch (DynamoDbException e) {
                System.err.println(e.getMessage());
                System.exit(1);
            }
        }
        System.out.println("\nDone!");
    }
}
```

- Para obtener más información sobre la API, consulta ListTablesla Referencia AWS SDK for Java 2.x de la API.

`PutItem`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutItem`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Coloca un objeto en una mesa usando DynamoDbClient.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.PutItemRequest;
import software.amazon.awssdk.services.dynamodb.model.PutItemResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import java.util.HashMap;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To place items into an Amazon DynamoDB table using the AWS SDK for Java V2,
 * its better practice to use the
 * Enhanced Client. See the EnhancedPutItem example.
 */
public class PutItem {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <tableName> <key> <keyVal> <albumtitle> <albumtitleval> <awards>
 <awardsval> <Songtitle> <songtitleval>

                Where:
                    tableName - The Amazon DynamoDB table in which an item is placed
 (for example, Music3).
```

```
                    key - The key used in the Amazon DynamoDB table (for example,
Artist).
                    keyval - The key value that represents the item to get (for
example, Famous Band).
                    albumTitle - The Album title (for example, AlbumTitle).
                    AlbumTitleValue - The name of the album (for example, Songs
About Life ).
                    Awards - The awards column (for example, Awards).
                    AwardVal - The value of the awards (for example, 10).
                    SongTitle - The song title (for example, SongTitle).
                    SongTitleVal - The value of the song title (for example, Happy
Day).
                **Warning** This program will  place an item that you specify into a
table!
                """;

        if (args.length != 9) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        String key = args[1];
        String keyVal = args[2];
        String albumTitle = args[3];
        String albumTitleValue = args[4];
        String awards = args[5];
        String awardVal = args[6];
        String songTitle = args[7];
        String songTitleVal = args[8];

        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        putItemInTable(ddb, tableName, key, keyVal, albumTitle, albumTitleValue,
awards, awardVal, songTitle,
                songTitleVal);
        System.out.println("Done!");
        ddb.close();
    }

    public static void putItemInTable(DynamoDbClient ddb,
```

```
            String tableName,
            String key,
            String keyVal,
            String albumTitle,
            String albumTitleValue,
            String awards,
            String awardVal,
            String songTitle,
            String songTitleVal) {

        HashMap<String, AttributeValue> itemValues = new HashMap<>();
        itemValues.put(key, AttributeValue.builder().s(keyVal).build());
        itemValues.put(songTitle, AttributeValue.builder().s(songTitleVal).build());
        itemValues.put(albumTitle,
 AttributeValue.builder().s(albumTitleValue).build());
        itemValues.put(awards, AttributeValue.builder().s(awardVal).build());

        PutItemRequest request = PutItemRequest.builder()
                .tableName(tableName)
                .item(itemValues)
                .build();

        try {
            PutItemResponse response = ddb.putItem(request);
            System.out.println(tableName + " was successfully updated. The request
 id is "
                    + response.responseMetadata().requestId());

        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
 found.\n", tableName);
            System.err.println("Be sure that it exists and that you've typed its
 name correctly!");
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulte PutItemla Referencia AWS SDK for Java 2.x de la API.

`Query`

En el siguiente ejemplo de código, se muestra cómo utilizar `Query`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Consulta una tabla mediante DynamoDbClient.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import java.util.HashMap;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To query items from an Amazon DynamoDB table using the AWS SDK for Java V2,
 * its better practice to use the
 * Enhanced Client. See the EnhancedQueryRecords example.
 */
public class Query {
    public static void main(String[] args) {
        final String usage = """

                Usage:
```

```
                    <tableName> <partitionKeyName> <partitionKeyVal>

                Where:
                    tableName - The Amazon DynamoDB table to put the item in (for
 example, Music3).
                    partitionKeyName - The partition key name of the Amazon DynamoDB
 table (for example, Artist).
                    partitionKeyVal - The value of the partition key that should
 match (for example, Famous Band).
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        String partitionKeyName = args[1];
        String partitionKeyVal = args[2];

        // For more information about an alias, see:
        // https://docs.aws.amazon.com/amazondynamodb/latest/developerguide/
Expressions.ExpressionAttributeNames.html
        String partitionAlias = "#a";

        System.out.format("Querying %s", tableName);
        System.out.println("");
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        int count = queryTable(ddb, tableName, partitionKeyName, partitionKeyVal,
 partitionAlias);
        System.out.println("There were " + count + "  record(s) returned");
        ddb.close();
    }

    public static int queryTable(DynamoDbClient ddb, String tableName, String
 partitionKeyName, String partitionKeyVal,
            String partitionAlias) {
        // Set up an alias for the partition key name in case it's a reserved word.
        HashMap<String, String> attrNameAlias = new HashMap<String, String>();
        attrNameAlias.put(partitionAlias, partitionKeyName);
```

```
        // Set up mapping of the partition name with the value.
        HashMap<String, AttributeValue> attrValues = new HashMap<>();
        attrValues.put(":" + partitionKeyName, AttributeValue.builder()
                .s(partitionKeyVal)
                .build());

        QueryRequest queryReq = QueryRequest.builder()
                .tableName(tableName)
                .keyConditionExpression(partitionAlias + " = :" + partitionKeyName)
                .expressionAttributeNames(attrNameAlias)
                .expressionAttributeValues(attrValues)
                .build();

        try {
            QueryResponse response = ddb.query(queryReq);
            return response.count();

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return -1;
    }
}
```

Consultar una tabla con `DynamoDbClient` y un índice secundario.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import java.util.HashMap;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * Create the Movies table by running the Scenario example and loading the Movie
 * data from the JSON file. Next create a secondary
 * index for the Movies table that uses only the year column. Name the index
 * **year-index**. For more information, see:
 *
 * https://docs.aws.amazon.com/amazondynamodb/latest/developerguide/GSI.html
 */
public class QueryItemsUsingIndex {
    public static void main(String[] args) {
        String tableName = "Movies";
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        queryIndex(ddb, tableName);
        ddb.close();
    }

    public static void queryIndex(DynamoDbClient ddb, String tableName) {
        try {
            Map<String, String> expressionAttributesNames = new HashMap<>();
            expressionAttributesNames.put("#year", "year");
            Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();
            expressionAttributeValues.put(":yearValue",
 AttributeValue.builder().n("2013").build());

            QueryRequest request = QueryRequest.builder()
                    .tableName(tableName)
                    .indexName("year-index")
                    .keyConditionExpression("#year = :yearValue")
                    .expressionAttributeNames(expressionAttributesNames)
                    .expressionAttributeValues(expressionAttributeValues)
                    .build();

            System.out.println("=== Movie Titles ===");
            QueryResponse response = ddb.query(request);
            response.items()
                    .forEach(movie -> System.out.println(movie.get("title").s()));

        } catch (DynamoDbException e) {
```

```
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

`Scan`

En el siguiente ejemplo de código, se muestra cómo utilizar `Scan`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Escanea una tabla de Amazon DynamoDB utilizando. DynamoDbClient

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ScanRequest;
import software.amazon.awssdk.services.dynamodb.model.ScanResponse;
import java.util.Map;
import java.util.Set;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To scan items from an Amazon DynamoDB table using the AWS SDK for Java V2,
```

```
 * its better practice to use the
 * Enhanced Client, See the EnhancedScanRecords example.
 */

public class DynamoDBScanItems {
    public static void main(String[] args) {

        final String usage = """

                Usage:
                    <tableName>

                Where:
                    tableName - The Amazon DynamoDB table to get information from
 (for example, Music3).
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        scanItems(ddb, tableName);
        ddb.close();
    }

    public static void scanItems(DynamoDbClient ddb, String tableName) {
        try {
            ScanRequest scanRequest = ScanRequest.builder()
                    .tableName(tableName)
                    .build();

            ScanResponse response = ddb.scan(scanRequest);
            for (Map<String, AttributeValue> item : response.items()) {
                Set<String> keys = item.keySet();
                for (String key : keys) {
                    System.out.println("The key name is " + key + "\n");
                    System.out.println("The value is " + item.get(key).s());
```

```
                }
            }

        } catch (DynamoDbException e) {
            e.printStackTrace();
            System.exit(1);
        }
    }
}
```

- Para obtener información sobre la API, consulte Scan en la referencia de la API de AWS SDK for Java 2.x .

`UpdateItem`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateItem`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Actualiza un elemento de una tabla mediante DynamoDbClient.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.AttributeAction;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.AttributeValueUpdate;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import java.util.HashMap;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To update an Amazon DynamoDB table using the AWS SDK for Java V2, its better
 * practice to use the
 * Enhanced Client, See the EnhancedModifyItem example.
 */
public class UpdateItem {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <tableName> <key> <keyVal> <name> <updateVal>

                Where:
                    tableName - The Amazon DynamoDB table (for example, Music3).
                    key - The name of the key in the table (for example, Artist).
                    keyVal - The value of the key (for example, Famous Band).
                    name - The name of the column where the value is updated (for
 example, Awards).
                    updateVal - The value used to update an item (for example, 14).
                 Example:
                    UpdateItem Music3 Artist Famous Band Awards 14
                """;

        if (args.length != 5) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        String key = args[1];
        String keyVal = args[2];
        String name = args[3];
        String updateVal = args[4];

        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();
        updateTableItem(ddb, tableName, key, keyVal, name, updateVal);
        ddb.close();
    }
```

```
    public static void updateTableItem(DynamoDbClient ddb,
            String tableName,
            String key,
            String keyVal,
            String name,
            String updateVal) {

        HashMap<String, AttributeValue> itemKey = new HashMap<>();
        itemKey.put(key, AttributeValue.builder()
                .s(keyVal)
                .build());

        HashMap<String, AttributeValueUpdate> updatedValues = new HashMap<>();
        updatedValues.put(name, AttributeValueUpdate.builder()
                .value(AttributeValue.builder().s(updateVal).build())
                .action(AttributeAction.PUT)
                .build());

        UpdateItemRequest request = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(itemKey)
                .attributeUpdates(updatedValues)
                .build();

        try {
            ddb.updateItem(request);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println("The Amazon DynamoDB table was updated!");
    }
}
```

- Para obtener más información sobre la API, consulte UpdateItemla Referencia AWS SDK for Java 2.x de la API.

`UpdateTimeToLive`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateTimeToLive`.

SDK para Java 2.x

Habilite TTL en una tabla de DynamoDB existente con AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import software.amazon.awssdk.services.dynamodb.model.TimeToLiveSpecification;
import software.amazon.awssdk.services.dynamodb.model.UpdateTimeToLiveRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateTimeToLiveResponse;

import java.util.logging.Level;
import java.util.logging.Logger;

    public UpdateTimeToLiveResponse enableTTL(final String tableName, final String
 attributeName, final Region region) {
        final TimeToLiveSpecification ttlSpec = TimeToLiveSpecification.builder()
            .attributeName(attributeName)
            .enabled(true)
            .build();

        final UpdateTimeToLiveRequest request = UpdateTimeToLiveRequest.builder()
            .tableName(tableName)
            .timeToLiveSpecification(ttlSpec)
            .build();

        try (DynamoDbClient ddb = dynamoDbClient != null
            ? dynamoDbClient
            : DynamoDbClient.builder().region(region).build()) {
            return ddb.updateTimeToLive(request);
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
    }
```

Deshabilite TTL en una tabla de DynamoDB existente con AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import software.amazon.awssdk.services.dynamodb.model.TimeToLiveSpecification;
import software.amazon.awssdk.services.dynamodb.model.UpdateTimeToLiveRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateTimeToLiveResponse;

import java.util.logging.Level;
import java.util.logging.Logger;

    public UpdateTimeToLiveResponse disableTTL(
        final String tableName, final String attributeName, final Region region) {
        final TimeToLiveSpecification ttlSpec = TimeToLiveSpecification.builder()
            .attributeName(attributeName)
            .enabled(false)
            .build();

        final UpdateTimeToLiveRequest request = UpdateTimeToLiveRequest.builder()
            .tableName(tableName)
            .timeToLiveSpecification(ttlSpec)
            .build();

        try (DynamoDbClient ddb = dynamoDbClient != null
            ? dynamoDbClient
            : DynamoDbClient.builder().region(region).build()) {
            return ddb.updateTimeToLive(request);
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulte UpdateTimeToLivela Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación de una aplicación para enviar datos a una tabla de DynamoDB

El siguiente ejemplo de código muestra cómo crear una aplicación que envíe datos a una tabla de Amazon DynamoDB y que le notifique cuando un usuario actualice la tabla.

SDK para Java 2.x

Indica cómo crear una aplicación web dinámica que envíe datos mediante la API Java de Amazon DynamoDB y un mensaje de texto mediante la API Java de Amazon Simple Notification Service.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- DynamoDB
- Amazon SNS

Comparación de varios valores con un solo atributo

El siguiente ejemplo de código muestra cómo comparar varios valores con un solo atributo en DynamoDB.

- Utilice el operador IN para comparar varios valores con un solo atributo.
- Compare el operador IN con varias condiciones OR.
- Conozca las ventajas de rendimiento y complejidad de las expresiones que ofrece el uso de IN.

SDK para Java 2.x

Compare varios valores con un único atributo en DynamoDB mediante. AWS SDK for Java 2.x

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ScanRequest;
import software.amazon.awssdk.services.dynamodb.model.ScanResponse;
```

```
import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Locale;
import java.util.Map;

    /**
     * Queries a table using the IN operator to compare multiple values with a
 single attribute.
     *
     * <p>This method demonstrates how to use the IN operator in a filter expression
     * to match an attribute against multiple values.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param partitionKeyName The name of the partition key attribute
     * @param partitionKeyValue The value of the partition key to query
     * @param attributeName The name of the attribute to compare
     * @param valuesList List of values to compare against
     * @return The query response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static QueryResponse compareMultipleValues(
        DynamoDbClient dynamoDbClient,
        String tableName,
        String partitionKeyName,
        AttributeValue partitionKeyValue,
        String attributeName,
        List<AttributeValue> valuesList) {

        // Create expression attribute names
        Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put("#pkName", partitionKeyName);
        expressionAttributeNames.put("#attrName", attributeName);

        // Create expression attribute values
        Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();
        expressionAttributeValues.put(":pkValue", partitionKeyValue);

        // Add values for IN operator
        for (int i = 0; i < valuesList.size(); i++) {
            expressionAttributeValues.put(":val" + i, valuesList.get(i));
        }
```

```
        // Build the IN clause
        StringBuilder inClause = new StringBuilder();
        for (int i = 0; i < valuesList.size(); i++) {
            if (i > 0) {
                inClause.append(", ");
            }
            inClause.append(":val").append(i);
        }

        // Define the query parameters
        QueryRequest request = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression("#pkName = :pkValue")
            .filterExpression("#attrName IN (" + inClause.toString() + ")")
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        // Perform the query operation
        return dynamoDbClient.query(request);
    }

    /**
     * Queries a table using multiple OR conditions to compare multiple values with
a single attribute.
     *
     * <p>This method demonstrates the alternative approach to using the IN
operator,
     * by using multiple OR conditions.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param partitionKeyName The name of the partition key attribute
     * @param partitionKeyValue The value of the partition key to query
     * @param attributeName The name of the attribute to compare
     * @param valuesList List of values to compare against
     * @return The query response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static QueryResponse compareWithOrConditions(
        DynamoDbClient dynamoDbClient,
        String tableName,
        String partitionKeyName,
        AttributeValue partitionKeyValue,
```

```
        String attributeName,
        List<AttributeValue> valuesList) {

        // Create expression attribute names
        Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put("#pkName", partitionKeyName);
        expressionAttributeNames.put("#attrName", attributeName);

        // Create expression attribute values
        Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();
        expressionAttributeValues.put(":pkValue", partitionKeyValue);

        // Add values for OR conditions
        for (int i = 0; i < valuesList.size(); i++) {
            expressionAttributeValues.put(":val" + i, valuesList.get(i));
        }

        // Build the OR conditions
        StringBuilder orConditions = new StringBuilder();
        for (int i = 0; i < valuesList.size(); i++) {
            if (i > 0) {
                orConditions.append(" OR ");
            }
            orConditions.append("#attrName = :val").append(i);
        }

        // Define the query parameters
        QueryRequest request = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression("#pkName = :pkValue")
            .filterExpression(orConditions.toString())
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        // Perform the query operation
        return dynamoDbClient.query(request);
    }

    /**
     * Compares the performance of using the IN operator versus multiple OR
conditions.
     *
```

```
    * <p>This method demonstrates the performance difference between using the IN
operator
    * and using multiple OR conditions.
    *
    * @param dynamoDbClient The DynamoDB client
    * @param tableName The name of the DynamoDB table
    * @param partitionKeyName The name of the partition key attribute
    * @param partitionKeyValue The value of the partition key to query
    * @param attributeName The name of the attribute to compare
    * @param valuesList List of values to compare against
    * @return Map containing the performance comparison results
    */
   public static Map<String, Object> comparePerformance(
       DynamoDbClient dynamoDbClient,
       String tableName,
       String partitionKeyName,
       AttributeValue partitionKeyValue,
       String attributeName,
       List<AttributeValue> valuesList) {

       Map<String, Object> results = new HashMap<>();

       try {
           // Measure performance of IN operator
           long inStartTime = System.nanoTime();
           QueryResponse inResponse = compareMultipleValues(
               dynamoDbClient, tableName, partitionKeyName, partitionKeyValue,
attributeName, valuesList);
           long inEndTime = System.nanoTime();
           long inDuration = inEndTime - inStartTime;

           // Measure performance of OR conditions
           long orStartTime = System.nanoTime();
           QueryResponse orResponse = compareWithOrConditions(
               dynamoDbClient, tableName, partitionKeyName, partitionKeyValue,
attributeName, valuesList);
           long orEndTime = System.nanoTime();
           long orDuration = orEndTime - orStartTime;

           // Record results
           results.put("inOperatorDuration", inDuration);
           results.put("orConditionsDuration", orDuration);
           results.put("inOperatorItems", inResponse.count());
           results.put("orConditionsItems", orResponse.count());
```

```
            results.put("inOperatorExpression", "IN operator with " +
valuesList.size() + " values");
            results.put("orConditionsExpression", valuesList.size() + " OR
conditions");
            results.put("success", true);

        } catch (DynamoDbException e) {
            results.put("success", false);
            results.put("error", e.getMessage());
        }

        return results;
    }

    /**
     * Scans a table using the IN operator with a large number of values.
     *
     * <p>This method demonstrates how to use the IN operator with a large number of
values,
     * which can help stay within the 300 operator limit.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param attributeName The name of the attribute to compare
     * @param valuesList List of values to compare against
     * @return The scan response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static ScanResponse scanWithLargeInClause(
        DynamoDbClient dynamoDbClient, String tableName, String attributeName,
List<AttributeValue> valuesList) {

        // Create expression attribute names
        Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put("#attrName", attributeName);

        // Create expression attribute values
        Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();

        // Add values for IN operator
        for (int i = 0; i < valuesList.size(); i++) {
            expressionAttributeValues.put(":val" + i, valuesList.get(i));
        }
```

```
        // Build the IN clause
        StringBuilder inClause = new StringBuilder();
        for (int i = 0; i < valuesList.size(); i++) {
            if (i > 0) {
                inClause.append(", ");
            }
            inClause.append(":val").append(i);
        }

        // Define the scan parameters
        ScanRequest request = ScanRequest.builder()
            .tableName(tableName)
            .filterExpression("#attrName IN (" + inClause.toString() + ")")
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        // Perform the scan operation
        return dynamoDbClient.scan(request);
    }

    /**
     * Generates a list of sample values for testing.
     *
     * <p>Helper method to generate a list of sample values for testing.
     *
     * @param valueType The type of values to generate (string, number, or boolean)
     * @param count The number of values to generate
     * @return List of generated attribute values
     */
    public static List<AttributeValue> generateSampleValues(String valueType, int
count) {
        List<AttributeValue> values = new ArrayList<>();

        for (int i = 0; i < count; i++) {
            AttributeValue value;

            switch (valueType.toLowerCase(Locale.ROOT)) {
                case "string":
                    value = AttributeValue.builder().s("Value" + i).build();
                    break;
                case "number":
                    value = AttributeValue.builder().n(String.valueOf(i)).build();
                    break;
```

```
                case "boolean":
                    value = AttributeValue.builder().bool(i % 2 == 0).build();
                    break;
                default:
                    throw new IllegalArgumentException("Unsupported value type: " +
valueType);
            }

            values.add(value);
        }

        return values;
    }
```

Ejemplo de uso de la comparación de varios valores con. AWS SDK for Java 2.x

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        System.out.println("Demonstrating how to compare multiple values with a
single attribute in DynamoDB");

        try {
            // Example 1: Using the IN operator
            System.out.println("\nExample 1: Using the IN operator");
            List<AttributeValue> categories = List.of(
                AttributeValue.builder().s("Electronics").build(),
                AttributeValue.builder().s("Computers").build(),
                AttributeValue.builder().s("Accessories").build());

            QueryResponse inResponse = compareMultipleValues(
                dynamoDbClient,
                tableName,
                "Department",
                AttributeValue.builder().s("Retail").build(),
                "Category",
                categories);

            System.out.println("Found " + inResponse.count() + " items using IN
operator");
            System.out.println("Items: " + inResponse.items());

            // Example 2: Using multiple OR conditions
```

```
            System.out.println("\nExample 2: Using multiple OR conditions");
            QueryResponse orResponse = compareWithOrConditions(
                dynamoDbClient,
                tableName,
                "Department",
                AttributeValue.builder().s("Retail").build(),
                "Category",
                categories);

            System.out.println("Found " + orResponse.count() + " items using OR
conditions");
            System.out.println("Items: " + orResponse.items());

            // Example 3: Performance comparison
            System.out.println("\nExample 3: Performance comparison");
            Map<String, Object> perfComparison = comparePerformance(
                dynamoDbClient,
                tableName,
                "Department",
                AttributeValue.builder().s("Retail").build(),
                "Category",
                categories);

            if ((boolean) perfComparison.get("success")) {
                System.out.println("IN operator duration: " +
perfComparison.get("inOperatorDuration") + " ns");
                System.out.println("OR conditions duration: " +
perfComparison.get("orConditionsDuration") + " ns");
                System.out.println("IN operator found " +
perfComparison.get("inOperatorItems") + " items");
                System.out.println("OR conditions found " +
perfComparison.get("orConditionsItems") + " items");
                System.out.println("Expression complexity comparison:");
                System.out.println("  IN operator: " +
perfComparison.get("inOperatorExpression"));
                System.out.println("  OR conditions: " +
perfComparison.get("orConditionsExpression"));
            } else {
                System.out.println("Performance comparison failed: " +
perfComparison.get("error"));
            }

            // Example 4: Using IN with a large number of values
```

```
            System.out.println("\nExample 4: Using IN with a large number of
values");
            List<AttributeValue> productIds = generateSampleValues("string", 20);

            ScanResponse largeInResponse = scanWithLargeInClause(dynamoDbClient,
tableName, "ProductId", productIds);

            System.out.println(
                "Found " + largeInResponse.count() + " items using IN with " +
productIds.size() + " values");

            // Explain the benefits of using IN
            System.out.println("\nKey points about using the IN operator in
DynamoDB:");
            System.out.println("1. The IN operator allows comparing a single
attribute against multiple values");
            System.out.println("2. IN is more concise than using multiple OR
conditions");
            System.out.println("3. IN counts as only 1 operator regardless of the
number of values");
            System.out.println("4. Multiple OR conditions count as 1 operator per
condition plus 1 per OR");
            System.out.println("5. Using IN helps stay within the 300 operator limit
for complex expressions");
            System.out.println("6. IN can be used in filter expressions and
condition expressions");
            System.out.println("7. The IN operator supports up to 100 comparison
values");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - Query
  - Scan

Actualización condicional del TTL de un elemento

El siguiente ejemplo de código muestra cómo actualizar de forma condicional el TTL de un elemento.

SDK para Java 2.x

Actualice el TTL en un elemento de DynamoDB existente en una tabla con una condición.

```
package com.amazon.samplelib.ttl;

import com.amazon.samplelib.CodeSampleUtils;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import
 software.amazon.awssdk.services.dynamodb.model.ConditionalCheckFailedException;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.Map;
import java.util.Optional;

/**
 * Updates an item in a DynamoDB table with TTL attributes using a conditional
 expression.
 * This class demonstrates how to conditionally update TTL expiration timestamps.
 */
public class UpdateTTLConditional {

    private static final String USAGE =
        """
            Usage:
                <tableName> <primaryKey> <sortKey> <region>
            Where:
                tableName - The Amazon DynamoDB table being queried.
                primaryKey - The name of the primary key. Also known as the hash or
 partition key.
                sortKey - The name of the sort key. Also known as the range
 attribute.
                region (optional) - The AWS region that the Amazon DynamoDB table is
 located in. (Default: us-east-1)
```

```
            """;
    private static final int DAYS_TO_EXPIRE = 90;
    private static final int SECONDS_PER_DAY = 24 * 60 * 60;
    private static final String PRIMARY_KEY_ATTR = "primaryKey";
    private static final String SORT_KEY_ATTR = "sortKey";
    private static final String UPDATED_AT_ATTR = "updatedAt";
    private static final String EXPIRE_AT_ATTR = "expireAt";
    private static final String UPDATE_EXPRESSION = "SET " + UPDATED_AT_ATTR + "=:c,
" + EXPIRE_AT_ATTR + "=:e";
    private static final String CONDITION_EXPRESSION = "attribute_exists(" +
PRIMARY_KEY_ATTR + ")";
    private static final String SUCCESS_MESSAGE = "%s UpdateItem operation with TTL
successful.";
    private static final String CONDITION_FAILED_MESSAGE = "Condition check failed.
Item does not exist.";
    private static final String TABLE_NOT_FOUND_ERROR = "Error: The Amazon DynamoDB
table \"%s\" can't be found.";

    private final DynamoDbClient dynamoDbClient;

    /**
     * Constructs an UpdateTTLConditional with a default DynamoDB client.
     */
    public UpdateTTLConditional() {
        this.dynamoDbClient = null;
    }

    /**
     * Constructs an UpdateTTLConditional with the specified DynamoDB client.
     *
     * @param dynamoDbClient The DynamoDB client to use
     */
    public UpdateTTLConditional(final DynamoDbClient dynamoDbClient) {
        this.dynamoDbClient = dynamoDbClient;
    }

    /**
     * Main method to demonstrate conditionally updating an item with TTL.
     *
     * @param args Command line arguments
     */
    public static void main(final String[] args) {
        try {
            int result = new UpdateTTLConditional().processArgs(args);
```

```
            System.exit(result);
        } catch (Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    /**
     * Process command line arguments and conditionally update an item with TTL.
     *
     * @param args Command line arguments
     * @return 0 if successful, non-zero otherwise
     * @throws ResourceNotFoundException If the table doesn't exist
     * @throws DynamoDbException If an error occurs during the operation
     * @throws IllegalArgumentException If arguments are invalid
     */
    public int processArgs(final String[] args) {
        // Argument validation (remove or replace this line when reusing this code)
        CodeSampleUtils.validateArgs(args, new int[] {3, 4}, USAGE);

        final String tableName = args[0];
        final String primaryKey = args[1];
        final String sortKey = args[2];
        final Region region = Optional.ofNullable(args.length > 3 ? args[3] : null)
            .map(Region::of)
            .orElse(Region.US_EAST_1);

        // Get current time in epoch second format
        final long currentTime = System.currentTimeMillis() / 1000;

        // Calculate expiration time 90 days from now in epoch second format
        final long expireDate = currentTime + (DAYS_TO_EXPIRE * SECONDS_PER_DAY);

        // Create the key map for the item to update
        final Map<String, AttributeValue> keyMap = Map.of(
            PRIMARY_KEY_ATTR, AttributeValue.builder().s(primaryKey).build(),
            SORT_KEY_ATTR, AttributeValue.builder().s(sortKey).build());

        // Create the expression attribute values
        final Map<String, AttributeValue> expressionAttributeValues = Map.of(
            ":c", AttributeValue.builder().n(String.valueOf(currentTime)).build(),
            ":e", AttributeValue.builder().n(String.valueOf(expireDate)).build());

        final UpdateItemRequest request = UpdateItemRequest.builder()
```

```
            .tableName(tableName)
            .key(keyMap)
            .updateExpression(UPDATE_EXPRESSION)
            .conditionExpression(CONDITION_EXPRESSION)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try (DynamoDbClient ddb = dynamoDbClient != null
            ? dynamoDbClient
            : DynamoDbClient.builder().region(region).build()) {
            final UpdateItemResponse response = ddb.updateItem(request);
            System.out.println(String.format(SUCCESS_MESSAGE, tableName));
            return 0;
        } catch (ConditionalCheckFailedException e) {
            System.err.println(CONDITION_FAILED_MESSAGE);
            throw e;
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
    }
}
```

- Para obtener más información sobre la API, consulte UpdateItemla referencia AWS SDK for Java 2.x de la API.

Recuento de operadores de expresión

El siguiente ejemplo de código muestra cómo contar operadores de expresión en DynamoDB.

- Conozca el límite de 300 operadores de DynamoDB.
- Cuente los operadores en expresiones complejas.
- Optimice las expresiones para mantenerse dentro de los límites.

SDK para Java 2.x

Demuestre el recuento de operadores de expresión con AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.Map;
import java.util.regex.Matcher;
import java.util.regex.Pattern;

    /**
     * Creates a complex filter expression with a specified number of conditions.
     *
     * <p>This method demonstrates how to generate a complex expression with
     * a specific number of operators to test the 300 operator limit.
     *
     * @param conditionsCount Number of conditions to include
     * @param useAnd Whether to use AND (true) or OR (false) between conditions
     * @return Map containing the filter expression, attribute values, and operator
 count
     */
    public static Map<String, Object> createComplexFilterExpression(int
 conditionsCount, boolean useAnd) {
        // Initialize the expression parts and attribute values
        StringBuilder filterExpression = new StringBuilder();
        Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();

        // Generate the specified number of conditions
        for (int i = 0; i < conditionsCount; i++) {
            // Add the operator between conditions (except for the first one)
            if (i > 0) {
                filterExpression.append(useAnd ? " AND " : " OR ");
            }

            // Alternate between different comparison operators for variety
            String valueKey = ":val" + i;

            switch (i % 5) {
                case 0:
                    filterExpression.append("attribute").append(i).append(" =
 ").append(valueKey);
                    expressionAttributeValues.put(
```

```
                        valueKey, AttributeValue.builder().s("value" + i).build());
                    break;
                case 1:
                    filterExpression.append("attribute").append(i).append(" >
").append(valueKey);
                    expressionAttributeValues.put(
                        valueKey,
AttributeValue.builder().n(String.valueOf(i)).build());
                    break;
                case 2:
                    filterExpression.append("attribute").append(i).append(" <
").append(valueKey);
                    expressionAttributeValues.put(
                        valueKey,
                        AttributeValue.builder().n(String.valueOf(i * 10)).build());
                    break;
                case 3:
                    filterExpression
                        .append("contains(attribute")
                        .append(i)
                        .append(", ")
                        .append(valueKey)
                        .append(")");
                    expressionAttributeValues.put(
                        valueKey, AttributeValue.builder().s("substring" +
i).build());
                    break;
                case 4:
                    filterExpression
                        .append("attribute_exists(attribute")
                        .append(i)
                        .append(")");
                    break;
                default:
                    // This case will never be reached, but added to satisfy
checkstyle
                    break;
            }
        }

        // Calculate the operator count
        // Each condition has 1 operator (=, >, <, contains, attribute_exists)
        // Each AND or OR between conditions is 1 operator
```

```
        int operatorCount = conditionsCount + (conditionsCount > 0 ? conditionsCount
- 1 : 0);

        // Create the result map
        Map<String, Object> result = new HashMap<>();
        result.put("filterExpression", filterExpression.toString());
        result.put("expressionAttributeValues", expressionAttributeValues);
        result.put("operatorCount", operatorCount);

        return result;
    }

    /**
     * Creates a complex update expression with a specified number of operations.
     *
     * <p>This method demonstrates how to generate a complex update expression with
     * a specific number of operators to test the 300 operator limit.
     *
     * @param operationsCount Number of operations to include
     * @return Map containing the update expression, attribute values, and operator
count
     */
    public static Map<String, Object> createComplexUpdateExpression(int
operationsCount) {
        // Initialize the expression parts and attribute values
        StringBuilder updateExpression = new StringBuilder("SET ");
        Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();

        // Generate the specified number of SET operations
        for (int i = 0; i < operationsCount; i++) {
            // Add comma between operations (except for the first one)
            if (i > 0) {
                updateExpression.append(", ");
            }

            // Alternate between different types of SET operations
            String valueKey = ":val" + i;

            switch (i % 3) {
                case 0:
                    // Simple assignment (1 operator: =)
                    updateExpression.append("attribute").append(i).append(" =
").append(valueKey);
                    expressionAttributeValues.put(
```

```
                        valueKey, AttributeValue.builder().s("value" + i).build());
                    break;
                case 1:
                    // Addition (2 operators: = and +)
                    updateExpression
                        .append("attribute")
                        .append(i)
                        .append(" = attribute")
                        .append(i)
                        .append(" + ")
                        .append(valueKey);
                    expressionAttributeValues.put(
                        valueKey,
AttributeValue.builder().n(String.valueOf(i)).build());
                    break;
                case 2:
                    // Conditional assignment with if_not_exists (2 operators: = and
if_not_exists)
                    updateExpression
                        .append("attribute")
                        .append(i)
                        .append(" = if_not_exists(attribute")
                        .append(i)
                        .append(", ")
                        .append(valueKey)
                        .append(")");
                    expressionAttributeValues.put(
                        valueKey,
                        AttributeValue.builder().n(String.valueOf(i * 10)).build());
                    break;
                default:
                    // This case will never be reached, but added to satisfy
checkstyle
                    break;
            }
        }

        // Calculate the operator count
        // Each operation has 1-2 operators as noted above
        int operatorCount = 0;
        for (int i = 0; i < operationsCount; i++) {
            operatorCount += (i % 3 == 0) ? 1 : 2;
        }
```

```
        // Create the result map
        Map<String, Object> result = new HashMap<>();
        result.put("updateExpression", updateExpression.toString());
        result.put("expressionAttributeValues", expressionAttributeValues);
        result.put("operatorCount", operatorCount);

        return result;
    }

    /**
     * Test the operator limit by attempting an operation with a complex expression.
     *
     * <p>This method demonstrates what happens when an expression approaches or
     * exceeds the 300 operator limit.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param operatorCount Target number of operators to include
     * @return Map containing the result of the operation attempt
     */
    public static Map<String, Object> testOperatorLimit(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, int operatorCount) {

        // Create a complex update expression with the specified operator count
        Map<String, Object> expressionData =
            createComplexUpdateExpression((int) Math.ceil(operatorCount / 1.5)); //
Adjust to get close to target count

        String updateExpression = (String) expressionData.get("updateExpression");
        @SuppressWarnings("unchecked")
        Map<String, AttributeValue> expressionAttributeValues =
            (Map<String, AttributeValue>)
expressionData.get("expressionAttributeValues");
        int actualCount = (int) expressionData.get("operatorCount");

        System.out.println("Generated update expression with approximately " +
actualCount + " operators");

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
```

```
            .updateExpression(updateExpression)
            .expressionAttributeValues(expressionAttributeValues)
            .returnValues("UPDATED_NEW")
            .build();

        try {
            // Attempt the update operation
            UpdateItemResponse response = dynamoDbClient.updateItem(request);

            Map<String, Object> result = new HashMap<>();
            result.put("success", true);
            result.put("message", "Operation succeeded with " + actualCount + "
operators");
            result.put("data", response);
            return result;

        } catch (DynamoDbException e) {
            // Check if the error is due to exceeding the operator limit
            if (e.getMessage().contains("too many operators")) {
                Map<String, Object> result = new HashMap<>();
                result.put("success", false);
                result.put("message", "Operation failed: " + e.getMessage());
                result.put("operatorCount", actualCount);
                return result;
            }

            // Return other errors
            Map<String, Object> result = new HashMap<>();
            result.put("success", false);
            result.put("message", "Operation failed: " + e.getMessage());
            result.put("error", e);
            return result;
        }
    }

    /**
     * Break down a complex expression into multiple simpler operations.
     *
     * <p>This method demonstrates how to handle expressions that would exceed
     * the 300 operator limit by breaking them into multiple operations.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
```

```
    * @param totalOperations Total number of operations to perform
    * @return Map containing the results of the operations
    */
   public static Map<String, Object> breakDownComplexExpression(
       DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, int totalOperations) {

       // Calculate how many operations we can safely include in each batch
       // Using 150 as a conservative limit (well below 300)
       final int operationsPerBatch = 100;
       final int batchCount = (int) Math.ceil((double) totalOperations /
operationsPerBatch);

       System.out.println("Breaking down " + totalOperations + " operations into "
+ batchCount + " batches");

       Map<String, Object> results = new HashMap<>();
       results.put("totalBatches", batchCount);

       Map<Integer, Map<String, Object>> batchResults = new HashMap<>();

       // Process each batch
       for (int batch = 0; batch < batchCount; batch++) {
           // Calculate the operations for this batch
           int batchStart = batch * operationsPerBatch;
           int batchEnd = Math.min(batchStart + operationsPerBatch,
totalOperations);
           int batchSize = batchEnd - batchStart;

           System.out.println(
               "Processing batch " + (batch + 1) + "/" + batchCount + " with " +
batchSize + " operations");

           // Create an update expression for this batch
           Map<String, Object> expressionData =
createComplexUpdateExpression(batchSize);

           String updateExpression = (String)
expressionData.get("updateExpression");
           @SuppressWarnings("unchecked")
           Map<String, AttributeValue> expressionAttributeValues =
               (Map<String, AttributeValue>)
expressionData.get("expressionAttributeValues");
           int operatorCount = (int) expressionData.get("operatorCount");
```

```
            // Define the update parameters
            UpdateItemRequest request = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression(updateExpression)
                .expressionAttributeValues(expressionAttributeValues)
                .returnValues("UPDATED_NEW")
                .build();

            try {
                // Perform the update operation for this batch
                UpdateItemResponse response = dynamoDbClient.updateItem(request);

                Map<String, Object> batchResult = new HashMap<>();
                batchResult.put("batch", batch + 1);
                batchResult.put("success", true);
                batchResult.put("operatorCount", operatorCount);
                batchResult.put("attributes", response.attributes());

                batchResults.put(batch, batchResult);

            } catch (DynamoDbException e) {
                Map<String, Object> batchResult = new HashMap<>();
                batchResult.put("batch", batch + 1);
                batchResult.put("success", false);
                batchResult.put("operatorCount", operatorCount);
                batchResult.put("error", e.getMessage());

                batchResults.put(batch, batchResult);

                // Continue with next batch instead of breaking
                continue;
            }
        }

        results.put("results", batchResults);
        return results;
    }

    /**
     * Count operators in a DynamoDB expression based on the rules in the
documentation.
     *
```

```
     * <p>This method demonstrates how operators are counted according to the
     * DynamoDB documentation.
     *
     * @param expression The DynamoDB expression to analyze
     * @return Map containing the breakdown of operator counts
     */
    public static Map<String, Integer> countOperatorsInExpression(String expression)
 {
        // Initialize counters for different operator types
        Map<String, Integer> counts = new HashMap<>();
        counts.put("comparisonOperators", 0);
        counts.put("logicalOperators", 0);
        counts.put("functions", 0);
        counts.put("arithmeticOperators", 0);
        counts.put("specialOperators", 0);
        counts.put("total", 0);

        // Count comparison operators (=, <>, <, <=, >, >=)
        // This is a simplified approach and may not catch all cases
        int comparisonCount = 0;
        Pattern comparisonPattern = Pattern.compile("(=|<>|<=|>=|<|>)");
        Matcher comparisonMatcher = comparisonPattern.matcher(expression);
        while (comparisonMatcher.find()) {
            comparisonCount++;
        }
        counts.put("comparisonOperators", comparisonCount);

        // Count logical operators (AND, OR, NOT)
        int andCount = countOccurrences(expression, "\\bAND\\b");
        int orCount = countOccurrences(expression, "\\bOR\\b");
        int notCount = countOccurrences(expression, "\\bNOT\\b");
        counts.put("logicalOperators", andCount + orCount + notCount);

        // Count functions (attribute_exists, attribute_not_exists, attribute_type,
 begins_with, contains, size)
        int functionCount = countOccurrences(
            expression,
            "\\b(attribute_exists|attribute_not_exists|attribute_type|begins_with|
contains|size|if_not_exists)\\(");
        counts.put("functions", functionCount);

        // Count arithmetic operators (+ and -)
        // This is a simplified approach and may not catch all cases
        int arithmeticCount = 0;
```

```
        Pattern arithmeticPattern = Pattern.compile("[a-zA-Z0-9_)\\]]\\s*[\\+\\-]\
\s*[a-zA-Z0-9_:(]");
        Matcher arithmeticMatcher = arithmeticPattern.matcher(expression);
        while (arithmeticMatcher.find()) {
            arithmeticCount++;
        }
        counts.put("arithmeticOperators", arithmeticCount);

        // Count special operators (BETWEEN, IN)
        int betweenCount = countOccurrences(expression, "\\bBETWEEN\\b");
        int inCount = countOccurrences(expression, "\\bIN\\b");
        counts.put("specialOperators", betweenCount + inCount);

        // Add extra operators for BETWEEN (each BETWEEN includes an AND)
        int currentLogicalOps = counts.getOrDefault("logicalOperators", 0);
        counts.put("logicalOperators", currentLogicalOps + betweenCount);

        // Calculate total
        int total = counts.getOrDefault("comparisonOperators", 0)
            + counts.getOrDefault("logicalOperators", 0)
            + counts.getOrDefault("functions", 0)
            + counts.getOrDefault("arithmeticOperators", 0)
            + counts.getOrDefault("specialOperators", 0);
        counts.put("total", total);

        return counts;
    }

    /**
     * Helper method to count occurrences of a pattern in a string.
     *
     * @param text The text to search in
     * @param regex The regular expression pattern to search for
     * @return The number of occurrences
     */
    private static int countOccurrences(String text, String regex) {
        final Pattern pattern = Pattern.compile(regex);
        final Matcher matcher = pattern.matcher(text);
        int count = 0;
        while (matcher.find()) {
            count++;
        }
        return count;
    }
```

Ejemplo de uso del operador de expresión contando con AWS SDK for Java 2.x.

```
   public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
       // Example key
       Map<String, AttributeValue> key = new HashMap<>();
       key.put("ProductId", AttributeValue.builder().s("P12345").build());

       System.out.println("Demonstrating DynamoDB expression operator counting and
the 300 operator limit");

       try {
           // Example 1: Analyze a simple expression
           System.out.println("\nExample 1: Analyzing a simple expression");
           String simpleExpression = "Price = :price AND Rating > :rating AND
Category IN (:cat1, :cat2, :cat3)";
           Map<String, Integer> simpleCount =
countOperatorsInExpression(simpleExpression);

           System.out.println("Expression: " + simpleExpression);
           System.out.println("Operator count breakdown:");
           System.out.println("- Comparison operators: " +
simpleCount.get("comparisonOperators"));
           System.out.println("- Logical operators: " +
simpleCount.get("logicalOperators"));
           System.out.println("- Functions: " + simpleCount.get("functions"));
           System.out.println("- Arithmetic operators: " +
simpleCount.get("arithmeticOperators"));
           System.out.println("- Special operators: " +
simpleCount.get("specialOperators"));
           System.out.println("- Total operators: " + simpleCount.get("total"));

           // Example 2: Analyze a complex expression
           System.out.println("\nExample 2: Analyzing a complex expression");
           String complexExpression = "(attribute_exists(Category) AND Size
BETWEEN :min AND :max) OR "
               + "(Price > :price AND contains(Description, :keyword) AND "
               + "(Rating >= :minRating OR Reviews > :minReviews))";
           Map<String, Integer> complexCount =
countOperatorsInExpression(complexExpression);
```

```
            System.out.println("Expression: " + complexExpression);
            System.out.println("Operator count breakdown:");
            System.out.println("- Comparison operators: " +
complexCount.get("comparisonOperators"));
            System.out.println("- Logical operators: " +
complexCount.get("logicalOperators"));
            System.out.println("- Functions: " + complexCount.get("functions"));
            System.out.println("- Arithmetic operators: " +
complexCount.get("arithmeticOperators"));
            System.out.println("- Special operators: " +
complexCount.get("specialOperators"));
            System.out.println("- Total operators: " + complexCount.get("total"));

            // Example 3: Test approaching the operator limit
            System.out.println("\nExample 3: Testing an expression approaching the
operator limit");
            Map<String, Object> approachingLimit = testOperatorLimit(dynamoDbClient,
tableName, key, 290);
            System.out.println(approachingLimit.get("message"));

            // Example 4: Test exceeding the operator limit
            System.out.println("\nExample 4: Testing an expression exceeding the
operator limit");
            Map<String, Object> exceedingLimit = testOperatorLimit(dynamoDbClient,
tableName, key, 310);
            System.out.println(exceedingLimit.get("message"));

            // Example 5: Breaking down a complex expression
            System.out.println("\nExample 5: Breaking down a complex expression into
multiple operations");
            Map<String, Object> breakdownResult =
breakDownComplexExpression(dynamoDbClient, tableName, key, 500);
            @SuppressWarnings("unchecked")
            Map<Integer, Map<String, Object>> results =
                (Map<Integer, Map<String, Object>>) breakdownResult.get("results");
            System.out.println(
                "Processed " + results.size() + " of " +
breakdownResult.get("totalBatches") + " batches");

            // Explain the operator counting rules
            System.out.println("\nKey points about DynamoDB expression operator
counting:");
            System.out.println("1. The maximum number of operators in any expression
is 300");
```

```
            System.out.println("2. Each comparison operator (=, <>, <, <=, >, >=)
counts as 1 operator");
            System.out.println("3. Each logical operator (AND, OR, NOT) counts as 1
operator");
            System.out.println("4. Each function call (attribute_exists, contains,
etc.) counts as 1 operator");
            System.out.println("5. Each arithmetic operator (+ or -) counts as 1
operator");
            System.out.println("6. BETWEEN counts as 2 operators (BETWEEN itself and
the AND within it)");
            System.out.println("7. IN counts as 1 operator regardless of the number
of values");
            System.out.println("8. Parentheses for grouping and attribute paths
don't count as operators");
            System.out.println("9. When you exceed the limit, the error always
reports '301 operators'");
            System.out.println("10. For complex operations, break them into multiple
smaller operations");

        } catch (Exception e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Para obtener más información sobre la API, consulte UpdateItemla referencia AWS SDK for Java 2.x de la API.

Creación de una aplicación sin servidor para administrar fotos

En el siguiente ejemplo de código se muestra cómo crear una aplicación sin servidor que permita a los usuarios administrar fotos mediante etiquetas.

SDK para Java 2.x

Muestra cómo desarrollar una aplicación de administración de activos fotográficos que detecte las etiquetas de las imágenes mediante Amazon Rekognition y las almacene para su posterior recuperación.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Para profundizar en el origen de este ejemplo, consulte la publicación en Comunidad de AWS.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB
- Lambda
- Amazon Rekognition
- Amazon S3
- Amazon SNS

Creación de una tabla con índice secundario global

En el siguiente ejemplo de código se muestra cómo crear una tabla con un índice secundario global.

SDK para Java 2.x

Cree una tabla de DynamoDB con Global Secondary Index utilizando. AWS SDK for Java 2.x

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.CreateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.DeleteTableRequest;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableRequest;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableResponse;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GlobalSecondaryIndex;
import software.amazon.awssdk.services.dynamodb.model.KeySchemaElement;
import software.amazon.awssdk.services.dynamodb.model.KeyType;
import software.amazon.awssdk.services.dynamodb.model.Projection;
import software.amazon.awssdk.services.dynamodb.model.ProjectionType;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughput;
import software.amazon.awssdk.services.dynamodb.model.PutItemRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;
import software.amazon.awssdk.services.dynamodb.waiters.DynamoDbWaiter;
```

```
import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

    public void createTable() {
        try {
            // Attribute definitions
            final List<AttributeDefinition> attributeDefinitions = new
 ArrayList<>();
            attributeDefinitions.add(AttributeDefinition.builder()
                .attributeName(ISSUE_ID_ATTR)
                .attributeType(ScalarAttributeType.S)
                .build());
            attributeDefinitions.add(AttributeDefinition.builder()
                .attributeName(TITLE_ATTR)
                .attributeType(ScalarAttributeType.S)
                .build());
            attributeDefinitions.add(AttributeDefinition.builder()
                .attributeName(CREATE_DATE_ATTR)
                .attributeType(ScalarAttributeType.S)
                .build());
            attributeDefinitions.add(AttributeDefinition.builder()
                .attributeName(DUE_DATE_ATTR)
                .attributeType(ScalarAttributeType.S)
                .build());

            // Key schema for table
            final List<KeySchemaElement> tableKeySchema = new ArrayList<>();
            tableKeySchema.add(KeySchemaElement.builder()
                .attributeName(ISSUE_ID_ATTR)
                .keyType(KeyType.HASH)
                .build()); // Partition key
            tableKeySchema.add(KeySchemaElement.builder()
                .attributeName(TITLE_ATTR)
                .keyType(KeyType.RANGE)
                .build()); // Sort key

            // Initial provisioned throughput settings for the indexes
            final ProvisionedThroughput ptIndex = ProvisionedThroughput.builder()
                .readCapacityUnits(1L)
                .writeCapacityUnits(1L)
                .build();
```

```
            // CreateDateIndex
            final List<KeySchemaElement> createDateKeySchema = new ArrayList<>();
            createDateKeySchema.add(KeySchemaElement.builder()
                .attributeName(CREATE_DATE_ATTR)
                .keyType(KeyType.HASH)
                .build());
            createDateKeySchema.add(KeySchemaElement.builder()
                .attributeName(ISSUE_ID_ATTR)
                .keyType(KeyType.RANGE)
                .build());

            final Projection createDateProjection = Projection.builder()
                .projectionType(ProjectionType.INCLUDE)
                .nonKeyAttributes(DESCRIPTION_ATTR, STATUS_ATTR)
                .build();

            final GlobalSecondaryIndex createDateIndex =
GlobalSecondaryIndex.builder()
                .indexName(CREATE_DATE_INDEX)
                .keySchema(createDateKeySchema)
                .projection(createDateProjection)
                .provisionedThroughput(ptIndex)
                .build();

            // TitleIndex
            final List<KeySchemaElement> titleKeySchema = new ArrayList<>();
            titleKeySchema.add(KeySchemaElement.builder()
                .attributeName(TITLE_ATTR)
                .keyType(KeyType.HASH)
                .build());
            titleKeySchema.add(KeySchemaElement.builder()
                .attributeName(ISSUE_ID_ATTR)
                .keyType(KeyType.RANGE)
                .build());

            final Projection titleProjection =

Projection.builder().projectionType(ProjectionType.KEYS_ONLY).build();

            final GlobalSecondaryIndex titleIndex = GlobalSecondaryIndex.builder()
                .indexName(TITLE_INDEX)
                .keySchema(titleKeySchema)
                .projection(titleProjection)
                .provisionedThroughput(ptIndex)
```

```
                .build();

            // DueDateIndex
            final List<KeySchemaElement> dueDateKeySchema = new ArrayList<>();
            dueDateKeySchema.add(KeySchemaElement.builder()
                .attributeName(DUE_DATE_ATTR)
                .keyType(KeyType.HASH)
                .build());

            final Projection dueDateProjection =
                Projection.builder().projectionType(ProjectionType.ALL).build();

            final GlobalSecondaryIndex dueDateIndex = GlobalSecondaryIndex.builder()
                .indexName(DUE_DATE_INDEX)
                .keySchema(dueDateKeySchema)
                .projection(dueDateProjection)
                .provisionedThroughput(ptIndex)
                .build();

            final CreateTableRequest createTableRequest =
CreateTableRequest.builder()
                .tableName(TABLE_NAME)
                .keySchema(tableKeySchema)
                .attributeDefinitions(attributeDefinitions)
                .globalSecondaryIndexes(createDateIndex, titleIndex, dueDateIndex)
                .provisionedThroughput(ProvisionedThroughput.builder()
                    .readCapacityUnits(1L)
                    .writeCapacityUnits(1L)
                    .build())
                .build();

            System.out.println("Creating table " + TABLE_NAME + "...");
            dynamoDbClient.createTable(createTableRequest);

            // Wait for table to become active
            System.out.println("Waiting for " + TABLE_NAME + " to become
ACTIVE...");
            final DynamoDbWaiter waiter = dynamoDbClient.waiter();
            final DescribeTableRequest describeTableRequest =
                DescribeTableRequest.builder().tableName(TABLE_NAME).build();

            final WaiterResponse<DescribeTableResponse> waiterResponse =
                waiter.waitUntilTableExists(describeTableRequest);
```

```
            waiterResponse.matched().response().ifPresent(response ->
System.out.println("Table is now ready for use"));

        } catch (DynamoDbException e) {
            System.err.println("Error creating table: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Para obtener más información sobre la API, consulte la referencia de CreateTablela AWS SDK for Java 2.x API.

Creación de una tabla con rendimiento en caliente habilitado

El siguiente ejemplo de código muestra cómo crear una tabla con el rendimiento en caliente habilitado.

SDK para Java 2.x

Cree una tabla de DynamoDB con una configuración de rendimiento en caliente mediante AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.CreateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.CreateTableResponse;
import software.amazon.awssdk.services.dynamodb.model.GlobalSecondaryIndex;
import software.amazon.awssdk.services.dynamodb.model.KeySchemaElement;
import software.amazon.awssdk.services.dynamodb.model.KeyType;
import software.amazon.awssdk.services.dynamodb.model.Projection;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughput;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;
import software.amazon.awssdk.services.dynamodb.model.WarmThroughput;

    public static WarmThroughput buildWarmThroughput(final Long readUnitsPerSecond,
 final Long writeUnitsPerSecond) {
        return WarmThroughput.builder()
            .readUnitsPerSecond(readUnitsPerSecond)
            .writeUnitsPerSecond(writeUnitsPerSecond)
            .build();
    }
```

```
    /**
     * Builds a ProvisionedThroughput object with the specified read and write
capacity units.
     *
     * @param readCapacityUnits The read capacity units
     * @param writeCapacityUnits The write capacity units
     * @return A configured ProvisionedThroughput object
     */
    public static ProvisionedThroughput buildProvisionedThroughput(
        final Long readCapacityUnits, final Long writeCapacityUnits) {
        return ProvisionedThroughput.builder()
            .readCapacityUnits(readCapacityUnits)
            .writeCapacityUnits(writeCapacityUnits)
            .build();
    }

    /**
     * Builds an AttributeDefinition with the specified name and type.
     *
     * @param attributeName The attribute name
     * @param scalarAttributeType The attribute type
     * @return A configured AttributeDefinition
     */
    private static AttributeDefinition buildAttributeDefinition(
        final String attributeName, final ScalarAttributeType scalarAttributeType) {
        return AttributeDefinition.builder()
            .attributeName(attributeName)
            .attributeType(scalarAttributeType)
            .build();
    }

    /**
     * Builds a KeySchemaElement with the specified name and key type.
     *
     * @param attributeName The attribute name
     * @param keyType The key type (HASH or RANGE)
     * @return A configured KeySchemaElement
     */
    private static KeySchemaElement buildKeySchemaElement(final String
attributeName, final KeyType keyType) {
        return KeySchemaElement.builder()
            .attributeName(attributeName)
            .keyType(keyType)
```

```
            .build();
    }

    /**
     * Creates a DynamoDB table with the specified configuration including warm
throughput settings.
     *
     * @param ddb The DynamoDB client
     * @param tableName The name of the table to create
     * @param partitionKey The partition key attribute name
     * @param sortKey The sort key attribute name
     * @param miscellaneousKeyAttribute Additional key attribute name for GSI
     * @param nonKeyAttribute Non-key attribute to include in GSI projection
     * @param tableReadCapacityUnits Read capacity units for the table
     * @param tableWriteCapacityUnits Write capacity units for the table
     * @param tableWarmReadUnitsPerSecond Warm read units per second for the table
     * @param tableWarmWriteUnitsPerSecond Warm write units per second for the table
     * @param globalSecondaryIndexName The name of the GSI to create
     * @param globalSecondaryIndexReadCapacityUnits Read capacity units for the GSI
     * @param globalSecondaryIndexWriteCapacityUnits Write capacity units for the
GSI
     * @param globalSecondaryIndexWarmReadUnitsPerSecond Warm read units per second
for the GSI
     * @param globalSecondaryIndexWarmWriteUnitsPerSecond Warm write units per
second for the GSI
     */
    public static void createDynamoDBTable(
        final DynamoDbClient ddb,
        final String tableName,
        final String partitionKey,
        final String sortKey,
        final String miscellaneousKeyAttribute,
        final String nonKeyAttribute,
        final Long tableReadCapacityUnits,
        final Long tableWriteCapacityUnits,
        final Long tableWarmReadUnitsPerSecond,
        final Long tableWarmWriteUnitsPerSecond,
        final String globalSecondaryIndexName,
        final Long globalSecondaryIndexReadCapacityUnits,
        final Long globalSecondaryIndexWriteCapacityUnits,
        final Long globalSecondaryIndexWarmReadUnitsPerSecond,
        final Long globalSecondaryIndexWarmWriteUnitsPerSecond) {

        // Define the table attributes
```

```
        final AttributeDefinition partitionKeyAttribute =
buildAttributeDefinition(partitionKey, ScalarAttributeType.S);
        final AttributeDefinition sortKeyAttribute =
buildAttributeDefinition(sortKey, ScalarAttributeType.S);
        final AttributeDefinition miscellaneousKeyAttributeDefinition =
            buildAttributeDefinition(miscellaneousKeyAttribute,
ScalarAttributeType.N);
        final AttributeDefinition[] attributeDefinitions = {
            partitionKeyAttribute, sortKeyAttribute,
miscellaneousKeyAttributeDefinition
        };

        // Define the table key schema
        final KeySchemaElement partitionKeyElement =
buildKeySchemaElement(partitionKey, KeyType.HASH);
        final KeySchemaElement sortKeyElement = buildKeySchemaElement(sortKey,
KeyType.RANGE);
        final KeySchemaElement[] keySchema = {partitionKeyElement, sortKeyElement};

        // Define the provisioned throughput for the table
        final ProvisionedThroughput provisionedThroughput =
            buildProvisionedThroughput(tableReadCapacityUnits,
tableWriteCapacityUnits);

        // Define the Global Secondary Index (GSI)
        final KeySchemaElement globalSecondaryIndexPartitionKeyElement =
buildKeySchemaElement(sortKey, KeyType.HASH);
        final KeySchemaElement globalSecondaryIndexSortKeyElement =
            buildKeySchemaElement(miscellaneousKeyAttribute, KeyType.RANGE);
        final KeySchemaElement[] gsiKeySchema = {
            globalSecondaryIndexPartitionKeyElement,
globalSecondaryIndexSortKeyElement
        };

        final Projection gsiProjection = Projection.builder()
            .projectionType(PROJECTION_TYPE_INCLUDE)
            .nonKeyAttributes(nonKeyAttribute)
            .build();

        final ProvisionedThroughput gsiProvisionedThroughput =
            buildProvisionedThroughput(globalSecondaryIndexReadCapacityUnits,
globalSecondaryIndexWriteCapacityUnits);

        // Define the warm throughput for the Global Secondary Index (GSI)
```

```
        final WarmThroughput gsiWarmThroughput = buildWarmThroughput(
            globalSecondaryIndexWarmReadUnitsPerSecond,
globalSecondaryIndexWarmWriteUnitsPerSecond);

        final GlobalSecondaryIndex globalSecondaryIndex =
GlobalSecondaryIndex.builder()
            .indexName(globalSecondaryIndexName)
            .keySchema(gsiKeySchema)
            .projection(gsiProjection)
            .provisionedThroughput(gsiProvisionedThroughput)
            .warmThroughput(gsiWarmThroughput)
            .build();

        // Define the warm throughput for the table
        final WarmThroughput tableWarmThroughput =
            buildWarmThroughput(tableWarmReadUnitsPerSecond,
tableWarmWriteUnitsPerSecond);

        final CreateTableRequest request = CreateTableRequest.builder()
            .tableName(tableName)
            .attributeDefinitions(attributeDefinitions)
            .keySchema(keySchema)
            .provisionedThroughput(provisionedThroughput)
            .globalSecondaryIndexes(globalSecondaryIndex)
            .warmThroughput(tableWarmThroughput)
            .build();

        final CreateTableResponse response = ddb.createTable(request);
        System.out.println(response);
    }
```

- Para obtener más información sobre la API, consulte CreateTablela Referencia AWS SDK for Java 2.x de la API.

Creación de una aplicación web para hacer un seguimiento de los datos de DynamoDB

El siguiente ejemplo de código muestra cómo crear una aplicación web que realice un seguimiento de los elementos de trabajo de una tabla de Amazon DynamoDB y use Amazon Simple Email Service (Amazon SES) para enviar informes.

SDK para Java 2.x

Muestra cómo utilizar la API de Amazon DynamoDB para crear una aplicación web dinámica que haga un seguimiento de los datos de trabajo de DynamoDB.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- DynamoDB
- Amazon SES

Creación de un elemento con un TTL

El siguiente ejemplo de código muestra cómo crear un elemento con TTL.

SDK para Java 2.x

```
package com.amazon.samplelib.ttl;

import com.amazon.samplelib.CodeSampleUtils;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.PutItemRequest;
import software.amazon.awssdk.services.dynamodb.model.PutItemResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.Optional;

/**
 * Creates an item in a DynamoDB table with TTL attributes.
 * This class demonstrates how to add TTL expiration timestamps to DynamoDB items.
 */
public class CreateTTL {

    private static final String USAGE =
        """
```

```
            Usage:
                <tableName> <primaryKey> <sortKey> <region>
            Where:
                tableName - The Amazon DynamoDB table being queried.
                primaryKey - The name of the primary key. Also known as the hash or
partition key.
                sortKey - The name of the sort key. Also known as the range
attribute.
                region (optional) - The AWS region that the Amazon DynamoDB table is
located in. (Default: us-east-1)
            """;
    private static final int DAYS_TO_EXPIRE = 90;
    private static final int SECONDS_PER_DAY = 24 * 60 * 60;
    private static final String PRIMARY_KEY_ATTR = "primaryKey";
    private static final String SORT_KEY_ATTR = "sortKey";
    private static final String CREATION_DATE_ATTR = "creationDate";
    private static final String EXPIRE_AT_ATTR = "expireAt";
    private static final String SUCCESS_MESSAGE = "%s PutItem operation with TTL
successful.";
    private static final String TABLE_NOT_FOUND_ERROR = "Error: The Amazon DynamoDB
table \"%s\" can't be found.";

    private final DynamoDbClient dynamoDbClient;

    /**
     * Constructs a CreateTTL instance with the specified DynamoDB client.
     *
     * @param dynamoDbClient The DynamoDB client to use
     */
    public CreateTTL(final DynamoDbClient dynamoDbClient) {
        this.dynamoDbClient = dynamoDbClient;
    }

    /**
     * Constructs a CreateTTL with a default DynamoDB client.
     */
    public CreateTTL() {
        this.dynamoDbClient = null;
    }

    /**
     * Main method to demonstrate creating an item with TTL.
     *
     * @param args Command line arguments
```

```
     */
    public static void main(final String[] args) {
        try {
            int result = new CreateTTL().processArgs(args);
            System.exit(result);
        } catch (Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    /**
     * Process command line arguments and create an item with TTL.
     *
     * @param args Command line arguments
     * @return 0 if successful, non-zero otherwise
     * @throws ResourceNotFoundException If the table doesn't exist
     * @throws DynamoDbException If an error occurs during the operation
     * @throws IllegalArgumentException If arguments are invalid
     */
    public int processArgs(final String[] args) {
        // Argument validation (remove or replace this line when reusing this code)
        CodeSampleUtils.validateArgs(args, new int[] {3, 4}, USAGE);

        final String tableName = args[0];
        final String primaryKey = args[1];
        final String sortKey = args[2];
        final Region region = Optional.ofNullable(args.length > 3 ? args[3] : null)
            .map(Region::of)
            .orElse(Region.US_EAST_1);

        try (DynamoDbClient ddb = dynamoDbClient != null
            ? dynamoDbClient
            : DynamoDbClient.builder().region(region).build()) {
            final CreateTTL createTTL = new CreateTTL(ddb);
            createTTL.createItemWithTTL(tableName, primaryKey, sortKey);
            return 0;
        } catch (Exception e) {
            throw e;
        }
    }

    /**
     * Creates an item in the specified table with TTL attributes.
```

```
     *
     * @param tableName The name of the table
     * @param primaryKeyValue The value for the primary key
     * @param sortKeyValue The value for the sort key
     * @return The response from the PutItem operation
     * @throws ResourceNotFoundException If the table doesn't exist
     * @throws DynamoDbException If an error occurs during the operation
     */
    public PutItemResponse createItemWithTTL(
        final String tableName, final String primaryKeyValue, final String
sortKeyValue) {
        // Get current time in epoch second format
        final long createDate = System.currentTimeMillis() / 1000;

        // Calculate expiration time 90 days from now in epoch second format
        final long expireDate = createDate + (DAYS_TO_EXPIRE * SECONDS_PER_DAY);

        final Map<String, AttributeValue> itemMap = new HashMap<>();
        itemMap.put(
            PRIMARY_KEY_ATTR, AttributeValue.builder().s(primaryKeyValue).build());
        itemMap.put(SORT_KEY_ATTR,
AttributeValue.builder().s(sortKeyValue).build());
        itemMap.put(
            CREATION_DATE_ATTR,
            AttributeValue.builder().n(String.valueOf(createDate)).build());
        itemMap.put(
            EXPIRE_AT_ATTR,
            AttributeValue.builder().n(String.valueOf(expireDate)).build());

        final PutItemRequest request =
            PutItemRequest.builder().tableName(tableName).item(itemMap).build();

        try {
            final PutItemResponse response = dynamoDbClient.putItem(request);
            System.out.println(String.format(SUCCESS_MESSAGE, tableName));
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
    }
```

```
}
```

- Para obtener más información sobre la API, consulta PutItemla Referencia AWS SDK for Java 2.x de la API.

Creación y administración de tablas globales de MRSC

En el siguiente ejemplo de código, se muestra cómo crear y administrar las tablas globales de DynamoDB con coherencia alta de varias regiones (MRSC).

- Cree una tabla con coherencia alta de varias regiones.
- Verifique la configuración de MRSC y el estado de la réplica.
- Pruebe la coherencia alta entre regiones con lecturas inmediatas.
- Realice escrituras condicionales con garantías de MRSC.
- Limpie los recursos de la tabla global de MRSC.

SDK para Java 2.x

Cree una tabla regional lista para la conversión al MRSC mediante AWS SDK for Java 2.x.

```
   public static CreateTableResponse createRegionalTable(final DynamoDbClient
dynamoDbClient, final String tableName) {

       if (dynamoDbClient == null) {
           throw new IllegalArgumentException("DynamoDB client cannot be null");
       }
       if (tableName == null || tableName.trim().isEmpty()) {
           throw new IllegalArgumentException("Table name cannot be null or
empty");
       }

       try {
           LOGGER.info("Creating regional table: " + tableName + " (must be empty
for MRSC)");

           CreateTableRequest createTableRequest = CreateTableRequest.builder()
               .tableName(tableName)
               .attributeDefinitions(
                   AttributeDefinition.builder()
```

```
                        .attributeName("Artist")
                        .attributeType(ScalarAttributeType.S)
                        .build(),
                    AttributeDefinition.builder()
                        .attributeName("SongTitle")
                        .attributeType(ScalarAttributeType.S)
                        .build())
                .keySchema(
                    KeySchemaElement.builder()
                        .attributeName("Artist")
                        .keyType(KeyType.HASH)
                        .build(),
                    KeySchemaElement.builder()
                        .attributeName("SongTitle")
                        .keyType(KeyType.RANGE)
                        .build())
                .billingMode(BillingMode.PAY_PER_REQUEST)
                .build();

            CreateTableResponse response =
dynamoDbClient.createTable(createTableRequest);
            LOGGER.info("Regional table creation initiated. Status: "
                + response.tableDescription().tableStatus());

            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to create regional table: " + tableName + " - " +
e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to create regional table: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Convierta una tabla regional en MRSC utilizando réplicas y testigos. AWS SDK for Java 2.x

```
    public static UpdateTableResponse convertToMRSCWithWitness(
        final DynamoDbClient dynamoDbClient,
        final String tableName,
        final Region replicaRegion,
```

```
        final Region witnessRegion) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (replicaRegion == null) {
            throw new IllegalArgumentException("Replica region cannot be null");
        }
        if (witnessRegion == null) {
            throw new IllegalArgumentException("Witness region cannot be null");
        }

        try {
            LOGGER.info("Converting table to MRSC with replica in " +
replicaRegion.id() + " and witness in "
                + witnessRegion.id());

            // Create replica update using ReplicationGroupUpdate
            ReplicationGroupUpdate replicaUpdate = ReplicationGroupUpdate.builder()
                .create(CreateReplicationGroupMemberAction.builder()
                    .regionName(replicaRegion.id())
                    .build())
                .build();

            // Create witness update
            GlobalTableWitnessGroupUpdate witnessUpdate =
GlobalTableWitnessGroupUpdate.builder()
                .create(CreateGlobalTableWitnessGroupMemberAction.builder()
                    .regionName(witnessRegion.id())
                    .build())
                .build();

            UpdateTableRequest updateTableRequest = UpdateTableRequest.builder()
                .tableName(tableName)
                .replicaUpdates(List.of(replicaUpdate))
                .globalTableWitnessUpdates(List.of(witnessUpdate))
                .multiRegionConsistency(MultiRegionConsistency.STRONG)
                .build();
```

```
            UpdateTableResponse response =
dynamoDbClient.updateTable(updateTableRequest);
            LOGGER.info("MRSC conversion initiated. Status: "
                + response.tableDescription().tableStatus());
            LOGGER.info("UpdateTableResponse full object: " + response);
            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to convert table to MRSC: " + tableName + " - " +
e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to convert table to MRSC: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Describa la configuración de una tabla global del MRSC utilizando. AWS SDK for Java 2.x

```
    public static DescribeTableResponse describeMRSCTable(final DynamoDbClient
dynamoDbClient, final String tableName) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }

        try {
            LOGGER.info("Describing MRSC global table: " + tableName);

            DescribeTableRequest request =
                DescribeTableRequest.builder().tableName(tableName).build();

            DescribeTableResponse response = dynamoDbClient.describeTable(request);

            LOGGER.info("Table status: " + response.table().tableStatus());
            LOGGER.info("Multi-region consistency: " +
response.table().multiRegionConsistency());
```

```
            if (response.table().replicas() != null
                && !response.table().replicas().isEmpty()) {
                LOGGER.info("Number of replicas: " +
response.table().replicas().size());
                response.table()
                    .replicas()
                    .forEach(replica -> LOGGER.info(
                        "Replica region: " + replica.regionName() + ", Status: " +
replica.replicaStatus()));
            }

            if (response.table().globalTableWitnesses() != null
                && !response.table().globalTableWitnesses().isEmpty()) {
                LOGGER.info("Number of witnesses: "
                    + response.table().globalTableWitnesses().size());
                response.table()
                    .globalTableWitnesses()
                    .forEach(witness -> LOGGER.info(
                        "Witness region: " + witness.regionName() + ", Status: " +
witness.witnessStatus()));
            }

            return response;

        } catch (ResourceNotFoundException e) {
            LOGGER.severe("Table not found: " + tableName + " - " + e.getMessage());
            throw DynamoDbException.builder()
                .message("Table not found: " + tableName)
                .cause(e)
                .build();
        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to describe table: " + tableName + " - " +
e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to describe table: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Agregue elementos de prueba para verificar la coherencia alta de MRSC con AWS SDK for Java 2.x.

```
   public static PutItemResponse putTestItem(
       final DynamoDbClient dynamoDbClient,
       final String tableName,
       final String artist,
       final String songTitle,
       final String album,
       final String year) {

       if (dynamoDbClient == null) {
           throw new IllegalArgumentException("DynamoDB client cannot be null");
       }
       if (tableName == null || tableName.trim().isEmpty()) {
           throw new IllegalArgumentException("Table name cannot be null or
empty");
       }
       if (artist == null || artist.trim().isEmpty()) {
           throw new IllegalArgumentException("Artist cannot be null or empty");
       }
       if (songTitle == null || songTitle.trim().isEmpty()) {
           throw new IllegalArgumentException("Song title cannot be null or
empty");
       }

       try {
           LOGGER.info("Adding test item to MRSC global table: " + tableName);

           Map<String, AttributeValue> item = new HashMap<>();
           item.put("Artist", AttributeValue.builder().s(artist).build());
           item.put("SongTitle", AttributeValue.builder().s(songTitle).build());

           if (album != null && !album.trim().isEmpty()) {
               item.put("Album", AttributeValue.builder().s(album).build());
           }
           if (year != null && !year.trim().isEmpty()) {
               item.put("Year", AttributeValue.builder().n(year).build());
           }

           PutItemRequest putItemRequest =
               PutItemRequest.builder().tableName(tableName).item(item).build();

           PutItemResponse response = dynamoDbClient.putItem(putItemRequest);
           LOGGER.info("Test item added successfully with strong consistency");
```

```
            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to add test item to table: " + tableName + " - " +
e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to add test item to table: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Lea los elementos con lecturas consistentes de las réplicas del MRSC utilizando. AWS SDK for Java 2.x

```
    public static GetItemResponse getItemWithConsistentRead(
        final DynamoDbClient dynamoDbClient, final String tableName, final String
artist, final String songTitle) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (artist == null || artist.trim().isEmpty()) {
            throw new IllegalArgumentException("Artist cannot be null or empty");
        }
        if (songTitle == null || songTitle.trim().isEmpty()) {
            throw new IllegalArgumentException("Song title cannot be null or
empty");
        }

        try {
            LOGGER.info("Reading item from MRSC global table with consistent read: "
+ tableName);

            Map<String, AttributeValue> key = new HashMap<>();
            key.put("Artist", AttributeValue.builder().s(artist).build());
            key.put("SongTitle", AttributeValue.builder().s(songTitle).build());
```

```
            GetItemRequest getItemRequest = GetItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .consistentRead(true)
                .build();

            GetItemResponse response = dynamoDbClient.getItem(getItemRequest);

            if (response.hasItem()) {
                LOGGER.info("Item found with strong consistency - no wait time
needed");
            } else {
                LOGGER.info("Item not found");
            }

            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to read item from table: " + tableName + " - " +
e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to read item from table: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Realice actualizaciones condicionales con las garantías del MRSC utilizando. AWS SDK for Java 2.x

```
    public static UpdateItemResponse performConditionalUpdate(
        final DynamoDbClient dynamoDbClient,
        final String tableName,
        final String artist,
        final String songTitle,
        final String rating) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
```

```
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (artist == null || artist.trim().isEmpty()) {
            throw new IllegalArgumentException("Artist cannot be null or empty");
        }
        if (songTitle == null || songTitle.trim().isEmpty()) {
            throw new IllegalArgumentException("Song title cannot be null or
empty");
        }
        if (rating == null || rating.trim().isEmpty()) {
            throw new IllegalArgumentException("Rating cannot be null or empty");
        }

        try {
            LOGGER.info("Performing conditional update on MRSC global table: " +
tableName);

            Map<String, AttributeValue> key = new HashMap<>();
            key.put("Artist", AttributeValue.builder().s(artist).build());
            key.put("SongTitle", AttributeValue.builder().s(songTitle).build());

            Map<String, String> expressionAttributeNames = new HashMap<>();
            expressionAttributeNames.put("#rating", "Rating");

            Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();
            expressionAttributeValues.put(
                ":rating", AttributeValue.builder().n(rating).build());

            UpdateItemRequest updateItemRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET #rating = :rating")
                .conditionExpression("attribute_exists(Artist)")
                .expressionAttributeNames(expressionAttributeNames)
                .expressionAttributeValues(expressionAttributeValues)
                .build();

            UpdateItemResponse response =
dynamoDbClient.updateItem(updateItemRequest);
            LOGGER.info("Conditional update successful - demonstrates strong
consistency");

            return response;
```

```
        } catch (ConditionalCheckFailedException e) {
            LOGGER.warning("Conditional check failed: " + e.getMessage());
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to perform conditional update: " + tableName + " -
" + e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to perform conditional update: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Espere a que las réplicas del MRSC y los testigos se activen utilizando. AWS SDK for Java 2.x

```
    public static void waitForMRSCReplicasActive(
        final DynamoDbClient dynamoDbClient, final String tableName, final int
maxWaitTimeSeconds)
        throws InterruptedException {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (maxWaitTimeSeconds <= 0) {
            throw new IllegalArgumentException("Max wait time must be positive");
        }

        try {
            LOGGER.info("Waiting for MRSC replicas and witnesses to become active: "
+ tableName);

            final long startTime = System.currentTimeMillis();
            final long maxWaitTimeMillis = maxWaitTimeSeconds * 1000L;
            int backoffSeconds = 5; // Start with 5 second intervals
            final int maxBackoffSeconds = 30; // Cap at 30 seconds

            while (System.currentTimeMillis() - startTime < maxWaitTimeMillis) {
```

```
                DescribeTableResponse response = describeMRSCTable(dynamoDbClient,
tableName);

                boolean allActive = true;
                StringBuilder statusReport = new StringBuilder();

                if (response.table().multiRegionConsistency() == null
                    || !MultiRegionConsistency.STRONG
                        .toString()

.equals(response.table().multiRegionConsistency().toString())) {
                    allActive = false;
                    statusReport
                        .append("MultiRegionConsistency: ")
                        .append(response.table().multiRegionConsistency())
                        .append(" ");
                }
                if (response.table().replicas() == null
                    || response.table().replicas().isEmpty()) {
                    allActive = false;
                    statusReport.append("No replicas found. ");
                }
                if (response.table().globalTableWitnesses() == null
                    || response.table().globalTableWitnesses().isEmpty()) {
                    allActive = false;
                    statusReport.append("No witnesses found. ");
                }

                // Check table status
                if (!"ACTIVE".equals(response.table().tableStatus().toString())) {
                    allActive = false;
                    statusReport
                        .append("Table: ")
                        .append(response.table().tableStatus())
                        .append(" ");
                }

                // Check replica status
                if (response.table().replicas() != null) {
                    for (var replica : response.table().replicas()) {
                        if (!"ACTIVE".equals(replica.replicaStatus().toString())) {
                            allActive = false;
                            statusReport
                                .append("Replica(")
```

```
                                .append(replica.regionName())
                                .append("): ")
                                .append(replica.replicaStatus())
                                .append(" ");
                        }
                    }
                }

                // Check witness status
                if (response.table().globalTableWitnesses() != null) {
                    for (var witness : response.table().globalTableWitnesses()) {
                        if (!"ACTIVE".equals(witness.witnessStatus().toString())) {
                            allActive = false;
                            statusReport
                                .append("Witness(")
                                .append(witness.regionName())
                                .append("): ")
                                .append(witness.witnessStatus())
                                .append(" ");
                        }
                    }
                }

                if (allActive) {
                    LOGGER.info("All MRSC replicas and witnesses are now active: " +
tableName);
                    return;
                }

                LOGGER.info("Waiting for MRSC components to become active. Status: "
+ statusReport.toString());
                LOGGER.info("Next check in " + backoffSeconds + " seconds...");

                tempWait(backoffSeconds);

                // Exponential backoff with cap
                backoffSeconds = Math.min(backoffSeconds * 2, maxBackoffSeconds);
            }

            throw DynamoDbException.builder()
                .message("Timeout waiting for MRSC replicas to become active after "
+ maxWaitTimeSeconds + " seconds")
                .build();
```

```
        } catch (DynamoDbException | InterruptedException e) {
            LOGGER.severe("Failed to wait for MRSC replicas to become active: " +
tableName + " - " + e.getMessage());
            throw e;
        }
    }
```

Limpie las réplicas y los testigos del MRSC utilizando. AWS SDK for Java 2.x

```
    public static UpdateTableResponse cleanupMRSCReplicas(
        final DynamoDbClient dynamoDbClient,
        final String tableName,
        final Region replicaRegion,
        final Region witnessRegion) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (replicaRegion == null) {
            throw new IllegalArgumentException("Replica region cannot be null");
        }
        if (witnessRegion == null) {
            throw new IllegalArgumentException("Witness region cannot be null");
        }

        try {
            LOGGER.info("Cleaning up MRSC replicas and witnesses for table: " +
tableName);

            // Remove replica using ReplicationGroupUpdate
            ReplicationGroupUpdate replicaUpdate = ReplicationGroupUpdate.builder()
                .delete(DeleteReplicationGroupMemberAction.builder()
                    .regionName(replicaRegion.id())
                    .build())
                .build();

            // Remove witness
```

```
            GlobalTableWitnessGroupUpdate witnessUpdate =
GlobalTableWitnessGroupUpdate.builder()
                .delete(DeleteGlobalTableWitnessGroupMemberAction.builder()
                    .regionName(witnessRegion.id())
                    .build())
                .build();

            UpdateTableRequest updateTableRequest = UpdateTableRequest.builder()
                .tableName(tableName)
                .replicaUpdates(List.of(replicaUpdate))
                .globalTableWitnessUpdates(List.of(witnessUpdate))
                .build();

            UpdateTableResponse response =
dynamoDbClient.updateTable(updateTableRequest);
            LOGGER.info("MRSC cleanup initiated - removing replica and witness.
Response: " + response);

            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to cleanup MRSC replicas: " + tableName + " - " +
e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to cleanup MRSC replicas: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Complete la demostración del flujo de trabajo del MRSC utilizando. AWS SDK for Java 2.x

```
    public static void demonstrateCompleteMRSCWorkflow(
        final DynamoDbClient primaryClient,
        final DynamoDbClient replicaClient,
        final String tableName,
        final Region replicaRegion,
        final Region witnessRegion)
        throws InterruptedException {

        if (primaryClient == null) {
```

```
            throw new IllegalArgumentException("Primary DynamoDB client cannot be
null");
        }
        if (replicaClient == null) {
            throw new IllegalArgumentException("Replica DynamoDB client cannot be
null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (replicaRegion == null) {
            throw new IllegalArgumentException("Replica region cannot be null");
        }
        if (witnessRegion == null) {
            throw new IllegalArgumentException("Witness region cannot be null");
        }

        try {
            LOGGER.info("=== Starting Complete MRSC Workflow Demonstration ===");

            // Step 1: Create an empty single-Region table
            LOGGER.info("Step 1: Creating empty single-Region table");
            createRegionalTable(primaryClient, tableName);

            // Use the existing GlobalTableOperations method for basic table waiting
            LOGGER.info("Intermediate step: Waiting for table [" + tableName + "] to
become active before continuing");
            GlobalTableOperations.waitForTableActive(primaryClient, tableName);

            // Step 2: Convert to MRSC with replica and witness
            LOGGER.info("Step 2: Converting to MRSC with replica and witness");
            convertToMRSCWithWitness(primaryClient, tableName, replicaRegion,
witnessRegion);

            // Wait for MRSC conversion to complete using MRSC-specific waiter
            LOGGER.info("Waiting for MRSC conversion to complete...");
            waitForMRSCReplicasActive(primaryClient, tableName);

            LOGGER.info("Intermediate step: Waiting for table [" + tableName + "] to
become active before continuing");
            GlobalTableOperations.waitForTableActive(primaryClient, tableName);

            // Step 3: Verify MRSC configuration
```

```
            LOGGER.info("Step 3: Verifying MRSC configuration");
            describeMRSCTable(primaryClient, tableName);

            // Step 4: Test strong consistency with data operations
            LOGGER.info("Step 4: Testing strong consistency with data operations");

            // Add test item to primary region
            putTestItem(primaryClient, tableName, "The Beatles", "Hey Jude", "The
Beatles 1967-1970", "1968");

            // Immediately read from replica region (no wait needed with MRSC)
            LOGGER.info("Reading from replica region immediately (strong
consistency):");
            GetItemResponse getResponse =
                getItemWithConsistentRead(replicaClient, tableName, "The Beatles",
"Hey Jude");

            if (getResponse.hasItem()) {
                LOGGER.info("# Strong consistency verified - item immediately
available in replica region");
            } else {
                LOGGER.warning("# Item not found in replica region");
            }

            // Test conditional update from replica region
            LOGGER.info("Testing conditional update from replica region:");
            performConditionalUpdate(replicaClient, tableName, "The Beatles", "Hey
Jude", "5");
            LOGGER.info("# Conditional update successful - demonstrates strong
consistency");

            // Step 5: Cleanup
            LOGGER.info("Step 5: Cleaning up resources");
            cleanupMRSCReplicas(primaryClient, tableName, replicaRegion,
witnessRegion);

            // Wait for cleanup to complete using basic table waiter
            LOGGER.info("Waiting for replica cleanup to complete...");
            GlobalTableOperations.waitForTableActive(primaryClient, tableName);

            // "Halt" until replica/witness cleanup is complete
            DescribeTableResponse cleanupVerification =
describeMRSCTable(primaryClient, tableName);
            int backoffSeconds = 5; // Start with 5 second intervals
```

```
            while (cleanupVerification.table().multiRegionConsistency() != null) {
                LOGGER.info("Waiting additional time (" + backoffSeconds + "
seconds) for MRSC cleanup to complete...");
                tempWait(backoffSeconds);

                // Exponential backoff with cap
                backoffSeconds = Math.min(backoffSeconds * 2, 30);
                cleanupVerification = describeMRSCTable(primaryClient, tableName);
            }

            // Delete the primary table
            deleteTable(primaryClient, tableName);

            LOGGER.info("=== MRSC Workflow Demonstration Complete ===");
            LOGGER.info("");
            LOGGER.info("Key benefits of Multi-Region Strong Consistency (MRSC):");
            LOGGER.info("- Immediate consistency across all regions (no eventual
consistency delays)");
            LOGGER.info("- Simplified application logic (no need to handle eventual
consistency)");
            LOGGER.info("- Support for conditional writes and transactions across
regions");
            LOGGER.info("- Consistent read operations from any region without
waiting");

        } catch (DynamoDbException | InterruptedException e) {
            LOGGER.severe("MRSC workflow failed: " + e.getMessage());
            throw e;
        }
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateTable
  - DeleteTable
  - DescribeTable
  - GetItem
  - PutItem
  - UpdateItem

- UpdateTable

Creación y administración de tablas globales que muestren MREC

En el ejemplo de código siguiente, se muestra cómo crear y administrar las tablas globales de DynamoDB con réplicas en varias regiones.

- Cree una tabla con un índice secundario global y flujos de DynamoDB.
- Agregue réplicas en diferentes regiones para crear una tabla global.
- Elimine réplicas de una tabla global.
- Agregue elementos de prueba para verificar la replicación en todas las regiones.
- Describa la configuración de la tabla global y el estado de las réplicas.

SDK para Java 2.x

Cree una tabla con Global Secondary Index y DynamoDB Streams mediante. AWS SDK for Java 2.x

```
   public static CreateTableResponse createTableWithGSI(
       final DynamoDbClient dynamoDbClient, final String tableName, final String
indexName) {

       if (dynamoDbClient == null) {
           throw new IllegalArgumentException("DynamoDB client cannot be null");
       }
       if (tableName == null || tableName.trim().isEmpty()) {
           throw new IllegalArgumentException("Table name cannot be null or
empty");
       }
       if (indexName == null || indexName.trim().isEmpty()) {
           throw new IllegalArgumentException("Index name cannot be null or
empty");
       }

       try {
           LOGGER.info("Creating table: " + tableName + " with GSI: " + indexName);

           CreateTableRequest createTableRequest = CreateTableRequest.builder()
               .tableName(tableName)
               .attributeDefinitions(
```

```
                    AttributeDefinition.builder()
                        .attributeName("Artist")
                        .attributeType(ScalarAttributeType.S)
                        .build(),
                    AttributeDefinition.builder()
                        .attributeName("SongTitle")
                        .attributeType(ScalarAttributeType.S)
                        .build())
                .keySchema(
                    KeySchemaElement.builder()
                        .attributeName("Artist")
                        .keyType(KeyType.HASH)
                        .build(),
                    KeySchemaElement.builder()
                        .attributeName("SongTitle")
                        .keyType(KeyType.RANGE)
                        .build())
                .billingMode(BillingMode.PAY_PER_REQUEST)
                .globalSecondaryIndexes(GlobalSecondaryIndex.builder()
                    .indexName(indexName)
                    .keySchema(KeySchemaElement.builder()
                        .attributeName("SongTitle")
                        .keyType(KeyType.HASH)
                        .build())
                    .projection(

Projection.builder().projectionType(ProjectionType.ALL).build())
                    .build())
                .streamSpecification(StreamSpecification.builder()
                    .streamEnabled(true)
                    .streamViewType(StreamViewType.NEW_AND_OLD_IMAGES)
                    .build())
                .build();

            CreateTableResponse response =
dynamoDbClient.createTable(createTableRequest);
            LOGGER.info("Table creation initiated. Status: "
                + response.tableDescription().tableStatus());

            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to create table: " + tableName + " - " +
e.getMessage());
```

```
            throw e;
        }
    }
```

Espere a que una tabla se active utilizando. AWS SDK for Java 2.x

```
    public static void waitForTableActive(final DynamoDbClient dynamoDbClient, final
String tableName) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }

        try {
            LOGGER.info("Waiting for table to become active: " + tableName);

            try (DynamoDbWaiter waiter =
                DynamoDbWaiter.builder().client(dynamoDbClient).build()) {
                DescribeTableRequest request =
                    DescribeTableRequest.builder().tableName(tableName).build();

                waiter.waitUntilTableExists(request);
                LOGGER.info("Table is now active: " + tableName);
            }

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to wait for table to become active: " + tableName
+ " - " + e.getMessage());
            throw e;
        }
    }
```

Agregue una réplica para crear o ampliar una tabla global utilizando AWS SDK for Java 2.x.

```
    public static UpdateTableResponse addReplica(
        final DynamoDbClient dynamoDbClient,
        final String tableName,
```

```
        final Region replicaRegion,
        final String indexName,
        final Long readCapacity) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (replicaRegion == null) {
            throw new IllegalArgumentException("Replica region cannot be null");
        }
        if (indexName == null || indexName.trim().isEmpty()) {
            throw new IllegalArgumentException("Index name cannot be null or
empty");
        }
        if (readCapacity == null || readCapacity <= 0) {
            throw new IllegalArgumentException("Read capacity must be a positive
number");
        }

        try {
            LOGGER.info("Adding replica in region: " + replicaRegion.id() + " for
table: " + tableName);

            // Create a ReplicationGroupUpdate for adding a replica
            ReplicationGroupUpdate replicationGroupUpdate =
ReplicationGroupUpdate.builder()
                .create(builder -> builder.regionName(replicaRegion.id())
                    .globalSecondaryIndexes(ReplicaGlobalSecondaryIndex.builder()
                        .indexName(indexName)

.provisionedThroughputOverride(ProvisionedThroughputOverride.builder()
                            .readCapacityUnits(readCapacity)
                            .build())
                        .build())
                    .build())
                .build();

            UpdateTableRequest updateTableRequest = UpdateTableRequest.builder()
                .tableName(tableName)
                .replicaUpdates(replicationGroupUpdate)
```

```
                .build();

            UpdateTableResponse response =
dynamoDbClient.updateTable(updateTableRequest);
            LOGGER.info("Replica addition initiated in region: " +
replicaRegion.id());

            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to add replica in region: " + replicaRegion.id() +
" - " + e.getMessage());
            throw e;
        }
    }
```

Elimine una réplica de una tabla global mediante AWS SDK for Java 2.x.

```
    public static UpdateTableResponse removeReplica(
        final DynamoDbClient dynamoDbClient, final String tableName, final Region
replicaRegion) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (replicaRegion == null) {
            throw new IllegalArgumentException("Replica region cannot be null");
        }

        try {
            LOGGER.info("Removing replica in region: " + replicaRegion.id() + " for
table: " + tableName);

            // Create a ReplicationGroupUpdate for removing a replica
            ReplicationGroupUpdate replicationGroupUpdate =
ReplicationGroupUpdate.builder()
                .delete(builder -> builder.regionName(replicaRegion.id()).build())
                .build();
```

```
            UpdateTableRequest updateTableRequest = UpdateTableRequest.builder()
                .tableName(tableName)
                .replicaUpdates(replicationGroupUpdate)
                .build();

            UpdateTableResponse response =
dynamoDbClient.updateTable(updateTableRequest);
            LOGGER.info("Replica removal initiated in region: " +
replicaRegion.id());

            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to remove replica in region: " +
replicaRegion.id() + " - " + e.getMessage());
            throw e;
        }
    }
```

Agregue elementos de prueba para verificar la replicación mediante AWS SDK for Java 2.x.

```
    public static PutItemResponse putTestItem(
        final DynamoDbClient dynamoDbClient, final String tableName, final String
artist, final String songTitle) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (artist == null || artist.trim().isEmpty()) {
            throw new IllegalArgumentException("Artist cannot be null or empty");
        }
        if (songTitle == null || songTitle.trim().isEmpty()) {
            throw new IllegalArgumentException("Song title cannot be null or
empty");
        }

        try {
```

```
            LOGGER.info("Adding test item to table: " + tableName);

            Map<String,
software.amazon.awssdk.services.dynamodb.model.AttributeValue> item = new
HashMap<>();
            item.put(
                "Artist",

software.amazon.awssdk.services.dynamodb.model.AttributeValue.builder()
                    .s(artist)
                    .build());
            item.put(
                "SongTitle",

software.amazon.awssdk.services.dynamodb.model.AttributeValue.builder()
                    .s(songTitle)
                    .build());

            PutItemRequest putItemRequest =
                PutItemRequest.builder().tableName(tableName).item(item).build();

            PutItemResponse response = dynamoDbClient.putItem(putItemRequest);
            LOGGER.info("Test item added successfully");

            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to add test item to table: " + tableName + " - " +
e.getMessage());
            throw e;
        }
    }
```

Describa la configuración de la tabla global y las réplicas mediante AWS SDK for Java 2.x.

```
    public static DescribeTableResponse describeTable(final DynamoDbClient
dynamoDbClient, final String tableName) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
```

```
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }

        try {
            LOGGER.info("Describing table: " + tableName);

            DescribeTableRequest request =
                DescribeTableRequest.builder().tableName(tableName).build();

            DescribeTableResponse response = dynamoDbClient.describeTable(request);

            LOGGER.info("Table status: " + response.table().tableStatus());
            if (response.table().replicas() != null
                && !response.table().replicas().isEmpty()) {
                LOGGER.info("Number of replicas: " +
response.table().replicas().size());
                response.table()
                    .replicas()
                    .forEach(replica -> LOGGER.info(
                        "Replica region: " + replica.regionName() + ", Status: " +
replica.replicaStatus()));
            }

            return response;

        } catch (ResourceNotFoundException e) {
            LOGGER.severe("Table not found: " + tableName + " - " + e.getMessage());
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to describe table: " + tableName + " - " +
e.getMessage());
            throw e;
        }
    }
```

Ejemplo completo de operaciones de tablas globales utilizando AWS SDK for Java 2.x.

```
    public static void exampleUsage(final Region sourceRegion, final Region
replicaRegion) {

        String tableName = "Music";
```

```
        String indexName = "SongTitleIndex";
        Long readCapacity = 15L;

        // Create DynamoDB client for the source region
        try (DynamoDbClient dynamoDbClient =
            DynamoDbClient.builder().region(sourceRegion).build()) {

            try {
                // Step 1: Create the initial table with GSI and streams
                LOGGER.info("Step 1: Creating table in source region: " +
sourceRegion.id());
                createTableWithGSI(dynamoDbClient, tableName, indexName);

                // Step 2: Wait for table to become active
                LOGGER.info("Step 2: Waiting for table to become active");
                waitForTableActive(dynamoDbClient, tableName);

                // Step 3: Add replica in destination region
                LOGGER.info("Step 3: Adding replica in region: " +
replicaRegion.id());
                addReplica(dynamoDbClient, tableName, replicaRegion, indexName,
readCapacity);

                // Step 4: Wait a moment for replica creation to start
                Thread.sleep(5000);

                // Step 5: Describe table to view replica information
                LOGGER.info("Step 5: Describing table to view replicas");
                describeTable(dynamoDbClient, tableName);

                // Step 6: Add a test item to verify replication
                LOGGER.info("Step 6: Adding test item to verify replication");
                putTestItem(dynamoDbClient, tableName, "TestArtist", "TestSong");

                LOGGER.info("Global table setup completed successfully!");
                LOGGER.info("You can verify replication by checking the item in
region: " + replicaRegion.id());

                // Step 7: Remove replica and clean up table
                LOGGER.info("Step 7: Removing replica from region: " +
replicaRegion.id());
                removeReplica(dynamoDbClient, tableName, replicaRegion);
                DeleteTableResponse deleteTableResponse =
dynamoDbClient.deleteTable(
```

```
                    DeleteTableRequest.builder().tableName(tableName).build());
                LOGGER.info("MREC global table demonstration completed
successfully!");

            } catch (InterruptedException e) {
                Thread.currentThread().interrupt();
                throw new RuntimeException("Thread was interrupted", e);
            } catch (DynamoDbException e) {
                LOGGER.severe("DynamoDB operation failed: " + e.getMessage());
                throw e;
            }
        }
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateTable
  - DescribeTable
  - PutItem
  - UpdateTable

Detección de EPI en imágenes

El siguiente ejemplo de código muestra cómo crear una aplicación que utiliza Amazon Rekognition para detectar equipos de protección individual (EPI) en imágenes.

SDK para Java 2.x

Muestra cómo crear una AWS Lambda función que detecte imágenes con un equipo de protección individual.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- DynamoDB
- Amazon Rekognition
- Amazon S3

- Amazon SES

Supervisión del rendimiento de DynamoDB

En el siguiente ejemplo se muestra cómo configurar el uso de DynamoDB en una aplicación para supervisar el rendimiento.

SDK para Java 2.x

En este ejemplo se muestra cómo configurar una aplicación Java para supervisar el rendimiento de DynamoDB. La aplicación envía los datos métricos a los CloudWatch que puede supervisar el rendimiento.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- CloudWatch
- DynamoDB

Realización de operaciones de consulta avanzadas

El siguiente ejemplo de código muestra cómo realizar operaciones de consulta avanzadas en DynamoDB.

- Consulte tablas mediante diversas técnicas de filtrado y condición.
- Implemente la paginación para conjuntos de resultados grandes.
- Utilice índices secundarios globales para patrones de acceso alternativos.
- Aplique controles de coherencia en función de los requisitos de la aplicación.

SDK para Java 2.x

Para consultas con lecturas muy consistentes, utilice AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
```

```
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithConsistentReads(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final boolean useConsistentRead) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .consistentRead(useConsistentRead)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query successful. Found {0} items",
 response.count());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
```

```
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying with consistent reads", e);
            throw e;
        }
    }
```

Realice la consulta mediante un índice secundario global con AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;

    public QueryResponse queryTable(
        final String tableName, final String partitionKeyName, final String
 partitionKeyValue) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
```

```
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            System.out.println("Query on base table successful. Found " +
response.count() + " items");
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
found.\n", tableName);
            throw new DynamoDbQueryException("Table not found: " + tableName, e);
        } catch (DynamoDbException e) {
            System.err.println("Error querying base table: " + e.getMessage());
            throw new DynamoDbQueryException("Failed to execute query on base
table", e);
        }
    }

    /**
     * Queries a DynamoDB Global Secondary Index (GSI) by partition key.
     *
     * @param tableName         The name of the DynamoDB table
     * @param indexName         The name of the GSI
     * @param partitionKeyName  The name of the GSI partition key attribute
     * @param partitionKeyValue The value of the GSI partition key to query
     * @return The query response from DynamoDB
     * @throws ResourceNotFoundException if the table or index doesn't exist
     * @throws DynamoDbException if the query fails
     */
    public QueryResponse queryGlobalSecondaryIndex(
        final String tableName, final String indexName, final String
partitionKeyName, final String partitionKeyValue) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Index name", indexName);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_IK,
partitionKeyName);
```

```
        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_IK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .indexName(indexName)
            .keyConditionExpression(GSI_KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            System.out.println("Query on GSI successful. Found " + response.count()
+ " items");
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format(
                "Error: The Amazon DynamoDB table \"%s\" or index \"%s\" can't be
found.\n", tableName, indexName);
            throw new DynamoDbQueryException("Table or index not found: " +
tableName + "/" + indexName, e);
        } catch (DynamoDbException e) {
            System.err.println("Error querying GSI: " + e.getMessage());
            throw new DynamoDbQueryException("Failed to execute query on GSI", e);
        }
    }
```

Consulta con paginación utilizando AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
```

```
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

    public List<Map<String, AttributeValue>> queryWithPagination(
        final String tableName, final String partitionKeyName, final String
 partitionKeyValue, final int pageSize) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validatePositiveInteger("Page size", pageSize);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        QueryRequest.Builder queryRequestBuilder = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .limit(pageSize);

        // List to store all items from all pages
        final List<Map<String, AttributeValue>> allItems = new ArrayList<>();

        // Map to store the last evaluated key for pagination
        Map<String, AttributeValue> lastEvaluatedKey = null;
        int pageNumber = 1;

        try {
            do {
```

```
                // If we have a last evaluated key, use it for the next page
                if (lastEvaluatedKey != null) {
                    queryRequestBuilder.exclusiveStartKey(lastEvaluatedKey);
                }

                // Execute the query
                final QueryResponse response =
dynamoDbClient.query(queryRequestBuilder.build());

                // Process the current page of results
                final List<Map<String, AttributeValue>> pageItems =
response.items();
                allItems.addAll(pageItems);

                // Get the last evaluated key for the next page
                lastEvaluatedKey = response.lastEvaluatedKey();
                if (lastEvaluatedKey != null && lastEvaluatedKey.isEmpty()) {
                    lastEvaluatedKey = null;
                }

                System.out.println("Page " + pageNumber + ": Retrieved " +
pageItems.size() + " items (Running total: "
                    + allItems.size() + ")");

                pageNumber++;

            } while (lastEvaluatedKey != null);

            System.out.println("Query with pagination complete. Retrieved a total of
" + allItems.size()
                + " items across " + (pageNumber - 1) + " pages");

            return allItems;
        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
found.\n", tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Error querying with pagination: " + e.getMessage());
            throw e;
        }
    }
```

Consulta con filtros complejos utilizando AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithComplexFilter(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String statusAttrName,
        final String activeStatus,
        final String pendingStatus,
        final String priceAttrName,
        final double minPrice,
        final double maxPrice,
        final String categoryAttrName) {

        // Validate parameters
        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Status attribute name",
 statusAttrName);
        CodeSampleUtils.validateStringParameter("Active status", activeStatus);
        CodeSampleUtils.validateStringParameter("Pending status", pendingStatus);
        CodeSampleUtils.validateStringParameter("Price attribute name",
 priceAttrName);
        CodeSampleUtils.validateStringParameter("Category attribute name",
 categoryAttrName);
        CodeSampleUtils.validateNumericRange("Minimum price", minPrice, 0.0,
 Double.MAX_VALUE);
        CodeSampleUtils.validateNumericRange("Maximum price", maxPrice, minPrice,
 Double.MAX_VALUE);

        // Create expression attribute names for the column names
```

```
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put("#pk", partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_STATUS,
statusAttrName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PRICE,
priceAttrName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_CATEGORY,
categoryAttrName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            ":pkValue", AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_ACTIVE,
            AttributeValue.builder().s(activeStatus).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PENDING,
            AttributeValue.builder().s(pendingStatus).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_MIN_PRICE,
            AttributeValue.builder().n(String.valueOf(minPrice)).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_MAX_PRICE,
            AttributeValue.builder().n(String.valueOf(maxPrice)).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .filterExpression(FILTER_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        return dynamoDbClient.query(queryRequest);
    }
```

Consulte con una expresión de filtro construida dinámicamente utilizando AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;

    public static QueryResponse queryWithDynamicFilter(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final Map<String, Object> filterCriteria,
        final Region region,
        final DynamoDbClient dynamoDbClient) {

        validateParameters(tableName, partitionKeyName, partitionKeyValue,
 filterCriteria);

        DynamoDbClient ddbClient = dynamoDbClient;
        boolean shouldClose = false;

        try {
            if (ddbClient == null) {
                ddbClient = createClient(region);
                shouldClose = true;
            }

            final QueryWithDynamicFilter queryHelper = new
 QueryWithDynamicFilter(ddbClient);
            return queryHelper.queryWithDynamicFilter(tableName, partitionKeyName,
 partitionKeyValue, filterCriteria);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table not found: " + tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Failed to execute dynamic filter query: " +
 e.getMessage());
            throw e;
        } catch (Exception e) {
            System.err.println("Unexpected error during query: " + e.getMessage());
            throw e;
```

```
        } finally {
            if (shouldClose && ddbClient != null) {
                ddbClient.close();
            }
        }
    }

    public static void main(String[] args) {
        final String usage =
            """
                Usage:
                    <tableName> <partitionKeyName> <partitionKeyValue>
<filterAttrName> <filterAttrValue> [region]
                Where:
                    tableName - The Amazon DynamoDB table to query.
                    partitionKeyName - The name of the partition key attribute.
                    partitionKeyValue - The value of the partition key to query.
                    filterAttrName - The name of the attribute to filter on.
                    filterAttrValue - The value to filter by.
                    region (optional) - The AWS region where the table exists.
(Default: us-east-1)
                """;

        if (args.length < 5) {
            System.out.println(usage);
            System.exit(1);
        }

        final String tableName = args[0];
        final String partitionKeyName = args[1];
        final String partitionKeyValue = args[2];
        final String filterAttrName = args[3];
        final String filterAttrValue = args[4];
        final Region region = args.length > 5 ? Region.of(args[5]) :
Region.US_EAST_1;

        System.out.println("Querying items with dynamic filter: " + filterAttrName +
" = " + filterAttrValue);

        try {
            // Using the builder pattern to create and execute the query
            final QueryResponse response = new DynamicFilterQueryBuilder()
                .withTableName(tableName)
                .withPartitionKeyName(partitionKeyName)
```

```
                .withPartitionKeyValue(partitionKeyValue)
                .withFilterCriterion(filterAttrName, filterAttrValue)
                .withRegion(region)
                .execute();

            // Process the results
            System.out.println("Found " + response.count() + " items:");
            response.items().forEach(item -> System.out.println(item));

            // Demonstrate multiple filter criteria
            System.out.println("\nNow querying with multiple filter criteria:");

            Map<String, Object> multipleFilters = new HashMap<>();
            multipleFilters.put(filterAttrName, filterAttrValue);
            multipleFilters.put("status", "active");

            final QueryResponse multiFilterResponse = new
DynamicFilterQueryBuilder()
                .withTableName(tableName)
                .withPartitionKeyName(partitionKeyName)
                .withPartitionKeyValue(partitionKeyValue)
                .withFilterCriteria(multipleFilters)
                .withRegion(region)
                .execute();

            System.out.println("Found " + multiFilterResponse.count() + " items with
multiple filters:");
            multiFilterResponse.items().forEach(item -> System.out.println(item));

        } catch (IllegalArgumentException e) {
            System.err.println("Invalid input: " + e.getMessage());
            System.exit(1);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table not found: " + tableName);
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println("DynamoDB error: " + e.getMessage());
            System.exit(1);
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
            System.exit(1);
        }
    }
```

Realice una consulta con una expresión de filtro y limite su uso AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithFilterAndLimit(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String filterAttrName,
        final String filterAttrValue,
        final int limit) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Filter attribute name",
 filterAttrName);
        CodeSampleUtils.validateStringParameter("Filter attribute value",
 filterAttrValue);
        CodeSampleUtils.validatePositiveInteger("Limit", limit);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_FILTER,
 filterAttrName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
```

```
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_FILTER,
            AttributeValue.builder().s(filterAttrValue).build());

        // Create the filter expression
        final String filterExpression = "#filterAttr = :filterValue";

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .filterExpression(filterExpression)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .limit(limit)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query with filter and limit successful. Found
{0} items", response.count());
            LOGGER.log(
                Level.INFO, "ScannedCount: {0} (total items evaluated before
filtering)", response.scannedCount());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying with filter and limit: {0}",
e.getMessage());
            throw e;
        }
    }
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

Realización de operaciones de lista

El siguiente ejemplo de código muestra cómo realizar operaciones de lista en DynamoDB.

- Agregue elementos a un atributo de lista.
- Elimine elementos de un atributo de lista.
- Actualice elementos específicos de una lista por índice.
- Utilice las funciones de agregar a listas e indexar listas.

SDK para Java 2.x

Demuestre las operaciones de lista utilizando AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.GetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

    /**
     * Appends items to a list attribute.
     *
     * <p>This method demonstrates how to use the list_append function to add
     * items to the end of a list attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param listAttributeName The name of the list attribute
     * @param itemsToAppend The items to append to the list
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse appendToList(
        DynamoDbClient dynamoDbClient,
```

```
        String tableName,
        Map<String, AttributeValue> key,
        String listAttributeName,
        List<AttributeValue> itemsToAppend) {

        // Create a list value from the items to append
        AttributeValue listValue =
AttributeValue.builder().l(itemsToAppend).build();

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #attrName =
list_append(if_not_exists(#attrName, :emptyList), :newItems)")
            .expressionAttributeNames(Map.of("#attrName", listAttributeName))
            .expressionAttributeValues(Map.of(
                ":newItems",
                listValue,
                ":emptyList",
                AttributeValue.builder().l(new
ArrayList<AttributeValue>()).build()))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Prepends items to a list attribute.
     *
     * <p>This method demonstrates how to use the list_append function to add
     * items to the beginning of a list attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param listAttributeName The name of the list attribute
     * @param itemsToPrepend The items to prepend to the list
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse prependToList(
```

```
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String listAttributeName,
        List<AttributeValue> itemsToPrepend) {

        // Create a list value from the items to prepend
        AttributeValue listValue =
AttributeValue.builder().l(itemsToPrepend).build();

        // Define the update parameters
        // Note: To prepend, we put the new items first in the list_append function
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #attrName = list_append(:newItems,
if_not_exists(#attrName, :emptyList))")
            .expressionAttributeNames(Map.of("#attrName", listAttributeName))
            .expressionAttributeValues(Map.of(
                ":newItems",
                listValue,
                ":emptyList",
                AttributeValue.builder().l(new
ArrayList<AttributeValue>()).build()))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Updates a specific element in a list attribute.
     *
     * <p>This method demonstrates how to update a specific element in a list
     * by its index.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param listAttributeName The name of the list attribute
     * @param index The index of the element to update
     * @param newValue The new value for the element
     * @return The response from DynamoDB
```

```
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateListElement(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String listAttributeName,
        int index,
        AttributeValue newValue) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #attrName[" + index + "] = :newValue")
            .expressionAttributeNames(Map.of("#attrName", listAttributeName))
            .expressionAttributeValues(Map.of(":newValue", newValue))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Removes a specific element from a list attribute.
     *
     * <p>This method demonstrates how to remove a specific element from a list
     * by its index.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param listAttributeName The name of the list attribute
     * @param index The index of the element to remove
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse removeListElement(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String listAttributeName,
        int index) {
```

```
        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("REMOVE #attrName[" + index + "]")
            .expressionAttributeNames(Map.of("#attrName", listAttributeName))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Gets the current value of a list attribute.
     *
     * <p>Helper method to retrieve the current value of a list attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to get
     * @param listAttributeName The name of the list attribute
     * @return The list attribute value or null if not found
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static List<AttributeValue> getListAttribute(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, String listAttributeName) {

        // Define the get parameters
        GetItemRequest request = GetItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .projectionExpression(listAttributeName)
            .build();

        try {
            // Perform the get operation
            GetItemResponse response = dynamoDbClient.getItem(request);

            // Return the list attribute if it exists, otherwise null
            if (response.item() != null &&
response.item().containsKey(listAttributeName)) {
```

```
                return response.item().get(listAttributeName).l();
            }

            return null;
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to get list attribute: " + e.getMessage())
                .cause(e)
                .build();
        }
    }
```

Ejemplo de uso de operaciones de lista con AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        // Example key
        Map<String, AttributeValue> key = new HashMap<>();
        key.put("ProductId", AttributeValue.builder().s("P12345").build());

        System.out.println("Demonstrating list operations in DynamoDB");

        try {
            // Example 1: Append items to a list
            System.out.println("\nExample 1: Appending items to a list");
            List<AttributeValue> tagsToAppend = List.of(
                AttributeValue.builder().s("Electronics").build(),
                AttributeValue.builder().s("Gadget").build());

            UpdateItemResponse appendResponse = appendToList(dynamoDbClient,
tableName, key, "Tags", tagsToAppend);

            System.out.println("Updated list attribute: " +
appendResponse.attributes());

            // Example 2: Prepend items to a list
            System.out.println("\nExample 2: Prepending items to a list");
            List<AttributeValue> tagsToPrepend = List.of(
                AttributeValue.builder().s("Featured").build(),
                AttributeValue.builder().s("New").build());
```

```
            UpdateItemResponse prependResponse = prependToList(dynamoDbClient,
tableName, key, "Tags", tagsToPrepend);

            System.out.println("Updated list attribute: " +
prependResponse.attributes());

            // Example 3: Update a specific element in a list
            System.out.println("\nExample 3: Updating a specific element in a
list");
            UpdateItemResponse updateResponse = updateListElement(
                dynamoDbClient,
                tableName,
                key,
                "Tags",
                0,
                AttributeValue.builder().s("BestSeller").build());

            System.out.println("Updated list attribute: " +
updateResponse.attributes());

            // Example 4: Remove a specific element from a list
            System.out.println("\nExample 4: Removing a specific element from a
list");
            UpdateItemResponse removeResponse = removeListElement(dynamoDbClient,
tableName, key, "Tags", 1);

            System.out.println("Updated list attribute: " +
removeResponse.attributes());

            // Example 5: Get the current value of a list attribute
            System.out.println("\nExample 5: Getting the current value of a list
attribute");
            List<AttributeValue> currentList = getListAttribute(dynamoDbClient,
tableName, key, "Tags");

            if (currentList != null) {
                System.out.println("Current list attribute:");
                for (int i = 0; i < currentList.size(); i++) {
                    System.out.println("  [" + i + "]: " + currentList.get(i).s());
                }
            } else {
                System.out.println("List attribute not found");
            }
```

```
            // Explain list operations
            System.out.println("\nKey points about DynamoDB list operations:");
            System.out.println("1. Lists are ordered collections of attributes");
            System.out.println("2. Use list_append to add items to a list");
            System.out.println("3. To append items, use list_append(existingList,
newItems)");
            System.out.println("4. To prepend items, use list_append(newItems,
existingList)");
            System.out.println("5. Use index notation (list[0]) to access or update
specific elements");
            System.out.println("6. Use REMOVE to delete elements from a list");
            System.out.println("7. List indices are zero-based");
            System.out.println("8. Use if_not_exists to handle the case where the
list doesn't exist yet");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Para obtener más información sobre la API, consulte UpdateItemla referencia AWS SDK for Java 2.x de la API.

Realización de operaciones de asignación

El siguiente ejemplo de código muestra cómo realizar operaciones de asignación en DynamoDB.

- Agregue y actualice atributos anidados en estructuras de asignación.
- Elimine campos específicos de asignaciones.
- Trabaje con atributos de asignación profundamente anidados.

SDK para Java 2.x

Demuestre las operaciones del mapa utilizando AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
```

```
import software.amazon.awssdk.services.dynamodb.model.GetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.List;
import java.util.Map;

    /**
     * Updates a map attribute that may not exist.
     *
     * <p>This method demonstrates how to safely update a map attribute
     * by using if_not_exists to handle the case where the map doesn't exist yet.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param mapName The name of the map attribute
     * @param mapKey The key within the map to update
     * @param value The value to set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateMapAttributeSafe(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String mapName,
        String mapKey,
        AttributeValue value) {

        // Create an empty map to use if the map doesn't exist
        Map<String, AttributeValue> emptyMap = new HashMap<>();
        AttributeValue emptyMapValue = AttributeValue.builder().m(emptyMap).build();

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #mapName = if_not_exists(#mapName, :emptyMap),
 #mapName.#mapKey = :value")
            .expressionAttributeNames(Map.of(
                "#mapName", mapName,
                "#mapKey", mapKey))
```

```
            .expressionAttributeValues(Map.of(
                ":value",
                value,
                ":emptyMap",
                AttributeValue.builder().m(new HashMap<>()).build()))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Adds an attribute to a nested map.
     *
     * <p>This method demonstrates how to update a nested attribute without
     * overwriting the entire map.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param path The path to the nested attribute as a list
     * @param value The value to set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse addToNestedMap(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        List<String> path,
        AttributeValue value) {

        // Create expression attribute names for each part of the path
        Map<String, String> expressionAttributeNames = new HashMap<>();
        for (int i = 0; i < path.size(); i++) {
            expressionAttributeNames.put("#attr" + i, path.get(i));
        }

        // Build the attribute path using the expression attribute names
        StringBuilder attributePathExpression = new StringBuilder();
        for (int i = 0; i < path.size(); i++) {
            if (i > 0) {
                attributePathExpression.append(".");
```

```
            }
            attributePathExpression.append("#attr").append(i);
        }

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET " + attributePathExpression.toString() + "
= :value")
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(Map.of(":value", value))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Removes an attribute from a map.
     *
     * <p>This method demonstrates how to remove a specific attribute from a map.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param mapName The name of the map attribute
     * @param mapKey The key within the map to remove
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse removeMapAttribute(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String mapName,
        String mapKey) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("REMOVE #mapName.#mapKey")
```

```
            .expressionAttributeNames(Map.of(
                "#mapName", mapName,
                "#mapKey", mapKey))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Creates a map with multiple attributes in a single operation.
     *
     * <p>This method demonstrates how to create a map with multiple attributes
     * in a single update operation.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param mapName The name of the map attribute
     * @param attributes The attributes to set in the map
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse createMapWithAttributes(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String mapName,
        Map<String, AttributeValue> attributes) {

        // Create a map value from the attributes
        AttributeValue mapValue = AttributeValue.builder().m(attributes).build();

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #mapName = :mapValue")
            .expressionAttributeNames(Map.of("#mapName", mapName))
            .expressionAttributeValues(Map.of(":mapValue", mapValue))
            .returnValues("UPDATED_NEW")
            .build();
```

```
        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Gets the current value of a map attribute.
     *
     * <p>Helper method to retrieve the current value of a map attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to get
     * @param mapName The name of the map attribute
     * @return The map attribute value or null if not found
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static Map<String, AttributeValue> getMapAttribute(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, String mapName) {

        // Define the get parameters
        GetItemRequest request = GetItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .projectionExpression(mapName)
            .build();

        try {
            // Perform the get operation
            GetItemResponse response = dynamoDbClient.getItem(request);

            // Return the map attribute if it exists, otherwise null
            if (response.item() != null && response.item().containsKey(mapName)) {
                return response.item().get(mapName).m();
            }

            return null;
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to get map attribute: " + e.getMessage())
                .cause(e)
                .build();
        }
    }
```

Ejemplo de uso de operaciones de mapas con AWS SDK for Java 2.x.

```
   public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
       // Example key
       Map<String, AttributeValue> key = new HashMap<>();
       key.put("ProductId", AttributeValue.builder().s("P12345").build());

       System.out.println("Demonstrating map operations in DynamoDB");

       try {
           // Example 1: Create a map with multiple attributes
           System.out.println("\nExample 1: Creating a map with multiple
attributes");
           Map<String, AttributeValue> productDetails = new HashMap<>();
           productDetails.put("Color", AttributeValue.builder().s("Red").build());
           productDetails.put("Weight", AttributeValue.builder().n("2.5").build());
           productDetails.put(
               "Dimensions", AttributeValue.builder().s("10x20x5").build());

           UpdateItemResponse createResponse =
               createMapWithAttributes(dynamoDbClient, tableName, key, "Details",
productDetails);

           System.out.println("Created map attribute: " +
createResponse.attributes());

           // Example 2: Update a specific attribute in a map
           System.out.println("\nExample 2: Updating a specific attribute in a
map");
           UpdateItemResponse updateResponse = updateMapAttributeSafe(
               dynamoDbClient,
               tableName,
               key,
               "Details",
               "Color",
               AttributeValue.builder().s("Blue").build());

           System.out.println("Updated map attribute: " +
updateResponse.attributes());
```

```
            // Example 3: Add an attribute to a nested map
            System.out.println("\nExample 3: Adding an attribute to a nested map");
            UpdateItemResponse nestedResponse = addToNestedMap(
                dynamoDbClient,
                tableName,
                key,
                List.of("Specifications", "Technical", "Resolution"),
                AttributeValue.builder().s("1920x1080").build());

            System.out.println("Added to nested map: " +
nestedResponse.attributes());

            // Example 4: Remove an attribute from a map
            System.out.println("\nExample 4: Removing an attribute from a map");
            UpdateItemResponse removeResponse =
                removeMapAttribute(dynamoDbClient, tableName, key, "Details",
"Dimensions");

            System.out.println("Updated map after removal: " +
removeResponse.attributes());

            // Example 5: Get the current value of a map attribute
            System.out.println("\nExample 5: Getting the current value of a map
attribute");
            Map<String, AttributeValue> currentMap = getMapAttribute(dynamoDbClient,
tableName, key, "Details");

            if (currentMap != null) {
                System.out.println("Current map attribute:");
                for (Map.Entry<String, AttributeValue> entry :
currentMap.entrySet()) {
                    System.out.println("  " + entry.getKey() + ": " +
entry.getValue());
                }
            } else {
                System.out.println("Map attribute not found");
            }

            // Explain map operations
            System.out.println("\nKey points about DynamoDB map operations:");
            System.out.println("1. Maps are unordered collections of name-value
pairs");
            System.out.println("2. Use dot notation (map.key) to access or update
specific attributes");
```

```
            System.out.println("3. You can update individual attributes without
overwriting the entire map");
            System.out.println("4. Maps can be nested to create complex data
structures");
            System.out.println("5. Use REMOVE to delete attributes from a map");
            System.out.println("6. You can create a map with multiple attributes in
a single operation");
            System.out.println("7. Map keys are case-sensitive");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Para obtener más información sobre la API, consulte UpdateItemla referencia AWS SDK for Java 2.x de la API.

Realización de operaciones de conjunto

El siguiente ejemplo de código muestra cómo realizar operaciones de conjunto en DynamoDB.

- Agregue elementos a un atributo de conjunto.
- Elimine elementos de un atributo de conjunto.
- Utilice las operaciones ADD y DELETE con conjuntos.

SDK para Java 2.x

Demuestre las operaciones de conjunto utilizando AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.GetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.ReturnValue;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
```

```
import java.util.HashSet;
import java.util.Map;
import java.util.Set;

    /**
     * Adds values to a string set attribute.
     *
     * <p>This method demonstrates how to use the ADD operation to add values
     * to a string set attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param setAttributeName The name of the set attribute
     * @param valuesToAdd The values to add to the set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse addToStringSet(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String setAttributeName,
        Set<String> valuesToAdd) {

        // Create a string set value from the values to add
        AttributeValue setValue = AttributeValue.builder().ss(valuesToAdd).build();

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("ADD #setAttr :valuesToAdd")
            .expressionAttributeNames(Map.of("#setAttr", setAttributeName))
            .expressionAttributeValues(Map.of(":valuesToAdd", setValue))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Adds values to a number set attribute.
```

```
     *
     * <p>This method demonstrates how to use the ADD operation to add values
     * to a number set attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param setAttributeName The name of the set attribute
     * @param valuesToAdd The values to add to the set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse addToNumberSet(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String setAttributeName,
        Set<Number> valuesToAdd) {

        // Convert numbers to strings for DynamoDB
        Set<String> stringValues = new HashSet<>();
        for (Number value : valuesToAdd) {
            stringValues.add(value.toString());
        }

        // Create a number set value from the values to add
        AttributeValue setValue = AttributeValue.builder().ns(stringValues).build();

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("ADD #setAttr :valuesToAdd")
            .expressionAttributeNames(Map.of("#setAttr", setAttributeName))
            .expressionAttributeValues(Map.of(":valuesToAdd", setValue))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Removes values from a set attribute.
```

```
     *
     * <p>This method demonstrates how to use the DELETE operation to remove values
     * from a set attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param setAttributeName The name of the set attribute
     * @param valuesToRemove The values to remove from the set
     * @param isNumberSet Whether the set is a number set (true) or string set
(false)
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse removeFromSet(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String setAttributeName,
        Set<?> valuesToRemove,
        boolean isNumberSet) {

        AttributeValue setValue;

        if (isNumberSet) {
            // Convert numbers to strings for DynamoDB
            Set<String> stringValues = new HashSet<>();
            for (Object value : valuesToRemove) {
                if (value instanceof Number) {
                    stringValues.add(value.toString());
                } else {
                    throw new IllegalArgumentException("Values must be numbers for a
number set");
                }
            }

            setValue = AttributeValue.builder().ns(stringValues).build();
        } else {
            // Convert objects to strings for DynamoDB
            Set<String> stringValues = new HashSet<>();
            for (Object value : valuesToRemove) {
                stringValues.add(value.toString());
            }
```

```
            setValue = AttributeValue.builder().ss(stringValues).build();
        }

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("DELETE #setAttr :valuesToRemove")
            .expressionAttributeNames(Map.of("#setAttr", setAttributeName))
            .expressionAttributeValues(Map.of(":valuesToRemove", setValue))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Checks if a value exists in a set attribute.
     *
     * <p>This method demonstrates how to use the contains function to check
     * if a value exists in a set attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to check
     * @param setAttributeName The name of the set attribute
     * @param valueToCheck The value to check for
     * @return Map containing the result of the check
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static Map<String, Object> checkIfValueInSet(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String setAttributeName,
        String valueToCheck) {

        Map<String, Object> result = new HashMap<>();

        try {
            // Define the update parameters with a condition expression
            UpdateItemRequest request = UpdateItemRequest.builder()
                .tableName(tableName)
```

```
                .key(key)
                .updateExpression("SET #tempAttr = :tempVal")
                .conditionExpression("contains(#setAttr, :valueToCheck)")
                .expressionAttributeNames(Map.of("#setAttr", setAttributeName,
"#tempAttr", "TempAttribute"))
                .expressionAttributeValues(Map.of(
                    ":valueToCheck",
AttributeValue.builder().s(valueToCheck).build(),
                    ":tempVal", AttributeValue.builder().s("TempValue").build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            // Attempt the update operation
            dynamoDbClient.updateItem(request);

            // If we get here, the condition was met
            result.put("exists", true);
            result.put("message", "Value '" + valueToCheck + "' exists in the set");

            // Clean up the temporary attribute
            UpdateItemRequest cleanupRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("REMOVE #tempAttr")
                .expressionAttributeNames(Map.of("#tempAttr", "TempAttribute"))
                .build();

            dynamoDbClient.updateItem(cleanupRequest);

        } catch (DynamoDbException e) {
            if (e.getMessage().contains("ConditionalCheckFailed")) {
                // The condition was not met
                result.put("exists", false);
                result.put("message", "Value '" + valueToCheck + "' does not exist
in the set");
            } else {
                // Some other error occurred
                result.put("exists", false);
                result.put("message", "Error checking set: " + e.getMessage());
                result.put("error", e.getClass().getSimpleName());
            }
        }

        return result;
```

```
    }

    /**
     * Creates a set with multiple values in a single operation.
     *
     * <p>This method demonstrates how to create a set with multiple values
     * in a single update operation.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param setAttributeName The name of the set attribute
     * @param setValues The values to include in the set
     * @param isNumberSet Whether to create a number set (true) or string set
(false)
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse createSetWithValues(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String setAttributeName,
        Set<?> setValues,
        boolean isNumberSet) {

        AttributeValue setValue;

        if (isNumberSet) {
            // Convert numbers to strings for DynamoDB
            Set<String> stringValues = new HashSet<>();
            for (Object value : setValues) {
                if (value instanceof Number) {
                    stringValues.add(value.toString());
                } else {
                    throw new IllegalArgumentException("Values must be numbers for a
number set");
                }
            }

            setValue = AttributeValue.builder().ns(stringValues).build();
        } else {
            // Convert objects to strings for DynamoDB
            Set<String> stringValues = new HashSet<>();
```

```
            for (Object value : setValues) {
                stringValues.add(value.toString());
            }

            setValue = AttributeValue.builder().ss(stringValues).build();
        }

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #setAttr = :setValue")
            .expressionAttributeNames(Map.of("#setAttr", setAttributeName))
            .expressionAttributeValues(Map.of(":setValue", setValue))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Gets the current value of a set attribute.
     *
     * <p>Helper method to retrieve the current value of a set attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to get
     * @param setAttributeName The name of the set attribute
     * @return The set attribute value or null if not found
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static AttributeValue getSetAttribute(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, String setAttributeName) {

        // Define the get parameters
        GetItemRequest request = GetItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .projectionExpression(setAttributeName)
            .build();
```

```
        try {
            // Perform the get operation
            GetItemResponse response = dynamoDbClient.getItem(request);

            // Return the set attribute if it exists, otherwise null
            if (response.item() != null &&
response.item().containsKey(setAttributeName)) {
                return response.item().get(setAttributeName);
            }

            return null;
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to get set attribute: " + e.getMessage())
                .cause(e)
                .build();
        }
    }
```

Ejemplo de uso de operaciones de conjunto con AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        // Example key
        Map<String, AttributeValue> key = new HashMap<>();
        key.put("ProductId", AttributeValue.builder().s("P12345").build());

        System.out.println("Demonstrating set operations in DynamoDB");

        try {
            // Example 1: Create a string set with multiple values
            System.out.println("\nExample 1: Creating a string set with multiple
values");
            Set<String> tags = new HashSet<>();
            tags.add("Electronics");
            tags.add("Gadget");
            tags.add("Smartphone");

            UpdateItemResponse createResponse = createSetWithValues(
                dynamoDbClient, tableName, key, "Tags", tags, false // Not a number
set
                );
```

```
            System.out.println("Created set attribute: " +
createResponse.attributes());

            // Example 2: Add values to a string set
            System.out.println("\nExample 2: Adding values to a string set");
            Set<String> additionalTags = new HashSet<>();
            additionalTags.add("Mobile");
            additionalTags.add("Wireless");

            UpdateItemResponse addResponse = addToStringSet(dynamoDbClient,
tableName, key, "Tags", additionalTags);

            System.out.println("Updated set attribute: " +
addResponse.attributes());

            // Example 3: Create a number set with multiple values
            System.out.println("\nExample 3: Creating a number set with multiple
values");
            Set<Number> ratings = new HashSet<>();
            ratings.add(4);
            ratings.add(5);
            ratings.add(4.5);

            UpdateItemResponse createNumberSetResponse = createSetWithValues(
                dynamoDbClient, tableName, key, "Ratings", ratings, true // Is a
number set
                );

            System.out.println("Created number set attribute: " +
createNumberSetResponse.attributes());

            // Example 4: Add values to a number set
            System.out.println("\nExample 4: Adding values to a number set");
            Set<Number> additionalRatings = new HashSet<>();
            additionalRatings.add(3.5);
            additionalRatings.add(4.2);

            UpdateItemResponse addNumberResponse =
                addToNumberSet(dynamoDbClient, tableName, key, "Ratings",
additionalRatings);

            System.out.println("Updated number set attribute: " +
addNumberResponse.attributes());
```

```
            // Example 5: Remove values from a set
            System.out.println("\nExample 5: Removing values from a set");
            Set<String> tagsToRemove = new HashSet<>();
            tagsToRemove.add("Gadget");

            UpdateItemResponse removeResponse = removeFromSet(
                dynamoDbClient, tableName, key, "Tags", tagsToRemove, false // Not a
number set
                );

            System.out.println("Updated set after removal: " +
removeResponse.attributes());

            // Example 6: Check if a value exists in a set
            System.out.println("\nExample 6: Checking if a value exists in a set");
            Map<String, Object> checkResult = checkIfValueInSet(dynamoDbClient,
tableName, key, "Tags", "Electronics");

            System.out.println("Check result: " + checkResult.get("message"));

            // Example 7: Get the current value of a set attribute
            System.out.println("\nExample 7: Getting the current value of a set
attribute");
            AttributeValue currentStringSet = getSetAttribute(dynamoDbClient,
tableName, key, "Tags");

            if (currentStringSet != null && currentStringSet.ss() != null) {
                System.out.println("Current string set values: " +
currentStringSet.ss());
            } else {
                System.out.println("String set attribute not found");
            }

            AttributeValue currentNumberSet = getSetAttribute(dynamoDbClient,
tableName, key, "Ratings");

            if (currentNumberSet != null && currentNumberSet.ns() != null) {
                System.out.println("Current number set values: " +
currentNumberSet.ns());
            } else {
                System.out.println("Number set attribute not found");
            }
```

```
            // Explain set operations
            System.out.println("\nKey points about DynamoDB set operations:");
            System.out.println(
                "1. DynamoDB supports three set types: string sets (SS), number sets
(NS), and binary sets (BS)");
            System.out.println("2. Sets can only contain elements of the same
type");
            System.out.println("3. Use ADD to add elements to a set");
            System.out.println("4. Use DELETE to remove elements from a set");
            System.out.println("5. Sets automatically remove duplicate values");
            System.out.println("6. Sets are unordered collections");
            System.out.println("7. Use the contains function to check if a value
exists in a set");
            System.out.println("8. You can create a set with multiple values in a
single operation");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Para obtener más información sobre la API, consulte UpdateItemla referencia AWS SDK for Java 2.x de la API.

Consultar una tabla mediante lotes de instrucciones PartiQL

En el siguiente ejemplo de código, se muestra cómo:

- Obtención de un lote de elementos mediante la ejecución de varias instrucciones SELECT.
- Agregar un lote de elementos mediante la ejecución de varias instrucciones INSERT.
- Actualizar un lote de elementos con la ejecución de varias instrucciones UPDATE.
- Eliminación de un lote de elementos con la ejecución de varias instrucciones DELETE.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public class ScenarioPartiQLBatch {
    public static void main(String[] args) throws IOException {
        String tableName = "MoviesPartiQBatch";
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
            .region(region)
            .build();

        System.out.println("Creating an Amazon DynamoDB table named " + tableName
            + " with a key named year and a sort key named title.");
        createTable(ddb, tableName);

        System.out.println("Adding multiple records into the " + tableName
            + " table using a batch command.");
        putRecordBatch(ddb);

        // Update multiple movies by using the BatchExecute statement.
        String title1 = "Star Wars";
        int year1 = 1977;
        String title2 = "Wizard of Oz";
        int year2 = 1939;

        System.out.println("Query two movies.");
        getBatch(ddb, tableName, title1, title2, year1, year2);

        System.out.println("Updating multiple records using a batch command.");
        updateTableItemBatch(ddb);

        System.out.println("Deleting multiple records using a batch command.");
        deleteItemBatch(ddb);

        System.out.println("Deleting the Amazon DynamoDB table.");
        deleteDynamoDBTable(ddb, tableName);
        ddb.close();
```

```
    }

    public static boolean getBatch(DynamoDbClient ddb, String tableName, String
title1, String title2, int year1, int year2) {
        String getBatch = "SELECT * FROM " + tableName + " WHERE title = ? AND year
= ?";

        List<BatchStatementRequest> statements = new ArrayList<>();
        statements.add(BatchStatementRequest.builder()
            .statement(getBatch)
            .parameters(AttributeValue.builder().s(title1).build(),
                AttributeValue.builder().n(String.valueOf(year1)).build())
            .build());
        statements.add(BatchStatementRequest.builder()
            .statement(getBatch)
            .parameters(AttributeValue.builder().s(title2).build(),
                AttributeValue.builder().n(String.valueOf(year2)).build())
            .build());

        BatchExecuteStatementRequest batchExecuteStatementRequest =
BatchExecuteStatementRequest.builder()
            .statements(statements)
            .build();

        try {
            BatchExecuteStatementResponse response =
ddb.batchExecuteStatement(batchExecuteStatementRequest);
            if (!response.responses().isEmpty()) {
                response.responses().forEach(r -> {
                    System.out.println(r.item().get("title") + "\\t" +
r.item().get("year"));
                });
                return true;
            } else {
                System.out.println("Couldn't find either " + title1 + " or " +
title2 + ".");
                return false;
            }
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            return false;
        }
    }
```

```
    public static void createTable(DynamoDbClient ddb, String tableName) {
        DynamoDbWaiter dbWaiter = ddb.waiter();
        ArrayList<AttributeDefinition> attributeDefinitions = new ArrayList<>();

        // Define attributes.
        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("year")
            .attributeType("N")
            .build());

        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("title")
            .attributeType("S")
            .build());

        ArrayList<KeySchemaElement> tableKey = new ArrayList<>();
        KeySchemaElement key = KeySchemaElement.builder()
            .attributeName("year")
            .keyType(KeyType.HASH)
            .build();

        KeySchemaElement key2 = KeySchemaElement.builder()
            .attributeName("title")
            .keyType(KeyType.RANGE) // Sort
            .build();

        // Add KeySchemaElement objects to the list.
        tableKey.add(key);
        tableKey.add(key2);

        CreateTableRequest request = CreateTableRequest.builder()
            .keySchema(tableKey)
            .billingMode(BillingMode.PAY_PER_REQUEST) //  DynamoDB automatically
scales based on traffic.
            .attributeDefinitions(attributeDefinitions)
            .tableName(tableName)
            .build();

        try {
            CreateTableResponse response = ddb.createTable(request);
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                .tableName(tableName)
                .build();
```

```
            // Wait until the Amazon DynamoDB table is created.
            WaiterResponse<DescribeTableResponse> waiterResponse = dbWaiter
                .waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            String newTable = response.tableDescription().tableName();
            System.out.println("The " + newTable + " was successfully created.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void putRecordBatch(DynamoDbClient ddb) {
        String sqlStatement = "INSERT INTO MoviesPartiQBatch VALUE {'year':?,
'title' : ?, 'info' : ?}";
        try {
            // Create three movies to add to the Amazon DynamoDB table.
            // Set data for Movie 1.
            List<AttributeValue> parameters = new ArrayList<>();

            AttributeValue att1 = AttributeValue.builder()
                .n("1977")
                .build();

            AttributeValue att2 = AttributeValue.builder()
                .s("Star Wars")
                .build();

            AttributeValue att3 = AttributeValue.builder()
                .s("No Information")
                .build();

            parameters.add(att1);
            parameters.add(att2);
            parameters.add(att3);

            BatchStatementRequest statementRequestMovie1 =
BatchStatementRequest.builder()
                .statement(sqlStatement)
                .parameters(parameters)
                .build();

            // Set data for Movie 2.
```

```
            List<AttributeValue> parametersMovie2 = new ArrayList<>();
            AttributeValue attMovie2 = AttributeValue.builder()
                .n("1939")
                .build();

            AttributeValue attMovie2A = AttributeValue.builder()
                .s("Wizard of Oz")
                .build();

            AttributeValue attMovie2B = AttributeValue.builder()
                .s("No Information")
                .build();

            parametersMovie2.add(attMovie2);
            parametersMovie2.add(attMovie2A);
            parametersMovie2.add(attMovie2B);

            BatchStatementRequest statementRequestMovie2 =
BatchStatementRequest.builder()
                .statement(sqlStatement)
                .parameters(parametersMovie2)
                .build();

            // Set data for Movie 3.
            List<AttributeValue> parametersMovie3 = new ArrayList<>();
            AttributeValue attMovie3 = AttributeValue.builder()
                .n(String.valueOf("2022"))
                .build();

            AttributeValue attMovie3A = AttributeValue.builder()
                .s("My Movie 3")
                .build();

            AttributeValue attMovie3B = AttributeValue.builder()
                .s("No Information")
                .build();

            parametersMovie3.add(attMovie3);
            parametersMovie3.add(attMovie3A);
            parametersMovie3.add(attMovie3B);

            BatchStatementRequest statementRequestMovie3 =
BatchStatementRequest.builder()
                .statement(sqlStatement)
```

```
                .parameters(parametersMovie3)
                .build();

            // Add all three movies to the list.
            List<BatchStatementRequest> myBatchStatementList = new ArrayList<>();
            myBatchStatementList.add(statementRequestMovie1);
            myBatchStatementList.add(statementRequestMovie2);
            myBatchStatementList.add(statementRequestMovie3);

            BatchExecuteStatementRequest batchRequest =
 BatchExecuteStatementRequest.builder()
                .statements(myBatchStatementList)
                .build();

            BatchExecuteStatementResponse response =
 ddb.batchExecuteStatement(batchRequest);
            System.out.println("ExecuteStatement successful: " +
 response.toString());
            System.out.println("Added new movies using a batch command.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void updateTableItemBatch(DynamoDbClient ddb) {
        String sqlStatement = "UPDATE MoviesPartiQBatch SET info = 'directors\":
[\"Merian C. Cooper\",\"Ernest B. Schoedsack' where year=? and title=?";
        List<AttributeValue> parametersRec1 = new ArrayList<>();

        // Update three records.
        AttributeValue att1 = AttributeValue.builder()
            .n(String.valueOf("2022"))
            .build();

        AttributeValue att2 = AttributeValue.builder()
            .s("My Movie 1")
            .build();

        parametersRec1.add(att1);
        parametersRec1.add(att2);

        BatchStatementRequest statementRequestRec1 = BatchStatementRequest.builder()
```

```
            .statement(sqlStatement)
            .parameters(parametersRec1)
            .build();

        // Update record 2.
        List<AttributeValue> parametersRec2 = new ArrayList<>();
        AttributeValue attRec2 = AttributeValue.builder()
            .n(String.valueOf("2022"))
            .build();

        AttributeValue attRec2a = AttributeValue.builder()
            .s("My Movie 2")
            .build();

        parametersRec2.add(attRec2);
        parametersRec2.add(attRec2a);
        BatchStatementRequest statementRequestRec2 = BatchStatementRequest.builder()
            .statement(sqlStatement)
            .parameters(parametersRec2)
            .build();

        // Update record 3.
        List<AttributeValue> parametersRec3 = new ArrayList<>();
        AttributeValue attRec3 = AttributeValue.builder()
            .n(String.valueOf("2022"))
            .build();

        AttributeValue attRec3a = AttributeValue.builder()
            .s("My Movie 3")
            .build();

        parametersRec3.add(attRec3);
        parametersRec3.add(attRec3a);
        BatchStatementRequest statementRequestRec3 = BatchStatementRequest.builder()
            .statement(sqlStatement)
            .parameters(parametersRec3)
            .build();

        // Add all three movies to the list.
        List<BatchStatementRequest> myBatchStatementList = new ArrayList<>();
        myBatchStatementList.add(statementRequestRec1);
        myBatchStatementList.add(statementRequestRec2);
        myBatchStatementList.add(statementRequestRec3);
```

```
        BatchExecuteStatementRequest batchRequest =
BatchExecuteStatementRequest.builder()
            .statements(myBatchStatementList)
            .build();

        try {
            BatchExecuteStatementResponse response =
ddb.batchExecuteStatement(batchRequest);
            System.out.println("ExecuteStatement successful: " +
response.toString());
            System.out.println("Updated three movies using a batch command.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println("Item was updated!");
    }

    public static void deleteItemBatch(DynamoDbClient ddb) {
        String sqlStatement = "DELETE FROM MoviesPartiQBatch WHERE year = ? and
title=?";
        List<AttributeValue> parametersRec1 = new ArrayList<>();

        // Specify three records to delete.
        AttributeValue att1 = AttributeValue.builder()
            .n(String.valueOf("2022"))
            .build();

        AttributeValue att2 = AttributeValue.builder()
            .s("My Movie 1")
            .build();

        parametersRec1.add(att1);
        parametersRec1.add(att2);

        BatchStatementRequest statementRequestRec1 = BatchStatementRequest.builder()
            .statement(sqlStatement)
            .parameters(parametersRec1)
            .build();

        // Specify record 2.
        List<AttributeValue> parametersRec2 = new ArrayList<>();
        AttributeValue attRec2 = AttributeValue.builder()
```

```
            .n(String.valueOf("2022"))
            .build();

        AttributeValue attRec2a = AttributeValue.builder()
            .s("My Movie 2")
            .build();

        parametersRec2.add(attRec2);
        parametersRec2.add(attRec2a);
        BatchStatementRequest statementRequestRec2 = BatchStatementRequest.builder()
            .statement(sqlStatement)
            .parameters(parametersRec2)
            .build();

        // Specify record 3.
        List<AttributeValue> parametersRec3 = new ArrayList<>();
        AttributeValue attRec3 = AttributeValue.builder()
            .n(String.valueOf("2022"))
            .build();

        AttributeValue attRec3a = AttributeValue.builder()
            .s("My Movie 3")
            .build();

        parametersRec3.add(attRec3);
        parametersRec3.add(attRec3a);

        BatchStatementRequest statementRequestRec3 = BatchStatementRequest.builder()
            .statement(sqlStatement)
            .parameters(parametersRec3)
            .build();

        // Add all three movies to the list.
        List<BatchStatementRequest> myBatchStatementList = new ArrayList<>();
        myBatchStatementList.add(statementRequestRec1);
        myBatchStatementList.add(statementRequestRec2);
        myBatchStatementList.add(statementRequestRec3);

        BatchExecuteStatementRequest batchRequest =
BatchExecuteStatementRequest.builder()
            .statements(myBatchStatementList)
            .build();

        try {
```

```
            ddb.batchExecuteStatement(batchRequest);
            System.out.println("Deleted three movies using a batch command.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void deleteDynamoDBTable(DynamoDbClient ddb, String tableName) {
        DeleteTableRequest request = DeleteTableRequest.builder()
            .tableName(tableName)
            .build();

        try {
            ddb.deleteTable(request);

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println(tableName + " was successfully deleted!");
    }

    private static ExecuteStatementResponse executeStatementRequest(DynamoDbClient
 ddb, String statement,

 List<AttributeValue> parameters) {
        ExecuteStatementRequest request = ExecuteStatementRequest.builder()
            .statement(statement)
            .parameters(parameters)
            .build();

        return ddb.executeStatement(request);
    }
}
```

- Para obtener más información sobre la API, consulta BatchExecuteStatementla Referencia AWS SDK for Java 2.x de la API.

Consultar una tabla con PartiQL

En el siguiente ejemplo de código, se muestra cómo:

- Obtener un artículo mediante una instrucción SELECT.
- Agregar un elemento mediante una instrucción INSERT.
- Actualizar un elemento mediante una instrucción UPDATE.
- Eliminar un elemento mediante una instrucción DELETE.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public class ScenarioPartiQ {
    public static void main(String[] args) throws IOException {
        String fileName = "../../../resources/sample_files/movies.json";
        String tableName = "MoviesPartiQ";
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
            .region(region)
            .build();

        System.out.println(
            "******* Creating an Amazon DynamoDB table named MoviesPartiQ with a key
 named year and a sort key named title.");
        createTable(ddb, tableName);

        System.out.println("Loading data into the MoviesPartiQ table.");
        loadData(ddb, fileName);

        System.out.println("Getting data from the MoviesPartiQ table.");
        getItem(ddb);

        System.out.println("Putting a record into the MoviesPartiQ table.");
        putRecord(ddb);
```

```
        System.out.println("Updating a record.");
        updateTableItem(ddb);

        System.out.println("Querying the movies released in 2013.");
        queryTable(ddb);

        System.out.println("Deleting the Amazon DynamoDB table.");
        deleteDynamoDBTable(ddb, tableName);
        ddb.close();
    }

    public static void createTable(DynamoDbClient ddb, String tableName) {
        DynamoDbWaiter dbWaiter = ddb.waiter();
        ArrayList<AttributeDefinition> attributeDefinitions = new ArrayList<>();

        // Define attributes.
        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("year")
            .attributeType("N")
            .build());

        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("title")
            .attributeType("S")
            .build());

        ArrayList<KeySchemaElement> tableKey = new ArrayList<>();
        KeySchemaElement key = KeySchemaElement.builder()
            .attributeName("year")
            .keyType(KeyType.HASH)
            .build();

        KeySchemaElement key2 = KeySchemaElement.builder()
            .attributeName("title")
            .keyType(KeyType.RANGE) // Sort
            .build();

        // Add KeySchemaElement objects to the list.
        tableKey.add(key);
        tableKey.add(key2);

        CreateTableRequest request = CreateTableRequest.builder()
            .keySchema(tableKey)
            .billingMode(BillingMode.PAY_PER_REQUEST) //Scales based on traffic.
```

```
            .attributeDefinitions(attributeDefinitions)
            .tableName(tableName)
            .build();

        try {
            CreateTableResponse response = ddb.createTable(request);
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                .tableName(tableName)
                .build();

            // Wait until the Amazon DynamoDB table is created.
            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            String newTable = response.tableDescription().tableName();
            System.out.println("The " + newTable + " was successfully created.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    // Load data into the table.
    public static void loadData(DynamoDbClient ddb, String fileName) throws
IOException {

        String sqlStatement = "INSERT INTO MoviesPartiQ VALUE {'year':?,
'title' : ?, 'info' : ?}";
        JsonParser parser = new JsonFactory().createParser(new File(fileName));
        com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
        Iterator<JsonNode> iter = rootNode.iterator();
        ObjectNode currentNode;
        int t = 0;
        List<AttributeValue> parameters = new ArrayList<>();
        while (iter.hasNext()) {

            // Add 200 movies to the table.
            if (t == 200)
                break;
            currentNode = (ObjectNode) iter.next();

            int year = currentNode.path("year").asInt();
```

```
            String title = currentNode.path("title").asText();
            String info = currentNode.path("info").toString();

            AttributeValue att1 = AttributeValue.builder()
                .n(String.valueOf(year))
                .build();

            AttributeValue att2 = AttributeValue.builder()
                .s(title)
                .build();

            AttributeValue att3 = AttributeValue.builder()
                .s(info)
                .build();

            parameters.add(att1);
            parameters.add(att2);
            parameters.add(att3);

            // Insert the movie into the Amazon DynamoDB table.
            executeStatementRequest(ddb, sqlStatement, parameters);
            System.out.println("Added Movie " + title);

            parameters.remove(att1);
            parameters.remove(att2);
            parameters.remove(att3);
            t++;
        }
    }

    public static void getItem(DynamoDbClient ddb) {

        String sqlStatement = "SELECT * FROM MoviesPartiQ where year=? and title=?";
        List<AttributeValue> parameters = new ArrayList<>();
        AttributeValue att1 = AttributeValue.builder()
            .n("2012")
            .build();

        AttributeValue att2 = AttributeValue.builder()
            .s("The Perks of Being a Wallflower")
            .build();

        parameters.add(att1);
        parameters.add(att2);
```

```
        try {
            ExecuteStatementResponse response = executeStatementRequest(ddb,
sqlStatement, parameters);
            System.out.println("ExecuteStatement successful: " +
response.toString());

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void putRecord(DynamoDbClient ddb) {

        String sqlStatement = "INSERT INTO MoviesPartiQ VALUE {'year':?,
'title' : ?, 'info' : ?}";
        try {
            List<AttributeValue> parameters = new ArrayList<>();

            AttributeValue att1 = AttributeValue.builder()
                .n(String.valueOf("2020"))
                .build();

            AttributeValue att2 = AttributeValue.builder()
                .s("My Movie")
                .build();

            AttributeValue att3 = AttributeValue.builder()
                .s("No Information")
                .build();

            parameters.add(att1);
            parameters.add(att2);
            parameters.add(att3);

            executeStatementRequest(ddb, sqlStatement, parameters);
            System.out.println("Added new movie.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

```
   public static void updateTableItem(DynamoDbClient ddb) {

       String sqlStatement = "UPDATE MoviesPartiQ SET info = 'directors\":[\"Merian
C. Cooper\",\"Ernest B. Schoedsack' where year=? and title=?";
       List<AttributeValue> parameters = new ArrayList<>();
       AttributeValue att1 = AttributeValue.builder()
           .n(String.valueOf("2013"))
           .build();

       AttributeValue att2 = AttributeValue.builder()
           .s("The East")
           .build();

       parameters.add(att1);
       parameters.add(att2);

       try {
           executeStatementRequest(ddb, sqlStatement, parameters);

       } catch (DynamoDbException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
       System.out.println("Item was updated!");
   }

   // Query the table where the year is 2013.
   public static void queryTable(DynamoDbClient ddb) {
       String sqlStatement = "SELECT * FROM MoviesPartiQ where year = ? ORDER BY
year";
       try {

           List<AttributeValue> parameters = new ArrayList<>();
           AttributeValue att1 = AttributeValue.builder()
               .n(String.valueOf("2013"))
               .build();
           parameters.add(att1);

           // Get items in the table and write out the ID value.
           ExecuteStatementResponse response = executeStatementRequest(ddb,
sqlStatement, parameters);
           System.out.println("ExecuteStatement successful: " +
response.toString());
```

```
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void deleteDynamoDBTable(DynamoDbClient ddb, String tableName) {

        DeleteTableRequest request = DeleteTableRequest.builder()
            .tableName(tableName)
            .build();

        try {
            ddb.deleteTable(request);

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println(tableName + " was successfully deleted!");
    }

    private static ExecuteStatementResponse executeStatementRequest(DynamoDbClient
 ddb, String statement,

 List<AttributeValue> parameters) {
        ExecuteStatementRequest request = ExecuteStatementRequest.builder()
            .statement(statement)
            .parameters(parameters)
            .build();

        return ddb.executeStatement(request);
    }

    private static void processResults(ExecuteStatementResponse
 executeStatementResult) {
        System.out.println("ExecuteStatement successful: " +
 executeStatementResult.toString());
    }
}
```

- Para obtener más información sobre la API, consulta ExecuteStatementla Referencia AWS SDK for Java 2.x de la API.

Consulta de una tabla mediante un índice secundario global

El siguiente ejemplo de código muestra cómo consultar una tabla mediante un índice secundario global.

- Consulte una tabla de DynamoDB mediante su clave principal.
- Consulte un índice secundario global (GSI) para patrones de acceso alternativos.
- Compare las consultas de tabla y las consultas de GSI.

SDK para Java 2.x

Consulte una tabla de DynamoDB mediante su clave principal y un índice secundario global (GSI) con. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;

    public QueryResponse queryTable(
        final String tableName, final String partitionKeyName, final String
 partitionKeyValue) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);

        // Create expression attribute values for the column values
```

```
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            System.out.println("Query on base table successful. Found " +
response.count() + " items");
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
found.\n", tableName);
            throw new DynamoDbQueryException("Table not found: " + tableName, e);
        } catch (DynamoDbException e) {
            System.err.println("Error querying base table: " + e.getMessage());
            throw new DynamoDbQueryException("Failed to execute query on base
table", e);
        }
    }

    /**
     * Queries a DynamoDB Global Secondary Index (GSI) by partition key.
     *
     * @param tableName         The name of the DynamoDB table
     * @param indexName         The name of the GSI
     * @param partitionKeyName  The name of the GSI partition key attribute
     * @param partitionKeyValue The value of the GSI partition key to query
     * @return The query response from DynamoDB
     * @throws ResourceNotFoundException if the table or index doesn't exist
     * @throws DynamoDbException if the query fails
     */
    public QueryResponse queryGlobalSecondaryIndex(
        final String tableName, final String indexName, final String
partitionKeyName, final String partitionKeyValue) {
```

```
        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Index name", indexName);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_IK,
partitionKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_IK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .indexName(indexName)
            .keyConditionExpression(GSI_KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            System.out.println("Query on GSI successful. Found " + response.count()
+ " items");
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format(
                "Error: The Amazon DynamoDB table \"%s\" or index \"%s\" can't be
found.\n", tableName, indexName);
            throw new DynamoDbQueryException("Table or index not found: " +
tableName + "/" + indexName, e);
        } catch (DynamoDbException e) {
            System.err.println("Error querying GSI: " + e.getMessage());
            throw new DynamoDbQueryException("Failed to execute query on GSI", e);
        }
    }
```

Compare la consulta directa de una tabla con la consulta de un GSI con. AWS SDK for Java 2.x

```
   public static void main(String[] args) {
       final String usage =
           """
               Usage:
                   <tableName> <basePartitionKeyName> <basePartitionKeyValue>
<gsiName> <gsiPartitionKeyName> <gsiPartitionKeyValue> [region]
               Where:
                   tableName - The Amazon DynamoDB table to query.
                   basePartitionKeyName - The name of the base table partition key
attribute.
                   basePartitionKeyValue - The value of the base table partition
key to query.
                   gsiName - The name of the Global Secondary Index.
                   gsiPartitionKeyName - The name of the GSI partition key
attribute.
                   gsiPartitionKeyValue - The value of the GSI partition key to
query.
                   region (optional) - The AWS region where the table exists.
(Default: us-east-1)
               """;

       if (args.length < 6) {
           System.out.println(usage);
           System.exit(1);
       }

       final String tableName = args[0];
       final String basePartitionKeyName = args[1];
       final String basePartitionKeyValue = args[2];
       final String gsiName = args[3];
       final String gsiPartitionKeyName = args[4];
       final String gsiPartitionKeyValue = args[5];
       final Region region = args.length > 6 ? Region.of(args[6]) :
Region.US_EAST_1;

       try (DynamoDbClient ddb = DynamoDbClient.builder().region(region).build()) {
           final QueryTableAndGSI queryHelper = new QueryTableAndGSI(ddb);

           // Query the base table
           System.out.println("Querying base table where " + basePartitionKeyName +
" = " + basePartitionKeyValue);
           final QueryResponse tableResponse =
```

```
                queryHelper.queryTable(tableName, basePartitionKeyName,
basePartitionKeyValue);

            System.out.println("Found " + tableResponse.count() + " items in base
table:");
            tableResponse.items().forEach(item -> System.out.println(item));

            // Query the GSI
            System.out.println(
                "\nQuerying GSI '" + gsiName + "' where " + gsiPartitionKeyName + "
= " + gsiPartitionKeyValue);
            final QueryResponse gsiResponse =
                queryHelper.queryGlobalSecondaryIndex(tableName, gsiName,
gsiPartitionKeyName, gsiPartitionKeyValue);

            System.out.println("Found " + gsiResponse.count() + " items in GSI:");
            gsiResponse.items().forEach(item -> System.out.println(item));

            // Explain the differences between querying a table and a GSI
            System.out.println("\nKey differences between querying a table and a
GSI:");
            System.out.println("1. When querying a GSI, you must specify the
indexName parameter");
            System.out.println("2. GSIs may not contain all attributes from the base
table (projection)");
            System.out.println("3. GSIs consume read capacity units from the GSI's
capacity, not the base table's");
            System.out.println("4. GSIs may have eventually consistent data (cannot
use ConsistentRead=true)");

        } catch (IllegalArgumentException e) {
            System.err.println("Invalid input: " + e.getMessage());
            System.exit(1);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table or index not found: " + e.getMessage());
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println("DynamoDB error: " + e.getMessage());
            System.exit(1);
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
            System.exit(1);
        }
    }
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

Consulta de una tabla mediante una condición begins_with

El siguiente ejemplo de código muestra cómo consultar una tabla mediante una condición begins_with.

- Utilice la función begins_with en una expresión de condición de clave.
- Filtre los elementos según un patrón de prefijos en la clave de clasificación.

SDK para Java 2.x

Consulte una tabla de DynamoDB mediante una condición begins_with en la clave de clasificación con AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithBeginsWithCondition(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String sortKeyName,
        final String sortKeyPrefix) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Sort key name", sortKeyName);
        CodeSampleUtils.validateStringParameter("Sort key prefix", sortKeyPrefix);
```

```
        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_SK, sortKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_SK_PREFIX,
            AttributeValue.builder().s(sortKeyPrefix).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query with begins_with condition successful.
Found {0} items", response.count());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying with begins_with condition",
e);
            throw e;
        }
    }
```

Demuestre el uso de begins_with con prefijos de diferente longitud con AWS SDK for Java 2.x.

```
   public static void main(String[] args) {
       try {
           CodeSampleUtils.BeginsWithQueryConfig config =
CodeSampleUtils.BeginsWithQueryConfig.fromArgs(args);
           LOGGER.log(Level.INFO, "Querying items where {0} = {1} and {2} begins
with ''{3}''", new Object[] {
               config.getPartitionKeyName(),
               config.getPartitionKeyValue(),
               config.getSortKeyName(),
               config.getSortKeyPrefix()
           });

           // Using the builder pattern to create and execute the query
           final QueryResponse response = new BeginsWithQueryBuilder()
               .withTableName(config.getTableName())
               .withPartitionKeyName(config.getPartitionKeyName())
               .withPartitionKeyValue(config.getPartitionKeyValue())
               .withSortKeyName(config.getSortKeyName())
               .withSortKeyPrefix(config.getSortKeyPrefix())
               .withRegion(config.getRegion())
               .execute();

           // Process the results
           LOGGER.log(Level.INFO, "Found {0} items:", response.count());
           response.items().forEach(item -> LOGGER.info(item.toString()));

           // Demonstrate with a different prefix
           if (!config.getSortKeyPrefix().isEmpty()) {
               String shorterPrefix = config.getSortKeyPrefix()
                   .substring(0, Math.max(1, config.getSortKeyPrefix().length() /
2));
               LOGGER.log(Level.INFO, "\nNow querying with a shorter prefix:
''{0}''", shorterPrefix);

               final QueryResponse response2 = new BeginsWithQueryBuilder()
                   .withTableName(config.getTableName())
                   .withPartitionKeyName(config.getPartitionKeyName())
                   .withPartitionKeyValue(config.getPartitionKeyValue())
                   .withSortKeyName(config.getSortKeyName())
                   .withSortKeyPrefix(shorterPrefix)
                   .withRegion(config.getRegion())
                   .execute();
```

```
                LOGGER.log(Level.INFO, "Found {0} items with shorter prefix:",
response2.count());
                response2.items().forEach(item -> LOGGER.info(item.toString()));
            }
        } catch (IllegalArgumentException e) {
            LOGGER.log(Level.SEVERE, "Invalid input: {0}", e.getMessage());
            printUsage();
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found", e);
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "DynamoDB error", e);
        } catch (Exception e) {
            LOGGER.log(Level.SEVERE, "Unexpected error", e);
        }
    }
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

Consulta de una tabla mediante un intervalo de fechas

El siguiente ejemplo de código muestra cómo consultar una tabla con un intervalo de fechas en la clave de clasificación.

- Consulte los elementos dentro de un intervalo de fechas específico.
- Utilice operadores de comparación en las claves de clasificación con formato de fecha.

SDK para Java 2.x

Consulte en una tabla de DynamoDB los elementos dentro de un intervalo de fechas con. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
```

```
import java.time.LocalDate;
import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithDateRange(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String dateKeyName,
        final LocalDate startDate,
        final LocalDate endDate) {

        // Focus on query logic, assuming parameters are valid
        if (startDate == null || endDate == null) {
            throw new IllegalArgumentException("Start date and end date cannot be
 null");
        }

        if (endDate.isBefore(startDate)) {
            throw new IllegalArgumentException("End date must be after start date");
        }

        // Format dates as ISO strings for DynamoDB (using just the date part)
        final String formattedStartDate = startDate.toString();
        final String formattedEndDate = endDate.toString();

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_SK, dateKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_START_DATE,
            AttributeValue.builder().s(formattedStartDate).build());
        expressionAttributeValues.put(
```

```
            EXPRESSION_ATTRIBUTE_VALUE_END_DATE,
            AttributeValue.builder().s(formattedEndDate).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query by date range successful. Found {0}
items", response.count());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying by date range: {0}",
e.getMessage());
            throw e;
        }
    }
```

Muestra cómo consultar una tabla de DynamoDB con filtrado por intervalo de fechas.

```
    public static void main(String[] args) {
        final String usage =
            """
                Usage:
                    <tableName> <partitionKeyName> <partitionKeyValue> <dateKeyName>
<startDate> <endDate> [region]
                Where:
                    tableName - The Amazon DynamoDB table to query.
                    partitionKeyName - The name of the partition key attribute.
                    partitionKeyValue - The value of the partition key to query.
                    dateKeyName - The name of the date attribute to filter on.
                    startDate - The start date for the range query (YYYY-MM-DD).
                    endDate - The end date for the range query (YYYY-MM-DD).
```

```
                    region (optional) - The AWS region where the table exists.
(Default: us-east-1)
                """;

        if (args.length < 6) {
            System.out.println(usage);
            System.exit(1);
        }

        try {
            // Parse command line arguments into a config object
            CodeSampleUtils.DateRangeQueryConfig config =
CodeSampleUtils.DateRangeQueryConfig.fromArgs(args);

            LOGGER.log(
                Level.INFO, "Querying items from {0} to {1}", new Object[]
{config.getStartDate(), config.getEndDate()
                });

            // Using the builder pattern to create and execute the query
            final QueryResponse response = new DateRangeQueryBuilder()
                .withTableName(config.getTableName())
                .withPartitionKeyName(config.getPartitionKeyName())
                .withPartitionKeyValue(config.getPartitionKeyValue())
                .withDateKeyName(config.getDateKeyName())
                .withStartDate(config.getStartDate())
                .withEndDate(config.getEndDate())
                .withRegion(config.getRegion())
                .execute();

            // Process the results
            LOGGER.log(Level.INFO, "Found {0} items:", response.count());
            response.items().forEach(item -> {
                LOGGER.info(item.toString());

                // Extract and display the date attribute for clarity
                if (item.containsKey(config.getDateKeyName())) {
                    LOGGER.log(
                        Level.INFO,
                        "  Date attribute: {0}",
                        item.get(config.getDateKeyName()).s());
                }
            });
```

```
            // Demonstrate with a different date range
            LocalDate narrowerStartDate = config.getStartDate().plusDays(1);
            LocalDate narrowerEndDate = config.getEndDate().minusDays(1);

            if (!narrowerStartDate.isAfter(narrowerEndDate)) {
                LOGGER.log(Level.INFO, "\nNow querying with a narrower date range:
{0} to {1}", new Object[] {
                    narrowerStartDate, narrowerEndDate
                });

                final QueryResponse response2 = new DateRangeQueryBuilder()
                    .withTableName(config.getTableName())
                    .withPartitionKeyName(config.getPartitionKeyName())
                    .withPartitionKeyValue(config.getPartitionKeyValue())
                    .withDateKeyName(config.getDateKeyName())
                    .withStartDate(narrowerStartDate)
                    .withEndDate(narrowerEndDate)
                    .withRegion(config.getRegion())
                    .execute();

                LOGGER.log(Level.INFO, "Found {0} items with narrower date range:",
response2.count());
                response2.items().forEach(item -> LOGGER.info(item.toString()));
            }

            LOGGER.info("\nNote: When storing dates in DynamoDB:");
            LOGGER.info("1. Use ISO format (YYYY-MM-DD) for lexicographical
ordering");
            LOGGER.info("2. Use the BETWEEN operator for inclusive date range
queries");
            LOGGER.info("3. Consider using ISO-8601 format for timestamps with time
components");

        } catch (IllegalArgumentException e) {
            LOGGER.log(Level.SEVERE, "Invalid input: {0}", e.getMessage());
            System.exit(1);
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", e.getMessage());
            System.exit(1);
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "DynamoDB error: {0}", e.getMessage());
            System.exit(1);
        } catch (Exception e) {
            LOGGER.log(Level.SEVERE, "Unexpected error: {0}", e.getMessage());
```

```
            System.exit(1);
        }
    }
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

Consulta de una tabla con una expresión de filtro compleja

El siguiente ejemplo de código muestra cómo consultar una tabla con una expresión de filtro compleja.

- Aplique expresiones de filtro complejas a los resultados de la consulta.
- Combine condiciones múltiples mediante el uso de operadores lógicos.
- Filtre los elementos en función de atributos sin clave.

SDK para Java 2.x

Consulte una tabla de DynamoDB con una expresión de filtro compleja mediante. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithComplexFilter(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String statusAttrName,
        final String activeStatus,
```

```
        final String pendingStatus,
        final String priceAttrName,
        final double minPrice,
        final double maxPrice,
        final String categoryAttrName) {

        // Validate parameters
        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Status attribute name",
statusAttrName);
        CodeSampleUtils.validateStringParameter("Active status", activeStatus);
        CodeSampleUtils.validateStringParameter("Pending status", pendingStatus);
        CodeSampleUtils.validateStringParameter("Price attribute name",
priceAttrName);
        CodeSampleUtils.validateStringParameter("Category attribute name",
categoryAttrName);
        CodeSampleUtils.validateNumericRange("Minimum price", minPrice, 0.0,
Double.MAX_VALUE);
        CodeSampleUtils.validateNumericRange("Maximum price", maxPrice, minPrice,
Double.MAX_VALUE);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put("#pk", partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_STATUS,
statusAttrName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PRICE,
priceAttrName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_CATEGORY,
categoryAttrName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            ":pkValue", AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_ACTIVE,
            AttributeValue.builder().s(activeStatus).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PENDING,
            AttributeValue.builder().s(pendingStatus).build());
        expressionAttributeValues.put(
```

```
            EXPRESSION_ATTRIBUTE_VALUE_MIN_PRICE,
            AttributeValue.builder().n(String.valueOf(minPrice)).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_MAX_PRICE,
            AttributeValue.builder().n(String.valueOf(maxPrice)).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .filterExpression(FILTER_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        return dynamoDbClient.query(queryRequest);
    }
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

Consulta de una tabla con una expresión de filtro dinámica

El siguiente ejemplo de código muestra cómo consultar una tabla con una expresión de filtro dinámica.

- Cree expresiones de filtro de forma dinámica en tiempo de ejecución.
- Cree condiciones de filtro en función de las entradas del usuario o del estado de la aplicación.
- Agregue o elimine criterios de filtro de forma condicional.

SDK para Java 2.x

Consulte una tabla de DynamoDB con una expresión de filtro construida dinámicamente mediante. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
```

```
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;

    public static QueryResponse queryWithDynamicFilter(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final Map<String, Object> filterCriteria,
        final Region region,
        final DynamoDbClient dynamoDbClient) {

        validateParameters(tableName, partitionKeyName, partitionKeyValue,
 filterCriteria);

        DynamoDbClient ddbClient = dynamoDbClient;
        boolean shouldClose = false;

        try {
            if (ddbClient == null) {
                ddbClient = createClient(region);
                shouldClose = true;
            }

            final QueryWithDynamicFilter queryHelper = new
 QueryWithDynamicFilter(ddbClient);
            return queryHelper.queryWithDynamicFilter(tableName, partitionKeyName,
 partitionKeyValue, filterCriteria);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table not found: " + tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Failed to execute dynamic filter query: " +
 e.getMessage());
            throw e;
        } catch (Exception e) {
            System.err.println("Unexpected error during query: " + e.getMessage());
            throw e;
        } finally {
            if (shouldClose && ddbClient != null) {
                ddbClient.close();
            }
```

```
        }
    }
```

Demuestra cómo utilizar expresiones de filtro dinámico con. AWS SDK for Java 2.x

```
    public static void main(String[] args) {
        final String usage =
            """
                Usage:
                    <tableName> <partitionKeyName> <partitionKeyValue>
<filterAttrName> <filterAttrValue> [region]
                Where:
                    tableName - The Amazon DynamoDB table to query.
                    partitionKeyName - The name of the partition key attribute.
                    partitionKeyValue - The value of the partition key to query.
                    filterAttrName - The name of the attribute to filter on.
                    filterAttrValue - The value to filter by.
                    region (optional) - The AWS region where the table exists.
(Default: us-east-1)
                """;

        if (args.length < 5) {
            System.out.println(usage);
            System.exit(1);
        }

        final String tableName = args[0];
        final String partitionKeyName = args[1];
        final String partitionKeyValue = args[2];
        final String filterAttrName = args[3];
        final String filterAttrValue = args[4];
        final Region region = args.length > 5 ? Region.of(args[5]) :
Region.US_EAST_1;

        System.out.println("Querying items with dynamic filter: " + filterAttrName +
" = " + filterAttrValue);

        try {
            // Using the builder pattern to create and execute the query
            final QueryResponse response = new DynamicFilterQueryBuilder()
                .withTableName(tableName)
                .withPartitionKeyName(partitionKeyName)
```

```
                .withPartitionKeyValue(partitionKeyValue)
                .withFilterCriterion(filterAttrName, filterAttrValue)
                .withRegion(region)
                .execute();

            // Process the results
            System.out.println("Found " + response.count() + " items:");
            response.items().forEach(item -> System.out.println(item));

            // Demonstrate multiple filter criteria
            System.out.println("\nNow querying with multiple filter criteria:");

            Map<String, Object> multipleFilters = new HashMap<>();
            multipleFilters.put(filterAttrName, filterAttrValue);
            multipleFilters.put("status", "active");

            final QueryResponse multiFilterResponse = new
DynamicFilterQueryBuilder()
                .withTableName(tableName)
                .withPartitionKeyName(partitionKeyName)
                .withPartitionKeyValue(partitionKeyValue)
                .withFilterCriteria(multipleFilters)
                .withRegion(region)
                .execute();

            System.out.println("Found " + multiFilterResponse.count() + " items with
multiple filters:");
            multiFilterResponse.items().forEach(item -> System.out.println(item));

        } catch (IllegalArgumentException e) {
            System.err.println("Invalid input: " + e.getMessage());
            System.exit(1);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table not found: " + tableName);
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println("DynamoDB error: " + e.getMessage());
            System.exit(1);
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
            System.exit(1);
        }
    }
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

Consulta de una tabla con una expresión de filtro y limite

El siguiente ejemplo de código muestra cómo consultar una tabla con una expresión de filtro y límite.

- Aplique expresiones de filtro a los resultados de las consultas con un límite de elementos evaluados.
- Comprenda cómo afecta el límite a los resultados de las consultas filtradas.
- Control de la cantidad máxima de elementos que se procesan en una consulta.

SDK para Java 2.x

Consulte una tabla de DynamoDB con una expresión de filtro y limite su uso. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithFilterAndLimit(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String filterAttrName,
        final String filterAttrValue,
        final int limit) {
```

```
        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Filter attribute name",
filterAttrName);
        CodeSampleUtils.validateStringParameter("Filter attribute value",
filterAttrValue);
        CodeSampleUtils.validatePositiveInteger("Limit", limit);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_FILTER,
filterAttrName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_FILTER,
            AttributeValue.builder().s(filterAttrValue).build());

        // Create the filter expression
        final String filterExpression = "#filterAttr = :filterValue";

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .filterExpression(filterExpression)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .limit(limit)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query with filter and limit successful. Found
{0} items", response.count());
            LOGGER.log(
```

```
                Level.INFO, "ScannedCount: {0} (total items evaluated before
filtering)", response.scannedCount());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying with filter and limit: {0}",
e.getMessage());
            throw e;
        }
    }
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

Consulta de una tabla con atributos anidados

El siguiente ejemplo de código muestra cómo consultar una tabla con atributos anidados.

- Acceda y filtre por atributos anidados en los elementos de DynamoDB.
- Utilice expresiones de ruta de documentos para hacer referencia a elementos anidados.

SDK para Java 2.x

Consulte una tabla de DynamoDB con atributos anidados utilizando. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;

    public QueryResponse queryWithNestedAttributes(
        final String tableName,
        final String partitionKeyName,
```

```
        final String partitionKeyValue,
        final String nestedPath,
        final String nestedAttr,
        final String nestedValue) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Nested path", nestedPath);
        CodeSampleUtils.validateStringParameter("Nested attribute", nestedAttr);
        CodeSampleUtils.validateStringParameter("Nested value", nestedValue);

        // Split the nested path into components
        final String[] pathComponents = nestedPath.split("\\.");

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);

        // Build the nested attribute reference using document path notation
        final StringBuilder nestedAttributeRef = new StringBuilder();
        for (int i = 0; i < pathComponents.length; i++) {
            final String aliasName = "#n" + i;
            expressionAttributeNames.put(aliasName, pathComponents[i]);

            if (i > 0) {
                nestedAttributeRef.append(".");
            }
            nestedAttributeRef.append(aliasName);
        }

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_NESTED,
            AttributeValue.builder().s(nestedValue).build());

        // Create the filter expression using the nested attribute reference
        final String filterExpression = nestedAttributeRef + " = :nestedValue";
```

```
        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .filterExpression(filterExpression)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            System.out.println("Query with nested attribute filter successful. Found
" + response.count() + " items");
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
found.\n", tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Error querying with nested attribute filter: " +
e.getMessage());
            throw e;
        }
    }
```

Muestra cómo consultar una tabla de DynamoDB con atributos anidados.

```
    public static void main(String[] args) {
        final String usage =
            """
                Usage:
                    <tableName> <partitionKeyName> <partitionKeyValue> <nestedPath>
<nestedAttr> <nestedValue> [region]
                Where:
                    tableName - The Amazon DynamoDB table to query.
                    partitionKeyName - The name of the partition key attribute.
                    partitionKeyValue - The value of the partition key to query.
                    nestedPath - The path to the nested map attribute (e.g.,
"address").
                    nestedAttr - The name of the nested attribute (e.g., "city").
                    nestedValue - The value to filter by (e.g., "Seattle").
```

```
                    region (optional) - The AWS region where the table exists.
(Default: us-east-1)
                """;

        if (args.length < 6) {
            System.out.println(usage);
            System.exit(1);
        }

        final String tableName = args[0];
        final String partitionKeyName = args[1];
        final String partitionKeyValue = args[2];
        final String nestedPath = args[3];
        final String nestedAttr = args[4];
        final String nestedValue = args[5];
        final Region region = args.length > 6 ? Region.of(args[6]) :
Region.US_EAST_1;

        System.out.println("Querying items where " + partitionKeyName + " = " +
partitionKeyValue + " and " + nestedPath
            + "." + nestedAttr + " = " + nestedValue);

        try {
            // Using the builder pattern to create and execute the query
            final QueryResponse response = new NestedAttributeQueryBuilder()
                .withTableName(tableName)
                .withPartitionKeyName(partitionKeyName)
                .withPartitionKeyValue(partitionKeyValue)
                .withNestedPath(nestedPath)
                .withNestedAttribute(nestedAttr)
                .withNestedValue(nestedValue)
                .withRegion(region)
                .execute();

            // Process the results
            System.out.println("Found " + response.count() + " items:");
            response.items().forEach(item -> {
                System.out.println(item);

                // Extract and display the nested attribute for clarity
                if (item.containsKey(nestedPath) && item.get(nestedPath).hasM()) {
                    Map<String, AttributeValue> nestedMap =
item.get(nestedPath).m();
                    if (nestedMap.containsKey(nestedAttr)) {
```

```
                        System.out.println("  Nested attribute " + nestedPath + "."
+ nestedAttr + ": "
                                + formatAttributeValue(nestedMap.get(nestedAttr)));
                    }
                }
            });

            System.out.println("\nNote: When working with nested attributes in
DynamoDB:");
            System.out.println("1. Use dot notation in filter expressions to access
nested attributes");
            System.out.println("2. Use expression attribute names for each component
of the path");
            System.out.println("3. Check if the nested attribute exists before
accessing it");

        } catch (IllegalArgumentException e) {
            System.err.println("Invalid input: " + e.getMessage());
            System.exit(1);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table not found: " + tableName);
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println("DynamoDB error: " + e.getMessage());
            System.exit(1);
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
            System.exit(1);
        }
    }
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

Consulta de una tabla con paginación

El siguiente ejemplo de código muestra cómo consultar una tabla con paginación.

- Implemente la paginación para los resultados de las consultas de DynamoDB.
- Utilice el para recuperar LastEvaluatedKey las páginas siguientes.
- Controle el número de elementos por página con el parámetro Limit.

SDK para Java 2.x

Consulte una tabla de DynamoDB con paginación utilizando. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

    public List<Map<String, AttributeValue>> queryWithPagination(
        final String tableName, final String partitionKeyName, final String
 partitionKeyValue, final int pageSize) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validatePositiveInteger("Page size", pageSize);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        QueryRequest.Builder queryRequestBuilder = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .limit(pageSize);
```

```
        // List to store all items from all pages
        final List<Map<String, AttributeValue>> allItems = new ArrayList<>();

        // Map to store the last evaluated key for pagination
        Map<String, AttributeValue> lastEvaluatedKey = null;
        int pageNumber = 1;

        try {
            do {
                // If we have a last evaluated key, use it for the next page
                if (lastEvaluatedKey != null) {
                    queryRequestBuilder.exclusiveStartKey(lastEvaluatedKey);
                }

                // Execute the query
                final QueryResponse response =
dynamoDbClient.query(queryRequestBuilder.build());

                // Process the current page of results
                final List<Map<String, AttributeValue>> pageItems =
response.items();
                allItems.addAll(pageItems);

                // Get the last evaluated key for the next page
                lastEvaluatedKey = response.lastEvaluatedKey();
                if (lastEvaluatedKey != null && lastEvaluatedKey.isEmpty()) {
                    lastEvaluatedKey = null;
                }

                System.out.println("Page " + pageNumber + ": Retrieved " +
pageItems.size() + " items (Running total: "
                    + allItems.size() + ")");

                pageNumber++;

            } while (lastEvaluatedKey != null);

            System.out.println("Query with pagination complete. Retrieved a total of
" + allItems.size()
                + " items across " + (pageNumber - 1) + " pages");

            return allItems;
        } catch (ResourceNotFoundException e) {
```

```
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
found.\n", tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Error querying with pagination: " + e.getMessage());
            throw e;
        }
    }
```

Muestra cómo consultar una tabla de DynamoDB con paginación.

```
    public static void main(String[] args) {
        final String usage =
            """
                Usage:
                    <tableName> <partitionKeyName> <partitionKeyValue> [pageSize]
[region]
                Where:
                    tableName - The Amazon DynamoDB table to query.
                    partitionKeyName - The name of the partition key attribute.
                    partitionKeyValue - The value of the partition key to query.
                    pageSize (optional) - The maximum number of items to return per
page. (Default: 10)
                    region (optional) - The AWS region where the table exists.
(Default: us-east-1)
                """;

        if (args.length < 3) {
            System.out.println(usage);
            System.exit(1);
        }

        final String tableName = args[0];
        final String partitionKeyName = args[1];
        final String partitionKeyValue = args[2];
        final int pageSize = args.length > 3 ? Integer.parseInt(args[3]) : 10;
        final Region region = args.length > 4 ? Region.of(args[4]) :
Region.US_EAST_1;

        System.out.println("Querying items with pagination (page size: " + pageSize
+ ")");
```

```
        try {
            // Using the builder pattern to create and execute the query
            final List<Map<String, AttributeValue>> allItems = new
PaginationQueryBuilder()
                .withTableName(tableName)
                .withPartitionKeyName(partitionKeyName)
                .withPartitionKeyValue(partitionKeyValue)
                .withPageSize(pageSize)
                .withRegion(region)
                .executeWithPagination();

            // Process the results
            System.out.println("\nSummary: Retrieved a total of " + allItems.size()
+ " items");

            // Display the first few items as a sample
            final int sampleSize = Math.min(5, allItems.size());
            if (sampleSize > 0) {
                System.out.println("\nSample of retrieved items (first " +
sampleSize + "):");
                for (int i = 0; i < sampleSize; i++) {
                    System.out.println(allItems.get(i));
                }

                if (allItems.size() > sampleSize) {
                    System.out.println("... and " + (allItems.size() - sampleSize) +
" more items");
                }
            }
        } catch (IllegalArgumentException e) {
            System.err.println("Invalid input: " + e.getMessage());
            System.exit(1);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table not found: " + tableName);
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println("DynamoDB error: " + e.getMessage());
            System.exit(1);
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
            System.exit(1);
        }
    }
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

Consulta de una tabla con lecturas altamente coherentes

El siguiente ejemplo de código muestra cómo consultar una tabla con lecturas altamente coherentes.

- Configure el nivel de coherencia de las consultas de DynamoDB.
- Utilice lecturas muy coherentes para obtener la mayor cantidad de datos. up-to-date
- Comprenda las ventajas y desventajas entre la coherencia eventual y la coherencia sólida.

SDK para Java 2.x

Consulte una tabla de DynamoDB con consistencia de lectura configurable mediante. AWS SDK for Java 2.x

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithConsistentReads(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final boolean useConsistentRead) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);

        // Create expression attribute names for the column names
```

```
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .consistentRead(useConsistentRead)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query successful. Found {0} items",
response.count());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying with consistent reads", e);
            throw e;
        }
    }
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

Consulta de elementos de TTL

El siguiente ejemplo de código muestra cómo consultar elementos de TTL.

SDK para Java 2.x

Consulte una expresión filtrada para recopilar los elementos TTL de una tabla de DynamoDB mediante. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.Map;
import java.util.Optional;

        final QueryRequest request = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .filterExpression(FILTER_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try (DynamoDbClient ddb = dynamoDbClient != null
            ? dynamoDbClient
            : DynamoDbClient.builder().region(region).build()) {
            final QueryResponse response = ddb.query(request);
            System.out.println("Query successful. Found " + response.count() + "
 items that have not expired yet.");

            // Print each item
            response.items().forEach(item -> {
                System.out.println("Item: " + item);
            });

            return 0;
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

Consulta de tablas mediante patrones de fecha y hora

El siguiente ejemplo de código muestra cómo consultar tablas con patrones de fecha y hora.

- Almacene y consulte date/time valores en DynamoDB.
- Implemente consultas de intervalos de fechas mediante claves de clasificación.
- Formatee las cadenas de fecha para que las consultas sean eficaces.

SDK para Java 2.x

Realice consultas mediante intervalos de fechas en las claves de clasificación con. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.time.LocalDate;
import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithDateRange(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String dateKeyName,
        final LocalDate startDate,
        final LocalDate endDate) {

        // Focus on query logic, assuming parameters are valid
```

```
        if (startDate == null || endDate == null) {
            throw new IllegalArgumentException("Start date and end date cannot be
null");
        }

        if (endDate.isBefore(startDate)) {
            throw new IllegalArgumentException("End date must be after start date");
        }

        // Format dates as ISO strings for DynamoDB (using just the date part)
        final String formattedStartDate = startDate.toString();
        final String formattedEndDate = endDate.toString();

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_SK, dateKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_START_DATE,
            AttributeValue.builder().s(formattedStartDate).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_END_DATE,
            AttributeValue.builder().s(formattedEndDate).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query by date range successful. Found {0}
items", response.count());
```

```
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying by date range: {0}",
 e.getMessage());
            throw e;
        }
    }
```

Realice consultas mediante variables de fecha y hora con. AWS SDK for Java 2.x

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.time.Instant;
import java.time.LocalDateTime;
import java.time.ZoneOffset;
import java.util.HashMap;
import java.util.Map;

    public QueryResponse queryWithDateTime(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String dateKeyName,
        final String startDate,
        final String endDate) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validateDateRangeParameters(dateKeyName, startDate,
 endDate);
        CodeSampleUtils.validateDateFormat("Start date", startDate);
        CodeSampleUtils.validateDateFormat("End date", endDate);

        // Create expression attribute names for the column names
```

```
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);
        expressionAttributeNames.put("#dateKey", dateKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            ":startDate", AttributeValue.builder().s(startDate).build());
        expressionAttributeValues.put(
            ":endDate", AttributeValue.builder().s(endDate).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            System.out.println("Query successful. Found " + response.count() + "
items");
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
found.\n", tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Error querying with date range: " + e.getMessage());
            throw e;
        }
    }
```

Consulte dentro de intervalos de fechas en marcas temporales en formato de hora Unix con AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.time.Instant;
import java.time.LocalDateTime;
import java.time.ZoneOffset;
import java.util.HashMap;
import java.util.Map;

    public QueryResponse queryWithDateTimeEpoch(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String dateKeyName,
        final long startEpoch,
        final long endEpoch) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Date key name", dateKeyName);
        CodeSampleUtils.validateEpochTimestamp("Start epoch", startEpoch);
        CodeSampleUtils.validateEpochTimestamp("End epoch", endEpoch);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);
        expressionAttributeNames.put("#dateKey", dateKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            ":startDate",
 AttributeValue.builder().n(String.valueOf(startEpoch)).build());
        expressionAttributeValues.put(
```

```
            ":endDate",
AttributeValue.builder().n(String.valueOf(endEpoch)).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            System.out.println("Query successful. Found " + response.count() + "
items");
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
found.\n", tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Error querying with epoch timestamps: " +
e.getMessage());
            throw e;
        }
    }
```

Realice consultas dentro de rangos de fechas utilizando LocalDateTime objetos con. AWS SDK for Java 2.x

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.time.Instant;
import java.time.LocalDateTime;
import java.time.ZoneOffset;
import java.util.HashMap;
import java.util.Map;
```

```
   public QueryResponse queryWithDateTimeLocalDateTime(
       final String tableName,
       final String partitionKeyName,
       final String partitionKeyValue,
       final String dateKeyName,
       final LocalDateTime startDateTime,
       final LocalDateTime endDateTime) {

       CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
       CodeSampleUtils.validateStringParameter("Date key name", dateKeyName);
       if (startDateTime == null || endDateTime == null) {
           throw new IllegalArgumentException("Start and end LocalDateTime must not
be null");
       }

       // Convert LocalDateTime to ISO-8601 strings in UTC with the correct format
       final String startDate =
startDateTime.atZone(ZoneOffset.UTC).format(DATE_TIME_FORMATTER);
       final String endDate =
endDateTime.atZone(ZoneOffset.UTC).format(DATE_TIME_FORMATTER);

       return queryWithDateTime(tableName, partitionKeyName, partitionKeyValue,
dateKeyName, startDate, endDate);
   }
```

- Para obtener información sobre la API, consulte Query en la referencia de la API de AWS SDK for Java 2.x .

Descripción del orden de las expresiones de actualización

El siguiente ejemplo de código muestra cómo comprender el orden de las expresiones de actualización.

- Obtenga información sobre cómo DynamoDB procesa las expresiones de actualización.
- Conozca el orden de las operaciones en las expresiones de actualización.
- Conozca la evaluación de expresiones para evitar resultados inesperados.

SDK para Java 2.x

Demuestre cómo actualizar el orden de las expresiones utilizando AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.GetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.ReturnValue;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.Map;

    /**
     * Demonstrates the effect of update expression order.
     *
     * <p>This method shows how the order of operations in an update expression
     * affects the result of the update.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @return Map containing the results of different update orders
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static Map<String, Object> demonstrateUpdateOrder(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
 key) {

        Map<String, Object> results = new HashMap<>();

        try {
            // Initialize the item with a counter
            UpdateItemRequest initRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET Counter = :zero, OldCounter = :zero")
                .expressionAttributeValues(
                    Map.of(":zero", AttributeValue.builder().n("0").build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();
```

```
            dynamoDbClient.updateItem(initRequest);

            // Example 1: SET first, then ADD
            UpdateItemRequest setFirstRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET Counter = :value ADD OldCounter :increment")
                .expressionAttributeValues(Map.of(
                    ":value", AttributeValue.builder().n("10").build(),
                    ":increment", AttributeValue.builder().n("5").build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            UpdateItemResponse setFirstResponse =
dynamoDbClient.updateItem(setFirstRequest);
            results.put("setFirstResponse", setFirstResponse);

            // Reset the item
            dynamoDbClient.updateItem(initRequest);

            // Example 2: ADD first, then SET
            UpdateItemRequest addFirstRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("ADD Counter :increment SET OldCounter = :value")
                .expressionAttributeValues(Map.of(
                    ":value", AttributeValue.builder().n("10").build(),
                    ":increment", AttributeValue.builder().n("5").build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            UpdateItemResponse addFirstResponse =
dynamoDbClient.updateItem(addFirstRequest);
            results.put("addFirstResponse", addFirstResponse);

            // Reset the item
            dynamoDbClient.updateItem(initRequest);

            // Example 3: SET with multiple attributes
            UpdateItemRequest multiSetRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET Counter = :value, OldCounter = Counter")
```

```
                .expressionAttributeValues(
                    Map.of(":value", AttributeValue.builder().n("10").build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            UpdateItemResponse multiSetResponse =
dynamoDbClient.updateItem(multiSetRequest);
            results.put("multiSetResponse", multiSetResponse);

            // Reset the item
            dynamoDbClient.updateItem(initRequest);

            // Example 4: SET with expression using the same attribute
            UpdateItemRequest selfReferenceRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET Counter = Counter + :increment, OldCounter =
Counter")
                .expressionAttributeValues(
                    Map.of(":increment", AttributeValue.builder().n("5").build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            UpdateItemResponse selfReferenceResponse =
dynamoDbClient.updateItem(selfReferenceRequest);
            results.put("selfReferenceResponse", selfReferenceResponse);

            results.put("success", true);

        } catch (DynamoDbException e) {
            results.put("success", false);
            results.put("error", e.getMessage());
        }

        return results;
    }

    /**
     * Updates an item with SET first, then REMOVE.
     *
     * <p>This method demonstrates updating an item with SET operation first,
     * followed by a REMOVE operation.
     *
     * @param dynamoDbClient The DynamoDB client
```

```
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param attributeToSet The attribute to set
     * @param setValue The value to set
     * @param attributeToRemove The attribute to remove
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateWithSetFirst(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String attributeToSet,
        AttributeValue setValue,
        String attributeToRemove) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #setAttr = :setValue REMOVE #removeAttr")
            .expressionAttributeNames(Map.of(
                "#setAttr", attributeToSet,
                "#removeAttr", attributeToRemove))
            .expressionAttributeValues(Map.of(":setValue", setValue))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        try {
            return dynamoDbClient.updateItem(request);
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to update item with SET first: " + e.getMessage())
                .cause(e)
                .build();
        }
    }

    /**
     * Updates an item with REMOVE first, then SET.
     *
     * <p>This method demonstrates updating an item with REMOVE operation first,
     * followed by a SET operation.
```

```
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param attributeToSet The attribute to set
     * @param setValue The value to set
     * @param attributeToRemove The attribute to remove
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateWithRemoveFirst(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String attributeToSet,
        AttributeValue setValue,
        String attributeToRemove) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("REMOVE #removeAttr SET #setAttr = :setValue")
            .expressionAttributeNames(Map.of(
                "#setAttr", attributeToSet,
                "#removeAttr", attributeToRemove))
            .expressionAttributeValues(Map.of(":setValue", setValue))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        try {
            return dynamoDbClient.updateItem(request);
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to update item with REMOVE first: " +
e.getMessage())
                .cause(e)
                .build();
        }
    }

    /**
     * Updates an item with all operation types in a specific order.
```

```
    *
    * <p>This method demonstrates using all operation types (SET, REMOVE, ADD,
DELETE)
    * in a specific order in a single update expression.
    *
    * @param dynamoDbClient The DynamoDB client
    * @param tableName The name of the DynamoDB table
    * @param key The key of the item to update
    * @return The response from DynamoDB
    * @throws DynamoDbException if an error occurs during the operation
    */
   public static UpdateItemResponse updateWithAllOperationTypes(
       DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key) {

       // Define the update parameters
       UpdateItemRequest request = UpdateItemRequest.builder()
           .tableName(tableName)
           .key(key)
           .updateExpression("SET #stringAttr = :stringVal, #mapAttr.#nestedAttr
= :nestedVal " + "REMOVE #oldAttr "
               + "ADD #counterAttr :increment "
               + "DELETE #stringSetAttr :stringSetVal")
           .expressionAttributeNames(Map.of(
               "#stringAttr", "StringAttribute",
               "#mapAttr", "MapAttribute",
               "#nestedAttr", "NestedAttribute",
               "#oldAttr", "OldAttribute",
               "#counterAttr", "CounterAttribute",
               "#stringSetAttr", "StringSetAttribute"))
           .expressionAttributeValues(Map.of(
               ":stringVal", AttributeValue.builder().s("New Value").build(),
               ":nestedVal", AttributeValue.builder().s("Nested Value").build(),
               ":increment", AttributeValue.builder().n("1").build(),
               ":stringSetVal", AttributeValue.builder().ss("Value1").build()))
           .returnValues(ReturnValue.UPDATED_NEW)
           .build();

       // Perform the update operation
       try {
           return dynamoDbClient.updateItem(request);
       } catch (DynamoDbException e) {
           throw DynamoDbException.builder()
```

```
                .message("Failed to update item with all operation types: " +
e.getMessage())
                .cause(e)
                .build();
        }
    }

    /**
     * Gets the current state of an item.
     *
     * <p>Helper method to retrieve the current state of an item.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to get
     * @return The item or null if not found
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static Map<String, AttributeValue> getItem(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key) {

        // Define the get parameters
        GetItemRequest request =
            GetItemRequest.builder().tableName(tableName).key(key).build();

        // Perform the get operation
        try {
            GetItemResponse response = dynamoDbClient.getItem(request);

            // Return the item if it exists, otherwise null
            return response.item();
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to get item: " + e.getMessage())
                .cause(e)
                .build();
        }
    }
```

Ejemplo de uso de actualizar el orden de las expresiones con AWS SDK for Java 2.x.

```
   public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
       // Example key
       Map<String, AttributeValue> key = new HashMap<>();
       key.put("ProductId", AttributeValue.builder().s("P12345").build());

       System.out.println("Demonstrating update expression order in DynamoDB");

       try {
           // Example 1: Demonstrate update order effects
           System.out.println("\nExample 1: Demonstrating update order effects");
           Map<String, Object> orderResults =
demonstrateUpdateOrder(dynamoDbClient, tableName, key);

           if ((boolean) orderResults.get("success")) {
               System.out.println("SET first, then ADD:");
               System.out.println("  " + orderResults.get("setFirstResponse"));

               System.out.println("ADD first, then SET:");
               System.out.println("  " + orderResults.get("addFirstResponse"));

               System.out.println("SET with multiple attributes:");
               System.out.println("  " + orderResults.get("multiSetResponse"));

               System.out.println("SET with self-reference:");
               System.out.println("  " +
orderResults.get("selfReferenceResponse"));
           } else {
               System.out.println("Error: " + orderResults.get("error"));
           }

           // Example 2: Update with SET first, then REMOVE
           System.out.println("\nExample 2: Update with SET first, then REMOVE");
           UpdateItemResponse setFirstResponse = updateWithSetFirst(
               dynamoDbClient,
               tableName,
               key,
               "Status",
               AttributeValue.builder().s("Active").build(),
               "OldStatus");

           System.out.println("Updated attributes: " +
setFirstResponse.attributes());
```

```
            // Example 3: Update with REMOVE first, then SET
            System.out.println("\nExample 3: Update with REMOVE first, then SET");
            UpdateItemResponse removeFirstResponse = updateWithRemoveFirst(
                dynamoDbClient,
                tableName,
                key,
                "Status",
                AttributeValue.builder().s("Inactive").build(),
                "OldStatus");

            System.out.println("Updated attributes: " +
removeFirstResponse.attributes());

            // Example 4: Update with all operation types
            System.out.println("\nExample 4: Update with all operation types");
            UpdateItemResponse allOpsResponse =
updateWithAllOperationTypes(dynamoDbClient, tableName, key);

            System.out.println("Updated attributes: " +
allOpsResponse.attributes());

            // Example 5: Get the current state of the item
            System.out.println("\nExample 5: Current state of the item");
            Map<String, AttributeValue> item = getItem(dynamoDbClient, tableName,
key);

            if (item != null) {
                System.out.println("Item: " + item);
            } else {
                System.out.println("Item not found");
            }

            // Explain update expression order
            System.out.println("\nKey points about update expression order in
DynamoDB:");
            System.out.println("1. Update expressions are processed in this order:
SET, REMOVE, ADD, DELETE");
            System.out.println("2. Within each clause, operations are processed from
left to right");
            System.out.println("3. SET operations use the item state before any
updates in the expression");
            System.out.println("4. When an attribute is referenced multiple times,
the first operation wins");
```

```
            System.out.println("5. To reference a new value, split the update into
 multiple operations");
            System.out.println("6. The order of clauses in the expression doesn't
 change the evaluation order");
            System.out.println("7. For complex updates, consider using multiple
 separate update operations");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Para obtener más información sobre la API, consulte UpdateItemla referencia AWS SDK for Java 2.x de la API.

Actualización de la configuración de rendimiento en caliente de una tabla

El siguiente ejemplo de código muestra cómo actualizar la configuración de rendimiento en caliente de una tabla.

SDK para Java 2.x

Actualice la configuración de rendimiento en caliente en una tabla de DynamoDB existente con AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GlobalSecondaryIndexUpdate;
import
 software.amazon.awssdk.services.dynamodb.model.UpdateGlobalSecondaryIndexAction;
import software.amazon.awssdk.services.dynamodb.model.UpdateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.WarmThroughput;

    public static WarmThroughput buildWarmThroughput(final Long readUnitsPerSecond,
 final Long writeUnitsPerSecond) {
        return WarmThroughput.builder()
            .readUnitsPerSecond(readUnitsPerSecond)
            .writeUnitsPerSecond(writeUnitsPerSecond)
            .build();
    }
```

```
   /**
    * Updates a DynamoDB table with warm throughput settings for both the table and
a global secondary index.
    *
    * @param ddb The DynamoDB client
    * @param tableName The name of the table to update
    * @param tableReadUnitsPerSecond Read units per second for the table
    * @param tableWriteUnitsPerSecond Write units per second for the table
    * @param globalSecondaryIndexName The name of the global secondary index to
update
    * @param globalSecondaryIndexReadUnitsPerSecond Read units per second for the
GSI
    * @param globalSecondaryIndexWriteUnitsPerSecond Write units per second for the
GSI
    */
   public static void updateDynamoDBTable(
       final DynamoDbClient ddb,
       final String tableName,
       final Long tableReadUnitsPerSecond,
       final Long tableWriteUnitsPerSecond,
       final String globalSecondaryIndexName,
       final Long globalSecondaryIndexReadUnitsPerSecond,
       final Long globalSecondaryIndexWriteUnitsPerSecond) {

       final WarmThroughput tableWarmThroughput =
           buildWarmThroughput(tableReadUnitsPerSecond, tableWriteUnitsPerSecond);
       final WarmThroughput gsiWarmThroughput =
           buildWarmThroughput(globalSecondaryIndexReadUnitsPerSecond,
globalSecondaryIndexWriteUnitsPerSecond);

       final GlobalSecondaryIndexUpdate globalSecondaryIndexUpdate =
GlobalSecondaryIndexUpdate.builder()
           .update(UpdateGlobalSecondaryIndexAction.builder()
               .indexName(globalSecondaryIndexName)
               .warmThroughput(gsiWarmThroughput)
               .build())
           .build();

       final UpdateTableRequest request = UpdateTableRequest.builder()
           .tableName(tableName)
           .globalSecondaryIndexUpdates(globalSecondaryIndexUpdate)
           .warmThroughput(tableWarmThroughput)
           .build();
```

```
        try {
            ddb.updateTable(request);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }

        System.out.println(SUCCESS_MESSAGE);
    }
```

- Para obtener más información sobre la API, consulte UpdateTablela Referencia AWS SDK for Java 2.x de la API.

Actualización del TTL de un elemento

El siguiente ejemplo de código muestra cómo actualizar el TTL de un elemento.

SDK para Java 2.x

Actualice el TTL en un elemento de DynamoDB existente en una tabla.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.Map;
import java.util.Optional;

    public UpdateItemResponse updateItemWithTTL(
        final String tableName, final String primaryKeyValue, final String
 sortKeyValue) {
        // Get current time in epoch second format
        final long currentTime = System.currentTimeMillis() / 1000;

        // Calculate expiration time 90 days from now in epoch second format
        final long expireDate = currentTime + (DAYS_TO_EXPIRE * SECONDS_PER_DAY);
```

```
        // Create the key map for the item to update
        final Map<String, AttributeValue> keyMap = new HashMap<>();
        keyMap.put(PRIMARY_KEY_ATTR,
AttributeValue.builder().s(primaryKeyValue).build());
        keyMap.put(SORT_KEY_ATTR, AttributeValue.builder().s(sortKeyValue).build());

        // Create the expression attribute values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            ":c", AttributeValue.builder().n(String.valueOf(currentTime)).build());
        expressionAttributeValues.put(
            ":e", AttributeValue.builder().n(String.valueOf(expireDate)).build());

        final UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(keyMap)
            .updateExpression(UPDATE_EXPRESSION)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final UpdateItemResponse response = dynamoDbClient.updateItem(request);
            System.out.println(String.format(SUCCESS_MESSAGE, tableName));
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulte UpdateItemla Referencia AWS SDK for Java 2.x de la API.

Uso de API Gateway para invocar una función de Lambda

El siguiente ejemplo de código muestra cómo crear una AWS Lambda función invocada por Amazon API Gateway.

SDK para Java 2.x

Muestra cómo crear una AWS Lambda función mediante la API de tiempo de ejecución Lambda Java. En este ejemplo, se invocan diferentes AWS servicios para realizar un caso de uso específico. En este ejemplo se indica cómo crear una función de Lambda invocada por Amazon API Gateway que escanea una tabla de Amazon DynamoDB en busca de aniversarios laborales y utiliza Amazon Simple Notification Service (Amazon SNS) para enviar un mensaje de texto a sus empleados que les felicite en la fecha de su primer aniversario.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB
- Lambda
- Amazon SNS

Uso de Step Functions para invocar funciones de Lambda

El siguiente ejemplo de código muestra cómo crear una máquina de AWS Step Functions estados que invoque AWS Lambda funciones en secuencia.

SDK para Java 2.x

Muestra cómo crear un flujo de trabajo AWS sin servidor mediante AWS Step Functions y el. AWS SDK for Java 2.x Cada paso del flujo de trabajo se implementa mediante una AWS Lambda función.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- DynamoDB
- Lambda
- Amazon SES
- Step Functions

Uso de operaciones de contador atómico

El siguiente ejemplo de código muestra cómo utilizar operaciones de contador atómico en DynamoDB.

- Incremente contadores de forma atómica con operaciones ADD y SET.
- Incremente de forma segura contadores que podrían no existir.
- Implementar bloqueo positivo para operaciones de contador.

SDK para Java 2.x

Demuestre las contraoperaciones atómicas utilizando AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.GetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.ReturnValue;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.Map;

    /**
     * Increments a counter using the ADD operation.
     *
     * <p>This method demonstrates how to use the ADD operation to atomically
     * increment a counter attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param counterName The name of the counter attribute
     * @param incrementValue The value to increment by
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse incrementCounterWithAdd(
        DynamoDbClient dynamoDbClient,
        String tableName,
```

```
        Map<String, AttributeValue> key,
        String counterName,
        int incrementValue) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("ADD #counterName :increment")
            .expressionAttributeNames(Map.of("#counterName", counterName))
            .expressionAttributeValues(Map.of(
                ":increment",
                AttributeValue.builder().n(String.valueOf(incrementValue)).build()))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Increments a counter using the SET operation.
     *
     * <p>This method demonstrates how to use the SET operation with an expression
     * to increment a counter attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param counterName The name of the counter attribute
     * @param incrementValue The value to increment by
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse incrementCounterWithSet(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String counterName,
        int incrementValue) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
```

```
            .key(key)
            .updateExpression("SET #counterName = #counterName + :increment")
            .expressionAttributeNames(Map.of("#counterName", counterName))
            .expressionAttributeValues(Map.of(
                ":increment",
                AttributeValue.builder().n(String.valueOf(incrementValue)).build()))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Increments a counter safely, handling the case where the counter doesn't
exist yet.
     *
     * <p>This method demonstrates how to use if_not_exists to safely increment a
counter
     * that may not exist yet.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param counterName The name of the counter attribute
     * @param incrementValue The value to increment by
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse incrementCounterSafely(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String counterName,
        int incrementValue) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #counterName = if_not_exists(#counterName, :zero)
+ :increment")
            .expressionAttributeNames(Map.of("#counterName", counterName))
            .expressionAttributeValues(Map.of(
```

```
                ":increment",

AttributeValue.builder().n(String.valueOf(incrementValue)).build(),
                ":zero", AttributeValue.builder().n("0").build()))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Decrements a counter safely, ensuring it doesn't go below zero.
     *
     * <p>This method demonstrates how to use a condition expression to safely
     * decrement a counter without going below zero.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param counterName The name of the counter attribute
     * @param decrementValue The value to decrement by
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation or if the
counter would go below zero
     */
    public static UpdateItemResponse decrementCounterSafely(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String counterName,
        int decrementValue) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #counterName = #counterName - :decrement")
            .conditionExpression("#counterName >= :decrement")
            .expressionAttributeNames(Map.of("#counterName", counterName))
            .expressionAttributeValues(Map.of(
                ":decrement",
                AttributeValue.builder().n(String.valueOf(decrementValue)).build()))
            .returnValues(ReturnValue.UPDATED_NEW)
```

```
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Compares the ADD and SET approaches for incrementing counters.
     *
     * <p>This method demonstrates the differences between using ADD and SET
     * for incrementing counters in DynamoDB.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @return Map containing the comparison results
     */
    public static Map<String, Object> compareAddVsSet(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key) {

        Map<String, Object> results = new HashMap<>();

        try {
            // Reset counters to ensure a fair comparison
            UpdateItemRequest resetRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET AddCounter = :zero, SetCounter = :zero")
                .expressionAttributeValues(
                    Map.of(":zero", AttributeValue.builder().n("0").build()))
                .build();

            dynamoDbClient.updateItem(resetRequest);

            // Increment with ADD
            long addStartTime = System.nanoTime();
            UpdateItemResponse addResponse = incrementCounterWithAdd(dynamoDbClient,
tableName, key, "AddCounter", 1);
            long addEndTime = System.nanoTime();
            long addDuration = addEndTime - addStartTime;

            // Increment with SET
            long setStartTime = System.nanoTime();
```

```
            UpdateItemResponse setResponse = incrementCounterWithSet(dynamoDbClient,
tableName, key, "SetCounter", 1);
            long setEndTime = System.nanoTime();
            long setDuration = setEndTime - setStartTime;

            // Record results
            results.put("addResponse", addResponse);
            results.put("setResponse", setResponse);
            results.put("addDuration", addDuration);
            results.put("setDuration", setDuration);
            results.put("success", true);

        } catch (DynamoDbException e) {
            results.put("success", false);
            results.put("error", e.getMessage());
        }

        return results;
    }

    /**
     * Gets the current value of a counter attribute.
     *
     * <p>Helper method to retrieve the current value of a counter attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to get
     * @param counterName The name of the counter attribute
     * @return The counter value or null if not found
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static Integer getCounterValue(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, String counterName) {

        // Define the get parameters
        GetItemRequest request = GetItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .projectionExpression(counterName)
            .build();

        // Perform the get operation
```

```
        GetItemResponse response = dynamoDbClient.getItem(request);

        // Return the counter value if it exists, otherwise null
        if (response.item() != null && response.item().containsKey(counterName)) {
            return Integer.parseInt(response.item().get(counterName).n());
        }

        return null;
    }
```

Ejemplo de uso de contraoperaciones atómicas con AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        // Example key
        Map<String, AttributeValue> key = new HashMap<>();
        key.put("ProductId", AttributeValue.builder().s("P12345").build());

        System.out.println("Demonstrating atomic counter operations in DynamoDB");

        try {
            // Example 1: Increment a counter using ADD
            System.out.println("\nExample 1: Incrementing a counter using ADD");
            UpdateItemResponse addResponse = incrementCounterWithAdd(dynamoDbClient,
tableName, key, "ViewCount", 1);

            System.out.println("Updated counter: " + addResponse.attributes());

            // Example 2: Increment a counter using SET
            System.out.println("\nExample 2: Incrementing a counter using SET");
            UpdateItemResponse setResponse = incrementCounterWithSet(dynamoDbClient,
tableName, key, "LikeCount", 1);

            System.out.println("Updated counter: " + setResponse.attributes());

            // Example 3: Increment a counter safely
            System.out.println("\nExample 3: Incrementing a counter safely");
            UpdateItemResponse safeResponse = incrementCounterSafely(dynamoDbClient,
tableName, key, "ShareCount", 1);

            System.out.println("Updated counter: " + safeResponse.attributes());
```

```
            // Example 4: Decrement a counter safely
            System.out.println("\nExample 4: Decrementing a counter safely");
            try {
                UpdateItemResponse decrementResponse =
                    decrementCounterSafely(dynamoDbClient, tableName, key,
"InventoryCount", 1);

                System.out.println("Updated counter: " +
decrementResponse.attributes());
            } catch (DynamoDbException e) {
                if (e.getMessage().contains("ConditionalCheckFailed")) {
                    System.out.println("Cannot decrement counter below zero");
                } else {
                    throw e;
                }
            }

            // Example 5: Compare ADD vs SET
            System.out.println("\nExample 5: Comparing ADD vs SET");
            Map<String, Object> comparison = compareAddVsSet(dynamoDbClient,
tableName, key);

            if ((boolean) comparison.get("success")) {
                System.out.println("ADD duration: " + comparison.get("addDuration")
+ " ns");
                System.out.println("SET duration: " + comparison.get("setDuration")
+ " ns");
                System.out.println("ADD response: " +
comparison.get("addResponse"));
                System.out.println("SET response: " +
comparison.get("setResponse"));
            } else {
                System.out.println("Comparison failed: " + comparison.get("error"));
            }

            // Explain atomic counter operations
            System.out.println("\nKey points about DynamoDB atomic counter
operations:");
            System.out.println("1. Both ADD and SET can be used for atomic
counters");
            System.out.println("2. ADD is more concise for simple increments");
            System.out.println("3. SET with an expression is more flexible for
complex operations");
```

```
            System.out.println("4. Use if_not_exists to handle the case where the
counter doesn't exist yet");
            System.out.println("5. Use condition expressions to prevent counters
from going below zero");
            System.out.println("6. Atomic operations are guaranteed to be isolated
from other writes");
            System.out.println("7. ADD can only be used with number and set data
types");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Para obtener detalles sobre la API, consulte UpdateItemla referencia AWS SDK for Java 2.x de la API.

Uso de operaciones condicionales

El siguiente ejemplo de código muestra cómo utilizar operaciones condicionales en DynamoDB.

- Implemente escrituras condicionales para evitar la sobrescritura de datos.
- Utilice expresiones condicionales para aplicar reglas de negocio.
- Gestione los errores de comprobación condicionales de forma elegante.

SDK para Java 2.x

Demuestre las operaciones condicionales utilizando AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import
 software.amazon.awssdk.services.dynamodb.model.ConditionalCheckFailedException;
import software.amazon.awssdk.services.dynamodb.model.DeleteItemRequest;
import software.amazon.awssdk.services.dynamodb.model.DeleteItemResponse;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.GetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.ReturnValue;
```

```
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.Map;

    /**
     * Performs a conditional update on an item.
     *
     * <p>This method demonstrates how to use a condition expression to update an
 item
     * only if a specific condition is met.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param conditionAttribute The attribute to check in the condition
     * @param conditionValue The value to compare against
     * @param updateAttribute The attribute to update
     * @param updateValue The new value to set
     * @return Map containing the operation result and status
     */
    public static Map<String, Object> conditionalUpdate(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String conditionAttribute,
        AttributeValue conditionValue,
        String updateAttribute,
        AttributeValue updateValue) {

        Map<String, Object> result = new HashMap<>();

        try {
            // Define the update parameters
            UpdateItemRequest request = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET #updateAttr = :updateVal")
                .conditionExpression("#condAttr = :condVal")
                .expressionAttributeNames(Map.of(
                    "#condAttr", conditionAttribute,
                    "#updateAttr", updateAttribute))
                .expressionAttributeValues(Map.of(
```

```
                    ":condVal", conditionValue,
                    ":updateVal", updateValue))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            // Perform the update operation
            UpdateItemResponse response = dynamoDbClient.updateItem(request);

            // Record success result
            result.put("success", true);
            result.put("message", "Condition was met and update was performed");
            result.put("attributes", response.attributes());

        } catch (ConditionalCheckFailedException e) {
            // Record failure due to condition not being met
            result.put("success", false);
            result.put("message", "Condition was not met, update was not
performed");
            result.put("error", "ConditionalCheckFailedException");

        } catch (DynamoDbException e) {
            // Record failure due to other errors
            result.put("success", false);
            result.put("message", "Error occurred: " + e.getMessage());
            result.put("error", e.getClass().getSimpleName());
        }

        return result;
    }

    /**
     * Performs a conditional delete on an item.
     *
     * <p>This method demonstrates how to use a condition expression to delete an
item
     * only if a specific condition is met.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to delete
     * @param conditionAttribute The attribute to check in the condition
     * @param conditionValue The value to compare against
     * @return Map containing the operation result and status
     */
```

```
    public static Map<String, Object> conditionalDelete(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String conditionAttribute,
        AttributeValue conditionValue) {

        Map<String, Object> result = new HashMap<>();

        try {
            // Define the delete parameters
            DeleteItemRequest request = DeleteItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .conditionExpression("#condAttr = :condVal")
                .expressionAttributeNames(Map.of("#condAttr", conditionAttribute))
                .expressionAttributeValues(Map.of(":condVal", conditionValue))
                .returnValues(ReturnValue.ALL_OLD)
                .build();

            // Perform the delete operation
            DeleteItemResponse response = dynamoDbClient.deleteItem(request);

            // Record success result
            result.put("success", true);
            result.put("message", "Condition was met and delete was performed");
            result.put("attributes", response.attributes());

        } catch (ConditionalCheckFailedException e) {
            // Record failure due to condition not being met
            result.put("success", false);
            result.put("message", "Condition was not met, delete was not
performed");
            result.put("error", "ConditionalCheckFailedException");

        } catch (DynamoDbException e) {
            // Record failure due to other errors
            result.put("success", false);
            result.put("message", "Error occurred: " + e.getMessage());
            result.put("error", e.getClass().getSimpleName());
        }

        return result;
    }
```

```
    /**
     * Demonstrates optimistic locking using a version attribute.
     *
     * <p>This method shows how to implement optimistic locking by using a version
     * attribute that is incremented with each update.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param versionAttribute The name of the version attribute
     * @return Map containing the operation result
     */
    public static Map<String, Object> optimisticLockingExample(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
 key, String versionAttribute) {

        Map<String, Object> result = new HashMap<>();

        try {
            // Get the current version of the item
            GetItemRequest getRequest = GetItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .projectionExpression(versionAttribute)
                .build();

            GetItemResponse getResponse = dynamoDbClient.getItem(getRequest);

            // Check if the item exists
            if (getResponse.item() == null || !
getResponse.item().containsKey(versionAttribute)) {
                // Item doesn't exist or doesn't have a version attribute
                // Initialize with version 1
                UpdateItemRequest initRequest = UpdateItemRequest.builder()
                    .tableName(tableName)
                    .key(key)
                    .updateExpression("SET #verAttr = :newVer, #dataAttr = :data")
                    .expressionAttributeNames(Map.of("#verAttr", versionAttribute,
 "#dataAttr", "Data"))
                    .expressionAttributeValues(Map.of(
                        ":newVer", AttributeValue.builder().n("1").build(),
                        ":data", AttributeValue.builder().s("Initial
 data").build()))
```

```
                    .returnValues(ReturnValue.UPDATED_NEW)
                    .build();

                UpdateItemResponse initResponse =
dynamoDbClient.updateItem(initRequest);

                result.put("operation", "initialize");
                result.put("success", true);
                result.put("attributes", initResponse.attributes());

                return result;
            }

            // Get the current version number
            int currentVersion =
                Integer.parseInt(getResponse.item().get(versionAttribute).n());
            int newVersion = currentVersion + 1;

            // Update the item with a condition on the version
            UpdateItemRequest updateRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET #verAttr = :newVer, #dataAttr = :newData")
                .conditionExpression("#verAttr = :curVer")
                .expressionAttributeNames(Map.of("#verAttr", versionAttribute,
"#dataAttr", "Data"))
                .expressionAttributeValues(Map.of(
                    ":curVer",
                        AttributeValue.builder()
                            .n(String.valueOf(currentVersion))
                            .build(),
                    ":newVer",

AttributeValue.builder().n(String.valueOf(newVersion)).build(),
                    ":newData",
                        AttributeValue.builder()
                            .s("Updated data at version " + newVersion)
                            .build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            UpdateItemResponse updateResponse =
dynamoDbClient.updateItem(updateRequest);
```

```
            // Record success result
            result.put("operation", "update");
            result.put("success", true);
            result.put("oldVersion", currentVersion);
            result.put("newVersion", newVersion);
            result.put("attributes", updateResponse.attributes());

        } catch (ConditionalCheckFailedException e) {
            // Record failure due to version mismatch
            result.put("operation", "update");
            result.put("success", false);
            result.put("message", "Version mismatch, another process may have
updated the item");
            result.put("error", "ConditionalCheckFailedException");

        } catch (DynamoDbException e) {
            // Record failure due to other errors
            result.put("operation", "update");
            result.put("success", false);
            result.put("message", "Error occurred: " + e.getMessage());
            result.put("error", e.getClass().getSimpleName());
        }

        return result;
    }

    /**
     * Performs a conditional update with multiple conditions.
     *
     * <p>This method demonstrates how to use multiple conditions in a condition
expression.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param conditions Map of attribute names to values for conditions
     * @param updateAttribute The attribute to update
     * @param updateValue The new value to set
     * @return Map containing the operation result and status
     */
    public static Map<String, Object> conditionalUpdateWithMultipleConditions(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
```

```
        Map<String, AttributeValue> conditions,
        String updateAttribute,
        AttributeValue updateValue) {

        Map<String, Object> result = new HashMap<>();

        try {
            // Build the condition expression and attribute names/values
            StringBuilder conditionExpression = new StringBuilder();
            Map<String, String> expressionAttributeNames = new HashMap<>();
            Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();

            // Add update attribute
            expressionAttributeNames.put("#updateAttr", updateAttribute);
            expressionAttributeValues.put(":updateVal", updateValue);

            // Add conditions
            int i = 0;
            for (Map.Entry<String, AttributeValue> condition :
conditions.entrySet()) {
                String attrName = condition.getKey();
                AttributeValue attrValue = condition.getValue();

                String nameKey = "#cond" + i;
                String valueKey = ":val" + i;

                expressionAttributeNames.put(nameKey, attrName);
                expressionAttributeValues.put(valueKey, attrValue);

                // Add AND between conditions (except for the first one)
                if (i > 0) {
                    conditionExpression.append(" AND ");
                }

                conditionExpression.append(nameKey).append(" = ").append(valueKey);
                i++;
            }

            // Define the update parameters
            UpdateItemRequest request = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET #updateAttr = :updateVal")
                .conditionExpression(conditionExpression.toString())
```

```
                .expressionAttributeNames(expressionAttributeNames)
                .expressionAttributeValues(expressionAttributeValues)
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            // Perform the update operation
            UpdateItemResponse response = dynamoDbClient.updateItem(request);

            // Record success result
            result.put("success", true);
            result.put("message", "All conditions were met and update was
performed");
            result.put("attributes", response.attributes());

        } catch (ConditionalCheckFailedException e) {
            // Record failure due to condition not being met
            result.put("success", false);
            result.put("message", "One or more conditions were not met, update was
not performed");
            result.put("error", "ConditionalCheckFailedException");

        } catch (DynamoDbException e) {
            // Record failure due to other errors
            result.put("success", false);
            result.put("message", "Error occurred: " + e.getMessage());
            result.put("error", e.getClass().getSimpleName());
        }

        return result;
    }
```

Ejemplo de uso de operaciones condicionales con AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        // Example key
        Map<String, AttributeValue> key = new HashMap<>();
        key.put("ProductId", AttributeValue.builder().s("P12345").build());

        System.out.println("Demonstrating conditional operations in DynamoDB");

        try {
```

```
            // Example 1: Conditional update
            System.out.println("\nExample 1: Conditional update");
            Map<String, Object> updateResult = conditionalUpdate(
                dynamoDbClient,
                tableName,
                key,
                "InStock",
                AttributeValue.builder().bool(true).build(),
                "Status",
                AttributeValue.builder().s("Available").build());

            System.out.println("Update result: " + updateResult.get("message"));
            if ((boolean) updateResult.get("success")) {
                System.out.println("Updated attributes: " +
updateResult.get("attributes"));
            }

            // Example 2: Conditional delete
            System.out.println("\nExample 2: Conditional delete");
            Map<String, Object> deleteResult = conditionalDelete(
                dynamoDbClient,
                tableName,
                key,
                "Status",
                AttributeValue.builder().s("Discontinued").build());

            System.out.println("Delete result: " + deleteResult.get("message"));
            if ((boolean) deleteResult.get("success")) {
                System.out.println("Deleted item: " +
deleteResult.get("attributes"));
            }

            // Example 3: Optimistic locking
            System.out.println("\nExample 3: Optimistic locking");
            Map<String, Object> lockingResult =
optimisticLockingExample(dynamoDbClient, tableName, key, "Version");

            System.out.println("Optimistic locking result:");
            System.out.println("  Operation: " + lockingResult.get("operation"));
            System.out.println("  Success: " + lockingResult.get("success"));
            if (lockingResult.get("operation").equals("update") && (boolean)
lockingResult.get("success")) {
                System.out.println("  Old version: " +
lockingResult.get("oldVersion"));
```

```
                System.out.println("  New version: " +
lockingResult.get("newVersion"));
            }
            System.out.println("  Attributes: " + lockingResult.get("attributes"));

            // Example 4: Multiple conditions
            System.out.println("\nExample 4: Multiple conditions");
            Map<String, AttributeValue> conditions = new HashMap<>();
            conditions.put("Price", AttributeValue.builder().n("199.99").build());
            conditions.put("Category",
AttributeValue.builder().s("Electronics").build());

            Map<String, Object> multiConditionResult =
conditionalUpdateWithMultipleConditions(
                dynamoDbClient,
                tableName,
                key,
                conditions,
                "OnSale",
                AttributeValue.builder().bool(true).build());

            System.out.println("Multiple conditions result: " +
multiConditionResult.get("message"));
            if ((boolean) multiConditionResult.get("success")) {
                System.out.println("Updated attributes: " +
multiConditionResult.get("attributes"));
            }

            // Explain conditional operations
            System.out.println("\nKey points about DynamoDB conditional
operations:");
            System.out.println("1. Conditional operations only succeed if the
condition is met");
            System.out.println("2. ConditionalCheckFailedException is thrown when
the condition fails");
            System.out.println("3. No changes are made to the item if the condition
fails");
            System.out.println("4. Conditions can be used with update, delete, and
put operations");
            System.out.println("5. Multiple conditions can be combined with AND and
OR");
            System.out.println("6. Optimistic locking can be implemented using a
version attribute");
            System.out.println(
```

```
                "7. Conditional operations consume the same amount of write capacity
whether they succeed or fail");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - DeleteItem
  - PutItem
  - UpdateItem

Uso de nombres de atributo de expresión

El siguiente ejemplo de código muestra cómo utilizar nombres de atributo de expresión en DynamoDB.

- Trabaje con palabras reservadas en expresiones de DynamoDB.
- Utilice marcadores de posición para los nombres de atributos de expresión.
- Gestione caracteres especiales en nombres de atributo.

SDK para Java 2.x

Demuestre los nombres de los atributos de las expresiones utilizando AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ScanRequest;
import software.amazon.awssdk.services.dynamodb.model.ScanResponse;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.Arrays;
```

```
import java.util.HashMap;
import java.util.List;
import java.util.Map;

    /**
     * Updates an attribute that is a reserved word in DynamoDB.
     *
     * <p>This method demonstrates how to use expression attribute names to update
     * attributes that are reserved words in DynamoDB.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param reservedWordAttribute The reserved word attribute to update
     * @param value The value to set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateReservedWordAttribute(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String reservedWordAttribute,
        AttributeValue value) {

        // Define the update parameters using expression attribute names
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #attr = :value")
            .expressionAttributeNames(Map.of("#attr", reservedWordAttribute))
            .expressionAttributeValues(Map.of(":value", value))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Updates an attribute that contains special characters.
     *
     * <p>This method demonstrates how to use expression attribute names to update
     * attributes that contain special characters.
```

```
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param specialCharAttribute The attribute with special characters to update
     * @param value The value to set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateSpecialCharacterAttribute(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String specialCharAttribute,
        AttributeValue value) {

        // Define the update parameters using expression attribute names
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #attr = :value")
            .expressionAttributeNames(Map.of("#attr", specialCharAttribute))
            .expressionAttributeValues(Map.of(":value", value))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Queries items using an attribute that is a reserved word.
     *
     * <p>This method demonstrates how to use expression attribute names in a query
     * when the attribute is a reserved word.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param partitionKeyName The name of the partition key attribute
     * @param partitionKeyValue The value of the partition key
     * @param reservedWordAttribute The reserved word attribute to filter on
     * @param value The value to compare against
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
```

```
     */
    public static QueryResponse queryWithReservedWordAttribute(
        DynamoDbClient dynamoDbClient,
        String tableName,
        String partitionKeyName,
        AttributeValue partitionKeyValue,
        String reservedWordAttribute,
        AttributeValue value) {

        // Define the query parameters using expression attribute names
        Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put("#pkName", partitionKeyName);
        expressionAttributeNames.put("#attr", reservedWordAttribute);

        Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();
        expressionAttributeValues.put(":pkValue", partitionKeyValue);
        expressionAttributeValues.put(":value", value);

        QueryRequest request = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression("#pkName = :pkValue")
            .filterExpression("#attr = :value")
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        // Perform the query operation
        return dynamoDbClient.query(request);
    }

    /**
     * Updates a nested attribute with a path that contains reserved words.
     *
     * <p>This method demonstrates how to use expression attribute names to update
     * nested attributes where the path contains reserved words.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param attributePath The path to the nested attribute as an array
     * @param value The value to set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
```

```
    public static UpdateItemResponse updateNestedReservedWordAttribute(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        List<String> attributePath,
        AttributeValue value) {

        // Create expression attribute names for each part of the path
        Map<String, String> expressionAttributeNames = new HashMap<>();
        for (int i = 0; i < attributePath.size(); i++) {
            expressionAttributeNames.put("#attr" + i, attributePath.get(i));
        }

        // Build the attribute path using the expression attribute names
        StringBuilder attributePathExpression = new StringBuilder();
        for (int i = 0; i < attributePath.size(); i++) {
            if (i > 0) {
                attributePathExpression.append(".");
            }
            attributePathExpression.append("#attr").append(i);
        }

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET " + attributePathExpression.toString() + "
= :value")
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(Map.of(":value", value))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Scans a table with multiple attribute name placeholders.
     *
     * <p>This method demonstrates how to use multiple expression attribute names
     * in a complex filter expression.
     *
     * @param dynamoDbClient The DynamoDB client
```

```
     * @param tableName The name of the DynamoDB table
     * @param filters Object mapping attribute names to filter values
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static ScanResponse scanWithMultipleAttributeNames(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
filters) {

        // Create expression attribute names and values
        Map<String, String> expressionAttributeNames = new HashMap<>();
        Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();
        StringBuilder filterExpression = new StringBuilder();

        // Build the filter expression
        int index = 0;
        for (Map.Entry<String, AttributeValue> entry : filters.entrySet()) {
            String attrName = entry.getKey();
            AttributeValue attrValue = entry.getValue();

            String nameKey = "#attr" + index;
            String valueKey = ":val" + index;

            expressionAttributeNames.put(nameKey, attrName);
            expressionAttributeValues.put(valueKey, attrValue);

            // Add AND between conditions (except for the first one)
            if (index > 0) {
                filterExpression.append(" AND ");
            }

            filterExpression.append(nameKey).append(" = ").append(valueKey);
            index++;
        }

        // Define the scan parameters
        ScanRequest request = ScanRequest.builder()
            .tableName(tableName)
            .filterExpression(filterExpression.toString())
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        // Perform the scan operation
```

```
        return dynamoDbClient.scan(request);
    }
```

Ejemplo de uso de nombres de atributos de expresión con AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        // Example key
        Map<String, AttributeValue> key = new HashMap<>();
        key.put("ProductId", AttributeValue.builder().s("P12345").build());

        System.out.println("Demonstrating expression attribute names in DynamoDB");

        try {
            // Example 1: Update an attribute that is a reserved word
            System.out.println("\nExample 1: Updating an attribute that is a
reserved word");
            UpdateItemResponse response1 = updateReservedWordAttribute(
                dynamoDbClient,
                tableName,
                key,
                "Size", // "SIZE" is a reserved word in DynamoDB
                AttributeValue.builder().s("Large").build());

            System.out.println("Updated attribute: " + response1.attributes());

            // Example 2: Update an attribute with special characters
            System.out.println("\nExample 2: Updating an attribute with special
characters");
            UpdateItemResponse response2 = updateSpecialCharacterAttribute(
                dynamoDbClient,
                tableName,
                key,
                "Product-Type", // Contains a hyphen, which is a special character
                AttributeValue.builder().s("Electronics").build());

            System.out.println("Updated attribute: " + response2.attributes());

            // Example 3: Query with a reserved word attribute
            System.out.println("\nExample 3: Querying with a reserved word
attribute");
            QueryResponse response3 = queryWithReservedWordAttribute(
```

```
                dynamoDbClient,
                tableName,
                "Category",
                AttributeValue.builder().s("Electronics").build(),
                "Count", // "COUNT" is a reserved word in DynamoDB
                AttributeValue.builder().n("10").build());

            System.out.println("Found " + response3.count() + " items");

            // Example 4: Update a nested attribute with reserved words in the path
            System.out.println("\nExample 4: Updating a nested attribute with
reserved words in the path");
            UpdateItemResponse response4 = updateNestedReservedWordAttribute(
                dynamoDbClient,
                tableName,
                key,
                Arrays.asList("Dimensions", "Size", "Height"), // "SIZE" is a
reserved word
                AttributeValue.builder().n("30").build());

            System.out.println("Updated nested attribute: " +
response4.attributes());

            // Example 5: Scan with multiple attribute name placeholders
            System.out.println("\nExample 5: Scanning with multiple attribute name
placeholders");
            Map<String, AttributeValue> filters = new HashMap<>();
            filters.put("Size", AttributeValue.builder().s("Large").build());
            filters.put("Count", AttributeValue.builder().n("10").build());
            filters.put(
                "Product-Type", AttributeValue.builder().s("Electronics").build());

            ScanResponse response5 = scanWithMultipleAttributeNames(dynamoDbClient,
tableName, filters);

            System.out.println("Found " + response5.count() + " items");

            // Show some common reserved words
            System.out.println("\nSome common DynamoDB reserved words:");
            List<String> commonReservedWords = getDynamoDBReservedWords();
            System.out.println(String.join(", ", commonReservedWords));

            // Explain expression attribute names
            System.out.println("\nKey points about expression attribute names:");
```

```
            System.out.println("1. Use expression attribute names (#name) for
reserved words");
            System.out.println("2. Use expression attribute names for attributes
with special characters");
            System.out.println(
                "3. Special characters include: spaces, hyphens, dots, and other
non-alphanumeric characters");
            System.out.println("4. Expression attribute names are required for
nested attributes with reserved words");
            System.out.println("5. You can use multiple expression attribute names
in a single expression");
            System.out.println("6. Expression attribute names are case-sensitive");
            System.out.println("7. Expression attribute names are only used in
expressions, not in the actual data");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - Query
  - UpdateItem

Uso de eventos programados para invocar una función de Lambda

El siguiente ejemplo de código muestra cómo crear una AWS Lambda función invocada por un evento EventBridge programado de Amazon.

SDK para Java 2.x

> Muestra cómo crear un evento EventBridge programado de Amazon que invoque una AWS Lambda función. Configure EventBridge para usar una expresión cron para programar cuándo se invoca la función Lambda. En este ejemplo, creará una función de Lambda utilizando la API de tiempo de ejecución de Java de Lambda. En este ejemplo, se invocan diferentes AWS servicios para realizar un caso de uso específico. Este ejemplo indica cómo crear una aplicación que envíe un mensaje de texto a sus empleados para felicitarles por su primer aniversario.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- CloudWatch Registros
- DynamoDB
- EventBridge
- Lambda
- Amazon SNS

Ejemplos de tecnología sin servidor

Invocación de una función de Lambda desde un desencadenador de DynamoDB

El siguientes ejemplo de código muestra cómo implementar una función de Lambda que recibe un evento desencadenado al recibir registros de una secuencia de DynamoDB. La función recupera la carga útil de DynamoDB y registra el contenido del registro.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Consumo de un evento de DynamoDB con Lambda mediante Java.

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.DynamodbEvent;
import
 com.amazonaws.services.lambda.runtime.events.DynamodbEvent.DynamodbStreamRecord;
import com.google.gson.Gson;
import com.google.gson.GsonBuilder;

public class example implements RequestHandler<DynamodbEvent, Void> {

    private static final Gson GSON = new GsonBuilder().setPrettyPrinting().create();
```

```
    @Override
    public Void handleRequest(DynamodbEvent event, Context context) {
        System.out.println(GSON.toJson(event));
        event.getRecords().forEach(this::logDynamoDBRecord);
        return null;
    }

    private void logDynamoDBRecord(DynamodbStreamRecord record) {
        System.out.println(record.getEventID());
        System.out.println(record.getEventName());
        System.out.println("DynamoDB Record: " + GSON.toJson(record.getDynamodb()));
    }
}
```

Notificación de los errores de los elementos del lote de las funciones de Lambda con un desencadenador de DynamoDB

El siguiente ejemplo de código muestra cómo implementar una respuesta parcial por lotes para las funciones de Lambda que reciben eventos de una secuencia de DynamoDB. La función informa los errores de los elementos del lote en la respuesta y le indica a Lambda que vuelva a intentar esos mensajes más adelante.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Notificación de los errores de los elementos del lote de DynamoDB con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.DynamodbEvent;
import com.amazonaws.services.lambda.runtime.events.StreamsEventResponse;
import com.amazonaws.services.lambda.runtime.events.models.dynamodb.StreamRecord;
```

```
import java.util.ArrayList;
import java.util.List;

public class ProcessDynamodbRecords implements RequestHandler<DynamodbEvent,
 StreamsEventResponse> {

    @Override
    public StreamsEventResponse handleRequest(DynamodbEvent input, Context context)
 {

        List<StreamsEventResponse.BatchItemFailure> batchItemFailures = new
 ArrayList<>();
        String curRecordSequenceNumber = "";

        for (DynamodbEvent.DynamodbStreamRecord dynamodbStreamRecord :
 input.getRecords()) {
          try {
                //Process your record
                StreamRecord dynamodbRecord = dynamodbStreamRecord.getDynamodb();
                curRecordSequenceNumber = dynamodbRecord.getSequenceNumber();

            } catch (Exception e) {
                /* Since we are working with streams, we can return the failed item
 immediately.
                   Lambda will immediately begin to retry processing from this
 failed item onwards. */
                batchItemFailures.add(new
 StreamsEventResponse.BatchItemFailure(curRecordSequenceNumber));
                return new StreamsEventResponse(batchItemFailures);
            }
        }

       return new StreamsEventResponse();
    }
}
```

AWS contribuciones de la comunidad

Cómo crear y probar una aplicación sin servidor

El siguiente ejemplo de código muestra cómo crear y probar una aplicación sin servidor mediante API Gateway con Lambda y DynamoDB.

SDK para Java 2.x

Muestra cómo crear y probar una aplicación sin servidor que consta de una API Gateway con Lambda y DynamoDB mediante el SDK de Java.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB
- Lambda

Ejemplos de Amazon EC2 usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Amazon EC2.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios

Introducción

Introducción a Amazon EC2

El siguiente ejemplo de código muestra cómo empezar a utilizar Amazon EC2.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously describes the security groups for the specified group ID.
    *
    * @param groupName the name of the security group to describe
    * @return a {@link CompletableFuture} that represents the asynchronous
operation
    *         of describing the security groups. The future will complete with a
    *         {@link DescribeSecurityGroupsResponse} object that contains the
    *         security group information.
    */
   public CompletableFuture<String> describeSecurityGroupArnByNameAsync(String
groupName) {
       DescribeSecurityGroupsRequest request =
DescribeSecurityGroupsRequest.builder()
           .groupNames(groupName)
           .build();

       DescribeSecurityGroupsPublisher paginator =
getAsyncClient().describeSecurityGroupsPaginator(request);
```

```
        AtomicReference<String> groupIdRef = new AtomicReference<>();
        return paginator.subscribe(response -> {
            response.securityGroups().stream()
                .filter(securityGroup ->
securityGroup.groupName().equals(groupName))
                .findFirst()
                .ifPresent(securityGroup ->
groupIdRef.set(securityGroup.groupId()));
        }).thenApply(v -> {
            String groupId = groupIdRef.get();
            if (groupId == null) {
                throw new RuntimeException("No security group found with the name: "
+ groupName);
            }
            return groupId;
        }).exceptionally(ex -> {
            logger.info("Failed to describe security group: " + ex.getMessage());
            throw new RuntimeException("Failed to describe security group", ex);
        });
    }
```

- Para obtener más información sobre la API, consulta DescribeSecurityGroupsla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Cree un par de claves y un grupo de seguridad.
- Seleccione una Imagen de máquina de Amazon (AMI) y un tipo de instancia; a continuación, cree una instancia.
- Detenga y vuelva a iniciar la instancia.
- Asocie una dirección IP elástica a su instancia.
- Conéctese a tu instancia con SSH y, a continuación, limpie los recursos.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario en un símbolo del sistema.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.ec2.model.CreateKeyPairResponse;
import software.amazon.awssdk.services.ec2.model.DeleteKeyPairResponse;
import software.amazon.awssdk.services.ec2.model.DescribeKeyPairsResponse;
import software.amazon.awssdk.services.ec2.model.DisassociateAddressResponse;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.ReleaseAddressResponse;
import software.amazon.awssdk.services.ssm.model.GetParametersByPathResponse;
import software.amazon.awssdk.services.ssm.model.Parameter;

import java.net.InetAddress;
import java.net.UnknownHostException;
import java.util.List;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;

/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This Java example performs the following tasks:
 *
 * 1. Creates an RSA key pair and saves the private key data as a .pem file.
 * 2. Lists key pairs.
 * 3. Creates a security group for the default VPC.
 * 4. Displays security group information.
 * 5. Gets a list of Amazon Linux 2 AMIs and selects one.
```

```
 * 6. Gets additional information about the image.
 * 7. Gets a list of instance types that are compatible with the selected AMI's
 * architecture.
 * 8. Creates an instance with the key pair, security group, AMI, and an
 * instance type.
 * 9. Displays information about the instance.
 * 10. Stops the instance and waits for it to stop.
 * 11. Starts the instance and waits for it to start.
 * 12. Allocates an Elastic IP address and associates it with the instance.
 * 13. Displays SSH connection info for the instance.
 * 14. Disassociates and deletes the Elastic IP address.
 * 15. Terminates the instance and waits for it to terminate.
 * 16. Deletes the security group.
 * 17. Deletes the key pair.
 */
public class EC2Scenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final Logger logger = LoggerFactory.getLogger(EC2Scenario.class);
    public static void main(String[] args) throws InterruptedException,
 UnknownHostException {

        logger.info("""
            Usage:
               <keyName> <fileName> <groupName> <groupDesc>

            Where:
               keyName -  A key pair name (for example, TestKeyPair).\s
               fileName -  A file name where the key information is written to.\s
               groupName - The name of the security group.\s
               groupDesc - The description of the security group.\s
            """);

        Scanner scanner = new Scanner(System.in);
        EC2Actions ec2Actions = new EC2Actions();

        String keyName = "TestKeyPair7" ;
        String fileName = "ec2Key.pem";
        String groupName = "TestSecGroup7" ;
        String groupDesc = "Test Group" ;
        String vpcId = ec2Actions.describeFirstEC2VpcAsync().join().vpcId();
        InetAddress localAddress = InetAddress.getLocalHost();
        String myIpAddress = localAddress.getHostAddress();
```

```
        logger.info("""
            Amazon Elastic Compute Cloud (EC2) is a web service that provides
 secure, resizable compute
            capacity in the cloud. It allows developers and organizations to easily
 launch and manage
            virtual server instances, known as EC2 instances, to run their
 applications.

            EC2 provides a wide range of instance types, each with different
 compute, memory,
            and storage capabilities, to meet the diverse needs of various
 workloads. Developers
            can choose the appropriate instance type based on their application's
 requirements,
            such as high-performance computing, memory-intensive tasks, or GPU-
accelerated workloads.

            The `Ec2AsyncClient` interface in the AWS SDK for Java 2.x provides a
 set of methods to
            programmatically interact with the Amazon EC2 service. This allows
 developers to
            automate the provisioning, management, and monitoring of EC2 instances
 as part of their
            application deployment pipelines. With EC2, teams can focus on building
 and deploying
            their applications without having to worry about the underlying
 infrastructure
            required to host and manage physical servers.

            This scenario walks you through how to perform key operations for this
 service.
            Let's get started...
            """);

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("1. Create an RSA key pair and save the private key material as
 a .pem file.");
        logger.info("""
            An RSA key pair for Amazon EC2 is a security mechanism used to
 authenticate and secure
```

```
            access to your EC2 instances. It consists of a public key and a private
key,
            which are generated as a pair.
            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<CreateKeyPairResponse> future =
ec2Actions.createKeyPairAsync(keyName, fileName);
            CreateKeyPairResponse response = future.join();
            logger.info("Key Pair successfully created. Key Fingerprint: " +
response.keyFingerprint());

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                if (ec2Ex.getMessage().contains("already exists")) {
                    // Key pair already exists.
                    logger.info("The key pair '" + keyName + "' already exists.
Moving on...");
                } else {
                    logger.info("EC2 error occurred: Error message: {}, Error code
{}", ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                    return;
                }
            } else {
                logger.info("An unexpected error occurred: " + (rt.getMessage()));
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("2. List key pairs.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<DescribeKeyPairsResponse> future =
ec2Actions.describeKeysAsync();
            DescribeKeyPairsResponse keyPairsResponse = future.join();
            keyPairsResponse.keyPairs().forEach(keyPair -> logger.info(
                "Found key pair with name {} and fingerprint {}",
                keyPair.keyName(),
                keyPair.keyFingerprint()));
```

```
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Error message: {}, Error code {}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", (cause != null ?
cause.getMessage() : rt.getMessage()));
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Create a security group.");
        logger.info("""
            An AWS EC2 Security Group is a virtual firewall that controls the
            inbound and outbound traffic to an EC2 instance. It acts as a first
line
            of defense for your EC2 instances, allowing you to specify the rules
that
            govern the network traffic entering and leaving your instances.
           """);
        waitForInputToContinue(scanner);
        String groupId = "";
        try {
            CompletableFuture<String> future =
ec2Actions.createSecurityGroupAsync(groupName, groupDesc, vpcId, myIpAddress);
            future.join();
            logger.info("Created security group") ;

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                if (ec2Ex.awsErrorDetails().errorMessage().contains("already
exists")) {
                    logger.info("The Security Group already exists. Moving on...");
                } else {
                    logger.error("An unexpected error occurred: {}",
ec2Ex.awsErrorDetails().errorMessage());
                    return;
                }
```

```
            } else {
                logger.error("An unexpected error occurred: {}",
cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Display security group information for the new security
group.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<String> future =
ec2Actions.describeSecurityGroupArnByNameAsync(groupName);
            groupId = future.join();
            logger.info("The security group Id is "+groupId);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                String errorCode = ec2Ex.awsErrorDetails().errorCode();
                if ("InvalidGroup.NotFound".equals(errorCode)) {
                    logger.info("Security group '{}' does not exist. Error Code:
{}", groupName, errorCode);
                } else {
                    logger.info("EC2 error occurred: Message {}, Error Code: {}",
ec2Ex.getMessage(), errorCode);
                }
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. Get a list of Amazon Linux 2 AMIs and select one with amzn2
in the name.");
        logger.info("""
            An Amazon EC2 AMI (Amazon Machine Image) is a pre-configured virtual
machine image that
```

```
            serves as a template for launching EC2 instances. It contains all the
necessary software and
            configurations required to run an application or operating system on an
EC2 instance.
            """);
        waitForInputToContinue(scanner);
        String instanceAMI="";
        try {
            CompletableFuture<GetParametersByPathResponse> future =
ec2Actions.getParaValuesAsync();
            GetParametersByPathResponse pathResponse = future.join();
            List<Parameter> parameterList = pathResponse.parameters();
            for (Parameter para : parameterList) {
                if (filterName(para.name())) {
                    instanceAMI = para.value();
                    break;
                }
            }
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        logger.info("The AMI value with amzn2 is: {}", instanceAMI);
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("6. Get the (Amazon Machine Image) AMI value from the amzn2
image.");
        logger.info("""
           An AMI value represents a specific version of a virtual machine (VM) or
server image.
           It uniquely identifies a particular version of an EC2 instance, including
its operating system,
           pre-installed software, and any custom configurations. This allows you to
consistently deploy the same
           VM image across your infrastructure.
```

```
            """);
        waitForInputToContinue(scanner);
        String amiValue;
        try {
            CompletableFuture<String> future =
ec2Actions.describeImageAsync(instanceAMI);
            amiValue = future.join();

        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof Ec2Exception) {
                Ec2Exception ec2Ex = (Ec2Exception) cause;
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Retrieves an instance type available in the current AWS
region.");
        waitForInputToContinue(scanner);
        String instanceType;
        try {
            CompletableFuture<String> future = ec2Actions.getInstanceTypesAsync();
            instanceType = future.join();
            if (!instanceType.isEmpty()) {
                logger.info("Found instance type: " + instanceType);
            } else {
                logger.info("Desired instance type not found.");
            }
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
```

```
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. Create an Amazon EC2 instance using the key pair, the
instance type, the security group, and the EC2 AMI value.");
        logger.info("Once the EC2 instance is created, it is placed into a running
state.");
        waitForInputToContinue(scanner);
        String newInstanceId;
        try {
            CompletableFuture<String> future =
ec2Actions.runInstanceAsync(instanceType, keyName, groupName, amiValue);
            newInstanceId = future.join();
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception) {
                Ec2Exception ec2Ex = (Ec2Exception) cause;
                switch (ec2Ex.awsErrorDetails().errorCode()) {
                    case "InvalidParameterValue":
                        logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                        break;
                    case "InsufficientInstanceCapacity":
                        // Handle insufficient instance capacity.
                        logger.info("Insufficient instance capacity: {}, {}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                        break;
                    case "InvalidGroup.NotFound":
                        // Handle security group not found.
                        logger.info("Security group not found: {},{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                        break;
                    default:
                        logger.info("EC2 error occurred: {} (Code: {}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                        break;
                }
                return;
            } else {
```

```
                logger.info("An unexpected error occurred: {}", (cause != null ?
cause.getMessage() : rt.getMessage()));
                return;
            }
        }
        logger.info("The instance Id is " + newInstanceId);
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("9. Display information about the running instance. ");

        waitForInputToContinue(scanner);
        String publicIp;
        try {
            CompletableFuture<String> future =
ec2Actions.describeEC2InstancesAsync(newInstanceId);
            publicIp = future.join();
            logger.info("EC2 instance public IP {}", publicIp);
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }

        }
        logger.info("You can SSH to the instance using this command:");
        logger.info("ssh -i " + fileName + " ec2-user@" + publicIp);
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("10. Stop the instance using a waiter (this may take a few
mins).");
        // Remove the 2nd one
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
ec2Actions.stopInstanceAsync(newInstanceId);
```

```
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("11. Start the instance using a waiter (this may take a few
mins).");
        try {
            CompletableFuture<Void> future =
ec2Actions.startInstanceAsync(newInstanceId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                // Handle EC2 exceptions.
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("12. Allocate an Elastic IP address and associate it with the
instance.");
        logger.info("""
```

```
            An Elastic IP address is a static public IP address that you can
associate with your EC2 instance.
            This allows you to have a fixed, predictable IP address that remains the
same even if your instance
            is stopped, terminated, or replaced.
            This is particularly useful for applications or services that need to be
accessed consistently from a
            known IP address.

            An EC2 Allocation ID (also known as a Reserved Instance Allocation
ID) is a unique identifier associated with a Reserved Instance (RI) that you have
purchased in AWS.

            When you purchase a Reserved Instance, AWS assigns a unique Allocation
ID to it.
            This Allocation ID is used to track and identify the specific RI you
have purchased,
            and it is important for managing and monitoring your Reserved Instances.

            """);

        waitForInputToContinue(scanner);
        String allocationId;
        try {
            CompletableFuture<String> future = ec2Actions.allocateAddressAsync();
            allocationId = future.join();
            logger.info("Successfully allocated address with ID: " +allocationId);
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        logger.info("The allocation Id value is " + allocationId);
        waitForInputToContinue(scanner);
        String associationId;
        try {
            CompletableFuture<String> future =
ec2Actions.associateAddressAsync(newInstanceId, allocationId);
```

```
            associationId = future.join();
            logger.info("Successfully associated address with ID: " +associationId);
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("13. Describe the instance again. Note that the public IP
address has changed");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<String> future =
ec2Actions.describeEC2InstancesAsync(newInstanceId);
            publicIp = future.join();
            logger.info("EC2 instance public IP: " + publicIp);
            logger.info("You can SSH to the instance using this command:");
            logger.info("ssh -i " + fileName + " ec2-user@" + publicIp);
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("14. Disassociate and release the Elastic IP address.");
        waitForInputToContinue(scanner);
```

```
        try {
            CompletableFuture<DisassociateAddressResponse> future =
ec2Actions.disassociateAddressAsync(associationId);
            future.join();
            logger.info("Address successfully disassociated.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                // Handle EC2 exceptions.
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<ReleaseAddressResponse> future =
ec2Actions.releaseEC2AddressAsync(allocationId);
            future.join(); // Wait for the operation to complete
            logger.info("Elastic IP address successfully released.");
        } catch (RuntimeException rte) {
            logger.info("An unexpected error occurred: {}", rte.getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("15. Terminate the instance and use a waiter (this may take a
few mins).");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Object> future =
ec2Actions.terminateEC2Async(newInstanceId);
            future.join();
            logger.info("EC2 instance successfully terminated.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                // Handle EC2 exceptions.
```

```
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("16. Delete the security group.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
ec2Actions.deleteEC2SecGroupAsync(groupId);
            future.join();
            logger.info("Security group successfully deleted.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("17. Delete the key.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<DeleteKeyPairResponse> future =
ec2Actions.deleteKeysAsync(keyName);
            future.join();
            logger.info("Successfully deleted key pair named " + keyName);
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
```

```
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
 ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("You successfully completed the Amazon EC2 scenario.");
        logger.info(DASHES);
    }
    public static boolean filterName(String name) {
        String[] parts = name.split("/");
        String myValue = parts[4];
        return myValue.contains("amzn2");
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Defina una clase que ajuste las acciones de EC2.

```
import org.slf4j.Logger;
```

```
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.AllocateAddressRequest;
import software.amazon.awssdk.services.ec2.model.AllocateAddressResponse;
import software.amazon.awssdk.services.ec2.model.AssociateAddressRequest;
import software.amazon.awssdk.services.ec2.model.AssociateAddressResponse;
import
 software.amazon.awssdk.services.ec2.model.AuthorizeSecurityGroupIngressRequest;
import software.amazon.awssdk.services.ec2.model.CreateKeyPairRequest;
import software.amazon.awssdk.services.ec2.model.CreateKeyPairResponse;
import software.amazon.awssdk.services.ec2.model.CreateSecurityGroupRequest;
import software.amazon.awssdk.services.ec2.model.DeleteKeyPairRequest;
import software.amazon.awssdk.services.ec2.model.DeleteKeyPairResponse;
import software.amazon.awssdk.services.ec2.model.DeleteSecurityGroupRequest;
import software.amazon.awssdk.services.ec2.model.DeleteSecurityGroupResponse;
import software.amazon.awssdk.services.ec2.model.DescribeImagesRequest;
import software.amazon.awssdk.services.ec2.model.DescribeInstanceTypesRequest;
import software.amazon.awssdk.services.ec2.model.DescribeInstanceTypesResponse;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesRequest;
import software.amazon.awssdk.services.ec2.model.DescribeKeyPairsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeSecurityGroupsRequest;
import software.amazon.awssdk.services.ec2.model.DescribeSecurityGroupsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest;
import software.amazon.awssdk.services.ec2.model.DisassociateAddressRequest;
import software.amazon.awssdk.services.ec2.model.DisassociateAddressResponse;
import software.amazon.awssdk.services.ec2.model.DomainType;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.Filter;
import software.amazon.awssdk.services.ec2.model.InstanceTypeInfo;
import software.amazon.awssdk.services.ec2.model.IpPermission;
import software.amazon.awssdk.services.ec2.model.IpRange;
import software.amazon.awssdk.services.ec2.model.ReleaseAddressRequest;
import software.amazon.awssdk.services.ec2.model.ReleaseAddressResponse;
import software.amazon.awssdk.services.ec2.model.RunInstancesRequest;
import software.amazon.awssdk.services.ec2.model.RunInstancesResponse;
import software.amazon.awssdk.services.ec2.model.StopInstancesRequest;
import software.amazon.awssdk.services.ec2.model.StartInstancesRequest;
import software.amazon.awssdk.services.ec2.model.TerminateInstancesRequest;
import software.amazon.awssdk.services.ec2.model.Vpc;
import software.amazon.awssdk.services.ec2.paginators.DescribeImagesPublisher;
```

```
import software.amazon.awssdk.services.ec2.paginators.DescribeInstancesPublisher;
import
 software.amazon.awssdk.services.ec2.paginators.DescribeSecurityGroupsPublisher;
import software.amazon.awssdk.services.ec2.paginators.DescribeVpcsPublisher;
import software.amazon.awssdk.services.ec2.waiters.Ec2AsyncWaiter;
import software.amazon.awssdk.services.ssm.SsmAsyncClient;
import software.amazon.awssdk.services.ssm.model.GetParametersByPathRequest;
import software.amazon.awssdk.services.ssm.model.GetParametersByPathResponse;
import software.amazon.awssdk.services.ec2.model.TerminateInstancesResponse;
import java.io.BufferedWriter;
import java.io.FileWriter;
import java.io.IOException;
import java.time.Duration;
import java.util.List;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;
import java.util.concurrent.atomic.AtomicReference;

public class EC2Actions {
    private static final Logger logger = LoggerFactory.getLogger(EC2Actions.class);
    private static Ec2AsyncClient ec2AsyncClient;

    /**
     * Retrieves an asynchronous Amazon Elastic Container Registry (ECR) client.
     *
     * @return the configured ECR asynchronous client.
     */
    private static Ec2AsyncClient getAsyncClient() {
        if (ec2AsyncClient == null) {
            /*
            The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
 version 2,
            and it is designed to provide a high-performance, asynchronous HTTP
 client for interacting with AWS services.
             It uses the Netty framework to handle the underlying network
 communication and the Java NIO API to
             provide a non-blocking, event-driven approach to HTTP requests and
 responses.
             */
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(50)  // Adjust as needed.
                .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
 timeout.
                .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
```

```
                .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
timeout.
                .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the
individual call attempt timeout.
                .build();

            ec2AsyncClient = Ec2AsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return ec2AsyncClient;
    }

    /**
     * Deletes a key pair asynchronously.
     *
     * @param keyPair the name of the key pair to delete
     * @return a {@link CompletableFuture} that represents the result of the
asynchronous operation.
     *         The {@link CompletableFuture} will complete with a {@link
DeleteKeyPairResponse} object
     *         that provides the result of the key pair deletion operation.
     */
    public CompletableFuture<DeleteKeyPairResponse> deleteKeysAsync(String keyPair)
{
        DeleteKeyPairRequest request = DeleteKeyPairRequest.builder()
            .keyName(keyPair)
            .build();

        // Initiate the asynchronous request to delete the key pair.
        CompletableFuture<DeleteKeyPairResponse> response =
getAsyncClient().deleteKeyPair(request);
        return response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to delete key pair: " + keyPair,
ex);
            } else if (resp == null) {
```

```
                throw new RuntimeException("No response received for deleting key
pair: " + keyPair);
            }
        });
    }

    /**
     * Deletes an EC2 security group asynchronously.
     *
     * @param groupId the ID of the security group to delete
     * @return a CompletableFuture that completes when the security group is deleted
     */
    public CompletableFuture<Void> deleteEC2SecGroupAsync(String groupId) {
        DeleteSecurityGroupRequest request = DeleteSecurityGroupRequest.builder()
            .groupId(groupId)
            .build();

        CompletableFuture<DeleteSecurityGroupResponse> response =
getAsyncClient().deleteSecurityGroup(request);
        return response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to delete security group with Id
" + groupId, ex);
            } else if (resp == null) {
                throw new RuntimeException("No response received for deleting
security group with Id " + groupId);
            }
        }).thenApply(resp -> null);
    }

    /**
     * Terminates an EC2 instance asynchronously and waits for it to reach the
terminated state.
     *
     * @param instanceId the ID of the EC2 instance to terminate
     * @return a {@link CompletableFuture} that completes when the instance has been
terminated
     * @throws RuntimeException if there is no response from the AWS SDK or if there
is a failure during the termination process
     */
    public CompletableFuture<Object> terminateEC2Async(String instanceId) {
        TerminateInstancesRequest terminateRequest =
TerminateInstancesRequest.builder()
            .instanceIds(instanceId)
```

```
            .build();

        CompletableFuture<TerminateInstancesResponse> responseFuture =
getAsyncClient().terminateInstances(terminateRequest);
        return responseFuture.thenCompose(terminateResponse -> {
            if (terminateResponse == null) {
                throw new RuntimeException("No response received for terminating
instance " + instanceId);
            }
            System.out.println("Going to terminate an EC2 instance and use a waiter
to wait for it to be in terminated state");
            return getAsyncClient().waiter()
                .waitUntilInstanceTerminated(r -> r.instanceIds(instanceId))
                .thenApply(waiterResponse -> null);
        }).exceptionally(throwable -> {
            // Handle any exceptions that occurred during the async call
            throw new RuntimeException("Failed to terminate EC2 instance: " +
throwable.getMessage(), throwable);
        });
    }

    /**
     * Releases an Elastic IP address asynchronously.
     *
     * @param allocId the allocation ID of the Elastic IP address to be released
     * @return a {@link CompletableFuture} representing the asynchronous operation
of releasing the Elastic IP address
     */
    public CompletableFuture<ReleaseAddressResponse> releaseEC2AddressAsync(String
allocId) {
        ReleaseAddressRequest request = ReleaseAddressRequest.builder()
            .allocationId(allocId)
            .build();

        CompletableFuture<ReleaseAddressResponse> response =
getAsyncClient().releaseAddress(request);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to release Elastic IP address",
ex);
            }
        });

        return response;
```

```
    }

    /**
     * Disassociates an Elastic IP address from an instance asynchronously.
     *
     * @param associationId The ID of the association you want to disassociate.
     * @return a {@link CompletableFuture} representing the asynchronous operation
of disassociating the address. The
     *         {@link CompletableFuture} will complete with a {@link
DisassociateAddressResponse} when the operation is
     *         finished.
     * @throws RuntimeException if the disassociation of the address fails.
     */
    public CompletableFuture<DisassociateAddressResponse>
disassociateAddressAsync(String associationId) {
        Ec2AsyncClient ec2 = getAsyncClient();
        DisassociateAddressRequest addressRequest =
DisassociateAddressRequest.builder()
            .associationId(associationId)
            .build();

        // Disassociate the address asynchronously.
        CompletableFuture<DisassociateAddressResponse> response =
ec2.disassociateAddress(addressRequest);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to disassociate address", ex);
            }
        });

        return response;
    }

    /**
     * Associates an Elastic IP address with an EC2 instance asynchronously.
     *
     * @param instanceId    the ID of the EC2 instance to associate the Elastic IP
address with
     * @param allocationId  the allocation ID of the Elastic IP address to associate
     * @return a {@link CompletableFuture} that completes with the association ID
when the operation is successful,
     *         or throws a {@link RuntimeException} if the operation fails
     */
```

```
   public CompletableFuture<String> associateAddressAsync(String instanceId, String
allocationId) {
       AssociateAddressRequest associateRequest = AssociateAddressRequest.builder()
           .instanceId(instanceId)
           .allocationId(allocationId)
           .build();

       CompletableFuture<AssociateAddressResponse> responseFuture =
getAsyncClient().associateAddress(associateRequest);
       return responseFuture.thenApply(response -> {
           if (response.associationId() != null) {
               return response.associationId();
           } else {
               throw new RuntimeException("Association ID is null after associating
address.");
           }
       }).whenComplete((result, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to associate address", ex);
           }
       });
   }

   /**
    * Allocates an Elastic IP address asynchronously in the VPC domain.
    *
    * @return a {@link CompletableFuture} containing the allocation ID of the
allocated Elastic IP address
    */
   public CompletableFuture<String> allocateAddressAsync() {
       AllocateAddressRequest allocateRequest = AllocateAddressRequest.builder()
           .domain(DomainType.VPC)
           .build();

       CompletableFuture<AllocateAddressResponse> responseFuture =
getAsyncClient().allocateAddress(allocateRequest);
       return
responseFuture.thenApply(AllocateAddressResponse::allocationId).whenComplete((result,
ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to allocate address", ex);
           }
       });
   }
```

```
   /**
    * Asynchronously describes the state of an EC2 instance.
    * The paginator helps you iterate over multiple pages of results.
    *
    * @param newInstanceId the ID of the EC2 instance to describe
    * @return a {@link CompletableFuture} that, when completed, contains a string
describing the state of the EC2 instance
    */
   public CompletableFuture<String> describeEC2InstancesAsync(String newInstanceId)
{
       DescribeInstancesRequest request = DescribeInstancesRequest.builder()
           .instanceIds(newInstanceId)
           .build();

       DescribeInstancesPublisher paginator =
getAsyncClient().describeInstancesPaginator(request);
       AtomicReference<String> publicIpAddressRef = new AtomicReference<>();
       return paginator.subscribe(response -> {
           response.reservations().stream()
               .flatMap(reservation -> reservation.instances().stream())
               .filter(instance -> instance.instanceId().equals(newInstanceId))
               .findFirst()
               .ifPresent(instance ->
publicIpAddressRef.set(instance.publicIpAddress()));
       }).thenApply(v -> {
           String publicIpAddress = publicIpAddressRef.get();
           if (publicIpAddress == null) {
               throw new RuntimeException("Instance with ID " + newInstanceId + "
not found.");
           }
           return publicIpAddress;
       }).exceptionally(ex -> {
           logger.info("Failed to describe instances: " + ex.getMessage());
           throw new RuntimeException("Failed to describe instances", ex);
       });
   }

   /**
    * Runs an EC2 instance asynchronously.
    *
    * @param instanceType The instance type to use for the EC2 instance.
    * @param keyName The name of the key pair to associate with the EC2 instance.
```

```
    * @param groupName The name of the security group to associate with the EC2
instance.
    * @param amiId The ID of the Amazon Machine Image (AMI) to use for the EC2
instance.
    * @return A {@link CompletableFuture} that completes with the ID of the started
EC2 instance.
    * @throws RuntimeException If there is an error running the EC2 instance.
    */
   public CompletableFuture<String> runInstanceAsync(String instanceType, String
keyName, String groupName, String amiId) {
       RunInstancesRequest runRequest = RunInstancesRequest.builder()
           .instanceType(instanceType)
           .keyName(keyName)
           .securityGroups(groupName)
           .maxCount(1)
           .minCount(1)
           .imageId(amiId)
           .build();

       CompletableFuture<RunInstancesResponse> responseFuture =
getAsyncClient().runInstances(runRequest);
       return responseFuture.thenCompose(response -> {
           String instanceIdVal = response.instances().get(0).instanceId();
           System.out.println("Going to start an EC2 instance and use a waiter to
wait for it to be in running state");
           return getAsyncClient().waiter()
               .waitUntilInstanceExists(r -> r.instanceIds(instanceIdVal))
               .thenCompose(waitResponse -> getAsyncClient().waiter()
                   .waitUntilInstanceRunning(r -> r.instanceIds(instanceIdVal))
                   .thenApply(runningResponse -> instanceIdVal));
       }).exceptionally(throwable -> {
           // Handle any exceptions that occurred during the async call
           throw new RuntimeException("Failed to run EC2 instance: " +
throwable.getMessage(), throwable);
       });
   }

   /**
    * Asynchronously retrieves the instance types available in the current AWS
region.
    * <p>
    * This method uses the AWS SDK's asynchronous API to fetch the available
instance types
```

```
    * and then processes the response. It logs the memory information, network
information,
    * and instance type for each instance type returned. Additionally, it returns a
    * {@link CompletableFuture} that resolves to the instance type string for the
"t2.2xlarge"
    * instance type, if it is found in the response. If the "t2.2xlarge" instance
type is not
    * found, an empty string is returned.
    * </p>
    *
    * @return a {@link CompletableFuture} that resolves to the instance type string
for the
    * "t2.2xlarge" instance type, or an empty string if the instance type is not
found
    */
   public CompletableFuture<String> getInstanceTypesAsync() {
       DescribeInstanceTypesRequest typesRequest =
DescribeInstanceTypesRequest.builder()
           .maxResults(10)
           .build();

       CompletableFuture<DescribeInstanceTypesResponse> response =
getAsyncClient().describeInstanceTypes(typesRequest);
       response.whenComplete((resp, ex) -> {
           if (resp != null) {
               List<InstanceTypeInfo> instanceTypes = resp.instanceTypes();
               for (InstanceTypeInfo type : instanceTypes) {
                   logger.info("The memory information of this type is " +
type.memoryInfo().sizeInMiB());
                   logger.info("Network information is " +
type.networkInfo().toString());
                   logger.info("Instance type is " +
type.instanceType().toString());
               }
           } else {
               throw (RuntimeException) ex;
           }
       });

       return response.thenApply(resp -> {
           for (InstanceTypeInfo type : resp.instanceTypes()) {
               String instanceType = type.instanceType().toString();
               if (instanceType.equals("t2.2xlarge")) {
                   return instanceType;
```

```
                }
            }
            return "";
        });
    }

    /**
     * Asynchronously describes an AWS EC2 image with the specified image ID.
     *
     * @param imageId the ID of the image to be described
     * @return a {@link CompletableFuture} that, when completed, contains the ID of
the described image
     * @throws RuntimeException if no images are found with the provided image ID,
or if an error occurs during the AWS API call
     */
    public CompletableFuture<String> describeImageAsync(String imageId) {
        DescribeImagesRequest imagesRequest = DescribeImagesRequest.builder()
            .imageIds(imageId)
            .build();

        AtomicReference<String> imageIdRef = new AtomicReference<>();
        DescribeImagesPublisher paginator =
getAsyncClient().describeImagesPaginator(imagesRequest);
        return paginator.subscribe(response -> {
            response.images().stream()
                .filter(image -> image.imageId().equals(imageId))
                .findFirst()
                .ifPresent(image -> {
                    logger.info("The description of the image is " +
image.description());
                    logger.info("The name of the image is " + image.name());
                    imageIdRef.set(image.imageId());
                });
        }).thenApply(v -> {
            String id = imageIdRef.get();
            if (id == null) {
                throw new RuntimeException("No images found with the provided image
ID.");
            }
            return id;
        }).exceptionally(ex -> {
            logger.info("Failed to describe image: " + ex.getMessage());
            throw new RuntimeException("Failed to describe image", ex);
        });
```

```
    }

    /**
     * Retrieves the parameter values asynchronously using the AWS Systems Manager
(SSM) API.
     *
     * @return a {@link CompletableFuture} that holds the response from the SSM API
call to get parameters by path
     */
    public CompletableFuture<GetParametersByPathResponse> getParaValuesAsync() {
        SsmAsyncClient ssmClient = SsmAsyncClient.builder()
            .region(Region.US_EAST_1)
            .build();

        GetParametersByPathRequest parameterRequest =
GetParametersByPathRequest.builder()
            .path("/aws/service/ami-amazon-linux-latest")
            .build();

        // Create a CompletableFuture to hold the final result.
        CompletableFuture<GetParametersByPathResponse> responseFuture = new
CompletableFuture<>();
        ssmClient.getParametersByPath(parameterRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    responseFuture.completeExceptionally(new
RuntimeException("Failed to get parameters by path", exception));
                } else {
                    responseFuture.complete(response);
                }
            });

        return responseFuture;
    }


    /**
     * Asynchronously describes the security groups for the specified group ID.
     *
     * @param groupName the name of the security group to describe
     * @return a {@link CompletableFuture} that represents the asynchronous
operation
     *         of describing the security groups. The future will complete with a
     *         {@link DescribeSecurityGroupsResponse} object that contains the
```

```
     *         security group information.
     */
    public CompletableFuture<String> describeSecurityGroupArnByNameAsync(String
groupName) {
        DescribeSecurityGroupsRequest request =
DescribeSecurityGroupsRequest.builder()
            .groupNames(groupName)
            .build();

        DescribeSecurityGroupsPublisher paginator =
getAsyncClient().describeSecurityGroupsPaginator(request);
        AtomicReference<String> groupIdRef = new AtomicReference<>();
        return paginator.subscribe(response -> {
            response.securityGroups().stream()
                .filter(securityGroup ->
securityGroup.groupName().equals(groupName))
                .findFirst()
                .ifPresent(securityGroup ->
groupIdRef.set(securityGroup.groupId()));
        }).thenApply(v -> {
            String groupId = groupIdRef.get();
            if (groupId == null) {
                throw new RuntimeException("No security group found with the name: "
+ groupName);
            }
            return groupId;
        }).exceptionally(ex -> {
            logger.info("Failed to describe security group: " + ex.getMessage());
            throw new RuntimeException("Failed to describe security group", ex);
        });
    }

    /**
     * Creates a new security group asynchronously with the specified group name,
description, and VPC ID. It also
     * authorizes inbound traffic on ports 80 and 22 from the specified IP address.
     *
     * @param groupName    the name of the security group to create
     * @param groupDesc    the description of the security group
     * @param vpcId        the ID of the VPC in which to create the security group
     * @param myIpAddress  the IP address from which to allow inbound traffic (e.g.,
"192.168.1.1/0" to allow traffic from
     *                     any IP address in the 192.168.1.0/24 subnet)
```

```
    * @return a CompletableFuture that, when completed, returns the ID of the
created security group
    * @throws RuntimeException if there was a failure creating the security group
or authorizing the inbound traffic
    */
   public CompletableFuture<String> createSecurityGroupAsync(String groupName,
String groupDesc, String vpcId, String myIpAddress) {
       CreateSecurityGroupRequest createRequest =
CreateSecurityGroupRequest.builder()
           .groupName(groupName)
           .description(groupDesc)
           .vpcId(vpcId)
           .build();

       return getAsyncClient().createSecurityGroup(createRequest)
           .thenCompose(createResponse -> {
               String groupId = createResponse.groupId();
               IpRange ipRange = IpRange.builder()
                   .cidrIp(myIpAddress + "/32")
                   .build();

               IpPermission ipPerm = IpPermission.builder()
                   .ipProtocol("tcp")
                   .toPort(80)
                   .fromPort(80)
                   .ipRanges(ipRange)
                   .build();

               IpPermission ipPerm2 = IpPermission.builder()
                   .ipProtocol("tcp")
                   .toPort(22)
                   .fromPort(22)
                   .ipRanges(ipRange)
                   .build();

               AuthorizeSecurityGroupIngressRequest authRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                   .groupName(groupName)
                   .ipPermissions(ipPerm, ipPerm2)
                   .build();

               return getAsyncClient().authorizeSecurityGroupIngress(authRequest)
                   .thenApply(authResponse -> groupId);
           })
```

```
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    if (exception instanceof CompletionException &&
exception.getCause() instanceof Ec2Exception) {
                        throw (Ec2Exception) exception.getCause();
                    } else {
                        throw new RuntimeException("Failed to create security group:
" + exception.getMessage(), exception);
                    }
                }
            });
   }

   /**
    * Asynchronously describes the key pairs associated with the current AWS
account.
    *
    * @return a {@link CompletableFuture} containing the {@link
DescribeKeyPairsResponse} object, which provides
    * information about the key pairs.
    */
   public CompletableFuture<DescribeKeyPairsResponse> describeKeysAsync() {
       CompletableFuture<DescribeKeyPairsResponse> responseFuture =
getAsyncClient().describeKeyPairs();
       responseFuture.whenComplete((response, exception) -> {
           if (exception != null) {
             throw new RuntimeException("Failed to describe key pairs: " +
exception.getMessage(), exception);
           }
       });

       return responseFuture;
   }

   /**
    * Creates a new key pair asynchronously.
    *
    * @param keyName the name of the key pair to create
    * @param fileName the name of the file to write the key material to
    * @return a {@link CompletableFuture} that represents the asynchronous
operation
    *         of creating the key pair and writing the key material to a file
    */
```

```
   public CompletableFuture<CreateKeyPairResponse> createKeyPairAsync(String
keyName, String fileName) {
       CreateKeyPairRequest request = CreateKeyPairRequest.builder()
           .keyName(keyName)
           .build();

       CompletableFuture<CreateKeyPairResponse> responseFuture =
getAsyncClient().createKeyPair(request);
       responseFuture.whenComplete((response, exception) -> {
           if (response != null) {
               try {
                   BufferedWriter writer = new BufferedWriter(new
FileWriter(fileName));
                   writer.write(response.keyMaterial());
                   writer.close();
               } catch (IOException e) {
                   throw new RuntimeException("Failed to write key material to
file: " + e.getMessage(), e);
               }
           } else {
               throw new RuntimeException("Failed to create key pair: " +
exception.getMessage(), exception);
           }
       });

       return responseFuture;
   }

   /**
    * Describes the first default VPC asynchronously and using a paginator.
    *
    * @return a {@link CompletableFuture} that, when completed, contains the first
default VPC found.\
    */
   public CompletableFuture<Vpc> describeFirstEC2VpcAsync() {
       Filter myFilter = Filter.builder()
           .name("is-default")
           .values("true")
           .build();

       DescribeVpcsRequest request = DescribeVpcsRequest.builder()
           .filters(myFilter)
           .build();
```

```
        DescribeVpcsPublisher paginator =
getAsyncClient().describeVpcsPaginator(request);
        AtomicReference<Vpc> vpcRef = new AtomicReference<>();
        return paginator.subscribe(response -> {
            response.vpcs().stream()
                .findFirst()
                .ifPresent(vpcRef::set);
        }).thenApply(v -> {
            Vpc vpc = vpcRef.get();
            if (vpc == null) {
                throw new RuntimeException("Default VPC not found");
            }
            return vpc;
        }).exceptionally(ex -> {
            logger.info("Failed to describe VPCs: " + ex.getMessage());
            throw new RuntimeException("Failed to describe VPCs", ex);
        });
    }

    /**
     * Stops the EC2 instance with the specified ID asynchronously and waits for the
instance to stop.
     *
     * @param instanceId the ID of the EC2 instance to stop
     * @return a {@link CompletableFuture} that completes when the instance has been
stopped, or exceptionally if an error occurs
     */
    public CompletableFuture<Void> stopInstanceAsync(String instanceId) {
        StopInstancesRequest stopRequest = StopInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();

        DescribeInstancesRequest describeRequest =
DescribeInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();

        Ec2AsyncWaiter ec2Waiter = Ec2AsyncWaiter.builder()
            .client(getAsyncClient())
            .build();

        CompletableFuture<Void> resultFuture = new CompletableFuture<>();
        logger.info("Stopping instance " + instanceId + " and waiting for it to
stop.");
```

```
        getAsyncClient().stopInstances(stopRequest)
            .thenCompose(response -> {
                if (response.stoppingInstances().isEmpty()) {
                    return CompletableFuture.failedFuture(new RuntimeException("No
instances were stopped. Please check the instance ID: " + instanceId));
                }
                return ec2Waiter.waitUntilInstanceStopped(describeRequest);
            })
            .thenAccept(waiterResponse -> {
                logger.info("Successfully stopped instance " + instanceId);
                resultFuture.complete(null);
            })
            .exceptionally(throwable -> {
                logger.error("Failed to stop instance " + instanceId + ": " +
throwable.getMessage(), throwable);
                resultFuture.completeExceptionally(new RuntimeException("Failed to
stop instance: " + throwable.getMessage(), throwable));
                return null;
            });

        return resultFuture;
    }

    /**
     * Starts an Amazon EC2 instance asynchronously and waits until it is in the
"running" state.
     *
     * @param instanceId the ID of the instance to start
     * @return a {@link CompletableFuture} that completes when the instance has been
started and is in the "running" state, or exceptionally if an error occurs
     */
    public CompletableFuture<Void> startInstanceAsync(String instanceId) {
        StartInstancesRequest startRequest = StartInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();

        Ec2AsyncWaiter ec2Waiter = Ec2AsyncWaiter.builder()
            .client(getAsyncClient())
            .build();

        DescribeInstancesRequest describeRequest =
DescribeInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();
```

```
        logger.info("Starting instance " + instanceId + " and waiting for it to
 run.");
        CompletableFuture<Void> resultFuture = new CompletableFuture<>();
        return getAsyncClient().startInstances(startRequest)
            .thenCompose(response ->
                ec2Waiter.waitUntilInstanceRunning(describeRequest)
            )
            .thenAccept(waiterResponse -> {
                logger.info("Successfully started instance " + instanceId);
                resultFuture.complete(null);
            })
            .exceptionally(throwable -> {
                resultFuture.completeExceptionally(new RuntimeException("Failed to
 start instance: " + throwable.getMessage(), throwable));
                return null;
            });
    }

}
```

- Para obtener información sobre la API, consulte los siguientes temas en la referencia de la API de AWS SDK for Java 2.x .
  - AllocateAddress
  - AssociateAddress
  - AuthorizeSecurityGroupIngress
  - CreateKeyPair
  - CreateSecurityGroup
  - DeleteKeyPair
  - DeleteSecurityGroup
  - DescribeImages
  - DescribeInstanceTypes
  - DescribeInstances
  - DescribeKeyPairs
  - DescribeSecurityGroups
  - DisassociateAddress

- ReleaseAddress
- RunInstances
- StartInstances
- StopInstances
- TerminateInstances
- UnmonitorInstances

Acciones

`AllocateAddress`

En el siguiente ejemplo de código, se muestra cómo utilizar `AllocateAddress`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Allocates an Elastic IP address asynchronously in the VPC domain.
    *
    * @return a {@link CompletableFuture} containing the allocation ID of the
allocated Elastic IP address
    */
   public CompletableFuture<String> allocateAddressAsync() {
       AllocateAddressRequest allocateRequest = AllocateAddressRequest.builder()
           .domain(DomainType.VPC)
           .build();

       CompletableFuture<AllocateAddressResponse> responseFuture =
getAsyncClient().allocateAddress(allocateRequest);
       return
responseFuture.thenApply(AllocateAddressResponse::allocationId).whenComplete((result,
ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to allocate address", ex);
```

```
            }
        });
    }
```

- Para obtener más información sobre la API, consulta AllocateAddressla Referencia AWS SDK for Java 2.x de la API.

`AssociateAddress`

En el siguiente ejemplo de código, se muestra cómo utilizar `AssociateAddress`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Associates an Elastic IP address with an EC2 instance asynchronously.
     *
     * @param instanceId    the ID of the EC2 instance to associate the Elastic IP
address with
     * @param allocationId  the allocation ID of the Elastic IP address to associate
     * @return a {@link CompletableFuture} that completes with the association ID
when the operation is successful,
     *         or throws a {@link RuntimeException} if the operation fails
     */
    public CompletableFuture<String> associateAddressAsync(String instanceId, String
allocationId) {
        AssociateAddressRequest associateRequest = AssociateAddressRequest.builder()
            .instanceId(instanceId)
            .allocationId(allocationId)
            .build();

        CompletableFuture<AssociateAddressResponse> responseFuture =
getAsyncClient().associateAddress(associateRequest);
        return responseFuture.thenApply(response -> {
            if (response.associationId() != null) {
```

```
                return response.associationId();
            } else {
                throw new RuntimeException("Association ID is null after associating
address.");
            }
        }).whenComplete((result, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to associate address", ex);
            }
        });
    }
```

- Para obtener más información sobre la API, consulta AssociateAddressla Referencia AWS SDK for Java 2.x de la API.

`AuthorizeSecurityGroupIngress`

En el siguiente ejemplo de código, se muestra cómo utilizar `AuthorizeSecurityGroupIngress`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new security group asynchronously with the specified group name,
description, and VPC ID. It also
     * authorizes inbound traffic on ports 80 and 22 from the specified IP address.
     *
     * @param groupName    the name of the security group to create
     * @param groupDesc    the description of the security group
     * @param vpcId        the ID of the VPC in which to create the security group
     * @param myIpAddress  the IP address from which to allow inbound traffic (e.g.,
"192.168.1.1/0" to allow traffic from
     *                     any IP address in the 192.168.1.0/24 subnet)
     * @return a CompletableFuture that, when completed, returns the ID of the
created security group
```

```
     * @throws RuntimeException if there was a failure creating the security group
or authorizing the inbound traffic
     */
    public CompletableFuture<String> createSecurityGroupAsync(String groupName,
String groupDesc, String vpcId, String myIpAddress) {
        CreateSecurityGroupRequest createRequest =
CreateSecurityGroupRequest.builder()
            .groupName(groupName)
            .description(groupDesc)
            .vpcId(vpcId)
            .build();

        return getAsyncClient().createSecurityGroup(createRequest)
            .thenCompose(createResponse -> {
                String groupId = createResponse.groupId();
                IpRange ipRange = IpRange.builder()
                    .cidrIp(myIpAddress + "/32")
                    .build();

                IpPermission ipPerm = IpPermission.builder()
                    .ipProtocol("tcp")
                    .toPort(80)
                    .fromPort(80)
                    .ipRanges(ipRange)
                    .build();

                IpPermission ipPerm2 = IpPermission.builder()
                    .ipProtocol("tcp")
                    .toPort(22)
                    .fromPort(22)
                    .ipRanges(ipRange)
                    .build();

                AuthorizeSecurityGroupIngressRequest authRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                    .groupName(groupName)
                    .ipPermissions(ipPerm, ipPerm2)
                    .build();

                return getAsyncClient().authorizeSecurityGroupIngress(authRequest)
                    .thenApply(authResponse -> groupId);
            })
            .whenComplete((result, exception) -> {
                if (exception != null) {
```

```
                    if (exception instanceof CompletionException &&
exception.getCause() instanceof Ec2Exception) {
                        throw (Ec2Exception) exception.getCause();
                    } else {
                        throw new RuntimeException("Failed to create security group:
" + exception.getMessage(), exception);
                    }
                }
            });
    }
```

- Para obtener más información sobre la API, consulta AuthorizeSecurityGroupIngressla Referencia AWS SDK for Java 2.x de la API.

`CreateKeyPair`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateKeyPair`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new key pair asynchronously.
     *
     * @param keyName the name of the key pair to create
     * @param fileName the name of the file to write the key material to
     * @return a {@link CompletableFuture} that represents the asynchronous
operation
     *         of creating the key pair and writing the key material to a file
     */
    public CompletableFuture<CreateKeyPairResponse> createKeyPairAsync(String
keyName, String fileName) {
        CreateKeyPairRequest request = CreateKeyPairRequest.builder()
            .keyName(keyName)
            .build();
```

```
        CompletableFuture<CreateKeyPairResponse> responseFuture =
getAsyncClient().createKeyPair(request);
        responseFuture.whenComplete((response, exception) -> {
            if (response != null) {
                try {
                    BufferedWriter writer = new BufferedWriter(new
FileWriter(fileName));
                    writer.write(response.keyMaterial());
                    writer.close();
                } catch (IOException e) {
                    throw new RuntimeException("Failed to write key material to
file: " + e.getMessage(), e);
                }
            } else {
                throw new RuntimeException("Failed to create key pair: " +
exception.getMessage(), exception);
            }
        });

        return responseFuture;
    }
```

- Para obtener más información sobre la API, consulta CreateKeyPairla Referencia AWS SDK for Java 2.x de la API.

`CreateSecurityGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateSecurityGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
```

```
    * Creates a new security group asynchronously with the specified group name,
description, and VPC ID. It also
    * authorizes inbound traffic on ports 80 and 22 from the specified IP address.
    *
    * @param groupName    the name of the security group to create
    * @param groupDesc    the description of the security group
    * @param vpcId        the ID of the VPC in which to create the security group
    * @param myIpAddress  the IP address from which to allow inbound traffic (e.g.,
"192.168.1.1/0" to allow traffic from
    *                     any IP address in the 192.168.1.0/24 subnet)
    * @return a CompletableFuture that, when completed, returns the ID of the
created security group
    * @throws RuntimeException if there was a failure creating the security group
or authorizing the inbound traffic
    */
   public CompletableFuture<String> createSecurityGroupAsync(String groupName,
String groupDesc, String vpcId, String myIpAddress) {
       CreateSecurityGroupRequest createRequest =
CreateSecurityGroupRequest.builder()
           .groupName(groupName)
           .description(groupDesc)
           .vpcId(vpcId)
           .build();

       return getAsyncClient().createSecurityGroup(createRequest)
           .thenCompose(createResponse -> {
               String groupId = createResponse.groupId();
               IpRange ipRange = IpRange.builder()
                   .cidrIp(myIpAddress + "/32")
                   .build();

               IpPermission ipPerm = IpPermission.builder()
                   .ipProtocol("tcp")
                   .toPort(80)
                   .fromPort(80)
                   .ipRanges(ipRange)
                   .build();

               IpPermission ipPerm2 = IpPermission.builder()
                   .ipProtocol("tcp")
                   .toPort(22)
                   .fromPort(22)
                   .ipRanges(ipRange)
                   .build();
```

```
                AuthorizeSecurityGroupIngressRequest authRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                    .groupName(groupName)
                    .ipPermissions(ipPerm, ipPerm2)
                    .build();

                return getAsyncClient().authorizeSecurityGroupIngress(authRequest)
                    .thenApply(authResponse -> groupId);
            })
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    if (exception instanceof CompletionException &&
exception.getCause() instanceof Ec2Exception) {
                        throw (Ec2Exception) exception.getCause();
                    } else {
                        throw new RuntimeException("Failed to create security group:
" + exception.getMessage(), exception);
                    }
                }
            });
    }
```

- Para obtener más información sobre la API, consulta CreateSecurityGroupla Referencia AWS SDK for Java 2.x de la API.

`DeleteKeyPair`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteKeyPair`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a key pair asynchronously.
```

```
    *
    * @param keyPair the name of the key pair to delete
    * @return a {@link CompletableFuture} that represents the result of the
asynchronous operation.
    *         The {@link CompletableFuture} will complete with a {@link
DeleteKeyPairResponse} object
    *         that provides the result of the key pair deletion operation.
    */
   public CompletableFuture<DeleteKeyPairResponse> deleteKeysAsync(String keyPair)
{
       DeleteKeyPairRequest request = DeleteKeyPairRequest.builder()
           .keyName(keyPair)
           .build();

       // Initiate the asynchronous request to delete the key pair.
       CompletableFuture<DeleteKeyPairResponse> response =
getAsyncClient().deleteKeyPair(request);
       return response.whenComplete((resp, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to delete key pair: " + keyPair,
ex);
           } else if (resp == null) {
               throw new RuntimeException("No response received for deleting key
pair: " + keyPair);
           }
       });
   }
```

- Para obtener más información sobre la API, consulta DeleteKeyPairla Referencia AWS SDK for Java 2.x de la API.

`DeleteSecurityGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteSecurityGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes an EC2 security group asynchronously.
     *
     * @param groupId the ID of the security group to delete
     * @return a CompletableFuture that completes when the security group is deleted
     */
    public CompletableFuture<Void> deleteEC2SecGroupAsync(String groupId) {
        DeleteSecurityGroupRequest request = DeleteSecurityGroupRequest.builder()
            .groupId(groupId)
            .build();

        CompletableFuture<DeleteSecurityGroupResponse> response =
getAsyncClient().deleteSecurityGroup(request);
        return response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to delete security group with Id
" + groupId, ex);
            } else if (resp == null) {
                throw new RuntimeException("No response received for deleting
security group with Id " + groupId);
            }
        }).thenApply(resp -> null);
    }
```

- Para obtener más información sobre la API, consulta DeleteSecurityGroupla Referencia AWS SDK for Java 2.x de la API.

`DescribeInstanceTypes`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeInstanceTypes`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously retrieves the instance types available in the current AWS
region.
    * <p>
    * This method uses the AWS SDK's asynchronous API to fetch the available
instance types
    * and then processes the response. It logs the memory information, network
information,
    * and instance type for each instance type returned. Additionally, it returns a
    * {@link CompletableFuture} that resolves to the instance type string for the
"t2.2xlarge"
    * instance type, if it is found in the response. If the "t2.2xlarge" instance
type is not
    * found, an empty string is returned.
    * </p>
    *
    * @return a {@link CompletableFuture} that resolves to the instance type string
for the
    * "t2.2xlarge" instance type, or an empty string if the instance type is not
found
    */
   public CompletableFuture<String> getInstanceTypesAsync() {
       DescribeInstanceTypesRequest typesRequest =
DescribeInstanceTypesRequest.builder()
           .maxResults(10)
           .build();

       CompletableFuture<DescribeInstanceTypesResponse> response =
getAsyncClient().describeInstanceTypes(typesRequest);
       response.whenComplete((resp, ex) -> {
           if (resp != null) {
               List<InstanceTypeInfo> instanceTypes = resp.instanceTypes();
               for (InstanceTypeInfo type : instanceTypes) {
```

```
                    logger.info("The memory information of this type is " +
type.memoryInfo().sizeInMiB());
                    logger.info("Network information is " +
type.networkInfo().toString());
                    logger.info("Instance type is " +
type.instanceType().toString());
                }
            } else {
                throw (RuntimeException) ex;
            }
        });

        return response.thenApply(resp -> {
            for (InstanceTypeInfo type : resp.instanceTypes()) {
                String instanceType = type.instanceType().toString();
                if (instanceType.equals("t2.2xlarge")) {
                    return instanceType;
                }
            }
            return "";
        });
    }
```

- Para obtener más información sobre la API, consulta DescribeInstanceTypesla Referencia AWS SDK for Java 2.x de la API.

`DescribeInstances`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeInstances`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously describes the state of an EC2 instance.
```

```
    * The paginator helps you iterate over multiple pages of results.
    *
    * @param newInstanceId the ID of the EC2 instance to describe
    * @return a {@link CompletableFuture} that, when completed, contains a string
describing the state of the EC2 instance
    */
   public CompletableFuture<String> describeEC2InstancesAsync(String newInstanceId)
{
       DescribeInstancesRequest request = DescribeInstancesRequest.builder()
           .instanceIds(newInstanceId)
           .build();

       DescribeInstancesPublisher paginator =
getAsyncClient().describeInstancesPaginator(request);
       AtomicReference<String> publicIpAddressRef = new AtomicReference<>();
       return paginator.subscribe(response -> {
           response.reservations().stream()
               .flatMap(reservation -> reservation.instances().stream())
               .filter(instance -> instance.instanceId().equals(newInstanceId))
               .findFirst()
               .ifPresent(instance ->
publicIpAddressRef.set(instance.publicIpAddress()));
       }).thenApply(v -> {
           String publicIpAddress = publicIpAddressRef.get();
           if (publicIpAddress == null) {
               throw new RuntimeException("Instance with ID " + newInstanceId + "
not found.");
           }
           return publicIpAddress;
       }).exceptionally(ex -> {
           logger.info("Failed to describe instances: " + ex.getMessage());
           throw new RuntimeException("Failed to describe instances", ex);
       });
   }
```

- Para obtener más información sobre la API, consulta DescribeInstancesla Referencia AWS SDK for Java 2.x de la API.

`DescribeKeyPairs`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeKeyPairs`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously describes the key pairs associated with the current AWS
account.
    *
    * @return a {@link CompletableFuture} containing the {@link
DescribeKeyPairsResponse} object, which provides
    * information about the key pairs.
    */
   public CompletableFuture<DescribeKeyPairsResponse> describeKeysAsync() {
       CompletableFuture<DescribeKeyPairsResponse> responseFuture =
getAsyncClient().describeKeyPairs();
       responseFuture.whenComplete((response, exception) -> {
           if (exception != null) {
             throw new RuntimeException("Failed to describe key pairs: " +
exception.getMessage(), exception);
           }
       });

       return responseFuture;
   }
```

- Para obtener más información sobre la API, consulta DescribeKeyPairsla Referencia AWS SDK for Java 2.x de la API.

`DescribeSecurityGroups`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeSecurityGroups`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously describes the security groups for the specified group ID.
    *
    * @param groupName the name of the security group to describe
    * @return a {@link CompletableFuture} that represents the asynchronous
operation
    *         of describing the security groups. The future will complete with a
    *         {@link DescribeSecurityGroupsResponse} object that contains the
    *         security group information.
    */
   public CompletableFuture<String> describeSecurityGroupArnByNameAsync(String
groupName) {
       DescribeSecurityGroupsRequest request =
DescribeSecurityGroupsRequest.builder()
           .groupNames(groupName)
           .build();

       DescribeSecurityGroupsPublisher paginator =
getAsyncClient().describeSecurityGroupsPaginator(request);
       AtomicReference<String> groupIdRef = new AtomicReference<>();
       return paginator.subscribe(response -> {
           response.securityGroups().stream()
               .filter(securityGroup ->
securityGroup.groupName().equals(groupName))
               .findFirst()
               .ifPresent(securityGroup ->
groupIdRef.set(securityGroup.groupId()));
       }).thenApply(v -> {
           String groupId = groupIdRef.get();
           if (groupId == null) {
               throw new RuntimeException("No security group found with the name: "
+ groupName);
           }
```

```
            return groupId;
        }).exceptionally(ex -> {
            logger.info("Failed to describe security group: " + ex.getMessage());
            throw new RuntimeException("Failed to describe security group", ex);
        });
    }
```

- Para obtener más información sobre la API, consulta DescribeSecurityGroupsla Referencia AWS SDK for Java 2.x de la API.

`DisassociateAddress`

En el siguiente ejemplo de código, se muestra cómo utilizar `DisassociateAddress`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Disassociates an Elastic IP address from an instance asynchronously.
     *
     * @param associationId The ID of the association you want to disassociate.
     * @return a {@link CompletableFuture} representing the asynchronous operation
of disassociating the address. The
     *         {@link CompletableFuture} will complete with a {@link
DisassociateAddressResponse} when the operation is
     *         finished.
     * @throws RuntimeException if the disassociation of the address fails.
     */
    public CompletableFuture<DisassociateAddressResponse>
disassociateAddressAsync(String associationId) {
        Ec2AsyncClient ec2 = getAsyncClient();
        DisassociateAddressRequest addressRequest =
DisassociateAddressRequest.builder()
            .associationId(associationId)
            .build();
```

```
        // Disassociate the address asynchronously.
        CompletableFuture<DisassociateAddressResponse> response =
 ec2.disassociateAddress(addressRequest);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
               throw new RuntimeException("Failed to disassociate address", ex);
            }
        });

        return response;
    }
```

- Para obtener más información sobre la API, consulta DisassociateAddressla Referencia AWS SDK for Java 2.x de la API.

`GetPasswordData`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetPasswordData`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.*;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class GetPasswordData {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                   <instanceId>

                Where:
                   instanceId - An instance id value that you can obtain from the
 AWS Management Console.\s
             """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }
        String instanceId = args[0];
        Ec2AsyncClient ec2AsyncClient = Ec2AsyncClient.builder()
            .region(Region.US_EAST_1)
            .build();

        try {
            CompletableFuture<Void> future = getPasswordDataAsync(ec2AsyncClient,
 instanceId);
            future.join();
        } catch (RuntimeException rte) {
            System.err.println("An exception occurred: " + (rte.getCause() != null ?
 rte.getCause().getMessage() : rte.getMessage()));
        }
    }

    /**
     * Fetches the password data for the specified EC2 instance asynchronously.
     *
     * @param ec2AsyncClient the EC2 asynchronous client to use for the request
     * @param instanceId instanceId the ID of the EC2 instance for which you want to
 fetch the password data
     * @return a {@link CompletableFuture} that completes when the password data has
 been fetched
     * @throws RuntimeException if there was a failure in fetching the password data
     */
```

```
    public static CompletableFuture<Void> getPasswordDataAsync(Ec2AsyncClient
 ec2AsyncClient, String instanceId) {
        GetPasswordDataRequest getPasswordDataRequest =
 GetPasswordDataRequest.builder()
            .instanceId(instanceId)
            .build();


        CompletableFuture<GetPasswordDataResponse> response =
 ec2AsyncClient.getPasswordData(getPasswordDataRequest);
        response.whenComplete((getPasswordDataResponse, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to get password data for
 instance: " + instanceId, ex);
            } else if (getPasswordDataResponse == null ||
 getPasswordDataResponse.passwordData().isEmpty()) {
                throw new RuntimeException("No password data found for instance: " +
 instanceId);
            } else {
                String encryptedPasswordData =
 getPasswordDataResponse.passwordData();
                System.out.println("Encrypted Password Data: " +
 encryptedPasswordData);
            }
        });

        return response.thenApply(resp -> null);
    }
}
```

- Para obtener más información sobre la API, consulta GetPasswordDatala Referencia AWS SDK for Java 2.x de la API.

`ReleaseAddress`

En el siguiente ejemplo de código, se muestra cómo utilizar `ReleaseAddress`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Releases an Elastic IP address asynchronously.
    *
    * @param allocId the allocation ID of the Elastic IP address to be released
    * @return a {@link CompletableFuture} representing the asynchronous operation
of releasing the Elastic IP address
    */
   public CompletableFuture<ReleaseAddressResponse> releaseEC2AddressAsync(String
allocId) {
       ReleaseAddressRequest request = ReleaseAddressRequest.builder()
           .allocationId(allocId)
           .build();

       CompletableFuture<ReleaseAddressResponse> response =
getAsyncClient().releaseAddress(request);
       response.whenComplete((resp, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to release Elastic IP address",
ex);
           }
       });

       return response;
   }
```

- Para obtener más información sobre la API, consulta ReleaseAddressla Referencia AWS SDK for Java 2.x de la API.

`RunInstances`

En el siguiente ejemplo de código, se muestra cómo utilizar `RunInstances`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Runs an EC2 instance asynchronously.
    *
    * @param instanceType The instance type to use for the EC2 instance.
    * @param keyName The name of the key pair to associate with the EC2 instance.
    * @param groupName The name of the security group to associate with the EC2
instance.
    * @param amiId The ID of the Amazon Machine Image (AMI) to use for the EC2
instance.
    * @return A {@link CompletableFuture} that completes with the ID of the started
EC2 instance.
    * @throws RuntimeException If there is an error running the EC2 instance.
    */
   public CompletableFuture<String> runInstanceAsync(String instanceType, String
keyName, String groupName, String amiId) {
       RunInstancesRequest runRequest = RunInstancesRequest.builder()
           .instanceType(instanceType)
           .keyName(keyName)
           .securityGroups(groupName)
           .maxCount(1)
           .minCount(1)
           .imageId(amiId)
           .build();

       CompletableFuture<RunInstancesResponse> responseFuture =
getAsyncClient().runInstances(runRequest);
       return responseFuture.thenCompose(response -> {
           String instanceIdVal = response.instances().get(0).instanceId();
           System.out.println("Going to start an EC2 instance and use a waiter to
wait for it to be in running state");
           return getAsyncClient().waiter()
               .waitUntilInstanceExists(r -> r.instanceIds(instanceIdVal))
               .thenCompose(waitResponse -> getAsyncClient().waiter()
                   .waitUntilInstanceRunning(r -> r.instanceIds(instanceIdVal))
```

```
                    .thenApply(runningResponse -> instanceIdVal));
        }).exceptionally(throwable -> {
            // Handle any exceptions that occurred during the async call
            throw new RuntimeException("Failed to run EC2 instance: " +
throwable.getMessage(), throwable);
        });
    }
```

- Para obtener más información sobre la API, consulta RunInstancesla Referencia AWS SDK for Java 2.x de la API.

`StartInstances`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartInstances`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Starts an Amazon EC2 instance asynchronously and waits until it is in the
"running" state.
     *
     * @param instanceId the ID of the instance to start
     * @return a {@link CompletableFuture} that completes when the instance has been
started and is in the "running" state, or exceptionally if an error occurs
     */
    public CompletableFuture<Void> startInstanceAsync(String instanceId) {
        StartInstancesRequest startRequest = StartInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();

        Ec2AsyncWaiter ec2Waiter = Ec2AsyncWaiter.builder()
            .client(getAsyncClient())
            .build();
```

```
        DescribeInstancesRequest describeRequest =
DescribeInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();

        logger.info("Starting instance " + instanceId + " and waiting for it to
run.");
        CompletableFuture<Void> resultFuture = new CompletableFuture<>();
        return getAsyncClient().startInstances(startRequest)
            .thenCompose(response ->
                ec2Waiter.waitUntilInstanceRunning(describeRequest)
            )
            .thenAccept(waiterResponse -> {
                logger.info("Successfully started instance " + instanceId);
                resultFuture.complete(null);
            })
            .exceptionally(throwable -> {
                resultFuture.completeExceptionally(new RuntimeException("Failed to
start instance: " + throwable.getMessage(), throwable));
                return null;
            });
    }
```

- Para obtener más información sobre la API, consulta StartInstancesla Referencia AWS SDK for Java 2.x de la API.

`StopInstances`

En el siguiente ejemplo de código, se muestra cómo utilizar `StopInstances`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
```

```
    * Stops the EC2 instance with the specified ID asynchronously and waits for the
instance to stop.
    *
    * @param instanceId the ID of the EC2 instance to stop
    * @return a {@link CompletableFuture} that completes when the instance has been
stopped, or exceptionally if an error occurs
    */
   public CompletableFuture<Void> stopInstanceAsync(String instanceId) {
       StopInstancesRequest stopRequest = StopInstancesRequest.builder()
           .instanceIds(instanceId)
           .build();

       DescribeInstancesRequest describeRequest =
DescribeInstancesRequest.builder()
           .instanceIds(instanceId)
           .build();

       Ec2AsyncWaiter ec2Waiter = Ec2AsyncWaiter.builder()
           .client(getAsyncClient())
           .build();

       CompletableFuture<Void> resultFuture = new CompletableFuture<>();
       logger.info("Stopping instance " + instanceId + " and waiting for it to
stop.");
       getAsyncClient().stopInstances(stopRequest)
           .thenCompose(response -> {
               if (response.stoppingInstances().isEmpty()) {
                   return CompletableFuture.failedFuture(new RuntimeException("No
instances were stopped. Please check the instance ID: " + instanceId));
               }
               return ec2Waiter.waitUntilInstanceStopped(describeRequest);
           })
           .thenAccept(waiterResponse -> {
               logger.info("Successfully stopped instance " + instanceId);
               resultFuture.complete(null);
           })
           .exceptionally(throwable -> {
               logger.error("Failed to stop instance " + instanceId + ": " +
throwable.getMessage(), throwable);
               resultFuture.completeExceptionally(new RuntimeException("Failed to
stop instance: " + throwable.getMessage(), throwable));
               return null;
           });
```

```
        return resultFuture;
    }
```

- Para obtener más información sobre la API, consulta StopInstancesla Referencia AWS SDK for Java 2.x de la API.

`TerminateInstances`

En el siguiente ejemplo de código, se muestra cómo utilizar `TerminateInstances`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Terminates an EC2 instance asynchronously and waits for it to reach the
terminated state.
     *
     * @param instanceId the ID of the EC2 instance to terminate
     * @return a {@link CompletableFuture} that completes when the instance has been
terminated
     * @throws RuntimeException if there is no response from the AWS SDK or if there
is a failure during the termination process
     */
    public CompletableFuture<Object> terminateEC2Async(String instanceId) {
        TerminateInstancesRequest terminateRequest =
TerminateInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();

        CompletableFuture<TerminateInstancesResponse> responseFuture =
getAsyncClient().terminateInstances(terminateRequest);
        return responseFuture.thenCompose(terminateResponse -> {
            if (terminateResponse == null) {
                throw new RuntimeException("No response received for terminating
instance " + instanceId);
```

```
            }
            System.out.println("Going to terminate an EC2 instance and use a waiter
to wait for it to be in terminated state");
            return getAsyncClient().waiter()
                .waitUntilInstanceTerminated(r -> r.instanceIds(instanceId))
                .thenApply(waiterResponse -> null);
        }).exceptionally(throwable -> {
            // Handle any exceptions that occurred during the async call
            throw new RuntimeException("Failed to terminate EC2 instance: " +
throwable.getMessage(), throwable);
        });
    }
```

- Para obtener más información sobre la API, consulta TerminateInstancesla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación y administración de un servicio resiliente

El siguiente ejemplo de código muestra cómo crear un servicio web con equilibrio de carga que muestre recomendaciones de libros, películas y canciones. El ejemplo muestra cómo responde el servicio a los errores y cómo reestructurarlo para aumentar la resiliencia cuando se produzcan errores.

- Utilice un grupo de Amazon EC2 Auto Scaling para crear instancias de Amazon Elastic Compute Cloud (Amazon EC2) basadas en una plantilla de lanzamiento y para mantener el número de instancias dentro de un rango específico.
- Administre y distribuya las solicitudes HTTP con Elastic Load Balancing.
- Supervise el estado de las instancias de un grupo de escalado automático y reenvíe las solicitudes solo a las instancias en buen estado.
- Ejecute un servidor web Python en cada instancia de EC2 para administrar las solicitudes HTTP. El servidor web responde con recomendaciones y comprobaciones de estado.
- Simule un servicio de recomendaciones con una tabla de Amazon DynamoDB.
- Controle la respuesta del servidor web a las solicitudes y las comprobaciones de estado actualizando AWS Systems Manager los parámetros.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute el escenario interactivo en un símbolo del sistema.

```
public class Main {

    public static final String fileName = "C:\\AWS\\resworkflow\
\recommendations.json"; // Modify file location.
    public static final String tableName = "doc-example-recommendation-service";
    public static final String startScript = "C:\\AWS\\resworkflow\
\server_startup_script.sh"; // Modify file location.
    public static final String policyFile = "C:\\AWS\\resworkflow\
\instance_policy.json"; // Modify file location.
    public static final String ssmJSON = "C:\\AWS\\resworkflow\
\ssm_only_policy.json"; // Modify file location.
    public static final String failureResponse = "doc-example-resilient-
architecture-failure-response";
    public static final String healthCheck = "doc-example-resilient-architecture-
health-check";
    public static final String templateName = "doc-example-resilience-template";
    public static final String roleName = "doc-example-resilience-role";
    public static final String policyName = "doc-example-resilience-pol";
    public static final String profileName = "doc-example-resilience-prof";

    public static final String badCredsProfileName = "doc-example-resilience-prof-
bc";

    public static final String targetGroupName = "doc-example-resilience-tg";
    public static final String autoScalingGroupName = "doc-example-resilience-
group";
    public static final String lbName = "doc-example-resilience-lb";
    public static final String protocol = "HTTP";
    public static final int port = 80;

    public static final String DASHES = new String(new char[80]).replace("\0", "-");
```

```
   public static void main(String[] args) throws IOException, InterruptedException
{
       Scanner in = new Scanner(System.in);
       Database database = new Database();
       AutoScaler autoScaler = new AutoScaler();
       LoadBalancer loadBalancer = new LoadBalancer();

       System.out.println(DASHES);
       System.out.println("Welcome to the demonstration of How to Build and Manage
a Resilient Service!");
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("A - SETUP THE RESOURCES");
       System.out.println("Press Enter when you're ready to start deploying
resources.");
       in.nextLine();
       deploy(loadBalancer);
       System.out.println(DASHES);
       System.out.println(DASHES);
       System.out.println("B - DEMO THE RESILIENCE FUNCTIONALITY");
       System.out.println("Press Enter when you're ready.");
       in.nextLine();
       demo(loadBalancer);
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("C - DELETE THE RESOURCES");
       System.out.println("""
               This concludes the demo of how to build and manage a resilient
service.
               To keep things tidy and to avoid unwanted charges on your account,
we can clean up all AWS resources
               that were created for this demo.
               """);

       System.out.println("\n Do you want to delete the resources (y/n)? ");
       String userInput = in.nextLine().trim().toLowerCase(); // Capture user input

       if (userInput.equals("y")) {
           // Delete resources here
           deleteResources(loadBalancer, autoScaler, database);
           System.out.println("Resources deleted.");
       } else {
```

```
            System.out.println("""
                    Okay, we'll leave the resources intact.
                    Don't forget to delete them when you're done with them or you
might incur unexpected charges.
                    """);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The example has completed. ");
        System.out.println("\n Thanks for watching!");
        System.out.println(DASHES);
    }

    // Deletes the AWS resources used in this example.
    private static void deleteResources(LoadBalancer loadBalancer, AutoScaler
autoScaler, Database database)
            throws IOException, InterruptedException {
        loadBalancer.deleteLoadBalancer(lbName);
        System.out.println("*** Wait 30 secs for resource to be deleted");
        TimeUnit.SECONDS.sleep(30);
        loadBalancer.deleteTargetGroup(targetGroupName);
        autoScaler.deleteAutoScaleGroup(autoScalingGroupName);
        autoScaler.deleteRolesPolicies(policyName, roleName, profileName);
        autoScaler.deleteTemplate(templateName);
        database.deleteTable(tableName);
    }

    private static void deploy(LoadBalancer loadBalancer) throws
InterruptedException, IOException {
        Scanner in = new Scanner(System.in);
        System.out.println(
                """
                        For this demo, we'll use the AWS SDK for Java (v2) to create
several AWS resources
                        to set up a load-balanced web service endpoint and explore
some ways to make it resilient
                        against various kinds of failures.

                        Some of the resources create by this demo are:
                        \t* A DynamoDB table that the web service depends on to
provide book, movie, and song recommendations.
                        \t* An EC2 launch template that defines EC2 instances that
each contain a Python web server.
```

```
                        \t* An EC2 Auto Scaling group that manages EC2 instances
across several Availability Zones.
                        \t* An Elastic Load Balancing (ELB) load balancer that
targets the Auto Scaling group to distribute requests.
                        """);

        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Creating and populating a DynamoDB table named " +
tableName);
        Database database = new Database();
        database.createTable(tableName, fileName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
                Creating an EC2 launch template that runs '{startup_script}' when an
instance starts.
                This script starts a Python web server defined in the `server.py`
script. The web server
                listens to HTTP requests on port 80 and responds to requests to '/'
and to '/healthcheck'.
                For demo purposes, this server is run as the root user. In
production, the best practice is to
                run a web server, such as Apache, with least-privileged credentials.

                The template also defines an IAM policy that each instance uses to
assume a role that grants
                permissions to access the DynamoDB recommendation table and Systems
Manager parameters
                that control the flow of the demo.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        templateCreator.createTemplate(policyFile, policyName, profileName,
startScript, templateName, roleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(
```

```
                "Creating an EC2 Auto Scaling group that maintains three EC2
instances, each in a different Availability Zone.");
        System.out.println("*** Wait 30 secs for the VPC to be created");
        TimeUnit.SECONDS.sleep(30);
        AutoScaler autoScaler = new AutoScaler();
        String[] zones = autoScaler.createGroup(3, templateName,
autoScalingGroupName);

        System.out.println("""
                At this point, you have EC2 instances created. Once each instance
starts, it listens for
                HTTP requests. You can see these instances in the console or
continue with the demo.
                Press Enter when you're ready to continue.
                """);

        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Creating variables that control the flow of the demo.");
        ParameterHelper paramHelper = new ParameterHelper();
        paramHelper.reset();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
                Creating an Elastic Load Balancing target group and load balancer.
The target group
                defines how the load balancer connects to instances. The load
balancer provides a
                single endpoint where clients connect and dispatches requests to
instances in the group.
                """);

        String vpcId = autoScaler.getDefaultVPC();
        List<Subnet> subnets = autoScaler.getSubnets(vpcId, zones);
        System.out.println("You have retrieved a list with " + subnets.size() + "
subnets");
        String targetGroupArn = loadBalancer.createTargetGroup(protocol, port,
vpcId, targetGroupName);
        String elbDnsName = loadBalancer.createLoadBalancer(subnets, targetGroupArn,
lbName, port, protocol);
```

```
        autoScaler.attachLoadBalancerTargetGroup(autoScalingGroupName,
targetGroupArn);
        System.out.println("Verifying access to the load balancer endpoint...");
        boolean wasSuccessul = loadBalancer.verifyLoadBalancerEndpoint(elbDnsName);
        if (!wasSuccessul) {
            System.out.println("Couldn't connect to the load balancer, verifying
that the port is open...");
            CloseableHttpClient httpClient = HttpClients.createDefault();

            // Create an HTTP GET request to "http://checkip.amazonaws.com"
            HttpGet httpGet = new HttpGet("http://checkip.amazonaws.com");
            try {
                // Execute the request and get the response
                HttpResponse response = httpClient.execute(httpGet);

                // Read the response content.
                String ipAddress =
IOUtils.toString(response.getEntity().getContent(), StandardCharsets.UTF_8).trim();

                // Print the public IP address.
                System.out.println("Public IP Address: " + ipAddress);
                GroupInfo groupInfo = autoScaler.verifyInboundPort(vpcId, port,
ipAddress);
                if (!groupInfo.isPortOpen()) {
                    System.out.println("""
                            For this example to work, the default security group for
your default VPC must
                            allow access from this computer. You can either add it
automatically from this
                            example or add it yourself using the AWS Management
Console.
                            """);

                    System.out.println(
                            "Do you want to add a rule to security group " +
groupInfo.getGroupName() + " to allow");
                    System.out.println("inbound traffic on port " + port + " from
your computer's IP address (y/n) ");
                    String ans = in.nextLine();
                    if ("y".equalsIgnoreCase(ans)) {
                        autoScaler.openInboundPort(groupInfo.getGroupName(),
String.valueOf(port), ipAddress);
                        System.out.println("Security group rule added.");
                    } else {
```

```
                        System.out.println("No security group rule added.");
                    }
                }

            } catch (AutoScalingException e) {
                e.printStackTrace();
            }
        } else if (wasSuccessul) {
            System.out.println("Your load balancer is ready. You can access it by
browsing to:");
            System.out.println("\t http://" + elbDnsName);
        } else {
            System.out.println("Couldn't get a successful response from the load
balancer endpoint. Troubleshoot by");
            System.out.println("manually verifying that your VPC and security group
are configured correctly and that");
            System.out.println("you can successfully make a GET request to the load
balancer.");
        }

        System.out.println("Press Enter when you're ready to continue with the
demo.");
        in.nextLine();
    }

    // A method that controls the demo part of the Java program.
    public static void demo(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        ParameterHelper paramHelper = new ParameterHelper();
        System.out.println("Read the ssm_only_policy.json file");
        String ssmOnlyPolicy = readFileAsString(ssmJSON);

        System.out.println("Resetting parameters to starting values for demo.");
        paramHelper.reset();

        System.out.println(
                """
                        This part of the demonstration shows how to toggle
different parts of the system
                        to create situations where the web service fails, and shows
how using a resilient
                        architecture can keep the web service running in spite of
these failures.
```

```
                        At the start, the load balancer endpoint returns
recommendations and reports that all targets are healthy.
                        """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        The web service running on the EC2 instances gets
recommendations by querying a DynamoDB table.
                        The table name is contained in a Systems Manager parameter
named self.param_helper.table.
                        To simulate a failure of the recommendation service, let's
set this parameter to name a non-existent table.
                        """);
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        System.out.println(
                """
                        \nNow, sending a GET request to the load balancer endpoint
returns a failure code. But, the service reports as
                        healthy to the load balancer because shallow health checks
don't check for failure of the recommendation service.
                        """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        Instead of failing when the recommendation service fails,
the web service can return a static response.
                        While this is not a perfect solution, it presents the
customer with a somewhat better experience than failure.
                        """);
        paramHelper.put(paramHelper.failureResponse, "static");

        System.out.println("""
                Now, sending a GET request to the load balancer endpoint returns a
static response.
                The service still reports as healthy because health checks are still
shallow.
                """);
        demoChoices(loadBalancer);

        System.out.println("Let's reinstate the recommendation service.");
        paramHelper.put(paramHelper.tableName, paramHelper.dyntable);
```

```
        System.out.println("""
                Let's also substitute bad credentials for one of the instances in
the target group so that it can't
                access the DynamoDB recommendation table. We will get an instance id
value.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        AutoScaler autoScaler = new AutoScaler();

        // Create a new instance profile based on badCredsProfileName.
        templateCreator.createInstanceProfile(policyFile, policyName,
badCredsProfileName, roleName);
        String badInstanceId = autoScaler.getBadInstance(autoScalingGroupName);
        System.out.println("The bad instance id values used for this demo is " +
badInstanceId);

        String profileAssociationId = autoScaler.getInstanceProfile(badInstanceId);
        System.out.println("The association Id value is " + profileAssociationId);
        System.out.println("Replacing the profile for instance " + badInstanceId
                + " with a profile that contains bad credentials");
        autoScaler.replaceInstanceProfile(badInstanceId, badCredsProfileName,
profileAssociationId);

        System.out.println(
                """
                        Now, sending a GET request to the load balancer endpoint
returns either a recommendation or a static response,
                        depending on which instance is selected by the load
balancer.
                        """);

        demoChoices(loadBalancer);

        System.out.println("""
                Let's implement a deep health check. For this demo, a deep health
check tests whether
                the web service can access the DynamoDB table that it depends on for
recommendations. Note that
                the deep health check is only for ELB routing and not for Auto
Scaling instance health.
                This kind of deep health check is not recommended for Auto Scaling
instance health, because it
```

```
                risks accidental termination of all instances in the Auto Scaling
group when a dependent service fails.
                """);

        System.out.println("""
                By implementing deep health checks, the load balancer can detect
when one of the instances is failing
                and take that instance out of rotation.
                """);

        paramHelper.put(paramHelper.healthCheck, "deep");

        System.out.println("""
                Now, checking target health indicates that the instance with bad
credentials
                is unhealthy. Note that it might take a minute or two for the load
balancer to detect the unhealthy
                instance. Sending a GET request to the load balancer endpoint always
returns a recommendation, because
                the load balancer takes unhealthy instances out of its rotation.
                """);

        demoChoices(loadBalancer);

        System.out.println(
                """
                        Because the instances in this demo are controlled by an auto
scaler, the simplest way to fix an unhealthy
                        instance is to terminate it and let the auto scaler start a
new instance to replace it.
                        """);
        autoScaler.terminateInstance(badInstanceId);

        System.out.println("""
                Even while the instance is terminating and the new instance is
starting, sending a GET
                request to the web service continues to get a successful
recommendation response because
                the load balancer routes requests to the healthy instances. After
the replacement instance
                starts and reports as healthy, it is included in the load balancing
rotation.
                Note that terminating and replacing an instance typically takes
several minutes, during which time you
```

```
                can see the changing health check status until the new instance is
running and healthy.
                """);

        demoChoices(loadBalancer);
        System.out.println(
                "If the recommendation service fails now, deep health checks mean
all instances report as unhealthy.");
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        demoChoices(loadBalancer);
        paramHelper.reset();
    }

    public static void demoChoices(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        String[] actions = {
                "Send a GET request to the load balancer endpoint.",
                "Check the health of load balancer targets.",
                "Go to the next part of the demo."
        };
        Scanner scanner = new Scanner(System.in);

        while (true) {
            System.out.println("-".repeat(88));
            System.out.println("See the current state of the service by selecting
one of the following choices:");
            for (int i = 0; i < actions.length; i++) {
                System.out.println(i + ": " + actions[i]);
            }

            try {
                System.out.print("\nWhich action would you like to take? ");
                int choice = scanner.nextInt();
                System.out.println("-".repeat(88));

                switch (choice) {
                    case 0 -> {
                        System.out.println("Request:\n");
                        System.out.println("GET http://" +
loadBalancer.getEndpoint(lbName));
                        CloseableHttpClient httpClient =
HttpClients.createDefault();
```

```
                        // Create an HTTP GET request to the ELB.
                        HttpGet httpGet = new HttpGet("http://" +
loadBalancer.getEndpoint(lbName));

                        // Execute the request and get the response.
                        HttpResponse response = httpClient.execute(httpGet);
                        int statusCode = response.getStatusLine().getStatusCode();
                        System.out.println("HTTP Status Code: " + statusCode);

                        // Display the JSON response
                        BufferedReader reader = new BufferedReader(
                                new
InputStreamReader(response.getEntity().getContent()));
                        StringBuilder jsonResponse = new StringBuilder();
                        String line;
                        while ((line = reader.readLine()) != null) {
                            jsonResponse.append(line);
                        }
                        reader.close();

                        // Print the formatted JSON response.
                        System.out.println("Full Response:\n");
                        System.out.println(jsonResponse.toString());

                        // Close the HTTP client.
                        httpClient.close();

                    }
                    case 1 -> {
                        System.out.println("\nChecking the health of load balancer
targets:\n");
                        List<TargetHealthDescription> health =
loadBalancer.checkTargetHealth(targetGroupName);
                        for (TargetHealthDescription target : health) {
                            System.out.printf("\tTarget %s on port %d is %s%n",
target.target().id(),
                                    target.target().port(),
target.targetHealth().stateAsString());
                        }
                        System.out.println("""
                                Note that it can take a minute or two for the health
check to update
                                after changes are made.
                                """);
```

```
                    }
                    case 2 -> {
                        System.out.println("\nOkay, let's move on.");
                        System.out.println("-".repeat(88));
                        return; // Exit the method when choice is 2
                    }
                    default -> System.out.println("You must choose a value between
 0-2. Please select again.");
                }

            } catch (java.util.InputMismatchException e) {
                System.out.println("Invalid input. Please select again.");
                scanner.nextLine(); // Clear the input buffer.
            }
        }
    }

    public static String readFileAsString(String filePath) throws IOException {
        byte[] bytes = Files.readAllBytes(Paths.get(filePath));
        return new String(bytes);
    }
}
```

Cree una clase que agrupe las acciones de escalado automático y Amazon EC2.

```
public class AutoScaler {

    private static Ec2Client ec2Client;
    private static AutoScalingClient autoScalingClient;
    private static IamClient iamClient;

    private static SsmClient ssmClient;

    private IamClient getIAMClient() {
        if (iamClient == null) {
            iamClient = IamClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return iamClient;
    }
```

```
    private SsmClient getSSMClient() {
        if (ssmClient == null) {
            ssmClient = SsmClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ssmClient;
    }

    private Ec2Client getEc2Client() {
        if (ec2Client == null) {
            ec2Client = Ec2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ec2Client;
    }

    private AutoScalingClient getAutoScalingClient() {
        if (autoScalingClient == null) {
            autoScalingClient = AutoScalingClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return autoScalingClient;
    }

    /**
     * Terminates and instances in an EC2 Auto Scaling group. After an instance is
     * terminated, it can no longer be accessed.
     */
    public void terminateInstance(String instanceId) {
        TerminateInstanceInAutoScalingGroupRequest terminateInstanceIRequest =
TerminateInstanceInAutoScalingGroupRequest
                .builder()
                .instanceId(instanceId)
                .shouldDecrementDesiredCapacity(false)
                .build();


getAutoScalingClient().terminateInstanceInAutoScalingGroup(terminateInstanceIRequest);
        System.out.format("Terminated instance %s.", instanceId);
    }
```

```
   /**
    * Replaces the profile associated with a running instance. After the profile is
    * replaced, the instance is rebooted to ensure that it uses the new profile.
    * When
    * the instance is ready, Systems Manager is used to restart the Python web
    * server.
    */
   public void replaceInstanceProfile(String instanceId, String
newInstanceProfileName, String profileAssociationId)
           throws InterruptedException {
       // Create an IAM instance profile specification.
       software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
iamInstanceProfile =
software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
               .builder()
               .name(newInstanceProfileName) // Make sure 'newInstanceProfileName'
is a valid IAM Instance Profile
                                             // name.
               .build();

       // Replace the IAM instance profile association for the EC2 instance.
       ReplaceIamInstanceProfileAssociationRequest replaceRequest =
ReplaceIamInstanceProfileAssociationRequest
               .builder()
               .iamInstanceProfile(iamInstanceProfile)
               .associationId(profileAssociationId) // Make sure
'profileAssociationId' is a valid association ID.
               .build();

       try {
           getEc2Client().replaceIamInstanceProfileAssociation(replaceRequest);
           // Handle the response as needed.
       } catch (Ec2Exception e) {
           // Handle exceptions, log, or report the error.
           System.err.println("Error: " + e.getMessage());
       }
       System.out.format("Replaced instance profile for association %s with profile
%s.", profileAssociationId,
               newInstanceProfileName);
       TimeUnit.SECONDS.sleep(15);
       boolean instReady = false;
       int tries = 0;

       // Reboot after 60 seconds
```

```
        while (!instReady) {
            if (tries % 6 == 0) {
                getEc2Client().rebootInstances(RebootInstancesRequest.builder()
                        .instanceIds(instanceId)
                        .build());
                System.out.println("Rebooting instance " + instanceId + " and
waiting for it to be ready.");
            }
            tries++;
            try {
                TimeUnit.SECONDS.sleep(10);
            } catch (InterruptedException e) {
                e.printStackTrace();
            }

            DescribeInstanceInformationResponse informationResponse =
getSSMClient().describeInstanceInformation();
            List<InstanceInformation> instanceInformationList =
informationResponse.instanceInformationList();
            for (InstanceInformation info : instanceInformationList) {
                if (info.instanceId().equals(instanceId)) {
                    instReady = true;
                    break;
                }
            }
        }

        SendCommandRequest sendCommandRequest = SendCommandRequest.builder()
                .instanceIds(instanceId)
                .documentName("AWS-RunShellScript")
                .parameters(Collections.singletonMap("commands",
                        Collections.singletonList("cd / && sudo python3 server.py
80")))
                .build();

        getSSMClient().sendCommand(sendCommandRequest);
        System.out.println("Restarted the Python web server on instance " +
instanceId + ".");
    }

    public void openInboundPort(String secGroupId, String port, String ipAddress) {
        AuthorizeSecurityGroupIngressRequest ingressRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                .groupName(secGroupId)
```

```
                .cidrIp(ipAddress)
                .fromPort(Integer.parseInt(port))
                .build();

        getEc2Client().authorizeSecurityGroupIngress(ingressRequest);
        System.out.format("Authorized ingress to %s on port %s from %s.",
secGroupId, port, ipAddress);
    }

    /**
     * Detaches a role from an instance profile, detaches policies from the role,
     * and deletes all the resources.
     */
    public void deleteInstanceProfile(String roleName, String profileName) {
        try {
            software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
getInstanceProfileRequest =
software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
                    .builder()
                    .instanceProfileName(profileName)
                    .build();

            GetInstanceProfileResponse response =
getIAMClient().getInstanceProfile(getInstanceProfileRequest);
            String name = response.instanceProfile().instanceProfileName();
            System.out.println(name);

            RemoveRoleFromInstanceProfileRequest profileRequest =
RemoveRoleFromInstanceProfileRequest.builder()
                    .instanceProfileName(profileName)
                    .roleName(roleName)
                    .build();

            getIAMClient().removeRoleFromInstanceProfile(profileRequest);
            DeleteInstanceProfileRequest deleteInstanceProfileRequest =
DeleteInstanceProfileRequest.builder()
                    .instanceProfileName(profileName)
                    .build();

            getIAMClient().deleteInstanceProfile(deleteInstanceProfileRequest);
            System.out.println("Deleted instance profile " + profileName);

            DeleteRoleRequest deleteRoleRequest = DeleteRoleRequest.builder()
                    .roleName(roleName)
```

```
                    .build();

            // List attached role policies.
            ListAttachedRolePoliciesResponse rolesResponse = getIAMClient()
                    .listAttachedRolePolicies(role -> role.roleName(roleName));
            List<AttachedPolicy> attachedPolicies =
rolesResponse.attachedPolicies();
            for (AttachedPolicy attachedPolicy : attachedPolicies) {
                DetachRolePolicyRequest request = DetachRolePolicyRequest.builder()
                        .roleName(roleName)
                        .policyArn(attachedPolicy.policyArn())
                        .build();

                getIAMClient().detachRolePolicy(request);
                System.out.println("Detached and deleted policy " +
attachedPolicy.policyName());
            }

            getIAMClient().deleteRole(deleteRoleRequest);
            System.out.println("Instance profile and role deleted.");

        } catch (IamException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public void deleteTemplate(String templateName) {
        getEc2Client().deleteLaunchTemplate(name ->
name.launchTemplateName(templateName));
        System.out.format(templateName + " was deleted.");
    }

    public void deleteAutoScaleGroup(String groupName) {
        DeleteAutoScalingGroupRequest deleteAutoScalingGroupRequest =
DeleteAutoScalingGroupRequest.builder()
                .autoScalingGroupName(groupName)
                .forceDelete(true)
                .build();


getAutoScalingClient().deleteAutoScalingGroup(deleteAutoScalingGroupRequest);
        System.out.println(groupName + " was deleted.");
    }
```

```
    /*
     * Verify the default security group of the specified VPC allows ingress from
     * this
     * computer. This can be done by allowing ingress from this computer's IP
     * address. In some situations, such as connecting from a corporate network, you
     * must instead specify a prefix list ID. You can also temporarily open the port
     * to
     * any IP address while running this example. If you do, be sure to remove
     * public
     * access when you're done.
     *
     */
    public GroupInfo verifyInboundPort(String VPC, int port, String ipAddress) {
        boolean portIsOpen = false;
        GroupInfo groupInfo = new GroupInfo();
        try {
            Filter filter = Filter.builder()
                    .name("group-name")
                    .values("default")
                    .build();

            Filter filter1 = Filter.builder()
                    .name("vpc-id")
                    .values(VPC)
                    .build();

            DescribeSecurityGroupsRequest securityGroupsRequest =
DescribeSecurityGroupsRequest.builder()
                    .filters(filter, filter1)
                    .build();

            DescribeSecurityGroupsResponse securityGroupsResponse = getEc2Client()
                    .describeSecurityGroups(securityGroupsRequest);
            String securityGroup =
securityGroupsResponse.securityGroups().get(0).groupName();
            groupInfo.setGroupName(securityGroup);

            for (SecurityGroup secGroup : securityGroupsResponse.securityGroups()) {
                System.out.println("Found security group: " + secGroup.groupId());

                for (IpPermission ipPermission : secGroup.ipPermissions()) {
                    if (ipPermission.fromPort() == port) {
                        System.out.println("Found inbound rule: " + ipPermission);
```

```
                        for (IpRange ipRange : ipPermission.ipRanges()) {
                            String cidrIp = ipRange.cidrIp();
                            if (cidrIp.startsWith(ipAddress) ||
cidrIp.equals("0.0.0.0/0")) {
                                System.out.println(cidrIp + " is applicable");
                                portIsOpen = true;
                            }
                        }

                        if (!ipPermission.prefixListIds().isEmpty()) {
                            System.out.println("Prefix lList is applicable");
                            portIsOpen = true;
                        }

                        if (!portIsOpen) {
                            System.out
                                    .println("The inbound rule does not appear to be
open to either this computer's IP,"
                                            + " all IP addresses (0.0.0.0/0), or to
a prefix list ID.");
                        } else {
                            break;
                        }
                    }
                }
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }

        groupInfo.setPortOpen(portIsOpen);
        return groupInfo;
    }

    /*
     * Attaches an Elastic Load Balancing (ELB) target group to this EC2 Auto
     * Scaling group.
     * The target group specifies how the load balancer forward requests to the
     * instances
     * in the group.
     */
    public void attachLoadBalancerTargetGroup(String asGroupName, String
targetGroupARN) {
```

```
        try {
            AttachLoadBalancerTargetGroupsRequest targetGroupsRequest =
AttachLoadBalancerTargetGroupsRequest.builder()
                    .autoScalingGroupName(asGroupName)
                    .targetGroupARNs(targetGroupARN)
                    .build();


getAutoScalingClient().attachLoadBalancerTargetGroups(targetGroupsRequest);
            System.out.println("Attached load balancer to " + asGroupName);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Creates an EC2 Auto Scaling group with the specified size.
    public String[] createGroup(int groupSize, String templateName, String
autoScalingGroupName) {

        // Get availability zones.
        software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
zonesRequest =
software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
                .builder()
                .build();

        DescribeAvailabilityZonesResponse zonesResponse =
getEc2Client().describeAvailabilityZones(zonesRequest);
        List<String> availabilityZoneNames =
zonesResponse.availabilityZones().stream()

.map(software.amazon.awssdk.services.ec2.model.AvailabilityZone::zoneName)
                .collect(Collectors.toList());

        String availabilityZones = String.join(",", availabilityZoneNames);
        LaunchTemplateSpecification specification =
LaunchTemplateSpecification.builder()
                .launchTemplateName(templateName)
                .version("$Default")
                .build();

        String[] zones = availabilityZones.split(",");
```

```
        CreateAutoScalingGroupRequest groupRequest =
CreateAutoScalingGroupRequest.builder()
                .launchTemplate(specification)
                .availabilityZones(zones)
                .maxSize(groupSize)
                .minSize(groupSize)
                .autoScalingGroupName(autoScalingGroupName)
                .build();

        try {
            getAutoScalingClient().createAutoScalingGroup(groupRequest);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Created an EC2 Auto Scaling group named " +
autoScalingGroupName);
        return zones;
    }

    public String getDefaultVPC() {
        // Define the filter.
        Filter defaultFilter = Filter.builder()
                .name("is-default")
                .values("true")
                .build();

        software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest request =
software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest
                .builder()
                .filters(defaultFilter)
                .build();

        DescribeVpcsResponse response = getEc2Client().describeVpcs(request);
        return response.vpcs().get(0).vpcId();
    }

    // Gets the default subnets in a VPC for a specified list of Availability Zones.
    public List<Subnet> getSubnets(String vpcId, String[] availabilityZones) {
        List<Subnet> subnets = null;
        Filter vpcFilter = Filter.builder()
                .name("vpc-id")
                .values(vpcId)
```

```
                .build();

        Filter azFilter = Filter.builder()
                .name("availability-zone")
                .values(availabilityZones)
                .build();

        Filter defaultForAZ = Filter.builder()
                .name("default-for-az")
                .values("true")
                .build();

        DescribeSubnetsRequest request = DescribeSubnetsRequest.builder()
                .filters(vpcFilter, azFilter, defaultForAZ)
                .build();

        DescribeSubnetsResponse response = getEc2Client().describeSubnets(request);
        subnets = response.subnets();
        return subnets;
    }

    // Gets data about the instances in the EC2 Auto Scaling group.
    public String getBadInstance(String groupName) {
        DescribeAutoScalingGroupsRequest request =
DescribeAutoScalingGroupsRequest.builder()
                .autoScalingGroupNames(groupName)
                .build();

        DescribeAutoScalingGroupsResponse response =
getAutoScalingClient().describeAutoScalingGroups(request);
        AutoScalingGroup autoScalingGroup = response.autoScalingGroups().get(0);
        List<String> instanceIds = autoScalingGroup.instances().stream()
                .map(instance -> instance.instanceId())
                .collect(Collectors.toList());

        String[] instanceIdArray = instanceIds.toArray(new String[0]);
        for (String instanceId : instanceIdArray) {
            System.out.println("Instance ID: " + instanceId);
            return instanceId;
        }
        return "";
    }

    // Gets data about the profile associated with an instance.
```

```
    public String getInstanceProfile(String instanceId) {
        Filter filter = Filter.builder()
                .name("instance-id")
                .values(instanceId)
                .build();

        DescribeIamInstanceProfileAssociationsRequest associationsRequest =
 DescribeIamInstanceProfileAssociationsRequest
                .builder()
                .filters(filter)
                .build();

        DescribeIamInstanceProfileAssociationsResponse response = getEc2Client()
                .describeIamInstanceProfileAssociations(associationsRequest);
        return response.iamInstanceProfileAssociations().get(0).associationId();
    }

    public void deleteRolesPolicies(String policyName, String roleName, String
 InstanceProfile) {
        ListPoliciesRequest listPoliciesRequest =
 ListPoliciesRequest.builder().build();
        ListPoliciesResponse listPoliciesResponse =
 getIAMClient().listPolicies(listPoliciesRequest);
        for (Policy policy : listPoliciesResponse.policies()) {
            if (policy.policyName().equals(policyName)) {
                // List the entities (users, groups, roles) that are attached to the
 policy.

 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
 listEntitiesRequest =
 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
                        .builder()
                        .policyArn(policy.arn())
                        .build();
                ListEntitiesForPolicyResponse listEntitiesResponse = iamClient
                        .listEntitiesForPolicy(listEntitiesRequest);
                if (!listEntitiesResponse.policyGroups().isEmpty() || !
listEntitiesResponse.policyUsers().isEmpty()
                        || !listEntitiesResponse.policyRoles().isEmpty()) {
                    // Detach the policy from any entities it is attached to.
                    DetachRolePolicyRequest detachPolicyRequest =
 DetachRolePolicyRequest.builder()
                            .policyArn(policy.arn())
                            .roleName(roleName) // Specify the name of the IAM role
```

```
                        .build();

                getIAMClient().detachRolePolicy(detachPolicyRequest);
                System.out.println("Policy detached from entities.");
            }

            // Now, you can delete the policy.
            DeletePolicyRequest deletePolicyRequest =
DeletePolicyRequest.builder()
                    .policyArn(policy.arn())
                    .build();

            getIAMClient().deletePolicy(deletePolicyRequest);
            System.out.println("Policy deleted successfully.");
            break;
        }
    }

    // List the roles associated with the instance profile
    ListInstanceProfilesForRoleRequest listRolesRequest =
ListInstanceProfilesForRoleRequest.builder()
            .roleName(roleName)
            .build();

    // Detach the roles from the instance profile
    ListInstanceProfilesForRoleResponse listRolesResponse =
iamClient.listInstanceProfilesForRole(listRolesRequest);
    for (software.amazon.awssdk.services.iam.model.InstanceProfile profile :
listRolesResponse.instanceProfiles()) {
        RemoveRoleFromInstanceProfileRequest removeRoleRequest =
RemoveRoleFromInstanceProfileRequest.builder()
                .instanceProfileName(InstanceProfile)
                .roleName(roleName) // Remove the extra dot here
                .build();

        getIAMClient().removeRoleFromInstanceProfile(removeRoleRequest);
        System.out.println("Role " + roleName + " removed from instance profile
" + InstanceProfile);
    }

    // Delete the instance profile after removing all roles
    DeleteInstanceProfileRequest deleteInstanceProfileRequest =
DeleteInstanceProfileRequest.builder()
            .instanceProfileName(InstanceProfile)
```

```
                .build();

        getIAMClient().deleteInstanceProfile(r ->
 r.instanceProfileName(InstanceProfile));
        System.out.println(InstanceProfile + " Deleted");
        System.out.println("All roles and policies are deleted.");
    }
}
```

Cree una clase que resuma las acciones de Elastic Load Balancing.

```
public class LoadBalancer {
    public ElasticLoadBalancingV2Client elasticLoadBalancingV2Client;

    public ElasticLoadBalancingV2Client getLoadBalancerClient() {
        if (elasticLoadBalancingV2Client == null) {
            elasticLoadBalancingV2Client = ElasticLoadBalancingV2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }

        return elasticLoadBalancingV2Client;
    }

    // Checks the health of the instances in the target group.
    public List<TargetHealthDescription> checkTargetHealth(String targetGroupName) {
        DescribeTargetGroupsRequest targetGroupsRequest =
 DescribeTargetGroupsRequest.builder()
                .names(targetGroupName)
                .build();

        DescribeTargetGroupsResponse tgResponse =
 getLoadBalancerClient().describeTargetGroups(targetGroupsRequest);

        DescribeTargetHealthRequest healthRequest =
 DescribeTargetHealthRequest.builder()
                .targetGroupArn(tgResponse.targetGroups().get(0).targetGroupArn())
                .build();

        DescribeTargetHealthResponse healthResponse =
 getLoadBalancerClient().describeTargetHealth(healthRequest);
        return healthResponse.targetHealthDescriptions();
```

```
    }

    // Gets the HTTP endpoint of the load balancer.
    public String getEndpoint(String lbName) {
        DescribeLoadBalancersResponse res = getLoadBalancerClient()
                .describeLoadBalancers(describe -> describe.names(lbName));
        return res.loadBalancers().get(0).dnsName();
    }

    // Deletes a load balancer.
    public void deleteLoadBalancer(String lbName) {
        try {
            // Use a waiter to delete the Load Balancer.
            DescribeLoadBalancersResponse res = getLoadBalancerClient()
                    .describeLoadBalancers(describe -> describe.names(lbName));
            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                    .loadBalancerArns(res.loadBalancers().get(0).loadBalancerArn())
                    .build();

            getLoadBalancerClient().deleteLoadBalancer(
                    builder ->
builder.loadBalancerArn(res.loadBalancers().get(0).loadBalancerArn()));
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancersDeleted(request);
            waiterResponse.matched().response().ifPresent(System.out::println);

        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(lbName + " was deleted.");
    }

    // Deletes the target group.
    public void deleteTargetGroup(String targetGroupName) {
        try {
            DescribeTargetGroupsResponse res = getLoadBalancerClient()
                    .describeTargetGroups(describe ->
describe.names(targetGroupName));
            getLoadBalancerClient()
```

```
                    .deleteTargetGroup(builder ->
builder.targetGroupArn(res.targetGroups().get(0).targetGroupArn()));
        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(targetGroupName + " was deleted.");
    }

    // Verify this computer can successfully send a GET request to the load balancer
    // endpoint.
    public boolean verifyLoadBalancerEndpoint(String elbDnsName) throws IOException,
InterruptedException {
        boolean success = false;
        int retries = 3;
        CloseableHttpClient httpClient = HttpClients.createDefault();

        // Create an HTTP GET request to the ELB.
        HttpGet httpGet = new HttpGet("http://" + elbDnsName);
        try {
            while ((!success) && (retries > 0)) {
                // Execute the request and get the response.
                HttpResponse response = httpClient.execute(httpGet);
                int statusCode = response.getStatusLine().getStatusCode();
                System.out.println("HTTP Status Code: " + statusCode);
                if (statusCode == 200) {
                    success = true;
                } else {
                    retries--;
                    System.out.println("Got connection error from load balancer
endpoint, retrying...");
                    TimeUnit.SECONDS.sleep(15);
                }
            }

        } catch (org.apache.http.conn.HttpHostConnectException e) {
            System.out.println(e.getMessage());
        }

        System.out.println("Status.." + success);
        return success;
    }

    /*
     * Creates an Elastic Load Balancing target group. The target group specifies
```

```
     * how
     * the load balancer forward requests to instances in the group and how instance
     * health is checked.
     */
    public String createTargetGroup(String protocol, int port, String vpcId, String
targetGroupName) {
        CreateTargetGroupRequest targetGroupRequest =
CreateTargetGroupRequest.builder()
                .healthCheckPath("/healthcheck")
                .healthCheckTimeoutSeconds(5)
                .port(port)
                .vpcId(vpcId)
                .name(targetGroupName)
                .protocol(protocol)
                .build();

        CreateTargetGroupResponse targetGroupResponse =
getLoadBalancerClient().createTargetGroup(targetGroupRequest);
        String targetGroupArn =
targetGroupResponse.targetGroups().get(0).targetGroupArn();
        String targetGroup =
targetGroupResponse.targetGroups().get(0).targetGroupName();
        System.out.println("The " + targetGroup + " was created with ARN" +
targetGroupArn);
        return targetGroupArn;
    }

    /*
     * Creates an Elastic Load Balancing load balancer that uses the specified
     * subnets
     * and forwards requests to the specified target group.
     */
    public String createLoadBalancer(List<Subnet> subnetIds, String targetGroupARN,
String lbName, int port,
            String protocol) {
        try {
            List<String> subnetIdStrings = subnetIds.stream()
                    .map(Subnet::subnetId)
                    .collect(Collectors.toList());

            CreateLoadBalancerRequest balancerRequest =
CreateLoadBalancerRequest.builder()
                    .subnets(subnetIdStrings)
                    .name(lbName)
```

```
                    .scheme("internet-facing")
                    .build();

            // Create and wait for the load balancer to become available.
            CreateLoadBalancerResponse lsResponse =
getLoadBalancerClient().createLoadBalancer(balancerRequest);
            String lbARN = lsResponse.loadBalancers().get(0).loadBalancerArn();

            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                    .loadBalancerArns(lbARN)
                    .build();

            System.out.println("Waiting for Load Balancer " + lbName + " to become
available.");
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancerAvailable(request);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Load Balancer " + lbName + " is available.");

            // Get the DNS name (endpoint) of the load balancer.
            String lbDNSName = lsResponse.loadBalancers().get(0).dnsName();
            System.out.println("*** Load Balancer DNS Name: " + lbDNSName);

            // Create a listener for the load balance.
            Action action = Action.builder()
                    .targetGroupArn(targetGroupARN)
                    .type("forward")
                    .build();

            CreateListenerRequest listenerRequest = CreateListenerRequest.builder()

.loadBalancerArn(lsResponse.loadBalancers().get(0).loadBalancerArn())
                    .defaultActions(action)
                    .port(port)
                    .protocol(protocol)
                    .build();

            getLoadBalancerClient().createListener(listenerRequest);
            System.out.println("Created listener to forward traffic from load
balancer " + lbName + " to target group "
```

```
                    + targetGroupARN);

            // Return the load balancer DNS name.
            return lbDNSName;

        } catch (ElasticLoadBalancingV2Exception e) {
            e.printStackTrace();
        }
        return "";
    }
}
```

Cree una clase que utilice DynamoDB para simular un servicio de recomendaciones.

```
public class Database {

    private static DynamoDbClient dynamoDbClient;

    public static DynamoDbClient getDynamoDbClient() {
        if (dynamoDbClient == null) {
            dynamoDbClient = DynamoDbClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return dynamoDbClient;
    }

    // Checks to see if the Amazon DynamoDB table exists.
    private boolean doesTableExist(String tableName) {
        try {
            // Describe the table and catch any exceptions.
            DescribeTableRequest describeTableRequest =
 DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            getDynamoDbClient().describeTable(describeTableRequest);
            System.out.println("Table '" + tableName + "' exists.");
            return true;

        } catch (ResourceNotFoundException e) {
            System.out.println("Table '" + tableName + "' does not exist.");
```

```
        } catch (DynamoDbException e) {
            System.err.println("Error checking table existence: " + e.getMessage());
        }
        return false;
    }

    /*
     * Creates a DynamoDB table to use a recommendation service. The table has a
     * hash key named 'MediaType' that defines the type of media recommended, such
     * as
     * Book or Movie, and a range key named 'ItemId' that, combined with the
     * MediaType,
     * forms a unique identifier for the recommended item.
     */
    public void createTable(String tableName, String fileName) throws IOException {
        // First check to see if the table exists.
        boolean doesExist = doesTableExist(tableName);
        if (!doesExist) {
            DynamoDbWaiter dbWaiter = getDynamoDbClient().waiter();
            CreateTableRequest createTableRequest = CreateTableRequest.builder()
                    .tableName(tableName)
                    .attributeDefinitions(
                            AttributeDefinition.builder()
                                    .attributeName("MediaType")
                                    .attributeType(ScalarAttributeType.S)
                                    .build(),
                            AttributeDefinition.builder()
                                    .attributeName("ItemId")
                                    .attributeType(ScalarAttributeType.N)
                                    .build())
                    .keySchema(
                            KeySchemaElement.builder()
                                    .attributeName("MediaType")
                                    .keyType(KeyType.HASH)
                                    .build(),
                            KeySchemaElement.builder()
                                    .attributeName("ItemId")
                                    .keyType(KeyType.RANGE)
                                    .build())
                    .provisionedThroughput(
                            ProvisionedThroughput.builder()
                                    .readCapacityUnits(5L)
                                    .writeCapacityUnits(5L)
                                    .build())
```

```
                    .build();

            getDynamoDbClient().createTable(createTableRequest);
            System.out.println("Creating table " + tableName + "...");

            // Wait until the Amazon DynamoDB table is created.
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Table " + tableName + " created.");

            // Add records to the table.
            populateTable(fileName, tableName);
        }
    }

    public void deleteTable(String tableName) {
        getDynamoDbClient().deleteTable(table -> table.tableName(tableName));
        System.out.println("Table " + tableName + " deleted.");
    }

    // Populates the table with data located in a JSON file using the DynamoDB
    // enhanced client.
    public void populateTable(String fileName, String tableName) throws IOException
{
        DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
                .dynamoDbClient(getDynamoDbClient())
                .build();
        ObjectMapper objectMapper = new ObjectMapper();
        File jsonFile = new File(fileName);
        JsonNode rootNode = objectMapper.readTree(jsonFile);

        DynamoDbTable<Recommendation> mappedTable = enhancedClient.table(tableName,
                TableSchema.fromBean(Recommendation.class));
        for (JsonNode currentNode : rootNode) {
            String mediaType = currentNode.path("MediaType").path("S").asText();
            int itemId = currentNode.path("ItemId").path("N").asInt();
            String title = currentNode.path("Title").path("S").asText();
            String creator = currentNode.path("Creator").path("S").asText();
```

```
            // Create a Recommendation object and set its properties.
            Recommendation rec = new Recommendation();
            rec.setMediaType(mediaType);
            rec.setItemId(itemId);
            rec.setTitle(title);
            rec.setCreator(creator);

            // Put the item into the DynamoDB table.
            mappedTable.putItem(rec); // Add the Recommendation to the list.
        }
        System.out.println("Added all records to the " + tableName);
    }
}
```

Cree una clase que agrupe las acciones de Systems Manager.

```
public class ParameterHelper {

    String tableName = "doc-example-resilient-architecture-table";
    String dyntable = "doc-example-recommendation-service";
    String failureResponse = "doc-example-resilient-architecture-failure-response";
    String healthCheck = "doc-example-resilient-architecture-health-check";

    public void reset() {
        put(dyntable, tableName);
        put(failureResponse, "none");
        put(healthCheck, "shallow");
    }

    public void put(String name, String value) {
        SsmClient ssmClient = SsmClient.builder()
                .region(Region.US_EAST_1)
                .build();

        PutParameterRequest parameterRequest = PutParameterRequest.builder()
                .name(name)
                .value(value)
                .overwrite(true)
                .type("String")
                .build();

        ssmClient.putParameter(parameterRequest);
```

```
        System.out.printf("Setting demo parameter %s to '%s'.", name, value);
    }
}
```

- Para obtener información sobre la API, consulte los siguientes temas en la referencia de la API de AWS SDK for Java 2.x .
  - AttachLoadBalancerTargetGroups
  - CreateAutoScalingGroup
  - CreateInstanceProfile
  - CreateLaunchTemplate
  - CreateListener
  - CreateLoadBalancer
  - CreateTargetGroup
  - DeleteAutoScalingGroup
  - DeleteInstanceProfile
  - DeleteLaunchTemplate
  - DeleteLoadBalancer
  - DeleteTargetGroup
  - DescribeAutoScalingGroups
  - DescribeAvailabilityZones
  - DescribeIamInstanceProfileAssociations
  - DescribeInstances
  - DescribeLoadBalancers
  - DescribeSubnets
  - DescribeTargetGroups
  - DescribeTargetHealth
  - DescribeVpcs
  - RebootInstances
  - ReplaceIamInstanceProfileAssociation
  - TerminateInstanceInAutoScalingGroup
  - UpdateAutoScalingGroup

Ejemplos de Amazon ECR con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Amazon ECR.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Introducción a Amazon ECR

El siguiente ejemplo de código muestra cómo empezar a utilizar Amazon ECR.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecr.EcrClient;
import software.amazon.awssdk.services.ecr.model.EcrException;
```

```
import software.amazon.awssdk.services.ecr.model.ListImagesRequest;
import software.amazon.awssdk.services.ecr.paginators.ListImagesIterable;

public class HelloECR {

    public static void main(String[] args) {
        final String usage = """
            Usage:    <repositoryName>

            Where:
               repositoryName - The name of the Amazon ECR repository.
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String repoName = args[0];
        EcrClient ecrClient = EcrClient.builder()
            .region(Region.US_EAST_1)
            .build();

        listImageTags(ecrClient, repoName);
    }
    public static void listImageTags(EcrClient ecrClient, String repoName){
        ListImagesRequest listImagesPaginator = ListImagesRequest.builder()
            .repositoryName(repoName)
            .build();

        ListImagesIterable imagesIterable =
 ecrClient.listImagesPaginator(listImagesPaginator);
        imagesIterable.stream()
            .flatMap(r -> r.imageIds().stream())
            .forEach(image -> System.out.println("The docker image tag is: "
 +image.imageTag()));
    }
}
```

- Para obtener detalles sobre la API, consulte listImages en la Referencia de la API de AWS SDK for Java 2.x .

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Cree un repositorio de Amazon ECR.
- Establezca políticas de repositorios.
- Recupera el repositorio URIs.
- Obtenga tokens de autorización de Amazon ECR.
- Establezca políticas del ciclo de vida para repositorios de Amazon ECR.
- Inserte una imagen de Docker en un repositorio de Amazon ECR.
- Compruebe la existencia de una imagen en un repositorio de Amazon ECR.
- Enumere los repositorios de Amazon ECR de su cuenta y obtenga información acerca de ellos.
- Elimine repositorios de Amazon ECR.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario interactivo en el que se demuestren las características de Amazon ECR.

```
import software.amazon.awssdk.services.ecr.model.EcrException;
import software.amazon.awssdk.services.ecr.model.RepositoryPolicyNotFoundException;

import java.util.Scanner;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 *
 * This Java code example requires an IAM Role that has permissions to interact with
 the Amazon ECR service.
 *
 * To create an IAM role, see:
 *
 * https://docs.aws.amazon.com/IAM/latest/UserGuide/id_roles_create.html
 *
 * This Java scenario example requires a local docker image named echo-text. Without
 a local image,
 * this Java program will not successfully run. For more information including how
 to create the local
 * image, see:
 *
 * /scenarios/basics/ecr/README
 *
 */
public class ECRScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    public static void main(String[] args) {
        final String usage = """
            Usage: <iamRoleARN> <accountId>

            Where:
               iamRoleARN - The IAM role ARN that has the necessary permissions to
 access and manage the Amazon ECR repository.
               accountId - Your AWS account number.
            """;

        if (args.length != 2) {
            System.out.println(usage);
            return;
        }

        ECRActions ecrActions = new ECRActions();
        String iamRole = args[0];
        String accountId = args[1];
        String localImageName;

        Scanner scanner = new Scanner(System.in);
        System.out.println("""
             The Amazon Elastic Container Registry (ECR) is a fully-managed Docker
 container registry
```

```
            service provided by AWS. It allows developers and organizations to
securely
            store, manage, and deploy Docker container images.
            ECR provides a simple and scalable way to manage container images
throughout their lifecycle,
            from building and testing to production deployment.\s

            The `EcrAsyncClient` interface in the AWS SDK for Java 2.x provides a
set of methods to
            programmatically interact with the Amazon ECR service. This allows
developers to
            automate the storage, retrieval, and management of container images as
part of their application
            deployment pipelines. With ECR, teams can focus on building and
deploying their
            applications without having to worry about the underlying
infrastructure required to
            host and manage a container registry.

           This scenario walks you through how to perform key operations for this
service.
           Let's get started...

           You have two choices:
           1 - Run the entire program.
           2 - Delete an existing Amazon ECR repository named echo-text (created
from a previous execution of
           this program that did not complete).
           """);

       while (true) {
           String input = scanner.nextLine();
           if (input.trim().equalsIgnoreCase("1")) {
               System.out.println("Continuing with the program...");
               System.out.println("");
               break;
           } else if (input.trim().equalsIgnoreCase("2")) {
               String repoName = "echo-text";
               ecrActions.deleteECRRepository(repoName);
               return;
           } else {
               // Handle invalid input.
               System.out.println("Invalid input. Please try again.");
           }
```

```
        }

        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println("""
           1. Create an ECR repository.

           The first task is to ensure we have a local Docker image named echo-
text.
           If this image exists, then an Amazon ECR repository is created.

           An ECR repository is a private Docker container repository provided
           by Amazon Web Services (AWS). It is a managed service that makes it easy
           to store, manage, and deploy Docker container images.\s
           """ );

        // Ensure that a local docker image named echo-text exists.
        boolean doesExist = ecrActions.isEchoTextImagePresent();
        String repoName;
        if (!doesExist){
            System.out.println("The local image named echo-text does not exist");
            return;
        } else {
            localImageName = "echo-text";
            repoName = "echo-text";
        }

        try {
            String repoArn = ecrActions.createECRRepository(repoName);
            System.out.println("The ARN of the ECR repository is " + repoArn);

        } catch (IllegalArgumentException e) {
            System.err.println("Invalid repository name: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("An error occurred while creating the ECR repository:
 " + e.getMessage());
            e.printStackTrace();
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
```

```
        System.out.println("""
        2. Set an ECR repository policy.

        Setting an ECR repository policy using the `setRepositoryPolicy` function is
crucial for maintaining
        the security and integrity of your container images. The repository policy
allows you to
        define specific rules and restrictions for accessing and managing the images
stored within your ECR
        repository.
        """);
        waitForInputToContinue(scanner);
        try {
            ecrActions.setRepoPolicy(repoName, iamRole);

        } catch (RepositoryPolicyNotFoundException e) {
            System.err.println("Invalid repository name: " + e.getMessage());
            return;
        } catch (EcrException e) {
            System.err.println("An ECR exception occurred: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("An error occurred while creating the ECR repository:
" + e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("""
        3. Display ECR repository policy.

        Now we will retrieve the ECR policy to ensure it was successfully set.
        """);
        waitForInputToContinue(scanner);
        try {
            String policyText = ecrActions.getRepoPolicy(repoName);
            System.out.println("Policy Text:");
            System.out.println(policyText);

        } catch (EcrException e) {
            System.err.println("An ECR exception occurred: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
```

```
            System.err.println("An error occurred while creating the ECR repository:
" + e.getMessage());
            return;
        }

        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("""
        4. Retrieve an ECR authorization token.

        You need an authorization token to securely access and interact with the
Amazon ECR registry.
        The `getAuthorizationToken` method of the `EcrAsyncClient` is responsible
for securely accessing
        and interacting with an Amazon ECR repository. This operation is responsible
for obtaining a
        valid authorization token, which is required to authenticate your requests
to the ECR service.

        Without a valid authorization token, you would not be able to perform any
operations on the
        ECR repository, such as pushing, pulling, or managing your Docker images.

        """);
        waitForInputToContinue(scanner);
        try {
             ecrActions.getAuthToken();

        } catch (EcrException e) {
            System.err.println("An ECR exception occurred: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("An error occurred while retrieving the authorization
token: " + e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("""
        5. Get the ECR Repository URI.
```

```
        The URI  of an Amazon ECR repository is important. When you want to deploy a
container image to
        a container orchestration platform like Amazon Elastic Kubernetes Service
(EKS)
        or Amazon Elastic Container Service (ECS), you need to specify the full
image URI,
        which includes the ECR repository URI. This allows the container runtime to
pull the
        correct container image from the ECR repository.
       """);
        waitForInputToContinue(scanner);

        try {
            ecrActions.getRepositoryURI(repoName);

        } catch (EcrException e) {
            System.err.println("An ECR exception occurred: " + e.getMessage());
            return;

        } catch (RuntimeException e) {
            System.err.println("An error occurred while retrieving the URI: " +
e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("""
            6. Set an ECR Lifecycle Policy.

            An ECR Lifecycle Policy is used to manage the lifecycle of Docker images
stored in your ECR repositories.
            These policies allow you to automatically remove old or unused Docker
images from your repositories,
            freeing up storage space and reducing costs.

            This example policy helps to maintain the size and efficiency of the
container registry
            by automatically removing older and potentially unused images, ensuring
that the
            storage is optimized and the registry remains up-to-date.
            """);
        waitForInputToContinue(scanner);
        try {
```

```
            ecrActions.setLifeCyclePolicy(repoName);

        } catch (RuntimeException e) {
            System.err.println("An error occurred while setting the lifecycle
policy: " + e.getMessage());
            e.printStackTrace();
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("""
        7. Push a docker image to the Amazon ECR Repository.

        The `pushImageCmd()` method pushes a local Docker image to an Amazon ECR
repository.
        It sets up the Docker client by connecting to the local Docker host using
the default port.
        It then retrieves the authorization token for the ECR repository by making a
call to the AWS SDK.

        The method uses the authorization token to create an `AuthConfig` object,
which is used to authenticate
        the Docker client when pushing the image. Finally, the method tags the
Docker image with the specified
        repository name and image tag, and then pushes the image to the ECR
repository using the Docker client.
        If the push operation is successful, the method prints a message indicating
that the image was pushed to ECR.
        """);
        waitForInputToContinue(scanner);

        try {
            ecrActions.pushDockerImage(repoName, localImageName);

        } catch (RuntimeException e) {
            System.err.println("An error occurred while pushing a local Docker image
to Amazon ECR: " + e.getMessage());
            e.printStackTrace();
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
```

```
        System.out.println("8. Verify if the image is in the ECR Repository.");
        waitForInputToContinue(scanner);
        try {
            ecrActions.verifyImage(repoName, localImageName);

        } catch (EcrException e) {
            System.err.println("An ECR exception occurred: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("An error occurred " + e.getMessage());
            e.printStackTrace();
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("9. As an optional step, you can interact with the image
 in Amazon ECR by using the CLI.");
        System.out.println("Would you like to view instructions on how to use the
 CLI to run the image? (y/n)");
        String ans = scanner.nextLine().trim();
        if (ans.equalsIgnoreCase("y")) {
            String instructions = """
            1. Authenticate with ECR - Before you can pull the image from Amazon
 ECR, you need to authenticate with the registry. You can do this using the AWS CLI:

                aws ecr get-login-password --region us-east-1 | docker login --
username AWS --password-stdin %s.dkr.ecr.us-east-1.amazonaws.com

            2. Describe the image using this command:

               aws ecr describe-images --repository-name %s --image-ids imageTag=%s

            3. Run the Docker container and view the output using this command:

               docker run --rm %s.dkr.ecr.us-east-1.amazonaws.com/%s:%s
            """;

            instructions = String.format(instructions, accountId, repoName,
 localImageName, accountId, repoName, localImageName);
            System.out.println(instructions);
        }
        waitForInputToContinue(scanner);
```

```
        System.out.println(DASHES);
        System.out.println("10. Delete the ECR Repository.");
        System.out.println(
        """
        If the repository isn't empty, you must either delete the contents of the
 repository
        or use the force option (used in this scenario) to delete the repository and
 have Amazon ECR delete all of its contents
        on your behalf.
        """);
        System.out.println("Would you like to delete the Amazon ECR Repository? (y/
n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            System.out.println("You selected to delete the AWS ECR resources.");

            try {
                ecrActions.deleteECRRepository(repoName);

            } catch (EcrException e) {
                System.err.println("An ECR exception occurred: " + e.getMessage());
                return;
            } catch (RuntimeException e) {
                System.err.println("An error occurred while deleting the Docker
 image: " + e.getMessage());
                e.printStackTrace();
                return;
            }
        }

        System.out.println(DASHES);
        System.out.println("This concludes the Amazon ECR SDK scenario");
        System.out.println(DASHES);
    }

   private static void waitForInputToContinue(Scanner scanner) {
       while (true) {
           System.out.println("");
           System.out.println("Enter 'c' followed by <ENTER> to continue:");
           String input = scanner.nextLine();

           if (input.trim().equalsIgnoreCase("c")) {
               System.out.println("Continuing with the program...");
               System.out.println("");
```

```
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }
}
```

Una clase contenedora para métodos del SDK de Amazon ECR.

```
import com.github.dockerjava.api.DockerClient;
import com.github.dockerjava.api.exception.DockerClientException;
import com.github.dockerjava.api.model.AuthConfig;
import com.github.dockerjava.api.model.Image;
import com.github.dockerjava.core.DockerClientBuilder;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecr.EcrAsyncClient;
import software.amazon.awssdk.services.ecr.model.AuthorizationData;
import software.amazon.awssdk.services.ecr.model.CreateRepositoryRequest;
import software.amazon.awssdk.services.ecr.model.CreateRepositoryResponse;
import software.amazon.awssdk.services.ecr.model.DeleteRepositoryRequest;
import software.amazon.awssdk.services.ecr.model.DeleteRepositoryResponse;
import software.amazon.awssdk.services.ecr.model.DescribeImagesRequest;
import software.amazon.awssdk.services.ecr.model.DescribeImagesResponse;
import software.amazon.awssdk.services.ecr.model.DescribeRepositoriesRequest;
import software.amazon.awssdk.services.ecr.model.DescribeRepositoriesResponse;
import software.amazon.awssdk.services.ecr.model.EcrException;
import software.amazon.awssdk.services.ecr.model.GetAuthorizationTokenResponse;
import software.amazon.awssdk.services.ecr.model.GetRepositoryPolicyRequest;
import software.amazon.awssdk.services.ecr.model.GetRepositoryPolicyResponse;
import software.amazon.awssdk.services.ecr.model.ImageIdentifier;
import software.amazon.awssdk.services.ecr.model.Repository;
import software.amazon.awssdk.services.ecr.model.RepositoryPolicyNotFoundException;
import software.amazon.awssdk.services.ecr.model.SetRepositoryPolicyRequest;
import software.amazon.awssdk.services.ecr.model.SetRepositoryPolicyResponse;
import software.amazon.awssdk.services.ecr.model.StartLifecyclePolicyPreviewRequest;
```

```
import
 software.amazon.awssdk.services.ecr.model.StartLifecyclePolicyPreviewResponse;
import com.github.dockerjava.api.command.DockerCmdExecFactory;
import com.github.dockerjava.netty.NettyDockerCmdExecFactory;
import java.time.Duration;
import java.util.Base64;
import java.util.List;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;

public class ECRActions {
    private static EcrAsyncClient ecrClient;

    private static DockerClient dockerClient;

    private static Logger logger = LoggerFactory.getLogger(ECRActions.class);

    /**
     * Creates an Amazon Elastic Container Registry (Amazon ECR) repository.
     *
     * @param repoName the name of the repository to create.
     * @return the Amazon Resource Name (ARN) of the created repository, or an empty
 string if the operation failed.
     * @throws IllegalArgumentException     If repository name is invalid.
     * @throws RuntimeException             if an error occurs while creating the
 repository.
     */
    public String createECRRepository(String repoName) {
        if (repoName == null || repoName.isEmpty()) {
            throw new IllegalArgumentException("Repository name cannot be null or
 empty");
        }

        CreateRepositoryRequest request = CreateRepositoryRequest.builder()
            .repositoryName(repoName)
            .build();

        CompletableFuture<CreateRepositoryResponse> response =
 getAsyncClient().createRepository(request);
        try {
            CreateRepositoryResponse result = response.join();
            if (result != null) {
                System.out.println("The " + repoName + " repository was created
 successfully.");
```

```
                return result.repository().repositoryArn();
            } else {
                throw new RuntimeException("Unexpected response type");
            }
        } catch (CompletionException e) {
            Throwable cause = e.getCause();
            if (cause instanceof EcrException ex) {
                if
("RepositoryAlreadyExistsException".equals(ex.awsErrorDetails().errorCode())) {
                    System.out.println("The Amazon ECR repository already exists,
moving on...");
                    DescribeRepositoriesRequest describeRequest =
DescribeRepositoriesRequest.builder()
                        .repositoryNames(repoName)
                        .build();
                    DescribeRepositoriesResponse describeResponse =
getAsyncClient().describeRepositories(describeRequest).join();
                    return describeResponse.repositories().get(0).repositoryArn();
                } else {
                    throw new RuntimeException(ex);
                }
            } else {
                throw new RuntimeException(e);
            }
        }
    }

    /**
     * Deletes an ECR (Elastic Container Registry) repository.
     *
     * @param repoName the name of the repository to delete.
     * @throws IllegalArgumentException if the repository name is null or empty.
     * @throws EcrException if there is an error deleting the repository.
     * @throws RuntimeException if an unexpected error occurs during the deletion
process.
     */
    public void deleteECRRepository(String repoName) {
        if (repoName == null || repoName.isEmpty()) {
            throw new IllegalArgumentException("Repository name cannot be null or
empty");
        }

        DeleteRepositoryRequest repositoryRequest =
DeleteRepositoryRequest.builder()
```

```
            .force(true)
            .repositoryName(repoName)
            .build();

        CompletableFuture<DeleteRepositoryResponse> response =
getAsyncClient().deleteRepository(repositoryRequest);
        response.whenComplete((deleteRepositoryResponse, ex) -> {
            if (deleteRepositoryResponse != null) {
                System.out.println("You have successfully deleted the " + repoName +
" repository");
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof EcrException) {
                    throw (EcrException) cause;
                } else {
                    throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
                }
            }
        });

        // Wait for the CompletableFuture to complete
        response.join();
    }



    private static DockerClient getDockerClient() {
        String osName = System.getProperty("os.name");
        if (osName.startsWith("Windows")) {
            // Make sure Docker Desktop is running.
            String dockerHost = "tcp://localhost:2375"; // Use the Docker Desktop
default port.
            DockerCmdExecFactory dockerCmdExecFactory = new
NettyDockerCmdExecFactory().withReadTimeout(20000).withConnectTimeout(20000);
            dockerClient =
DockerClientBuilder.getInstance(dockerHost).withDockerCmdExecFactory(dockerCmdExecFactory).
        } else {
            dockerClient = DockerClientBuilder.getInstance().build();
        }
        return dockerClient;
    }

    /**
```

```
    * Retrieves an asynchronous Amazon Elastic Container Registry (ECR) client.
    *
    * @return the configured ECR asynchronous client.
    */
   private static EcrAsyncClient getAsyncClient() {

       /*
        The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
version 2,
        and it is designed to provide a high-performance, asynchronous HTTP client
for interacting with AWS services.
        It uses the Netty framework to handle the underlying network communication
and the Java NIO API to
        provide a non-blocking, event-driven approach to HTTP requests and
responses.
        */
       SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
           .maxConcurrency(50)  // Adjust as needed.
           .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
timeout.
           .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
           .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
           .build();

       ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
           .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
timeout.
           .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the individual
call attempt timeout.
           .build();

       if (ecrClient == null) {
           ecrClient = EcrAsyncClient.builder()
               .region(Region.US_EAST_1)
               .httpClient(httpClient)
               .overrideConfiguration(overrideConfig)
               .build();
       }
       return ecrClient;
   }

   /**
    * Sets the lifecycle policy for the specified repository.
```

```
     *
     * @param repoName the name of the repository for which to set the lifecycle
 policy.
     */
    public void setLifeCyclePolicy(String repoName) {
        /*
           This policy helps to maintain the size and efficiency of the container
 registry
           by automatically removing older and potentially unused images,
           ensuring that the storage is optimized and the registry remains up-to-
date.
         */
        String polText = """
             {
             "rules": [
                 {
                     "rulePriority": 1,
                     "description": "Expire images older than 14 days",
                     "selection": {
                         "tagStatus": "any",
                         "countType": "sinceImagePushed",
                         "countUnit": "days",
                         "countNumber": 14
                     },
                     "action": {
                         "type": "expire"
                     }
                 }
             ]
             }
             """;

        StartLifecyclePolicyPreviewRequest lifecyclePolicyPreviewRequest =
 StartLifecyclePolicyPreviewRequest.builder()
             .lifecyclePolicyText(polText)
             .repositoryName(repoName)
             .build();

        CompletableFuture<StartLifecyclePolicyPreviewResponse> response =
 getAsyncClient().startLifecyclePolicyPreview(lifecyclePolicyPreviewRequest);
        response.whenComplete((lifecyclePolicyPreviewResponse, ex) -> {
            if (lifecyclePolicyPreviewResponse != null) {
                System.out.println("Lifecycle policy preview started
 successfully.");
```

```
            } else {
                if (ex.getCause() instanceof EcrException) {
                    throw (EcrException) ex.getCause();
                } else {
                    String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                    throw new RuntimeException(errorMessage, ex);
                }
            }
        });
        // Wait for the CompletableFuture to complete.
        response.join();
    }

    /**
     * Verifies the existence of an image in an Amazon Elastic Container Registry
(Amazon ECR) repository asynchronously.
     *
     * @param repositoryName The name of the Amazon ECR repository.
     * @param imageTag       The tag of the image to verify.
     * @throws EcrException             if there is an error retrieving the image
information from Amazon ECR.
     * @throws CompletionException      if the asynchronous operation completes
exceptionally.
     */
    public void verifyImage(String repositoryName, String imageTag) {
        DescribeImagesRequest request = DescribeImagesRequest.builder()
            .repositoryName(repositoryName)
            .imageIds(ImageIdentifier.builder().imageTag(imageTag).build())
            .build();

        CompletableFuture<DescribeImagesResponse> response =
getAsyncClient().describeImages(request);
        response.whenComplete((describeImagesResponse, ex) -> {
            if (ex != null) {
                if (ex instanceof CompletionException) {
                    Throwable cause = ex.getCause();
                    if (cause instanceof EcrException) {
                        throw (EcrException) cause;
                    } else {
                        throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
                    }
                } else {
```

```
                    throw new RuntimeException("Unexpected error: " +
 ex.getCause());
                }
            } else if (describeImagesResponse != null && !
describeImagesResponse.imageDetails().isEmpty()) {
                System.out.println("Image is present in the repository.");
            } else {
                System.out.println("Image is not present in the repository.");
            }
        });

        // Wait for the CompletableFuture to complete.
        response.join();
    }

    /**
     * Retrieves the repository URI for the specified repository name.
     *
     * @param repoName the name of the repository to retrieve the URI for.
     * @return the repository URI for the specified repository name.
     * @throws EcrException        if there is an error retrieving the repository
 information.
     * @throws CompletionException if the asynchronous operation completes
 exceptionally.
     */
    public void getRepositoryURI(String repoName) {
        DescribeRepositoriesRequest request = DescribeRepositoriesRequest.builder()
            .repositoryNames(repoName)
            .build();

        CompletableFuture<DescribeRepositoriesResponse> response =
 getAsyncClient().describeRepositories(request);
        response.whenComplete((describeRepositoriesResponse, ex) -> {
            if (ex != null) {
                Throwable cause = ex.getCause();
                if (cause instanceof InterruptedException) {
                    Thread.currentThread().interrupt();
                    String errorMessage = "Thread interrupted while waiting for
 asynchronous operation: " + cause.getMessage();
                    throw new RuntimeException(errorMessage, cause);
                } else if (cause instanceof EcrException) {
                    throw (EcrException) cause;
                } else {
                    String errorMessage = "Unexpected error: " + cause.getMessage();
```

```
                    throw new RuntimeException(errorMessage, cause);
                }
            } else {
                if (describeRepositoriesResponse != null) {
                    if (!describeRepositoriesResponse.repositories().isEmpty()) {
                        String repositoryUri =
describeRepositoriesResponse.repositories().get(0).repositoryUri();
                        System.out.println("Repository URI found: " +
repositoryUri);
                    } else {
                        System.out.println("No repositories found for the given
name.");
                    }
                } else {
                    System.err.println("No response received from
describeRepositories.");
                }
            }
        });
        response.join();
    }

    /**
     * Retrieves the authorization token for Amazon Elastic Container Registry
(ECR).
     * This method makes an asynchronous call to the ECR client to retrieve the
authorization token.
     * If the operation is successful, the method prints the token to the console.
     * If an exception occurs, the method handles the exception and prints the error
message.
     *
     * @throws EcrException     if there is an error retrieving the authorization
token from ECR.
     * @throws RuntimeException if there is an unexpected error during the
operation.
     */
    public void getAuthToken() {
        CompletableFuture<GetAuthorizationTokenResponse> response =
getAsyncClient().getAuthorizationToken();
        response.whenComplete((authorizationTokenResponse, ex) -> {
            if (authorizationTokenResponse != null) {
                AuthorizationData authorizationData =
authorizationTokenResponse.authorizationData().get(0);
                String token = authorizationData.authorizationToken();
```

```
                if (!token.isEmpty()) {
                    System.out.println("The token was successfully retrieved.");
                }
            } else {
                if (ex.getCause() instanceof EcrException) {
                    throw (EcrException) ex.getCause();
                } else {
                    String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                    throw new RuntimeException(errorMessage, ex); // Rethrow the
exception
                }
            }
        });
        response.join();
    }

    /**
     * Gets the repository policy for the specified repository.
     *
     * @param repoName the name of the repository.
     * @throws EcrException if an AWS error occurs while getting the repository
policy.
     */
    public String getRepoPolicy(String repoName) {
        if (repoName == null || repoName.isEmpty()) {
            throw new IllegalArgumentException("Repository name cannot be null or
empty");
        }

        GetRepositoryPolicyRequest getRepositoryPolicyRequest =
GetRepositoryPolicyRequest.builder()
            .repositoryName(repoName)
            .build();

        CompletableFuture<GetRepositoryPolicyResponse> response =
getAsyncClient().getRepositoryPolicy(getRepositoryPolicyRequest);
        response.whenComplete((resp, ex) -> {
            if (resp != null) {
                System.out.println("Repository policy retrieved successfully.");
            } else {
                if (ex.getCause() instanceof EcrException) {
                    throw (EcrException) ex.getCause();
                } else {
```

```
                    String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                    throw new RuntimeException(errorMessage, ex);
                }
            }
        });

        GetRepositoryPolicyResponse result = response.join();
        return result != null ? result.policyText() : null;
    }

    /**
     * Sets the repository policy for the specified ECR repository.
     *
     * @param repoName the name of the ECR repository.
     * @param iamRole  the IAM role to be granted access to the repository.
     * @throws RepositoryPolicyNotFoundException if the repository policy does not
exist.
     * @throws EcrException                      if there is an unexpected error
setting the repository policy.
     */
    public void setRepoPolicy(String repoName, String iamRole) {
        /*
          This example policy document grants the specified AWS principal the
permission to perform the
          `ecr:BatchGetImage` action. This policy is designed to allow the specified
principal
          to retrieve Docker images from the ECR repository.
         */
        String policyDocumentTemplate = """
             {
              "Version":"2012-10-17",
              "Statement" : [ {
                "Sid" : "new statement",
                "Effect" : "Allow",
                "Principal" : {
                  "AWS" : "%s"
                },
                "Action" : "ecr:BatchGetImage"
              } ]
            }
             """;

        String policyDocument = String.format(policyDocumentTemplate, iamRole);
```

```
        SetRepositoryPolicyRequest setRepositoryPolicyRequest =
SetRepositoryPolicyRequest.builder()
            .repositoryName(repoName)
            .policyText(policyDocument)
            .build();

        CompletableFuture<SetRepositoryPolicyResponse> response =
getAsyncClient().setRepositoryPolicy(setRepositoryPolicyRequest);
        response.whenComplete((resp, ex) -> {
            if (resp != null) {
                System.out.println("Repository policy set successfully.");
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof RepositoryPolicyNotFoundException) {
                    throw (RepositoryPolicyNotFoundException) cause;
                } else if (cause instanceof EcrException) {
                    throw (EcrException) cause;
                } else {
                    String errorMessage = "Unexpected error: " + cause.getMessage();
                    throw new RuntimeException(errorMessage, cause);
                }
            }
        });
        response.join();
    }

    /**
     * Pushes a Docker image to an Amazon Elastic Container Registry (ECR)
repository.
     *
     * @param repoName  the name of the ECR repository to push the image to.
     * @param imageName the name of the Docker image.
     */
    public void pushDockerImage(String repoName, String imageName) {
        System.out.println("Pushing " + imageName + " to Amazon ECR will take a few
seconds.");
        CompletableFuture<AuthConfig> authResponseFuture =
getAsyncClient().getAuthorizationToken()
            .thenApply(response -> {
                String token =
response.authorizationData().get(0).authorizationToken();
                String decodedToken = new String(Base64.getDecoder().decode(token));
                String password = decodedToken.substring(4);
```

```
                DescribeRepositoriesResponse descrRepoResponse =
 getAsyncClient().describeRepositories(b -> b.repositoryNames(repoName)).join();
                Repository repoData =
 descrRepoResponse.repositories().stream().filter(r ->
 r.repositoryName().equals(repoName)).findFirst().orElse(null);
                assert repoData != null;
                String registryURL = repoData.repositoryUri().split("/")[0];

                AuthConfig authConfig = new AuthConfig()
                    .withUsername("AWS")
                    .withPassword(password)
                    .withRegistryAddress(registryURL);
                return authConfig;
            })
            .thenCompose(authConfig -> {
                DescribeRepositoriesResponse descrRepoResponse =
 getAsyncClient().describeRepositories(b -> b.repositoryNames(repoName)).join();
                Repository repoData =
 descrRepoResponse.repositories().stream().filter(r ->
 r.repositoryName().equals(repoName)).findFirst().orElse(null);
                getDockerClient().tagImageCmd(imageName + ":latest",
 repoData.repositoryUri() + ":latest", imageName).exec();
                try {

 getDockerClient().pushImageCmd(repoData.repositoryUri()).withTag("echo-
text").withAuthConfig(authConfig).start().awaitCompletion();
                    System.out.println("The " + imageName + " was pushed to ECR");

                } catch (InterruptedException e) {
                    throw (RuntimeException) e.getCause();
                }
                return CompletableFuture.completedFuture(authConfig);
            });

        authResponseFuture.join();
    }

    // Make sure local image echo-text exists.
    public boolean isEchoTextImagePresent() {
        try {
            List<Image> images = getDockerClient().listImagesCmd().exec();
            boolean helloWorldFound = false;
            for (Image image : images) {
                String[] repoTags = image.getRepoTags();
```

```
                if (repoTags != null) {
                    for (String tag : repoTags) {
                        if (tag.startsWith("echo-text")) {
                            System.out.println(tag);
                            helloWorldFound = true;
                        }
                    }
                }
            }
            if (helloWorldFound) {
                System.out.println("The local image named echo-text exists.");
                return true;
            } else {
                System.out.println("The local image named echo-text does not
 exist.");
                return false;
            }
        } catch (DockerClientException ex) {
            logger.error("ERROR: " + ex.getMessage());
            return false;
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateRepository
  - DeleteRepository
  - DescribeImages
  - DescribeRepositories
  - GetAuthorizationToken
  - GetRepositoryPolicy
  - SetRepositoryPolicy
  - StartLifecyclePolicyPreview

Acciones

`CreateRepository`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateRepository`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates an Amazon Elastic Container Registry (Amazon ECR) repository.
    *
    * @param repoName the name of the repository to create.
    * @return the Amazon Resource Name (ARN) of the created repository, or an empty
string if the operation failed.
    * @throws IllegalArgumentException     If repository name is invalid.
    * @throws RuntimeException             if an error occurs while creating the
repository.
    */
   public String createECRRepository(String repoName) {
       if (repoName == null || repoName.isEmpty()) {
           throw new IllegalArgumentException("Repository name cannot be null or
empty");
       }

       CreateRepositoryRequest request = CreateRepositoryRequest.builder()
           .repositoryName(repoName)
           .build();

       CompletableFuture<CreateRepositoryResponse> response =
getAsyncClient().createRepository(request);
       try {
           CreateRepositoryResponse result = response.join();
           if (result != null) {
               System.out.println("The " + repoName + " repository was created
successfully.");
               return result.repository().repositoryArn();
```

```
            } else {
                throw new RuntimeException("Unexpected response type");
            }
        } catch (CompletionException e) {
            Throwable cause = e.getCause();
            if (cause instanceof EcrException ex) {
                if
("RepositoryAlreadyExistsException".equals(ex.awsErrorDetails().errorCode())) {
                    System.out.println("The Amazon ECR repository already exists,
moving on...");
                    DescribeRepositoriesRequest describeRequest =
DescribeRepositoriesRequest.builder()
                        .repositoryNames(repoName)
                        .build();
                    DescribeRepositoriesResponse describeResponse =
getAsyncClient().describeRepositories(describeRequest).join();
                    return describeResponse.repositories().get(0).repositoryArn();
                } else {
                    throw new RuntimeException(ex);
                }
            } else {
                throw new RuntimeException(e);
            }
        }
    }
```

- Para obtener más información sobre la API, consulta CreateRepositorylla Referencia AWS SDK for Java 2.x de la API.

`DeleteRepository`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteRepository`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deletes an ECR (Elastic Container Registry) repository.
    *
    * @param repoName the name of the repository to delete.
    * @throws IllegalArgumentException if the repository name is null or empty.
    * @throws EcrException if there is an error deleting the repository.
    * @throws RuntimeException if an unexpected error occurs during the deletion
process.
    */
   public void deleteECRRepository(String repoName) {
       if (repoName == null || repoName.isEmpty()) {
           throw new IllegalArgumentException("Repository name cannot be null or
empty");
       }

       DeleteRepositoryRequest repositoryRequest =
DeleteRepositoryRequest.builder()
           .force(true)
           .repositoryName(repoName)
           .build();

       CompletableFuture<DeleteRepositoryResponse> response =
getAsyncClient().deleteRepository(repositoryRequest);
       response.whenComplete((deleteRepositoryResponse, ex) -> {
           if (deleteRepositoryResponse != null) {
               System.out.println("You have successfully deleted the " + repoName +
" repository");
           } else {
               Throwable cause = ex.getCause();
               if (cause instanceof EcrException) {
                   throw (EcrException) cause;
               } else {
                   throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
               }
           }
       });

       // Wait for the CompletableFuture to complete
       response.join();
   }
```

- Para obtener más información sobre la API, consulta DeleteRepositoryla Referencia AWS SDK for Java 2.x de la API.

`DescribeImages`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeImages`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Verifies the existence of an image in an Amazon Elastic Container Registry
(Amazon ECR) repository asynchronously.
    *
    * @param repositoryName The name of the Amazon ECR repository.
    * @param imageTag       The tag of the image to verify.
    * @throws EcrException             if there is an error retrieving the image
information from Amazon ECR.
    * @throws CompletionException      if the asynchronous operation completes
exceptionally.
    */
   public void verifyImage(String repositoryName, String imageTag) {
       DescribeImagesRequest request = DescribeImagesRequest.builder()
           .repositoryName(repositoryName)
           .imageIds(ImageIdentifier.builder().imageTag(imageTag).build())
           .build();

       CompletableFuture<DescribeImagesResponse> response =
getAsyncClient().describeImages(request);
       response.whenComplete((describeImagesResponse, ex) -> {
           if (ex != null) {
               if (ex instanceof CompletionException) {
                   Throwable cause = ex.getCause();
                   if (cause instanceof EcrException) {
                       throw (EcrException) cause;
                   } else {
```

```
                        throw new RuntimeException("Unexpected error: " +
 cause.getMessage(), cause);
                    }
                } else {
                    throw new RuntimeException("Unexpected error: " +
 ex.getCause());
                }
            } else if (describeImagesResponse != null && !
describeImagesResponse.imageDetails().isEmpty()) {
                System.out.println("Image is present in the repository.");
            } else {
                System.out.println("Image is not present in the repository.");
            }
        });

        // Wait for the CompletableFuture to complete.
        response.join();
    }
```

- Para obtener más información sobre la API, consulta DescribeImagesla Referencia AWS SDK for Java 2.x de la API.

`DescribeRepositories`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeRepositories`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Retrieves the repository URI for the specified repository name.
     *
     * @param repoName the name of the repository to retrieve the URI for.
     * @return the repository URI for the specified repository name.
```

```
    * @throws EcrException        if there is an error retrieving the repository
information.
    * @throws CompletionException if the asynchronous operation completes
exceptionally.
    */
   public void getRepositoryURI(String repoName) {
       DescribeRepositoriesRequest request = DescribeRepositoriesRequest.builder()
           .repositoryNames(repoName)
           .build();

       CompletableFuture<DescribeRepositoriesResponse> response =
getAsyncClient().describeRepositories(request);
       response.whenComplete((describeRepositoriesResponse, ex) -> {
           if (ex != null) {
               Throwable cause = ex.getCause();
               if (cause instanceof InterruptedException) {
                   Thread.currentThread().interrupt();
                   String errorMessage = "Thread interrupted while waiting for
asynchronous operation: " + cause.getMessage();
                   throw new RuntimeException(errorMessage, cause);
               } else if (cause instanceof EcrException) {
                   throw (EcrException) cause;
               } else {
                   String errorMessage = "Unexpected error: " + cause.getMessage();
                   throw new RuntimeException(errorMessage, cause);
               }
           } else {
               if (describeRepositoriesResponse != null) {
                   if (!describeRepositoriesResponse.repositories().isEmpty()) {
                       String repositoryUri =
describeRepositoriesResponse.repositories().get(0).repositoryUri();
                       System.out.println("Repository URI found: " +
repositoryUri);
                   } else {
                       System.out.println("No repositories found for the given
name.");
                   }
               } else {
                   System.err.println("No response received from
describeRepositories.");
               }
           }
       });
       response.join();
```

```
    }
```

- Para obtener más información sobre la API, consulta DescribeRepositoriesla Referencia AWS SDK for Java 2.x de la API.

`GetAuthorizationToken`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetAuthorizationToken`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Retrieves the authorization token for Amazon Elastic Container Registry
(ECR).
    * This method makes an asynchronous call to the ECR client to retrieve the
authorization token.
    * If the operation is successful, the method prints the token to the console.
    * If an exception occurs, the method handles the exception and prints the error
message.
    *
    * @throws EcrException     if there is an error retrieving the authorization
token from ECR.
    * @throws RuntimeException if there is an unexpected error during the
operation.
    */
   public void getAuthToken() {
       CompletableFuture<GetAuthorizationTokenResponse> response =
getAsyncClient().getAuthorizationToken();
       response.whenComplete((authorizationTokenResponse, ex) -> {
           if (authorizationTokenResponse != null) {
               AuthorizationData authorizationData =
authorizationTokenResponse.authorizationData().get(0);
               String token = authorizationData.authorizationToken();
               if (!token.isEmpty()) {
```

```
                    System.out.println("The token was successfully retrieved.");
                }
            } else {
                if (ex.getCause() instanceof EcrException) {
                    throw (EcrException) ex.getCause();
                } else {
                    String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                    throw new RuntimeException(errorMessage, ex); // Rethrow the
exception
                }
            }
        });
        response.join();
    }
```

- Para obtener más información sobre la API, consulta [GetAuthorizationToken](la Referencia AWS SDK for Java 2.x de la API.

`GetRepositoryPolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetRepositoryPolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el [Repositorio de ejemplos de código de AWS].

```
    /**
     * Gets the repository policy for the specified repository.
     *
     * @param repoName the name of the repository.
     * @throws EcrException if an AWS error occurs while getting the repository
policy.
     */
    public String getRepoPolicy(String repoName) {
        if (repoName == null || repoName.isEmpty()) {
```

```
            throw new IllegalArgumentException("Repository name cannot be null or
empty");
        }

        GetRepositoryPolicyRequest getRepositoryPolicyRequest =
GetRepositoryPolicyRequest.builder()
            .repositoryName(repoName)
            .build();

        CompletableFuture<GetRepositoryPolicyResponse> response =
getAsyncClient().getRepositoryPolicy(getRepositoryPolicyRequest);
        response.whenComplete((resp, ex) -> {
            if (resp != null) {
                System.out.println("Repository policy retrieved successfully.");
            } else {
                if (ex.getCause() instanceof EcrException) {
                    throw (EcrException) ex.getCause();
                } else {
                    String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                    throw new RuntimeException(errorMessage, ex);
                }
            }
        });

        GetRepositoryPolicyResponse result = response.join();
        return result != null ? result.policyText() : null;
    }
```

- Para obtener más información sobre la API, consulta GetRepositoryPolicyla Referencia AWS SDK for Java 2.x de la API.

`PushImageCmd`

En el siguiente ejemplo de código, se muestra cómo utilizar `PushImageCmd`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Pushes a Docker image to an Amazon Elastic Container Registry (ECR)
repository.
    *
    * @param repoName  the name of the ECR repository to push the image to.
    * @param imageName the name of the Docker image.
    */
   public void pushDockerImage(String repoName, String imageName) {
       System.out.println("Pushing " + imageName + " to Amazon ECR will take a few
seconds.");
       CompletableFuture<AuthConfig> authResponseFuture =
getAsyncClient().getAuthorizationToken()
           .thenApply(response -> {
               String token =
response.authorizationData().get(0).authorizationToken();
               String decodedToken = new String(Base64.getDecoder().decode(token));
               String password = decodedToken.substring(4);

               DescribeRepositoriesResponse descrRepoResponse =
getAsyncClient().describeRepositories(b -> b.repositoryNames(repoName)).join();
               Repository repoData =
descrRepoResponse.repositories().stream().filter(r ->
r.repositoryName().equals(repoName)).findFirst().orElse(null);
               assert repoData != null;
               String registryURL = repoData.repositoryUri().split("/")[0];

               AuthConfig authConfig = new AuthConfig()
                   .withUsername("AWS")
                   .withPassword(password)
                   .withRegistryAddress(registryURL);
               return authConfig;
           })
           .thenCompose(authConfig -> {
```

```
                DescribeRepositoriesResponse descrRepoResponse =
 getAsyncClient().describeRepositories(b -> b.repositoryNames(repoName)).join();
                Repository repoData =
 descrRepoResponse.repositories().stream().filter(r ->
 r.repositoryName().equals(repoName)).findFirst().orElse(null);
                getDockerClient().tagImageCmd(imageName + ":latest",
 repoData.repositoryUri() + ":latest", imageName).exec();
                try {

 getDockerClient().pushImageCmd(repoData.repositoryUri()).withTag("echo-
text").withAuthConfig(authConfig).start().awaitCompletion();
                    System.out.println("The " + imageName + " was pushed to ECR");

                } catch (InterruptedException e) {
                    throw (RuntimeException) e.getCause();
                }
                return CompletableFuture.completedFuture(authConfig);
            });

        authResponseFuture.join();
    }
```

- Para obtener más información sobre la API, consulta PushImageCmdla Referencia AWS SDK for Java 2.x de la API.

`SetRepositoryPolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `SetRepositoryPolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Sets the repository policy for the specified ECR repository.
     *
```

```
    * @param repoName the name of the ECR repository.
    * @param iamRole  the IAM role to be granted access to the repository.
    * @throws RepositoryPolicyNotFoundException if the repository policy does not
exist.
    * @throws EcrException                      if there is an unexpected error
setting the repository policy.
    */
   public void setRepoPolicy(String repoName, String iamRole) {
       /*
         This example policy document grants the specified AWS principal the
permission to perform the
         `ecr:BatchGetImage` action. This policy is designed to allow the specified
principal
         to retrieve Docker images from the ECR repository.
        */
       String policyDocumentTemplate = """
            {
             "Version":"2012-10-17",
             "Statement" : [ {
               "Sid" : "new statement",
               "Effect" : "Allow",
               "Principal" : {
                 "AWS" : "%s"
               },
               "Action" : "ecr:BatchGetImage"
             } ]
           }
            """;

       String policyDocument = String.format(policyDocumentTemplate, iamRole);
       SetRepositoryPolicyRequest setRepositoryPolicyRequest =
SetRepositoryPolicyRequest.builder()
           .repositoryName(repoName)
           .policyText(policyDocument)
           .build();

       CompletableFuture<SetRepositoryPolicyResponse> response =
getAsyncClient().setRepositoryPolicy(setRepositoryPolicyRequest);
       response.whenComplete((resp, ex) -> {
           if (resp != null) {
               System.out.println("Repository policy set successfully.");
           } else {
               Throwable cause = ex.getCause();
               if (cause instanceof RepositoryPolicyNotFoundException) {
```

```
                    throw (RepositoryPolicyNotFoundException) cause;
                } else if (cause instanceof EcrException) {
                    throw (EcrException) cause;
                } else {
                    String errorMessage = "Unexpected error: " + cause.getMessage();
                    throw new RuntimeException(errorMessage, cause);
                }
            }
        });
        response.join();
    }
```

- Para obtener más información sobre la API, consulta SetRepositoryPolicyla Referencia AWS SDK for Java 2.x de la API.

`StartLifecyclePolicyPreview`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartLifecyclePolicyPreview`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Verifies the existence of an image in an Amazon Elastic Container Registry
(Amazon ECR) repository asynchronously.
     *
     * @param repositoryName The name of the Amazon ECR repository.
     * @param imageTag       The tag of the image to verify.
     * @throws EcrException             if there is an error retrieving the image
information from Amazon ECR.
     * @throws CompletionException      if the asynchronous operation completes
exceptionally.
     */
    public void verifyImage(String repositoryName, String imageTag) {
        DescribeImagesRequest request = DescribeImagesRequest.builder()
```

```
            .repositoryName(repositoryName)
            .imageIds(ImageIdentifier.builder().imageTag(imageTag).build())
            .build();

        CompletableFuture<DescribeImagesResponse> response =
 getAsyncClient().describeImages(request);
        response.whenComplete((describeImagesResponse, ex) -> {
            if (ex != null) {
                if (ex instanceof CompletionException) {
                    Throwable cause = ex.getCause();
                    if (cause instanceof EcrException) {
                        throw (EcrException) cause;
                    } else {
                        throw new RuntimeException("Unexpected error: " +
 cause.getMessage(), cause);
                    }
                } else {
                    throw new RuntimeException("Unexpected error: " +
 ex.getCause());
                }
            } else if (describeImagesResponse != null &&
describeImagesResponse.imageDetails().isEmpty()) {
                System.out.println("Image is present in the repository.");
            } else {
                System.out.println("Image is not present in the repository.");
            }
        });

        // Wait for the CompletableFuture to complete.
        response.join();
    }
```

- Para obtener más información sobre la API, consulta StartLifecyclePolicyPreviewla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon ECS usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes AWS SDK for Java 2.x mediante Amazon ECS.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`CreateCluster`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateCluster`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.ExecuteCommandConfiguration;
import software.amazon.awssdk.services.ecs.model.ExecuteCommandLogging;
import software.amazon.awssdk.services.ecs.model.ClusterConfiguration;
import software.amazon.awssdk.services.ecs.model.CreateClusterResponse;
import software.amazon.awssdk.services.ecs.model.EcsException;
import software.amazon.awssdk.services.ecs.model.CreateClusterRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
```

```
public class CreateCluster {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                   <clusterName>\s

                Where:
                   clusterName - The name of the ECS cluster to create.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String clusterName = args[0];
        Region region = Region.US_EAST_1;
        EcsClient ecsClient = EcsClient.builder()
                .region(region)
                .build();

        String clusterArn = createGivenCluster(ecsClient, clusterName);
        System.out.println("The cluster ARN is " + clusterArn);
        ecsClient.close();
    }

    public static String createGivenCluster(EcsClient ecsClient, String clusterName)
{
        try {
            ExecuteCommandConfiguration commandConfiguration =
ExecuteCommandConfiguration.builder()
                    .logging(ExecuteCommandLogging.DEFAULT)
                    .build();

            ClusterConfiguration clusterConfiguration =
ClusterConfiguration.builder()
                    .executeCommandConfiguration(commandConfiguration)
                    .build();

            CreateClusterRequest clusterRequest = CreateClusterRequest.builder()
                    .clusterName(clusterName)
                    .configuration(clusterConfiguration)
                    .build();
```

```
            CreateClusterResponse response =
 ecsClient.createCluster(clusterRequest);
            return response.cluster().clusterArn();

        } catch (EcsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulta CreateClusterla Referencia AWS SDK for Java 2.x de la API.

`CreateService`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateService`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.AwsVpcConfiguration;
import software.amazon.awssdk.services.ecs.model.NetworkConfiguration;
import software.amazon.awssdk.services.ecs.model.CreateServiceRequest;
import software.amazon.awssdk.services.ecs.model.LaunchType;
import software.amazon.awssdk.services.ecs.model.CreateServiceResponse;
import software.amazon.awssdk.services.ecs.model.EcsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
```

```
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateService {
        public static void main(String[] args) {
                final String usage = """

                                Usage:
                                  <clusterName> <serviceName> <securityGroups>
 <subnets> <taskDefinition>

                                Where:
                                  clusterName - The name of the ECS cluster.
                                  serviceName - The name of the ECS service to
 create.
                                  securityGroups - The name of the security group.
                                  subnets - The name of the subnet.
                                  taskDefinition - The name of the task definition.
                                """;

                if (args.length != 5) {
                        System.out.println(usage);
                        System.exit(1);
                }

                String clusterName = args[0];
                String serviceName = args[1];
                String securityGroups = args[2];
                String subnets = args[3];
                String taskDefinition = args[4];
                Region region = Region.US_EAST_1;
                EcsClient ecsClient = EcsClient.builder()
                                .region(region)
                                .build();

                String serviceArn = createNewService(ecsClient, clusterName,
 serviceName, securityGroups, subnets,
                                taskDefinition);
                System.out.println("The ARN of the service is " + serviceArn);
                ecsClient.close();
        }
```

```
        public static String createNewService(EcsClient ecsClient,
                        String clusterName,
                        String serviceName,
                        String securityGroups,
                        String subnets,
                        String taskDefinition) {

                try {
                        AwsVpcConfiguration vpcConfiguration =
 AwsVpcConfiguration.builder()
                                        .securityGroups(securityGroups)
                                        .subnets(subnets)
                                        .build();

                        NetworkConfiguration configuration =
 NetworkConfiguration.builder()
                                        .awsvpcConfiguration(vpcConfiguration)
                                        .build();

                        CreateServiceRequest serviceRequest =
 CreateServiceRequest.builder()
                                        .cluster(clusterName)
                                        .networkConfiguration(configuration)
                                        .desiredCount(1)
                                        .launchType(LaunchType.FARGATE)
                                        .serviceName(serviceName)
                                        .taskDefinition(taskDefinition)
                                        .build();

                        CreateServiceResponse response =
 ecsClient.createService(serviceRequest);
                        return response.service().serviceArn();

                } catch (EcsException e) {
                        System.err.println(e.awsErrorDetails().errorMessage());
                        System.exit(1);
                }
                return "";
        }
}
```

- Para obtener más información sobre la API, consulta CreateServicela Referencia AWS SDK for Java 2.x de la API.

`DeleteService`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteService`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.DeleteServiceRequest;
import software.amazon.awssdk.services.ecs.model.EcsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DeleteService {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <clusterName> <serviceArn>\s

                Where:
                  clusterName - The name of the ECS cluster.
                  serviceArn - The ARN of the ECS service.
                """;

        if (args.length != 2) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        String clusterName = args[0];
        String serviceArn = args[1];
        Region region = Region.US_EAST_1;
        EcsClient ecsClient = EcsClient.builder()
                .region(region)
                .build();

        deleteSpecificService(ecsClient, clusterName, serviceArn);
        ecsClient.close();
    }

    public static void deleteSpecificService(EcsClient ecsClient, String
 clusterName, String serviceArn) {
        try {
            DeleteServiceRequest serviceRequest = DeleteServiceRequest.builder()
                    .cluster(clusterName)
                    .service(serviceArn)
                    .build();

            ecsClient.deleteService(serviceRequest);
            System.out.println("The Service was successfully deleted");

        } catch (EcsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteServicela Referencia AWS SDK for Java 2.x de la API.

`DescribeClusters`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeClusters`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.DescribeClustersRequest;
import software.amazon.awssdk.services.ecs.model.DescribeClustersResponse;
import software.amazon.awssdk.services.ecs.model.Cluster;
import software.amazon.awssdk.services.ecs.model.EcsException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeClusters {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <clusterArn> \s

                Where:
                  clusterArn - The ARN of the ECS cluster to describe.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String clusterArn = args[0];
        Region region = Region.US_EAST_1;
```

```
        EcsClient ecsClient = EcsClient.builder()
                .region(region)
                .build();

        descCluster(ecsClient, clusterArn);
    }

    public static void descCluster(EcsClient ecsClient, String clusterArn) {
        try {
            DescribeClustersRequest clustersRequest =
 DescribeClustersRequest.builder()
                    .clusters(clusterArn)
                    .build();

            DescribeClustersResponse response =
 ecsClient.describeClusters(clustersRequest);
            List<Cluster> clusters = response.clusters();
            for (Cluster cluster : clusters) {
                System.out.println("The cluster name is " + cluster.clusterName());
            }

        } catch (EcsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DescribeClustersla Referencia AWS SDK for Java 2.x de la API.

`DescribeTasks`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeTasks`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.DescribeTasksRequest;
import software.amazon.awssdk.services.ecs.model.DescribeTasksResponse;
import software.amazon.awssdk.services.ecs.model.EcsException;
import software.amazon.awssdk.services.ecs.model.Task;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListTaskDefinitions {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <clusterArn> <taskId>\s

                Where:
                  clusterArn - The ARN of an ECS cluster.
                  taskId - The task Id value.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String clusterArn = args[0];
```

```
        String taskId = args[1];
        Region region = Region.US_EAST_1;
        EcsClient ecsClient = EcsClient.builder()
                .region(region)
                .build();

        getAllTasks(ecsClient, clusterArn, taskId);
        ecsClient.close();
    }

    public static void getAllTasks(EcsClient ecsClient, String clusterArn, String
 taskId) {
        try {
            DescribeTasksRequest tasksRequest = DescribeTasksRequest.builder()
                    .cluster(clusterArn)
                    .tasks(taskId)
                    .build();

            DescribeTasksResponse response = ecsClient.describeTasks(tasksRequest);
            List<Task> tasks = response.tasks();
            for (Task task : tasks) {
                System.out.println("The task ARN is " + task.taskDefinitionArn());
            }

        } catch (EcsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DescribeTasksla Referencia AWS SDK for Java 2.x de la API.

`ListClusters`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListClusters`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.ListClustersResponse;
import software.amazon.awssdk.services.ecs.model.EcsException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class ListClusters {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        EcsClient ecsClient = EcsClient.builder()
                .region(region)
                .build();

        listAllClusters(ecsClient);
        ecsClient.close();
    }

    public static void listAllClusters(EcsClient ecsClient) {
        try {
            ListClustersResponse response = ecsClient.listClusters();
            List<String> clusters = response.clusterArns();
            for (String cluster : clusters) {
                System.out.println("The cluster arn is " + cluster);
            }
```

```
        } catch (EcsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListClustersla Referencia AWS SDK for Java 2.x de la API.

`UpdateService`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateService`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.EcsException;
import software.amazon.awssdk.services.ecs.model.UpdateServiceRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class UpdateService {

    public static void main(String[] args) {
```

```
        final String usage = """

                Usage:
                   <clusterName> <serviceArn>\s

                Where:
                  clusterName - The cluster name.
                  serviceArn - The service ARN value.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String clusterName = args[0];
        String serviceArn = args[1];
        Region region = Region.US_EAST_1;
        EcsClient ecsClient = EcsClient.builder()
                .region(region)
                .build();

        updateSpecificService(ecsClient, clusterName, serviceArn);
        ecsClient.close();
    }

    public static void updateSpecificService(EcsClient ecsClient, String
 clusterName, String serviceArn) {
        try {
            UpdateServiceRequest serviceRequest = UpdateServiceRequest.builder()
                    .cluster(clusterName)
                    .service(serviceArn)
                    .desiredCount(0)
                    .build();

            ecsClient.updateService(serviceRequest);
            System.out.println("The service was modified");

        } catch (EcsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta UpdateServicela Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Elastic Load Balancing, versión 2, con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x con Elastic Load Balancing, versión 2.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Acciones
- Escenarios

Introducción

Introducción al equilibrador de carga elástico

El siguiente ejemplo de código muestra cómo empezar a utilizar Elastic Load Balancing.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public class HelloLoadBalancer {

        public static void main(String[] args) {
                ElasticLoadBalancingV2Client loadBalancingV2Client =
 ElasticLoadBalancingV2Client.builder()
                                .region(Region.US_EAST_1)
                                .build();

                DescribeLoadBalancersResponse loadBalancersResponse =
 loadBalancingV2Client
                                .describeLoadBalancers(r -> r.pageSize(10));
                List<LoadBalancer> loadBalancerList =
 loadBalancersResponse.loadBalancers();
                for (LoadBalancer lb : loadBalancerList)
                        System.out.println("Load Balancer DNS name = " +
 lb.dnsName());
        }
}
```

- Para obtener más información sobre la API, consulta DescribeLoadBalancersla Referencia AWS SDK for Java 2.x de la API.

Acciones

`CreateListener`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateListener`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /*
    * Creates an Elastic Load Balancing load balancer that uses the specified
    * subnets
    * and forwards requests to the specified target group.
    */
   public String createLoadBalancer(List<Subnet> subnetIds, String targetGroupARN,
String lbName, int port,
           String protocol) {
       try {
           List<String> subnetIdStrings = subnetIds.stream()
                   .map(Subnet::subnetId)
                   .collect(Collectors.toList());

           CreateLoadBalancerRequest balancerRequest =
CreateLoadBalancerRequest.builder()
                   .subnets(subnetIdStrings)
                   .name(lbName)
                   .scheme("internet-facing")
                   .build();

           // Create and wait for the load balancer to become available.
           CreateLoadBalancerResponse lsResponse =
getLoadBalancerClient().createLoadBalancer(balancerRequest);
           String lbARN = lsResponse.loadBalancers().get(0).loadBalancerArn();

           ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
           DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                   .loadBalancerArns(lbARN)
                   .build();

           System.out.println("Waiting for Load Balancer " + lbName + " to become
available.");
```

```
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancerAvailable(request);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Load Balancer " + lbName + " is available.");

            // Get the DNS name (endpoint) of the load balancer.
            String lbDNSName = lsResponse.loadBalancers().get(0).dnsName();
            System.out.println("*** Load Balancer DNS Name: " + lbDNSName);

            // Create a listener for the load balance.
            Action action = Action.builder()
                    .targetGroupArn(targetGroupARN)
                    .type("forward")
                    .build();

            CreateListenerRequest listenerRequest = CreateListenerRequest.builder()

.loadBalancerArn(lsResponse.loadBalancers().get(0).loadBalancerArn())
                    .defaultActions(action)
                    .port(port)
                    .protocol(protocol)
                    .build();

            getLoadBalancerClient().createListener(listenerRequest);
            System.out.println("Created listener to forward traffic from load
balancer " + lbName + " to target group "
                    + targetGroupARN);

            // Return the load balancer DNS name.
            return lbDNSName;

        } catch (ElasticLoadBalancingV2Exception e) {
            e.printStackTrace();
        }
        return "";
    }
```

- Para obtener más información sobre la API, consulta CreateListenerla Referencia AWS SDK for Java 2.x de la API.

`CreateLoadBalancer`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateLoadBalancer`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /*
    * Creates an Elastic Load Balancing load balancer that uses the specified
    * subnets
    * and forwards requests to the specified target group.
    */
   public String createLoadBalancer(List<Subnet> subnetIds, String targetGroupARN,
String lbName, int port,
           String protocol) {
       try {
           List<String> subnetIdStrings = subnetIds.stream()
                   .map(Subnet::subnetId)
                   .collect(Collectors.toList());

           CreateLoadBalancerRequest balancerRequest =
CreateLoadBalancerRequest.builder()
                   .subnets(subnetIdStrings)
                   .name(lbName)
                   .scheme("internet-facing")
                   .build();

           // Create and wait for the load balancer to become available.
           CreateLoadBalancerResponse lsResponse =
getLoadBalancerClient().createLoadBalancer(balancerRequest);
           String lbARN = lsResponse.loadBalancers().get(0).loadBalancerArn();

           ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
           DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                   .loadBalancerArns(lbARN)
                   .build();
```

```
            System.out.println("Waiting for Load Balancer " + lbName + " to become
available.");
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancerAvailable(request);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Load Balancer " + lbName + " is available.");

            // Get the DNS name (endpoint) of the load balancer.
            String lbDNSName = lsResponse.loadBalancers().get(0).dnsName();
            System.out.println("*** Load Balancer DNS Name: " + lbDNSName);

            // Create a listener for the load balance.
            Action action = Action.builder()
                    .targetGroupArn(targetGroupARN)
                    .type("forward")
                    .build();

            CreateListenerRequest listenerRequest = CreateListenerRequest.builder()

.loadBalancerArn(lsResponse.loadBalancers().get(0).loadBalancerArn())
                    .defaultActions(action)
                    .port(port)
                    .protocol(protocol)
                    .build();

            getLoadBalancerClient().createListener(listenerRequest);
            System.out.println("Created listener to forward traffic from load
balancer " + lbName + " to target group "
                    + targetGroupARN);

            // Return the load balancer DNS name.
            return lbDNSName;

        } catch (ElasticLoadBalancingV2Exception e) {
            e.printStackTrace();
        }
        return "";
    }
```

- Para obtener más información sobre la API, consulta CreateLoadBalancerla Referencia AWS SDK for Java 2.x de la API.

`CreateTargetGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateTargetGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /*
    * Creates an Elastic Load Balancing target group. The target group specifies
    * how
    * the load balancer forward requests to instances in the group and how instance
    * health is checked.
    */
   public String createTargetGroup(String protocol, int port, String vpcId, String
targetGroupName) {
       CreateTargetGroupRequest targetGroupRequest =
CreateTargetGroupRequest.builder()
               .healthCheckPath("/healthcheck")
               .healthCheckTimeoutSeconds(5)
               .port(port)
               .vpcId(vpcId)
               .name(targetGroupName)
               .protocol(protocol)
               .build();

       CreateTargetGroupResponse targetGroupResponse =
getLoadBalancerClient().createTargetGroup(targetGroupRequest);
       String targetGroupArn =
targetGroupResponse.targetGroups().get(0).targetGroupArn();
       String targetGroup =
targetGroupResponse.targetGroups().get(0).targetGroupName();
       System.out.println("The " + targetGroup + " was created with ARN" +
targetGroupArn);
       return targetGroupArn;
```

```
    }
```

- Para obtener más información sobre la API, consulta CreateTargetGroupla Referencia AWS SDK for Java 2.x de la API.

`DeleteLoadBalancer`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteLoadBalancer`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   // Deletes a load balancer.
   public void deleteLoadBalancer(String lbName) {
       try {
           // Use a waiter to delete the Load Balancer.
           DescribeLoadBalancersResponse res = getLoadBalancerClient()
                   .describeLoadBalancers(describe -> describe.names(lbName));
           ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
           DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                   .loadBalancerArns(res.loadBalancers().get(0).loadBalancerArn())
                   .build();

           getLoadBalancerClient().deleteLoadBalancer(
                   builder ->
builder.loadBalancerArn(res.loadBalancers().get(0).loadBalancerArn()));
           WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                   .waitUntilLoadBalancersDeleted(request);
           waiterResponse.matched().response().ifPresent(System.out::println);

       } catch (ElasticLoadBalancingV2Exception e) {
           System.err.println(e.awsErrorDetails().errorMessage());
```

```
        }
        System.out.println(lbName + " was deleted.");
    }
```

- Para obtener más información sobre la API, consulta DeleteLoadBalancerla Referencia AWS SDK for Java 2.x de la API.

`DeleteTargetGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteTargetGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    // Deletes the target group.
    public void deleteTargetGroup(String targetGroupName) {
        try {
            DescribeTargetGroupsResponse res = getLoadBalancerClient()
                    .describeTargetGroups(describe ->
describe.names(targetGroupName));
            getLoadBalancerClient()
                    .deleteTargetGroup(builder ->
builder.targetGroupArn(res.targetGroups().get(0).targetGroupArn()));
        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(targetGroupName + " was deleted.");
    }
```

- Para obtener más información sobre la API, consulta DeleteTargetGroupla Referencia AWS SDK for Java 2.x de la API.

`DescribeTargetHealth`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeTargetHealth`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   // Checks the health of the instances in the target group.
   public List<TargetHealthDescription> checkTargetHealth(String targetGroupName) {
       DescribeTargetGroupsRequest targetGroupsRequest =
DescribeTargetGroupsRequest.builder()
               .names(targetGroupName)
               .build();

       DescribeTargetGroupsResponse tgResponse =
getLoadBalancerClient().describeTargetGroups(targetGroupsRequest);

       DescribeTargetHealthRequest healthRequest =
DescribeTargetHealthRequest.builder()
               .targetGroupArn(tgResponse.targetGroups().get(0).targetGroupArn())
               .build();

       DescribeTargetHealthResponse healthResponse =
getLoadBalancerClient().describeTargetHealth(healthRequest);
       return healthResponse.targetHealthDescriptions();
   }
```

- Para obtener más información sobre la API, consulta DescribeTargetHealthla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación y administración de un servicio resiliente

El siguiente ejemplo de código muestra cómo crear un servicio web con equilibrio de carga que muestre recomendaciones de libros, películas y canciones. El ejemplo muestra cómo responde el servicio a los errores y cómo reestructurarlo para aumentar la resiliencia cuando se produzcan errores.

- Utilice un grupo de Amazon EC2 Auto Scaling para crear instancias de Amazon Elastic Compute Cloud (Amazon EC2) basadas en una plantilla de lanzamiento y para mantener el número de instancias dentro de un rango específico.
- Administre y distribuya las solicitudes HTTP con Elastic Load Balancing.
- Supervise el estado de las instancias de un grupo de escalado automático y reenvíe las solicitudes solo a las instancias en buen estado.
- Ejecute un servidor web Python en cada instancia de EC2 para administrar las solicitudes HTTP. El servidor web responde con recomendaciones y comprobaciones de estado.
- Simule un servicio de recomendaciones con una tabla de Amazon DynamoDB.
- Controle la respuesta del servidor web a las solicitudes y las comprobaciones de estado actualizando AWS Systems Manager los parámetros.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute el escenario interactivo en un símbolo del sistema.

```
public class Main {

    public static final String fileName = "C:\\AWS\\resworkflow\
\recommendations.json"; // Modify file location.
    public static final String tableName = "doc-example-recommendation-service";
    public static final String startScript = "C:\\AWS\\resworkflow\
\server_startup_script.sh"; // Modify file location.
```

```
    public static final String policyFile = "C:\\AWS\\resworkflow\
\instance_policy.json"; // Modify file location.
    public static final String ssmJSON = "C:\\AWS\\resworkflow\
\ssm_only_policy.json"; // Modify file location.
    public static final String failureResponse = "doc-example-resilient-
architecture-failure-response";
    public static final String healthCheck = "doc-example-resilient-architecture-
health-check";
    public static final String templateName = "doc-example-resilience-template";
    public static final String roleName = "doc-example-resilience-role";
    public static final String policyName = "doc-example-resilience-pol";
    public static final String profileName = "doc-example-resilience-prof";

    public static final String badCredsProfileName = "doc-example-resilience-prof-
bc";

    public static final String targetGroupName = "doc-example-resilience-tg";
    public static final String autoScalingGroupName = "doc-example-resilience-
group";
    public static final String lbName = "doc-example-resilience-lb";
    public static final String protocol = "HTTP";
    public static final int port = 80;

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws IOException, InterruptedException
 {
        Scanner in = new Scanner(System.in);
        Database database = new Database();
        AutoScaler autoScaler = new AutoScaler();
        LoadBalancer loadBalancer = new LoadBalancer();

        System.out.println(DASHES);
        System.out.println("Welcome to the demonstration of How to Build and Manage
 a Resilient Service!");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("A - SETUP THE RESOURCES");
        System.out.println("Press Enter when you're ready to start deploying
 resources.");
        in.nextLine();
        deploy(loadBalancer);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("B - DEMO THE RESILIENCE FUNCTIONALITY");
        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        demo(loadBalancer);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("C - DELETE THE RESOURCES");
        System.out.println("""
                This concludes the demo of how to build and manage a resilient
service.
                To keep things tidy and to avoid unwanted charges on your account,
we can clean up all AWS resources
                that were created for this demo.
                """);

        System.out.println("\n Do you want to delete the resources (y/n)? ");
        String userInput = in.nextLine().trim().toLowerCase(); // Capture user input

        if (userInput.equals("y")) {
            // Delete resources here
            deleteResources(loadBalancer, autoScaler, database);
            System.out.println("Resources deleted.");
        } else {
            System.out.println("""
                    Okay, we'll leave the resources intact.
                    Don't forget to delete them when you're done with them or you
might incur unexpected charges.
                    """);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The example has completed. ");
        System.out.println("\n Thanks for watching!");
        System.out.println(DASHES);
    }

    // Deletes the AWS resources used in this example.
    private static void deleteResources(LoadBalancer loadBalancer, AutoScaler
autoScaler, Database database)
            throws IOException, InterruptedException {
        loadBalancer.deleteLoadBalancer(lbName);
```

```
        System.out.println("*** Wait 30 secs for resource to be deleted");
        TimeUnit.SECONDS.sleep(30);
        loadBalancer.deleteTargetGroup(targetGroupName);
        autoScaler.deleteAutoScaleGroup(autoScalingGroupName);
        autoScaler.deleteRolesPolicies(policyName, roleName, profileName);
        autoScaler.deleteTemplate(templateName);
        database.deleteTable(tableName);
    }

    private static void deploy(LoadBalancer loadBalancer) throws
InterruptedException, IOException {
        Scanner in = new Scanner(System.in);
        System.out.println(
                """
                        For this demo, we'll use the AWS SDK for Java (v2) to create
several AWS resources
                        to set up a load-balanced web service endpoint and explore
some ways to make it resilient
                        against various kinds of failures.

                        Some of the resources create by this demo are:
                        \t* A DynamoDB table that the web service depends on to
provide book, movie, and song recommendations.
                        \t* An EC2 launch template that defines EC2 instances that
each contain a Python web server.
                        \t* An EC2 Auto Scaling group that manages EC2 instances
across several Availability Zones.
                        \t* An Elastic Load Balancing (ELB) load balancer that
targets the Auto Scaling group to distribute requests.
                        """);

        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Creating and populating a DynamoDB table named " +
tableName);
        Database database = new Database();
        database.createTable(tableName, fileName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
```

```
                Creating an EC2 launch template that runs '{startup_script}' when an
instance starts.
                This script starts a Python web server defined in the `server.py`
script. The web server
                listens to HTTP requests on port 80 and responds to requests to '/'
and to '/healthcheck'.
                For demo purposes, this server is run as the root user. In
production, the best practice is to
                run a web server, such as Apache, with least-privileged credentials.

                The template also defines an IAM policy that each instance uses to
assume a role that grants
                permissions to access the DynamoDB recommendation table and Systems
Manager parameters
                that control the flow of the demo.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        templateCreator.createTemplate(policyFile, policyName, profileName,
startScript, templateName, roleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(
                "Creating an EC2 Auto Scaling group that maintains three EC2
instances, each in a different Availability Zone.");
        System.out.println("*** Wait 30 secs for the VPC to be created");
        TimeUnit.SECONDS.sleep(30);
        AutoScaler autoScaler = new AutoScaler();
        String[] zones = autoScaler.createGroup(3, templateName,
autoScalingGroupName);

        System.out.println("""
                At this point, you have EC2 instances created. Once each instance
starts, it listens for
                HTTP requests. You can see these instances in the console or
continue with the demo.
                Press Enter when you're ready to continue.
                """);

        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("Creating variables that control the flow of the demo.");
        ParameterHelper paramHelper = new ParameterHelper();
        paramHelper.reset();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
                Creating an Elastic Load Balancing target group and load balancer.
The target group
                defines how the load balancer connects to instances. The load
balancer provides a
                single endpoint where clients connect and dispatches requests to
instances in the group.
                """);

        String vpcId = autoScaler.getDefaultVPC();
        List<Subnet> subnets = autoScaler.getSubnets(vpcId, zones);
        System.out.println("You have retrieved a list with " + subnets.size() + "
subnets");
        String targetGroupArn = loadBalancer.createTargetGroup(protocol, port,
vpcId, targetGroupName);
        String elbDnsName = loadBalancer.createLoadBalancer(subnets, targetGroupArn,
lbName, port, protocol);
        autoScaler.attachLoadBalancerTargetGroup(autoScalingGroupName,
targetGroupArn);
        System.out.println("Verifying access to the load balancer endpoint...");
        boolean wasSuccessul = loadBalancer.verifyLoadBalancerEndpoint(elbDnsName);
        if (!wasSuccessul) {
            System.out.println("Couldn't connect to the load balancer, verifying
that the port is open...");
            CloseableHttpClient httpClient = HttpClients.createDefault();

            // Create an HTTP GET request to "http://checkip.amazonaws.com"
            HttpGet httpGet = new HttpGet("http://checkip.amazonaws.com");
            try {
                // Execute the request and get the response
                HttpResponse response = httpClient.execute(httpGet);

                // Read the response content.
                String ipAddress =
IOUtils.toString(response.getEntity().getContent(), StandardCharsets.UTF_8).trim();

                // Print the public IP address.
                System.out.println("Public IP Address: " + ipAddress);
```

```
                GroupInfo groupInfo = autoScaler.verifyInboundPort(vpcId, port,
ipAddress);
                if (!groupInfo.isPortOpen()) {
                    System.out.println("""
                            For this example to work, the default security group for
your default VPC must
                            allow access from this computer. You can either add it
automatically from this
                            example or add it yourself using the AWS Management
Console.
                            """);

                    System.out.println(
                            "Do you want to add a rule to security group " +
groupInfo.getGroupName() + " to allow");
                    System.out.println("inbound traffic on port " + port + " from
your computer's IP address (y/n) ");
                    String ans = in.nextLine();
                    if ("y".equalsIgnoreCase(ans)) {
                        autoScaler.openInboundPort(groupInfo.getGroupName(),
String.valueOf(port), ipAddress);
                        System.out.println("Security group rule added.");
                    } else {
                        System.out.println("No security group rule added.");
                    }
                }

            } catch (AutoScalingException e) {
                e.printStackTrace();
            }
        } else if (wasSuccessul) {
            System.out.println("Your load balancer is ready. You can access it by
browsing to:");
            System.out.println("\t http://" + elbDnsName);
        } else {
            System.out.println("Couldn't get a successful response from the load
balancer endpoint. Troubleshoot by");
            System.out.println("manually verifying that your VPC and security group
are configured correctly and that");
            System.out.println("you can successfully make a GET request to the load
balancer.");
        }
```

```
        System.out.println("Press Enter when you're ready to continue with the
demo.");
        in.nextLine();
    }

    // A method that controls the demo part of the Java program.
    public static void demo(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        ParameterHelper paramHelper = new ParameterHelper();
        System.out.println("Read the ssm_only_policy.json file");
        String ssmOnlyPolicy = readFileAsString(ssmJSON);

        System.out.println("Resetting parameters to starting values for demo.");
        paramHelper.reset();

        System.out.println(
                """
                        This part of the demonstration shows how to toggle
different parts of the system
                        to create situations where the web service fails, and shows
how using a resilient
                        architecture can keep the web service running in spite of
these failures.

                        At the start, the load balancer endpoint returns
recommendations and reports that all targets are healthy.
                       """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        The web service running on the EC2 instances gets
recommendations by querying a DynamoDB table.
                        The table name is contained in a Systems Manager parameter
named self.param_helper.table.
                        To simulate a failure of the recommendation service, let's
set this parameter to name a non-existent table.
                       """);
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        System.out.println(
                """
                        \nNow, sending a GET request to the load balancer endpoint
returns a failure code. But, the service reports as
```

```
                        healthy to the load balancer because shallow health checks
don't check for failure of the recommendation service.
                        """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        Instead of failing when the recommendation service fails,
the web service can return a static response.
                        While this is not a perfect solution, it presents the
customer with a somewhat better experience than failure.
                        """);
        paramHelper.put(paramHelper.failureResponse, "static");

        System.out.println("""
                Now, sending a GET request to the load balancer endpoint returns a
static response.
                The service still reports as healthy because health checks are still
shallow.
                """);
        demoChoices(loadBalancer);

        System.out.println("Let's reinstate the recommendation service.");
        paramHelper.put(paramHelper.tableName, paramHelper.dyntable);

        System.out.println("""
                Let's also substitute bad credentials for one of the instances in
the target group so that it can't
                access the DynamoDB recommendation table. We will get an instance id
value.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        AutoScaler autoScaler = new AutoScaler();

        // Create a new instance profile based on badCredsProfileName.
        templateCreator.createInstanceProfile(policyFile, policyName,
badCredsProfileName, roleName);
        String badInstanceId = autoScaler.getBadInstance(autoScalingGroupName);
        System.out.println("The bad instance id values used for this demo is " +
badInstanceId);

        String profileAssociationId = autoScaler.getInstanceProfile(badInstanceId);
        System.out.println("The association Id value is " + profileAssociationId);
```

```
        System.out.println("Replacing the profile for instance " + badInstanceId
                + " with a profile that contains bad credentials");
        autoScaler.replaceInstanceProfile(badInstanceId, badCredsProfileName,
profileAssociationId);

        System.out.println(
                """
                        Now, sending a GET request to the load balancer endpoint
returns either a recommendation or a static response,
                        depending on which instance is selected by the load
balancer.
                        """);

        demoChoices(loadBalancer);

        System.out.println("""
                Let's implement a deep health check. For this demo, a deep health
check tests whether
                the web service can access the DynamoDB table that it depends on for
recommendations. Note that
                the deep health check is only for ELB routing and not for Auto
Scaling instance health.
                This kind of deep health check is not recommended for Auto Scaling
instance health, because it
                risks accidental termination of all instances in the Auto Scaling
group when a dependent service fails.
                """);

        System.out.println("""
                By implementing deep health checks, the load balancer can detect
when one of the instances is failing
                and take that instance out of rotation.
                """);

        paramHelper.put(paramHelper.healthCheck, "deep");

        System.out.println("""
                Now, checking target health indicates that the instance with bad
credentials
                is unhealthy. Note that it might take a minute or two for the load
balancer to detect the unhealthy
                instance. Sending a GET request to the load balancer endpoint always
returns a recommendation, because
                the load balancer takes unhealthy instances out of its rotation.
```

```
                """);

        demoChoices(loadBalancer);

        System.out.println(
                """
                        Because the instances in this demo are controlled by an auto
scaler, the simplest way to fix an unhealthy
                        instance is to terminate it and let the auto scaler start a
new instance to replace it.
                        """);
        autoScaler.terminateInstance(badInstanceId);

        System.out.println("""
                Even while the instance is terminating and the new instance is
starting, sending a GET
                request to the web service continues to get a successful
recommendation response because
                the load balancer routes requests to the healthy instances. After
the replacement instance
                starts and reports as healthy, it is included in the load balancing
rotation.
                Note that terminating and replacing an instance typically takes
several minutes, during which time you
                can see the changing health check status until the new instance is
running and healthy.
                """);

        demoChoices(loadBalancer);
        System.out.println(
                "If the recommendation service fails now, deep health checks mean
all instances report as unhealthy.");
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        demoChoices(loadBalancer);
        paramHelper.reset();
    }

    public static void demoChoices(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        String[] actions = {
                "Send a GET request to the load balancer endpoint.",
                "Check the health of load balancer targets.",
                "Go to the next part of the demo."
```

```
        };
        Scanner scanner = new Scanner(System.in);

        while (true) {
            System.out.println("-".repeat(88));
            System.out.println("See the current state of the service by selecting
one of the following choices:");
            for (int i = 0; i < actions.length; i++) {
                System.out.println(i + ": " + actions[i]);
            }

            try {
                System.out.print("\nWhich action would you like to take? ");
                int choice = scanner.nextInt();
                System.out.println("-".repeat(88));

                switch (choice) {
                    case 0 -> {
                        System.out.println("Request:\n");
                        System.out.println("GET http://" +
loadBalancer.getEndpoint(lbName));
                        CloseableHttpClient httpClient =
HttpClients.createDefault();

                        // Create an HTTP GET request to the ELB.
                        HttpGet httpGet = new HttpGet("http://" +
loadBalancer.getEndpoint(lbName));

                        // Execute the request and get the response.
                        HttpResponse response = httpClient.execute(httpGet);
                        int statusCode = response.getStatusLine().getStatusCode();
                        System.out.println("HTTP Status Code: " + statusCode);

                        // Display the JSON response
                        BufferedReader reader = new BufferedReader(
                                new
InputStreamReader(response.getEntity().getContent()));
                        StringBuilder jsonResponse = new StringBuilder();
                        String line;
                        while ((line = reader.readLine()) != null) {
                            jsonResponse.append(line);
                        }
                        reader.close();
```

```
                        // Print the formatted JSON response.
                        System.out.println("Full Response:\n");
                        System.out.println(jsonResponse.toString());

                        // Close the HTTP client.
                        httpClient.close();

                    }
                    case 1 -> {
                        System.out.println("\nChecking the health of load balancer
targets:\n");
                        List<TargetHealthDescription> health =
loadBalancer.checkTargetHealth(targetGroupName);
                        for (TargetHealthDescription target : health) {
                            System.out.printf("\tTarget %s on port %d is %s%n",
target.target().id(),
                                    target.target().port(),
target.targetHealth().stateAsString());
                        }
                        System.out.println("""
                                Note that it can take a minute or two for the health
check to update
                                after changes are made.
                                """);
                    }
                    case 2 -> {
                        System.out.println("\nOkay, let's move on.");
                        System.out.println("-".repeat(88));
                        return; // Exit the method when choice is 2
                    }
                    default -> System.out.println("You must choose a value between
0-2. Please select again.");
                }

            } catch (java.util.InputMismatchException e) {
                System.out.println("Invalid input. Please select again.");
                scanner.nextLine(); // Clear the input buffer.
            }
        }
    }

    public static String readFileAsString(String filePath) throws IOException {
        byte[] bytes = Files.readAllBytes(Paths.get(filePath));
        return new String(bytes);
```

```
    }
}
```

Cree una clase que agrupe las acciones de escalado automático y Amazon EC2.

```
public class AutoScaler {

    private static Ec2Client ec2Client;
    private static AutoScalingClient autoScalingClient;
    private static IamClient iamClient;

    private static SsmClient ssmClient;

    private IamClient getIAMClient() {
        if (iamClient == null) {
            iamClient = IamClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return iamClient;
    }

    private SsmClient getSSMClient() {
        if (ssmClient == null) {
            ssmClient = SsmClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ssmClient;
    }

    private Ec2Client getEc2Client() {
        if (ec2Client == null) {
            ec2Client = Ec2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ec2Client;
    }

    private AutoScalingClient getAutoScalingClient() {
        if (autoScalingClient == null) {
```

```
            autoScalingClient = AutoScalingClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return autoScalingClient;
    }

    /**
     * Terminates and instances in an EC2 Auto Scaling group. After an instance is
     * terminated, it can no longer be accessed.
     */
    public void terminateInstance(String instanceId) {
        TerminateInstanceInAutoScalingGroupRequest terminateInstanceIRequest =
TerminateInstanceInAutoScalingGroupRequest
                .builder()
                .instanceId(instanceId)
                .shouldDecrementDesiredCapacity(false)
                .build();


getAutoScalingClient().terminateInstanceInAutoScalingGroup(terminateInstanceIRequest);
        System.out.format("Terminated instance %s.", instanceId);
    }

    /**
     * Replaces the profile associated with a running instance. After the profile is
     * replaced, the instance is rebooted to ensure that it uses the new profile.
     * When
     * the instance is ready, Systems Manager is used to restart the Python web
     * server.
     */
    public void replaceInstanceProfile(String instanceId, String
newInstanceProfileName, String profileAssociationId)
            throws InterruptedException {
        // Create an IAM instance profile specification.
        software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
iamInstanceProfile =
software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
                .builder()
                .name(newInstanceProfileName) // Make sure 'newInstanceProfileName'
is a valid IAM Instance Profile
                                              // name.
                .build();
```

```
        // Replace the IAM instance profile association for the EC2 instance.
        ReplaceIamInstanceProfileAssociationRequest replaceRequest =
ReplaceIamInstanceProfileAssociationRequest
                .builder()
                .iamInstanceProfile(iamInstanceProfile)
                .associationId(profileAssociationId) // Make sure
'profileAssociationId' is a valid association ID.
                .build();

        try {
            getEc2Client().replaceIamInstanceProfileAssociation(replaceRequest);
            // Handle the response as needed.
        } catch (Ec2Exception e) {
            // Handle exceptions, log, or report the error.
            System.err.println("Error: " + e.getMessage());
        }
        System.out.format("Replaced instance profile for association %s with profile
%s.", profileAssociationId,
                newInstanceProfileName);
        TimeUnit.SECONDS.sleep(15);
        boolean instReady = false;
        int tries = 0;

        // Reboot after 60 seconds
        while (!instReady) {
            if (tries % 6 == 0) {
                getEc2Client().rebootInstances(RebootInstancesRequest.builder()
                        .instanceIds(instanceId)
                        .build());
                System.out.println("Rebooting instance " + instanceId + " and
waiting for it to be ready.");
            }
            tries++;
            try {
                TimeUnit.SECONDS.sleep(10);
            } catch (InterruptedException e) {
                e.printStackTrace();
            }

            DescribeInstanceInformationResponse informationResponse =
getSSMClient().describeInstanceInformation();
            List<InstanceInformation> instanceInformationList =
informationResponse.instanceInformationList();
            for (InstanceInformation info : instanceInformationList) {
```

```
                if (info.instanceId().equals(instanceId)) {
                    instReady = true;
                    break;
                }
            }
        }

        SendCommandRequest sendCommandRequest = SendCommandRequest.builder()
                .instanceIds(instanceId)
                .documentName("AWS-RunShellScript")
                .parameters(Collections.singletonMap("commands",
                        Collections.singletonList("cd / && sudo python3 server.py
80")))
                .build();

        getSSMClient().sendCommand(sendCommandRequest);
        System.out.println("Restarted the Python web server on instance " +
instanceId + ".");
    }

    public void openInboundPort(String secGroupId, String port, String ipAddress) {
        AuthorizeSecurityGroupIngressRequest ingressRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                .groupName(secGroupId)
                .cidrIp(ipAddress)
                .fromPort(Integer.parseInt(port))
                .build();

        getEc2Client().authorizeSecurityGroupIngress(ingressRequest);
        System.out.format("Authorized ingress to %s on port %s from %s.",
secGroupId, port, ipAddress);
    }

    /**
     * Detaches a role from an instance profile, detaches policies from the role,
     * and deletes all the resources.
     */
    public void deleteInstanceProfile(String roleName, String profileName) {
        try {
            software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
getInstanceProfileRequest =
software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
                    .builder()
                    .instanceProfileName(profileName)
```

```
                .build();

        GetInstanceProfileResponse response =
getIAMClient().getInstanceProfile(getInstanceProfileRequest);
        String name = response.instanceProfile().instanceProfileName();
        System.out.println(name);

        RemoveRoleFromInstanceProfileRequest profileRequest =
RemoveRoleFromInstanceProfileRequest.builder()
                .instanceProfileName(profileName)
                .roleName(roleName)
                .build();

        getIAMClient().removeRoleFromInstanceProfile(profileRequest);
        DeleteInstanceProfileRequest deleteInstanceProfileRequest =
DeleteInstanceProfileRequest.builder()
                .instanceProfileName(profileName)
                .build();

        getIAMClient().deleteInstanceProfile(deleteInstanceProfileRequest);
        System.out.println("Deleted instance profile " + profileName);

        DeleteRoleRequest deleteRoleRequest = DeleteRoleRequest.builder()
                .roleName(roleName)
                .build();

        // List attached role policies.
        ListAttachedRolePoliciesResponse rolesResponse = getIAMClient()
                .listAttachedRolePolicies(role -> role.roleName(roleName));
        List<AttachedPolicy> attachedPolicies =
rolesResponse.attachedPolicies();
        for (AttachedPolicy attachedPolicy : attachedPolicies) {
            DetachRolePolicyRequest request = DetachRolePolicyRequest.builder()
                    .roleName(roleName)
                    .policyArn(attachedPolicy.policyArn())
                    .build();

            getIAMClient().detachRolePolicy(request);
            System.out.println("Detached and deleted policy " +
attachedPolicy.policyName());
        }

        getIAMClient().deleteRole(deleteRoleRequest);
        System.out.println("Instance profile and role deleted.");
```

```
        } catch (IamException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public void deleteTemplate(String templateName) {
        getEc2Client().deleteLaunchTemplate(name ->
name.launchTemplateName(templateName));
        System.out.format(templateName + " was deleted.");
    }

    public void deleteAutoScaleGroup(String groupName) {
        DeleteAutoScalingGroupRequest deleteAutoScalingGroupRequest =
DeleteAutoScalingGroupRequest.builder()
                .autoScalingGroupName(groupName)
                .forceDelete(true)
                .build();


getAutoScalingClient().deleteAutoScalingGroup(deleteAutoScalingGroupRequest);
        System.out.println(groupName + " was deleted.");
    }

    /*
     * Verify the default security group of the specified VPC allows ingress from
     * this
     * computer. This can be done by allowing ingress from this computer's IP
     * address. In some situations, such as connecting from a corporate network, you
     * must instead specify a prefix list ID. You can also temporarily open the port
     * to
     * any IP address while running this example. If you do, be sure to remove
     * public
     * access when you're done.
     *
     */
    public GroupInfo verifyInboundPort(String VPC, int port, String ipAddress) {
        boolean portIsOpen = false;
        GroupInfo groupInfo = new GroupInfo();
        try {
            Filter filter = Filter.builder()
                    .name("group-name")
                    .values("default")
```

```
                .build();

        Filter filter1 = Filter.builder()
                .name("vpc-id")
                .values(VPC)
                .build();

        DescribeSecurityGroupsRequest securityGroupsRequest =
DescribeSecurityGroupsRequest.builder()
                .filters(filter, filter1)
                .build();

        DescribeSecurityGroupsResponse securityGroupsResponse = getEc2Client()
                .describeSecurityGroups(securityGroupsRequest);
        String securityGroup =
securityGroupsResponse.securityGroups().get(0).groupName();
        groupInfo.setGroupName(securityGroup);

        for (SecurityGroup secGroup : securityGroupsResponse.securityGroups()) {
            System.out.println("Found security group: " + secGroup.groupId());

            for (IpPermission ipPermission : secGroup.ipPermissions()) {
                if (ipPermission.fromPort() == port) {
                    System.out.println("Found inbound rule: " + ipPermission);
                    for (IpRange ipRange : ipPermission.ipRanges()) {
                        String cidrIp = ipRange.cidrIp();
                        if (cidrIp.startsWith(ipAddress) ||
cidrIp.equals("0.0.0.0/0")) {
                            System.out.println(cidrIp + " is applicable");
                            portIsOpen = true;
                        }
                    }

                    if (!ipPermission.prefixListIds().isEmpty()) {
                        System.out.println("Prefix lList is applicable");
                        portIsOpen = true;
                    }

                    if (!portIsOpen) {
                        System.out
                                .println("The inbound rule does not appear to be
open to either this computer's IP,"
                                        + " all IP addresses (0.0.0.0/0), or to
a prefix list ID.");
```

```
                        } else {
                            break;
                        }
                    }
                }
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }

        groupInfo.setPortOpen(portIsOpen);
        return groupInfo;
    }

    /*
     * Attaches an Elastic Load Balancing (ELB) target group to this EC2 Auto
     * Scaling group.
     * The target group specifies how the load balancer forward requests to the
     * instances
     * in the group.
     */
    public void attachLoadBalancerTargetGroup(String asGroupName, String
targetGroupARN) {
        try {
            AttachLoadBalancerTargetGroupsRequest targetGroupsRequest =
AttachLoadBalancerTargetGroupsRequest.builder()
                    .autoScalingGroupName(asGroupName)
                    .targetGroupARNs(targetGroupARN)
                    .build();


getAutoScalingClient().attachLoadBalancerTargetGroups(targetGroupsRequest);
            System.out.println("Attached load balancer to " + asGroupName);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Creates an EC2 Auto Scaling group with the specified size.
    public String[] createGroup(int groupSize, String templateName, String
autoScalingGroupName) {
```

```
       // Get availability zones.
       software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
zonesRequest =
software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
               .builder()
               .build();

       DescribeAvailabilityZonesResponse zonesResponse =
getEc2Client().describeAvailabilityZones(zonesRequest);
       List<String> availabilityZoneNames =
zonesResponse.availabilityZones().stream()

.map(software.amazon.awssdk.services.ec2.model.AvailabilityZone::zoneName)
               .collect(Collectors.toList());

       String availabilityZones = String.join(",", availabilityZoneNames);
       LaunchTemplateSpecification specification =
LaunchTemplateSpecification.builder()
               .launchTemplateName(templateName)
               .version("$Default")
               .build();

       String[] zones = availabilityZones.split(",");
       CreateAutoScalingGroupRequest groupRequest =
CreateAutoScalingGroupRequest.builder()
               .launchTemplate(specification)
               .availabilityZones(zones)
               .maxSize(groupSize)
               .minSize(groupSize)
               .autoScalingGroupName(autoScalingGroupName)
               .build();

       try {
           getAutoScalingClient().createAutoScalingGroup(groupRequest);

       } catch (AutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
       System.out.println("Created an EC2 Auto Scaling group named " +
autoScalingGroupName);
       return zones;
   }
```

```
    public String getDefaultVPC() {
        // Define the filter.
        Filter defaultFilter = Filter.builder()
                .name("is-default")
                .values("true")
                .build();

        software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest request =
software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest
                .builder()
                .filters(defaultFilter)
                .build();

        DescribeVpcsResponse response = getEc2Client().describeVpcs(request);
        return response.vpcs().get(0).vpcId();
    }

    // Gets the default subnets in a VPC for a specified list of Availability Zones.
    public List<Subnet> getSubnets(String vpcId, String[] availabilityZones) {
        List<Subnet> subnets = null;
        Filter vpcFilter = Filter.builder()
                .name("vpc-id")
                .values(vpcId)
                .build();

        Filter azFilter = Filter.builder()
                .name("availability-zone")
                .values(availabilityZones)
                .build();

        Filter defaultForAZ = Filter.builder()
                .name("default-for-az")
                .values("true")
                .build();

        DescribeSubnetsRequest request = DescribeSubnetsRequest.builder()
                .filters(vpcFilter, azFilter, defaultForAZ)
                .build();

        DescribeSubnetsResponse response = getEc2Client().describeSubnets(request);
        subnets = response.subnets();
        return subnets;
    }
```

```
   // Gets data about the instances in the EC2 Auto Scaling group.
   public String getBadInstance(String groupName) {
       DescribeAutoScalingGroupsRequest request =
DescribeAutoScalingGroupsRequest.builder()
               .autoScalingGroupNames(groupName)
               .build();

       DescribeAutoScalingGroupsResponse response =
getAutoScalingClient().describeAutoScalingGroups(request);
       AutoScalingGroup autoScalingGroup = response.autoScalingGroups().get(0);
       List<String> instanceIds = autoScalingGroup.instances().stream()
               .map(instance -> instance.instanceId())
               .collect(Collectors.toList());

       String[] instanceIdArray = instanceIds.toArray(new String[0]);
       for (String instanceId : instanceIdArray) {
           System.out.println("Instance ID: " + instanceId);
           return instanceId;
       }
       return "";
   }

   // Gets data about the profile associated with an instance.
   public String getInstanceProfile(String instanceId) {
       Filter filter = Filter.builder()
               .name("instance-id")
               .values(instanceId)
               .build();

       DescribeIamInstanceProfileAssociationsRequest associationsRequest =
DescribeIamInstanceProfileAssociationsRequest
               .builder()
               .filters(filter)
               .build();

       DescribeIamInstanceProfileAssociationsResponse response = getEc2Client()
               .describeIamInstanceProfileAssociations(associationsRequest);
       return response.iamInstanceProfileAssociations().get(0).associationId();
   }

   public void deleteRolesPolicies(String policyName, String roleName, String
InstanceProfile) {
```

```
        ListPoliciesRequest listPoliciesRequest =
 ListPoliciesRequest.builder().build();
        ListPoliciesResponse listPoliciesResponse =
 getIAMClient().listPolicies(listPoliciesRequest);
        for (Policy policy : listPoliciesResponse.policies()) {
            if (policy.policyName().equals(policyName)) {
                // List the entities (users, groups, roles) that are attached to the
 policy.

 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
 listEntitiesRequest =
 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
                        .builder()
                        .policyArn(policy.arn())
                        .build();
                ListEntitiesForPolicyResponse listEntitiesResponse = iamClient
                        .listEntitiesForPolicy(listEntitiesRequest);
                if (!listEntitiesResponse.policyGroups().isEmpty() || !
listEntitiesResponse.policyUsers().isEmpty()
                        || !listEntitiesResponse.policyRoles().isEmpty()) {
                    // Detach the policy from any entities it is attached to.
                    DetachRolePolicyRequest detachPolicyRequest =
 DetachRolePolicyRequest.builder()
                            .policyArn(policy.arn())
                            .roleName(roleName) // Specify the name of the IAM role
                            .build();

                    getIAMClient().detachRolePolicy(detachPolicyRequest);
                    System.out.println("Policy detached from entities.");
                }

                // Now, you can delete the policy.
                DeletePolicyRequest deletePolicyRequest =
 DeletePolicyRequest.builder()
                        .policyArn(policy.arn())
                        .build();

                getIAMClient().deletePolicy(deletePolicyRequest);
                System.out.println("Policy deleted successfully.");
                break;
            }
        }

        // List the roles associated with the instance profile
```

```
        ListInstanceProfilesForRoleRequest listRolesRequest =
 ListInstanceProfilesForRoleRequest.builder()
                .roleName(roleName)
                .build();

        // Detach the roles from the instance profile
        ListInstanceProfilesForRoleResponse listRolesResponse =
 iamClient.listInstanceProfilesForRole(listRolesRequest);
        for (software.amazon.awssdk.services.iam.model.InstanceProfile profile :
 listRolesResponse.instanceProfiles()) {
            RemoveRoleFromInstanceProfileRequest removeRoleRequest =
 RemoveRoleFromInstanceProfileRequest.builder()
                    .instanceProfileName(InstanceProfile)
                    .roleName(roleName) // Remove the extra dot here
                    .build();

            getIAMClient().removeRoleFromInstanceProfile(removeRoleRequest);
            System.out.println("Role " + roleName + " removed from instance profile
 " + InstanceProfile);
        }

        // Delete the instance profile after removing all roles
        DeleteInstanceProfileRequest deleteInstanceProfileRequest =
 DeleteInstanceProfileRequest.builder()
                .instanceProfileName(InstanceProfile)
                .build();

        getIAMClient().deleteInstanceProfile(r ->
 r.instanceProfileName(InstanceProfile));
        System.out.println(InstanceProfile + " Deleted");
        System.out.println("All roles and policies are deleted.");
    }
}
```

Cree una clase que resuma las acciones de Elastic Load Balancing.

```
public class LoadBalancer {
    public ElasticLoadBalancingV2Client elasticLoadBalancingV2Client;

    public ElasticLoadBalancingV2Client getLoadBalancerClient() {
        if (elasticLoadBalancingV2Client == null) {
            elasticLoadBalancingV2Client = ElasticLoadBalancingV2Client.builder()
```

```
                    .region(Region.US_EAST_1)
                    .build();
        }

        return elasticLoadBalancingV2Client;
    }

    // Checks the health of the instances in the target group.
    public List<TargetHealthDescription> checkTargetHealth(String targetGroupName) {
        DescribeTargetGroupsRequest targetGroupsRequest =
DescribeTargetGroupsRequest.builder()
                .names(targetGroupName)
                .build();

        DescribeTargetGroupsResponse tgResponse =
getLoadBalancerClient().describeTargetGroups(targetGroupsRequest);

        DescribeTargetHealthRequest healthRequest =
DescribeTargetHealthRequest.builder()
                .targetGroupArn(tgResponse.targetGroups().get(0).targetGroupArn())
                .build();

        DescribeTargetHealthResponse healthResponse =
getLoadBalancerClient().describeTargetHealth(healthRequest);
        return healthResponse.targetHealthDescriptions();
    }

    // Gets the HTTP endpoint of the load balancer.
    public String getEndpoint(String lbName) {
        DescribeLoadBalancersResponse res = getLoadBalancerClient()
                .describeLoadBalancers(describe -> describe.names(lbName));
        return res.loadBalancers().get(0).dnsName();
    }

    // Deletes a load balancer.
    public void deleteLoadBalancer(String lbName) {
        try {
            // Use a waiter to delete the Load Balancer.
            DescribeLoadBalancersResponse res = getLoadBalancerClient()
                    .describeLoadBalancers(describe -> describe.names(lbName));
            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
```

```
                    .loadBalancerArns(res.loadBalancers().get(0).loadBalancerArn())
                    .build();

            getLoadBalancerClient().deleteLoadBalancer(
                    builder ->
builder.loadBalancerArn(res.loadBalancers().get(0).loadBalancerArn()));
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancersDeleted(request);
            waiterResponse.matched().response().ifPresent(System.out::println);

        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(lbName + " was deleted.");
    }

    // Deletes the target group.
    public void deleteTargetGroup(String targetGroupName) {
        try {
            DescribeTargetGroupsResponse res = getLoadBalancerClient()
                    .describeTargetGroups(describe ->
describe.names(targetGroupName));
            getLoadBalancerClient()
                    .deleteTargetGroup(builder ->
builder.targetGroupArn(res.targetGroups().get(0).targetGroupArn()));
        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(targetGroupName + " was deleted.");
    }

    // Verify this computer can successfully send a GET request to the load balancer
    // endpoint.
    public boolean verifyLoadBalancerEndpoint(String elbDnsName) throws IOException,
InterruptedException {
        boolean success = false;
        int retries = 3;
        CloseableHttpClient httpClient = HttpClients.createDefault();

        // Create an HTTP GET request to the ELB.
        HttpGet httpGet = new HttpGet("http://" + elbDnsName);
        try {
            while ((!success) && (retries > 0)) {
```

```
                // Execute the request and get the response.
                HttpResponse response = httpClient.execute(httpGet);
                int statusCode = response.getStatusLine().getStatusCode();
                System.out.println("HTTP Status Code: " + statusCode);
                if (statusCode == 200) {
                    success = true;
                } else {
                    retries--;
                    System.out.println("Got connection error from load balancer
endpoint, retrying...");
                    TimeUnit.SECONDS.sleep(15);
                }
            }

        } catch (org.apache.http.conn.HttpHostConnectException e) {
            System.out.println(e.getMessage());
        }

        System.out.println("Status.." + success);
        return success;
    }

    /*
     * Creates an Elastic Load Balancing target group. The target group specifies
     * how
     * the load balancer forward requests to instances in the group and how instance
     * health is checked.
     */
    public String createTargetGroup(String protocol, int port, String vpcId, String
targetGroupName) {
        CreateTargetGroupRequest targetGroupRequest =
CreateTargetGroupRequest.builder()
                .healthCheckPath("/healthcheck")
                .healthCheckTimeoutSeconds(5)
                .port(port)
                .vpcId(vpcId)
                .name(targetGroupName)
                .protocol(protocol)
                .build();

        CreateTargetGroupResponse targetGroupResponse =
getLoadBalancerClient().createTargetGroup(targetGroupRequest);
        String targetGroupArn =
targetGroupResponse.targetGroups().get(0).targetGroupArn();
```

```
        String targetGroup =
targetGroupResponse.targetGroups().get(0).targetGroupName();
        System.out.println("The " + targetGroup + " was created with ARN" +
targetGroupArn);
        return targetGroupArn;
    }

    /*
     * Creates an Elastic Load Balancing load balancer that uses the specified
     * subnets
     * and forwards requests to the specified target group.
     */
    public String createLoadBalancer(List<Subnet> subnetIds, String targetGroupARN,
String lbName, int port,
            String protocol) {
        try {
            List<String> subnetIdStrings = subnetIds.stream()
                    .map(Subnet::subnetId)
                    .collect(Collectors.toList());

            CreateLoadBalancerRequest balancerRequest =
CreateLoadBalancerRequest.builder()
                    .subnets(subnetIdStrings)
                    .name(lbName)
                    .scheme("internet-facing")
                    .build();

            // Create and wait for the load balancer to become available.
            CreateLoadBalancerResponse lsResponse =
getLoadBalancerClient().createLoadBalancer(balancerRequest);
            String lbARN = lsResponse.loadBalancers().get(0).loadBalancerArn();

            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                    .loadBalancerArns(lbARN)
                    .build();

            System.out.println("Waiting for Load Balancer " + lbName + " to become
available.");
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancerAvailable(request);
```

```
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Load Balancer " + lbName + " is available.");

            // Get the DNS name (endpoint) of the load balancer.
            String lbDNSName = lsResponse.loadBalancers().get(0).dnsName();
            System.out.println("*** Load Balancer DNS Name: " + lbDNSName);

            // Create a listener for the load balance.
            Action action = Action.builder()
                    .targetGroupArn(targetGroupARN)
                    .type("forward")
                    .build();

            CreateListenerRequest listenerRequest = CreateListenerRequest.builder()

 .loadBalancerArn(lsResponse.loadBalancers().get(0).loadBalancerArn())
                    .defaultActions(action)
                    .port(port)
                    .protocol(protocol)
                    .build();

            getLoadBalancerClient().createListener(listenerRequest);
            System.out.println("Created listener to forward traffic from load
 balancer " + lbName + " to target group "
                    + targetGroupARN);

            // Return the load balancer DNS name.
            return lbDNSName;

        } catch (ElasticLoadBalancingV2Exception e) {
            e.printStackTrace();
        }
        return "";
    }
}
```

Cree una clase que utilice DynamoDB para simular un servicio de recomendaciones.

```
public class Database {

    private static DynamoDbClient dynamoDbClient;
```

```
    public static DynamoDbClient getDynamoDbClient() {
        if (dynamoDbClient == null) {
            dynamoDbClient = DynamoDbClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return dynamoDbClient;
    }

    // Checks to see if the Amazon DynamoDB table exists.
    private boolean doesTableExist(String tableName) {
        try {
            // Describe the table and catch any exceptions.
            DescribeTableRequest describeTableRequest =
DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            getDynamoDbClient().describeTable(describeTableRequest);
            System.out.println("Table '" + tableName + "' exists.");
            return true;

        } catch (ResourceNotFoundException e) {
            System.out.println("Table '" + tableName + "' does not exist.");
        } catch (DynamoDbException e) {
            System.err.println("Error checking table existence: " + e.getMessage());
        }
        return false;
    }

    /*
     * Creates a DynamoDB table to use a recommendation service. The table has a
     * hash key named 'MediaType' that defines the type of media recommended, such
     * as
     * Book or Movie, and a range key named 'ItemId' that, combined with the
     * MediaType,
     * forms a unique identifier for the recommended item.
     */
    public void createTable(String tableName, String fileName) throws IOException {
        // First check to see if the table exists.
        boolean doesExist = doesTableExist(tableName);
        if (!doesExist) {
            DynamoDbWaiter dbWaiter = getDynamoDbClient().waiter();
            CreateTableRequest createTableRequest = CreateTableRequest.builder()
```

```
                    .tableName(tableName)
                    .attributeDefinitions(
                            AttributeDefinition.builder()
                                    .attributeName("MediaType")
                                    .attributeType(ScalarAttributeType.S)
                                    .build(),
                            AttributeDefinition.builder()
                                    .attributeName("ItemId")
                                    .attributeType(ScalarAttributeType.N)
                                    .build())
                    .keySchema(
                            KeySchemaElement.builder()
                                    .attributeName("MediaType")
                                    .keyType(KeyType.HASH)
                                    .build(),
                            KeySchemaElement.builder()
                                    .attributeName("ItemId")
                                    .keyType(KeyType.RANGE)
                                    .build())
                    .provisionedThroughput(
                            ProvisionedThroughput.builder()
                                    .readCapacityUnits(5L)
                                    .writeCapacityUnits(5L)
                                    .build())
                    .build();

            getDynamoDbClient().createTable(createTableRequest);
            System.out.println("Creating table " + tableName + "...");

            // Wait until the Amazon DynamoDB table is created.
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Table " + tableName + " created.");

            // Add records to the table.
            populateTable(fileName, tableName);
        }
    }
```

```
    public void deleteTable(String tableName) {
        getDynamoDbClient().deleteTable(table -> table.tableName(tableName));
        System.out.println("Table " + tableName + " deleted.");
    }

    // Populates the table with data located in a JSON file using the DynamoDB
    // enhanced client.
    public void populateTable(String fileName, String tableName) throws IOException
 {
        DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
                .dynamoDbClient(getDynamoDbClient())
                .build();
        ObjectMapper objectMapper = new ObjectMapper();
        File jsonFile = new File(fileName);
        JsonNode rootNode = objectMapper.readTree(jsonFile);

        DynamoDbTable<Recommendation> mappedTable = enhancedClient.table(tableName,
                TableSchema.fromBean(Recommendation.class));
        for (JsonNode currentNode : rootNode) {
            String mediaType = currentNode.path("MediaType").path("S").asText();
            int itemId = currentNode.path("ItemId").path("N").asInt();
            String title = currentNode.path("Title").path("S").asText();
            String creator = currentNode.path("Creator").path("S").asText();

            // Create a Recommendation object and set its properties.
            Recommendation rec = new Recommendation();
            rec.setMediaType(mediaType);
            rec.setItemId(itemId);
            rec.setTitle(title);
            rec.setCreator(creator);

            // Put the item into the DynamoDB table.
            mappedTable.putItem(rec); // Add the Recommendation to the list.
        }
        System.out.println("Added all records to the " + tableName);
    }
}
```

Cree una clase que agrupe las acciones de Systems Manager.

```
public class ParameterHelper {
```

```
    String tableName = "doc-example-resilient-architecture-table";
    String dyntable = "doc-example-recommendation-service";
    String failureResponse = "doc-example-resilient-architecture-failure-response";
    String healthCheck = "doc-example-resilient-architecture-health-check";

    public void reset() {
        put(dyntable, tableName);
        put(failureResponse, "none");
        put(healthCheck, "shallow");
    }

    public void put(String name, String value) {
        SsmClient ssmClient = SsmClient.builder()
                .region(Region.US_EAST_1)
                .build();

        PutParameterRequest parameterRequest = PutParameterRequest.builder()
                .name(name)
                .value(value)
                .overwrite(true)
                .type("String")
                .build();

        ssmClient.putParameter(parameterRequest);
        System.out.printf("Setting demo parameter %s to '%s'.", name, value);
    }
}
```

- Para obtener información sobre la API, consulte los siguientes temas en la referencia de la API de AWS SDK for Java 2.x .
  - AttachLoadBalancerTargetGroups
  - CreateAutoScalingGroup
  - CreateInstanceProfile
  - CreateLaunchTemplate
  - CreateListener
  - CreateLoadBalancer
  - CreateTargetGroup
  - DeleteAutoScalingGroup

- DeleteInstanceProfile
- DeleteLaunchTemplate
- DeleteLoadBalancer
- DeleteTargetGroup
- DescribeAutoScalingGroups
- DescribeAvailabilityZones
- DescribeIamInstanceProfileAssociations
- DescribeInstances
- DescribeLoadBalancers
- DescribeSubnets
- DescribeTargetGroups
- DescribeTargetHealth
- DescribeVpcs
- RebootInstances
- ReplaceIamInstanceProfileAssociation
- TerminateInstanceInAutoScalingGroup
- UpdateAutoScalingGroup

MediaStore ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with MediaStore.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`CreateContainer`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateContainer`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.model.CreateContainerRequest;
import software.amazon.awssdk.services.mediastore.model.CreateContainerResponse;
import software.amazon.awssdk.services.mediastore.model.MediaStoreException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateContainer {
    public static long sleepTime = 10;

    public static void main(String[] args) {
        final String usage = """

                Usage:    <containerName>

                Where:
                   containerName - The name of the container to create.
                """;

        if (args.length != 1) {
            System.out.println(usage);
```

```
            System.exit(1);
        }

        String containerName = args[0];
        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        createMediaContainer(mediaStoreClient, containerName);
        mediaStoreClient.close();
    }


    public static void createMediaContainer(MediaStoreClient mediaStoreClient,
 String containerName) {
        try {
            CreateContainerRequest containerRequest =
 CreateContainerRequest.builder()
                    .containerName(containerName)
                    .build();

            CreateContainerResponse containerResponse =
 mediaStoreClient.createContainer(containerRequest);
            String status = containerResponse.container().status().toString();
            while (!status.equalsIgnoreCase("Active")) {
                status = DescribeContainer.checkContainer(mediaStoreClient,
 containerName);
                System.out.println("Status - " + status);
                Thread.sleep(sleepTime * 1000);
            }

            System.out.println("The container ARN value is " +
 containerResponse.container().arn());
            System.out.println("Finished ");

        } catch (MediaStoreException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta CreateContainerla Referencia AWS SDK for Java 2.x de la API.

`DeleteContainer`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteContainer`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.model.CreateContainerRequest;
import software.amazon.awssdk.services.mediastore.model.CreateContainerResponse;
import software.amazon.awssdk.services.mediastore.model.MediaStoreException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateContainer {
    public static long sleepTime = 10;

    public static void main(String[] args) {
        final String usage = """

                Usage:    <containerName>

                Where:
                   containerName - The name of the container to create.
                """;

        if (args.length != 1) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        String containerName = args[0];
        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        createMediaContainer(mediaStoreClient, containerName);
        mediaStoreClient.close();
    }


    public static void createMediaContainer(MediaStoreClient mediaStoreClient,
 String containerName) {
        try {
            CreateContainerRequest containerRequest =
 CreateContainerRequest.builder()
                    .containerName(containerName)
                    .build();

            CreateContainerResponse containerResponse =
 mediaStoreClient.createContainer(containerRequest);
            String status = containerResponse.container().status().toString();
            while (!status.equalsIgnoreCase("Active")) {
                status = DescribeContainer.checkContainer(mediaStoreClient,
 containerName);
                System.out.println("Status - " + status);
                Thread.sleep(sleepTime * 1000);
            }

            System.out.println("The container ARN value is " +
 containerResponse.container().arn());
            System.out.println("Finished ");

        } catch (MediaStoreException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteContainerla Referencia AWS SDK for Java 2.x de la API.

`DeleteObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerRequest;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerResponse;
import software.amazon.awssdk.services.mediastoredata.MediaStoreDataClient;
import software.amazon.awssdk.services.mediastoredata.model.DeleteObjectRequest;
import software.amazon.awssdk.services.mediastoredata.model.MediaStoreDataException;
import java.net.URI;
import java.net.URISyntaxException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteObject {
    public static void main(String[] args) throws URISyntaxException {
        final String usage = """

                Usage:    <completePath> <containerName>
```

```
                Where:
                   completePath - The path (including the container) of the item to
delete.
                   containerName - The name of the container.
                """;

       if (args.length != 2) {
           System.out.println(usage);
           System.exit(1);
       }

       String completePath = args[0];
       String containerName = args[1];
       Region region = Region.US_EAST_1;
       URI uri = new URI(getEndpoint(containerName));

       MediaStoreDataClient mediaStoreData = MediaStoreDataClient.builder()
               .endpointOverride(uri)
               .region(region)
               .build();

       deleteMediaObject(mediaStoreData, completePath);
       mediaStoreData.close();
   }

   public static void deleteMediaObject(MediaStoreDataClient mediaStoreData, String
completePath) {
       try {
           DeleteObjectRequest deleteObjectRequest = DeleteObjectRequest.builder()
                   .path(completePath)
                   .build();

           mediaStoreData.deleteObject(deleteObjectRequest);

       } catch (MediaStoreDataException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }

   private static String getEndpoint(String containerName) {
       Region region = Region.US_EAST_1;
       MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
               .region(region)
```

```
                .build();

        DescribeContainerRequest containerRequest =
 DescribeContainerRequest.builder()
                .containerName(containerName)
                .build();

        DescribeContainerResponse response =
 mediaStoreClient.describeContainer(containerRequest);
        mediaStoreClient.close();
        return response.container().endpoint();
    }
}
```

- Para obtener más información sobre la API, consulta DeleteObjectla Referencia AWS SDK for Java 2.x de la API.

`DescribeContainer`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeContainer`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerRequest;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerResponse;
import software.amazon.awssdk.services.mediastore.model.MediaStoreException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeContainer {

    public static void main(String[] args) {
        final String usage = """

                Usage:    <containerName>

                Where:
                   containerName - The name of the container to describe.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String containerName = args[0];
        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        System.out.println("Status is " + checkContainer(mediaStoreClient,
 containerName));
        mediaStoreClient.close();
    }

    public static String checkContainer(MediaStoreClient mediaStoreClient, String
 containerName) {
        try {
            DescribeContainerRequest describeContainerRequest =
 DescribeContainerRequest.builder()
                    .containerName(containerName)
                    .build();

            DescribeContainerResponse containerResponse =
 mediaStoreClient.describeContainer(describeContainerRequest);
            System.out.println("The container name is " +
 containerResponse.container().name());
            System.out.println("The container ARN is " +
 containerResponse.container().arn());
```

```
            return containerResponse.container().status().toString();

        } catch (MediaStoreException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulta DescribeContainerla Referencia AWS SDK for Java 2.x de la API.

`GetObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.ResponseInputStream;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerRequest;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerResponse;
import software.amazon.awssdk.services.mediastoredata.MediaStoreDataClient;
import software.amazon.awssdk.services.mediastoredata.model.GetObjectRequest;
import software.amazon.awssdk.services.mediastoredata.model.GetObjectResponse;
import software.amazon.awssdk.services.mediastoredata.model.MediaStoreDataException;
import java.io.File;
import java.io.FileOutputStream;
import java.io.IOException;
import java.io.OutputStream;
import java.net.URI;
import java.net.URISyntaxException;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetObject {
    public static void main(String[] args) throws URISyntaxException {
        final String usage = """

                Usage:    <completePath> <containerName> <savePath>

                Where:
                   completePath - The path of the object in the container (for
 example, Videos5/sampleVideo.mp4).
                   containerName - The name of the container.
                   savePath - The path on the local drive where the file is saved,
 including the file name (for example, C:/AWS/myvid.mp4).
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String completePath = args[0];
        String containerName = args[1];
        String savePath = args[2];

        Region region = Region.US_EAST_1;
        URI uri = new URI(getEndpoint(containerName));
        MediaStoreDataClient mediaStoreData = MediaStoreDataClient.builder()
                .endpointOverride(uri)
                .region(region)
                .build();

        getMediaObject(mediaStoreData, completePath, savePath);
        mediaStoreData.close();
    }
```

```
    public static void getMediaObject(MediaStoreDataClient mediaStoreData, String
 completePath, String savePath) {

        try {
            GetObjectRequest objectRequest = GetObjectRequest.builder()
                    .path(completePath)
                    .build();

            // Write out the data to a file.
            ResponseInputStream<GetObjectResponse> data =
 mediaStoreData.getObject(objectRequest);
            byte[] buffer = new byte[data.available()];
            data.read(buffer);

            File targetFile = new File(savePath);
            OutputStream outStream = new FileOutputStream(targetFile);
            outStream.write(buffer);
            System.out.println("The data was written to " + savePath);

        } catch (MediaStoreDataException | IOException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    private static String getEndpoint(String containerName) {
        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        DescribeContainerRequest containerRequest =
 DescribeContainerRequest.builder()
                .containerName(containerName)
                .build();

        DescribeContainerResponse response =
 mediaStoreClient.describeContainer(containerRequest);
        return response.container().endpoint();
    }
}
```

- Para obtener más información sobre la API, consulta GetObjectla Referencia AWS SDK for Java 2.x de la API.

`ListContainers`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListContainers`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.services.mediastore.model.Container;
import software.amazon.awssdk.services.mediastore.model.ListContainersResponse;
import software.amazon.awssdk.services.mediastore.model.MediaStoreException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListContainers {

    public static void main(String[] args) {

        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        listAllContainers(mediaStoreClient);
        mediaStoreClient.close();
```

```
    }

    public static void listAllContainers(MediaStoreClient mediaStoreClient) {
        try {
            ListContainersResponse containersResponse =
 mediaStoreClient.listContainers();
            List<Container> containers = containersResponse.containers();
            for (Container container : containers) {
                System.out.println("Container name is " + container.name());
            }

        } catch (MediaStoreException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListContainersla Referencia AWS SDK for Java 2.x de la API.

`PutObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.services.mediastoredata.MediaStoreDataClient;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.mediastoredata.model.PutObjectRequest;
import software.amazon.awssdk.services.mediastoredata.model.MediaStoreDataException;
import software.amazon.awssdk.services.mediastoredata.model.PutObjectResponse;
```

```
import software.amazon.awssdk.services.mediastore.model.DescribeContainerRequest;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerResponse;
import java.io.File;
import java.net.URI;
import java.net.URISyntaxException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PutObject {
    public static void main(String[] args) throws URISyntaxException {
        final String USAGE = """

                To run this example, supply the name of a container, a file location
 to use, and path in the container\s

                Ex: <containerName> <filePath> <completePath>
                """;

        if (args.length < 3) {
            System.out.println(USAGE);
            System.exit(1);
        }

        String containerName = args[0];
        String filePath = args[1];
        String completePath = args[2];

        Region region = Region.US_EAST_1;
        URI uri = new URI(getEndpoint(containerName));
        MediaStoreDataClient mediaStoreData = MediaStoreDataClient.builder()
                .endpointOverride(uri)
                .region(region)
                .build();

        putMediaObject(mediaStoreData, filePath, completePath);
        mediaStoreData.close();
    }
```

```
    public static void putMediaObject(MediaStoreDataClient mediaStoreData, String
 filePath, String completePath) {
        try {
            File myFile = new File(filePath);
            RequestBody requestBody = RequestBody.fromFile(myFile);

            PutObjectRequest objectRequest = PutObjectRequest.builder()
                    .path(completePath)
                    .contentType("video/mp4")
                    .build();

            PutObjectResponse response = mediaStoreData.putObject(objectRequest,
 requestBody);
            System.out.println("The saved object is " +
 response.storageClass().toString());

        } catch (MediaStoreDataException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static String getEndpoint(String containerName) {

        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        DescribeContainerRequest containerRequest =
 DescribeContainerRequest.builder()
                .containerName(containerName)
                .build();

        DescribeContainerResponse response =
 mediaStoreClient.describeContainer(containerRequest);
        return response.container().endpoint();
    }
}
```

- Para obtener más información sobre la API, consulta PutObjectla Referencia AWS SDK for Java 2.x de la API.

AWS Entity Resolution ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with AWS Entity Resolution.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hola AWS Entity Resolution

En el siguiente ejemplo de código se muestra cómo empezar a utilizar AWS Entity Resolution.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloEntityResoultion {

    private static final Logger logger =
 LoggerFactory.getLogger(HelloEntityResoultion.class);

    private static EntityResolutionAsyncClient entityResolutionAsyncClient;
    public static void main(String[] args) {
        listMatchingWorkflows();
    }

    public static EntityResolutionAsyncClient getResolutionAsyncClient() {
        if (entityResolutionAsyncClient == null) {
            /*
            The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
 version 2,
            and it is designed to provide a high-performance, asynchronous HTTP
 client for interacting with AWS services.
             It uses the Netty framework to handle the underlying network
 communication and the Java NIO API to
             provide a non-blocking, event-driven approach to HTTP requests and
 responses.
             */

            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(50)  // Adjust as needed.
                .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
 timeout.
                .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
                .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
 timeout.
                .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the
 individual call attempt timeout.
                .retryStrategy(RetryMode.STANDARD)
                .build();

            entityResolutionAsyncClient = EntityResolutionAsyncClient.builder()
```

```
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return entityResolutionAsyncClient;
    }

    /**
     * Lists all matching workflows using an asynchronous paginator.
     * <p>
     * This method requests a paginated list of matching workflows from the
     * AWS Entity Resolution service and logs the names of the retrieved workflows.
     * It uses an asynchronous approach with a paginator and waits for the operation
     * to complete using {@code CompletableFuture#join()}.
     * </p>
     */
    public static void listMatchingWorkflows() {
        ListMatchingWorkflowsRequest request =
 ListMatchingWorkflowsRequest.builder().build();

        ListMatchingWorkflowsPublisher paginator =
            getResolutionAsyncClient().listMatchingWorkflowsPaginator(request);

        // Iterate through the paginated results asynchronously
        CompletableFuture<Void> future = paginator.subscribe(response -> {
            response.workflowSummaries().forEach(workflow ->
                logger.info("Matching Workflow Name: " + workflow.workflowName())
            );
        });

        // Wait for the asynchronous operation to complete
        future.join();
    }
}
```

- Para obtener más información sobre la API, consulta ListMatchingWorkflowsla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crear la asignación de esquema.
- Crea un AWS Entity Resolution flujo de trabajo.
- Iniciar el trabajo de búsqueda de coincidencias para el flujo de trabajo.
- Obtener los detalles del trabajo de búsqueda de coincidencias.
- Obtener la asignación de esquema.
- Mostrar todas las asignaciones de esquemas.
- Etiquetar el recurso de asignación de esquema.
- Elimine los AWS Entity Resolution activos.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario interactivo que demuestre AWS Entity Resolution las funciones.

```
public class EntityResScenario {
    private static final Logger logger =
 LoggerFactory.getLogger(EntityResScenario.class);
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final String STACK_NAME = "EntityResolutionCdkStack2";
    private static final String ENTITY_RESOLUTION_ROLE_ARN_KEY =
 "EntityResolutionRoleArn";
    private static final String GLUE_DATA_BUCKET_NAME_KEY = "GlueDataBucketName";
    private static final String JSON_GLUE_TABLE_ARN_KEY = "JsonErGlueTableArn";
    private static final String CSV_GLUE_TABLE_ARN_KEY = "CsvErGlueTableArn";
    private static String glueBucketName;
    private static String workflowName = "workflow-" + UUID.randomUUID();

    private static String jsonSchemaMappingName = "jsonschema-" + UUID.randomUUID();
```

```
    private static String jsonSchemaMappingArn = null;
    private static String csvSchemaMappingName = "csv-" + UUID.randomUUID();
    private static String roleARN;
    private static String csvGlueTableArn;
    private static String jsonGlueTableArn;
    private static Scanner scanner = new Scanner(System.in);

    private static EntityResActions actions = new EntityResActions();

    public static void main(String[] args) throws InterruptedException {

        logger.info("Welcome to the AWS Entity Resolution Scenario.");
        logger.info("""
            AWS Entity Resolution is a fully-managed machine learning service
provided by
            Amazon Web Services (AWS) that helps organizations extract, link, and
            organize information from multiple data sources. It leverages natural
            language processing and deep learning models to identify and resolve
            entities, such as people, places, organizations, and products,
            across structured and unstructured data.

            With Entity Resolution, customers can build robust data integration
            pipelines to combine and reconcile data from multiple systems,
databases,
            and documents. The service can handle ambiguous, incomplete, or
conflicting
            information, and provide a unified view of entities and their
relationships.
            This can be particularly valuable in applications such as customer 360,
            fraud detection, supply chain management, and knowledge management,
where
            accurate entity identification is crucial.

            The `EntityResolutionAsyncClient` interface in the AWS SDK for Java 2.x
            provides a set of methods to programmatically interact with the AWS
Entity
            Resolution service. This allows developers to automate the entity
extraction,
            linking, and deduplication process as part of their data processing
workflows.
            With Entity Resolution, organizations can unlock the value of their
data,
            improve decision-making, and enhance customer experiences by having a
reliable,
```

```
            comprehensive view of their key entities.
            """);

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("""
            To prepare the AWS resources needed for this scenario application, the
next step uploads
            a CloudFormation template whose resulting stack creates the following
resources:
            - An AWS Glue Data Catalog table
            - An AWS IAM role
            - An AWS S3 bucket
            - An AWS Entity Resolution Schema

            It can take a couple minutes for the Stack to finish creating the
resources.
            """);
        waitForInputToContinue(scanner);
        logger.info("Generating resources...");
        CloudFormationHelper.deployCloudFormationStack(STACK_NAME);
        Map<String, String> outputsMap =
CloudFormationHelper.getStackOutputsAsync(STACK_NAME).join();
        roleARN = outputsMap.get(ENTITY_RESOLUTION_ROLE_ARN_KEY);
        glueBucketName = outputsMap.get(GLUE_DATA_BUCKET_NAME_KEY);
        csvGlueTableArn = outputsMap.get(CSV_GLUE_TABLE_ARN_KEY);
        jsonGlueTableArn = outputsMap.get(JSON_GLUE_TABLE_ARN_KEY);
        logger.info(DASHES);
        waitForInputToContinue(scanner);

        try {
            runScenario();

        } catch (Exception ce) {
            Throwable cause = ce.getCause();
            logger.error("An exception happened: " + (cause != null ?
cause.getMessage() : ce.getMessage()));
        }
    }

    private static void runScenario() throws InterruptedException {
        /*
```

```
         This JSON is a valid input for the AWS Entity Resolution service.
         The JSON represents an array of three objects, each containing an "id",
"name", and "email"
         property. This format aligns with the expected input structure for the
         Entity Resolution service.
         */
        String json = """
            {"id":"1","name":"Jane Doe","email":"jane.doe@example.com"}
            {"id":"2","name":"John Doe","email":"john.doe@example.com"}
            {"id":"3","name":"Jorge Souza","email":"jorge_souza@example.com"}
            """;
        logger.info("Upload the following JSON objects to the {} S3 bucket.",
glueBucketName);
        logger.info(json);
        String csv = """
            id,name,email,phone
            1,Jane B.,Doe,jane.doe@example.com,555-876-9846
            2,John Doe Jr.,john.doe@example.com,555-654-3210
            3,María García,maría_garcia@company.com,555-567-1234
            4,Mary Major,mary_major@company.com,555-222-3333
            """;
        logger.info("Upload the following CSV data to the {} S3 bucket.",
glueBucketName);
        logger.info(csv);
        waitForInputToContinue(scanner);
        try {
            actions.uploadInputData(glueBucketName, json, csv);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();

            if (cause == null) {
                logger.error("Failed to upload input data: {}", ce.getMessage(),
ce);
            }

            if (cause instanceof ResourceNotFoundException) {
                logger.error("Failed to upload input data as the resource was not
found: {}", cause.getMessage(), cause);
            }
            return;
        }
        logger.info("The JSON and CSV objects have been uploaded to the S3
bucket.");
        waitForInputToContinue(scanner);
```

```
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("1. Create Schema Mapping");
        logger.info("""
            Entity Resolution schema mapping aligns and integrates data from
            multiple sources by identifying and matching corresponding entities
            like customers or products. It unifies schemas, resolves conflicts,
            and uses machine learning to link related entities, enabling a
            consolidated, accurate view for improved data quality and decision-
making.

            In this example, the schema mapping lines up with the fields in the JSON
 and CSV objects. That is,
            it contains these fields: id, name, and email.
            """);
        try {
            CreateSchemaMappingResponse response =
 actions.createSchemaMappingAsync(jsonSchemaMappingName).join();
            jsonSchemaMappingName = response.schemaName();
            logger.info("The JSON schema mapping name is " + jsonSchemaMappingName);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();

            if (cause == null) {
                logger.error("Failed to create JSON schema mapping: {}",
 ce.getMessage(), ce);
            }

            if (cause instanceof ConflictException) {
                logger.error("Schema mapping conflict detected: {}",
 cause.getMessage(), cause);
            } else {
                logger.error("Unexpected error while creating schema mapping: {}",
 cause.getMessage(), cause);
            }
            return;
        }

        try {
            CreateSchemaMappingResponse response =
 actions.createSchemaMappingAsync(csvSchemaMappingName).join();
            csvSchemaMappingName = response.schemaName();
            logger.info("The CSV schema mapping name is " + csvSchemaMappingName);
```

```
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause == null) {
                logger.error("Failed to create CSV schema mapping: {}",
ce.getMessage(), ce);
            }

            if (cause instanceof ConflictException) {
                logger.error("Schema mapping conflict detected: {}",
cause.getMessage(), cause);
            } else {
                logger.error("Unexpected error while creating CSV schema mapping:
{}", cause.getMessage(), cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("2. Create an AWS Entity Resolution Workflow. ");
        logger.info("""
            An Entity Resolution matching workflow identifies and links records
            across datasets that represent the same real-world entity, such as
            customers or products. Using techniques like schema mapping,
            data profiling, and machine learning algorithms,
            it evaluates attributes like names or emails to detect duplicates
            or relationships, even with variations or inconsistencies.
            The workflow outputs consolidated, de-duplicated data.

            We will use the machine learning-based matching technique.
            """);
        waitForInputToContinue(scanner);
        try {
            String workflowArn = actions.createMatchingWorkflowAsync(
                roleARN, workflowName, glueBucketName, jsonGlueTableArn,
                jsonSchemaMappingName, csvGlueTableArn,
csvSchemaMappingName).join();

            logger.info("The workflow ARN is: " + workflowArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();

            if (cause == null) {
```

```
                logger.error("An unexpected error occurred: {}", ce.getMessage(),
ce);
            }

            if (cause instanceof ValidationException) {
                logger.error("Validation error: {}", cause.getMessage(), cause);
            } else if (cause instanceof ConflictException) {
                logger.error("Workflow conflict detected: {}", cause.getMessage(),
cause);
            } else {
                logger.error("Unexpected error: {}", cause.getMessage(), cause);
            }
            return;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);
        logger.info("3. Start the matching job of the " + workflowName + "
workflow.");
        waitForInputToContinue(scanner);
        String jobId = null;
        try {
            jobId = actions.startMatchingJobAsync(workflowName).join();
            logger.info("The matching job was successfully started.");
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ConflictException) {
                logger.error("Job conflict detected: {}", cause.getMessage(),
cause);
            } else {
                logger.error("Unexpected error while starting the job: {}",
ce.getMessage(), ce);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. While the matching job is running, let's look at other API
methods. First, let's get details for job " + jobId);
        waitForInputToContinue(scanner);
        try {
            actions.getMatchingJobAsync(jobId, workflowName).join();
```

```
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The matching job not found: {}", cause.getMessage(),
cause);
            } else {
                logger.error("Failed to start matching job: " + (cause != null ?
cause.getMessage() : ce.getMessage()));
            }
            return;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. Get the schema mapping for the JSON data.");
        waitForInputToContinue(scanner);
        try {
            GetSchemaMappingResponse response =
actions.getSchemaMappingAsync(jsonSchemaMappingName).join();
            jsonSchemaMappingArn = response.schemaArn();
            logger.info("Schema mapping ARN is " + jsonSchemaMappingArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("Schema mapping not found: {}", cause.getMessage(),
cause);
            } else {
                logger.error("Error retrieving the specific schema mapping: " +
ce.getCause().getMessage());
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("6. List Schema Mappings.");
        try {
            actions.ListSchemaMappings();
        } catch (CompletionException ce) {
            logger.error("Error retrieving schema mappings: " +
ce.getCause().getMessage());
            return;
        }
```

```
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Tag the {} resource.", jsonSchemaMappingName);
        logger.info("""
            Tags can help you organize and categorize your Entity Resolution
resources.
            You can also use them to scope user permissions by granting a user
permission
            to access or change only resources with certain tag values.
            In Entity Resolution, SchemaMapping and MatchingWorkflow can be tagged.
For this example,
            the SchemaMapping is tagged.
                """);
        try {
            actions.tagEntityResource(jsonSchemaMappingArn).join();
        } catch (CompletionException ce) {
            logger.error("Error tagging the resource: " +
ce.getCause().getMessage());
            return;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. View the results of the AWS Entity Resolution Workflow.");
        logger.info("""
            You cannot view the result of the workflow that is in a running state.
            In order to view the results, you need to wait for the workflow that we
started in step 3 to complete.

            If you choose not to wait, you cannot view the results. You can perform

            this task manually in the AWS Management Console.

            This can take up to 30 mins (y/n).
            """);
        String viewAns = scanner.nextLine().trim();
        boolean isComplete = false;
        if (viewAns.equalsIgnoreCase("y")) {
            logger.info("You selected to view the Entity Resolution Workflow
results.");
```

```
            countdownWithWorkflowCheck(actions, 1800, jobId, workflowName);
            isComplete = true;
            try {
                JobMetrics metrics = actions.getJobInfo(workflowName, jobId).join();
                logger.info("Number of input records: {}", metrics.inputRecords());
                logger.info("Number of match ids: {}", metrics.matchIDs());
                logger.info("Number of records not processed: {}",
metrics.recordsNotProcessed());
                logger.info("Number of total records processed: {}",
metrics.totalRecordsProcessed());
                logger.info("The following represents the output data generated by
the Entity Resolution workflow based on the JSON and CSV input data. The output
data is stored in the {} bucket.", glueBucketName);
                actions.printData(glueBucketName);

                logger.info("""

                    Note that each of the last 2 records are considered a match even
though the 'name' differs between the records;
                    For example 'John Doe Jr.' compared to 'John Doe'.
                    The confidence level is a value between 0 and 1, where 1
indicates a perfect match.

                    """);

            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException) {
                    logger.error("The job not found: {}", cause.getMessage(),
cause);
                } else {
                    logger.error("Error retrieving job information: " +
ce.getCause().getMessage());
                }
                return;
            }
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("9. Do you want to delete the resources, including the workflow?
(y/n)");
```

```
        logger.info("""
            You cannot delete the workflow that is in a running state.
            In order to delete the workflow, you need to wait for the workflow to
complete.

            You can delete the workflow manually in the AWS Management Console at a
later time.

            If you already waited for the workflow to complete in the previous
step,
            the workflow is completed and you can delete it.

            If the workflow is not completed, this can take up to 30 mins (y/n).
            """);
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            try {
                if (!isComplete) {
                    countdownWithWorkflowCheck(actions, 1800, jobId, workflowName);
                }
                actions.deleteMatchingWorkflowAsync(workflowName).join();
                logger.info("Workflow deleted successfully!");
            } catch (CompletionException ce) {
                logger.info("Error deleting the workflow: {} ", ce.getMessage());
                return;
            }

            try {
                // Delete both schema mappings.
                actions.deleteSchemaMappingAsync(jsonSchemaMappingName).join();
                actions.deleteSchemaMappingAsync(csvSchemaMappingName).join();
                logger.info("Both schema mappings were deleted successfully!");
            } catch (CompletionException ce) {
                logger.error("Error deleting schema mapping: {}", ce.getMessage());
                return;
            }

            waitForInputToContinue(scanner);
            logger.info(DASHES);
            logger.info("""
                Now we delete the CloudFormation stack, which deletes
                the resources that were created at the beginning of this scenario.
                """);
            waitForInputToContinue(scanner);
```

```
            logger.info(DASHES);
            try {
                deleteCloudFormationStack();
            } catch (RuntimeException e) {
                logger.error("Failed to delete the stack: {}", e.getMessage());
                return;
            }

        } else {
            logger.info("You can delete the AWS resources in the AWS Management
Console.");
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("This concludes the AWS Entity Resolution scenario.");
        logger.info(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }

    public static void countdownWithWorkflowCheck(EntityResActions actions, int
totalSeconds, String jobId, String workflowName) throws InterruptedException {
        int secondsElapsed = 0;

        while (true) {
            // Calculate display minutes and seconds.
```

```
            int remainingTime = totalSeconds - secondsElapsed;
            int displayMinutes = remainingTime / 60;
            int displaySeconds = remainingTime % 60;

            // Print the countdown.
            System.out.printf("\r%02d:%02d", displayMinutes, displaySeconds);
            Thread.sleep(1000); // Wait for 1 second
            secondsElapsed++;

            // Check workflow status every 60 seconds.
            if (secondsElapsed % 60 == 0 || remainingTime <= 0) {
                GetMatchingJobResponse response =
 actions.checkWorkflowStatusCompleteAsync(jobId, workflowName).join();
                if (response != null &&
 "SUCCEEDED".equalsIgnoreCase(String.valueOf(response.status()))) {
                    logger.info(""); // Move to the next line after countdown.
                    logger.info("Countdown complete: Workflow is in Completed
 state!");
                    break; // Break out of the loop if the status is "SUCCEEDED"
                }
            }

            // If countdown reaches zero, reset it for continuous countdown.
            if (remainingTime <= 0) {
                secondsElapsed = 0;
            }
        }
    }

    private static void deleteCloudFormationStack() {
        try {
            CloudFormationHelper.emptyS3Bucket(glueBucketName);
            CloudFormationHelper.destroyCloudFormationStack(STACK_NAME);
            logger.info("Resources deleted successfully!");
        } catch (CloudFormationException e) {
            throw new RuntimeException("Failed to delete CloudFormation stack: " +
 e.getMessage(), e);
        } catch (S3Exception e) {
            throw new RuntimeException("Failed to empty S3 bucket: " +
 e.getMessage(), e);
        }
    }
}
```

Una clase contenedora para los métodos AWS Entity Resolution del SDK.

```
public class EntityResActions {

    private static final String PREFIX = "eroutput/";
    private static final Logger logger =
 LoggerFactory.getLogger(EntityResActions.class);

    private static EntityResolutionAsyncClient entityResolutionAsyncClient;

    private static S3AsyncClient s3AsyncClient;

    public static EntityResolutionAsyncClient getResolutionAsyncClient() {
        if (entityResolutionAsyncClient == null) {
            /*
            The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
 version 2,
            and it is designed to provide a high-performance, asynchronous HTTP
 client for interacting with AWS services.
             It uses the Netty framework to handle the underlying network
 communication and the Java NIO API to
             provide a non-blocking, event-driven approach to HTTP requests and
 responses.
             */

            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(50)  // Adjust as needed.
                .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
 timeout.
                .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
                .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
 timeout.
                .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the
 individual call attempt timeout.
                .retryStrategy(RetryMode.STANDARD)
                .build();
```

```
            entityResolutionAsyncClient = EntityResolutionAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return entityResolutionAsyncClient;
    }

    public static S3AsyncClient getS3AsyncClient() {
        if (s3AsyncClient == null) {
            /*
            The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
version 2,
            and it is designed to provide a high-performance, asynchronous HTTP
client for interacting with AWS services.
             It uses the Netty framework to handle the underlying network
communication and the Java NIO API to
             provide a non-blocking, event-driven approach to HTTP requests and
responses.
             */

            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(50)  // Adjust as needed.
                .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
timeout.
                .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
                .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
timeout.
                .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the
individual call attempt timeout.
                .retryStrategy(RetryMode.STANDARD)
                .build();

            s3AsyncClient = S3AsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
```

```
        return s3AsyncClient;
    }

    /**
     * Deletes the schema mapping asynchronously.
     *
     * @param schemaName the name of the schema to delete
     * @return a {@link CompletableFuture} that completes when the schema mapping is
deleted successfully,
     * or throws a {@link RuntimeException} if the deletion fails
     */
    public CompletableFuture<DeleteSchemaMappingResponse>
deleteSchemaMappingAsync(String schemaName) {
        DeleteSchemaMappingRequest request = DeleteSchemaMappingRequest.builder()
            .schemaName(schemaName)
            .build();

        return getResolutionAsyncClient().deleteSchemaMapping(request)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    // Successfully deleted the schema mapping, log the success
message.
                    logger.info("Schema mapping '{}' deleted successfully.",
schemaName);
                } else {
                    // Ensure exception is not null before accessing its cause.
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while deleting the schema mapping.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The schema mapping was not
found to delete: " + schemaName, cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to delete schema mapping:
" + schemaName, exception);
                }
            });
    }
```

```
   /**
    * Lists the schema mappings associated with the current AWS account. This
method uses an asynchronous paginator to
    * retrieve the schema mappings, and prints the name of each schema mapping to
the console.
    */
   public void ListSchemaMappings() {
       ListSchemaMappingsRequest mappingsRequest =
ListSchemaMappingsRequest.builder()
           .build();

       ListSchemaMappingsPublisher paginator =
getResolutionAsyncClient().listSchemaMappingsPaginator(mappingsRequest);

       // Iterate through the pages of results
       CompletableFuture<Void> future = paginator.subscribe(response -> {
           response.schemaList().forEach(schemaMapping ->
               logger.info("Schema Mapping Name: " + schemaMapping.schemaName())
           );
       });

       // Wait for the asynchronous operation to complete
       future.join();
   }

   /**
    * Asynchronously deletes a workflow with the specified name.
    *
    * @param workflowName the name of the workflow to be deleted
    * @return a {@link CompletableFuture} that completes when the workflow has been
deleted
    * @throws RuntimeException if the deletion of the workflow fails
    */
   public CompletableFuture<DeleteMatchingWorkflowResponse>
deleteMatchingWorkflowAsync(String workflowName) {
       DeleteMatchingWorkflowRequest request =
DeleteMatchingWorkflowRequest.builder()
           .workflowName(workflowName)
           .build();

       return getResolutionAsyncClient().deleteMatchingWorkflow(request)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   logger.info("{} was deleted", workflowName );
```

```
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while deleting the workflow.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The workflow to delete was
not found.", cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to delete workflow: " +
exception.getMessage(), exception);
                }
            });
    }

    /**
     * Creates a schema mapping asynchronously.
     *
     * @param schemaName the name of the schema to create
     * @return a {@link CompletableFuture} that represents the asynchronous creation
of the schema mapping
     */
    public CompletableFuture<CreateSchemaMappingResponse>
createSchemaMappingAsync(String schemaName) {
        List<SchemaInputAttribute> schemaAttributes = null;
        if (schemaName.startsWith("json")) {
            schemaAttributes = List.of(

SchemaInputAttribute.builder().matchKey("id").fieldName("id").type(SchemaAttributeType.UNIQ

SchemaInputAttribute.builder().matchKey("name").fieldName("name").type(SchemaAttributeType.

SchemaInputAttribute.builder().matchKey("email").fieldName("email").type(SchemaAttributeTyp
            );
        } else {
            schemaAttributes = List.of(

SchemaInputAttribute.builder().matchKey("id").fieldName("id").type(SchemaAttributeType.UNIQ

SchemaInputAttribute.builder().matchKey("name").fieldName("name").type(SchemaAttributeType.
```

```
SchemaInputAttribute.builder().matchKey("email").fieldName("email").type(SchemaAttributeTyp

SchemaInputAttribute.builder().fieldName("phone").type(SchemaAttributeType.PROVIDER_ID).sub
            );
        }

        CreateSchemaMappingRequest request = CreateSchemaMappingRequest.builder()
            .schemaName(schemaName)
            .mappedInputFields(schemaAttributes)
            .build();

        return getResolutionAsyncClient().createSchemaMapping(request)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("[{}] schema mapping Created Successfully!",
schemaName);
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while creating the schema mapping.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("A conflicting schema mapping
already exists. Resolve conflicts before proceeding.", cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to create schema mapping:
" + exception.getMessage(), exception);
                }
            });
    }

    /**
     * Retrieves the schema mapping asynchronously.
     *
     * @param schemaName the name of the schema to retrieve the mapping for
     * @return a {@link CompletableFuture} that completes with the {@link
GetSchemaMappingResponse} when the operation
     * is complete
     * @throws RuntimeException if the schema mapping retrieval fails
```

```
    */
   public CompletableFuture<GetSchemaMappingResponse> getSchemaMappingAsync(String
schemaName) {
       GetSchemaMappingRequest mappingRequest = GetSchemaMappingRequest.builder()
           .schemaName(schemaName)
           .build();

       return getResolutionAsyncClient().getSchemaMapping(mappingRequest)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   response.mappedInputFields().forEach(attribute ->
                       logger.info("Attribute Name: " + attribute.fieldName() +
                           ", Attribute Type: " + attribute.type().toString()));
               } else {
                   if (exception == null) {
                       throw new CompletionException("An unknown error occurred
while getting schema mapping.", null);
                   }

                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The requested schema mapping
was not found.", cause);
                   }

                   // Wrap other exceptions in a CompletionException with the
message.
                   throw new CompletionException("Failed to get schema mapping: " +
exception.getMessage(), exception);
               }
           });
   }

   /**
    * Asynchronously retrieves a matching job based on the provided job ID and
workflow name.
    *
    * @param jobId        the ID of the job to retrieve
    * @param workflowName the name of the workflow associated with the job
    * @return a {@link CompletableFuture} that completes when the job information
is available or an exception occurs
    */
   public CompletableFuture<GetMatchingJobResponse> getMatchingJobAsync(String
jobId, String workflowName) {
```

```
        GetMatchingJobRequest request = GetMatchingJobRequest.builder()
            .jobId(jobId)
            .workflowName(workflowName)
            .build();

        return getResolutionAsyncClient().getMatchingJob(request)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    // Successfully fetched the matching job details, log the job
status.
                    logger.info("Job status: " + response.status());
                    logger.info("Job details: " + response.toString());
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while fetching the matching job.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The requested job could not
be found.", cause);
                    }

                    // Wrap other exceptions in a CompletionException with the
message.
                    throw new CompletionException("Error fetching matching job: " +
exception.getMessage(), exception);
                }
            });
    }


    /**
     * Starts a matching job asynchronously for the specified workflow name.
     *
     * @param workflowName the name of the workflow for which to start the matching
job
     * @return a {@link CompletableFuture} that completes with the job ID of the
started matching job, or an empty
     * string if the operation fails
     */
    public CompletableFuture<String> startMatchingJobAsync(String workflowName) {
        StartMatchingJobRequest jobRequest = StartMatchingJobRequest.builder()
```

```
            .workflowName(workflowName)
            .build();

        return getResolutionAsyncClient().startMatchingJob(jobRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    String jobId = response.jobId();
                    logger.info("Job ID: " + jobId);
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while starting the job.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("The job is already running.
Resolve conflicts before starting a new job.", cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to start the job: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response != null ? response.jobId() : "");
    }

    /**
     * Checks the status of a workflow asynchronously.
     *
     * @param jobId        the ID of the job to check
     * @param workflowName the name of the workflow to check
     * @return a CompletableFuture that resolves to a boolean value indicating
whether the workflow has completed
     * successfully
     */
    public CompletableFuture<GetMatchingJobResponse>
checkWorkflowStatusCompleteAsync(String jobId, String workflowName) {
        GetMatchingJobRequest request = GetMatchingJobRequest.builder()
            .jobId(jobId)
            .workflowName(workflowName)
            .build();
```

```
        return getResolutionAsyncClient().getMatchingJob(request)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    // Process the response and log the job status.
                    logger.info("Job status: " + response.status());
                } else {
                    // Ensure exception is not null before accessing its cause.
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while checking job status.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The requested resource was
not found while checking the job status.", cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to check job status: " +
exception.getMessage(), exception);
                }
            });
    }

    /**
     * Creates an asynchronous CompletableFuture to manage the creation of a
matching workflow.
     *
     * @param roleARN                the AWS IAM role ARN to be used for the
workflow execution
     * @param workflowName           the name of the workflow to be created
     * @param outputBucket           the S3 bucket path where the workflow output
will be stored
     * @param jsonGlueTableArn       the ARN of the Glue Data Catalog table to be
used as the input source
     * @param jsonErSchemaMappingName the name of the schema to be used for the
input source
     * @return a CompletableFuture that, when completed, will return the ARN of the
created workflow
     */
    public CompletableFuture<String> createMatchingWorkflowAsync(
        String roleARN
        , String workflowName
```

```
        , String outputBucket
        , String jsonGlueTableArn
        , String jsonErSchemaMappingName
        , String csvGlueTableArn
        , String csvErSchemaMappingName) {

        InputSource jsonInputSource = InputSource.builder()
            .inputSourceARN(jsonGlueTableArn)
            .schemaName(jsonErSchemaMappingName)
            .applyNormalization(false)
            .build();

        InputSource csvInputSource = InputSource.builder()
            .inputSourceARN(csvGlueTableArn)
            .schemaName(csvErSchemaMappingName)
            .applyNormalization(false)
            .build();

        OutputAttribute idOutputAttribute = OutputAttribute.builder()
            .name("id")
            .build();

        OutputAttribute nameOutputAttribute = OutputAttribute.builder()
            .name("name")
            .build();

        OutputAttribute emailOutputAttribute = OutputAttribute.builder()
            .name("email")
            .build();

        OutputAttribute phoneOutputAttribute = OutputAttribute.builder()
            .name("phone")
            .build();

        OutputSource outputSource = OutputSource.builder()
            .outputS3Path("s3://" + outputBucket + "/eroutput")
            .output(idOutputAttribute, nameOutputAttribute, emailOutputAttribute,
phoneOutputAttribute)
            .applyNormalization(false)
            .build();

        ResolutionTechniques resolutionType = ResolutionTechniques.builder()
            .resolutionType(ResolutionType.ML_MATCHING)
            .build();
```

```
        CreateMatchingWorkflowRequest workflowRequest =
CreateMatchingWorkflowRequest.builder()
            .roleArn(roleARN)
            .description("Created by using the AWS SDK for Java")
            .workflowName(workflowName)
            .inputSourceConfig(List.of(jsonInputSource, csvInputSource))
            .outputSourceConfig(List.of(outputSource))
            .resolutionTechniques(resolutionType)
            .build();

        return getResolutionAsyncClient().createMatchingWorkflow(workflowRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("Workflow created successfully.");
                } else {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ValidationException) {
                        throw new CompletionException("Invalid request: Please check
input parameters.", cause);
                    }

                    if (cause instanceof ConflictException) {
                        throw new CompletionException("A conflicting workflow
already exists. Resolve conflicts before proceeding.", cause);
                    }
                    throw new CompletionException("Failed to create workflow: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(CreateMatchingWorkflowResponse::workflowArn);
    }

    /**
     * Tags the specified schema mapping ARN.
     *
     * @param schemaMappingARN the ARN of the schema mapping to tag
     */
    public CompletableFuture<TagResourceResponse> tagEntityResource(String
schemaMappingARN) {
        Map<String, String> tags = new HashMap<>();
        tags.put("tag1", "tag1Value");
        tags.put("tag2", "tag2Value");
```

```
        TagResourceRequest request = TagResourceRequest.builder()
            .resourceArn(schemaMappingARN)
            .tags(tags)
            .build();

        return getResolutionAsyncClient().tagResource(request)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    // Successfully tagged the resource, log the success message.
                    logger.info("Successfully tagged the resource.");
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while tagging the resource.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The resource to tag was not
found.", cause);
                    }
                    throw new CompletionException("Failed to tag the resource: " +
exception.getMessage(), exception);
                }
            });
    }

    public CompletableFuture<JobMetrics> getJobInfo(String workflowName, String
jobId) {
        return getResolutionAsyncClient().getMatchingJob(b -> b
                .workflowName(workflowName)
                .jobId(jobId))
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("Job metrics fetched successfully for jobId: " +
jobId);
                } else {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("Invalid request: Job id was
not found.", cause);
                    }
                    throw new CompletionException("Failed to fetch job info: " +
exception.getMessage(), exception);
```

```
                }
            })
            .thenApply(response -> response.metrics()); // Extract job metrics
    }

    /**
     * Uploads data to an Amazon S3 bucket asynchronously.
     *
     * @param bucketName the name of the S3 bucket to upload the data to
     * @param jsonData   the JSON data to be uploaded
     * @param csvData    the CSV data to be uploaded
     * @return a {@link CompletableFuture} representing both asynchronous operation
of uploading the data
     * @throws RuntimeException if an error occurs during the file upload
     */

    public void uploadInputData(String bucketName, String jsonData, String csvData)
{
        // Upload JSON data.
        String jsonKey = "jsonData/data.json";
        PutObjectRequest jsonUploadRequest = PutObjectRequest.builder()
            .bucket(bucketName)
            .key(jsonKey)
            .contentType("application/json")
            .build();

        CompletableFuture<PutObjectResponse> jsonUploadResponse =
getS3AsyncClient().putObject(jsonUploadRequest,
AsyncRequestBody.fromString(jsonData));

        // Upload CSV data.
        String csvKey = "csvData/data.csv";
        PutObjectRequest csvUploadRequest = PutObjectRequest.builder()
            .bucket(bucketName)
            .key(csvKey)
            .contentType("text/csv")
            .build();
        CompletableFuture<PutObjectResponse> csvUploadResponse =
getS3AsyncClient().putObject(csvUploadRequest,
AsyncRequestBody.fromString(csvData));

        CompletableFuture.allOf(jsonUploadResponse, csvUploadResponse)
            .whenComplete((result, ex) -> {
                if (ex != null) {
```

```
                    // Wrap an AWS exception.
                    throw new CompletionException("Failed to upload files", ex);
                }
            }).join();

    }

    /**
     * Finds the latest file in the S3 bucket that starts with "run-" in any depth
of subfolders
     */
    private CompletableFuture<String> findLatestMatchingFile(String bucketName) {
        ListObjectsV2Request request = ListObjectsV2Request.builder()
            .bucket(bucketName)
            .prefix(PREFIX) // Searches within the given folder
            .build();

        return getS3AsyncClient().listObjectsV2(request)
            .thenApply(response -> response.contents().stream()
                .map(S3Object::key)
                .filter(key -> key.matches(".*?/run-[0-9a-zA-Z\\-]+")) // Matches
files like run-XXXXX in any subfolder
                .max(String::compareTo) // Gets the latest file
                .orElse(null))
            .whenComplete((result, exception) -> {
                if (exception == null) {
                    if (result != null) {
                        logger.info("Latest matching file found: " + result);
                    } else {
                        logger.info("No matching files found.");
                    }
                } else {
                    throw new CompletionException("Failed to find latest matching
file: " + exception.getMessage(), exception);
                }
            });
    }

    /**
     * Prints the data located in the file in the S3 bucket that starts with "run-"
in any depth of subfolders
     */
    public void printData(String bucketName) {
        try {
```

```
            // Find the latest file with "run-" prefix in any depth of subfolders.
            String s3Key = findLatestMatchingFile(bucketName).join();
            if (s3Key == null) {
                logger.error("No matching files found in S3.");
                return;
            }

            logger.info("Downloading file: " + s3Key);

            // Read CSV file as String.
            String csvContent = readCSVFromS3Async(bucketName, s3Key).join();
            if (csvContent.isEmpty()) {
                logger.error("File is empty.");
                return;
            }

            // Process CSV content.
            List<String[]> records = parseCSV(csvContent);
            printTable(records);

        } catch (RuntimeException | IOException | CsvException e) {
            logger.error("Error processing CSV file from S3: " + e.getMessage());
            e.printStackTrace();
        }
    }

    /**
     * Reads a CSV file from S3 and returns it as a String.
     */
    private static CompletableFuture<String> readCSVFromS3Async(String bucketName,
String s3Key) {
        GetObjectRequest getObjectRequest = GetObjectRequest.builder()
            .bucket(bucketName)
            .key(s3Key)
            .build();

        // Initiating the asynchronous request to get the file as bytes
        return getS3AsyncClient().getObject(getObjectRequest,
AsyncResponseTransformer.toBytes())
            .thenApply(responseBytes -> responseBytes.asUtf8String()) // Convert
bytes to UTF-8 string
            .whenComplete((result, exception) -> {
                if (exception != null) {
```

```
                    throw new CompletionException("Failed to read CSV from S3: " +
exception.getMessage(), exception);
                } else {
                    logger.info("Successfully fetched CSV file content from S3.");
                }
            });
    }

    /**
     * Parses CSV content from a String into a list of records.
     */
    private static List<String[]> parseCSV(String csvContent) throws IOException,
CsvException {
        try (CSVReader csvReader = new CSVReader(new StringReader(csvContent))) {
            return csvReader.readAll();
        }
    }

    /**
     * Prints the given CSV data in a formatted table
     */
    private static void printTable(List<String[]> records) {
        if (records.isEmpty()) {
            System.out.println("No records found.");
            return;
        }

        String[] headers = records.get(0);
        List<String[]> rows = records.subList(1, records.size());

        // Determine column widths dynamically based on longest content
        int[] columnWidths = new int[headers.length];
        for (int i = 0; i < headers.length; i++) {
            final int columnIndex = i;
            int maxWidth = Math.max(headers[i].length(), rows.stream()
                .map(row -> row.length > columnIndex ? row[columnIndex].length() :
0)
                .max(Integer::compareTo)
                .orElse(0));
            columnWidths[i] = Math.min(maxWidth, 25); // Limit max width for better
readability
        }

        // Enable ANSI Console for colored output
```

```
        AnsiConsole.systemInstall();

        // Print table header
        System.out.println(ansi().fgYellow().a("=== CSV Data from S3 ===").reset());
        printRow(headers, columnWidths, true);

        // Print rows
        rows.forEach(row -> printRow(row, columnWidths, false));

        // Restore console to normal
        AnsiConsole.systemUninstall();
    }

    private static void printRow(String[] row, int[] columnWidths, boolean isHeader)
 {
        String border = IntStream.range(0, columnWidths.length)
            .mapToObj(i -> "-".repeat(columnWidths[i] + 2))
            .collect(Collectors.joining("+", "+", "+"));

        if (isHeader) {
            System.out.println(border);
        }

        System.out.print("|");
        for (int i = 0; i < columnWidths.length; i++) {
            String cell = (i < row.length && row[i] != null) ? row[i] : "";
            System.out.printf(" %-" + columnWidths[i] + "s |", isHeader ?
 ansi().fgBrightBlue().a(cell).reset() : cell);
        }
        System.out.println();

        if (isHeader) {
            System.out.println(border);
        }
    }
}
```

Acciones

`CreateMatchingWorkflow`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateMatchingWorkflow`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates an asynchronous CompletableFuture to manage the creation of a
matching workflow.
    *
    * @param roleARN                the AWS IAM role ARN to be used for the
workflow execution
    * @param workflowName           the name of the workflow to be created
    * @param outputBucket           the S3 bucket path where the workflow output
will be stored
    * @param jsonGlueTableArn       the ARN of the Glue Data Catalog table to be
used as the input source
    * @param jsonErSchemaMappingName the name of the schema to be used for the
input source
    * @return a CompletableFuture that, when completed, will return the ARN of the
created workflow
    */
   public CompletableFuture<String> createMatchingWorkflowAsync(
       String roleARN
       , String workflowName
       , String outputBucket
       , String jsonGlueTableArn
       , String jsonErSchemaMappingName
       , String csvGlueTableArn
       , String csvErSchemaMappingName) {

       InputSource jsonInputSource = InputSource.builder()
           .inputSourceARN(jsonGlueTableArn)
           .schemaName(jsonErSchemaMappingName)
```

```
            .applyNormalization(false)
            .build();

        InputSource csvInputSource = InputSource.builder()
            .inputSourceARN(csvGlueTableArn)
            .schemaName(csvErSchemaMappingName)
            .applyNormalization(false)
            .build();

        OutputAttribute idOutputAttribute = OutputAttribute.builder()
            .name("id")
            .build();

        OutputAttribute nameOutputAttribute = OutputAttribute.builder()
            .name("name")
            .build();

        OutputAttribute emailOutputAttribute = OutputAttribute.builder()
            .name("email")
            .build();

        OutputAttribute phoneOutputAttribute = OutputAttribute.builder()
            .name("phone")
            .build();

        OutputSource outputSource = OutputSource.builder()
            .outputS3Path("s3://" + outputBucket + "/eroutput")
            .output(idOutputAttribute, nameOutputAttribute, emailOutputAttribute,
phoneOutputAttribute)
            .applyNormalization(false)
            .build();

        ResolutionTechniques resolutionType = ResolutionTechniques.builder()
            .resolutionType(ResolutionType.ML_MATCHING)
            .build();

        CreateMatchingWorkflowRequest workflowRequest =
CreateMatchingWorkflowRequest.builder()
            .roleArn(roleARN)
            .description("Created by using the AWS SDK for Java")
            .workflowName(workflowName)
            .inputSourceConfig(List.of(jsonInputSource, csvInputSource))
            .outputSourceConfig(List.of(outputSource))
            .resolutionTechniques(resolutionType)
```

```
            .build();

        return getResolutionAsyncClient().createMatchingWorkflow(workflowRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("Workflow created successfully.");
                } else {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ValidationException) {
                        throw new CompletionException("Invalid request: Please check
input parameters.", cause);
                    }

                    if (cause instanceof ConflictException) {
                        throw new CompletionException("A conflicting workflow
already exists. Resolve conflicts before proceeding.", cause);
                    }
                    throw new CompletionException("Failed to create workflow: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(CreateMatchingWorkflowResponse::workflowArn);
    }
```

- Para obtener más información sobre la API, consulta CreateMatchingWorkflowla Referencia AWS SDK for Java 2.x de la API.

`CreateSchemaMapping`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateSchemaMapping`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
```

```
    * Creates a schema mapping asynchronously.
    *
    * @param schemaName the name of the schema to create
    * @return a {@link CompletableFuture} that represents the asynchronous creation
of the schema mapping
    */
   public CompletableFuture<CreateSchemaMappingResponse>
createSchemaMappingAsync(String schemaName) {
       List<SchemaInputAttribute> schemaAttributes = null;
       if (schemaName.startsWith("json")) {
           schemaAttributes = List.of(

SchemaInputAttribute.builder().matchKey("id").fieldName("id").type(SchemaAttributeType.UNIQ

SchemaInputAttribute.builder().matchKey("name").fieldName("name").type(SchemaAttributeType.

SchemaInputAttribute.builder().matchKey("email").fieldName("email").type(SchemaAttributeTyp
           );
       } else {
           schemaAttributes = List.of(

SchemaInputAttribute.builder().matchKey("id").fieldName("id").type(SchemaAttributeType.UNIQ

SchemaInputAttribute.builder().matchKey("name").fieldName("name").type(SchemaAttributeType.

SchemaInputAttribute.builder().matchKey("email").fieldName("email").type(SchemaAttributeTyp

SchemaInputAttribute.builder().fieldName("phone").type(SchemaAttributeType.PROVIDER_ID).sub
           );
       }

       CreateSchemaMappingRequest request = CreateSchemaMappingRequest.builder()
           .schemaName(schemaName)
           .mappedInputFields(schemaAttributes)
           .build();

       return getResolutionAsyncClient().createSchemaMapping(request)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   logger.info("[{}] schema mapping Created Successfully!",
schemaName);
               } else {
                   if (exception == null) {
```

```
                        throw new CompletionException("An unknown error occurred
while creating the schema mapping.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("A conflicting schema mapping
already exists. Resolve conflicts before proceeding.", cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to create schema mapping:
" + exception.getMessage(), exception);
                }
            });
    }
```

- Para obtener más información sobre la API, consulta CreateSchemaMappingla Referencia AWS SDK for Java 2.x de la API.

`DeleteMatchingWorkflow`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteMatchingWorkflow`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously deletes a workflow with the specified name.
     *
     * @param workflowName the name of the workflow to be deleted
     * @return a {@link CompletableFuture} that completes when the workflow has been
deleted
     * @throws RuntimeException if the deletion of the workflow fails
     */
```

```
   public CompletableFuture<DeleteMatchingWorkflowResponse>
deleteMatchingWorkflowAsync(String workflowName) {
       DeleteMatchingWorkflowRequest request =
DeleteMatchingWorkflowRequest.builder()
           .workflowName(workflowName)
           .build();

       return getResolutionAsyncClient().deleteMatchingWorkflow(request)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   logger.info("{} was deleted", workflowName );
               } else {
                   if (exception == null) {
                       throw new CompletionException("An unknown error occurred
while deleting the workflow.", null);
                   }

                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The workflow to delete was
not found.", cause);
                   }

                   // Wrap other AWS exceptions in a CompletionException.
                   throw new CompletionException("Failed to delete workflow: " +
exception.getMessage(), exception);
               }
           });
   }
```

- Para obtener más información sobre la API, consulta DeleteMatchingWorkflowla Referencia AWS SDK for Java 2.x de la API.

`DeleteSchemaMapping`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteSchemaMapping`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deletes the schema mapping asynchronously.
    *
    * @param schemaName the name of the schema to delete
    * @return a {@link CompletableFuture} that completes when the schema mapping is
deleted successfully,
    * or throws a {@link RuntimeException} if the deletion fails
    */
   public CompletableFuture<DeleteSchemaMappingResponse>
deleteSchemaMappingAsync(String schemaName) {
       DeleteSchemaMappingRequest request = DeleteSchemaMappingRequest.builder()
           .schemaName(schemaName)
           .build();

       return getResolutionAsyncClient().deleteSchemaMapping(request)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   // Successfully deleted the schema mapping, log the success
message.
                   logger.info("Schema mapping '{}' deleted successfully.",
schemaName);
               } else {
                   // Ensure exception is not null before accessing its cause.
                   if (exception == null) {
                       throw new CompletionException("An unknown error occurred
while deleting the schema mapping.", null);
                   }

                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The schema mapping was not
found to delete: " + schemaName, cause);
                   }
```

```
                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to delete schema mapping:
" + schemaName, exception);
                }
            });
    }
```

- Para obtener más información sobre la API, consulta DeleteSchemaMappingla Referencia AWS SDK for Java 2.x de la API.

`GetMatchingJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetMatchingJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously retrieves a matching job based on the provided job ID and
workflow name.
     *
     * @param jobId        the ID of the job to retrieve
     * @param workflowName the name of the workflow associated with the job
     * @return a {@link CompletableFuture} that completes when the job information
is available or an exception occurs
     */
    public CompletableFuture<GetMatchingJobResponse> getMatchingJobAsync(String
jobId, String workflowName) {
        GetMatchingJobRequest request = GetMatchingJobRequest.builder()
            .jobId(jobId)
            .workflowName(workflowName)
            .build();

        return getResolutionAsyncClient().getMatchingJob(request)
            .whenComplete((response, exception) -> {
```

```
                if (response != null) {
                    // Successfully fetched the matching job details, log the job
status.
                    logger.info("Job status: " + response.status());
                    logger.info("Job details: " + response.toString());
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while fetching the matching job.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The requested job could not
be found.", cause);
                    }

                    // Wrap other exceptions in a CompletionException with the
message.
                    throw new CompletionException("Error fetching matching job: " +
exception.getMessage(), exception);
                }
            });
    }
```

- Para obtener más información sobre la API, consulta GetMatchingJobla Referencia AWS SDK for Java 2.x de la API.

`GetSchemaMapping`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetSchemaMapping`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Retrieves the schema mapping asynchronously.
    *
    * @param schemaName the name of the schema to retrieve the mapping for
    * @return a {@link CompletableFuture} that completes with the {@link
GetSchemaMappingResponse} when the operation
    * is complete
    * @throws RuntimeException if the schema mapping retrieval fails
    */
   public CompletableFuture<GetSchemaMappingResponse> getSchemaMappingAsync(String
schemaName) {
       GetSchemaMappingRequest mappingRequest = GetSchemaMappingRequest.builder()
           .schemaName(schemaName)
           .build();

       return getResolutionAsyncClient().getSchemaMapping(mappingRequest)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   response.mappedInputFields().forEach(attribute ->
                       logger.info("Attribute Name: " + attribute.fieldName() +
                           ", Attribute Type: " + attribute.type().toString()));
               } else {
                   if (exception == null) {
                       throw new CompletionException("An unknown error occurred
while getting schema mapping.", null);
                   }

                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The requested schema mapping
was not found.", cause);
                   }

                   // Wrap other exceptions in a CompletionException with the
message.
                   throw new CompletionException("Failed to get schema mapping: " +
exception.getMessage(), exception);
               }
           });
   }
```

- Para obtener más información sobre la API, consulta GetSchemaMappingla Referencia AWS SDK for Java 2.x de la API.

`ListSchemaMappings`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListSchemaMappings`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Lists the schema mappings associated with the current AWS account. This
method uses an asynchronous paginator to
    * retrieve the schema mappings, and prints the name of each schema mapping to
the console.
    */
   public void ListSchemaMappings() {
       ListSchemaMappingsRequest mappingsRequest =
ListSchemaMappingsRequest.builder()
           .build();

       ListSchemaMappingsPublisher paginator =
getResolutionAsyncClient().listSchemaMappingsPaginator(mappingsRequest);

       // Iterate through the pages of results
       CompletableFuture<Void> future = paginator.subscribe(response -> {
           response.schemaList().forEach(schemaMapping ->
               logger.info("Schema Mapping Name: " + schemaMapping.schemaName())
           );
       });

       // Wait for the asynchronous operation to complete
       future.join();
   }
```

- Para obtener más información sobre la API, consulta ListSchemaMappingsla Referencia AWS SDK for Java 2.x de la API.

`StartMatchingJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartMatchingJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Starts a matching job asynchronously for the specified workflow name.
    *
    * @param workflowName the name of the workflow for which to start the matching
job
    * @return a {@link CompletableFuture} that completes with the job ID of the
started matching job, or an empty
    * string if the operation fails
    */
   public CompletableFuture<String> startMatchingJobAsync(String workflowName) {
       StartMatchingJobRequest jobRequest = StartMatchingJobRequest.builder()
           .workflowName(workflowName)
           .build();

       return getResolutionAsyncClient().startMatchingJob(jobRequest)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   String jobId = response.jobId();
                   logger.info("Job ID: " + jobId);
               } else {
                   if (exception == null) {
                       throw new CompletionException("An unknown error occurred
while starting the job.", null);
                   }

                   Throwable cause = exception.getCause();
```

```
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("The job is already running.
Resolve conflicts before starting a new job.", cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to start the job: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response != null ? response.jobId() : "");
    }
```

- Para obtener más información sobre la API, consulta StartMatchingJobla Referencia AWS SDK for Java 2.x de la API.

`TagResource`

En el siguiente ejemplo de código, se muestra cómo utilizar `TagResource`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Tags the specified schema mapping ARN.
     *
     * @param schemaMappingARN the ARN of the schema mapping to tag
     */
    public CompletableFuture<TagResourceResponse> tagEntityResource(String
schemaMappingARN) {
        Map<String, String> tags = new HashMap<>();
        tags.put("tag1", "tag1Value");
        tags.put("tag2", "tag2Value");

        TagResourceRequest request = TagResourceRequest.builder()
```

```
            .resourceArn(schemaMappingARN)
            .tags(tags)
            .build();

        return getResolutionAsyncClient().tagResource(request)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    // Successfully tagged the resource, log the success message.
                    logger.info("Successfully tagged the resource.");
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while tagging the resource.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The resource to tag was not
found.", cause);
                    }
                    throw new CompletionException("Failed to tag the resource: " +
exception.getMessage(), exception);
                }
            });
    }
```

- Para obtener más información sobre la API, consulta TagResourcela Referencia AWS SDK for Java 2.x de la API.

OpenSearch Ejemplos de servicios que utilizan SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes mediante el uso del OpenSearch servicio AWS SDK for Java 2.x with.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hello OpenSearch Service

El siguiente ejemplo de código muestra cómo empezar a utilizar OpenSearch Service.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.opensearch.OpenSearchAsyncClient;
import software.amazon.awssdk.services.opensearch.model.ListVersionsRequest;
import java.util.List;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloOpenSearch {
    public static void main(String[] args) {
        try {
            CompletableFuture<Void> future = listVersionsAsync();
            future.join();
```

```
            System.out.println("Versions listed successfully.");
        } catch (RuntimeException e) {
            System.err.println("Error occurred while listing versions: " +
 e.getMessage());
        }
    }

    private static OpenSearchAsyncClient getAsyncClient() {
        return OpenSearchAsyncClient.builder().build();
    }

    public static CompletableFuture<Void> listVersionsAsync() {
        ListVersionsRequest request = ListVersionsRequest.builder()
            .maxResults(10)
            .build();

        return getAsyncClient().listVersions(request).thenAccept(response -> {
            List<String> versionList = response.versions();
            for (String version : versionList) {
                System.out.println("Version info: " + version);
            }
        }).exceptionally(ex -> {
            // Handle the exception, or propagate it as a RuntimeException
            throw new RuntimeException("Failed to list versions", ex);
        });
    }
}
```

- Para obtener más información sobre la API, consulta ListVersionsla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conozca las operaciones principales del OpenSearch servicio

En el siguiente ejemplo de código, se muestra cómo:

- Cree un dominio OpenSearch de servicio.
- Proporciona información detallada sobre un dominio OpenSearch de servicio específico.
- Muestra todos los dominios OpenSearch de servicio que son propiedad de la cuenta.

- Espera hasta que el estado de cambio del dominio del OpenSearch servicio alcance un estado completo.
- Modifica la configuración de un dominio de OpenSearch servicio existente.
- Agrega una etiqueta al dominio del OpenSearch servicio.
- Muestra las etiquetas asociadas a un dominio OpenSearch de servicio.
- Elimina las etiquetas de un dominio OpenSearch de servicio.
- Elimina el dominio del OpenSearch servicio.

SDK para Java 2.x

> **Note**
>
> Hay más información. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario interactivo que demuestre las características OpenSearch del servicio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.opensearch.model.*;
import java.util.List;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;

public class OpenSearchScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    private static final Logger logger =
 LoggerFactory.getLogger(OpenSearchScenario.class);
    static Scanner scanner = new Scanner(System.in);

    static OpenSearchActions openSearchActions = new OpenSearchActions();

    public static void main(String[] args) throws Throwable {
        logger.info("""
            Welcome to the Amazon OpenSearch Service Basics Scenario.
```

```
            Use the Amazon OpenSearch Service API to create, configure, and manage
 OpenSearch Service domains.

            The operations exposed by the AWS OpenSearch Service client are focused
 on managing the OpenSearch Service domains
            and their configurations, not the data within the domains (such as
 indexing or querying documents).
            For document management, you typically interact directly with the
 OpenSearch REST API or use other libraries,
            such as the OpenSearch Java client (https://opensearch.org/docs/latest/
clients/java/).

            Let's get started...
        """);
        waitForInputToContinue(scanner);
        try {
            runScenario();
        } catch (RuntimeException e) {
            e.printStackTrace();
        }
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                logger.info("Invalid input. Please try again.");
            }
        }
    }

    private static void runScenario() throws Throwable {
        String currentTimestamp = String.valueOf(System.currentTimeMillis());
        String domainName = "test-domain-" + currentTimestamp;

        logger.info(DASHES);
        logger.info("1. Create an Amazon OpenSearch domain");
```

```
        logger.info("""
            An Amazon OpenSearch domain is a managed instance of the OpenSearch
engine,
            which is an open-source search and analytics engine derived from
Elasticsearch.
            An OpenSearch domain is essentially a cluster of compute resources and
storage that hosts
            one or more OpenSearch indexes, enabling you to perform full-text
searches, data analysis, and
            visualizations.

            In this step, we'll initiate the creation of the domain. We'll check on
the progress in a later step.
        """);
        waitForInputToContinue(scanner);

        try {
            CompletableFuture<String> future =
openSearchActions.createNewDomainAsync(domainName);
            String domainId = future.join();
            logger.info("Domain successfully created with ID: {}", domainId);
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause != null) {
                if (cause instanceof OpenSearchException openSearchEx) {
                    logger.error("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
                } else {
                    logger.error("An unexpected error occurred: " +
cause.getMessage(), cause);
                }
            } else {
                logger.error("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("2. Describe the Amazon OpenSearch domain");
        logger.info("In this step, we get back the Domain ARN which is used in an
upcoming step.");
        waitForInputToContinue(scanner);
```

```
        String arn = "";
        try {
            CompletableFuture<String> future =
openSearchActions.describeDomainAsync(domainName);
            arn = future.join();
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof OpenSearchException openSearchEx) {
                logger.info("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("3. List the domains in your account");
        waitForInputToContinue(scanner);

        try {
            CompletableFuture<List<DomainInfo>> future =
openSearchActions.listAllDomainsAsync();
            List<DomainInfo> domainInfoList = future.join();
            for (DomainInfo domain : domainInfoList) {
                logger.info("Domain name is: " + domain.domainName());
            }
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            while (cause.getCause() != null && !(cause instanceof
OpenSearchException)) {
                cause = cause.getCause();
            }
            if (cause instanceof OpenSearchException openSearchEx) {
                logger.info("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
```

```
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("4. Wait until the domain's change status reaches a completed
state");
        logger.info("""
            In this step, we check on the change status of the domain that we
initiated in Step 1.
            Until we reach a COMPLETED state, we stay in a loop by sending a
DescribeDomainChangeProgressRequest.

            The time it takes for a change to an OpenSearch domain to reach a
completed state can range
            from a few minutes to several hours. In this case the change is creating
a new domain that we initiated in Step 1.
            The time varies depending on the complexity of the change and the
current load on
            the OpenSearch service. In general, simple changes, such as scaling the
number of data nodes or
            updating the OpenSearch version, may take 10-30 minutes.
        """);

        waitForInputToContinue(scanner);

        try {
            CompletableFuture<Void> future =
openSearchActions.domainChangeProgressAsync(domainName);
            future.join();
            logger.info("Domain change progress completed successfully.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            while (cause.getCause() != null && !(cause instanceof
ResourceNotFoundException)) {
                cause = cause.getCause();
            }
            if (cause instanceof ResourceNotFoundException
resourceNotFoundException) {
                logger.info("The specific AWS resource was not found: Error message:
{}, Error code {}", resourceNotFoundException.awsErrorDetails().errorMessage(),
resourceNotFoundException.awsErrorDetails().errorCode());

                if (cause instanceof OpenSearchException ex) {
```

```
                    logger.info("An OpenSearch error occurred: Error message: " +
ex.getMessage());
                } else {
                    logger.info("An unexpected error occurred: " + rt.getMessage());
                }
                throw cause;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("5. Modify the domain");
        logger.info("""
            You can change your OpenSearch domain's settings, like the number of
instances, without starting over from scratch.
            This makes it easy to adjust your domain as your needs change, allowing
you to scale up or
            down quickly without recreating everything.

            We modify the domain in this step by changing the number of instances.
        """);

        waitForInputToContinue(scanner);

        try {
            CompletableFuture<UpdateDomainConfigResponse> future =
openSearchActions.updateSpecificDomainAsync(domainName);
            UpdateDomainConfigResponse updateResponse = future.join();
            logger.info("Domain update status: " +
updateResponse.domainConfig().changeProgressDetails().configChangeStatusAsString());
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof OpenSearchException openSearchEx) {
                logger.info("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);
```

```
        logger.info("6. Wait until the domain's change status reaches a completed
state");
        logger.info("""
            In this step, we poll the status until the domain's change status
reaches a completed state.
        """);

        waitForInputToContinue(scanner);

        try {
            CompletableFuture<Void> future =
openSearchActions.domainChangeProgressAsync(domainName);
            future.join();
            logger.info("Domain change progress completed successfully.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof OpenSearchException ex) {
                logger.info("EC2 error occurred: Error message: " +ex.getMessage());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("7. Tag the Domain");
        logger.info("""
            Tags let you assign arbitrary information to an Amazon OpenSearch
Service domain so you can
            categorize and filter on that information. A tag is a key-value pair
that you define and
            associate with an OpenSearch Service domain. You can use these tags to
track costs by grouping
            expenses for similarly tagged resources.

            In this scenario, we create tags with keys "service" and "instances".
        """);

        waitForInputToContinue(scanner);

        try {
            CompletableFuture<AddTagsResponse> future =
openSearchActions.addDomainTagsAsync(arn);
```

```
            future.join();
            logger.info("Domain tags added successfully.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            while (cause.getCause() != null && !(cause instanceof
OpenSearchException)) {
                cause = cause.getCause();
            }
            if (cause instanceof OpenSearchException openSearchEx) {
                logger.info("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
                if (cause != null) {
                    if (cause instanceof OpenSearchException) {
                        logger.error("OpenSearch error occurred: Error message: " +
cause.getMessage(), cause);
                    } else {
                        logger.error("An unexpected error occurred: " +
cause.getMessage(), cause);
                    }
                } else {
                    logger.error("An unexpected error occurred: " + rt.getMessage(),
rt);
                }
                throw cause;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("8. List Domain tags");
        waitForInputToContinue(scanner);

        try {
            CompletableFuture<ListTagsResponse> future =
openSearchActions.listDomainTagsAsync(arn);
            ListTagsResponse listTagsResponse = future.join();
            listTagsResponse.tagList().forEach(tag -> logger.info("Tag Key: " +
tag.key() + ", Tag Value: " + tag.value()));
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
```

```
            while (cause.getCause() != null && !(cause instanceof
OpenSearchException)) {
                cause = cause.getCause();
            }
            if (cause instanceof OpenSearchException openSearchEx) {
                logger.info("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;

        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("9. Delete the domain");
        logger.info("""
            In this step, we'll delete the Amazon OpenSearch domain that we created
in Step 1.
            Deleting a domain will remove all data and configuration for that
domain.
        """);

        waitForInputToContinue(scanner);

        try {
            CompletableFuture<DeleteDomainResponse> future =
openSearchActions.deleteSpecificDomainAsync(domainName);
            future.join();
            logger.info("Domain successfully deleted.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            while (cause.getCause() != null && !(cause instanceof
OpenSearchException)) {
                cause = cause.getCause();
            }
            if (cause instanceof OpenSearchException openSearchEx) {
                logger.info("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
            } else {
```

```
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;

        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("Scenario complete!");
    }
}
```

Una clase contenedora para los métodos OpenSearch del Service SDK.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.core.retry.RetryPolicy;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.opensearch.OpenSearchAsyncClient;
import software.amazon.awssdk.services.opensearch.model.AddTagsRequest;
import software.amazon.awssdk.services.opensearch.model.AddTagsResponse;
import software.amazon.awssdk.services.opensearch.model.ClusterConfig;
import software.amazon.awssdk.services.opensearch.model.CreateDomainRequest;
import software.amazon.awssdk.services.opensearch.model.DeleteDomainRequest;
import software.amazon.awssdk.services.opensearch.model.DeleteDomainResponse;
import
 software.amazon.awssdk.services.opensearch.model.DescribeDomainChangeProgressRequest;
import
 software.amazon.awssdk.services.opensearch.model.DescribeDomainChangeProgressResponse;
import software.amazon.awssdk.services.opensearch.model.DescribeDomainRequest;
import software.amazon.awssdk.services.opensearch.model.DomainInfo;
import software.amazon.awssdk.services.opensearch.model.DomainStatus;
import software.amazon.awssdk.services.opensearch.model.EBSOptions;
import software.amazon.awssdk.services.opensearch.model.ListDomainNamesRequest;
import software.amazon.awssdk.services.opensearch.model.ListTagsRequest;
import software.amazon.awssdk.services.opensearch.model.ListTagsResponse;
import software.amazon.awssdk.services.opensearch.model.NodeToNodeEncryptionOptions;
import software.amazon.awssdk.services.opensearch.model.Tag;
import software.amazon.awssdk.services.opensearch.model.UpdateDomainConfigRequest;
```

```
import software.amazon.awssdk.services.opensearch.model.UpdateDomainConfigResponse;
import software.amazon.awssdk.services.opensearch.model.VolumeType;
import java.time.Duration;
import java.util.ArrayList;
import java.util.List;
import java.util.concurrent.CompletableFuture;

public class OpenSearchActions {
    private static final Logger logger =
 LoggerFactory.getLogger(OpenSearchActions.class);
    private static OpenSearchAsyncClient openSearchClientAsyncClient;
    private static OpenSearchAsyncClient getAsyncClient() {
        if (openSearchClientAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryPolicy(RetryPolicy.builder()
                    .numRetries(3)
                    .build())
                .build();

            openSearchClientAsyncClient = OpenSearchAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return openSearchClientAsyncClient;
    }

    /**
     * Creates a new OpenSearch domain asynchronously.
     * @param domainName the name of the new OpenSearch domain to create
     * @return a {@link CompletableFuture} containing the domain ID of the newly
 created domain
     */
```

```
    public CompletableFuture<String> createNewDomainAsync(String domainName) {
        ClusterConfig clusterConfig = ClusterConfig.builder()
            .dedicatedMasterEnabled(true)
            .dedicatedMasterCount(3)
            .dedicatedMasterType("t2.small.search")
            .instanceType("t2.small.search")
            .instanceCount(5)
            .build();

        EBSOptions ebsOptions = EBSOptions.builder()
            .ebsEnabled(true)
            .volumeSize(10)
            .volumeType(VolumeType.GP2)
            .build();

        NodeToNodeEncryptionOptions encryptionOptions =
NodeToNodeEncryptionOptions.builder()
            .enabled(true)
            .build();

        CreateDomainRequest domainRequest = CreateDomainRequest.builder()
            .domainName(domainName)
            .engineVersion("OpenSearch_1.0")
            .clusterConfig(clusterConfig)
            .ebsOptions(ebsOptions)
            .nodeToNodeEncryptionOptions(encryptionOptions)
            .build();
        logger.info("Sending domain creation request...");
        return getAsyncClient().createDomain(domainRequest)
                .handle( (createResponse, throwable) -> {
                    if (createResponse != null) {
                        logger.info("Domain status is {}",
createResponse.domainStatus().changeProgressDetails().configChangeStatusAsString());
                        logger.info("Domain Id is {}",
createResponse.domainStatus().domainId());
                        return createResponse.domainStatus().domainId();
                    }
                    throw new RuntimeException("Failed to create domain",
throwable);
                });
    }

    /**
     * Deletes a specific domain asynchronously.
```

```
    * @param domainName the name of the domain to be deleted
    * @return a {@link CompletableFuture} that completes when the domain has been
deleted
    * or throws a {@link RuntimeException} if the deletion fails
    */
   public CompletableFuture<DeleteDomainResponse> deleteSpecificDomainAsync(String
domainName) {
       DeleteDomainRequest domainRequest = DeleteDomainRequest.builder()
           .domainName(domainName)
           .build();

       // Delete domain asynchronously
       return getAsyncClient().deleteDomain(domainRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   throw new RuntimeException("Failed to delete the domain: " +
domainName, exception);
               }
           });
   }

   /**
    * Describes the specified domain asynchronously.
    *
    * @param domainName the name of the domain to describe
    * @return a {@link CompletableFuture} that completes with the ARN of the domain
    * @throws RuntimeException if the domain description fails
    */
   public CompletableFuture<String> describeDomainAsync(String domainName) {
       DescribeDomainRequest request = DescribeDomainRequest.builder()
           .domainName(domainName)
           .build();

       return getAsyncClient().describeDomain(request)
           .handle((response, exception) -> {  // Handle both response and
exception
               if (exception != null) {
                   throw new RuntimeException("Failed to describe domain",
exception);
               }
               DomainStatus domainStatus = response.domainStatus();
               String endpoint = domainStatus.endpoint();
               String arn = domainStatus.arn();
               String engineVersion = domainStatus.engineVersion();
```

```
                logger.info("Domain endpoint is: " + endpoint);
                logger.info("ARN: " + arn);
                System.out.println("Engine version: " + engineVersion);

                return arn;  // Return ARN when successful
            });
    }

    /**
     * Asynchronously lists all the domains in the current AWS account.
     * @return a {@link CompletableFuture} that, when completed, contains a list of
{@link DomainInfo} objects representing
     *         the domains in the account.
     * @throws RuntimeException if there was a failure while listing the domains.
     */
    public CompletableFuture<List<DomainInfo>> listAllDomainsAsync() {
        ListDomainNamesRequest namesRequest = ListDomainNamesRequest.builder()
            .engineType("OpenSearch")
            .build();

        return getAsyncClient().listDomainNames(namesRequest)
            .handle((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to list all domains",
exception);
                }
                return response.domainNames();  // Return the list of domain names
on success
            });
    }

    /**
     * Updates the configuration of a specific domain asynchronously.
     * @param domainName the name of the domain to update
     * @return a {@link CompletableFuture} that represents the asynchronous
operation of updating the domain configuration
     */
    public CompletableFuture<UpdateDomainConfigResponse>
updateSpecificDomainAsync(String domainName) {
        ClusterConfig clusterConfig = ClusterConfig.builder()
            .instanceCount(3)
            .build();
```

```
        UpdateDomainConfigRequest updateDomainConfigRequest =
UpdateDomainConfigRequest.builder()
            .domainName(domainName)
            .clusterConfig(clusterConfig)
            .build();

        return getAsyncClient().updateDomainConfig(updateDomainConfigRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to update the domain
configuration", exception);
                }
                // Handle success if needed (e.g., logging or additional actions)
            });
    }

    /**
     * Asynchronously checks the progress of a domain change operation in Amazon
OpenSearch Service.
     * @param domainName the name of the OpenSearch domain to check the progress for
     * @return a {@link CompletableFuture} that completes when the domain change
operation is completed
     */
    public CompletableFuture<Void> domainChangeProgressAsync(String domainName) {
        DescribeDomainChangeProgressRequest request =
DescribeDomainChangeProgressRequest.builder()
            .domainName(domainName)
            .build();

        return CompletableFuture.runAsync(() -> {
            boolean isCompleted = false;
            long startTime = System.currentTimeMillis();

            while (!isCompleted) {
                try {
                    // Handle the async client call using `join` to block
synchronously for the result
                    DescribeDomainChangeProgressResponse response = getAsyncClient()
                        .describeDomainChangeProgress(request)
                        .handle((resp, ex) -> {
                            if (ex != null) {
                                throw new RuntimeException("Failed to check domain
progress", ex);
                            }
```

```
                            return resp;
                        }).join();

                    String state = response.changeProgressStatus().statusAsString();
 // Get the status as string

                    if ("COMPLETED".equals(state)) {
                        logger.info("\nOpenSearch domain status: Completed");
                        isCompleted = true;
                    } else {
                        for (int i = 0; i < 5; i++) {
                            long elapsedTimeInSeconds = (System.currentTimeMillis()
- startTime) / 1000;
                            String formattedTime = String.format("%02d:%02d",
elapsedTimeInSeconds / 60, elapsedTimeInSeconds % 60);
                            System.out.print("\rOpenSearch domain state: " + state +
" | Time Elapsed: " + formattedTime + " ");
                            System.out.flush();
                            Thread.sleep(1_000);
                        }
                    }
                } catch (InterruptedException e) {
                    Thread.currentThread().interrupt();
                    throw new RuntimeException("Thread was interrupted", e);
                }
            }
        });
    }

    /**
     * Asynchronously adds tags to an Amazon OpenSearch Service domain.
     * @param domainARN the Amazon Resource Name (ARN) of the Amazon OpenSearch
Service domain to add tags to
     * @return a {@link CompletableFuture} that completes when the tags have been
successfully added to the domain,
     * or throws a {@link RuntimeException} if the operation fails
     */
    public CompletableFuture<AddTagsResponse> addDomainTagsAsync(String domainARN) {
        Tag tag1 = Tag.builder()
            .key("service")
            .value("OpenSearch")
            .build();

        Tag tag2 = Tag.builder()
```

```
            .key("instances")
            .value("m3.2xlarge")
            .build();

        List<Tag> tagList = new ArrayList<>();
        tagList.add(tag1);
        tagList.add(tag2);

        AddTagsRequest addTagsRequest = AddTagsRequest.builder()
            .arn(domainARN)
            .tagList(tagList)
            .build();

        return getAsyncClient().addTags(addTagsRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to add tags to the domain: "
+ domainARN, exception);
                } else {
                    logger.info("Added Tags");
                }
            });
    }


    /**
     * Asynchronously lists the tags associated with the specified Amazon Resource
Name (ARN).
     * @param arn the Amazon Resource Name (ARN) of the resource for which to list
the tags
     * @return a {@link CompletableFuture} that, when completed, will contain a list
of the tags associated with the
     * specified ARN
     * @throws RuntimeException if there is an error listing the tags
     */
    public CompletableFuture<ListTagsResponse> listDomainTagsAsync(String arn) {
        ListTagsRequest tagsRequest = ListTagsRequest.builder()
            .arn(arn)
            .build();

        return getAsyncClient().listTags(tagsRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
```

```
                    throw new RuntimeException("Failed to list domain tags",
 exception);
                }

                List<Tag> tagList = response.tagList();
                for (Tag tag : tagList) {
                    logger.info("Tag key is " + tag.key());
                    logger.info("Tag value is " + tag.value());
                }
            });
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - AddTags
  - CreateDomain
  - DeleteDomain
  - DescribeDomain
  - DescribeDomainChangeProgress
  - ListDomainNames
  - ListTags
  - UpdateDomainConfig

Acciones

`AddTags`

En el siguiente ejemplo de código, se muestra cómo utilizar `AddTags`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously adds tags to an Amazon OpenSearch Service domain.
     * @param domainARN the Amazon Resource Name (ARN) of the Amazon OpenSearch
Service domain to add tags to
     * @return a {@link CompletableFuture} that completes when the tags have been
successfully added to the domain,
     * or throws a {@link RuntimeException} if the operation fails
     */
    public CompletableFuture<AddTagsResponse> addDomainTagsAsync(String domainARN) {
        Tag tag1 = Tag.builder()
            .key("service")
            .value("OpenSearch")
            .build();

        Tag tag2 = Tag.builder()
            .key("instances")
            .value("m3.2xlarge")
            .build();

        List<Tag> tagList = new ArrayList<>();
        tagList.add(tag1);
        tagList.add(tag2);

        AddTagsRequest addTagsRequest = AddTagsRequest.builder()
            .arn(domainARN)
            .tagList(tagList)
            .build();

        return getAsyncClient().addTags(addTagsRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to add tags to the domain: "
+ domainARN, exception);
                } else {
                    logger.info("Added Tags");
                }
            });
    }
```

- Para obtener más información sobre la API, consulta AddTagsla Referencia AWS SDK for Java 2.x de la API.

`ChangeProgress`

En el siguiente ejemplo de código, se muestra cómo utilizar `ChangeProgress`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously checks the progress of a domain change operation in Amazon
OpenSearch Service.
    * @param domainName the name of the OpenSearch domain to check the progress for
    * @return a {@link CompletableFuture} that completes when the domain change
operation is completed
    */
   public CompletableFuture<Void> domainChangeProgressAsync(String domainName) {
       DescribeDomainChangeProgressRequest request =
DescribeDomainChangeProgressRequest.builder()
           .domainName(domainName)
           .build();

       return CompletableFuture.runAsync(() -> {
           boolean isCompleted = false;
           long startTime = System.currentTimeMillis();

           while (!isCompleted) {
               try {
                   // Handle the async client call using `join` to block
synchronously for the result
                   DescribeDomainChangeProgressResponse response = getAsyncClient()
                       .describeDomainChangeProgress(request)
                       .handle((resp, ex) -> {
                           if (ex != null) {
                               throw new RuntimeException("Failed to check domain
progress", ex);
                           }
                           return resp;
                       }).join();
```

```
                    String state = response.changeProgressStatus().statusAsString();
 // Get the status as string

                    if ("COMPLETED".equals(state)) {
                        logger.info("\nOpenSearch domain status: Completed");
                        isCompleted = true;
                    } else {
                        for (int i = 0; i < 5; i++) {
                            long elapsedTimeInSeconds = (System.currentTimeMillis()
- startTime) / 1000;
                            String formattedTime = String.format("%02d:%02d",
elapsedTimeInSeconds / 60, elapsedTimeInSeconds % 60);
                            System.out.print("\rOpenSearch domain state: " + state +
" | Time Elapsed: " + formattedTime + " ");
                            System.out.flush();
                            Thread.sleep(1_000);
                        }
                    }
                } catch (InterruptedException e) {
                    Thread.currentThread().interrupt();
                    throw new RuntimeException("Thread was interrupted", e);
                }
            }
        });
    }
```

- Para obtener más información sobre la API, consulta ChangeProgressla Referencia AWS SDK for Java 2.x de la API.

`CreateDomain`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDomain`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates a new OpenSearch domain asynchronously.
    * @param domainName the name of the new OpenSearch domain to create
    * @return a {@link CompletableFuture} containing the domain ID of the newly
created domain
    */
   public CompletableFuture<String> createNewDomainAsync(String domainName) {
       ClusterConfig clusterConfig = ClusterConfig.builder()
           .dedicatedMasterEnabled(true)
           .dedicatedMasterCount(3)
           .dedicatedMasterType("t2.small.search")
           .instanceType("t2.small.search")
           .instanceCount(5)
           .build();

       EBSOptions ebsOptions = EBSOptions.builder()
           .ebsEnabled(true)
           .volumeSize(10)
           .volumeType(VolumeType.GP2)
           .build();

       NodeToNodeEncryptionOptions encryptionOptions =
NodeToNodeEncryptionOptions.builder()
           .enabled(true)
           .build();

       CreateDomainRequest domainRequest = CreateDomainRequest.builder()
           .domainName(domainName)
           .engineVersion("OpenSearch_1.0")
           .clusterConfig(clusterConfig)
           .ebsOptions(ebsOptions)
           .nodeToNodeEncryptionOptions(encryptionOptions)
           .build();
       logger.info("Sending domain creation request...");
       return getAsyncClient().createDomain(domainRequest)
               .handle( (createResponse, throwable) -> {
                   if (createResponse != null) {
                       logger.info("Domain status is {}",
createResponse.domainStatus().changeProgressDetails().configChangeStatusAsString());
                       logger.info("Domain Id is {}",
createResponse.domainStatus().domainId());
                       return createResponse.domainStatus().domainId();
                   }
```

```
                    throw new RuntimeException("Failed to create domain",
throwable);
                });
    }
```

- Para obtener más información sobre la API, consulta CreateDomainla Referencia AWS SDK for Java 2.x de la API.

`DeleteDomain`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDomain`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a specific domain asynchronously.
     * @param domainName the name of the domain to be deleted
     * @return a {@link CompletableFuture} that completes when the domain has been
deleted
     * or throws a {@link RuntimeException} if the deletion fails
     */
    public CompletableFuture<DeleteDomainResponse> deleteSpecificDomainAsync(String
domainName) {
        DeleteDomainRequest domainRequest = DeleteDomainRequest.builder()
            .domainName(domainName)
            .build();

        // Delete domain asynchronously
        return getAsyncClient().deleteDomain(domainRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to delete the domain: " +
domainName, exception);
                }
```

```
            });
    }
```

- Para obtener más información sobre la API, consulta DeleteDomainla Referencia AWS SDK for Java 2.x de la API.

`DescribeDomain`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDomain`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Describes the specified domain asynchronously.
     *
     * @param domainName the name of the domain to describe
     * @return a {@link CompletableFuture} that completes with the ARN of the domain
     * @throws RuntimeException if the domain description fails
     */
    public CompletableFuture<String> describeDomainAsync(String domainName) {
        DescribeDomainRequest request = DescribeDomainRequest.builder()
            .domainName(domainName)
            .build();

        return getAsyncClient().describeDomain(request)
            .handle((response, exception) -> {  // Handle both response and
exception
                if (exception != null) {
                    throw new RuntimeException("Failed to describe domain",
exception);
                }
                DomainStatus domainStatus = response.domainStatus();
                String endpoint = domainStatus.endpoint();
                String arn = domainStatus.arn();
```

```
                String engineVersion = domainStatus.engineVersion();
                logger.info("Domain endpoint is: " + endpoint);
                logger.info("ARN: " + arn);
                System.out.println("Engine version: " + engineVersion);

                return arn;  // Return ARN when successful
            });
    }
```

- Para obtener más información sobre la API, consulta DescribeDomainla Referencia AWS SDK for Java 2.x de la API.

`ListDomainNames`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListDomainNames`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously lists all the domains in the current AWS account.
     * @return a {@link CompletableFuture} that, when completed, contains a list of
{@link DomainInfo} objects representing
     *         the domains in the account.
     * @throws RuntimeException if there was a failure while listing the domains.
     */
    public CompletableFuture<List<DomainInfo>> listAllDomainsAsync() {
        ListDomainNamesRequest namesRequest = ListDomainNamesRequest.builder()
            .engineType("OpenSearch")
            .build();

        return getAsyncClient().listDomainNames(namesRequest)
            .handle((response, exception) -> {
                if (exception != null) {
```

```
                    throw new RuntimeException("Failed to list all domains",
exception);
                }
                return response.domainNames();  // Return the list of domain names
on success
            });
    }
```

- Para obtener más información sobre la API, consulta ListDomainNamesla Referencia AWS SDK for Java 2.x de la API.

`ListTags`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListTags`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously adds tags to an Amazon OpenSearch Service domain.
     * @param domainARN the Amazon Resource Name (ARN) of the Amazon OpenSearch
Service domain to add tags to
     * @return a {@link CompletableFuture} that completes when the tags have been
successfully added to the domain,
     * or throws a {@link RuntimeException} if the operation fails
     */
    public CompletableFuture<AddTagsResponse> addDomainTagsAsync(String domainARN) {
        Tag tag1 = Tag.builder()
            .key("service")
            .value("OpenSearch")
            .build();

        Tag tag2 = Tag.builder()
            .key("instances")
            .value("m3.2xlarge")
```

```
            .build();

        List<Tag> tagList = new ArrayList<>();
        tagList.add(tag1);
        tagList.add(tag2);

        AddTagsRequest addTagsRequest = AddTagsRequest.builder()
            .arn(domainARN)
            .tagList(tagList)
            .build();

        return getAsyncClient().addTags(addTagsRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to add tags to the domain: "
+ domainARN, exception);
                } else {
                    logger.info("Added Tags");
                }
            });
    }
```

- Para obtener más información sobre la API, consulta ListTagsla Referencia AWS SDK for Java 2.x de la API.

`UpdateDomainConfig`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateDomainConfig`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Updates the configuration of a specific domain asynchronously.
```

```
    * @param domainName the name of the domain to update
    * @return a {@link CompletableFuture} that represents the asynchronous
operation of updating the domain configuration
    */
   public CompletableFuture<UpdateDomainConfigResponse>
updateSpecificDomainAsync(String domainName) {
       ClusterConfig clusterConfig = ClusterConfig.builder()
           .instanceCount(3)
           .build();

       UpdateDomainConfigRequest updateDomainConfigRequest =
UpdateDomainConfigRequest.builder()
           .domainName(domainName)
           .clusterConfig(clusterConfig)
           .build();

       return getAsyncClient().updateDomainConfig(updateDomainConfigRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   throw new RuntimeException("Failed to update the domain
configuration", exception);
               }
               // Handle success if needed (e.g., logging or additional actions)
           });
   }
```

- Para obtener más información sobre la API, consulta UpdateDomainConfigla Referencia AWS SDK for Java 2.x de la API.

EventBridge ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with EventBridge.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios

Introducción

Hola EventBridge

En el siguiente ejemplo de código se muestra cómo empezar a utilizar EventBridge.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 */
public class HelloEventBridge {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        EventBridgeClient eventBrClient = EventBridgeClient.builder()
                .region(region)
```

```
                .build();

        listBuses(eventBrClient);
        eventBrClient.close();
    }

    public static void listBuses(EventBridgeClient eventBrClient) {
        try {
            ListEventBusesRequest busesRequest = ListEventBusesRequest.builder()
                    .limit(10)
                    .build();

            ListEventBusesResponse response =
 eventBrClient.listEventBuses(busesRequest);
            List<EventBus> buses = response.eventBuses();
            for (EventBus bus : buses) {
                System.out.println("The name of the event bus is: " + bus.name());
                System.out.println("The ARN of the event bus is: " + bus.arn());
            }

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListEventBusesla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crear una regla y agregarle un destino
- Habilitar y deshabilitar reglas.
- Enumerar y actualizar reglas y destinos.
- Enviar eventos y, después, limpiar los recursos

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This Java code example performs the following tasks:
 *
 * This Java V2 example performs the following tasks with Amazon EventBridge:
 *
 * 1. Creates an AWS Identity and Access Management (IAM) role to use with
 * Amazon EventBridge.
 * 2. Amazon Simple Storage Service (Amazon S3) bucket with EventBridge events
 * enabled.
 * 3. Creates a rule that triggers when an object is uploaded to Amazon S3.
 * 4. Lists rules on the event bus.
 * 5. Creates a new Amazon Simple Notification Service (Amazon SNS) topic and
 * lets the user subscribe to it.
 * 6. Adds a target to the rule that sends an email to the specified topic.
 * 7. Creates an EventBridge event that sends an email when an Amazon S3 object
 * is created.
 * 8. Lists Targets.
 * 9. Lists the rules for the same target.
 * 10. Triggers the rule by uploading a file to the Amazon S3 bucket.
 * 11. Disables a specific rule.
 * 12. Checks and print the state of the rule.
 * 13. Adds a transform to the rule to change the text of the email.
 * 14. Enables a specific rule.
 * 15. Triggers the updated rule by uploading a file to the Amazon S3 bucket.
 * 16. Updates the rule to be a custom rule pattern.
 * 17. Sending an event to trigger the rule.
 * 18. Cleans up resources.
```

```
 *
 */
public class EventbridgeMVP {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws InterruptedException, IOException
 {
        final String usage = """

                Usage:
                    <roleName> <bucketName> <topicName> <eventRuleName>

                Where:
                    roleName - The name of the role to create.
                    bucketName - The Amazon Simple Storage Service (Amazon S3)
 bucket name to create.
                    topicName - The name of the Amazon Simple Notification Service
 (Amazon SNS) topic to create.
                    eventRuleName - The Amazon EventBridge rule name to create.
                """;

        if (args.length != 5) {
            System.out.println(usage);
            System.exit(1);
        }

        String polJSON = "{" +
                "\"Version\": \"2012-10-17\"," +
                "\"Statement\": [{" +
                "\"Effect\": \"Allow\"," +
                "\"Principal\": {" +
                "\"Service\": \"events.amazonaws.com\"" +
                "}," +
                "\"Action\": \"sts:AssumeRole\"" +
                "}]" +
                "}";

        Scanner sc = new Scanner(System.in);
        String roleName = args[0];
        String bucketName = args[1];
        String topicName = args[2];
        String eventRuleName = args[3];

        Region region = Region.US_EAST_1;
```

```
        EventBridgeClient eventBrClient = EventBridgeClient.builder()
                .region(region)
                .build();

        S3Client s3Client = S3Client.builder()
                .region(region)
                .build();

        Region regionGl = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(regionGl)
                .build();

        SnsClient snsClient = SnsClient.builder()
                .region(region)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon EventBridge example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out
                .println("1. Create an AWS Identity and Access Management (IAM) role
to use with Amazon EventBridge.");
        String roleArn = createIAMRole(iam, roleName, polJSON);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create an S3 bucket with EventBridge events
enabled.");
        if (checkBucket(s3Client, bucketName)) {
            System.out.println("Bucket " + bucketName + " already exists. Ending
this scenario.");
            System.exit(1);
        }

        createBucket(s3Client, bucketName);
        Thread.sleep(3000);
        setBucketNotification(s3Client, bucketName);
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("3. Create a rule that triggers when an object is
uploaded to Amazon S3.");
        Thread.sleep(10000);
        addEventRule(eventBrClient, roleArn, bucketName, eventRuleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. List rules on the event bus.");
        listRules(eventBrClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Create a new SNS topic for testing and let the user
subscribe to the topic.");
        String topicArn = createSnsTopic(snsClient, topicName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Add a target to the rule that sends an email to the
specified topic.");
        System.out.println("Enter your email to subscribe to the Amazon SNS
topic:");
        String email = sc.nextLine();
        subEmail(snsClient, topicArn, email);
        System.out.println(
                "Use the link in the email you received to confirm your
subscription. Then, press Enter to continue.");
        sc.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Create an EventBridge event that sends an email when
an Amazon S3 object is created.");
        addSnsEventRule(eventBrClient, eventRuleName, topicArn, topicName,
eventRuleName, bucketName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(" 8. List Targets.");
        listTargets(eventBrClient, eventRuleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(" 9. List the rules for the same target.");
```

```
        listTargetRules(eventBrClient, topicArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(" 10. Trigger the rule by uploading a file to the S3
bucket.");
        System.out.println("Press Enter to continue.");
        sc.nextLine();
        uploadTextFiletoS3(s3Client, bucketName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Disable a specific rule.");
        changeRuleState(eventBrClient, eventRuleName, false);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Check and print the state of the rule.");
        checkRule(eventBrClient, eventRuleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("13. Add a transform to the rule to change the text of
the email.");
        updateSnsEventRule(eventBrClient, topicArn, eventRuleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("14. Enable a specific rule.");
        changeRuleState(eventBrClient, eventRuleName, true);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(" 15. Trigger the updated rule by uploading a file to the
S3 bucket.");
        System.out.println("Press Enter to continue.");
        sc.nextLine();
        uploadTextFiletoS3(s3Client, bucketName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(" 16. Update the rule to be a custom rule pattern.");
        updateToCustomRule(eventBrClient, eventRuleName);
```

```
        System.out.println("Updated event rule " + eventRuleName + " to use a custom
pattern.");
        updateCustomRuleTargetWithTransform(eventBrClient, topicArn, eventRuleName);
        System.out.println("Updated event target " + topicArn + ".");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("17. Sending an event to trigger the rule. This will
trigger a subscription email.");
        triggerCustomRule(eventBrClient, email);
        System.out.println("Events have been sent. Press Enter to continue.");
        sc.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("18. Clean up resources.");
        System.out.println("Do you want to clean up resources (y/n)");
        String ans = sc.nextLine();
        if (ans.compareTo("y") == 0) {
            cleanupResources(eventBrClient, snsClient, s3Client, iam, topicArn,
eventRuleName, bucketName, roleName);
        } else {
            System.out.println("The resources will not be cleaned up. ");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The Amazon EventBridge example scenario has successfully
completed.");
        System.out.println(DASHES);
    }

    public static void cleanupResources(EventBridgeClient eventBrClient, SnsClient
snsClient, S3Client s3Client,
            IamClient iam, String topicArn, String eventRuleName, String bucketName,
String roleName) {
        System.out.println("Removing all targets from the event rule.");
        deleteTargetsFromRule(eventBrClient, eventRuleName);
        deleteRuleByName(eventBrClient, eventRuleName);
        deleteSNSTopic(snsClient, topicArn);
        deleteS3Bucket(s3Client, bucketName);
        deleteRole(iam, roleName);
    }
```

```
    public static void deleteRole(IamClient iam, String roleName) {
        String policyArn = "arn:aws:iam::aws:policy/AmazonEventBridgeFullAccess";
        DetachRolePolicyRequest policyRequest = DetachRolePolicyRequest.builder()
                .policyArn(policyArn)
                .roleName(roleName)
                .build();

        iam.detachRolePolicy(policyRequest);
        System.out.println("Successfully detached policy " + policyArn + " from role
" + roleName);

        // Delete the role.
        DeleteRoleRequest roleRequest = DeleteRoleRequest.builder()
                .roleName(roleName)
                .build();

        iam.deleteRole(roleRequest);
        System.out.println("*** Successfully deleted " + roleName);
    }

    public static void deleteS3Bucket(S3Client s3Client, String bucketName) {
        // Remove all the objects from the S3 bucket.
        ListObjectsRequest listObjects = ListObjectsRequest.builder()
                .bucket(bucketName)
                .build();

        ListObjectsResponse res = s3Client.listObjects(listObjects);
        List<S3Object> objects = res.contents();
        ArrayList<ObjectIdentifier> toDelete = new ArrayList<>();

        for (S3Object myValue : objects) {
            toDelete.add(ObjectIdentifier.builder()
                    .key(myValue.key())
                    .build());
        }

        DeleteObjectsRequest dor = DeleteObjectsRequest.builder()
                .bucket(bucketName)
                .delete(Delete.builder()
                        .objects(toDelete).build())
                .build();

        s3Client.deleteObjects(dor);
```

```
        // Delete the S3 bucket.
        DeleteBucketRequest deleteBucketRequest = DeleteBucketRequest.builder()
                .bucket(bucketName)
                .build();

        s3Client.deleteBucket(deleteBucketRequest);
        System.out.println("You have deleted the bucket and the objects");
    }

    // Delete the SNS topic.
    public static void deleteSNSTopic(SnsClient snsClient, String topicArn) {
        try {
            DeleteTopicRequest request = DeleteTopicRequest.builder()
                    .topicArn(topicArn)
                    .build();

            DeleteTopicResponse result = snsClient.deleteTopic(request);
            System.out.println("\n\nStatus was " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteRuleByName(EventBridgeClient eventBrClient, String
ruleName) {
        DeleteRuleRequest ruleRequest = DeleteRuleRequest.builder()
                .name(ruleName)
                .build();

        eventBrClient.deleteRule(ruleRequest);
        System.out.println("Successfully deleted the rule");
    }

    public static void deleteTargetsFromRule(EventBridgeClient eventBrClient, String
eventRuleName) {
        // First, get all targets that will be deleted.
        ListTargetsByRuleRequest request = ListTargetsByRuleRequest.builder()
                .rule(eventRuleName)
                .build();
```

```
        ListTargetsByRuleResponse response =
eventBrClient.listTargetsByRule(request);
        List<Target> allTargets = response.targets();

        // Get all targets and delete them.
        for (Target myTarget : allTargets) {
            RemoveTargetsRequest removeTargetsRequest =
RemoveTargetsRequest.builder()
                    .rule(eventRuleName)
                    .ids(myTarget.id())
                    .build();

            eventBrClient.removeTargets(removeTargetsRequest);
            System.out.println("Successfully removed the target");
        }
    }

    public static void triggerCustomRule(EventBridgeClient eventBrClient, String
email) {
        String json = "{" +
                "\"UserEmail\": \"" + email + "\"," +
                "\"Message\": \"This event was generated by example code.\"," +
                "\"UtcTime\": \"Now.\"" +
                "}";

        PutEventsRequestEntry entry = PutEventsRequestEntry.builder()
                .source("ExampleSource")
                .detail(json)
                .detailType("ExampleType")
                .build();

        PutEventsRequest eventsRequest = PutEventsRequest.builder()
                .entries(entry)
                .build();

        eventBrClient.putEvents(eventsRequest);
    }

    public static void updateCustomRuleTargetWithTransform(EventBridgeClient
eventBrClient, String topicArn,
            String ruleName) {
        String targetId = java.util.UUID.randomUUID().toString();
        InputTransformer inputTransformer = InputTransformer.builder()
                .inputTemplate("\"Notification: sample event was received.\"")
```

```
                .build();

        Target target = Target.builder()
                .id(targetId)
                .arn(topicArn)
                .inputTransformer(inputTransformer)
                .build();

        try {
            PutTargetsRequest targetsRequest = PutTargetsRequest.builder()
                    .rule(ruleName)
                    .targets(target)
                    .eventBusName(null)
                    .build();

            eventBrClient.putTargets(targetsRequest);
        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void updateToCustomRule(EventBridgeClient eventBrClient, String
ruleName) {
        String customEventsPattern = "{" +
                "\"source\": [\"ExampleSource\"]," +
                "\"detail-type\": [\"ExampleType\"]" +
                "}";

        PutRuleRequest request = PutRuleRequest.builder()
                .name(ruleName)
                .description("Custom test rule")
                .eventPattern(customEventsPattern)
                .build();

        eventBrClient.putRule(request);
    }

    // Update an Amazon S3 object created rule with a transform on the target.
    public static void updateSnsEventRule(EventBridgeClient eventBrClient, String
topicArn, String ruleName) {
        String targetId = java.util.UUID.randomUUID().toString();
        Map<String, String> myMap = new HashMap<>();
        myMap.put("bucket", "$.detail.bucket.name");
```

```
        myMap.put("time", "$.time");

        InputTransformer inputTransformer = InputTransformer.builder()
                .inputTemplate("\"Notification: an object was uploaded to bucket
<bucket> at <time>.\"")
                .inputPathsMap(myMap)
                .build();

        Target target = Target.builder()
                .id(targetId)
                .arn(topicArn)
                .inputTransformer(inputTransformer)
                .build();

        try {
            PutTargetsRequest targetsRequest = PutTargetsRequest.builder()
                    .rule(ruleName)
                    .targets(target)
                    .eventBusName(null)
                    .build();

            eventBrClient.putTargets(targetsRequest);

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void checkRule(EventBridgeClient eventBrClient, String
eventRuleName) {
        try {
            DescribeRuleRequest ruleRequest = DescribeRuleRequest.builder()
                    .name(eventRuleName)
                    .build();

            DescribeRuleResponse response = eventBrClient.describeRule(ruleRequest);
            System.out.println("The state of the rule is " +
response.stateAsString());

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }

    public static void changeRuleState(EventBridgeClient eventBrClient, String
eventRuleName, Boolean isEnabled) {
        try {
            if (!isEnabled) {
                System.out.println("Disabling the rule: " + eventRuleName);
                DisableRuleRequest ruleRequest = DisableRuleRequest.builder()
                        .name(eventRuleName)
                        .build();

                eventBrClient.disableRule(ruleRequest);
            } else {
                System.out.println("Enabling the rule: " + eventRuleName);
                EnableRuleRequest ruleRequest = EnableRuleRequest.builder()
                        .name(eventRuleName)
                        .build();
                eventBrClient.enableRule(ruleRequest);
            }

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Create and upload a file to an S3 bucket to trigger an event.
    public static void uploadTextFiletoS3(S3Client s3Client, String bucketName)
throws IOException {
        // Create a unique file name.
        String fileSuffix = new SimpleDateFormat("yyyyMMddHHmmss").format(new
Date());
        String fileName = "TextFile" + fileSuffix + ".txt";

        File myFile = new File(fileName);
        FileWriter fw = new FileWriter(myFile.getAbsoluteFile());
        BufferedWriter bw = new BufferedWriter(fw);
        bw.write("This is a sample file for testing uploads.");
        bw.close();

        try {
            PutObjectRequest putOb = PutObjectRequest.builder()
                    .bucket(bucketName)
                    .key(fileName)
```

```
                    .build();

            s3Client.putObject(putOb, RequestBody.fromFile(myFile));

        } catch (S3Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void listTargetRules(EventBridgeClient eventBrClient, String
topicArn) {
        ListRuleNamesByTargetRequest ruleNamesByTargetRequest =
ListRuleNamesByTargetRequest.builder()
                .targetArn(topicArn)
                .build();

        ListRuleNamesByTargetResponse response =
eventBrClient.listRuleNamesByTarget(ruleNamesByTargetRequest);
        List<String> rules = response.ruleNames();
        for (String rule : rules) {
            System.out.println("The rule name is " + rule);
        }
    }

    public static void listTargets(EventBridgeClient eventBrClient, String ruleName)
{
        ListTargetsByRuleRequest ruleRequest = ListTargetsByRuleRequest.builder()
                .rule(ruleName)
                .build();

        ListTargetsByRuleResponse res =
eventBrClient.listTargetsByRule(ruleRequest);
        List<Target> targetsList = res.targets();
        for (Target target: targetsList) {
            System.out.println("Target ARN: "+target.arn());
        }
    }

    // Add a rule which triggers an SNS target when a file is uploaded to an S3
    // bucket.
    public static void addSnsEventRule(EventBridgeClient eventBrClient, String
ruleName, String topicArn,
            String topicName, String eventRuleName, String bucketName) {
```

```
        String targetID = java.util.UUID.randomUUID().toString();
        Target myTarget = Target.builder()
                .id(targetID)
                .arn(topicArn)
                .build();

        List<Target> targets = new ArrayList<>();
        targets.add(myTarget);
        PutTargetsRequest request = PutTargetsRequest.builder()
                .eventBusName(null)
                .targets(targets)
                .rule(ruleName)
                .build();

        eventBrClient.putTargets(request);
        System.out.println("Added event rule " + eventRuleName + " with Amazon SNS
 target " + topicName + " for bucket "
                + bucketName + ".");
    }

    public static void subEmail(SnsClient snsClient, String topicArn, String email)
 {
        try {
            SubscribeRequest request = SubscribeRequest.builder()
                    .protocol("email")
                    .endpoint(email)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

            SubscribeResponse result = snsClient.subscribe(request);
            System.out.println("Subscription ARN: " + result.subscriptionArn() + "\n
\n Status is "
                    + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void listRules(EventBridgeClient eventBrClient) {
        try {
            ListRulesRequest rulesRequest = ListRulesRequest.builder()
```

```
                    .eventBusName("default")
                    .limit(10)
                    .build();

            ListRulesResponse response = eventBrClient.listRules(rulesRequest);
            List<Rule> rules = response.rules();
            for (Rule rule : rules) {
                System.out.println("The rule name is : " + rule.name());
                System.out.println("The rule description is : " +
rule.description());
                System.out.println("The rule state is : " + rule.stateAsString());
            }

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static String createSnsTopic(SnsClient snsClient, String topicName) {
        String topicPolicy = "{" +
                "\"Version\": \"2012-10-17\"," +
                "\"Statement\": [{" +
                "\"Sid\": \"EventBridgePublishTopic\"," +
                "\"Effect\": \"Allow\"," +
                "\"Principal\": {" +
                "\"Service\": \"events.amazonaws.com\"" +
                "}," +
                "\"Resource\": \"*\"," +
                "\"Action\": \"sns:Publish\"" +
                "}]" +
                "}";

        Map<String, String> topicAttributes = new HashMap<>();
        topicAttributes.put("Policy", topicPolicy);
        CreateTopicRequest topicRequest = CreateTopicRequest.builder()
                .name(topicName)
                .attributes(topicAttributes)
                .build();

        CreateTopicResponse response = snsClient.createTopic(topicRequest);
        System.out.println("Added topic " + topicName + " for email
subscriptions.");
        return response.topicArn();
```

```
    }

    // Create a new event rule that triggers when an Amazon S3 object is created in
    // a bucket.
    public static void addEventRule(EventBridgeClient eventBrClient, String roleArn,
String bucketName,
            String eventRuleName) {
        String pattern = "{\n" +
                "  \"source\": [\"aws.s3\"],\n" +
                "  \"detail-type\": [\"Object Created\"],\n" +
                "  \"detail\": {\n" +
                "    \"bucket\": {\n" +
                "      \"name\": [\"" + bucketName + "\"]\n" +
                "    }\n" +
                "  }\n" +
                "}";

        try {
            PutRuleRequest ruleRequest = PutRuleRequest.builder()
                    .description("Created by using the AWS SDK for Java v2")
                    .name(eventRuleName)
                    .eventPattern(pattern)
                    .roleArn(roleArn)
                    .build();

            PutRuleResponse ruleResponse = eventBrClient.putRule(ruleRequest);
            System.out.println("The ARN of the new rule is " +
ruleResponse.ruleArn());

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Determine if the S3 bucket exists.
    public static Boolean checkBucket(S3Client s3Client, String bucketName) {
        try {
            HeadBucketRequest headBucketRequest = HeadBucketRequest.builder()
                    .bucket(bucketName)
                    .build();

            s3Client.headBucket(headBucketRequest);
            return true;
```

```
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        return false;
    }

    // Set the S3 bucket notification configuration.
    public static void setBucketNotification(S3Client s3Client, String bucketName) {
        try {
            EventBridgeConfiguration eventBridgeConfiguration =
EventBridgeConfiguration.builder()
                    .build();

            NotificationConfiguration configuration =
NotificationConfiguration.builder()
                    .eventBridgeConfiguration(eventBridgeConfiguration)
                    .build();

            PutBucketNotificationConfigurationRequest configurationRequest =
PutBucketNotificationConfigurationRequest
                    .builder()
                    .bucket(bucketName)
                    .notificationConfiguration(configuration)
                    .skipDestinationValidation(true)
                    .build();

            s3Client.putBucketNotificationConfiguration(configurationRequest);
            System.out.println("Added bucket " + bucketName + " with EventBridge
events enabled.");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void createBucket(S3Client s3Client, String bucketName) {
        try {
            S3Waiter s3Waiter = s3Client.waiter();
            CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
                    .bucket(bucketName)
                    .build();

            s3Client.createBucket(bucketRequest);
```

```
            HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
                    .bucket(bucketName)
                    .build();

            // Wait until the bucket is created and print out the response.
            WaiterResponse<HeadBucketResponse> waiterResponse =
 s3Waiter.waitUntilBucketExists(bucketRequestWait);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println(bucketName + " is ready");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static String createIAMRole(IamClient iam, String rolename, String
 polJSON) {
        try {
            CreateRoleRequest request = CreateRoleRequest.builder()
                    .roleName(rolename)
                    .assumeRolePolicyDocument(polJSON)
                    .description("Created using the AWS SDK for Java")
                    .build();

            CreateRoleResponse response = iam.createRole(request);
            AttachRolePolicyRequest rolePolicyRequest =
 AttachRolePolicyRequest.builder()
                    .roleName(rolename)
                    .policyArn("arn:aws:iam::aws:policy/
AmazonEventBridgeFullAccess")
                    .build();

            iam.attachRolePolicy(rolePolicyRequest);
            return response.role().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - DeleteRule
  - DescribeRule
  - DisableRule
  - EnableRule
  - ListRuleNamesByTarget
  - ListRules
  - ListTargetsByRule
  - PutEvents
  - PutRule
  - PutTargets

Acciones

`DeleteRule`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteRule`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void deleteRuleByName(EventBridgeClient eventBrClient, String
ruleName) {
       DeleteRuleRequest ruleRequest = DeleteRuleRequest.builder()
               .name(ruleName)
               .build();

       eventBrClient.deleteRule(ruleRequest);
```

```
        System.out.println("Successfully deleted the rule");
    }
```

- Para obtener más información sobre la API, consulta DeleteRulela Referencia AWS SDK for Java 2.x de la API.

`DescribeRule`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeRule`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void checkRule(EventBridgeClient eventBrClient, String
eventRuleName) {
       try {
           DescribeRuleRequest ruleRequest = DescribeRuleRequest.builder()
                   .name(eventRuleName)
                   .build();

           DescribeRuleResponse response = eventBrClient.describeRule(ruleRequest);
           System.out.println("The state of the rule is " +
response.stateAsString());

       } catch (EventBridgeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta DescribeRulela Referencia AWS SDK for Java 2.x de la API.

`DisableRule`

En el siguiente ejemplo de código, se muestra cómo utilizar `DisableRule`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Deshabilitar una regla por su nombre de regla.

```
   public static void changeRuleState(EventBridgeClient eventBrClient, String
eventRuleName, Boolean isEnabled) {
       try {
           if (!isEnabled) {
               System.out.println("Disabling the rule: " + eventRuleName);
               DisableRuleRequest ruleRequest = DisableRuleRequest.builder()
                       .name(eventRuleName)
                       .build();

               eventBrClient.disableRule(ruleRequest);
           } else {
               System.out.println("Enabling the rule: " + eventRuleName);
               EnableRuleRequest ruleRequest = EnableRuleRequest.builder()
                       .name(eventRuleName)
                       .build();
               eventBrClient.enableRule(ruleRequest);
           }

       } catch (EventBridgeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta DisableRulela Referencia AWS SDK for Java 2.x de la API.

`EnableRule`

En el siguiente ejemplo de código, se muestra cómo utilizar `EnableRule`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Habilitar una regla por su nombre de regla.

```
   public static void changeRuleState(EventBridgeClient eventBrClient, String
eventRuleName, Boolean isEnabled) {
       try {
           if (!isEnabled) {
               System.out.println("Disabling the rule: " + eventRuleName);
               DisableRuleRequest ruleRequest = DisableRuleRequest.builder()
                       .name(eventRuleName)
                       .build();

               eventBrClient.disableRule(ruleRequest);
           } else {
               System.out.println("Enabling the rule: " + eventRuleName);
               EnableRuleRequest ruleRequest = EnableRuleRequest.builder()
                       .name(eventRuleName)
                       .build();
               eventBrClient.enableRule(ruleRequest);
           }

       } catch (EventBridgeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta EnableRulela Referencia AWS SDK for Java 2.x de la API.

`ListRuleNamesByTarget`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListRuleNamesByTarget`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Enumerar todos los nombres de regla por el destino.

```
   public static void listTargetRules(EventBridgeClient eventBrClient, String
topicArn) {
       ListRuleNamesByTargetRequest ruleNamesByTargetRequest =
ListRuleNamesByTargetRequest.builder()
               .targetArn(topicArn)
               .build();

       ListRuleNamesByTargetResponse response =
eventBrClient.listRuleNamesByTarget(ruleNamesByTargetRequest);
       List<String> rules = response.ruleNames();
       for (String rule : rules) {
           System.out.println("The rule name is " + rule);
       }
   }
```

- Para obtener más información sobre la API, consulta ListRuleNamesByTargetla Referencia AWS SDK for Java 2.x de la API.

`ListRules`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListRules`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Habilitar una regla por su nombre de regla.

```
    public static void listRules(EventBridgeClient eventBrClient) {
        try {
            ListRulesRequest rulesRequest = ListRulesRequest.builder()
                    .eventBusName("default")
                    .limit(10)
                    .build();

            ListRulesResponse response = eventBrClient.listRules(rulesRequest);
            List<Rule> rules = response.rules();
            for (Rule rule : rules) {
                System.out.println("The rule name is : " + rule.name());
                System.out.println("The rule description is : " +
rule.description());
                System.out.println("The rule state is : " + rule.stateAsString());
            }

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta ListRulesla Referencia AWS SDK for Java 2.x de la API.

`ListTargetsByRule`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListTargetsByRule`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Enumerar todos los destinos para una regla por el nombre de regla.

```
   public static void listTargets(EventBridgeClient eventBrClient, String ruleName)
{
       ListTargetsByRuleRequest ruleRequest = ListTargetsByRuleRequest.builder()
               .rule(ruleName)
               .build();

       ListTargetsByRuleResponse res =
eventBrClient.listTargetsByRule(ruleRequest);
       List<Target> targetsList = res.targets();
       for (Target target: targetsList) {
           System.out.println("Target ARN: "+target.arn());
       }
   }
```

- Para obtener más información sobre la API, consulta ListTargetsByRulela Referencia AWS SDK for Java 2.x de la API.

`PutEvents`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutEvents`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void triggerCustomRule(EventBridgeClient eventBrClient, String
email) {
       String json = "{" +
               "\"UserEmail\": \"" + email + "\"," +
               "\"Message\": \"This event was generated by example code.\"," +
               "\"UtcTime\": \"Now.\"" +
               "}";

       PutEventsRequestEntry entry = PutEventsRequestEntry.builder()
               .source("ExampleSource")
               .detail(json)
               .detailType("ExampleType")
               .build();

       PutEventsRequest eventsRequest = PutEventsRequest.builder()
               .entries(entry)
               .build();

       eventBrClient.putEvents(eventsRequest);
   }
```

- Para obtener más información sobre la API, consulta PutEventsla Referencia AWS SDK for Java 2.x de la API.

`PutRule`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutRule`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Crear una regla programada.

```
   public static void createEBRule(EventBridgeClient eventBrClient, String
ruleName, String cronExpression) {
```

```
        try {
            PutRuleRequest ruleRequest = PutRuleRequest.builder()
                    .name(ruleName)
                    .eventBusName("default")
                    .scheduleExpression(cronExpression)
                    .state("ENABLED")
                    .description("A test rule that runs on a schedule created by the
Java API")
                    .build();

            PutRuleResponse ruleResponse = eventBrClient.putRule(ruleRequest);
            System.out.println("The ARN of the new rule is " +
ruleResponse.ruleArn());

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Crear una regla que se active cuando se agregue un objeto a un bucket de Amazon Simple Storage Service.

```
    // Create a new event rule that triggers when an Amazon S3 object is created in
    // a bucket.
    public static void addEventRule(EventBridgeClient eventBrClient, String roleArn,
String bucketName,
            String eventRuleName) {
        String pattern = "{\n" +
                "  \"source\": [\"aws.s3\"],\n" +
                "  \"detail-type\": [\"Object Created\"],\n" +
                "  \"detail\": {\n" +
                "    \"bucket\": {\n" +
                "      \"name\": [\"" + bucketName + "\"]\n" +
                "    }\n" +
                "  }\n" +
                "}";

        try {
            PutRuleRequest ruleRequest = PutRuleRequest.builder()
                    .description("Created by using the AWS SDK for Java v2")
                    .name(eventRuleName)
```

```
                    .eventPattern(pattern)
                    .roleArn(roleArn)
                    .build();

            PutRuleResponse ruleResponse = eventBrClient.putRule(ruleRequest);
            System.out.println("The ARN of the new rule is " +
ruleResponse.ruleArn());

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta PutRulela Referencia AWS SDK for Java 2.x de la API.

`PutTargets`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutTargets`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Agregue un tema de Amazon SNS como destino de una regla.

```
    // Add a rule which triggers an SNS target when a file is uploaded to an S3
    // bucket.
    public static void addSnsEventRule(EventBridgeClient eventBrClient, String
ruleName, String topicArn,
            String topicName, String eventRuleName, String bucketName) {
        String targetID = java.util.UUID.randomUUID().toString();
        Target myTarget = Target.builder()
                .id(targetID)
                .arn(topicArn)
                .build();
```

```
        List<Target> targets = new ArrayList<>();
        targets.add(myTarget);
        PutTargetsRequest request = PutTargetsRequest.builder()
                .eventBusName(null)
                .targets(targets)
                .rule(ruleName)
                .build();

        eventBrClient.putTargets(request);
        System.out.println("Added event rule " + eventRuleName + " with Amazon SNS
target " + topicName + " for bucket "
                + bucketName + ".");
    }
```

Agregue un transformador de entrada al destino de una regla.

```
    public static void updateCustomRuleTargetWithTransform(EventBridgeClient
eventBrClient, String topicArn,
            String ruleName) {
        String targetId = java.util.UUID.randomUUID().toString();
        InputTransformer inputTransformer = InputTransformer.builder()
                .inputTemplate("\"Notification: sample event was received.\"")
                .build();

        Target target = Target.builder()
                .id(targetId)
                .arn(topicArn)
                .inputTransformer(inputTransformer)
                .build();

        try {
            PutTargetsRequest targetsRequest = PutTargetsRequest.builder()
                    .rule(ruleName)
                    .targets(target)
                    .eventBusName(null)
                    .build();

            eventBrClient.putTargets(targetsRequest);
        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
    }
```

- Para obtener más información sobre la API, consulta PutTargetsla Referencia AWS SDK for Java 2.x de la API.

`RemoveTargets`

En el siguiente ejemplo de código, se muestra cómo utilizar `RemoveTargets`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Eliminar todos los destinos de una regla por el nombre de regla.

```
   public static void deleteTargetsFromRule(EventBridgeClient eventBrClient, String
eventRuleName) {
       // First, get all targets that will be deleted.
       ListTargetsByRuleRequest request = ListTargetsByRuleRequest.builder()
               .rule(eventRuleName)
               .build();

       ListTargetsByRuleResponse response =
eventBrClient.listTargetsByRule(request);
       List<Target> allTargets = response.targets();

       // Get all targets and delete them.
       for (Target myTarget : allTargets) {
           RemoveTargetsRequest removeTargetsRequest =
RemoveTargetsRequest.builder()
                   .rule(eventRuleName)
                   .ids(myTarget.id())
                   .build();

           eventBrClient.removeTargets(removeTargetsRequest);
           System.out.println("Successfully removed the target");
```

```
        }
    }
```

- Para obtener más información sobre la API, consulta RemoveTargetsla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Envía notificaciones de eventos a EventBridge

El siguiente ejemplo de código muestra cómo habilitar un bucket para enviar notificaciones de eventos de S3 EventBridge y enrutar las notificaciones a un tema de Amazon SNS y a una cola de Amazon SQS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /** This method configures a bucket to send events to AWS EventBridge and
creates a rule
    * to route the S3 object created events to a topic and a queue.
    *
    * @param bucketName Name of existing bucket
    * @param topicArn ARN of existing topic to receive S3 event notifications
    * @param queueArn ARN of existing queue to receive S3 event notifications
    *
    *  An AWS CloudFormation stack sets up the bucket, queue, topic before the
method runs.
    */
   public static String setBucketNotificationToEventBridge(String bucketName,
String topicArn, String queueArn) {
       try {
           // Enable bucket to emit S3 Event notifications to EventBridge.
           s3Client.putBucketNotificationConfiguration(b -> b
                   .bucket(bucketName)
                   .notificationConfiguration(b1 -> b1
```

```
                        .eventBridgeConfiguration(
                                SdkBuilder::build)
                ).build()).join();

        // Create an EventBridge rule to route Object Created notifications.
        PutRuleRequest putRuleRequest = PutRuleRequest.builder()
                .name(RULE_NAME)
                .eventPattern("""
                        {
                          "source": ["aws.s3"],
                          "detail-type": ["Object Created"],
                          "detail": {
                            "bucket": {
                              "name": ["%s"]
                            }
                          }
                        }
                        """.formatted(bucketName))
                .build();

        // Add the rule to the default event bus.
        PutRuleResponse putRuleResponse =
eventBridgeClient.putRule(putRuleRequest)
                .whenComplete((r, t) -> {
                    if (t != null) {
                        logger.error("Error creating event bus rule: " +
t.getMessage(), t);
                        throw new RuntimeException(t.getCause().getMessage(),
t);
                    }
                    logger.info("Event bus rule creation request sent
successfully. ARN is: {}", r.ruleArn());
                }).join();

        // Add the existing SNS topic and SQS queue as targets to the rule.
        eventBridgeClient.putTargets(b -> b
                .eventBusName("default")
                .rule(RULE_NAME)
                .targets(List.of (
                        Target.builder()
                                .arn(queueArn)
                                .id("Queue")
                                .build(),
                        Target.builder()
```

```
                                .arn(topicArn)
                                .id("Topic")
                                .build())
                        )
                ).join();
            return putRuleResponse.ruleArn();
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - PutBucketNotificationConfiguration
  - PutRule
  - PutTargets

Uso de eventos programados para invocar una función de Lambda

El siguiente ejemplo de código muestra cómo crear una AWS Lambda función invocada por un evento EventBridge programado de Amazon.

SDK para Java 2.x

Muestra cómo crear un evento EventBridge programado de Amazon que invoque una AWS Lambda función. Configure EventBridge para usar una expresión cron para programar cuándo se invoca la función Lambda. En este ejemplo, creará una función de Lambda utilizando la API de tiempo de ejecución de Java de Lambda. En este ejemplo, se invocan diferentes AWS servicios para realizar un caso de uso específico. Este ejemplo indica cómo crear una aplicación que envíe un mensaje de texto a sus empleados para felicitarles por su primer aniversario.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- CloudWatch Registros
- DynamoDB

- EventBridge
- Lambda
- Amazon SNS

EventBridge Ejemplos de planificadores que utilizan SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso de AWS SDK for Java 2.x with EventBridge Scheduler.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Acciones
- Escenarios

Introducción

Hola, Scheduler EventBridge

El siguiente ejemplo de código muestra cómo empezar a usar EventBridge Scheduler.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.scheduler.SchedulerAsyncClient;
import software.amazon.awssdk.services.scheduler.model.ListSchedulesRequest;
import software.amazon.awssdk.services.scheduler.model.ScheduleSummary;
import software.amazon.awssdk.services.scheduler.paginators.ListSchedulesPublisher;
import java.util.ArrayList;
import java.util.List;
import java.util.concurrent.CompletableFuture;

public class HelloScheduler {

    public static void main(String [] args) {
        listSchedulesAsync();
    }

    /**
     * Lists all the schedules available.
     * <p>
     * This method uses the {@link SchedulerAsyncClient} to make an asynchronous
 request to
     * list all the schedules available. The method uses the {@link
 ListSchedulesPublisher}
     * to fetch the schedules in a paginated manner, and then processes the
 responses
     * asynchronously.
     */
    public static void listSchedulesAsync() {
        SchedulerAsyncClient schedulerAsyncClient = SchedulerAsyncClient.create();

        // Build the request to list schedules
        ListSchedulesRequest listSchedulesRequest =
 ListSchedulesRequest.builder().build();

        // Use the paginator to fetch all schedules asynchronously.
        ListSchedulesPublisher paginator =
 schedulerAsyncClient.listSchedulesPaginator(listSchedulesRequest);
        List<ScheduleSummary> results = new ArrayList<>();

        // Subscribe to the paginator to process the response asynchronously
        CompletableFuture<Void> future = paginator.subscribe(response -> {
            response.schedules().forEach(schedule -> {
                results.add(schedule);
                System.out.printf("Schedule: %s%n", schedule.name());
            });
```

```
        });

        // Wait for the asynchronous operation to complete.
        future.join();

        // After all schedules are fetched, print the total count.
        System.out.printf("Total of %d schedule(s) available.%n", results.size());
    }
}
```

- Para obtener más información sobre la API, consulta ListSchedulesla Referencia AWS SDK for Java 2.x de la API.

Acciones

`CreateSchedule`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateSchedule`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new schedule for a target task.
     *
     * @param name                  the name of the schedule
     * @param scheduleExpression    The schedule expression that defines when the
 schedule should run.
     * @param scheduleGroupName     the name of the schedule group to which the
 schedule belongs
     * @param targetArn             the Amazon Resource Name (ARN) of the target
 task
     * @param roleArn               the ARN of the IAM role to be used for the
 schedule
```

```
    * @param input                 the input data for the target task
    * @param deleteAfterCompletion whether to delete the schedule after it's
executed
    * @param useFlexibleTimeWindow whether to use a flexible time window for the
schedule execution
    * @return true if the schedule was successfully created, false otherwise
    */
   public CompletableFuture<Boolean> createScheduleAsync(
       String name,
       String scheduleExpression,
       String scheduleGroupName,
       String targetArn,
       String roleArn,
       String input,
       boolean deleteAfterCompletion,
       boolean useFlexibleTimeWindow) {

       int hoursToRun = 1;
       int flexibleTimeWindowMinutes = 10;

       Target target = Target.builder()
           .arn(targetArn)
           .roleArn(roleArn)
           .input(input)
           .build();

       FlexibleTimeWindow flexibleTimeWindow = FlexibleTimeWindow.builder()
           .mode(useFlexibleTimeWindow
               ? FlexibleTimeWindowMode.FLEXIBLE
               : FlexibleTimeWindowMode.OFF)
           .maximumWindowInMinutes(useFlexibleTimeWindow
               ? flexibleTimeWindowMinutes
               : null)
           .build();

       Instant startDate = Instant.now();
       Instant endDate = startDate.plus(Duration.ofHours(hoursToRun));

       CreateScheduleRequest request = CreateScheduleRequest.builder()
           .name(name)
           .scheduleExpression(scheduleExpression)
           .groupName(scheduleGroupName)
           .target(target)
           .actionAfterCompletion(deleteAfterCompletion
```

```
                ? ActionAfterCompletion.DELETE
                : ActionAfterCompletion.NONE)
            .startDate(startDate)
            .endDate(endDate)
            .flexibleTimeWindow(flexibleTimeWindow)
            .build();

        return getAsyncClient().createSchedule(request)
            .thenApply(response -> {
                logger.info("Successfully created schedule {} in schedule group {},
The ARN is {} ", name, scheduleGroupName, response.scheduleArn());
                return true;
            })
            .whenComplete((result, ex) -> {
                if (ex != null) {
                    if (ex instanceof ConflictException) {
                        // Handle ConflictException
                        logger.error("A conflict exception occurred while creating
the schedule: {}", ex.getMessage());
                        throw new CompletionException("A conflict exception occurred
while creating the schedule: " + ex.getMessage(), ex);
                    } else {
                        throw new CompletionException("Error creating schedule: " +
ex.getMessage(), ex);
                    }
                }
            });
    }
```

- Para obtener más información sobre la API, consulta CreateSchedulela Referencia AWS SDK for Java 2.x de la API.

`CreateScheduleGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateScheduleGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates a new schedule group.
    *
    * @param name the name of the schedule group to be created
    * @return a {@link CompletableFuture} representing the asynchronous operation
of creating the schedule group
    */
   public CompletableFuture<CreateScheduleGroupResponse> createScheduleGroup(String
name) {
       CreateScheduleGroupRequest request = CreateScheduleGroupRequest.builder()
           .name(name)
           .build();

       logger.info("Initiating createScheduleGroup call for group: {}", name);
       CompletableFuture<CreateScheduleGroupResponse> futureResponse =
getAsyncClient().createScheduleGroup(request);
       futureResponse.whenComplete((response, ex) -> {
           if (ex != null) {
               if (ex instanceof CompletionException && ex.getCause() instanceof
ConflictException) {
                   // Rethrow the ConflictException
                   throw (ConflictException) ex.getCause();
               } else {
                   throw new CompletionException("Failed to create schedule group:
" + name, ex);
               }
           } else if (response == null) {
               throw new RuntimeException("Failed to create schedule group:
response was null");
           } else {
               logger.info("Successfully created schedule group '{}': {}", name,
response.scheduleGroupArn());
           }
```

```
        });

        return futureResponse;
    }
```

- Para obtener más información sobre la API, consulta CreateScheduleGroupla Referencia AWS SDK for Java 2.x de la API.

`DeleteSchedule`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteSchedule`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a schedule with the specified name and group name.
     *
     * @param name      the name of the schedule to be deleted
     * @param groupName the group name of the schedule to be deleted
     * @return a {@link CompletableFuture} that, when completed, indicates whether
the schedule was successfully deleted
     * @throws CompletionException if an error occurs while deleting the schedule,
except for the case where the schedule is not found
     */
    public CompletableFuture<Boolean> deleteScheduleAsync(String name, String
groupName) {
        DeleteScheduleRequest request = DeleteScheduleRequest.builder()
            .name(name)
            .groupName(groupName)
            .build();

        CompletableFuture<DeleteScheduleResponse> response =
getAsyncClient().deleteSchedule(request);
```

```
        return response.handle((result, ex) -> {
            if (ex != null) {
                if (ex instanceof ResourceNotFoundException) {
                    throw new CompletionException("Resource not found while deleting
schedule with ID: " + name, ex);
                } else {
                    throw new CompletionException("Failed to delete schedule.", ex);
                }
            }
            logger.info("Successfully deleted schedule with name {}.", name);
            return true;
        });
    }
```

- Para obtener más información sobre la API, consulta DeleteSchedulela Referencia AWS SDK for Java 2.x de la API.

`DeleteScheduleGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteScheduleGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes the specified schedule group.
     *
     * @param name the name of the schedule group to delete
     * @return a {@link CompletableFuture} that completes when the schedule group
has been deleted
     * @throws CompletionException if an error occurs while deleting the schedule
group
     */
    public CompletableFuture<Void> deleteScheduleGroupAsync(String name) {
```

```
        DeleteScheduleGroupRequest request = DeleteScheduleGroupRequest.builder()
            .name(name)
            .build();

        return getAsyncClient().deleteScheduleGroup(request)
            .thenRun(() -> {
                logger.info("Successfully deleted schedule group {}", name);
            })
            .whenComplete((result, ex) -> {
                if (ex != null) {
                    if (ex instanceof ResourceNotFoundException) {
                        throw new CompletionException("The resource was not found: "
+ ex.getMessage(), ex);
                    } else {
                        throw new CompletionException("Error deleting schedule
group: " + ex.getMessage(), ex);
                    }
                }
            });
    }
```

- Para obtener más información sobre la API, consulta DeleteScheduleGroupla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Eventos programados

En el siguiente ejemplo de código, se muestra cómo:

- Implemente una CloudFormation pila con los recursos necesarios.
- Cree un grupo de EventBridge horarios de Scheduler.
- Cree un cronograma de EventBridge programación único con una ventana de tiempo flexible.
- Cree un horario de EventBridge Scheduler recurrente con una tarifa específica.
- Elimine EventBridge Scheduler, el horario y el grupo de horarios.
- Limpiar los recursos y eliminar la pila.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecutar el escenario.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.scheduler.model.SchedulerException;
import javax.mail.internet.AddressException;
import javax.mail.internet.InternetAddress;
import java.time.LocalDateTime;
import java.time.format.DateTimeFormatter;
import java.util.Map;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;

/**
 * This Java code example performs the following tasks for the Amazon EventBridge
 Scheduler workflow:
 * <p>
 * 1. Prepare the Application:
 * - Prompt the user for an email address to use for the subscription for the SNS
 topic subscription.
 * - Deploy the Cloud Formation template in resources/cfn_template.yaml for resource
 creation.
 * - Store the outputs of the stack into variables for use in the workflow.
 * - Create a schedule group for all workflow schedules.
 * <p>
 * 2. Create one-time Schedule:
 * - Create a one-time schedule to send an initial event.
 * - Use a Flexible Time Window and set the schedule to delete after completion.
 * - Wait for the user to receive the event email from SNS.
 * <p>
 * 3. Create a time-based schedule:
 * - Prompt the user for how many X times per Y hours a recurring event should be
 scheduled.
 * - Create the scheduled event for X times per hour for Y hours.
```

```
 * - Wait for the user to receive the event email from SNS.
 * - Delete the schedule when the user is finished.
 * <p>
 * 4. Clean up:
 * - Prompt the user for y/n answer if they want to destroy the stack and clean up
 all resources.
 * - Delete the schedule group.
 * - Destroy the Cloud Formation stack and wait until the stack has been removed.
 */

public class EventbridgeSchedulerScenario {

    private static final Logger logger =
 LoggerFactory.getLogger(EventbridgeSchedulerScenario.class);
    private static final Scanner scanner = new Scanner(System.in);
    private static String STACK_NAME = "workflow-stack-name";
    private static final String scheduleGroupName = "schedules-group";

    private static String recurringScheduleName = "";

    private static String oneTimeScheduleName = "";

    private static final EventbridgeSchedulerActions eventbridgeActions = new
 EventbridgeSchedulerActions();

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static String roleArn = "";
    public static String snsTopicArn = "";

    public static void main(String[] args) {
        logger.info(DASHES);
        logger.info("Welcome to the Amazon EventBridge Scheduler Workflow.");
        logger.info("""
            Amazon EventBridge Scheduler is a fully managed service that helps you
 schedule and execute
            a wide range of tasks and events in the cloud. It's designed to simplify
 the process of
            scheduling and managing recurring or one-time events, making it easier
 for developers and
            businesses to automate various workflows and processes.

            One of the key features of Amazon EventBridge Scheduler is its ability
 to schedule events
```

```
            based on a variety of triggers, including time-based schedules, custom
event patterns, or
            even integration with other AWS services. For example, you can use
EventBridge Scheduler
            to schedule a report generation task to run every weekday at 9 AM, or to
trigger a
            Lambda function when a specific Amazon S3 object is created.

            This flexibility allows you to build complex and dynamic event-driven
architectures
            that adapt to your business needs.

            Lets get started...
            """);
        waitForInputToContinue();
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("1. Prepare the application.");
        waitForInputToContinue();
        try {
            boolean prepareSuccess = prepareApplication();
            logger.info(DASHES);

            if (prepareSuccess) {
                logger.info("2. Create one-time schedule.");
                logger.info("""
                    A one-time schedule in Amazon EventBridge Scheduler is an event
trigger that allows
                    you to schedule a one-time event to run at a specific date and
time. This is useful for
                    executing a specific task or workflow at a predetermined time,
without the need for recurring
                    or complex scheduling.
                    """);
                waitForInputToContinue();
                createOneTimeSchedule();
                logger.info("Do you want to delete the schedule {} (y/n) ?",
oneTimeScheduleName);
                String ans = scanner.nextLine().trim();
                if (ans.equalsIgnoreCase("y")) {

eventbridgeActions.deleteScheduleAsync(oneTimeScheduleName,scheduleGroupName);
                }
```

```
                logger.info(DASHES);

                logger.info("3. Create a recurring schedule.");
                logger.info("""
                    A recurring schedule is a feature that allows you to schedule
and manage the execution
                    of your serverless applications or workloads on a recurring
basis. For example,
                    with EventBridge Scheduler, you can create custom schedules for
your AWS Lambda functions,
                    AWS Step Functions, and other supported event sources, enabling
you to automate tasks and
                    workflows without the need for complex infrastructure
management.
                    """);
                waitForInputToContinue();
                createRecurringSchedule();
                logger.info("Do you want to delete the schedule {} (y/n) ?",
oneTimeScheduleName);
                String ans2 = scanner.nextLine().trim();
                if (ans2.equalsIgnoreCase("y")) {

eventbridgeActions.deleteScheduleAsync(recurringScheduleName,scheduleGroupName);
                }
                logger.info(DASHES);
            }
        } catch (Exception ex) {
            logger.info("There was a problem with the workflow {}, initiating
cleanup...", ex.getMessage());
            cleanUp();
        }

        logger.info(DASHES);
        logger.info("4. Clean up the resources.");
        logger.info("Do you want to delete these AWS resources (y/n) ?");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            cleanUp();
        } else {
            logger.info("The AWS resources will not be deleted.");
        }
        logger.info("Amazon EventBridge Scheduler workflow completed.");
        logger.info(DASHES);
    }
```

```
   /**
    * Cleans up the resources associated with the EventBridge scheduler.
    * If any errors occur during the cleanup process, the corresponding error
messages are logged.
    */
   public static void cleanUp() {
       logger.info("First, delete the schedule group.");
       logger.info("When the schedule group is deleted, schedules that are part of
that group are deleted.");
       waitForInputToContinue();
       try {
           eventbridgeActions.deleteScheduleGroupAsync(scheduleGroupName).join();

       } catch (CompletionException ce) {
           Throwable cause = ce.getCause();
           if (cause instanceof SchedulerException schedulerException) {
               logger.error("Scheduler error occurred: Error message: {}, Error
code {}",
                   schedulerException.getMessage(),
schedulerException.awsErrorDetails().errorCode(), schedulerException);
           } else {
               logger.error("An unexpected error occurred: {}",
cause.getMessage());
           }
           return;
       }

       logger.info("Destroy the CloudFormation stack");
       waitForInputToContinue();
       CloudFormationHelper.destroyCloudFormationStack(STACK_NAME);
   }

   /**
    * Prepares the application by creating resources in a CloudFormation stack,
including an SNS topic
    * that will be subscribed to the EventBridge Scheduler events. The user will
need to confirm the subscription
    * in order to receive event emails.
    *
    * @return true if the application preparation was successful, false otherwise
    */
   public static boolean prepareApplication() {
       logger.info("""
```

```
            This example creates resources in a CloudFormation stack, including an
SNS topic
            that will be subscribed to the EventBridge Scheduler events.
            You will need to confirm the subscription in order to receive event
emails.
             """);

        String emailAddress = promptUserForEmail();
        logger.info("You entered {}", emailAddress);

        logger.info("Do you want to use a custom Stack name (y/n) ?");
        String ans = scanner.nextLine().trim();
        if (ans.equalsIgnoreCase("y")) {
            String newStackName = scanner.nextLine();
            logger.info("You entered {} for the new stack name", newStackName);
            waitForInputToContinue();
            STACK_NAME = newStackName;
        }

        logger.info("Get the roleArn and snsTopicArn values using a Cloudformation
template.");
        waitForInputToContinue();
        CloudFormationHelper.deployCloudFormationStack(STACK_NAME, emailAddress);
        Map<String, String> stackOutputs =
CloudFormationHelper.getStackOutputs(STACK_NAME);
        roleArn = stackOutputs.get("RoleARN");
        snsTopicArn = stackOutputs.get("SNStopicARN");

        logger.info("The roleARN is {}", roleArn);
        logger.info("The snsTopicArn is {}", snsTopicArn);

        try {
            eventbridgeActions.createScheduleGroup(scheduleGroupName).join();
            logger.info("createScheduleGroupAsync completed successfully.");

        } catch (RuntimeException e) {
            logger.error("Error occurred: {} ", e.getMessage());
            return false;
        }
        logger.info("Application preparation complete.");
        return true;
    }

    /**
```

```
     * Waits for the user to enter 'c' followed by <ENTER> to continue the program.
     * This method is used to pause the program execution and wait for user input
before
     * proceeding.
     */
    private static void waitForInputToContinue() {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }

    /**
     * Prompts the user to enter an email address and validates the input.
     * If the provided email address is invalid, the method will prompt the user to
try again.
     *
     * @return the valid email address entered by the user
     */
    private static String promptUserForEmail() {
        logger.info("Enter an email address to use for event subscriptions: ");
        String email = scanner.nextLine();
        if (!isValidEmail(email)) {
            logger.info("Invalid email address. Please try again.");
            return promptUserForEmail();
        }
        return email;
    }

    /**
     * Checks if the given email address is valid.
     *
     * @param email the email address to be validated
     * @return {@code true} if the email address is valid, {@code false} otherwise
```

```
     */
    private static boolean isValidEmail(String email) {
        try {
            InternetAddress emailAddress = new InternetAddress(email);
            emailAddress.validate();
            return true;

        } catch (AddressException e) {
            return false;
        }
    }

    /**
     * Creates a one-time schedule to send an initial event in 1 minute with a
 flexible time window.
     *
     * @return {@code true} if the schedule was created successfully, {@code false}
 otherwise
     */
    public static Boolean createOneTimeSchedule() {
        oneTimeScheduleName = promptUserForResourceName("Enter a name for the one-
time schedule:");
        logger.info("Creating a one-time schedule named {} to send an initial event
 in 1 minute with a flexible time window...", oneTimeScheduleName);
        LocalDateTime scheduledTime = LocalDateTime.now();
        DateTimeFormatter formatter = DateTimeFormatter.ofPattern("yyyy-MM-
dd'T'HH:mm:ss");

        String scheduleExpression = "at(" + scheduledTime.format(formatter) + ")";
        return eventbridgeActions.createScheduleAsync(
            oneTimeScheduleName,
            scheduleExpression,
            scheduleGroupName,
            snsTopicArn,
            roleArn,
            "One time scheduled event test from schedule",
            true,
            true).join();
    }


    /**
     * Creates a recurring schedule to send events based on a specific time.
     *
```

```
     * @return A {@link CompletableFuture} that completes with a boolean value
indicating the success or failure of the operation.
     */
    public static Boolean createRecurringSchedule() {
        logger.info("Creating a recurring schedule to send events for one hour...");
        recurringScheduleName = promptUserForResourceName("Enter a name for the
recurring schedule:");

        // Prompt the user for the schedule rate (in minutes).
        int scheduleRateInMinutes = promptUserForInteger("Enter the desired schedule
rate (in minutes): ");
        String scheduleExpression = "rate(" + scheduleRateInMinutes + " minutes)";
        return eventbridgeActions.createScheduleAsync(
            recurringScheduleName,
            scheduleExpression,
            scheduleGroupName,
            snsTopicArn,
            roleArn,
            "Recurrent event test from schedule " + recurringScheduleName,
            true,
            true).join();
    }

    /**
     * Prompts the user for a resource name and validates the input.
     *
     * @param prompt the message to display to the user when prompting for the
resource name
     * @return the valid resource name entered by the user
     */
    private static String promptUserForResourceName(String prompt) {
        logger.info(prompt);
        String resourceName = scanner.nextLine();
        String regex = "[0-9a-zA-Z-_.]+";
        if (!resourceName.matches(regex)) {
            logger.info("Invalid resource name. Please use a name that matches the
pattern " + regex + ".");
            return promptUserForResourceName(prompt);
        }
        return resourceName;
    }

    /**
     * Prompts the user for an integer input and returns the integer value.
```

```
     *
     * @param prompt the message to be displayed to the user when prompting for
 input
     * @return the integer value entered by the user
     */
    private static int promptUserForInteger(String prompt) {
        logger.info(prompt);
        String stringResponse = scanner.nextLine();
        if (stringResponse == null || stringResponse.trim().isEmpty() || !
isInteger(stringResponse)) {
            logger.info("Invalid integer.");
            return promptUserForInteger(prompt);
        }
        return Integer.parseInt(stringResponse);
    }

    /**
     * Checks if the given string represents a valid integer.
     *
     * @param str the string to be checked
     * @return {@code true} if the string represents a valid integer, {@code false}
 otherwise
     */
    private static boolean isInteger(String str) {
        try {
            Integer.parseInt(str);
            return true;
        } catch (NumberFormatException e) {
            return false;
        }
    }
}
```

Encapsulador para operaciones de servicio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.core.retry.RetryMode;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
```

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.scheduler.SchedulerAsyncClient;
import software.amazon.awssdk.services.scheduler.model.ActionAfterCompletion;
import software.amazon.awssdk.services.scheduler.model.ConflictException;
import software.amazon.awssdk.services.scheduler.model.CreateScheduleGroupRequest;
import software.amazon.awssdk.services.scheduler.model.CreateScheduleGroupResponse;
import software.amazon.awssdk.services.scheduler.model.CreateScheduleRequest;
import software.amazon.awssdk.services.scheduler.model.DeleteScheduleGroupRequest;
import software.amazon.awssdk.services.scheduler.model.DeleteScheduleRequest;
import software.amazon.awssdk.services.scheduler.model.DeleteScheduleResponse;
import software.amazon.awssdk.services.scheduler.model.FlexibleTimeWindow;
import software.amazon.awssdk.services.scheduler.model.FlexibleTimeWindowMode;
import software.amazon.awssdk.services.scheduler.model.ResourceNotFoundException;
import software.amazon.awssdk.services.scheduler.model.Target;

import java.time.Instant;
import java.util.concurrent.CompletableFuture;
import java.time.Duration;
import java.util.concurrent.CompletionException;

public class EventbridgeSchedulerActions {

    private static SchedulerAsyncClient schedulerClient;
    private static final Logger logger =
 LoggerFactory.getLogger(EventbridgeSchedulerActions.class);

    public static SchedulerAsyncClient getAsyncClient() {
        if (schedulerClient == null) {
            /*
            The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
 version 2,
            and it is designed to provide a high-performance, asynchronous HTTP
 client for interacting with AWS services.
             It uses the Netty framework to handle the underlying network
 communication and the Java NIO API to
             provide a non-blocking, event-driven approach to HTTP requests and
 responses.
             */

            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(50)  // Adjust as needed.
                .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
 timeout.
                .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
```

```
                .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
timeout.
                .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the
individual call attempt timeout.
                .retryStrategy(RetryMode.STANDARD)
                .build();

            schedulerClient = SchedulerAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return schedulerClient;
    }


    /**
     * Creates a new schedule group.
     *
     * @param name the name of the schedule group to be created
     * @return a {@link CompletableFuture} representing the asynchronous operation
of creating the schedule group
     */
    public CompletableFuture<CreateScheduleGroupResponse> createScheduleGroup(String
name) {
        CreateScheduleGroupRequest request = CreateScheduleGroupRequest.builder()
            .name(name)
            .build();

        logger.info("Initiating createScheduleGroup call for group: {}", name);
        CompletableFuture<CreateScheduleGroupResponse> futureResponse =
getAsyncClient().createScheduleGroup(request);
        futureResponse.whenComplete((response, ex) -> {
            if (ex != null) {
                if (ex instanceof CompletionException && ex.getCause() instanceof
ConflictException) {
                    // Rethrow the ConflictException
                    throw (ConflictException) ex.getCause();
```

```
                } else {
                    throw new CompletionException("Failed to create schedule group:
" + name, ex);
                }
            } else if (response == null) {
                throw new RuntimeException("Failed to create schedule group:
response was null");
            } else {
                logger.info("Successfully created schedule group '{}': {}", name,
response.scheduleGroupArn());
            }
        });

        return futureResponse;
    }


    /**
     * Creates a new schedule for a target task.
     *
     * @param name                  the name of the schedule
     * @param scheduleExpression    The schedule expression that defines when the
schedule should run.
     * @param scheduleGroupName     the name of the schedule group to which the
schedule belongs
     * @param targetArn             the Amazon Resource Name (ARN) of the target
task
     * @param roleArn               the ARN of the IAM role to be used for the
schedule
     * @param input                 the input data for the target task
     * @param deleteAfterCompletion whether to delete the schedule after it's
executed
     * @param useFlexibleTimeWindow whether to use a flexible time window for the
schedule execution
     * @return true if the schedule was successfully created, false otherwise
     */
    public CompletableFuture<Boolean> createScheduleAsync(
        String name,
        String scheduleExpression,
        String scheduleGroupName,
        String targetArn,
        String roleArn,
        String input,
        boolean deleteAfterCompletion,
```

```
        boolean useFlexibleTimeWindow) {

        int hoursToRun = 1;
        int flexibleTimeWindowMinutes = 10;

        Target target = Target.builder()
            .arn(targetArn)
            .roleArn(roleArn)
            .input(input)
            .build();

        FlexibleTimeWindow flexibleTimeWindow = FlexibleTimeWindow.builder()
            .mode(useFlexibleTimeWindow
                ? FlexibleTimeWindowMode.FLEXIBLE
                : FlexibleTimeWindowMode.OFF)
            .maximumWindowInMinutes(useFlexibleTimeWindow
                ? flexibleTimeWindowMinutes
                : null)
            .build();

        Instant startDate = Instant.now();
        Instant endDate = startDate.plus(Duration.ofHours(hoursToRun));

        CreateScheduleRequest request = CreateScheduleRequest.builder()
            .name(name)
            .scheduleExpression(scheduleExpression)
            .groupName(scheduleGroupName)
            .target(target)
            .actionAfterCompletion(deleteAfterCompletion
                ? ActionAfterCompletion.DELETE
                : ActionAfterCompletion.NONE)
            .startDate(startDate)
            .endDate(endDate)
            .flexibleTimeWindow(flexibleTimeWindow)
            .build();

        return getAsyncClient().createSchedule(request)
            .thenApply(response -> {
                logger.info("Successfully created schedule {} in schedule group {},
The ARN is {} ", name, scheduleGroupName, response.scheduleArn());
                return true;
            })
            .whenComplete((result, ex) -> {
                if (ex != null) {
```

```
                    if (ex instanceof ConflictException) {
                        // Handle ConflictException
                        logger.error("A conflict exception occurred while creating
the schedule: {}", ex.getMessage());
                        throw new CompletionException("A conflict exception occurred
while creating the schedule: " + ex.getMessage(), ex);
                    } else {
                        throw new CompletionException("Error creating schedule: " +
ex.getMessage(), ex);
                    }
                }
            });
    }


    /**
     * Deletes the specified schedule group.
     *
     * @param name the name of the schedule group to delete
     * @return a {@link CompletableFuture} that completes when the schedule group
has been deleted
     * @throws CompletionException if an error occurs while deleting the schedule
group
     */
    public CompletableFuture<Void> deleteScheduleGroupAsync(String name) {
        DeleteScheduleGroupRequest request = DeleteScheduleGroupRequest.builder()
            .name(name)
            .build();

        return getAsyncClient().deleteScheduleGroup(request)
            .thenRun(() -> {
                logger.info("Successfully deleted schedule group {}", name);
            })
            .whenComplete((result, ex) -> {
                if (ex != null) {
                    if (ex instanceof ResourceNotFoundException) {
                        throw new CompletionException("The resource was not found: "
+ ex.getMessage(), ex);
                    } else {
                        throw new CompletionException("Error deleting schedule
group: " + ex.getMessage(), ex);
                    }
                }
            });
```

```
    }


    /**
     * Deletes a schedule with the specified name and group name.
     *
     * @param name      the name of the schedule to be deleted
     * @param groupName the group name of the schedule to be deleted
     * @return a {@link CompletableFuture} that, when completed, indicates whether
 the schedule was successfully deleted
     * @throws CompletionException if an error occurs while deleting the schedule,
 except for the case where the schedule is not found
     */
    public CompletableFuture<Boolean> deleteScheduleAsync(String name, String
 groupName) {
        DeleteScheduleRequest request = DeleteScheduleRequest.builder()
            .name(name)
            .groupName(groupName)
            .build();

        CompletableFuture<DeleteScheduleResponse> response =
 getAsyncClient().deleteSchedule(request);
        return response.handle((result, ex) -> {
            if (ex != null) {
                if (ex instanceof ResourceNotFoundException) {
                    throw new CompletionException("Resource not found while deleting
 schedule with ID: " + name, ex);
                } else {
                    throw new CompletionException("Failed to delete schedule.", ex);
                }
            }
            logger.info("Successfully deleted schedule with name {}.", name);
            return true;
        });
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateSchedule
  - CreateScheduleGroup

- DeleteSchedule
- DeleteScheduleGroups

Ejemplos de pronóstico usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso de AWS SDK for Java 2.x with Forecast.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`CreateDataset`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDataset`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.CreateDatasetRequest;
import software.amazon.awssdk.services.forecast.model.Schema;
import software.amazon.awssdk.services.forecast.model.SchemaAttribute;
import software.amazon.awssdk.services.forecast.model.CreateDatasetResponse;
import software.amazon.awssdk.services.forecast.model.ForecastException;
```

```
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateDataSet {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <name>\s

                Where:
                    name - The name of the data set.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String name = args[0];
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
                .build();

        String myDataSetARN = createForecastDataSet(forecast, name);
        System.out.println("The ARN of the new data set is " + myDataSetARN);
        forecast.close();
    }

    public static String createForecastDataSet(ForecastClient forecast, String name)
 {
        try {
            Schema schema = Schema.builder()
                    .attributes(getSchema())
                    .build();
```

```
            CreateDatasetRequest datasetRequest = CreateDatasetRequest.builder()
                    .datasetName(name)
                    .domain("CUSTOM")
                    .datasetType("RELATED_TIME_SERIES")
                    .dataFrequency("D")
                    .schema(schema)
                    .build();

            CreateDatasetResponse response = forecast.createDataset(datasetRequest);
            return response.datasetArn();

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return "";
    }

    // Create a SchemaAttribute list required to create a data set.
    private static List<SchemaAttribute> getSchema() {

        List<SchemaAttribute> schemaList = new ArrayList<>();
        SchemaAttribute att1 = SchemaAttribute.builder()
                .attributeName("item_id")
                .attributeType("string")
                .build();

        SchemaAttribute att2 = SchemaAttribute.builder()
                .attributeName("timestamp")
                .attributeType("timestamp")
                .build();

        SchemaAttribute att3 = SchemaAttribute.builder()
                .attributeName("target_value")
                .attributeType("float")
                .build();

        // Push the SchemaAttribute objects to the List.
        schemaList.add(att1);
        schemaList.add(att2);
        schemaList.add(att3);
        return schemaList;
```

```
    }
}
```

- Para obtener más información sobre la API, consulta CreateDatasetla Referencia AWS SDK for Java 2.x de la API.

`CreateForecast`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateForecast`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.CreateForecastRequest;
import software.amazon.awssdk.services.forecast.model.CreateForecastResponse;
import software.amazon.awssdk.services.forecast.model.ForecastException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateForecast {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <name> <predictorArn>\s

                Where:
```

```
                    name - The name of the forecast.\s
                    predictorArn - The arn of the predictor to use.\s

                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String name = args[0];
        String predictorArn = args[1];
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
                .build();

        String forecastArn = createNewForecast(forecast, name, predictorArn);
        System.out.println("The ARN of the new forecast is " + forecastArn);
        forecast.close();
    }

    public static String createNewForecast(ForecastClient forecast, String name,
 String predictorArn) {
        try {
            CreateForecastRequest forecastRequest = CreateForecastRequest.builder()
                    .forecastName(name)
                    .predictorArn(predictorArn)
                    .build();

            CreateForecastResponse response =
 forecast.createForecast(forecastRequest);
            return response.forecastArn();

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulta CreateForecastla Referencia AWS SDK for Java 2.x de la API.

`DeleteDataset`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDataset`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.DeleteDatasetRequest;
import software.amazon.awssdk.services.forecast.model.ForecastException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteDataset {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <datasetARN>\s

                Where:
                    datasetARN - The ARN of the data set to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
```

```
            System.exit(1);
        }

        String datasetARN = args[0];
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
                .build();

        deleteForecastDataSet(forecast, datasetARN);
        forecast.close();
    }

    public static void deleteForecastDataSet(ForecastClient forecast, String
 myDataSetARN) {
        try {
            DeleteDatasetRequest deleteRequest = DeleteDatasetRequest.builder()
                    .datasetArn(myDataSetARN)
                    .build();

            forecast.deleteDataset(deleteRequest);
            System.out.println("The Data Set was deleted");

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteDatasetla Referencia AWS SDK for Java 2.x de la API.

`DeleteForecast`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteForecast`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.DeleteDatasetRequest;
import software.amazon.awssdk.services.forecast.model.ForecastException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteDataset {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <datasetARN>\s

                Where:
                    datasetARN - The ARN of the data set to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String datasetARN = args[0];
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
```

```
                .build();

        deleteForecastDataSet(forecast, datasetARN);
        forecast.close();
    }

    public static void deleteForecastDataSet(ForecastClient forecast, String
 myDataSetARN) {
        try {
            DeleteDatasetRequest deleteRequest = DeleteDatasetRequest.builder()
                    .datasetArn(myDataSetARN)
                    .build();

            forecast.deleteDataset(deleteRequest);
            System.out.println("The Data Set was deleted");

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteForecastla Referencia AWS SDK for Java 2.x de la API.

`DescribeForecast`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeForecast`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
```

```
import software.amazon.awssdk.services.forecast.model.DescribeForecastRequest;
import software.amazon.awssdk.services.forecast.model.DescribeForecastResponse;
import software.amazon.awssdk.services.forecast.model.ForecastException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeForecast {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <forecastarn>\s

                Where:
                    forecastarn - The arn of the forecast (for example,
 "arn:aws:forecast:us-west-2:xxxxx322:forecast/my_forecast)
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String forecastarn = args[0];
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
                .build();

        describe(forecast, forecastarn);
        forecast.close();
    }

    public static void describe(ForecastClient forecast, String forecastarn) {
        try {
            DescribeForecastRequest request = DescribeForecastRequest.builder()
                    .forecastArn(forecastarn)
                    .build();
```

```
            DescribeForecastResponse response = forecast.describeForecast(request);
            System.out.println("The name of the forecast is " +
 response.forecastName());

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DescribeForecastla Referencia AWS SDK for Java 2.x de la API.

`ListDatasetGroups`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListDatasetGroups`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.DatasetGroupSummary;
import software.amazon.awssdk.services.forecast.model.ListDatasetGroupsRequest;
import software.amazon.awssdk.services.forecast.model.ListDatasetGroupsResponse;
import software.amazon.awssdk.services.forecast.model.ForecastException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListDataSetGroups {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
                .build();

        listDataGroups(forecast);
        forecast.close();
    }

    public static void listDataGroups(ForecastClient forecast) {
        try {
            ListDatasetGroupsRequest group = ListDatasetGroupsRequest.builder()
                    .maxResults(10)
                    .build();

            ListDatasetGroupsResponse response = forecast.listDatasetGroups(group);
            List<DatasetGroupSummary> groups = response.datasetGroups();
            for (DatasetGroupSummary myGroup : groups) {
                System.out.println("The Data Set name is " +
 myGroup.datasetGroupName());
            }

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListDatasetGroupsla Referencia AWS SDK for Java 2.x de la API.

`ListForecasts`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListForecasts`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.ListForecastsResponse;
import software.amazon.awssdk.services.forecast.model.ListForecastsRequest;
import software.amazon.awssdk.services.forecast.model.ForecastSummary;
import software.amazon.awssdk.services.forecast.model.ForecastException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListForecasts {

    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
                .build();

        listAllForeCasts(forecast);
        forecast.close();
    }

    public static void listAllForeCasts(ForecastClient forecast) {
        try {
            ListForecastsRequest request = ListForecastsRequest.builder()
                    .maxResults(10)
                    .build();
```

```
            ListForecastsResponse response = forecast.listForecasts(request);
            List<ForecastSummary> forecasts = response.forecasts();
            for (ForecastSummary forecastSummary : forecasts) {
                System.out.println("The name of the forecast is " +
 forecastSummary.forecastName());
            }

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListForecastsla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon Glacier usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x con Amazon Glacier.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`CreateVault`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateVault`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glacier.GlacierClient;
import software.amazon.awssdk.services.glacier.model.CreateVaultRequest;
import software.amazon.awssdk.services.glacier.model.CreateVaultResponse;
import software.amazon.awssdk.services.glacier.model.GlacierException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateVault {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <vaultName>

                Where:
                   vaultName - The name of the vault to create.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String vaultName = args[0];
        GlacierClient glacier = GlacierClient.builder()
                .region(Region.US_EAST_1)
                .build();
```

```
        createGlacierVault(glacier, vaultName);
        glacier.close();
    }

    public static void createGlacierVault(GlacierClient glacier, String vaultName) {
        try {
            CreateVaultRequest vaultRequest = CreateVaultRequest.builder()
                    .vaultName(vaultName)
                    .build();

            CreateVaultResponse createVaultResult =
 glacier.createVault(vaultRequest);
            System.out.println("The URI of the new vault is " +
 createVaultResult.location());

        } catch (GlacierException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta CreateVaultla Referencia AWS SDK for Java 2.x de la API.

`DeleteArchive`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteArchive`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glacier.GlacierClient;
```

```
import software.amazon.awssdk.services.glacier.model.DeleteArchiveRequest;
import software.amazon.awssdk.services.glacier.model.GlacierException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteArchive {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <vaultName> <accountId> <archiveId>

                Where:
                   vaultName - The name of the vault that contains the archive to
 delete.
                   accountId - The account ID value.
                   archiveId - The archive ID value.
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String vaultName = args[0];
        String accountId = args[1];
        String archiveId = args[2];
        GlacierClient glacier = GlacierClient.builder()
                .region(Region.US_EAST_1)
                .build();

        deleteGlacierArchive(glacier, vaultName, accountId, archiveId);
        glacier.close();
    }

    public static void deleteGlacierArchive(GlacierClient glacier, String vaultName,
 String accountId,
            String archiveId) {
        try {
```

```
            DeleteArchiveRequest delArcRequest = DeleteArchiveRequest.builder()
                    .vaultName(vaultName)
                    .accountId(accountId)
                    .archiveId(archiveId)
                    .build();

            glacier.deleteArchive(delArcRequest);
            System.out.println("The archive was deleted.");

        } catch (GlacierException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteArchivela Referencia AWS SDK for Java 2.x de la API.

`DeleteVault`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteVault`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glacier.GlacierClient;
import software.amazon.awssdk.services.glacier.model.DeleteVaultRequest;
import software.amazon.awssdk.services.glacier.model.GlacierException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteVault {
    public static void main(String[] args) {

        final String usage = """

                Usage:    <vaultName>

                Where:
                   vaultName - The name of the vault to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String vaultName = args[0];
        GlacierClient glacier = GlacierClient.builder()
                .region(Region.US_EAST_1)
                .build();

        deleteGlacierVault(glacier, vaultName);
        glacier.close();
    }

    public static void deleteGlacierVault(GlacierClient glacier, String vaultName) {
        try {
            DeleteVaultRequest delVaultRequest = DeleteVaultRequest.builder()
                    .vaultName(vaultName)
                    .build();

            glacier.deleteVault(delVaultRequest);
            System.out.println("The vault was deleted!");

        } catch (GlacierException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteVaultla Referencia AWS SDK for Java 2.x de la API.

`InitiateJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `InitiateJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Recupere un inventario de almacén.

```
import software.amazon.awssdk.core.ResponseBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glacier.GlacierClient;
import software.amazon.awssdk.services.glacier.model.JobParameters;
import software.amazon.awssdk.services.glacier.model.InitiateJobResponse;
import software.amazon.awssdk.services.glacier.model.GlacierException;
import software.amazon.awssdk.services.glacier.model.InitiateJobRequest;
import software.amazon.awssdk.services.glacier.model.DescribeJobRequest;
import software.amazon.awssdk.services.glacier.model.DescribeJobResponse;
import software.amazon.awssdk.services.glacier.model.GetJobOutputRequest;
import software.amazon.awssdk.services.glacier.model.GetJobOutputResponse;
import java.io.File;
import java.io.FileOutputStream;
import java.io.IOException;
import java.io.OutputStream;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class ArchiveDownload {
    public static void main(String[] args) {

        final String usage = """

                Usage:    <vaultName> <accountId> <path>

                Where:
                   vaultName - The name of the vault.
                   accountId - The account ID value.
                   path - The path where the file is written to.
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String vaultName = args[0];
        String accountId = args[1];
        String path = args[2];
        GlacierClient glacier = GlacierClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String jobNum = createJob(glacier, vaultName, accountId);
        checkJob(glacier, jobNum, vaultName, accountId, path);
        glacier.close();
    }

    public static String createJob(GlacierClient glacier, String vaultName, String
 accountId) {
        try {
            JobParameters job = JobParameters.builder()
                    .type("inventory-retrieval")
                    .build();

            InitiateJobRequest initJob = InitiateJobRequest.builder()
                    .jobParameters(job)
                    .accountId(accountId)
                    .vaultName(vaultName)
                    .build();
```

```
            InitiateJobResponse response = glacier.initiateJob(initJob);
            System.out.println("The job ID is: " + response.jobId());
            System.out.println("The relative URI path of the job is: " +
response.location());
            return response.jobId();

        } catch (GlacierException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);

        }
        return "";
    }

    // Poll S3 Glacier = Polling a Job may take 4-6 hours according to the
    // Documentation.
    public static void checkJob(GlacierClient glacier, String jobId, String name,
String account, String path) {
        try {
            boolean finished = false;
            String jobStatus;
            int yy = 0;

            while (!finished) {
                DescribeJobRequest jobRequest = DescribeJobRequest.builder()
                        .jobId(jobId)
                        .accountId(account)
                        .vaultName(name)
                        .build();

                DescribeJobResponse response = glacier.describeJob(jobRequest);
                jobStatus = response.statusCodeAsString();

                if (jobStatus.compareTo("Succeeded") == 0)
                    finished = true;
                else {
                    System.out.println(yy + " status is: " + jobStatus);
                    Thread.sleep(1000);
                }
                yy++;
            }

            System.out.println("Job has Succeeded");
            GetJobOutputRequest jobOutputRequest = GetJobOutputRequest.builder()
```

```
                    .jobId(jobId)
                    .vaultName(name)
                    .accountId(account)
                    .build();

            ResponseBytes<GetJobOutputResponse> objectBytes =
 glacier.getJobOutputAsBytes(jobOutputRequest);
            // Write the data to a local file.
            byte[] data = objectBytes.asByteArray();
            File myFile = new File(path);
            OutputStream os = new FileOutputStream(myFile);
            os.write(data);
            System.out.println("Successfully obtained bytes from a Glacier vault");
            os.close();

        } catch (GlacierException | InterruptedException | IOException e) {
            System.out.println(e.getMessage());
            System.exit(1);

        }
    }
}
```

- Para obtener más información sobre la API, consulta InitiateJobla Referencia AWS SDK for Java 2.x de la API.

`ListVaults`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListVaults`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glacier.model.ListVaultsRequest;
```

```
import software.amazon.awssdk.services.glacier.model.ListVaultsResponse;
import software.amazon.awssdk.services.glacier.GlacierClient;
import software.amazon.awssdk.services.glacier.model.DescribeVaultOutput;
import software.amazon.awssdk.services.glacier.model.GlacierException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListVaults {
    public static void main(String[] args) {
        GlacierClient glacier = GlacierClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listAllVault(glacier);
        glacier.close();
    }

    public static void listAllVault(GlacierClient glacier) {
        boolean listComplete = false;
        String newMarker = null;
        int totalVaults = 0;
        System.out.println("Your Amazon Glacier vaults:");
        try {
            while (!listComplete) {
                ListVaultsResponse response = null;
                if (newMarker != null) {
                    ListVaultsRequest request = ListVaultsRequest.builder()
                            .marker(newMarker)
                            .build();

                    response = glacier.listVaults(request);
                } else {
                    ListVaultsRequest request = ListVaultsRequest.builder()
                            .build();
                    response = glacier.listVaults(request);
                }
```

```
                List<DescribeVaultOutput> vaultList = response.vaultList();
                for (DescribeVaultOutput v : vaultList) {
                    totalVaults += 1;
                    System.out.println("* " + v.vaultName());
                }

                // Check for further results.
                newMarker = response.marker();
                if (newMarker == null) {
                    listComplete = true;
                }
            }

            if (totalVaults == 0) {
                System.out.println("No vaults found.");
            }

        } catch (GlacierException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListVaultsla Referencia AWS SDK for Java 2.x de la API.

`UploadArchive`

En el siguiente ejemplo de código, se muestra cómo utilizar `UploadArchive`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.glacier.GlacierClient;
import software.amazon.awssdk.services.glacier.model.UploadArchiveRequest;
import software.amazon.awssdk.services.glacier.model.UploadArchiveResponse;
import software.amazon.awssdk.services.glacier.model.GlacierException;
import java.io.File;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.io.FileInputStream;
import java.io.IOException;
import java.security.MessageDigest;
import java.security.NoSuchAlgorithmException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class UploadArchive {

    static final int ONE_MB = 1024 * 1024;

    public static void main(String[] args) {
        final String usage = """

                Usage:   <strPath> <vaultName>\s

                Where:
                   strPath - The path to the archive to upload (for example, C:\\AWS
\\test.pdf).
                   vaultName - The name of the vault.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String strPath = args[0];
        String vaultName = args[1];
        File myFile = new File(strPath);
        Path path = Paths.get(strPath);
```

```
        GlacierClient glacier = GlacierClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String archiveId = uploadContent(glacier, path, vaultName, myFile);
        System.out.println("The ID of the archived item is " + archiveId);
        glacier.close();
    }

    public static String uploadContent(GlacierClient glacier, Path path, String
vaultName, File myFile) {
        // Get an SHA-256 tree hash value.
        String checkVal = computeSHA256(myFile);
        try {
            UploadArchiveRequest uploadRequest = UploadArchiveRequest.builder()
                    .vaultName(vaultName)
                    .checksum(checkVal)
                    .build();

            UploadArchiveResponse res = glacier.uploadArchive(uploadRequest, path);
            return res.archiveId();

        } catch (GlacierException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    private static String computeSHA256(File inputFile) {
        try {
            byte[] treeHash = computeSHA256TreeHash(inputFile);
            System.out.printf("SHA-256 tree hash = %s\n", toHex(treeHash));
            return toHex(treeHash);

        } catch (IOException ioe) {
            System.err.format("Exception when reading from file %s: %s", inputFile,
ioe.getMessage());
            System.exit(-1);

        } catch (NoSuchAlgorithmException nsae) {
            System.err.format("Cannot locate MessageDigest algorithm for SHA-256:
%s", nsae.getMessage());
            System.exit(-1);
```

```
        }
        return "";
    }

    public static byte[] computeSHA256TreeHash(File inputFile) throws IOException,
            NoSuchAlgorithmException {

        byte[][] chunkSHA256Hashes = getChunkSHA256Hashes(inputFile);
        return computeSHA256TreeHash(chunkSHA256Hashes);
    }

    /**
     * Computes an SHA256 checksum for each 1 MB chunk of the input file. This
     * includes the checksum for the last chunk, even if it's smaller than 1 MB.
     */
    public static byte[][] getChunkSHA256Hashes(File file) throws IOException,
            NoSuchAlgorithmException {

        MessageDigest md = MessageDigest.getInstance("SHA-256");
        long numChunks = file.length() / ONE_MB;
        if (file.length() % ONE_MB > 0) {
            numChunks++;
        }

        if (numChunks == 0) {
            return new byte[][] { md.digest() };
        }

        byte[][] chunkSHA256Hashes = new byte[(int) numChunks][];
        FileInputStream fileStream = null;

        try {
            fileStream = new FileInputStream(file);
            byte[] buff = new byte[ONE_MB];

            int bytesRead;
            int idx = 0;

            while ((bytesRead = fileStream.read(buff, 0, ONE_MB)) > 0) {
                md.reset();
                md.update(buff, 0, bytesRead);
                chunkSHA256Hashes[idx++] = md.digest();
            }
```

```
            return chunkSHA256Hashes;

        } finally {
            if (fileStream != null) {
                try {
                    fileStream.close();
                } catch (IOException ioe) {
                    System.err.printf("Exception while closing %s.\n %s",
file.getName(),
                            ioe.getMessage());
                }
            }
        }
    }

    /**
     * Computes the SHA-256 tree hash for the passed array of 1 MB chunk
     * checksums.
     */
    public static byte[] computeSHA256TreeHash(byte[][] chunkSHA256Hashes)
            throws NoSuchAlgorithmException {

        MessageDigest md = MessageDigest.getInstance("SHA-256");
        byte[][] prevLvlHashes = chunkSHA256Hashes;
        while (prevLvlHashes.length > 1) {
            int len = prevLvlHashes.length / 2;
            if (prevLvlHashes.length % 2 != 0) {
                len++;
            }

            byte[][] currLvlHashes = new byte[len][];
            int j = 0;
            for (int i = 0; i < prevLvlHashes.length; i = i + 2, j++) {

                // If there are at least two elements remaining.
                if (prevLvlHashes.length - i > 1) {

                    // Calculate a digest of the concatenated nodes.
                    md.reset();
                    md.update(prevLvlHashes[i]);
                    md.update(prevLvlHashes[i + 1]);
                    currLvlHashes[j] = md.digest();

                } else { // Take care of the remaining odd chunk
```

```
                    currLvlHashes[j] = prevLvlHashes[i];
                }
            }

            prevLvlHashes = currLvlHashes;
        }

        return prevLvlHashes[0];
    }

    /**
     * Returns the hexadecimal representation of the input byte array
     */
    public static String toHex(byte[] data) {
        StringBuilder sb = new StringBuilder(data.length * 2);
        for (byte datum : data) {
            String hex = Integer.toHexString(datum & 0xFF);

            if (hex.length() == 1) {
                // Append leading zero.
                sb.append("0");
            }
            sb.append(hex);
        }
        return sb.toString().toLowerCase();
    }
}
```

- Para obtener más información sobre la API, consulta UploadArchivela Referencia AWS SDK for Java 2.x de la API.

AWS Glue ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with AWS Glue.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hola AWS Glue

En el siguiente ejemplo de código se muestra cómo empezar a utilizar AWS Glue.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
package com.example.glue;

import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glue.GlueClient;
import software.amazon.awssdk.services.glue.model.ListJobsRequest;
import software.amazon.awssdk.services.glue.model.ListJobsResponse;
import java.util.List;

public class HelloGlue {
    public static void main(String[] args) {
        GlueClient glueClient = GlueClient.builder()
                .region(Region.US_EAST_1)
                .build();
```

```
        listJobs(glueClient);
    }

    public static void listJobs(GlueClient glueClient) {
        ListJobsRequest request = ListJobsRequest.builder()
                .maxResults(10)
                .build();
        ListJobsResponse response = glueClient.listJobs(request);
        List<String> jobList = response.jobNames();
        jobList.forEach(job -> {
            System.out.println("Job Name: " + job);
        });
    }
}
```

- Para obtener más información sobre la API, consulta ListJobsla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crear un rastreador que rastree un bucket de Amazon S3 público y generar una base de datos de metadatos con formato CSV.
- Incluya información sobre bases de datos y tablas en su AWS Glue Data Catalog.
- Crear un trabajo para extraer datos CSV del bucket de S3, transformar los datos y cargar el resultado con formato JSON en otro bucket de S3.
- Incluir información sobre las ejecuciones de trabajos, ver algunos de los datos transformados y limpiar los recursos.

Para obtener más información, consulte el tutorial: Introducción a AWS Glue Studio.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To set up the resources, see this documentation topic:
 *
 * https://docs.aws.amazon.com/glue/latest/ug/tutorial-add-crawler.html
 *
 * This example performs the following tasks:
 *
 * 1. Create a database.
 * 2. Create a crawler.
 * 3. Get a crawler.
 * 4. Start a crawler.
 * 5. Get a database.
 * 6. Get tables.
 * 7. Create a job.
 * 8. Start a job run.
 * 9. List all jobs.
 * 10. Get job runs.
 * 11. Delete a job.
 * 12. Delete a database.
 * 13. Delete a crawler.
 */

public class GlueScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws InterruptedException {
```

```
        final String usage = """

            Usage:
                <iam> <s3Path> <cron> <dbName> <crawlerName> <jobName>
 <scriptLocation> <locationUri> <bucketNameSc>\s

            Where:
                iam - The ARN of the IAM role that has AWS Glue and S3 permissions.
\s
                s3Path - The Amazon Simple Storage Service (Amazon S3) target that
 contains data (for example, s3://<bucket name>/read).
                cron - A cron expression used to specify the schedule  (i.e.,
 cron(15 12 * * ? *).
                dbName - The database name.\s
                crawlerName - The name of the crawler.\s
                jobName - The name you assign to this job definition.
                scriptLocation - The Amazon S3 path to a script that runs a job.
                locationUri - The location of the database (you can find this file
 in resources folder).
                bucketNameSc - The Amazon S3 bucket name used when creating a job
                """;

        if (args.length != 9) {
            System.out.println(usage);
            return;
        }
        Scanner scanner = new Scanner(System.in);
        String iam = args[0];
        String s3Path = args[1];
        String cron = args[2];
        String dbName = args[3];
        String crawlerName = args[4];
        String jobName = args[5];
        String scriptLocation = args[6];
        String locationUri = args[7];
        String bucketNameSc = args[8];

        Region region = Region.US_EAST_1;
        GlueClient glueClient = GlueClient.builder()
            .region(region)
            .build();
        System.out.println(DASHES);
        System.out.println("Welcome to the AWS Glue scenario.");
        System.out.println("""
```

```
            AWS Glue is a fully managed extract, transform, and load (ETL) service
provided by Amazon
            Web Services (AWS). It is designed to simplify the process of building,
running, and maintaining
            ETL pipelines, which are essential for data integration and data
warehousing tasks.

            One of the key features of AWS Glue is its ability to automatically
discover and catalog data
            stored in various sources, such as Amazon S3, Amazon RDS, Amazon
Redshift, and other databases.
            This cataloging process creates a central metadata repository, known as
the AWS Glue Data Catalog,
            which provides a unified view of an organization's data assets. This
metadata can then be used to
            create ETL jobs, which can be scheduled and run on-demand or on a
regular basis.

            Lets get started.

            """);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Create a database.");
        try {
            createDatabase(glueClient, dbName, locationUri);
        } catch (GlueException e) {
            if (e.awsErrorDetails().errorMessage().equals("Database already
exists.")) {
                System.out.println("Database " + dbName + " already exists. Skipping
creation.");
            } else {
                System.err.println(e.awsErrorDetails().errorMessage());
                return;
            }
        }

        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create a crawler.");
```

```
        try {
            createGlueCrawler(glueClient, iam, s3Path, cron, dbName, crawlerName);
        } catch (GlueException e) {
            if (e.awsErrorDetails().errorMessage().contains("already exists")) {
                System.out.println("Crawler " + crawlerName + " already exists.
Skipping creation.");
            } else {
                System.err.println(e.awsErrorDetails().errorMessage());
                System.exit(1);
            }
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Get a crawler.");
        try {
            getSpecificCrawler(glueClient, crawlerName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Start a crawler.");
        try {
            startSpecificCrawler(glueClient, crawlerName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Get a database.");
        try {
            getSpecificDatabase(glueClient, dbName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
```

```
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("*** Wait 5 min for the tables to become available");
        TimeUnit.MINUTES.sleep(5);
        System.out.println("6. Get tables.");
        String myTableName;
        try {
            myTableName = getGlueTables(glueClient, dbName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Create a job.");
        try {
            createJob(glueClient, jobName, iam, scriptLocation);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Start a Job run.");
        try {
            startJob(glueClient, jobName, dbName, myTableName, bucketNameSc);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. List all jobs.");
        try {
            getAllJobs(glueClient);
        } catch (GlueException e) {
```

```
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Get job runs.");
        try {
            getJobRuns(glueClient, jobName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Delete a job.");
        try {
            deleteJob(glueClient, jobName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        System.out.println("*** Wait 5 MIN for the " + crawlerName + " to stop");
        TimeUnit.MINUTES.sleep(5);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Delete a database.");
        try {
            deleteDatabase(glueClient, dbName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Delete a crawler.");
        try {
```

```
            deleteSpecificCrawler(glueClient, crawlerName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Successfully completed the AWS Glue Scenario");
        System.out.println(DASHES);
    }


    /**
     * Creates a Glue database with the specified name and location URI.
     *
     * @param glueClient  The Glue client to use for the database creation.
     * @param dbName      The name of the database to create.
     * @param locationUri The location URI for the database.
     */
    public static void createDatabase(GlueClient glueClient, String dbName, String
locationUri) {
        try {
            DatabaseInput input = DatabaseInput.builder()
                .description("Built with the AWS SDK for Java V2")
                .name(dbName)
                .locationUri(locationUri)
                .build();

            CreateDatabaseRequest request = CreateDatabaseRequest.builder()
                .databaseInput(input)
                .build();

            glueClient.createDatabase(request);
            System.out.println(dbName + " was successfully created");

        } catch (GlueException e) {
            throw e;
        }
    }


    /**
```

```
    * Creates a new AWS Glue crawler using the AWS Glue Java API.
    *
    * @param glueClient  the AWS Glue client used to interact with the AWS Glue
service
    * @param iam         the IAM role that the crawler will use to access the data
source
    * @param s3Path      the S3 path that the crawler will scan for data
    * @param cron        the cron expression that defines the crawler's schedule
    * @param dbName      the name of the AWS Glue database where the crawler will
store the metadata
    * @param crawlerName the name of the crawler to be created
    */
   public static void createGlueCrawler(GlueClient glueClient,
                                        String iam,
                                        String s3Path,
                                        String cron,
                                        String dbName,
                                        String crawlerName) {

       try {
           S3Target s3Target = S3Target.builder()
               .path(s3Path)
               .build();

           List<S3Target> targetList = new ArrayList<>();
           targetList.add(s3Target);
           CrawlerTargets targets = CrawlerTargets.builder()
               .s3Targets(targetList)
               .build();

           CreateCrawlerRequest crawlerRequest = CreateCrawlerRequest.builder()
               .databaseName(dbName)
               .name(crawlerName)
               .description("Created by the AWS Glue Java API")
               .targets(targets)
               .role(iam)
               .schedule(cron)
               .build();

           glueClient.createCrawler(crawlerRequest);
           System.out.println(crawlerName + " was successfully created");

       } catch (GlueException e) {
           throw e;
```

```
        }
    }

    /**
     * Retrieves a specific crawler from the AWS Glue service and waits for it to be
in the "READY" state.
     *
     * @param glueClient  the AWS Glue client used to interact with the Glue service
     * @param crawlerName the name of the crawler to be retrieved
     */
    public static void getSpecificCrawler(GlueClient glueClient, String crawlerName)
throws InterruptedException {
        try {
            GetCrawlerRequest crawlerRequest = GetCrawlerRequest.builder()
                .name(crawlerName)
                .build();

            boolean ready = false;
            while (!ready) {
                GetCrawlerResponse response = glueClient.getCrawler(crawlerRequest);
                String status = response.crawler().stateAsString();
                if (status.compareTo("READY") == 0) {
                    ready = true;
                }
                Thread.sleep(3000);
            }

            System.out.println("The crawler is now ready");

        } catch (GlueException | InterruptedException e) {
            throw e;
        }
    }

    /**
     * Starts a specific AWS Glue crawler.
     *
     * @param glueClient  the AWS Glue client to use for the crawler operation
     * @param crawlerName the name of the crawler to start
     * @throws GlueException if there is an error starting the crawler
     */
    public static void startSpecificCrawler(GlueClient glueClient, String
crawlerName) {
        try {
```

```
            StartCrawlerRequest crawlerRequest = StartCrawlerRequest.builder()
                .name(crawlerName)
                .build();

            glueClient.startCrawler(crawlerRequest);
            System.out.println(crawlerName + " was successfully started!");

        } catch (GlueException e) {
            throw e;
        }
    }

    /**
     * Retrieves the specific database from the AWS Glue service.
     *
     * @param glueClient   an instance of the AWS Glue client used to interact with
the service
     * @param databaseName the name of the database to retrieve
     * @throws GlueException if there is an error retrieving the database from the
AWS Glue service
     */
    public static void getSpecificDatabase(GlueClient glueClient, String
databaseName) {
        try {
            GetDatabaseRequest databasesRequest = GetDatabaseRequest.builder()
                .name(databaseName)
                .build();

            GetDatabaseResponse response = glueClient.getDatabase(databasesRequest);
            Instant createDate = response.database().createTime();

            // Convert the Instant to readable date.
            DateTimeFormatter formatter =
DateTimeFormatter.ofLocalizedDateTime(FormatStyle.SHORT)
                .withLocale(Locale.US)
                .withZone(ZoneId.systemDefault());

            formatter.format(createDate);
            System.out.println("The create date of the database is " + createDate);

        } catch (GlueException e) {
            throw e;
        }
    }
```

```
   /**
    * Retrieves the names of the tables in the specified Glue database.
    *
    * @param glueClient the Glue client to use for the operation
    * @param dbName     the name of the Glue database to retrieve the table names
from
    * @return the name of the first table retrieved, or an empty string if no
tables were found
    */
   public static String getGlueTables(GlueClient glueClient, String dbName) {
       String myTableName = "";
       try {
           GetTablesRequest tableRequest = GetTablesRequest.builder()
               .databaseName(dbName)
               .build();

           GetTablesResponse response = glueClient.getTables(tableRequest);
           List<Table> tables = response.tableList();
           if (tables.isEmpty()) {
               System.out.println("No tables were returned");
           } else {
               for (Table table : tables) {
                   myTableName = table.name();
                   System.out.println("Table name is: " + myTableName);
               }
           }

       } catch (GlueException e) {
           throw e;
       }
       return myTableName;
   }


   /**
    * Starts a job run in AWS Glue.
    *
    * @param glueClient    the AWS Glue client to use for the job run
    * @param jobName       the name of the Glue job to run
    * @param inputDatabase the name of the input database
    * @param inputTable    the name of the input table
    * @param outBucket     the URL of the output S3 bucket
```

```
     * @throws GlueException if there is an error starting the job run
     */
    public static void startJob(GlueClient glueClient, String jobName, String
inputDatabase, String inputTable,
                                String outBucket) {
        try {
            Map<String, String> myMap = new HashMap<>();
            myMap.put("--input_database", inputDatabase);
            myMap.put("--input_table", inputTable);
            myMap.put("--output_bucket_url", outBucket);

            StartJobRunRequest runRequest = StartJobRunRequest.builder()
                .workerType(WorkerType.G_1_X)
                .numberOfWorkers(10)
                .arguments(myMap)
                .jobName(jobName)
                .build();

            StartJobRunResponse response = glueClient.startJobRun(runRequest);
            System.out.println("The request Id of the job is " +
response.responseMetadata().requestId());

        } catch (GlueException e) {
            throw e;
        }
    }


    /**
     * Creates a new AWS Glue job.
     *
     * @param glueClient     the AWS Glue client to use for the operation
     * @param jobName        the name of the job to create
     * @param iam            the IAM role to associate with the job
     * @param scriptLocation the location of the script to be used by the job
     * @throws GlueException if there is an error creating the job
     */
    public static void createJob(GlueClient glueClient, String jobName, String iam,
String scriptLocation) {
        try {
            JobCommand command = JobCommand.builder()
                .pythonVersion("3")
                .name("glueetl")
                .scriptLocation(scriptLocation)
```

```
                .build();

            CreateJobRequest jobRequest = CreateJobRequest.builder()
                .description("A Job created by using the AWS SDK for Java V2")
                .glueVersion("2.0")
                .workerType(WorkerType.G_1_X)
                .numberOfWorkers(10)
                .name(jobName)
                .role(iam)
                .command(command)
                .build();

            glueClient.createJob(jobRequest);
            System.out.println(jobName + " was successfully created.");

        } catch (GlueException e) {
            throw e;
        }
    }


    /**
     * Retrieves and prints information about all the jobs in the Glue data catalog.
     *
     * @param glueClient the Glue client used to interact with the AWS Glue service
     */
    public static void getAllJobs(GlueClient glueClient) {
        try {
            GetJobsRequest jobsRequest = GetJobsRequest.builder()
                .maxResults(10)
                .build();

            GetJobsResponse jobsResponse = glueClient.getJobs(jobsRequest);
            List<Job> jobs = jobsResponse.jobs();
            for (Job job : jobs) {
                System.out.println("Job name is : " + job.name());
                System.out.println("The job worker type is : " +
job.workerType().name());
            }

        } catch (GlueException e) {
            throw e;
        }
    }
```

```
   /**
    * Retrieves the job runs for a given Glue job and prints the status of the job
runs.
    *
    * @param glueClient the Glue client used to make API calls
    * @param jobName    the name of the Glue job to retrieve the job runs for
    */
   public static void getJobRuns(GlueClient glueClient, String jobName) {
       try {
           GetJobRunsRequest runsRequest = GetJobRunsRequest.builder()
               .jobName(jobName)
               .maxResults(20)
               .build();

           boolean jobDone = false;
           while (!jobDone) {
               GetJobRunsResponse response = glueClient.getJobRuns(runsRequest);
               List<JobRun> jobRuns = response.jobRuns();
               for (JobRun jobRun : jobRuns) {
                   String jobState = jobRun.jobRunState().name();
                   if (jobState.compareTo("SUCCEEDED") == 0) {
                       System.out.println(jobName + " has succeeded");
                       jobDone = true;

                   } else if (jobState.compareTo("STOPPED") == 0) {
                       System.out.println("Job run has stopped");
                       jobDone = true;

                   } else if (jobState.compareTo("FAILED") == 0) {
                       System.out.println("Job run has failed");
                       jobDone = true;

                   } else if (jobState.compareTo("TIMEOUT") == 0) {
                       System.out.println("Job run has timed out");
                       jobDone = true;

                   } else {
                       System.out.println("*** Job run state is " +
jobRun.jobRunState().name());
                       System.out.println("Job run Id is " + jobRun.id());
                       System.out.println("The Glue version is " +
jobRun.glueVersion());
                   }
```

```
                    TimeUnit.SECONDS.sleep(5);
                }
            }

        } catch (GlueException e) {
            throw e;
        } catch (InterruptedException e) {
            throw new RuntimeException(e);
        }
    }


    /**
     * Deletes a Glue job.
     *
     * @param glueClient the Glue client to use for the operation
     * @param jobName    the name of the job to be deleted
     * @throws GlueException if there is an error deleting the job
     */
    public static void deleteJob(GlueClient glueClient, String jobName) {
        try {
            DeleteJobRequest jobRequest = DeleteJobRequest.builder()
                .jobName(jobName)
                .build();

            glueClient.deleteJob(jobRequest);
            System.out.println(jobName + " was successfully deleted");

        } catch (GlueException e) {
            throw e;
        }
    }

    /**
     * Deletes a AWS Glue Database.
     *
     * @param glueClient   An instance of the AWS Glue client used to interact with
the AWS Glue service.
     * @param databaseName The name of the database to be deleted.
     * @throws GlueException If an error occurs while deleting the database.
     */
    public static void deleteDatabase(GlueClient glueClient, String databaseName) {
        try {
            DeleteDatabaseRequest request = DeleteDatabaseRequest.builder()
```

```
                .name(databaseName)
                .build();

            glueClient.deleteDatabase(request);
            System.out.println(databaseName + " was successfully deleted");

        } catch (GlueException e) {
            throw e;
        }
    }


    /**
     * Deletes a specific AWS Glue crawler.
     *
     * @param glueClient  the AWS Glue client object
     * @param crawlerName the name of the crawler to be deleted
     * @throws GlueException if an error occurs during the deletion process
     */
    public static void deleteSpecificCrawler(GlueClient glueClient, String
crawlerName) {
        try {
            DeleteCrawlerRequest deleteCrawlerRequest =
DeleteCrawlerRequest.builder()
                .name(crawlerName)
                .build();

            glueClient.deleteCrawler(deleteCrawlerRequest);
            System.out.println(crawlerName + " was deleted");

        } catch (GlueException e) {
            throw e;
        }
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println("");
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
```

```
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateCrawler
  - CreateJob
  - DeleteCrawler
  - DeleteDatabase
  - DeleteJob
  - DeleteTable
  - GetCrawler
  - GetDatabase
  - GetDatabases
  - GetJob
  - GetJobRun
  - GetJobRuns
  - GetTables
  - ListJobs
  - StartCrawler
  - StartJobRun

Acciones

`CreateCrawler`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateCrawler`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates a new AWS Glue crawler using the AWS Glue Java API.
    *
    * @param glueClient  the AWS Glue client used to interact with the AWS Glue
service
    * @param iam         the IAM role that the crawler will use to access the data
source
    * @param s3Path      the S3 path that the crawler will scan for data
    * @param cron        the cron expression that defines the crawler's schedule
    * @param dbName      the name of the AWS Glue database where the crawler will
store the metadata
    * @param crawlerName the name of the crawler to be created
    */
   public static void createGlueCrawler(GlueClient glueClient,
                                        String iam,
                                        String s3Path,
                                        String cron,
                                        String dbName,
                                        String crawlerName) {

       try {
           S3Target s3Target = S3Target.builder()
               .path(s3Path)
               .build();

           List<S3Target> targetList = new ArrayList<>();
           targetList.add(s3Target);
           CrawlerTargets targets = CrawlerTargets.builder()
               .s3Targets(targetList)
               .build();

           CreateCrawlerRequest crawlerRequest = CreateCrawlerRequest.builder()
               .databaseName(dbName)
```

```
                .name(crawlerName)
                .description("Created by the AWS Glue Java API")
                .targets(targets)
                .role(iam)
                .schedule(cron)
                .build();

            glueClient.createCrawler(crawlerRequest);
            System.out.println(crawlerName + " was successfully created");

        } catch (GlueException e) {
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta CreateCrawlerla Referencia AWS SDK for Java 2.x de la API.

`CreateJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new AWS Glue job.
     *
     * @param glueClient     the AWS Glue client to use for the operation
     * @param jobName        the name of the job to create
     * @param iam            the IAM role to associate with the job
     * @param scriptLocation the location of the script to be used by the job
     * @throws GlueException if there is an error creating the job
     */
```

```
    public static void createJob(GlueClient glueClient, String jobName, String iam,
String scriptLocation) {
        try {
            JobCommand command = JobCommand.builder()
                .pythonVersion("3")
                .name("glueetl")
                .scriptLocation(scriptLocation)
                .build();

            CreateJobRequest jobRequest = CreateJobRequest.builder()
                .description("A Job created by using the AWS SDK for Java V2")
                .glueVersion("2.0")
                .workerType(WorkerType.G_1_X)
                .numberOfWorkers(10)
                .name(jobName)
                .role(iam)
                .command(command)
                .build();

            glueClient.createJob(jobRequest);
            System.out.println(jobName + " was successfully created.");

        } catch (GlueException e) {
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta CreateJobla Referencia AWS SDK for Java 2.x de la API.

`DeleteCrawler`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteCrawler`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a specific AWS Glue crawler.
     *
     * @param glueClient  the AWS Glue client object
     * @param crawlerName the name of the crawler to be deleted
     * @throws GlueException if an error occurs during the deletion process
     */
    public static void deleteSpecificCrawler(GlueClient glueClient, String
crawlerName) {
        try {
            DeleteCrawlerRequest deleteCrawlerRequest =
DeleteCrawlerRequest.builder()
                .name(crawlerName)
                .build();

            glueClient.deleteCrawler(deleteCrawlerRequest);
            System.out.println(crawlerName + " was deleted");

        } catch (GlueException e) {
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteCrawlerla Referencia AWS SDK for Java 2.x de la API.

`DeleteDatabase`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDatabase`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
```

```
     * Deletes a AWS Glue Database.
     *
     * @param glueClient   An instance of the AWS Glue client used to interact with
the AWS Glue service.
     * @param databaseName The name of the database to be deleted.
     * @throws GlueException If an error occurs while deleting the database.
     */
    public static void deleteDatabase(GlueClient glueClient, String databaseName) {
        try {
            DeleteDatabaseRequest request = DeleteDatabaseRequest.builder()
                .name(databaseName)
                .build();

            glueClient.deleteDatabase(request);
            System.out.println(databaseName + " was successfully deleted");

        } catch (GlueException e) {
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteDatabasela Referencia AWS SDK for Java 2.x de la API.

`DeleteJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a Glue job.
     *
```

```
     * @param glueClient the Glue client to use for the operation
     * @param jobName    the name of the job to be deleted
     * @throws GlueException if there is an error deleting the job
     */
    public static void deleteJob(GlueClient glueClient, String jobName) {
        try {
            DeleteJobRequest jobRequest = DeleteJobRequest.builder()
                .jobName(jobName)
                .build();

            glueClient.deleteJob(jobRequest);
            System.out.println(jobName + " was successfully deleted");

        } catch (GlueException e) {
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteJobla Referencia AWS SDK for Java 2.x de la API.

`GetCrawler`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetCrawler`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Retrieves a specific crawler from the AWS Glue service and waits for it to be
in the "READY" state.
     *
     * @param glueClient  the AWS Glue client used to interact with the Glue service
     * @param crawlerName the name of the crawler to be retrieved
     */
```

```
    public static void getSpecificCrawler(GlueClient glueClient, String crawlerName)
throws InterruptedException {
        try {
            GetCrawlerRequest crawlerRequest = GetCrawlerRequest.builder()
                .name(crawlerName)
                .build();

            boolean ready = false;
            while (!ready) {
                GetCrawlerResponse response = glueClient.getCrawler(crawlerRequest);
                String status = response.crawler().stateAsString();
                if (status.compareTo("READY") == 0) {
                    ready = true;
                }
                Thread.sleep(3000);
            }

            System.out.println("The crawler is now ready");

        } catch (GlueException | InterruptedException e) {
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta GetCrawlerla Referencia AWS SDK for Java 2.x de la API.

`GetDatabase`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetDatabase`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
```

```
    * Retrieves the specific database from the AWS Glue service.
    *
    * @param glueClient   an instance of the AWS Glue client used to interact with
the service
    * @param databaseName the name of the database to retrieve
    * @throws GlueException if there is an error retrieving the database from the
AWS Glue service
    */
   public static void getSpecificDatabase(GlueClient glueClient, String
databaseName) {
       try {
           GetDatabaseRequest databasesRequest = GetDatabaseRequest.builder()
               .name(databaseName)
               .build();

           GetDatabaseResponse response = glueClient.getDatabase(databasesRequest);
           Instant createDate = response.database().createTime();

           // Convert the Instant to readable date.
           DateTimeFormatter formatter =
DateTimeFormatter.ofLocalizedDateTime(FormatStyle.SHORT)
               .withLocale(Locale.US)
               .withZone(ZoneId.systemDefault());

           formatter.format(createDate);
           System.out.println("The create date of the database is " + createDate);

       } catch (GlueException e) {
           throw e;
       }
   }
```

- Para obtener más información sobre la API, consulta GetDatabasela Referencia AWS SDK for Java 2.x de la API.

`GetJobRuns`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetJobRuns`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Retrieves the job runs for a given Glue job and prints the status of the job
runs.
    *
    * @param glueClient the Glue client used to make API calls
    * @param jobName    the name of the Glue job to retrieve the job runs for
    */
   public static void getJobRuns(GlueClient glueClient, String jobName) {
       try {
           GetJobRunsRequest runsRequest = GetJobRunsRequest.builder()
               .jobName(jobName)
               .maxResults(20)
               .build();

           boolean jobDone = false;
           while (!jobDone) {
               GetJobRunsResponse response = glueClient.getJobRuns(runsRequest);
               List<JobRun> jobRuns = response.jobRuns();
               for (JobRun jobRun : jobRuns) {
                   String jobState = jobRun.jobRunState().name();
                   if (jobState.compareTo("SUCCEEDED") == 0) {
                       System.out.println(jobName + " has succeeded");
                       jobDone = true;

                   } else if (jobState.compareTo("STOPPED") == 0) {
                       System.out.println("Job run has stopped");
                       jobDone = true;

                   } else if (jobState.compareTo("FAILED") == 0) {
                       System.out.println("Job run has failed");
                       jobDone = true;

                   } else if (jobState.compareTo("TIMEOUT") == 0) {
                       System.out.println("Job run has timed out");
```

```
                        jobDone = true;

                    } else {
                        System.out.println("*** Job run state is " +
jobRun.jobRunState().name());
                        System.out.println("Job run Id is " + jobRun.id());
                        System.out.println("The Glue version is " +
jobRun.glueVersion());
                    }
                    TimeUnit.SECONDS.sleep(5);
                }
            }

        } catch (GlueException e) {
            throw e;
        } catch (InterruptedException e) {
            throw new RuntimeException(e);
        }
    }
```

- Para obtener más información sobre la API, consulta GetJobRunsla Referencia AWS SDK for Java 2.x de la API.

`GetTables`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetTables`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Retrieves the names of the tables in the specified Glue database.
     *
     * @param glueClient the Glue client to use for the operation
```

```
    * @param dbName     the name of the Glue database to retrieve the table names
from
    * @return the name of the first table retrieved, or an empty string if no
tables were found
    */
   public static String getGlueTables(GlueClient glueClient, String dbName) {
       String myTableName = "";
       try {
           GetTablesRequest tableRequest = GetTablesRequest.builder()
               .databaseName(dbName)
               .build();

           GetTablesResponse response = glueClient.getTables(tableRequest);
           List<Table> tables = response.tableList();
           if (tables.isEmpty()) {
               System.out.println("No tables were returned");
           } else {
               for (Table table : tables) {
                   myTableName = table.name();
                   System.out.println("Table name is: " + myTableName);
               }
           }

       } catch (GlueException e) {
           throw e;
       }
       return myTableName;
   }
```

- Para obtener más información sobre la API, consulta GetTablesla Referencia AWS SDK for Java 2.x de la API.

`StartCrawler`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartCrawler`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Starts a specific AWS Glue crawler.
     *
     * @param glueClient  the AWS Glue client to use for the crawler operation
     * @param crawlerName the name of the crawler to start
     * @throws GlueException if there is an error starting the crawler
     */
    public static void startSpecificCrawler(GlueClient glueClient, String
crawlerName) {
        try {
            StartCrawlerRequest crawlerRequest = StartCrawlerRequest.builder()
                .name(crawlerName)
                .build();

            glueClient.startCrawler(crawlerRequest);
            System.out.println(crawlerName + " was successfully started!");

        } catch (GlueException e) {
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta StartCrawlerla Referencia AWS SDK for Java 2.x de la API.

`StartJobRun`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartJobRun`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Starts a job run in AWS Glue.
    *
    * @param glueClient    the AWS Glue client to use for the job run
    * @param jobName       the name of the Glue job to run
    * @param inputDatabase the name of the input database
    * @param inputTable    the name of the input table
    * @param outBucket     the URL of the output S3 bucket
    * @throws GlueException if there is an error starting the job run
    */
   public static void startJob(GlueClient glueClient, String jobName, String
inputDatabase, String inputTable,
                               String outBucket) {
       try {
           Map<String, String> myMap = new HashMap<>();
           myMap.put("--input_database", inputDatabase);
           myMap.put("--input_table", inputTable);
           myMap.put("--output_bucket_url", outBucket);

           StartJobRunRequest runRequest = StartJobRunRequest.builder()
               .workerType(WorkerType.G_1_X)
               .numberOfWorkers(10)
               .arguments(myMap)
               .jobName(jobName)
               .build();

           StartJobRunResponse response = glueClient.startJobRun(runRequest);
           System.out.println("The request Id of the job is " +
response.responseMetadata().requestId());

       } catch (GlueException e) {
           throw e;
       }
```

```
    }
```

- Para obtener más información sobre la API, consulta StartJobRunla Referencia AWS SDK for Java 2.x de la API.

HealthImaging ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with HealthImaging.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`CopyImageSet`

En el siguiente ejemplo de código, se muestra cómo utilizar `CopyImageSet`.

SDK para Java 2.x

```
/**
 * Copy an AWS HealthImaging image set.
 *
 * @param medicalImagingClient  - The AWS HealthImaging client object.
 * @param datastoreId           - The datastore ID.
 * @param imageSetId            - The image set ID.
```

```
    * @param latestVersionId       - The version ID.
    * @param destinationImageSetId - The optional destination image set ID, ignored
if null.
    * @param destinationVersionId  - The optional destination version ID, ignored
if null.
    * @param force                 - The force flag.
    * @param subsets               - The optional subsets to copy, ignored if null.
    * @return                      - The image set ID of the copy.
    * @throws MedicalImagingException - Base exception for all service exceptions
thrown by AWS HealthImaging.
    */
   public static String copyMedicalImageSet(MedicalImagingClient
medicalImagingClient,
                                            String datastoreId,
                                            String imageSetId,
                                            String latestVersionId,
                                            String destinationImageSetId,
                                            String destinationVersionId,
                                            boolean force,
                                            Vector<String> subsets) {

       try {
           CopySourceImageSetInformation.Builder copySourceImageSetInformation =
CopySourceImageSetInformation.builder()
                   .latestVersionId(latestVersionId);

           // Optionally copy a subset of image instances.
           if (subsets != null) {
               String subsetInstanceToCopy = getCopiableAttributesJSON(imageSetId,
subsets);
               copySourceImageSetInformation.dicomCopies(MetadataCopies.builder()
                       .copiableAttributes(subsetInstanceToCopy)
                       .build());
           }

           CopyImageSetInformation.Builder copyImageSetBuilder =
CopyImageSetInformation.builder()
                   .sourceImageSet(copySourceImageSetInformation.build());

           // Optionally designate a destination image set.
           if (destinationImageSetId != null) {
               copyImageSetBuilder =
copyImageSetBuilder.destinationImageSet(CopyDestinationImageSet.builder()
                       .imageSetId(destinationImageSetId)
```

```
                        .latestVersionId(destinationVersionId)
                        .build());
            }

            CopyImageSetRequest copyImageSetRequest = CopyImageSetRequest.builder()
                    .datastoreId(datastoreId)
                    .sourceImageSetId(imageSetId)
                    .copyImageSetInformation(copyImageSetBuilder.build())
                    .force(force)
                    .build();

            CopyImageSetResponse response =
medicalImagingClient.copyImageSet(copyImageSetRequest);

            return response.destinationImageSetProperties().imageSetId();
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            throw e;
        }
    }
```

Función de utilidad para crear atributos copiables.

```
    /**
     * Create a JSON string of copiable image instances.
     *
     * @param imageSetId - The image set ID.
     * @param subsets    - The subsets to copy.
     * @return A JSON string of copiable image instances.
     */
    private static String getCopiableAttributesJSON(String imageSetId,
Vector<String> subsets) {
        StringBuilder subsetInstanceToCopy = new StringBuilder(
                """
                        {
                          "SchemaVersion": 1.1,
                          "Study": {
                            "Series": {
                                "
                                 """
        );
```

```
        subsetInstanceToCopy.append(imageSetId);

        subsetInstanceToCopy.append(
                """
                                ": {
                                "Instances": {
                        """
        );

        for (String subset : subsets) {
            subsetInstanceToCopy.append('"' + subset + "\": {},");
        }
        subsetInstanceToCopy.deleteCharAt(subsetInstanceToCopy.length() - 1);
        subsetInstanceToCopy.append("""
                         }
                       }
                     }
                   }
                 }
                 """);
        return subsetInstanceToCopy.toString();
    }
```

- Para obtener más información sobre la API, consulte CopyImageSetla Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`CreateDatastore`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDatastore`.

SDK para Java 2.x

```
    public static String createMedicalImageDatastore(MedicalImagingClient
medicalImagingClient,
```

```
            String datastoreName) {
        try {
            CreateDatastoreRequest datastoreRequest =
CreateDatastoreRequest.builder()
                    .datastoreName(datastoreName)
                    .build();
            CreateDatastoreResponse response =
medicalImagingClient.createDatastore(datastoreRequest);
            return response.datastoreId();
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return "";
    }
```

- Para obtener más información sobre la API, consulta CreateDatastorela Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`DeleteDatastore`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDatastore`.

SDK para Java 2.x

```
    public static void deleteMedicalImagingDatastore(MedicalImagingClient
medicalImagingClient,
            String datastoreID) {
        try {
            DeleteDatastoreRequest datastoreRequest =
DeleteDatastoreRequest.builder()
                    .datastoreId(datastoreID)
                    .build();
            medicalImagingClient.deleteDatastore(datastoreRequest);
```

```
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteDatastorela Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`DeleteImageSet`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteImageSet`.

SDK para Java 2.x

```
   public static void deleteMedicalImageSet(MedicalImagingClient
medicalImagingClient,
            String datastoreId,
            String imagesetId) {
        try {
            DeleteImageSetRequest deleteImageSetRequest =
DeleteImageSetRequest.builder()
                    .datastoreId(datastoreId)
                    .imageSetId(imagesetId)
                    .build();

            medicalImagingClient.deleteImageSet(deleteImageSetRequest);

            System.out.println("The image set was deleted.");
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteImageSetla Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`GetDICOMImportJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetDICOMImportJob`.

SDK para Java 2.x

```
   public static DICOMImportJobProperties getDicomImportJob(MedicalImagingClient
medicalImagingClient,
           String datastoreId,
           String jobId) {

       try {
           GetDicomImportJobRequest getDicomImportJobRequest =
GetDicomImportJobRequest.builder()
                   .datastoreId(datastoreId)
                   .jobId(jobId)
                   .build();
           GetDicomImportJobResponse response =
medicalImagingClient.getDICOMImportJob(getDicomImportJobRequest);
           return response.jobProperties();
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

- Para obtener más información sobre la API, consulta Get DICOMImport Job in AWS SDK for Java 2.x API Reference.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`GetDatastore`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetDatastore`.

SDK para Java 2.x

```
   public static DatastoreProperties getMedicalImageDatastore(MedicalImagingClient
medicalImagingClient,
           String datastoreID) {
       try {
           GetDatastoreRequest datastoreRequest = GetDatastoreRequest.builder()
                   .datastoreId(datastoreID)
                   .build();
           GetDatastoreResponse response =
medicalImagingClient.getDatastore(datastoreRequest);
           return response.datastoreProperties();
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

- Para obtener más información sobre la API, consulta GetDatastorela Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`GetImageFrame`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetImageFrame`.

SDK para Java 2.x

```
       public static void getMedicalImageSetFrame(MedicalImagingClient
medicalImagingClient,
                        String destinationPath,
                        String datastoreId,
                        String imagesetId,
                        String imageFrameId) {

                try {
                        GetImageFrameRequest getImageSetMetadataRequest =
GetImageFrameRequest.builder()
                                        .datastoreId(datastoreId)
                                        .imageSetId(imagesetId)

.imageFrameInformation(ImageFrameInformation.builder()
                                                        .imageFrameId(imageFrameId)
                                                        .build())
                                        .build();

medicalImagingClient.getImageFrame(getImageSetMetadataRequest,

FileSystems.getDefault().getPath(destinationPath));

                        System.out.println("Image frame downloaded to " +
destinationPath);
                } catch (MedicalImagingException e) {
                        System.err.println(e.awsErrorDetails().errorMessage());
                        System.exit(1);
                }
        }
```

- Para obtener más información sobre la API, consulta GetImageFramela Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`GetImageSet`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetImageSet`.

SDK para Java 2.x

```
   public static GetImageSetResponse getMedicalImageSet(MedicalImagingClient
medicalImagingClient,
           String datastoreId,
           String imagesetId,
           String versionId) {
       try {
           GetImageSetRequest.Builder getImageSetRequestBuilder =
GetImageSetRequest.builder()
                   .datastoreId(datastoreId)
                   .imageSetId(imagesetId);

           if (versionId != null) {
               getImageSetRequestBuilder =
getImageSetRequestBuilder.versionId(versionId);
           }

           return
medicalImagingClient.getImageSet(getImageSetRequestBuilder.build());
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

- Para obtener más información sobre la API, consulta GetImageSetla Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`GetImageSetMetadata`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetImageSetMetadata`.

SDK para Java 2.x

```
   public static void getMedicalImageSetMetadata(MedicalImagingClient
medicalImagingClient,
           String destinationPath,
           String datastoreId,
           String imagesetId,
           String versionId) {

       try {
           GetImageSetMetadataRequest.Builder getImageSetMetadataRequestBuilder =
GetImageSetMetadataRequest.builder()
                   .datastoreId(datastoreId)
                   .imageSetId(imagesetId);

           if (versionId != null) {
               getImageSetMetadataRequestBuilder =
getImageSetMetadataRequestBuilder.versionId(versionId);
           }


medicalImagingClient.getImageSetMetadata(getImageSetMetadataRequestBuilder.build(),
                   FileSystems.getDefault().getPath(destinationPath));

           System.out.println("Metadata downloaded to " + destinationPath);
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta GetImageSetMetadatala Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`ListDICOMImportJobs`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListDICOMImportJobs`.

SDK para Java 2.x

```
   public static List<DICOMImportJobSummary>
listDicomImportJobs(MedicalImagingClient medicalImagingClient,
           String datastoreId) {

       try {
           ListDicomImportJobsRequest listDicomImportJobsRequest =
ListDicomImportJobsRequest.builder()
                   .datastoreId(datastoreId)
                   .build();
           ListDicomImportJobsResponse response =
medicalImagingClient.listDICOMImportJobs(listDicomImportJobsRequest);
           return response.jobSummaries();
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return new ArrayList<>();
   }
```

- Para obtener más información sobre la API, consulta Listar DICOMImport trabajos en la referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`ListDatastores`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListDatastores`.

SDK para Java 2.x

```
   public static List<DatastoreSummary>
listMedicalImagingDatastores(MedicalImagingClient medicalImagingClient) {
       try {
           ListDatastoresRequest datastoreRequest = ListDatastoresRequest.builder()
                   .build();
           ListDatastoresIterable responses =
medicalImagingClient.listDatastoresPaginator(datastoreRequest);
           List<DatastoreSummary> datastoreSummaries = new ArrayList<>();

           responses.stream().forEach(response ->
datastoreSummaries.addAll(response.datastoreSummaries()));

           return datastoreSummaries;
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

- Para obtener más información sobre la API, consulta ListDatastoresla Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`ListImageSetVersions`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListImageSetVersions`.

SDK para Java 2.x

```
   public static List<ImageSetProperties>
listMedicalImageSetVersions(MedicalImagingClient medicalImagingClient,
           String datastoreId,
           String imagesetId) {
       try {
           ListImageSetVersionsRequest getImageSetRequest =
ListImageSetVersionsRequest.builder()
                   .datastoreId(datastoreId)
                   .imageSetId(imagesetId)
                   .build();

           ListImageSetVersionsIterable responses = medicalImagingClient
                   .listImageSetVersionsPaginator(getImageSetRequest);
           List<ImageSetProperties> imageSetProperties = new ArrayList<>();
           responses.stream().forEach(response ->
imageSetProperties.addAll(response.imageSetPropertiesList()));

           return imageSetProperties;
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

- Para obtener más información sobre la API, consulta ListImageSetVersionsla Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`ListTagsForResource`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListTagsForResource`.

SDK para Java 2.x

```
   public static ListTagsForResourceResponse
listMedicalImagingResourceTags(MedicalImagingClient medicalImagingClient,
           String resourceArn) {
       try {
           ListTagsForResourceRequest listTagsForResourceRequest =
ListTagsForResourceRequest.builder()
                   .resourceArn(resourceArn)
                   .build();

           return
medicalImagingClient.listTagsForResource(listTagsForResourceRequest);
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

- Para obtener más información sobre la API, consulta ListTagsForResourcela Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`SearchImageSets`

En el siguiente ejemplo de código, se muestra cómo utilizar `SearchImageSets`.

SDK para Java 2.x

La función de utilidad para buscar conjuntos de imágenes.

```
   public static List<ImageSetsMetadataSummary> searchMedicalImagingImageSets(
           MedicalImagingClient medicalImagingClient,
           String datastoreId, SearchCriteria searchCriteria) {
       try {
           SearchImageSetsRequest datastoreRequest =
SearchImageSetsRequest.builder()
                   .datastoreId(datastoreId)
                   .searchCriteria(searchCriteria)
                   .build();
           SearchImageSetsIterable responses = medicalImagingClient
                   .searchImageSetsPaginator(datastoreRequest);
           List<ImageSetsMetadataSummary> imageSetsMetadataSummaries = new
ArrayList<>();

           responses.stream().forEach(response -> imageSetsMetadataSummaries
                   .addAll(response.imageSetsMetadataSummaries()));

           return imageSetsMetadataSummaries;
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

Caso de uso núm. 1: operador IGUAL.

```
       List<SearchFilter> searchFilters =
Collections.singletonList(SearchFilter.builder()
               .operator(Operator.EQUAL)
               .values(SearchByAttributeValue.builder()
                       .dicomPatientId(patientId)
                       .build())
               .build());

       SearchCriteria searchCriteria = SearchCriteria.builder()
               .filters(searchFilters)
               .build();

       List<ImageSetsMetadataSummary> imageSetsMetadataSummaries =
searchMedicalImagingImageSets(
```

```
                medicalImagingClient,
                datastoreId, searchCriteria);
        if (imageSetsMetadataSummaries != null) {
            System.out.println("The image sets for patient " + patientId + " are:\n"
                    + imageSetsMetadataSummaries);
            System.out.println();
        }
```

Caso de uso #2: el operador BETWEEN usa DICOMStudy fecha y DICOMStudy hora.

```
        DateTimeFormatter formatter = DateTimeFormatter.ofPattern("yyyyMMdd");
        searchFilters = Collections.singletonList(SearchFilter.builder()
                .operator(Operator.BETWEEN)
                .values(SearchByAttributeValue.builder()

.dicomStudyDateAndTime(DICOMStudyDateAndTime.builder()
                                        .dicomStudyDate("19990101")
                                        .dicomStudyTime("000000.000")
                                        .build())
                                .build(),
                        SearchByAttributeValue.builder()

.dicomStudyDateAndTime(DICOMStudyDateAndTime.builder()
                                        .dicomStudyDate((LocalDate.now()
                                                .format(formatter)))
                                        .dicomStudyTime("000000.000")
                                        .build())
                                .build())
                .build());

        searchCriteria = SearchCriteria.builder()
                .filters(searchFilters)
                .build();

        imageSetsMetadataSummaries =
searchMedicalImagingImageSets(medicalImagingClient,
                datastoreId, searchCriteria);
        if (imageSetsMetadataSummaries != null) {
            System.out.println(
                    "The image sets searched with BETWEEN operator using
DICOMStudyDate and DICOMStudyTime are:\n"
                            +
```

```
                        imageSetsMetadataSummaries);
            System.out.println();
        }
```

Caso de uso núm. 3: el operador ENTRE usa CreatedAt. Los estudios de tiempo se habían mantenido previamente.

```
        searchFilters = Collections.singletonList(SearchFilter.builder()
                .operator(Operator.BETWEEN)
                .values(SearchByAttributeValue.builder()
                                .createdAt(Instant.parse("1985-04-12T23:20:50.52Z"))
                                .build(),
                        SearchByAttributeValue.builder()
                                .createdAt(Instant.now())
                                .build())
                .build());

        searchCriteria = SearchCriteria.builder()
                .filters(searchFilters)
                .build();
        imageSetsMetadataSummaries =
searchMedicalImagingImageSets(medicalImagingClient,
                datastoreId, searchCriteria);
        if (imageSetsMetadataSummaries != null) {
            System.out.println("The image sets searched with BETWEEN operator using
createdAt are:\n "
                    + imageSetsMetadataSummaries);
            System.out.println();
        }
```

Caso de uso #4: operador EQUAL en DICOMSeries InstanceUID y BETWEEN en UpdatedAt y ordena la respuesta en orden ASC en el campo UpdatedAt.

```
        Instant startDate = Instant.parse("1985-04-12T23:20:50.52Z");
        Instant endDate = Instant.now();

        searchFilters = Arrays.asList(
                SearchFilter.builder()
                        .operator(Operator.EQUAL)
                        .values(SearchByAttributeValue.builder()
```

```
                                .dicomSeriesInstanceUID(seriesInstanceUID)
                                .build())
                        .build(),
                SearchFilter.builder()
                        .operator(Operator.BETWEEN)
                        .values(

SearchByAttributeValue.builder().updatedAt(startDate).build(),

SearchByAttributeValue.builder().updatedAt(endDate).build()
                        ).build());

        Sort sort =
Sort.builder().sortOrder(SortOrder.ASC).sortField(SortField.UPDATED_AT).build();

        searchCriteria = SearchCriteria.builder()
                .filters(searchFilters)
                .sort(sort)
                .build();

        imageSetsMetadataSummaries =
searchMedicalImagingImageSets(medicalImagingClient,
                datastoreId, searchCriteria);
        if (imageSetsMetadataSummaries != null) {
            System.out.println("The image sets searched with EQUAL operator on
DICOMSeriesInstanceUID and BETWEEN on updatedAt and sort response\n" +
                    "in ASC order on updatedAt field are:\n "
                    + imageSetsMetadataSummaries);
            System.out.println();
        }
```

- Para obtener más información sobre la API, consulta la Referencia de la API. SearchImageSetsAWS SDK for Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`StartDICOMImportJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartDICOMImportJob`.

SDK para Java 2.x

```
   public static String startDicomImportJob(MedicalImagingClient
medicalImagingClient,
           String jobName,
           String datastoreId,
           String dataAccessRoleArn,
           String inputS3Uri,
           String outputS3Uri) {

       try {
           StartDicomImportJobRequest startDicomImportJobRequest =
StartDicomImportJobRequest.builder()
                   .jobName(jobName)
                   .datastoreId(datastoreId)
                   .dataAccessRoleArn(dataAccessRoleArn)
                   .inputS3Uri(inputS3Uri)
                   .outputS3Uri(outputS3Uri)
                   .build();
           StartDicomImportJobResponse response =
medicalImagingClient.startDICOMImportJob(startDicomImportJobRequest);
           return response.jobId();
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return "";
   }
```

- Para obtener más información sobre la API, consulta Start DICOMImport Job in AWS SDK for Java 2.x API Reference.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`TagResource`

En el siguiente ejemplo de código, se muestra cómo utilizar `TagResource`.

SDK para Java 2.x

```
   public static void tagMedicalImagingResource(MedicalImagingClient
medicalImagingClient,
           String resourceArn,
           Map<String, String> tags) {
       try {
           TagResourceRequest tagResourceRequest = TagResourceRequest.builder()
                   .resourceArn(resourceArn)
                   .tags(tags)
                   .build();

           medicalImagingClient.tagResource(tagResourceRequest);

           System.out.println("Tags have been added to the resource.");
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta TagResourcela Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`UntagResource`

En el siguiente ejemplo de código, se muestra cómo utilizar `UntagResource`.

SDK para Java 2.x

```
   public static void untagMedicalImagingResource(MedicalImagingClient
medicalImagingClient,
           String resourceArn,
           Collection<String> tagKeys) {
       try {
           UntagResourceRequest untagResourceRequest =
UntagResourceRequest.builder()
                   .resourceArn(resourceArn)
                   .tagKeys(tagKeys)
                   .build();

           medicalImagingClient.untagResource(untagResourceRequest);

           System.out.println("Tags have been removed from the resource.");
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta UntagResourcela Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

`UpdateImageSetMetadata`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateImageSetMetadata`.

SDK para Java 2.x

```
   /**
    * Update the metadata of an AWS HealthImaging image set.
    *
```

```
    * @param medicalImagingClient - The AWS HealthImaging client object.
    * @param datastoreId          - The datastore ID.
    * @param imageSetId           - The image set ID.
    * @param versionId            - The version ID.
    * @param metadataUpdates      - A MetadataUpdates object containing the
updates.
    * @param force                - The force flag.
    * @throws MedicalImagingException - Base exception for all service exceptions
thrown by AWS HealthImaging.
    */
   public static void updateMedicalImageSetMetadata(MedicalImagingClient
medicalImagingClient,
                                                    String datastoreId,
                                                    String imageSetId,
                                                    String versionId,
                                                    MetadataUpdates
metadataUpdates,
                                                    boolean force) {
       try {
           UpdateImageSetMetadataRequest updateImageSetMetadataRequest =
UpdateImageSetMetadataRequest
                   .builder()
                   .datastoreId(datastoreId)
                   .imageSetId(imageSetId)
                   .latestVersionId(versionId)
                   .updateImageSetMetadataUpdates(metadataUpdates)
                   .force(force)
                   .build();

           UpdateImageSetMetadataResponse response =
medicalImagingClient.updateImageSetMetadata(updateImageSetMetadataRequest);

           System.out.println("The image set metadata was updated" + response);
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           throw e;
       }
   }
```

Caso de uso 1: Insertar o actualizar un atributo.

```
               final String insertAttributes = """
```

```
                        {
                          "SchemaVersion": 1.1,
                          "Study": {
                            "DICOM": {
                              "StudyDescription": "CT CHEST"
                            }
                          }
                        }
                        """;
                MetadataUpdates metadataInsertUpdates = MetadataUpdates.builder()
                        .dicomUpdates(DICOMUpdates.builder()
                                .updatableAttributes(SdkBytes.fromByteBuffer(
                                        ByteBuffer.wrap(insertAttributes
                                                .getBytes(StandardCharsets.UTF_8))))
                                .build())
                        .build();

                updateMedicalImageSetMetadata(medicalImagingClient, datastoreId,
imagesetId,
                        versionid, metadataInsertUpdates, force);
```

Caso de uso n.º 2: eliminar un atributo.

```
                final String removeAttributes = """
                        {
                          "SchemaVersion": 1.1,
                          "Study": {
                            "DICOM": {
                              "StudyDescription": "CT CHEST"
                            }
                          }
                        }
                        """;
                MetadataUpdates metadataRemoveUpdates = MetadataUpdates.builder()
                        .dicomUpdates(DICOMUpdates.builder()
                                .removableAttributes(SdkBytes.fromByteBuffer(
                                        ByteBuffer.wrap(removeAttributes
                                                .getBytes(StandardCharsets.UTF_8))))
                                .build())
                        .build();
```

```
                updateMedicalImageSetMetadata(medicalImagingClient, datastoreId,
imagesetId,
                        versionid, metadataRemoveUpdates, force);
```

Caso de uso n.º 3: eliminar una instancia.

```
                final String removeInstance = """
                        {
                          "SchemaVersion": 1.1,
                          "Study": {
                            "Series": {
                              "1.1.1.1.1.1.12345.123456789012.123.12345678901234.1":
{
                                "Instances": {

"1.1.1.1.1.1.12345.123456789012.123.12345678901234.1": {}
                                }
                              }
                            }
                          }
                        }
                        """;
                MetadataUpdates metadataRemoveUpdates = MetadataUpdates.builder()
                        .dicomUpdates(DICOMUpdates.builder()
                                .removableAttributes(SdkBytes.fromByteBuffer(
                                        ByteBuffer.wrap(removeInstance
                                                .getBytes(StandardCharsets.UTF_8))))
                                .build())
                        .build();

                updateMedicalImageSetMetadata(medicalImagingClient, datastoreId,
imagesetId,
                        versionid, metadataRemoveUpdates, force);
```

Caso de uso 4: Revertir a una versión anterior.

```
                // In this case, revert to previous version.
                String revertVersionId =
Integer.toString(Integer.parseInt(versionid) - 1);
                MetadataUpdates metadataRemoveUpdates = MetadataUpdates.builder()
                        .revertToVersionId(revertVersionId)
```

```
                        .build();
                updateMedicalImageSetMetadata(medicalImagingClient, datastoreId,
imagesetId,
                        versionid, metadataRemoveUpdates, force);
```

- Para obtener más información sobre la API, consulta UpdateImageSetMetadatala Referencia AWS SDK for Java 2.x de la API.

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Escenarios

Etiquetar un almacén de datos

El siguiente ejemplo de código muestra cómo etiquetar un banco HealthImaging de datos.

SDK para Java 2.x

Para etiquetar un almacén de datos

```
                final String datastoreArn = "arn:aws:medical-imaging:us-
east-1:123456789012:datastore/12345678901234567890123456789012";

                TagResource.tagMedicalImagingResource(medicalImagingClient,
 datastoreArn,
                                ImmutableMap.of("Deployment", "Development"));
```

Función de utilidad para etiquetar un recurso.

```
   public static void tagMedicalImagingResource(MedicalImagingClient
medicalImagingClient,
           String resourceArn,
           Map<String, String> tags) {
       try {
           TagResourceRequest tagResourceRequest = TagResourceRequest.builder()
```

```
                    .resourceArn(resourceArn)
                    .tags(tags)
                    .build();

            medicalImagingClient.tagResource(tagResourceRequest);

            System.out.println("Tags have been added to the resource.");
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Para enumerar las etiquetas de almacenes de datos

```
                final String datastoreArn = "arn:aws:medical-imaging:us-
east-1:123456789012:datastore/12345678901234567890123456789012";

                ListTagsForResourceResponse result =
 ListTagsForResource.listMedicalImagingResourceTags(
                                medicalImagingClient,
                                datastoreArn);
                if (result != null) {
                        System.out.println("Tags for resource: " + result.tags());
                }
```

La función de utilidad para enumerar las etiquetas de un recurso.

```
    public static ListTagsForResourceResponse
 listMedicalImagingResourceTags(MedicalImagingClient medicalImagingClient,
            String resourceArn) {
        try {
            ListTagsForResourceRequest listTagsForResourceRequest =
 ListTagsForResourceRequest.builder()
                    .resourceArn(resourceArn)
                    .build();

            return
 medicalImagingClient.listTagsForResource(listTagsForResourceRequest);
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }

        return null;
    }
```

Para desetiquetar un almacén de datos

```
                final String datastoreArn = "arn:aws:medical-imaging:us-
east-1:123456789012:datastore/12345678901234567890123456789012";

                UntagResource.untagMedicalImagingResource(medicalImagingClient,
 datastoreArn,
                                Collections.singletonList("Deployment"));
```

La función de utilidad para eliminar la etiqueta de un recurso.

```
   public static void untagMedicalImagingResource(MedicalImagingClient
 medicalImagingClient,
            String resourceArn,
            Collection<String> tagKeys) {
        try {
            UntagResourceRequest untagResourceRequest =
 UntagResourceRequest.builder()
                    .resourceArn(resourceArn)
                    .tagKeys(tagKeys)
                    .build();

            medicalImagingClient.untagResource(untagResourceRequest);

            System.out.println("Tags have been removed from the resource.");
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .

- ListTagsForResource
- TagResource
- UntagResource

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Etiquetar un conjunto de imágenes

El siguiente ejemplo de código muestra cómo etiquetar un conjunto HealthImaging de imágenes.

SDK para Java 2.x

Para etiquetar un conjunto de imágenes

```
                final String imageSetArn = "arn:aws:medical-imaging:us-
east-1:123456789012:datastore/12345678901234567890123456789012/
imageset/12345678901234567890123456789012";

                TagResource.tagMedicalImagingResource(medicalImagingClient,
 imageSetArn,
                                ImmutableMap.of("Deployment", "Development"));
```

Función de utilidad para etiquetar un recurso.

```
   public static void tagMedicalImagingResource(MedicalImagingClient
 medicalImagingClient,
           String resourceArn,
           Map<String, String> tags) {
       try {
           TagResourceRequest tagResourceRequest = TagResourceRequest.builder()
                   .resourceArn(resourceArn)
                   .tags(tags)
                   .build();

           medicalImagingClient.tagResource(tagResourceRequest);
```

```
            System.out.println("Tags have been added to the resource.");
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Para enumerar las etiquetas de un conjunto de imágenes

```
                final String imageSetArn = "arn:aws:medical-imaging:us-
east-1:123456789012:datastore/12345678901234567890123456789012/
imageset/12345678901234567890123456789012";

                ListTagsForResourceResponse result =
 ListTagsForResource.listMedicalImagingResourceTags(
                                medicalImagingClient,
                                imageSetArn);
                if (result != null) {
                        System.out.println("Tags for resource: " + result.tags());
                }
```

La función de utilidad para enumerar las etiquetas de un recurso.

```
    public static ListTagsForResourceResponse
 listMedicalImagingResourceTags(MedicalImagingClient medicalImagingClient,
            String resourceArn) {
        try {
            ListTagsForResourceRequest listTagsForResourceRequest =
 ListTagsForResourceRequest.builder()
                    .resourceArn(resourceArn)
                    .build();

            return
 medicalImagingClient.listTagsForResource(listTagsForResourceRequest);
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return null;
```

```
    }
```

Para desetiquetar un conjunto de imágenes

```
                final String imageSetArn = "arn:aws:medical-imaging:us-
east-1:123456789012:datastore/12345678901234567890123456789012/
imageset/12345678901234567890123456789012";

                UntagResource.untagMedicalImagingResource(medicalImagingClient,
 imageSetArn,
                                Collections.singletonList("Deployment"));
```

La función de utilidad para eliminar la etiqueta de un recurso.

```
   public static void untagMedicalImagingResource(MedicalImagingClient
 medicalImagingClient,
            String resourceArn,
            Collection<String> tagKeys) {
        try {
            UntagResourceRequest untagResourceRequest =
 UntagResourceRequest.builder()
                    .resourceArn(resourceArn)
                    .tagKeys(tagKeys)
                    .build();

            medicalImagingClient.untagResource(untagResourceRequest);

            System.out.println("Tags have been removed from the resource.");
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
   }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - ListTagsForResource
  - TagResource

- UntagResource

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejemplos de IAM usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso de AWS SDK for Java 2.x IAM.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios

Introducción

Introducción a IAM

El siguiente ejemplo de código muestra cómo empezar a utilizar IAM.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.ListPoliciesResponse;
import software.amazon.awssdk.services.iam.model.Policy;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloIAM {
    public static void main(String[] args) {
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        listPolicies(iam);
    }

    public static void listPolicies(IamClient iam) {
        ListPoliciesResponse response = iam.listPolicies();
        List<Policy> polList = response.policies();
        polList.forEach(policy -> {
            System.out.println("Policy Name: " + policy.policyName());
        });
    }
}
```

- Para obtener más información sobre la API, consulta ListPolicieslа Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo crear un usuario y asumir un rol.

> **Warning**
>
> Para evitar riesgos de seguridad, no utilice a los usuarios de IAM para la autenticación cuando desarrolle software especialmente diseñado o trabaje con datos reales. En cambio, utilice la federación con un proveedor de identidades como AWS IAM Identity Center.

- Crear un usuario que no tenga permisos.
- Crear un rol que conceda permiso para enumerar los buckets de Amazon S3 para la cuenta.
- Agregar una política para que el usuario asuma el rol.
- Asumir el rol y enumerar los buckets de S3 con credenciales temporales, y después limpiar los recursos.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Cree funciones que encapsulen las acciones del usuario de IAM.

```
/*
  To run this Java V2 code example, set up your development environment, including
 your credentials.

  For information, see this documentation topic:
```

```
  https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html

  This example performs these operations:

  1. Creates a user that has no permissions.
  2. Creates a role and policy that grants Amazon S3 permissions.
  3. Creates a role.
  4. Grants the user permissions.
  5. Gets temporary credentials by assuming the role.  Creates an Amazon S3 Service
 client object with the temporary credentials.
  6. Deletes the resources.
 */

public class IAMScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    public static final String PolicyDocument = "{" +
            "  \"Version\": \"2012-10-17\"," +
            "  \"Statement\": [" +
            "    {" +
            "        \"Effect\": \"Allow\"," +
            "        \"Action\": [" +
            "            \"s3:*\"" +
            "       ]," +
            "       \"Resource\": \"*\"" +
            "    }" +
            "   ]" +
            "}";

    public static String userArn;

    public static void main(String[] args) throws Exception {

        final String usage = """

                Usage:
                    <username> <policyName> <roleName> <roleSessionName>
 <bucketName>\s

                Where:
                    username - The name of the IAM user to create.\s
                    policyName - The name of the policy to create.\s
                    roleName - The name of the role to create.\s
                    roleSessionName - The name of the session required for the
 assumeRole operation.\s
```

```
                    bucketName - The name of the Amazon S3 bucket from which objects
are read.\s
                """;

        if (args.length != 5) {
            System.out.println(usage);
            System.exit(1);
        }

        String userName = args[0];
        String policyName = args[1];
        String roleName = args[2];
        String roleSessionName = args[3];
        String bucketName = args[4];

        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the AWS IAM example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(" 1. Create the IAM user.");
        User createUser = createIAMUser(iam, userName);

        System.out.println(DASHES);
        userArn = createUser.arn();

        AccessKey myKey = createIAMAccessKey(iam, userName);
        String accessKey = myKey.accessKeyId();
        String secretKey = myKey.secretAccessKey();
        String assumeRolePolicyDocument = "{" +
                "\"Version\": \"2012-10-17\"," +
                "\"Statement\": [{" +
                "\"Effect\": \"Allow\"," +
                "\"Principal\": {" +
                " \"AWS\": \"" + userArn + "\"" +
                "}," +
                "\"Action\": \"sts:AssumeRole\"" +
                "}]" +
                "}";
```

```
        System.out.println(assumeRolePolicyDocument);
        System.out.println(userName + " was successfully created.");
        System.out.println(DASHES);
        System.out.println("2. Creates a policy.");
        String polArn = createIAMPolicy(iam, policyName);
        System.out.println("The policy " + polArn + " was successfully created.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Creates a role.");
        TimeUnit.SECONDS.sleep(30);
        String roleArn = createIAMRole(iam, roleName, assumeRolePolicyDocument);
        System.out.println(roleArn + " was successfully created.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Grants the user permissions.");
        attachIAMRolePolicy(iam, roleName, polArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("*** Wait for 30 secs so the resource is available");
        TimeUnit.SECONDS.sleep(30);
        System.out.println("5. Gets temporary credentials by assuming the role.");
        System.out.println("Perform an Amazon S3 Service operation using the
temporary credentials.");
        assumeRole(roleArn, roleSessionName, bucketName, accessKey, secretKey);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6 Getting ready to delete the AWS resources");
        deleteKey(iam, userName, accessKey);
        deleteRole(iam, roleName, polArn);
        deleteIAMUser(iam, userName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("This IAM Scenario has successfully completed");
        System.out.println(DASHES);
    }

    public static AccessKey createIAMAccessKey(IamClient iam, String user) {
        try {
```

```
            CreateAccessKeyRequest request = CreateAccessKeyRequest.builder()
                    .userName(user)
                    .build();

            CreateAccessKeyResponse response = iam.createAccessKey(request);
            return response.accessKey();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    public static User createIAMUser(IamClient iam, String username) {
        try {
            // Create an IamWaiter object
            IamWaiter iamWaiter = iam.waiter();
            CreateUserRequest request = CreateUserRequest.builder()
                    .userName(username)
                    .build();

            // Wait until the user is created.
            CreateUserResponse response = iam.createUser(request);
            GetUserRequest userRequest = GetUserRequest.builder()
                    .userName(response.user().userName())
                    .build();

            WaiterResponse<GetUserResponse> waitUntilUserExists =
iamWaiter.waitUntilUserExists(userRequest);
            waitUntilUserExists.matched().response().ifPresent(System.out::println);
            return response.user();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    public static String createIAMRole(IamClient iam, String rolename, String json)
{

        try {
```

```
            CreateRoleRequest request = CreateRoleRequest.builder()
                    .roleName(rolename)
                    .assumeRolePolicyDocument(json)
                    .description("Created using the AWS SDK for Java")
                    .build();

            CreateRoleResponse response = iam.createRole(request);
            System.out.println("The ARN of the role is " + response.role().arn());
            return response.role().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createIAMPolicy(IamClient iam, String policyName) {
        try {
            // Create an IamWaiter object.
            IamWaiter iamWaiter = iam.waiter();
            CreatePolicyRequest request = CreatePolicyRequest.builder()
                    .policyName(policyName)
                    .policyDocument(PolicyDocument).build();

            CreatePolicyResponse response = iam.createPolicy(request);
            GetPolicyRequest polRequest = GetPolicyRequest.builder()
                    .policyArn(response.policy().arn())
                    .build();

            WaiterResponse<GetPolicyResponse> waitUntilPolicyExists =
iamWaiter.waitUntilPolicyExists(polRequest);

waitUntilPolicyExists.matched().response().ifPresent(System.out::println);
            return response.policy().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

```
   public static void attachIAMRolePolicy(IamClient iam, String roleName, String
policyArn) {
       try {
           ListAttachedRolePoliciesRequest request =
ListAttachedRolePoliciesRequest.builder()
                   .roleName(roleName)
                   .build();

           ListAttachedRolePoliciesResponse response =
iam.listAttachedRolePolicies(request);
           List<AttachedPolicy> attachedPolicies = response.attachedPolicies();
           String polArn;
           for (AttachedPolicy policy : attachedPolicies) {
               polArn = policy.policyArn();
               if (polArn.compareTo(policyArn) == 0) {
                   System.out.println(roleName + " policy is already attached to
this role.");
                   return;
               }
           }

           AttachRolePolicyRequest attachRequest =
AttachRolePolicyRequest.builder()
                   .roleName(roleName)
                   .policyArn(policyArn)
                   .build();

           iam.attachRolePolicy(attachRequest);
           System.out.println("Successfully attached policy " + policyArn + " to
role " + roleName);

       } catch (IamException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }

   // Invoke an Amazon S3 operation using the Assumed Role.
   public static void assumeRole(String roleArn, String roleSessionName, String
bucketName, String keyVal,
           String keySecret) {

       // Use the creds of the new IAM user that was created in this code example.
```

```
        AwsBasicCredentials credentials = AwsBasicCredentials.create(keyVal,
keySecret);
        StsClient stsClient = StsClient.builder()
                .region(Region.US_EAST_1)
                .credentialsProvider(StaticCredentialsProvider.create(credentials))
                .build();

        try {
            AssumeRoleRequest roleRequest = AssumeRoleRequest.builder()
                    .roleArn(roleArn)
                    .roleSessionName(roleSessionName)
                    .build();

            AssumeRoleResponse roleResponse = stsClient.assumeRole(roleRequest);
            Credentials myCreds = roleResponse.credentials();
            String key = myCreds.accessKeyId();
            String secKey = myCreds.secretAccessKey();
            String secToken = myCreds.sessionToken();

            // List all objects in an Amazon S3 bucket using the temp creds
retrieved by
            // invoking assumeRole.
            Region region = Region.US_EAST_1;
            S3Client s3 = S3Client.builder()
                    .credentialsProvider(

StaticCredentialsProvider.create(AwsSessionCredentials.create(key, secKey,
secToken)))
                    .region(region)
                    .build();

            System.out.println("Created a S3Client using temp credentials.");
            System.out.println("Listing objects in " + bucketName);
            ListObjectsRequest listObjects = ListObjectsRequest.builder()
                    .bucket(bucketName)
                    .build();

            ListObjectsResponse res = s3.listObjects(listObjects);
            List<S3Object> objects = res.contents();
            for (S3Object myValue : objects) {
                System.out.println("The name of the key is " + myValue.key());
                System.out.println("The owner is " + myValue.owner());
            }
```

```
        } catch (StsException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void deleteRole(IamClient iam, String roleName, String polArn) {

        try {
            // First the policy needs to be detached.
            DetachRolePolicyRequest rolePolicyRequest =
DetachRolePolicyRequest.builder()
                    .policyArn(polArn)
                    .roleName(roleName)
                    .build();

            iam.detachRolePolicy(rolePolicyRequest);

            // Delete the policy.
            DeletePolicyRequest request = DeletePolicyRequest.builder()
                    .policyArn(polArn)
                    .build();

            iam.deletePolicy(request);
            System.out.println("*** Successfully deleted " + polArn);

            // Delete the role.
            DeleteRoleRequest roleRequest = DeleteRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            iam.deleteRole(roleRequest);
            System.out.println("*** Successfully deleted " + roleName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteKey(IamClient iam, String username, String accessKey) {
        try {
            DeleteAccessKeyRequest request = DeleteAccessKeyRequest.builder()
                    .accessKeyId(accessKey)
```

```
                    .userName(username)
                    .build();

            iam.deleteAccessKey(request);
            System.out.println("Successfully deleted access key " + accessKey +
                    " from user " + username);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteIAMUser(IamClient iam, String userName) {
        try {
            DeleteUserRequest request = DeleteUserRequest.builder()
                    .userName(userName)
                    .build();

            iam.deleteUser(request);
            System.out.println("*** Successfully deleted " + userName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - AttachRolePolicy
  - CreateAccessKey
  - CreatePolicy
  - CreateRole
  - CreateUser
  - DeleteAccessKey
  - DeletePolicy
  - DeleteRole

- DeleteUser
- DeleteUserPolicy
- DetachRolePolicy
- PutUserPolicy

Acciones

`AttachRolePolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `AttachRolePolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.AttachRolePolicyRequest;
import software.amazon.awssdk.services.iam.model.AttachedPolicy;
import software.amazon.awssdk.services.iam.model.ListAttachedRolePoliciesRequest;
import software.amazon.awssdk.services.iam.model.ListAttachedRolePoliciesResponse;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class AttachRolePolicy {
    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:
                    <roleName> <policyArn>\s

                Where:
                    roleName - A role name that you can obtain from the AWS
Management Console.\s
                    policyArn - A policy ARN that you can obtain from the AWS
Management Console.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String roleName = args[0];
        String policyArn = args[1];

        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        attachIAMRolePolicy(iam, roleName, policyArn);
        iam.close();
    }

    public static void attachIAMRolePolicy(IamClient iam, String roleName, String
policyArn) {
        try {
            ListAttachedRolePoliciesRequest request =
ListAttachedRolePoliciesRequest.builder()
                    .roleName(roleName)
                    .build();

            ListAttachedRolePoliciesResponse response =
iam.listAttachedRolePolicies(request);
            List<AttachedPolicy> attachedPolicies = response.attachedPolicies();

            // Ensure that the policy is not attached to this role
            String polArn = "";
            for (AttachedPolicy policy : attachedPolicies) {
                polArn = policy.policyArn();
                if (polArn.compareTo(policyArn) == 0) {
```

```
                    System.out.println(roleName + " policy is already attached to
 this role.");
                    return;
                }
            }

            AttachRolePolicyRequest attachRequest =
 AttachRolePolicyRequest.builder()
                    .roleName(roleName)
                    .policyArn(policyArn)
                    .build();

            iam.attachRolePolicy(attachRequest);

            System.out.println("Successfully attached policy " + policyArn +
                    " to role " + roleName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }
}
```

- Para obtener más información sobre la API, consulta AttachRolePolicyla Referencia AWS SDK for Java 2.x de la API.

`CreateAccessKey`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateAccessKey`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.iam.model.CreateAccessKeyRequest;
import software.amazon.awssdk.services.iam.model.CreateAccessKeyResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateAccessKey {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                   <user>\s

                Where:
                   user - An AWS IAM user that you can obtain from the AWS
 Management Console.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String user = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        String keyId = createIAMAccessKey(iam, user);
        System.out.println("The Key Id is " + keyId);
        iam.close();
    }

    public static String createIAMAccessKey(IamClient iam, String user) {
```

```
        try {
            CreateAccessKeyRequest request = CreateAccessKeyRequest.builder()
                    .userName(user)
                    .build();

            CreateAccessKeyResponse response = iam.createAccessKey(request);
            return response.accessKey().accessKeyId();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulta CreateAccessKeyla Referencia AWS SDK for Java 2.x de la API.

`CreateAccountAlias`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateAccountAlias`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.iam.model.CreateAccountAliasRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateAccountAlias {
    public static void main(String[] args) {
        final String usage = """
                Usage:
                    <alias>\s

                Where:
                    alias - The account alias to create (for example, myawsaccount).
\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String alias = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        createIAMAccountAlias(iam, alias);
        iam.close();
        System.out.println("Done");
    }

    public static void createIAMAccountAlias(IamClient iam, String alias) {
        try {
            CreateAccountAliasRequest request = CreateAccountAliasRequest.builder()
                    .accountAlias(alias)
                    .build();

            iam.createAccountAlias(request);
            System.out.println("Successfully created account alias: " + alias);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }
}
```

- Para obtener más información sobre la API, consulta CreateAccountAliasla Referencia AWS SDK for Java 2.x de la API.

`CreatePolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreatePolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.services.iam.model.CreatePolicyRequest;
import software.amazon.awssdk.services.iam.model.CreatePolicyResponse;
import software.amazon.awssdk.services.iam.model.GetPolicyRequest;
import software.amazon.awssdk.services.iam.model.GetPolicyResponse;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.waiters.IamWaiter;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreatePolicy {

    public static final String PolicyDocument = "{" +
            "  \"Version\": \"2012-10-17\"," +
```

```
            "  \"Statement\": [" +
            "    {" +
            "        \"Effect\": \"Allow\"," +
            "        \"Action\": [" +
            "            \"dynamodb:DeleteItem\"," +
            "            \"dynamodb:GetItem\"," +
            "            \"dynamodb:PutItem\"," +
            "            \"dynamodb:Scan\"," +
            "            \"dynamodb:UpdateItem\"" +
            "       ]," +
            "       \"Resource\": \"*\"" +
            "    }" +
            "   ]" +
            "}";

   public static void main(String[] args) {

       final String usage = """
               Usage:
                   CreatePolicy <policyName>\s

               Where:
                   policyName - A unique policy name.\s
               """;

       if (args.length != 1) {
           System.out.println(usage);
           System.exit(1);
       }

       String policyName = args[0];
       Region region = Region.AWS_GLOBAL;
       IamClient iam = IamClient.builder()
               .region(region)
               .build();

       String result = createIAMPolicy(iam, policyName);
       System.out.println("Successfully created a policy with this ARN value: " +
result);
       iam.close();
   }

   public static String createIAMPolicy(IamClient iam, String policyName) {
       try {
```

```
            // Create an IamWaiter object.
            IamWaiter iamWaiter = iam.waiter();

            CreatePolicyRequest request = CreatePolicyRequest.builder()
                    .policyName(policyName)
                    .policyDocument(PolicyDocument)
                    .build();

            CreatePolicyResponse response = iam.createPolicy(request);

            // Wait until the policy is created.
            GetPolicyRequest polRequest = GetPolicyRequest.builder()
                    .policyArn(response.policy().arn())
                    .build();

            WaiterResponse<GetPolicyResponse> waitUntilPolicyExists =
 iamWaiter.waitUntilPolicyExists(polRequest);

 waitUntilPolicyExists.matched().response().ifPresent(System.out::println);
            return response.policy().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulta CreatePolicyla Referencia AWS SDK for Java 2.x de la API.

`CreateRole`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateRole`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import org.json.simple.JSONObject;
import org.json.simple.parser.JSONParser;
import software.amazon.awssdk.services.iam.model.CreateRoleRequest;
import software.amazon.awssdk.services.iam.model.CreateRoleResponse;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import java.io.FileReader;

/*
*   This example requires a trust policy document. For more information, see:
*   https://aws.amazon.com/blogs/security/how-to-use-trust-policies-with-iam-roles/
*
*
*  In addition, set up your development environment, including your credentials.
*
*  For information, see this documentation topic:
*
*  https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class CreateRole {
    public static void main(String[] args) throws Exception {
        final String usage = """
                Usage:
                    <rolename> <fileLocation>\s

                Where:
                    rolename - The name of the role to create.\s
                    fileLocation - The location of the JSON document that represents
 the trust policy.\s
                """;

        if (args.length != 2) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        String rolename = args[0];
        String fileLocation = args[1];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        String result = createIAMRole(iam, rolename, fileLocation);
        System.out.println("Successfully created user: " + result);
        iam.close();
    }

    public static String createIAMRole(IamClient iam, String rolename, String
 fileLocation) throws Exception {
        try {
            JSONObject jsonObject = (JSONObject) readJsonSimpleDemo(fileLocation);
            CreateRoleRequest request = CreateRoleRequest.builder()
                    .roleName(rolename)
                    .assumeRolePolicyDocument(jsonObject.toJSONString())
                    .description("Created using the AWS SDK for Java")
                    .build();

            CreateRoleResponse response = iam.createRole(request);
            System.out.println("The ARN of the role is " + response.role().arn());

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static Object readJsonSimpleDemo(String filename) throws Exception {
        FileReader reader = new FileReader(filename);
        JSONParser jsonParser = new JSONParser();
        return jsonParser.parse(reader);
    }
}
```

- Para obtener más información sobre la API, consulta CreateRolela Referencia AWS SDK for Java 2.x de la API.

`CreateUser`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateUser`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.services.iam.model.CreateUserRequest;
import software.amazon.awssdk.services.iam.model.CreateUserResponse;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.waiters.IamWaiter;
import software.amazon.awssdk.services.iam.model.GetUserRequest;
import software.amazon.awssdk.services.iam.model.GetUserResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateUser {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <username>\s

                Where:
                    username - The name of the user to create.\s
```

```
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String username = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        String result = createIAMUser(iam, username);
        System.out.println("Successfully created user: " + result);
        iam.close();
    }

    public static String createIAMUser(IamClient iam, String username) {
        try {
            // Create an IamWaiter object.
            IamWaiter iamWaiter = iam.waiter();

            CreateUserRequest request = CreateUserRequest.builder()
                    .userName(username)
                    .build();

            CreateUserResponse response = iam.createUser(request);

            // Wait until the user is created.
            GetUserRequest userRequest = GetUserRequest.builder()
                    .userName(response.user().userName())
                    .build();

            WaiterResponse<GetUserResponse> waitUntilUserExists =
iamWaiter.waitUntilUserExists(userRequest);
            waitUntilUserExists.matched().response().ifPresent(System.out::println);
            return response.user().userName();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
```

```
    }
}
```

- Para obtener más información sobre la API, consulta CreateUserla Referencia AWS SDK for Java 2.x de la API.

`DeleteAccessKey`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteAccessKey`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.DeleteAccessKeyRequest;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteAccessKey {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <username> <accessKey>\s

                Where:
                    username - The name of the user.\s
```

```
                    accessKey - The access key ID for the secret access key you want
 to delete.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String username = args[0];
        String accessKey = args[1];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();
        deleteKey(iam, username, accessKey);
        iam.close();
    }

    public static void deleteKey(IamClient iam, String username, String accessKey) {
        try {
            DeleteAccessKeyRequest request = DeleteAccessKeyRequest.builder()
                    .accessKeyId(accessKey)
                    .userName(username)
                    .build();

            iam.deleteAccessKey(request);
            System.out.println("Successfully deleted access key " + accessKey +
                    " from user " + username);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteAccessKeyla Referencia AWS SDK for Java 2.x de la API.

`DeleteAccountAlias`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteAccountAlias`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.iam.model.DeleteAccountAliasRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteAccountAlias {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <alias>\s

                Where:
                    alias - The account alias to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String alias = args[0];
        Region region = Region.AWS_GLOBAL;
```

```
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        deleteIAMAccountAlias(iam, alias);
        iam.close();
    }

    public static void deleteIAMAccountAlias(IamClient iam, String alias) {
        try {
            DeleteAccountAliasRequest request = DeleteAccountAliasRequest.builder()
                    .accountAlias(alias)
                    .build();

            iam.deleteAccountAlias(request);
            System.out.println("Successfully deleted account alias " + alias);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }
}
```

- Para obtener más información sobre la API, consulta DeleteAccountAliasla Referencia AWS SDK for Java 2.x de la API.

`DeletePolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeletePolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.iam.model.DeletePolicyRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeletePolicy {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <policyARN>\s

                Where:
                    policyARN - A policy ARN value to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String policyARN = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        deleteIAMPolicy(iam, policyARN);
        iam.close();
    }

    public static void deleteIAMPolicy(IamClient iam, String policyARN) {
        try {
            DeletePolicyRequest request = DeletePolicyRequest.builder()
                    .policyArn(policyARN)
```

```
                    .build();

            iam.deletePolicy(request);
            System.out.println("Successfully deleted the policy");

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }
}
```

- Para obtener más información sobre la API, consulta DeletePolicyla Referencia AWS SDK for Java 2.x de la API.

`DeleteUser`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteUser`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.DeleteUserRequest;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class DeleteUser {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <userName>\s

                Where:
                    userName - The name of the user to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String userName = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        deleteIAMUser(iam, userName);
        System.out.println("Done");
        iam.close();
    }

    public static void deleteIAMUser(IamClient iam, String userName) {
        try {
            DeleteUserRequest request = DeleteUserRequest.builder()
                    .userName(userName)
                    .build();

            iam.deleteUser(request);
            System.out.println("Successfully deleted IAM user " + userName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteUserla Referencia AWS SDK for Java 2.x de la API.

`DetachRolePolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `DetachRolePolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.iam.model.DetachRolePolicyRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetachRolePolicy {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <roleName> <policyArn>\s

                Where:
                    roleName - A role name that you can obtain from the AWS
 Management Console.\s
```

```
                    policyArn - A policy ARN that you can obtain from the AWS
 Management Console.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String roleName = args[0];
        String policyArn = args[1];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();
        detachPolicy(iam, roleName, policyArn);
        System.out.println("Done");
        iam.close();
    }

    public static void detachPolicy(IamClient iam, String roleName, String
 policyArn) {
        try {
            DetachRolePolicyRequest request = DetachRolePolicyRequest.builder()
                    .roleName(roleName)
                    .policyArn(policyArn)
                    .build();

            iam.detachRolePolicy(request);
            System.out.println("Successfully detached policy " + policyArn +
                    " from role " + roleName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DetachRolePolicyla Referencia AWS SDK for Java 2.x de la API.

`ListAccessKeys`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListAccessKeys`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.iam.model.AccessKeyMetadata;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.ListAccessKeysRequest;
import software.amazon.awssdk.services.iam.model.ListAccessKeysResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListAccessKeys {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <userName>\s

                Where:
                    userName - The name of the user for which access keys are
 retrieved.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }
```

```
        String userName = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        listKeys(iam, userName);
        System.out.println("Done");
        iam.close();
    }

    public static void listKeys(IamClient iam, String userName) {
        try {
            boolean done = false;
            String newMarker = null;

            while (!done) {
                ListAccessKeysResponse response;

                if (newMarker == null) {
                    ListAccessKeysRequest request = ListAccessKeysRequest.builder()
                            .userName(userName)
                            .build();

                    response = iam.listAccessKeys(request);

                } else {
                    ListAccessKeysRequest request = ListAccessKeysRequest.builder()
                            .userName(userName)
                            .marker(newMarker)
                            .build();

                    response = iam.listAccessKeys(request);
                }

                for (AccessKeyMetadata metadata : response.accessKeyMetadata()) {
                    System.out.format("Retrieved access key %s",
metadata.accessKeyId());
                }

                if (!response.isTruncated()) {
                    done = true;
                } else {
```

```
                    newMarker = response.marker();
                }
            }

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListAccessKeysla Referencia AWS SDK for Java 2.x de la API.

`ListAccountAliases`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListAccountAliases`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.ListAccountAliasesResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListAccountAliases {
```

```
    public static void main(String[] args) {
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        listAliases(iam);
        System.out.println("Done");
        iam.close();
    }

    public static void listAliases(IamClient iam) {
        try {
            ListAccountAliasesResponse response = iam.listAccountAliases();
            for (String alias : response.accountAliases()) {
                System.out.printf("Retrieved account alias %s", alias);
            }

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListAccountAliasesla Referencia AWS SDK for Java 2.x de la API.

`ListUsers`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListUsers`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.iam.model.AttachedPermissionsBoundary;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.ListUsersRequest;
import software.amazon.awssdk.services.iam.model.ListUsersResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.User;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListUsers {
    public static void main(String[] args) {
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        listAllUsers(iam);
        System.out.println("Done");
        iam.close();
    }

    public static void listAllUsers(IamClient iam) {
        try {
            boolean done = false;
            String newMarker = null;
            while (!done) {
                ListUsersResponse response;
                if (newMarker == null) {
                    ListUsersRequest request = ListUsersRequest.builder().build();
                    response = iam.listUsers(request);
                } else {
                    ListUsersRequest request = ListUsersRequest.builder()
                            .marker(newMarker)
                            .build();

                    response = iam.listUsers(request);
```

```
                }

                for (User user : response.users()) {
                    System.out.format("\n Retrieved user %s", user.userName());
                    AttachedPermissionsBoundary permissionsBoundary =
 user.permissionsBoundary();
                    if (permissionsBoundary != null)
                        System.out.format("\n Permissions boundary details %s",

 permissionsBoundary.permissionsBoundaryTypeAsString());
                }

                if (!response.isTruncated()) {
                    done = true;
                } else {
                    newMarker = response.marker();
                }
            }

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListUsersla Referencia AWS SDK for Java 2.x de la API.

`UpdateAccessKey`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateAccessKey`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.StatusType;
import software.amazon.awssdk.services.iam.model.UpdateAccessKeyRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class UpdateAccessKey {

    private static StatusType statusType;

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <username> <accessId> <status>\s

                Where:
                    username - The name of the user whose key you want to update.\s
                    accessId - The access key ID of the secret access key you want
 to update.\s
                    status - The status you want to assign to the secret access key.
\s
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String username = args[0];
        String accessId = args[1];
        String status = args[2];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
```

```
                .build();

        updateKey(iam, username, accessId, status);
        System.out.println("Done");
        iam.close();
    }

    public static void updateKey(IamClient iam, String username, String accessId,
 String status) {
        try {
            if (status.toLowerCase().equalsIgnoreCase("active")) {
                statusType = StatusType.ACTIVE;
            } else if (status.toLowerCase().equalsIgnoreCase("inactive")) {
                statusType = StatusType.INACTIVE;
            } else {
                statusType = StatusType.UNKNOWN_TO_SDK_VERSION;
            }

            UpdateAccessKeyRequest request = UpdateAccessKeyRequest.builder()
                    .accessKeyId(accessId)
                    .userName(username)
                    .status(statusType)
                    .build();

            iam.updateAccessKey(request);
            System.out.printf("Successfully updated the status of access key %s to"
 +
                    "status %s for user %s", accessId, status, username);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta UpdateAccessKeyla Referencia AWS SDK for Java 2.x de la API.

`UpdateUser`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateUser`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.UpdateUserRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class UpdateUser {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <curName> <newName>\s

                Where:
                    curName - The current user name.\s
                    newName - An updated user name.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String curName = args[0];
        String newName = args[1];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
```

```
                .region(region)
                .build();

        updateIAMUser(iam, curName, newName);
        System.out.println("Done");
        iam.close();
    }

    public static void updateIAMUser(IamClient iam, String curName, String newName)
 {
        try {
            UpdateUserRequest request = UpdateUserRequest.builder()
                    .userName(curName)
                    .newUserName(newName)
                    .build();

            iam.updateUser(request);
            System.out.printf("Successfully updated user to username %s", newName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta UpdateUserla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación y administración de un servicio resiliente

El siguiente ejemplo de código muestra cómo crear un servicio web con equilibrio de carga que muestre recomendaciones de libros, películas y canciones. El ejemplo muestra cómo responde el servicio a los errores y cómo reestructurarlo para aumentar la resiliencia cuando se produzcan errores.

- Utilice un grupo de Amazon EC2 Auto Scaling para crear instancias de Amazon Elastic Compute Cloud (Amazon EC2) basadas en una plantilla de lanzamiento y para mantener el número de instancias dentro de un rango específico.
- Administre y distribuya las solicitudes HTTP con Elastic Load Balancing.
- Supervise el estado de las instancias de un grupo de escalado automático y reenvíe las solicitudes solo a las instancias en buen estado.
- Ejecute un servidor web Python en cada instancia de EC2 para administrar las solicitudes HTTP. El servidor web responde con recomendaciones y comprobaciones de estado.
- Simule un servicio de recomendaciones con una tabla de Amazon DynamoDB.
- Controle la respuesta del servidor web a las solicitudes y las comprobaciones de estado actualizando AWS Systems Manager los parámetros.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute el escenario interactivo en un símbolo del sistema.

```
public class Main {

    public static final String fileName = "C:\\AWS\\resworkflow\
\recommendations.json"; // Modify file location.
    public static final String tableName = "doc-example-recommendation-service";
    public static final String startScript = "C:\\AWS\\resworkflow\
\server_startup_script.sh"; // Modify file location.
    public static final String policyFile = "C:\\AWS\\resworkflow\
\instance_policy.json"; // Modify file location.
    public static final String ssmJSON = "C:\\AWS\\resworkflow\
\ssm_only_policy.json"; // Modify file location.
    public static final String failureResponse = "doc-example-resilient-
architecture-failure-response";
    public static final String healthCheck = "doc-example-resilient-architecture-
health-check";
    public static final String templateName = "doc-example-resilience-template";
    public static final String roleName = "doc-example-resilience-role";
```

```
    public static final String policyName = "doc-example-resilience-pol";
    public static final String profileName = "doc-example-resilience-prof";

    public static final String badCredsProfileName = "doc-example-resilience-prof-
bc";

    public static final String targetGroupName = "doc-example-resilience-tg";
    public static final String autoScalingGroupName = "doc-example-resilience-
group";
    public static final String lbName = "doc-example-resilience-lb";
    public static final String protocol = "HTTP";
    public static final int port = 80;

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws IOException, InterruptedException
 {
        Scanner in = new Scanner(System.in);
        Database database = new Database();
        AutoScaler autoScaler = new AutoScaler();
        LoadBalancer loadBalancer = new LoadBalancer();

        System.out.println(DASHES);
        System.out.println("Welcome to the demonstration of How to Build and Manage
 a Resilient Service!");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("A - SETUP THE RESOURCES");
        System.out.println("Press Enter when you're ready to start deploying
 resources.");
        in.nextLine();
        deploy(loadBalancer);
        System.out.println(DASHES);
        System.out.println(DASHES);
        System.out.println("B - DEMO THE RESILIENCE FUNCTIONALITY");
        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        demo(loadBalancer);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("C - DELETE THE RESOURCES");
        System.out.println("""
```

```
                This concludes the demo of how to build and manage a resilient
service.
                To keep things tidy and to avoid unwanted charges on your account,
we can clean up all AWS resources
                that were created for this demo.
                """);

        System.out.println("\n Do you want to delete the resources (y/n)? ");
        String userInput = in.nextLine().trim().toLowerCase(); // Capture user input

        if (userInput.equals("y")) {
            // Delete resources here
            deleteResources(loadBalancer, autoScaler, database);
            System.out.println("Resources deleted.");
        } else {
            System.out.println("""
                    Okay, we'll leave the resources intact.
                    Don't forget to delete them when you're done with them or you
might incur unexpected charges.
                    """);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The example has completed. ");
        System.out.println("\n Thanks for watching!");
        System.out.println(DASHES);
    }

    // Deletes the AWS resources used in this example.
    private static void deleteResources(LoadBalancer loadBalancer, AutoScaler
autoScaler, Database database)
            throws IOException, InterruptedException {
        loadBalancer.deleteLoadBalancer(lbName);
        System.out.println("*** Wait 30 secs for resource to be deleted");
        TimeUnit.SECONDS.sleep(30);
        loadBalancer.deleteTargetGroup(targetGroupName);
        autoScaler.deleteAutoScaleGroup(autoScalingGroupName);
        autoScaler.deleteRolesPolicies(policyName, roleName, profileName);
        autoScaler.deleteTemplate(templateName);
        database.deleteTable(tableName);
    }
```

```
   private static void deploy(LoadBalancer loadBalancer) throws
InterruptedException, IOException {
       Scanner in = new Scanner(System.in);
       System.out.println(
               """
                       For this demo, we'll use the AWS SDK for Java (v2) to create
several AWS resources
                       to set up a load-balanced web service endpoint and explore
some ways to make it resilient
                       against various kinds of failures.

                       Some of the resources create by this demo are:
                       \t* A DynamoDB table that the web service depends on to
provide book, movie, and song recommendations.
                       \t* An EC2 launch template that defines EC2 instances that
each contain a Python web server.
                       \t* An EC2 Auto Scaling group that manages EC2 instances
across several Availability Zones.
                       \t* An Elastic Load Balancing (ELB) load balancer that
targets the Auto Scaling group to distribute requests.
                       """);

       System.out.println("Press Enter when you're ready.");
       in.nextLine();
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("Creating and populating a DynamoDB table named " +
tableName);
       Database database = new Database();
       database.createTable(tableName, fileName);
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("""
               Creating an EC2 launch template that runs '{startup_script}' when an
instance starts.
               This script starts a Python web server defined in the `server.py`
script. The web server
               listens to HTTP requests on port 80 and responds to requests to '/'
and to '/healthcheck'.
               For demo purposes, this server is run as the root user. In
production, the best practice is to
               run a web server, such as Apache, with least-privileged credentials.
```

```
                The template also defines an IAM policy that each instance uses to
assume a role that grants
                permissions to access the DynamoDB recommendation table and Systems
Manager parameters
                that control the flow of the demo.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        templateCreator.createTemplate(policyFile, policyName, profileName,
startScript, templateName, roleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(
                "Creating an EC2 Auto Scaling group that maintains three EC2
instances, each in a different Availability Zone.");
        System.out.println("*** Wait 30 secs for the VPC to be created");
        TimeUnit.SECONDS.sleep(30);
        AutoScaler autoScaler = new AutoScaler();
        String[] zones = autoScaler.createGroup(3, templateName,
autoScalingGroupName);

        System.out.println("""
                At this point, you have EC2 instances created. Once each instance
starts, it listens for
                HTTP requests. You can see these instances in the console or
continue with the demo.
                Press Enter when you're ready to continue.
                """);

        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Creating variables that control the flow of the demo.");
        ParameterHelper paramHelper = new ParameterHelper();
        paramHelper.reset();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
                Creating an Elastic Load Balancing target group and load balancer.
The target group
```

```
                defines how the load balancer connects to instances. The load
balancer provides a
                single endpoint where clients connect and dispatches requests to
instances in the group.
                """);

        String vpcId = autoScaler.getDefaultVPC();
        List<Subnet> subnets = autoScaler.getSubnets(vpcId, zones);
        System.out.println("You have retrieved a list with " + subnets.size() + "
subnets");
        String targetGroupArn = loadBalancer.createTargetGroup(protocol, port,
vpcId, targetGroupName);
        String elbDnsName = loadBalancer.createLoadBalancer(subnets, targetGroupArn,
lbName, port, protocol);
        autoScaler.attachLoadBalancerTargetGroup(autoScalingGroupName,
targetGroupArn);
        System.out.println("Verifying access to the load balancer endpoint...");
        boolean wasSuccessul = loadBalancer.verifyLoadBalancerEndpoint(elbDnsName);
        if (!wasSuccessul) {
            System.out.println("Couldn't connect to the load balancer, verifying
that the port is open...");
            CloseableHttpClient httpClient = HttpClients.createDefault();

            // Create an HTTP GET request to "http://checkip.amazonaws.com"
            HttpGet httpGet = new HttpGet("http://checkip.amazonaws.com");
            try {
                // Execute the request and get the response
                HttpResponse response = httpClient.execute(httpGet);

                // Read the response content.
                String ipAddress =
IOUtils.toString(response.getEntity().getContent(), StandardCharsets.UTF_8).trim();

                // Print the public IP address.
                System.out.println("Public IP Address: " + ipAddress);
                GroupInfo groupInfo = autoScaler.verifyInboundPort(vpcId, port,
ipAddress);
                if (!groupInfo.isPortOpen()) {
                    System.out.println("""
                            For this example to work, the default security group for
your default VPC must
                            allow access from this computer. You can either add it
automatically from this
```

```
                            example or add it yourself using the AWS Management
Console.
                            """);

                    System.out.println(
                            "Do you want to add a rule to security group " +
groupInfo.getGroupName() + " to allow");
                    System.out.println("inbound traffic on port " + port + " from
your computer's IP address (y/n) ");
                    String ans = in.nextLine();
                    if ("y".equalsIgnoreCase(ans)) {
                        autoScaler.openInboundPort(groupInfo.getGroupName(),
String.valueOf(port), ipAddress);
                        System.out.println("Security group rule added.");
                    } else {
                        System.out.println("No security group rule added.");
                    }
                }

            } catch (AutoScalingException e) {
                e.printStackTrace();
            }
        } else if (wasSuccessul) {
            System.out.println("Your load balancer is ready. You can access it by
browsing to:");
            System.out.println("\t http://" + elbDnsName);
        } else {
            System.out.println("Couldn't get a successful response from the load
balancer endpoint. Troubleshoot by");
            System.out.println("manually verifying that your VPC and security group
are configured correctly and that");
            System.out.println("you can successfully make a GET request to the load
balancer.");
        }

        System.out.println("Press Enter when you're ready to continue with the
demo.");
        in.nextLine();
    }

    // A method that controls the demo part of the Java program.
    public static void demo(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        ParameterHelper paramHelper = new ParameterHelper();
```

```
        System.out.println("Read the ssm_only_policy.json file");
        String ssmOnlyPolicy = readFileAsString(ssmJSON);

        System.out.println("Resetting parameters to starting values for demo.");
        paramHelper.reset();

        System.out.println(
                """
                        This part of the demonstration shows how to toggle
different parts of the system
                        to create situations where the web service fails, and shows
how using a resilient
                        architecture can keep the web service running in spite of
these failures.

                        At the start, the load balancer endpoint returns
recommendations and reports that all targets are healthy.
                       """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        The web service running on the EC2 instances gets
recommendations by querying a DynamoDB table.
                        The table name is contained in a Systems Manager parameter
named self.param_helper.table.
                        To simulate a failure of the recommendation service, let's
set this parameter to name a non-existent table.
                       """);
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        System.out.println(
                """
                        \nNow, sending a GET request to the load balancer endpoint
returns a failure code. But, the service reports as
                        healthy to the load balancer because shallow health checks
don't check for failure of the recommendation service.
                       """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                       Instead of failing when the recommendation service fails,
the web service can return a static response.
```

```
                        While this is not a perfect solution, it presents the
customer with a somewhat better experience than failure.
                        """);
        paramHelper.put(paramHelper.failureResponse, "static");

        System.out.println("""
                Now, sending a GET request to the load balancer endpoint returns a
static response.
                The service still reports as healthy because health checks are still
shallow.
                """);
        demoChoices(loadBalancer);

        System.out.println("Let's reinstate the recommendation service.");
        paramHelper.put(paramHelper.tableName, paramHelper.dyntable);

        System.out.println("""
                Let's also substitute bad credentials for one of the instances in
the target group so that it can't
                access the DynamoDB recommendation table. We will get an instance id
value.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        AutoScaler autoScaler = new AutoScaler();

        // Create a new instance profile based on badCredsProfileName.
        templateCreator.createInstanceProfile(policyFile, policyName,
badCredsProfileName, roleName);
        String badInstanceId = autoScaler.getBadInstance(autoScalingGroupName);
        System.out.println("The bad instance id values used for this demo is " +
badInstanceId);

        String profileAssociationId = autoScaler.getInstanceProfile(badInstanceId);
        System.out.println("The association Id value is " + profileAssociationId);
        System.out.println("Replacing the profile for instance " + badInstanceId
                + " with a profile that contains bad credentials");
        autoScaler.replaceInstanceProfile(badInstanceId, badCredsProfileName,
profileAssociationId);

        System.out.println(
                """
                        Now, sending a GET request to the load balancer endpoint
returns either a recommendation or a static response,
```

```
                        depending on which instance is selected by the load
balancer.
                        """);

        demoChoices(loadBalancer);

        System.out.println("""
                Let's implement a deep health check. For this demo, a deep health
check tests whether
                the web service can access the DynamoDB table that it depends on for
recommendations. Note that
                the deep health check is only for ELB routing and not for Auto
Scaling instance health.
                This kind of deep health check is not recommended for Auto Scaling
instance health, because it
                risks accidental termination of all instances in the Auto Scaling
group when a dependent service fails.
                """);

        System.out.println("""
                By implementing deep health checks, the load balancer can detect
when one of the instances is failing
                and take that instance out of rotation.
                """);

        paramHelper.put(paramHelper.healthCheck, "deep");

        System.out.println("""
                Now, checking target health indicates that the instance with bad
credentials
                is unhealthy. Note that it might take a minute or two for the load
balancer to detect the unhealthy
                instance. Sending a GET request to the load balancer endpoint always
returns a recommendation, because
                the load balancer takes unhealthy instances out of its rotation.
                """);

        demoChoices(loadBalancer);

        System.out.println(
                """
                        Because the instances in this demo are controlled by an auto
scaler, the simplest way to fix an unhealthy
```

```
                        instance is to terminate it and let the auto scaler start a
new instance to replace it.
                        """);
        autoScaler.terminateInstance(badInstanceId);

        System.out.println("""
                Even while the instance is terminating and the new instance is
starting, sending a GET
                request to the web service continues to get a successful
recommendation response because
                the load balancer routes requests to the healthy instances. After
the replacement instance
                starts and reports as healthy, it is included in the load balancing
rotation.
                Note that terminating and replacing an instance typically takes
several minutes, during which time you
                can see the changing health check status until the new instance is
running and healthy.
                """);

        demoChoices(loadBalancer);
        System.out.println(
                "If the recommendation service fails now, deep health checks mean
all instances report as unhealthy.");
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        demoChoices(loadBalancer);
        paramHelper.reset();
    }

    public static void demoChoices(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        String[] actions = {
                "Send a GET request to the load balancer endpoint.",
                "Check the health of load balancer targets.",
                "Go to the next part of the demo."
        };
        Scanner scanner = new Scanner(System.in);

        while (true) {
            System.out.println("-".repeat(88));
            System.out.println("See the current state of the service by selecting
one of the following choices:");
            for (int i = 0; i < actions.length; i++) {
```

```
                System.out.println(i + ": " + actions[i]);
            }

            try {
                System.out.print("\nWhich action would you like to take? ");
                int choice = scanner.nextInt();
                System.out.println("-".repeat(88));

                switch (choice) {
                    case 0 -> {
                        System.out.println("Request:\n");
                        System.out.println("GET http://" +
loadBalancer.getEndpoint(lbName));
                        CloseableHttpClient httpClient =
HttpClients.createDefault();

                        // Create an HTTP GET request to the ELB.
                        HttpGet httpGet = new HttpGet("http://" +
loadBalancer.getEndpoint(lbName));

                        // Execute the request and get the response.
                        HttpResponse response = httpClient.execute(httpGet);
                        int statusCode = response.getStatusLine().getStatusCode();
                        System.out.println("HTTP Status Code: " + statusCode);

                        // Display the JSON response
                        BufferedReader reader = new BufferedReader(
                                new
InputStreamReader(response.getEntity().getContent()));
                        StringBuilder jsonResponse = new StringBuilder();
                        String line;
                        while ((line = reader.readLine()) != null) {
                            jsonResponse.append(line);
                        }
                        reader.close();

                        // Print the formatted JSON response.
                        System.out.println("Full Response:\n");
                        System.out.println(jsonResponse.toString());

                        // Close the HTTP client.
                        httpClient.close();

                    }
```

```
                    case 1 -> {
                        System.out.println("\nChecking the health of load balancer
 targets:\n");
                        List<TargetHealthDescription> health =
 loadBalancer.checkTargetHealth(targetGroupName);
                        for (TargetHealthDescription target : health) {
                            System.out.printf("\tTarget %s on port %d is %s%n",
 target.target().id(),
                                    target.target().port(),
 target.targetHealth().stateAsString());
                        }
                        System.out.println("""
                                Note that it can take a minute or two for the health
 check to update
                                after changes are made.
                                """);
                    }
                    case 2 -> {
                        System.out.println("\nOkay, let's move on.");
                        System.out.println("-".repeat(88));
                        return; // Exit the method when choice is 2
                    }
                    default -> System.out.println("You must choose a value between
 0-2. Please select again.");
                }

            } catch (java.util.InputMismatchException e) {
                System.out.println("Invalid input. Please select again.");
                scanner.nextLine(); // Clear the input buffer.
            }
        }
    }

    public static String readFileAsString(String filePath) throws IOException {
        byte[] bytes = Files.readAllBytes(Paths.get(filePath));
        return new String(bytes);
    }
}
```

Cree una clase que agrupe las acciones de escalado automático y Amazon EC2.

```
public class AutoScaler {
```

```
    private static Ec2Client ec2Client;
    private static AutoScalingClient autoScalingClient;
    private static IamClient iamClient;

    private static SsmClient ssmClient;

    private IamClient getIAMClient() {
        if (iamClient == null) {
            iamClient = IamClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return iamClient;
    }

    private SsmClient getSSMClient() {
        if (ssmClient == null) {
            ssmClient = SsmClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ssmClient;
    }

    private Ec2Client getEc2Client() {
        if (ec2Client == null) {
            ec2Client = Ec2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ec2Client;
    }

    private AutoScalingClient getAutoScalingClient() {
        if (autoScalingClient == null) {
            autoScalingClient = AutoScalingClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return autoScalingClient;
    }

    /**
```

```
    * Terminates and instances in an EC2 Auto Scaling group. After an instance is
    * terminated, it can no longer be accessed.
    */
   public void terminateInstance(String instanceId) {
       TerminateInstanceInAutoScalingGroupRequest terminateInstanceIRequest =
TerminateInstanceInAutoScalingGroupRequest
               .builder()
               .instanceId(instanceId)
               .shouldDecrementDesiredCapacity(false)
               .build();


getAutoScalingClient().terminateInstanceInAutoScalingGroup(terminateInstanceIRequest);
       System.out.format("Terminated instance %s.", instanceId);
   }

   /**
    * Replaces the profile associated with a running instance. After the profile is
    * replaced, the instance is rebooted to ensure that it uses the new profile.
    * When
    * the instance is ready, Systems Manager is used to restart the Python web
    * server.
    */
   public void replaceInstanceProfile(String instanceId, String
newInstanceProfileName, String profileAssociationId)
           throws InterruptedException {
       // Create an IAM instance profile specification.
       software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
iamInstanceProfile =
software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
               .builder()
               .name(newInstanceProfileName) // Make sure 'newInstanceProfileName'
is a valid IAM Instance Profile
                                             // name.
               .build();

       // Replace the IAM instance profile association for the EC2 instance.
       ReplaceIamInstanceProfileAssociationRequest replaceRequest =
ReplaceIamInstanceProfileAssociationRequest
               .builder()
               .iamInstanceProfile(iamInstanceProfile)
               .associationId(profileAssociationId) // Make sure
'profileAssociationId' is a valid association ID.
               .build();
```

```
        try {
            getEc2Client().replaceIamInstanceProfileAssociation(replaceRequest);
            // Handle the response as needed.
        } catch (Ec2Exception e) {
            // Handle exceptions, log, or report the error.
            System.err.println("Error: " + e.getMessage());
        }
        System.out.format("Replaced instance profile for association %s with profile
%s.", profileAssociationId,
                newInstanceProfileName);
        TimeUnit.SECONDS.sleep(15);
        boolean instReady = false;
        int tries = 0;

        // Reboot after 60 seconds
        while (!instReady) {
            if (tries % 6 == 0) {
                getEc2Client().rebootInstances(RebootInstancesRequest.builder()
                        .instanceIds(instanceId)
                        .build());
                System.out.println("Rebooting instance " + instanceId + " and
waiting for it to be ready.");
            }
            tries++;
            try {
                TimeUnit.SECONDS.sleep(10);
            } catch (InterruptedException e) {
                e.printStackTrace();
            }

            DescribeInstanceInformationResponse informationResponse =
getSSMClient().describeInstanceInformation();
            List<InstanceInformation> instanceInformationList =
informationResponse.instanceInformationList();
            for (InstanceInformation info : instanceInformationList) {
                if (info.instanceId().equals(instanceId)) {
                    instReady = true;
                    break;
                }
            }
        }

        SendCommandRequest sendCommandRequest = SendCommandRequest.builder()
```

```
                .instanceIds(instanceId)
                .documentName("AWS-RunShellScript")
                .parameters(Collections.singletonMap("commands",
                        Collections.singletonList("cd / && sudo python3 server.py
80")))
                .build();

        getSSMClient().sendCommand(sendCommandRequest);
        System.out.println("Restarted the Python web server on instance " +
instanceId + ".");
    }

    public void openInboundPort(String secGroupId, String port, String ipAddress) {
        AuthorizeSecurityGroupIngressRequest ingressRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                .groupName(secGroupId)
                .cidrIp(ipAddress)
                .fromPort(Integer.parseInt(port))
                .build();

        getEc2Client().authorizeSecurityGroupIngress(ingressRequest);
        System.out.format("Authorized ingress to %s on port %s from %s.",
secGroupId, port, ipAddress);
    }

    /**
     * Detaches a role from an instance profile, detaches policies from the role,
     * and deletes all the resources.
     */
    public void deleteInstanceProfile(String roleName, String profileName) {
        try {
            software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
getInstanceProfileRequest =
software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
                    .builder()
                    .instanceProfileName(profileName)
                    .build();

            GetInstanceProfileResponse response =
getIAMClient().getInstanceProfile(getInstanceProfileRequest);
            String name = response.instanceProfile().instanceProfileName();
            System.out.println(name);
```

```
            RemoveRoleFromInstanceProfileRequest profileRequest =
RemoveRoleFromInstanceProfileRequest.builder()
                    .instanceProfileName(profileName)
                    .roleName(roleName)
                    .build();

            getIAMClient().removeRoleFromInstanceProfile(profileRequest);
            DeleteInstanceProfileRequest deleteInstanceProfileRequest =
DeleteInstanceProfileRequest.builder()
                    .instanceProfileName(profileName)
                    .build();

            getIAMClient().deleteInstanceProfile(deleteInstanceProfileRequest);
            System.out.println("Deleted instance profile " + profileName);

            DeleteRoleRequest deleteRoleRequest = DeleteRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            // List attached role policies.
            ListAttachedRolePoliciesResponse rolesResponse = getIAMClient()
                    .listAttachedRolePolicies(role -> role.roleName(roleName));
            List<AttachedPolicy> attachedPolicies =
rolesResponse.attachedPolicies();
            for (AttachedPolicy attachedPolicy : attachedPolicies) {
                DetachRolePolicyRequest request = DetachRolePolicyRequest.builder()
                        .roleName(roleName)
                        .policyArn(attachedPolicy.policyArn())
                        .build();

                getIAMClient().detachRolePolicy(request);
                System.out.println("Detached and deleted policy " +
attachedPolicy.policyName());
            }

            getIAMClient().deleteRole(deleteRoleRequest);
            System.out.println("Instance profile and role deleted.");

        } catch (IamException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

```
   public void deleteTemplate(String templateName) {
       getEc2Client().deleteLaunchTemplate(name ->
name.launchTemplateName(templateName));
       System.out.format(templateName + " was deleted.");
   }

   public void deleteAutoScaleGroup(String groupName) {
       DeleteAutoScalingGroupRequest deleteAutoScalingGroupRequest =
DeleteAutoScalingGroupRequest.builder()
               .autoScalingGroupName(groupName)
               .forceDelete(true)
               .build();


getAutoScalingClient().deleteAutoScalingGroup(deleteAutoScalingGroupRequest);
       System.out.println(groupName + " was deleted.");
   }

   /*
    * Verify the default security group of the specified VPC allows ingress from
    * this
    * computer. This can be done by allowing ingress from this computer's IP
    * address. In some situations, such as connecting from a corporate network, you
    * must instead specify a prefix list ID. You can also temporarily open the port
    * to
    * any IP address while running this example. If you do, be sure to remove
    * public
    * access when you're done.
    *
    */
   public GroupInfo verifyInboundPort(String VPC, int port, String ipAddress) {
       boolean portIsOpen = false;
       GroupInfo groupInfo = new GroupInfo();
       try {
           Filter filter = Filter.builder()
                   .name("group-name")
                   .values("default")
                   .build();

           Filter filter1 = Filter.builder()
                   .name("vpc-id")
                   .values(VPC)
                   .build();
```

```
            DescribeSecurityGroupsRequest securityGroupsRequest =
DescribeSecurityGroupsRequest.builder()
                    .filters(filter, filter1)
                    .build();

            DescribeSecurityGroupsResponse securityGroupsResponse = getEc2Client()
                    .describeSecurityGroups(securityGroupsRequest);
            String securityGroup =
securityGroupsResponse.securityGroups().get(0).groupName();
            groupInfo.setGroupName(securityGroup);

            for (SecurityGroup secGroup : securityGroupsResponse.securityGroups()) {
                System.out.println("Found security group: " + secGroup.groupId());

                for (IpPermission ipPermission : secGroup.ipPermissions()) {
                    if (ipPermission.fromPort() == port) {
                        System.out.println("Found inbound rule: " + ipPermission);
                        for (IpRange ipRange : ipPermission.ipRanges()) {
                            String cidrIp = ipRange.cidrIp();
                            if (cidrIp.startsWith(ipAddress) ||
cidrIp.equals("0.0.0.0/0")) {
                                System.out.println(cidrIp + " is applicable");
                                portIsOpen = true;
                            }
                        }

                        if (!ipPermission.prefixListIds().isEmpty()) {
                            System.out.println("Prefix lList is applicable");
                            portIsOpen = true;
                        }

                        if (!portIsOpen) {
                            System.out
                                    .println("The inbound rule does not appear to be
open to either this computer's IP,"
                                            + " all IP addresses (0.0.0.0/0), or to
a prefix list ID.");
                        } else {
                            break;
                        }
                    }
                }
            }
```

```
        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }

        groupInfo.setPortOpen(portIsOpen);
        return groupInfo;
    }

    /*
     * Attaches an Elastic Load Balancing (ELB) target group to this EC2 Auto
     * Scaling group.
     * The target group specifies how the load balancer forward requests to the
     * instances
     * in the group.
     */
    public void attachLoadBalancerTargetGroup(String asGroupName, String
targetGroupARN) {
        try {
            AttachLoadBalancerTargetGroupsRequest targetGroupsRequest =
AttachLoadBalancerTargetGroupsRequest.builder()
                    .autoScalingGroupName(asGroupName)
                    .targetGroupARNs(targetGroupARN)
                    .build();


getAutoScalingClient().attachLoadBalancerTargetGroups(targetGroupsRequest);
            System.out.println("Attached load balancer to " + asGroupName);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Creates an EC2 Auto Scaling group with the specified size.
    public String[] createGroup(int groupSize, String templateName, String
autoScalingGroupName) {

        // Get availability zones.
        software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
zonesRequest =
software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
                .builder()
                .build();
```

```
        DescribeAvailabilityZonesResponse zonesResponse =
getEc2Client().describeAvailabilityZones(zonesRequest);
        List<String> availabilityZoneNames =
zonesResponse.availabilityZones().stream()

.map(software.amazon.awssdk.services.ec2.model.AvailabilityZone::zoneName)
                .collect(Collectors.toList());

        String availabilityZones = String.join(",", availabilityZoneNames);
        LaunchTemplateSpecification specification =
LaunchTemplateSpecification.builder()
                .launchTemplateName(templateName)
                .version("$Default")
                .build();

        String[] zones = availabilityZones.split(",");
        CreateAutoScalingGroupRequest groupRequest =
CreateAutoScalingGroupRequest.builder()
                .launchTemplate(specification)
                .availabilityZones(zones)
                .maxSize(groupSize)
                .minSize(groupSize)
                .autoScalingGroupName(autoScalingGroupName)
                .build();

        try {
            getAutoScalingClient().createAutoScalingGroup(groupRequest);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Created an EC2 Auto Scaling group named " +
autoScalingGroupName);
        return zones;
    }

    public String getDefaultVPC() {
        // Define the filter.
        Filter defaultFilter = Filter.builder()
                .name("is-default")
                .values("true")
                .build();
```

```
        software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest request =
software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest
                .builder()
                .filters(defaultFilter)
                .build();

        DescribeVpcsResponse response = getEc2Client().describeVpcs(request);
        return response.vpcs().get(0).vpcId();
    }

    // Gets the default subnets in a VPC for a specified list of Availability Zones.
    public List<Subnet> getSubnets(String vpcId, String[] availabilityZones) {
        List<Subnet> subnets = null;
        Filter vpcFilter = Filter.builder()
                .name("vpc-id")
                .values(vpcId)
                .build();

        Filter azFilter = Filter.builder()
                .name("availability-zone")
                .values(availabilityZones)
                .build();

        Filter defaultForAZ = Filter.builder()
                .name("default-for-az")
                .values("true")
                .build();

        DescribeSubnetsRequest request = DescribeSubnetsRequest.builder()
                .filters(vpcFilter, azFilter, defaultForAZ)
                .build();

        DescribeSubnetsResponse response = getEc2Client().describeSubnets(request);
        subnets = response.subnets();
        return subnets;
    }

    // Gets data about the instances in the EC2 Auto Scaling group.
    public String getBadInstance(String groupName) {
        DescribeAutoScalingGroupsRequest request =
DescribeAutoScalingGroupsRequest.builder()
                .autoScalingGroupNames(groupName)
                .build();
```

```
        DescribeAutoScalingGroupsResponse response =
getAutoScalingClient().describeAutoScalingGroups(request);
        AutoScalingGroup autoScalingGroup = response.autoScalingGroups().get(0);
        List<String> instanceIds = autoScalingGroup.instances().stream()
                .map(instance -> instance.instanceId())
                .collect(Collectors.toList());

        String[] instanceIdArray = instanceIds.toArray(new String[0]);
        for (String instanceId : instanceIdArray) {
            System.out.println("Instance ID: " + instanceId);
            return instanceId;
        }
        return "";
    }

    // Gets data about the profile associated with an instance.
    public String getInstanceProfile(String instanceId) {
        Filter filter = Filter.builder()
                .name("instance-id")
                .values(instanceId)
                .build();

        DescribeIamInstanceProfileAssociationsRequest associationsRequest =
DescribeIamInstanceProfileAssociationsRequest
                .builder()
                .filters(filter)
                .build();

        DescribeIamInstanceProfileAssociationsResponse response = getEc2Client()
                .describeIamInstanceProfileAssociations(associationsRequest);
        return response.iamInstanceProfileAssociations().get(0).associationId();
    }

    public void deleteRolesPolicies(String policyName, String roleName, String
InstanceProfile) {
        ListPoliciesRequest listPoliciesRequest =
ListPoliciesRequest.builder().build();
        ListPoliciesResponse listPoliciesResponse =
getIAMClient().listPolicies(listPoliciesRequest);
        for (Policy policy : listPoliciesResponse.policies()) {
            if (policy.policyName().equals(policyName)) {
                // List the entities (users, groups, roles) that are attached to the
policy.
```

```
 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
 listEntitiesRequest =
 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
                        .builder()
                        .policyArn(policy.arn())
                        .build();
                ListEntitiesForPolicyResponse listEntitiesResponse = iamClient
                        .listEntitiesForPolicy(listEntitiesRequest);
                if (!listEntitiesResponse.policyGroups().isEmpty() || !
listEntitiesResponse.policyUsers().isEmpty()
                        || !listEntitiesResponse.policyRoles().isEmpty()) {
                    // Detach the policy from any entities it is attached to.
                    DetachRolePolicyRequest detachPolicyRequest =
 DetachRolePolicyRequest.builder()
                            .policyArn(policy.arn())
                            .roleName(roleName) // Specify the name of the IAM role
                            .build();

                    getIAMClient().detachRolePolicy(detachPolicyRequest);
                    System.out.println("Policy detached from entities.");
                }

                // Now, you can delete the policy.
                DeletePolicyRequest deletePolicyRequest =
 DeletePolicyRequest.builder()
                        .policyArn(policy.arn())
                        .build();

                getIAMClient().deletePolicy(deletePolicyRequest);
                System.out.println("Policy deleted successfully.");
                break;
            }
        }

        // List the roles associated with the instance profile
        ListInstanceProfilesForRoleRequest listRolesRequest =
 ListInstanceProfilesForRoleRequest.builder()
                .roleName(roleName)
                .build();

        // Detach the roles from the instance profile
        ListInstanceProfilesForRoleResponse listRolesResponse =
 iamClient.listInstanceProfilesForRole(listRolesRequest);
```

```
        for (software.amazon.awssdk.services.iam.model.InstanceProfile profile :
 listRolesResponse.instanceProfiles()) {
            RemoveRoleFromInstanceProfileRequest removeRoleRequest =
 RemoveRoleFromInstanceProfileRequest.builder()
                    .instanceProfileName(InstanceProfile)
                    .roleName(roleName) // Remove the extra dot here
                    .build();

            getIAMClient().removeRoleFromInstanceProfile(removeRoleRequest);
            System.out.println("Role " + roleName + " removed from instance profile
 " + InstanceProfile);
        }

        // Delete the instance profile after removing all roles
        DeleteInstanceProfileRequest deleteInstanceProfileRequest =
 DeleteInstanceProfileRequest.builder()
                .instanceProfileName(InstanceProfile)
                .build();

        getIAMClient().deleteInstanceProfile(r ->
 r.instanceProfileName(InstanceProfile));
        System.out.println(InstanceProfile + " Deleted");
        System.out.println("All roles and policies are deleted.");
    }
}
```

Cree una clase que resuma las acciones de Elastic Load Balancing.

```
public class LoadBalancer {
    public ElasticLoadBalancingV2Client elasticLoadBalancingV2Client;

    public ElasticLoadBalancingV2Client getLoadBalancerClient() {
        if (elasticLoadBalancingV2Client == null) {
            elasticLoadBalancingV2Client = ElasticLoadBalancingV2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }

        return elasticLoadBalancingV2Client;
    }

    // Checks the health of the instances in the target group.
```

```
   public List<TargetHealthDescription> checkTargetHealth(String targetGroupName) {
       DescribeTargetGroupsRequest targetGroupsRequest =
DescribeTargetGroupsRequest.builder()
               .names(targetGroupName)
               .build();

       DescribeTargetGroupsResponse tgResponse =
getLoadBalancerClient().describeTargetGroups(targetGroupsRequest);

       DescribeTargetHealthRequest healthRequest =
DescribeTargetHealthRequest.builder()
               .targetGroupArn(tgResponse.targetGroups().get(0).targetGroupArn())
               .build();

       DescribeTargetHealthResponse healthResponse =
getLoadBalancerClient().describeTargetHealth(healthRequest);
       return healthResponse.targetHealthDescriptions();
   }

   // Gets the HTTP endpoint of the load balancer.
   public String getEndpoint(String lbName) {
       DescribeLoadBalancersResponse res = getLoadBalancerClient()
               .describeLoadBalancers(describe -> describe.names(lbName));
       return res.loadBalancers().get(0).dnsName();
   }

   // Deletes a load balancer.
   public void deleteLoadBalancer(String lbName) {
       try {
           // Use a waiter to delete the Load Balancer.
           DescribeLoadBalancersResponse res = getLoadBalancerClient()
                   .describeLoadBalancers(describe -> describe.names(lbName));
           ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
           DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                   .loadBalancerArns(res.loadBalancers().get(0).loadBalancerArn())
                   .build();

           getLoadBalancerClient().deleteLoadBalancer(
                   builder ->
builder.loadBalancerArn(res.loadBalancers().get(0).loadBalancerArn()));
           WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
```

```
                    .waitUntilLoadBalancersDeleted(request);
            waiterResponse.matched().response().ifPresent(System.out::println);

        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(lbName + " was deleted.");
    }

    // Deletes the target group.
    public void deleteTargetGroup(String targetGroupName) {
        try {
            DescribeTargetGroupsResponse res = getLoadBalancerClient()
                    .describeTargetGroups(describe ->
describe.names(targetGroupName));
            getLoadBalancerClient()
                    .deleteTargetGroup(builder ->
builder.targetGroupArn(res.targetGroups().get(0).targetGroupArn()));
        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(targetGroupName + " was deleted.");
    }

    // Verify this computer can successfully send a GET request to the load balancer
    // endpoint.
    public boolean verifyLoadBalancerEndpoint(String elbDnsName) throws IOException,
InterruptedException {
        boolean success = false;
        int retries = 3;
        CloseableHttpClient httpClient = HttpClients.createDefault();

        // Create an HTTP GET request to the ELB.
        HttpGet httpGet = new HttpGet("http://" + elbDnsName);
        try {
            while ((!success) && (retries > 0)) {
                // Execute the request and get the response.
                HttpResponse response = httpClient.execute(httpGet);
                int statusCode = response.getStatusLine().getStatusCode();
                System.out.println("HTTP Status Code: " + statusCode);
                if (statusCode == 200) {
                    success = true;
                } else {
                    retries--;
```

```
                    System.out.println("Got connection error from load balancer
endpoint, retrying...");
                    TimeUnit.SECONDS.sleep(15);
                }
            }

        } catch (org.apache.http.conn.HttpHostConnectException e) {
            System.out.println(e.getMessage());
        }

        System.out.println("Status.." + success);
        return success;
    }

    /*
     * Creates an Elastic Load Balancing target group. The target group specifies
     * how
     * the load balancer forward requests to instances in the group and how instance
     * health is checked.
     */
    public String createTargetGroup(String protocol, int port, String vpcId, String
targetGroupName) {
        CreateTargetGroupRequest targetGroupRequest =
CreateTargetGroupRequest.builder()
                .healthCheckPath("/healthcheck")
                .healthCheckTimeoutSeconds(5)
                .port(port)
                .vpcId(vpcId)
                .name(targetGroupName)
                .protocol(protocol)
                .build();

        CreateTargetGroupResponse targetGroupResponse =
getLoadBalancerClient().createTargetGroup(targetGroupRequest);
        String targetGroupArn =
targetGroupResponse.targetGroups().get(0).targetGroupArn();
        String targetGroup =
targetGroupResponse.targetGroups().get(0).targetGroupName();
        System.out.println("The " + targetGroup + " was created with ARN" +
targetGroupArn);
        return targetGroupArn;
    }

    /*
```

```
    * Creates an Elastic Load Balancing load balancer that uses the specified
    * subnets
    * and forwards requests to the specified target group.
    */
   public String createLoadBalancer(List<Subnet> subnetIds, String targetGroupARN,
String lbName, int port,
           String protocol) {
       try {
           List<String> subnetIdStrings = subnetIds.stream()
                   .map(Subnet::subnetId)
                   .collect(Collectors.toList());

           CreateLoadBalancerRequest balancerRequest =
CreateLoadBalancerRequest.builder()
                   .subnets(subnetIdStrings)
                   .name(lbName)
                   .scheme("internet-facing")
                   .build();

           // Create and wait for the load balancer to become available.
           CreateLoadBalancerResponse lsResponse =
getLoadBalancerClient().createLoadBalancer(balancerRequest);
           String lbARN = lsResponse.loadBalancers().get(0).loadBalancerArn();

           ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
           DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                   .loadBalancerArns(lbARN)
                   .build();

           System.out.println("Waiting for Load Balancer " + lbName + " to become
available.");
           WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                   .waitUntilLoadBalancerAvailable(request);
           waiterResponse.matched().response().ifPresent(System.out::println);
           System.out.println("Load Balancer " + lbName + " is available.");

           // Get the DNS name (endpoint) of the load balancer.
           String lbDNSName = lsResponse.loadBalancers().get(0).dnsName();
           System.out.println("*** Load Balancer DNS Name: " + lbDNSName);

           // Create a listener for the load balance.
```

```
            Action action = Action.builder()
                    .targetGroupArn(targetGroupARN)
                    .type("forward")
                    .build();

            CreateListenerRequest listenerRequest = CreateListenerRequest.builder()

 .loadBalancerArn(lsResponse.loadBalancers().get(0).loadBalancerArn())
                    .defaultActions(action)
                    .port(port)
                    .protocol(protocol)
                    .build();

            getLoadBalancerClient().createListener(listenerRequest);
            System.out.println("Created listener to forward traffic from load
 balancer " + lbName + " to target group "
                    + targetGroupARN);

            // Return the load balancer DNS name.
            return lbDNSName;

        } catch (ElasticLoadBalancingV2Exception e) {
            e.printStackTrace();
        }
        return "";
    }
}
```

Cree una clase que utilice DynamoDB para simular un servicio de recomendaciones.

```
public class Database {

    private static DynamoDbClient dynamoDbClient;

    public static DynamoDbClient getDynamoDbClient() {
        if (dynamoDbClient == null) {
            dynamoDbClient = DynamoDbClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return dynamoDbClient;
    }
```

```
   // Checks to see if the Amazon DynamoDB table exists.
   private boolean doesTableExist(String tableName) {
       try {
           // Describe the table and catch any exceptions.
           DescribeTableRequest describeTableRequest =
DescribeTableRequest.builder()
                   .tableName(tableName)
                   .build();

           getDynamoDbClient().describeTable(describeTableRequest);
           System.out.println("Table '" + tableName + "' exists.");
           return true;

       } catch (ResourceNotFoundException e) {
           System.out.println("Table '" + tableName + "' does not exist.");
       } catch (DynamoDbException e) {
           System.err.println("Error checking table existence: " + e.getMessage());
       }
       return false;
   }

   /*
    * Creates a DynamoDB table to use a recommendation service. The table has a
    * hash key named 'MediaType' that defines the type of media recommended, such
    * as
    * Book or Movie, and a range key named 'ItemId' that, combined with the
    * MediaType,
    * forms a unique identifier for the recommended item.
    */
   public void createTable(String tableName, String fileName) throws IOException {
       // First check to see if the table exists.
       boolean doesExist = doesTableExist(tableName);
       if (!doesExist) {
           DynamoDbWaiter dbWaiter = getDynamoDbClient().waiter();
           CreateTableRequest createTableRequest = CreateTableRequest.builder()
                   .tableName(tableName)
                   .attributeDefinitions(
                           AttributeDefinition.builder()
                                   .attributeName("MediaType")
                                   .attributeType(ScalarAttributeType.S)
                                   .build(),
                           AttributeDefinition.builder()
                                   .attributeName("ItemId")
```

```
                                .attributeType(ScalarAttributeType.N)
                                .build())
                .keySchema(
                        KeySchemaElement.builder()
                                .attributeName("MediaType")
                                .keyType(KeyType.HASH)
                                .build(),
                        KeySchemaElement.builder()
                                .attributeName("ItemId")
                                .keyType(KeyType.RANGE)
                                .build())
                .provisionedThroughput(
                        ProvisionedThroughput.builder()
                                .readCapacityUnits(5L)
                                .writeCapacityUnits(5L)
                                .build())
                .build();

            getDynamoDbClient().createTable(createTableRequest);
            System.out.println("Creating table " + tableName + "...");

            // Wait until the Amazon DynamoDB table is created.
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Table " + tableName + " created.");

            // Add records to the table.
            populateTable(fileName, tableName);
        }
    }

    public void deleteTable(String tableName) {
        getDynamoDbClient().deleteTable(table -> table.tableName(tableName));
        System.out.println("Table " + tableName + " deleted.");
    }

    // Populates the table with data located in a JSON file using the DynamoDB
    // enhanced client.
```

```
    public void populateTable(String fileName, String tableName) throws IOException
 {
        DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
                .dynamoDbClient(getDynamoDbClient())
                .build();
        ObjectMapper objectMapper = new ObjectMapper();
        File jsonFile = new File(fileName);
        JsonNode rootNode = objectMapper.readTree(jsonFile);

        DynamoDbTable<Recommendation> mappedTable = enhancedClient.table(tableName,
                TableSchema.fromBean(Recommendation.class));
        for (JsonNode currentNode : rootNode) {
            String mediaType = currentNode.path("MediaType").path("S").asText();
            int itemId = currentNode.path("ItemId").path("N").asInt();
            String title = currentNode.path("Title").path("S").asText();
            String creator = currentNode.path("Creator").path("S").asText();

            // Create a Recommendation object and set its properties.
            Recommendation rec = new Recommendation();
            rec.setMediaType(mediaType);
            rec.setItemId(itemId);
            rec.setTitle(title);
            rec.setCreator(creator);

            // Put the item into the DynamoDB table.
            mappedTable.putItem(rec); // Add the Recommendation to the list.
        }
        System.out.println("Added all records to the " + tableName);
    }
}
```

Cree una clase que agrupe las acciones de Systems Manager.

```
public class ParameterHelper {

    String tableName = "doc-example-resilient-architecture-table";
    String dyntable = "doc-example-recommendation-service";
    String failureResponse = "doc-example-resilient-architecture-failure-response";
    String healthCheck = "doc-example-resilient-architecture-health-check";

    public void reset() {
        put(dyntable, tableName);
```

```
        put(failureResponse, "none");
        put(healthCheck, "shallow");
    }

    public void put(String name, String value) {
        SsmClient ssmClient = SsmClient.builder()
                .region(Region.US_EAST_1)
                .build();

        PutParameterRequest parameterRequest = PutParameterRequest.builder()
                .name(name)
                .value(value)
                .overwrite(true)
                .type("String")
                .build();

        ssmClient.putParameter(parameterRequest);
        System.out.printf("Setting demo parameter %s to '%s'.", name, value);
    }
}
```

- Para obtener información sobre la API, consulte los siguientes temas en la referencia de la API de AWS SDK for Java 2.x .
  - AttachLoadBalancerTargetGroups
  - CreateAutoScalingGroup
  - CreateInstanceProfile
  - CreateLaunchTemplate
  - CreateListener
  - CreateLoadBalancer
  - CreateTargetGroup
  - DeleteAutoScalingGroup
  - DeleteInstanceProfile
  - DeleteLaunchTemplate
  - DeleteLoadBalancer
  - DeleteTargetGroup
  - DescribeAutoScalingGroups

- DescribeAvailabilityZones
- DescribeIamInstanceProfileAssociations
- DescribeInstances
- DescribeLoadBalancers
- DescribeSubnets
- DescribeTargetGroups
- DescribeTargetHealth
- DescribeVpcs
- RebootInstances
- ReplaceIamInstanceProfileAssociation
- TerminateInstanceInAutoScalingGroup
- UpdateAutoScalingGroup

Trabajar con la API del creador de políticas de IAM

En el siguiente ejemplo de código, se muestra cómo:

- Cree políticas de IAM mediante la API orientada a objetos.
- Utilice la API del creador de políticas de IAM con el servicio de IAM.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

En los ejemplos se utilizan las siguientes importaciones.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.policybuilder.iam.IamConditionOperator;
import software.amazon.awssdk.policybuilder.iam.IamEffect;
import software.amazon.awssdk.policybuilder.iam.IamPolicy;
```

```
import software.amazon.awssdk.policybuilder.iam.IamPolicyWriter;
import software.amazon.awssdk.policybuilder.iam.IamPrincipal;
import software.amazon.awssdk.policybuilder.iam.IamPrincipalType;
import software.amazon.awssdk.policybuilder.iam.IamResource;
import software.amazon.awssdk.policybuilder.iam.IamStatement;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.GetPolicyResponse;
import software.amazon.awssdk.services.iam.model.GetPolicyVersionResponse;
import software.amazon.awssdk.services.sts.StsClient;

import java.net.URLDecoder;
import java.nio.charset.StandardCharsets;
import java.util.Arrays;
import java.util.List;
```

Cree una política basada en el tiempo.

```
        public String timeBasedPolicyExample() {
                IamPolicy policy = IamPolicy.builder()
                                .addStatement(b -> b
                                                .effect(IamEffect.ALLOW)
                                                .addAction("dynamodb:GetItem")
                                                .addResource(IamResource.ALL)
                                                .addCondition(b1 -> b1

 .operator(IamConditionOperator.DATE_GREATER_THAN)

 .key("aws:CurrentTime")

 .value("2020-04-01T00:00:00Z"))
                                                .addCondition(b1 -> b1

 .operator(IamConditionOperator.DATE_LESS_THAN)

 .key("aws:CurrentTime")

 .value("2020-06-30T23:59:59Z")))
                                .build();

                // Use an IamPolicyWriter to write out the JSON string to a more
 readable
```

```
                // format.
                return policy.toJson(IamPolicyWriter.builder()
                                .prettyPrint(true)
                                .build());
        }
```

Cree una política con varias condiciones.

```
        public String multipleConditionsExample() {
                IamPolicy policy = IamPolicy.builder()
                                .addStatement(b -> b
                                                .effect(IamEffect.ALLOW)
                                                .addAction("dynamodb:GetItem")
                                                .addAction("dynamodb:BatchGetItem")
                                                .addAction("dynamodb:Query")
                                                .addAction("dynamodb:PutItem")
                                                .addAction("dynamodb:UpdateItem")
                                                .addAction("dynamodb:DeleteItem")

 .addAction("dynamodb:BatchWriteItem")

 .addResource("arn:aws:dynamodb:*:*:table/table-name")

 .addConditions(IamConditionOperator.STRING_EQUALS

 .addPrefix("ForAllValues:"),

 "dynamodb:Attributes",
                                                                        List.of("column-
name1", "column-name2", "column-name3"))
                                                .addCondition(b1 -> b1

 .operator(IamConditionOperator.STRING_EQUALS

 .addSuffix("IfExists"))

 .key("dynamodb:Select")

 .value("SPECIFIC_ATTRIBUTES")))
                                .build();

                return policy.toJson(IamPolicyWriter.builder()
```

```
                                .prettyPrint(true).build());
        }
```

Utilice las entidades principales en una política.

```
        public String specifyPrincipalsExample() {
                IamPolicy policy = IamPolicy.builder()
                                .addStatement(b -> b
                                                .effect(IamEffect.DENY)
                                                .addAction("s3:*")
                                                .addPrincipal(IamPrincipal.ALL)
                                                .addResource("arn:aws:s3:::amzn-s3-
demo-bucket/*")
                                                .addResource("arn:aws:s3:::amzn-s3-
demo-bucket")
                                                .addCondition(b1 -> b1

 .operator(IamConditionOperator.ARN_NOT_EQUALS)

 .key("aws:PrincipalArn")

 .value("arn:aws:iam::444455556666:user/user-name")))
                                .build();
                return policy.toJson(IamPolicyWriter.builder()
                                .prettyPrint(true).build());
        }
```

Permitir el acceso entre cuentas de.

```
        public String allowCrossAccountAccessExample() {
                IamPolicy policy = IamPolicy.builder()
                                .addStatement(b -> b
                                                .effect(IamEffect.ALLOW)
                                                .addPrincipal(IamPrincipalType.AWS,
 "111122223333")
                                                .addAction("s3:PutObject")
                                                .addResource("arn:aws:s3:::amzn-s3-
demo-bucket/*")
                                                .addCondition(b1 -> b1

 .operator(IamConditionOperator.STRING_EQUALS)
```

```
                                                                .key("s3:x-amz-acl")
                                                                .value("bucket-
owner-full-control")))
                                .build();
                return policy.toJson(IamPolicyWriter.builder()
                                .prettyPrint(true).build());
        }
```

Cree y cargue una `IamPolicy`.

```
        public String createAndUploadPolicyExample(IamClient iam, String accountID,
 String policyName) {
                // Build the policy.
                IamPolicy policy = IamPolicy.builder() // 'version' defaults to
 "2012-10-17".
                                .addStatement(IamStatement.builder()
                                                .effect(IamEffect.ALLOW)
                                                .addAction("dynamodb:PutItem")
                                                .addResource("arn:aws:dynamodb:us-
east-1:" + accountID
                                                                + ":table/
exampleTableName")
                                                .build())
                                .build();
                // Upload the policy.
                iam.createPolicy(r ->
 r.policyName(policyName).policyDocument(policy.toJson()));
                return
 policy.toJson(IamPolicyWriter.builder().prettyPrint(true).build());
        }
```

Descargue y trabaje con una `IamPolicy`.

```
        public String createNewBasedOnExistingPolicyExample(IamClient iam, String
 accountID, String policyName,
                        String newPolicyName) {

                String policyArn = "arn:aws:iam::" + accountID + ":policy/" +
 policyName;
                GetPolicyResponse getPolicyResponse = iam.getPolicy(r ->
 r.policyArn(policyArn));
```

```
                String policyVersion =
getPolicyResponse.policy().defaultVersionId();
                GetPolicyVersionResponse getPolicyVersionResponse = iam
                                .getPolicyVersion(r ->
r.policyArn(policyArn).versionId(policyVersion));

                // Create an IamPolicy instance from the JSON string returned from
IAM.
                String decodedPolicy =
URLDecoder.decode(getPolicyVersionResponse.policyVersion().document(),
                                StandardCharsets.UTF_8);
                IamPolicy policy = IamPolicy.fromJson(decodedPolicy);

                /*
                 * All IamPolicy components are immutable, so use the copy method
that creates a
                 * new instance that
                 * can be altered in the same method call.
                 *
                 * Add the ability to get an item from DynamoDB as an additional
action.
                 */
                IamStatement newStatement = policy.statements().get(0).copy(s ->
s.addAction("dynamodb:GetItem"));

                // Create a new statement that replaces the original statement.
                IamPolicy newPolicy = policy.copy(p ->
p.statements(Arrays.asList(newStatement)));

                // Upload the new policy. IAM now has both policies.
                iam.createPolicy(r -> r.policyName(newPolicyName)
                                .policyDocument(newPolicy.toJson()));

                return
newPolicy.toJson(IamPolicyWriter.builder().prettyPrint(true).build());
        }
```

- Para obtener más información, consulte la Guía para desarrolladores de AWS SDK for Java 2.x.
- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .

- CreatePolicy
- GetPolicy
- GetPolicyVersion

Ejemplos de Amazon Inspector con el SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes AWS SDK for Java 2.x con Amazon Inspector.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hello

En el siguiente ejemplo de código se muestra cómo empezar a utilizar .

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloInspector {
    private static final Logger logger =
 LoggerFactory.getLogger(HelloInspector.class);

    public static void main(String[] args) {
        logger.info("Hello Amazon Inspector!");

        try (Inspector2Client inspectorClient = Inspector2Client.builder().build())
 {

            logger.info("Listing member accounts for this Inspector administrator
 account...");
            listMembers(inspectorClient);

            logger.info("The Hello Inspector example completed successfully.");

        } catch (Inspector2Exception e) {
            logger.error("Error: {}", e.getMessage());
            logger.info("Troubleshooting:");
            logger.info("1. Verify AWS credentials are configured");
            logger.info("2. Check IAM permissions for Inspector2");
            logger.info("3. Ensure Inspector2 is enabled in your account");
            logger.info("4. Verify you're using a supported region");
        }
    }

    /**
     * Lists all member accounts associated with the current Inspector administrator
 account.
     *
     * @param inspectorClient The Inspector2Client used to interact with AWS
 Inspector.
     */
    public static void listMembers(Inspector2Client inspectorClient) {
        try {
```

```
            ListMembersRequest request = ListMembersRequest.builder()
                    .maxResults(50) // optional: limit results
                    .build();

            ListMembersResponse response = inspectorClient.listMembers(request);
            List<Member> members = response.members();

            if (members == null || members.isEmpty()) {
                logger.info("No member accounts found for this Inspector
 administrator account.");
                return;
            }

            logger.info("Found {} member account(s):", members.size());
            for (Member member : members) {
                logger.info(" - Account ID: {}, Status: {}",
                        member.accountId(),
                        member.relationshipStatusAsString());
            }

        } catch (Inspector2Exception e) {
            logger.error("Failed to list members: {}",
 e.awsErrorDetails().errorMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListMembersla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Compruebe el estado de la cuenta del Inspector.
- Asegúrese de que el Inspector esté activado.
- Analice los hallazgos de seguridad.
- Compruebe la cobertura del escaneo.

- Cree un filtro de hallazgos.
- Enumere los filtros existentes.
- Compruebe el uso y los costes.
- Obtenga estadísticas de cobertura.
- Eliminar un filtro.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario interactivo en el que se demuestren las características de .

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class InspectorScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final Logger logger =
 LoggerFactory.getLogger(InspectorScenario.class);
    private static final Scanner scanner = new Scanner(System.in);

    public static void main(String[] args) {
        InspectorActions inspectorActions = new InspectorActions();
        logger.info("Amazon Inspector Basics Scenario");

        logger.info("""
                    Amazon Inspector is a security assessment service provided by
 Amazon Web Services (AWS) that helps
```

```
                    improve the security and compliance of applications deployed on
AWS. It automatically assesses
                    applications for vulnerabilities or deviations from best
practices. By leveraging Amazon Inspector,
                    users can gain insights into the overall security state of their
application and identify potential
                    security risks.

                    This service operates by conducting both network and host-based
assessments, allowing it to detect a
                    wide range of security issues, including those related to
operating systems, network configurations,
                    and application dependencies.
                    """);

        waitForInputToContinue();

        try {
            runScenario(inspectorActions);

            logger.info("");
            logger.info("Scenario completed successfully!");
            logger.info("");
            logger.info("What you learned:");
            logger.info("  - How to check Inspector account status");
            logger.info("  - How to enable Inspector");
            logger.info("  - How to list and analyze findings");
            logger.info("  - How to check coverage information");
            logger.info("  - How to create and manage filters");
            logger.info("  - How to track usage and costs");
            logger.info("  - How to clean up resources");
            logger.info("");

        } catch (Exception ex) {
            logger.error("Scenario failed due to unexpected error: {}",
ex.getMessage(), ex);

        } finally {
            scanner.close();
            logger.info("Exiting...");
        }
    }

    /**
```

```
    * Runs the Inspector scenario in a step-by-step sequence.
    *
    * All InspectorActions methods are asynchronous and return CompletableFutures.
    * Each step ends with .join(). Any async exception thrown during .join() will
bubble up
    *
    */
   public static void runScenario(InspectorActions actions) {
       String filterArn = null;
       boolean inspectorEnabled = false;

       try {
           // Step 1
           logger.info(DASHES);
           logger.info("Step 1: Checking Inspector account status...");
           String status = actions.getAccountStatusAsync().join();
           logger.info(status);
           waitForInputToContinue();

           // Step 2
           logger.info(DASHES);
           logger.info("Step 2: Enabling Inspector...");
           String message = actions.enableInspectorAsync(null).join();
           logger.info(message);
           inspectorEnabled = true;  // track that Inspector was enabled
           waitForInputToContinue();

           // Step 3
           logger.info(DASHES);
           logger.info("Step 3: Listing LOW severity findings...");

           // Call the service method
           List<String> allFindings =
actions.listLowSeverityFindingsAsync().join();

           if (!allFindings.isEmpty()) {
               // Only proceed if there are findings
               String lastArn = allFindings.get(allFindings.size() - 1);
               logger.info("Look up details on: {}", lastArn);
               waitForInputToContinue();
               String details = actions.getFindingDetailsAsync(lastArn).join();
               logger.info(details);
           } else {
               logger.info("No LOW severity findings found.");
```

```
            }

            waitForInputToContinue();

            // Step 4
            logger.info(DASHES);
            logger.info("Step 4: Listing coverage...");
            String coverage = actions.listCoverageAsync(5).join();
            logger.info(coverage);
            waitForInputToContinue();

            // Step 5
            logger.info(DASHES);
            logger.info("Step 5: Creating filter...");
            String filterName = "suppress-low-" + System.currentTimeMillis();
            filterArn = actions.createLowSeverityFilterAsync(filterName, "Suppress
low severity findings").join();
            logger.info("Created filter: {}", filterArn);
            waitForInputToContinue();

            // Step 6
            logger.info(DASHES);
            logger.info("Step 6: Listing filters...");
            String filters = actions.listFiltersAsync(10).join();
            logger.info(filters);
            waitForInputToContinue();

            // Step 7
            logger.info(DASHES);
            logger.info("Step 7: Usage totals...");
            String usage = actions.listUsageTotalsAsync(null, 10).join();
            logger.info(usage);
            waitForInputToContinue();

            // Step 8
            logger.info(DASHES);
            logger.info("Step 8: Coverage statistics...");
            String stats = actions.listCoverageStatisticsAsync().join();
            logger.info(stats);
            waitForInputToContinue();

            // Step 9
            logger.info(DASHES);
            logger.info("Step 9: Delete filter?");
```

```
            logger.info("Filter ARN: {}", filterArn);
            logger.info("Delete the filter and disable Inspector? (y/n)");

            if (scanner.nextLine().trim().equalsIgnoreCase("y")) {
                actions.deleteFilterAsync(filterArn).join();
                logger.info("Filter deleted.");
                String disableMsg = actions.disableInspectorAsync(null).join();
                logger.info(disableMsg);
                inspectorEnabled = false; // track that Inspector was disabled
            }

            waitForInputToContinue();

        } catch (Exception ex) {
            logger.error("Scenario encountered an error: {}", ex.getMessage(), ex);
            // Rethrow the exception
            throw ex;

        } finally {
            // Cleanup in case of an exception
            if (filterArn != null) {
                try {
                    actions.deleteFilterAsync(filterArn).join();
                    logger.info("Cleanup: Filter deleted.");
                } catch (Exception e) {
                    logger.warn("Failed to delete filter during cleanup: {}",
e.getMessage(), e);
                }
            }

            if (inspectorEnabled) {
                try {
                    actions.disableInspectorAsync(null).join();
                    logger.info("Cleanup: Inspector disabled.");
                } catch (Exception e) {
                    logger.warn("Failed to disable Inspector during cleanup: {}",
e.getMessage(), e);
                }
            }
        }
    }

    // Utility Method
    private static void waitForInputToContinue() {
```

```
        while (true) {
            logger.info("");
            logger.info("Enter 'c' to continue:");
            String input = scanner.nextLine().trim();
            if (input.equalsIgnoreCase("c")) break;
            logger.info("Invalid input, try again.");
        }
    }
}
```

Una clase contenedora para métodos del SDK de .

```
public class InspectorActions {
    private static Inspector2AsyncClient inspectorAsyncClient;
    private static final Logger logger =
 LoggerFactory.getLogger(InspectorActions.class);

    private static Inspector2AsyncClient getAsyncClient() {
        if (inspectorAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                    .maxConcurrency(100)
                    .connectionTimeout(Duration.ofSeconds(60))
                    .readTimeout(Duration.ofSeconds(60))
                    .writeTimeout(Duration.ofSeconds(60))
                    .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                    .apiCallTimeout(Duration.ofMinutes(2))
                    .apiCallAttemptTimeout(Duration.ofSeconds(90))
                    .retryStrategy(RetryMode.STANDARD)
                    .build();

            inspectorAsyncClient = Inspector2AsyncClient.builder()
                    .httpClient(httpClient)
                    .overrideConfiguration(overrideConfig)
                    .build();
        }
        return inspectorAsyncClient;
    }
```

```
    /**
     * Enables AWS Inspector for the provided account(s) and default resource types.
     *
     * @param accountIds Optional list of AWS account IDs.
     */
    public CompletableFuture<String> enableInspectorAsync(List<String> accountIds) {

        // The resource types to enable.
        List<ResourceScanType> resourceTypes = List.of(
                ResourceScanType.EC2,
                ResourceScanType.ECR,
                ResourceScanType.LAMBDA,
                ResourceScanType.LAMBDA_CODE
        );

        // Build the request.
        EnableRequest.Builder requestBuilder = EnableRequest.builder()
                .resourceTypes(resourceTypes);

        if (accountIds != null && !accountIds.isEmpty()) {
            requestBuilder.accountIds(accountIds);
        }

        EnableRequest request = requestBuilder.build();
        return getAsyncClient().enable(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ValidationException) {
                            throw new CompletionException(
                                    "Inspector may already be enabled for this
account: %s".formatted(cause.getMessage()),
                                    cause
                            );

                        }

                        if (cause instanceof Inspector2Exception) {
                            Inspector2Exception e = (Inspector2Exception) cause;
                            throw new CompletionException(
                                    "AWS Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                    cause
                            );
```

```
                        }

                        throw new CompletionException(
                                "Failed to enable Inspector:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                .thenApply(response -> {
                    StringBuilder summary = new StringBuilder("Enable results:\n");

                    if (response.accounts() == null ||
response.accounts().isEmpty()) {
                        summary.append("Inspector may already be enabled for all
target accounts.");
                        return summary.toString();
                    }

                    for (Account account : response.accounts()) {
                        String accountId = account.accountId() != null ?
account.accountId() : "Unknown";
                        String status = account.status() != null ?
account.statusAsString() : "Unknown";
                        summary.append(" • Account: ").append(accountId)
                                .append(" # Status: ").append(status).append("\n");
                    }

                    return summary.toString();
                });
    }


    /**
     * Retrieves and prints the coverage statistics using a paginator.
     */
    public CompletableFuture<String> listCoverageStatisticsAsync() {
        ListCoverageStatisticsRequest request =
ListCoverageStatisticsRequest.builder()
                .build();

        return getAsyncClient().listCoverageStatistics(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
```

```
                        Throwable cause = exception.getCause();

                        if (cause instanceof ValidationException) {
                            throw new CompletionException(
                                    "Validation error listing coverage statistics:
%s".formatted(cause.getMessage()),
                                    cause
                            );
                        }

                        if (cause instanceof Inspector2Exception) {
                            Inspector2Exception e = (Inspector2Exception) cause;

                            throw new CompletionException(
                                    "Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                    e
                            );
                        }

                        throw new CompletionException(
                                "Unexpected error listing coverage statistics:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                .thenApply(response -> {
                    List<Counts> countsList = response.countsByGroup();
                    StringBuilder sb = new StringBuilder();

                    if (countsList == null || countsList.isEmpty()) {
                        sb.append("No coverage statistics available.\n");
                        return sb.toString();
                    }

                    sb.append("Coverage Statistics:\n");

                    for (Counts c : countsList) {
                        sb.append("  Group: ").append(c.groupKey()).append("\n")
                                .append("    Total Count:
").append(c.count()).append("\n\n");
                    }
```

```
                    return sb.toString();
                });
    }


    /**
     * Asynchronously lists Inspector2 usage totals using a paginator.
     *
     * @param accountIds optional list of account IDs
     * @param maxResults maximum results per page
     * @return CompletableFuture completed with formatted summary text
     */
    public CompletableFuture<String> listUsageTotalsAsync(
            List<String> accountIds,
            int maxResults) {

        logger.info("Starting usage totals paginator…");

        ListUsageTotalsRequest.Builder builder = ListUsageTotalsRequest.builder()
                .maxResults(maxResults);

        if (accountIds != null && !accountIds.isEmpty()) {
            builder.accountIds(accountIds);
        }

        ListUsageTotalsRequest request = builder.build();
        ListUsageTotalsPublisher paginator =
getAsyncClient().listUsageTotalsPaginator(request);
        StringBuilder summaryBuilder = new StringBuilder();

        return paginator.subscribe(response -> {
                    if (response.totals() != null && !response.totals().isEmpty()) {
                        response.totals().forEach(total -> {
                            if (total.usage() != null) {
                                total.usage().forEach(usage -> {
                                    logger.info("Usage: {} = {}",
usage.typeAsString(), usage.total());
                                    summaryBuilder.append(usage.typeAsString())
                                            .append(": ")
                                            .append(usage.total())
                                            .append("\n");
                                });
                            }
                        });
```

```
                    } else {
                        logger.info("Page contained no usage totals.");
                    }
                }).thenRun(() -> logger.info("Successfully listed usage totals."))
                .thenApply(v -> {
                    String summary = summaryBuilder.toString();
                    return summary.isEmpty() ? "No usage totals found." : summary;
                }).exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ValidationException ve) {
                        throw new CompletionException(
                                "Validation error listing usage totals:
%s".formatted(ve.getMessage()),
                                ve
                        );
                    }

                    throw new CompletionException("Failed to list usage totals",
cause);
                });
    }



    /**
     * Retrieves the account status using the Inspector2Client.
     */
    public CompletableFuture<String> getAccountStatusAsync() {
        BatchGetAccountStatusRequest request =
BatchGetAccountStatusRequest.builder()
                .accountIds(Collections.emptyList())
                .build();

        return getAsyncClient().batchGetAccountStatus(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof AccessDeniedException) {
                            throw new CompletionException(
                                    "You do not have sufficient access:
%s".formatted(cause.getMessage()),
                                    cause
                            );
```

```
                        }

                        if (cause instanceof Inspector2Exception) {
                            Inspector2Exception e = (Inspector2Exception) cause;

                            throw new CompletionException(
                                    "Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                    e
                            );
                        }

                        throw new CompletionException(
                                "Unexpected error getting account status:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                .thenApply(response -> {

                    StringBuilder sb = new StringBuilder();
                    List<AccountState> accounts = response.accounts();

                    if (accounts == null || accounts.isEmpty()) {
                        sb.append("No account status returned.\n");
                        return sb.toString();
                    }

                    sb.append("Inspector Account Status:\n");
                    for (AccountState account : accounts) {

                        String accountId = account.accountId() != null
                                ? account.accountId()
                                : "Unknown";

                        sb.append("  Account ID: ").append(accountId).append("\n");

                        // Overall account state
                        if (account.state() != null && account.state().status() !=
null) {
                            sb.append("  Overall State: ")
                                    .append(account.state().status())
```

```
                                .append("\n");
                        } else {
                            sb.append("  Overall State: Unknown\n");
                        }

                        // Resource state (only status available)
                        ResourceState resources = account.resourceState();
                        if (resources != null) {
                            sb.append("  Resource Status: available\n");
                        }

                        sb.append("\n");
                    }

                    return sb.toString();
                });
    }


    /**
     * Asynchronously lists Inspector2 filters using a paginator.
     *
     * @param maxResults maximum filters per page (nullable)
     * @return CompletableFuture completed with summary text
     */
    public CompletableFuture<String> listFiltersAsync(Integer maxResults) {
        logger.info("Starting async filters paginator…");

        ListFiltersRequest.Builder builder = ListFiltersRequest.builder();
        if (maxResults != null) {
            builder.maxResults(maxResults);
        }

        ListFiltersRequest request = builder.build();

        // Paginator from SDK
        ListFiltersPublisher paginator =
getAsyncClient().listFiltersPaginator(request);
        StringBuilder collectedFilterIds = new StringBuilder();

        return paginator.subscribe(response -> {
            response.filters().forEach(filter -> {
                logger.info("Filter: " + filter.arn());
                collectedFilterIds.append(filter.arn()).append("\n");
```

```
            });
        }).thenApply(v -> {
            String result = collectedFilterIds.toString();
            logger.info("Successfully listed all filters.");
            return result.isEmpty() ? "No filters found." : result;
        }).exceptionally(ex -> {
            Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

            if (cause instanceof ValidationException ve) {
                throw new CompletionException(
                        "Validation error listing filters:
%s".formatted(ve.getMessage()),
                        ve
                );
            }

            throw new RuntimeException("Failed to list filters", ex);
        });
    }


    /**
     * Creates a new LOW severity filter in AWS Inspector2 to suppress findings.
     *
     * @param filterName  the name of the filter to create
     * @param description a descriptive string explaining the purpose of the filter
     * @return a CompletableFuture that completes with the ARN of the created filter
     * @throws CompletionException wraps any validation, Inspector2 service, or
unexpected errors
     */
    public CompletableFuture<String> createLowSeverityFilterAsync(
            String filterName,
            String description) {

        // Define a filter to match LOW severity findings.
        StringFilter severityFilter = StringFilter.builder()
                .value(Severity.LOW.toString())
                .comparison(StringComparison.EQUALS)
                .build();

        // Create filter criteria.
        FilterCriteria filterCriteria = FilterCriteria.builder()
                .severity(Collections.singletonList(severityFilter))
                .build();
```

```
        // Build the filter creation request.
        CreateFilterRequest request = CreateFilterRequest.builder()
                .name(filterName)
                .filterCriteria(filterCriteria)
                .action(FilterAction.SUPPRESS)
                .description(description)
                .build();

        return getAsyncClient().createFilter(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof ValidationException ve) {
                            throw new CompletionException(
                                    "Validation error creating filter:
%s".formatted(ve.getMessage()),
                                    ve
                            );
                        }

                        if (cause instanceof Inspector2Exception e) {
                            throw new CompletionException(
                                    "Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                    e
                            );
                        }

                        // Unexpected async error
                        throw new CompletionException(
                                "Unexpected error creating filter:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                // Extract and return the ARN of the created filter.
                .thenApply(CreateFilterResponse::arn);
    }
```

```
    /**
     * Lists all AWS Inspector findings of LOW severity asynchronously.
     *
     * @return CompletableFuture containing a List of finding ARNs.
     * Returns an empty list if no LOW severity findings are found.
     */
    public CompletableFuture<ArrayList<String>> listLowSeverityFindingsAsync() {
        logger.info("Starting async LOW severity findings paginator…");

        // Build a filter criteria for LOW severity.
        StringFilter severityFilter = StringFilter.builder()
                .value(Severity.LOW.toString())
                .comparison(StringComparison.EQUALS)
                .build();

        FilterCriteria filterCriteria = FilterCriteria.builder()
                .severity(Collections.singletonList(severityFilter))
                .build();

        // Build the request.
        ListFindingsRequest request = ListFindingsRequest.builder()
                .filterCriteria(filterCriteria)
                .build();

        ListFindingsPublisher paginator =
 getAsyncClient().listFindingsPaginator(request);
        List<String> allArns = Collections.synchronizedList(new ArrayList<>());

        return paginator.subscribe(response -> {
                    if (response.findings() != null && !
response.findings().isEmpty()) {
                        response.findings().forEach(finding -> {
                            logger.info("Finding ARN: {}", finding.findingArn());
                            allArns.add(finding.findingArn());
                        });
                    } else {
                        logger.info("Page contained no findings.");
                    }
                })
                .thenRun(() -> logger.info("Successfully listed all LOW severity
 findings."))
                .thenApply(v -> new ArrayList<>(allArns)) // Return list instead of
 a formatted string
                .exceptionally(ex -> {
```

```
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;
                    if (cause instanceof ValidationException ve) {
                        throw new CompletionException(
                                "Validation error listing LOW severity findings:
 %s".formatted(ve.getMessage()),
                                ve
                        );
                    }
                    throw new RuntimeException("Failed to list LOW severity
 findings", ex);
                });
    }



    /**
     * Lists AWS Inspector2 coverage details for scanned resources using a
 paginator.
     *
     * @param maxResults Maximum number of resources to return.
     */
    public CompletableFuture<String> listCoverageAsync(int maxResults) {
        ListCoverageRequest initialRequest = ListCoverageRequest.builder()
                .maxResults(maxResults)
                .build();

        ListCoveragePublisher paginator =
 getAsyncClient().listCoveragePaginator(initialRequest);
        StringBuilder summary = new StringBuilder();

        return paginator.subscribe(response -> {
            List<CoveredResource> coveredResources = response.coveredResources();

            if (coveredResources == null || coveredResources.isEmpty()) {
                summary.append("No coverage information available for this page.
\n");
                return;
            }

            Map<String, List<CoveredResource>> byType = coveredResources.stream()

 .collect(Collectors.groupingBy(CoveredResource::resourceTypeAsString));

            byType.forEach((type, list) ->
```

```
                    summary.append("  ").append(type)
                            .append(": ").append(list.size())
                            .append(" resource(s)\n")
            );

            // Include up to 3 sample resources per page
            for (int i = 0; i < Math.min(coveredResources.size(), 3); i++) {
                CoveredResource r = coveredResources.get(i);
                summary.append("  - ").append(r.resourceTypeAsString())
                        .append(": ").append(r.resourceId()).append("\n");
                summary.append("    Scan Type:
").append(r.scanTypeAsString()).append("\n");
                if (r.scanStatus() != null) {
                    summary.append("    Status:
").append(r.scanStatus().statusCodeAsString()).append("\n");
                }
                if (r.accountId() != null) {
                    summary.append("    Account ID:
").append(r.accountId()).append("\n");
                }
                summary.append("\n");
            }

        }).thenApply(v -> {
            if (summary.length() == 0) {
                return "No coverage information found across all pages.";
            } else {
                return "Coverage Information:\n" + summary.toString();
            }
        }).exceptionally(ex -> {
            Throwable cause = ex.getCause();
            if (cause instanceof ValidationException) {
                throw new CompletionException(
                        "Validation error listing coverage: " + cause.getMessage(),
cause);
            } else if (cause instanceof Inspector2Exception e) {
                throw new CompletionException(
                        "Inspector2 service error: " +
e.awsErrorDetails().errorMessage(), e);
            }
            throw new CompletionException("Unexpected error listing coverage: " +
ex.getMessage(), ex);
        });
    }
```

```
   /**
    * Deletes an AWS Inspector2 filter.
    *
    * @param filterARN The ARN of the filter to delete.
    */
   public CompletableFuture<Void> deleteFilterAsync(String filterARN) {
       return getAsyncClient().deleteFilter(
                       DeleteFilterRequest.builder()
                               .arn(filterARN)
                               .build()
               )
               .handle((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                       if (cause instanceof ResourceNotFoundException rnfe) {
                           String msg = "Filter not found for ARN:
%s".formatted(filterARN);
                           logger.warn(msg, rnfe);
                           throw new CompletionException(msg, rnfe);
                       }

                       throw new RuntimeException("Failed to delete the filter: " +
cause, cause);
                   }
                   return null;
               });
   }

   /**
    * Retrieves detailed information about a specific AWS Inspector2 finding
asynchronously.
    *
    * @param findingArn The ARN of the finding to look up.
    * @return A {@link CompletableFuture} that, when completed, provides a
formatted string
    * containing all available details for the finding.
    * @throws RuntimeException if the async call to Inspector2 fails.
    */
   public CompletableFuture<String> getFindingDetailsAsync(String findingArn) {
```

```
        BatchGetFindingDetailsRequest request =
BatchGetFindingDetailsRequest.builder()
                .findingArns(findingArn)
                .build();

        return getAsyncClient().batchGetFindingDetails(request)
                .thenApply(response -> {
                    if (response.findingDetails() == null ||
response.findingDetails().isEmpty()) {
                        return String.format("No details found for ARN: ",
findingArn);
                    }

                    StringBuilder sb = new StringBuilder();
                    response.findingDetails().forEach(detail -> {
                        sb.append("Finding ARN:
").append(detail.findingArn()).append("\n")
                                .append("Risk Score:
").append(detail.riskScore()).append("\n");

                        // ExploitObserved timings
                        if (detail.exploitObserved() != null) {
                            sb.append("Exploit First Seen:
").append(detail.exploitObserved().firstSeen()).append("\n")
                                    .append("Exploit Last Seen:
").append(detail.exploitObserved().lastSeen()).append("\n");
                        }

                        // Reference URLs
                        if (detail.hasReferenceUrls()) {
                            sb.append("Reference URLs:\n");
                            detail.referenceUrls().forEach(url -> sb.append("  •
").append(url).append("\n"));
                        }

                        // Tools
                        if (detail.hasTools()) {
                            sb.append("Tools:\n");
                            detail.tools().forEach(tool -> sb.append("  •
").append(tool).append("\n"));
                        }

                        // TTPs
                        if (detail.hasTtps()) {
```

```
                            sb.append("TTPs:\n");
                            detail.ttps().forEach(ttp -> sb.append("  •
").append(ttp).append("\n"));
                        }

                        // CWEs
                        if (detail.hasCwes()) {
                            sb.append("CWEs:\n");
                            detail.cwes().forEach(cwe -> sb.append("  •
").append(cwe).append("\n"));
                        }

                        // Evidence
                        if (detail.hasEvidences()) {
                            sb.append("Evidence:\n");
                            detail.evidences().forEach(ev -> {
                                sb.append("  - Severity:
").append(ev.severity()).append("\n");

                            });
                        }

                        sb.append("\n");
                    });

                    return sb.toString();
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ResourceNotFoundException rnfe) {
                        return "Finding not found: %s".formatted(findingArn);
                    }

                    // Fallback for other exceptions
                    throw new RuntimeException("Failed to get finding details for
ARN: " + findingArn, cause);
                });
    }


    /**
     * Asynchronously disables AWS Inspector for the specified accounts and resource
types.
```

```
     *
     * @param accountIds a {@link List} of AWS account IDs for which to disable
 Inspector;
     *                   may be {@code null} or empty to target the current account
     * @return a {@link CompletableFuture} that, when completed, returns a {@link
 String}
     *         summarizing the disable results for each account
     * @throws CompletionException if the disable operation fails due to validation
 errors,
     *                             service errors, or other exceptions
     * @see <a href="https://docs.aws.amazon.com/inspector/latest/APIReference/
API_Disable.html">
     *      AWS Inspector2 Disable API</a>
     */
    public CompletableFuture<String> disableInspectorAsync(List<String> accountIds)
 {

        // The resource types to disable.
        List<ResourceScanType> resourceTypes = List.of(
                ResourceScanType.EC2,
                ResourceScanType.ECR,
                ResourceScanType.LAMBDA,
                ResourceScanType.LAMBDA_CODE
        );

        // Build the request.
        DisableRequest.Builder requestBuilder = DisableRequest.builder()
                .resourceTypes(resourceTypes);

        if (accountIds != null && !accountIds.isEmpty()) {
            requestBuilder.accountIds(accountIds);
        }

        DisableRequest request = requestBuilder.build();

        return getAsyncClient().disable(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ValidationException) {
                            throw new CompletionException(
                                    "Inspector may already be disabled for this
 account: %s".formatted(cause.getMessage()),
                                    cause
```

```
                            );
                        }

                        if (cause instanceof Inspector2Exception) {
                            Inspector2Exception e = (Inspector2Exception) cause;
                            throw new CompletionException(
                                    "AWS Inspector2 service error:
 %s".formatted(e.awsErrorDetails().errorMessage()),
                                    cause
                            );
                        }

                        throw new CompletionException(
                                "Failed to disable Inspector:
 %s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                .thenApply(response -> {
                    StringBuilder summary = new StringBuilder("Disable results:\n");

                    if (response.accounts() == null ||
 response.accounts().isEmpty()) {
                        summary.append("Inspector may already be disabled for all
 target accounts.");
                        return summary.toString();
                    }

                    for (Account account : response.accounts()) {
                        String accountId = account.accountId() != null ?
 account.accountId() : "Unknown";
                        String status = account.status() != null ?
 account.statusAsString() : "Unknown";
                        summary.append(" • Account: ").append(accountId)
                                .append(" # Status: ").append(status).append("\n");
                    }

                    return summary.toString();
                });
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - BatchGetAccountStatus
  - BatchGetFindingDetails
  - CreateFilter
  - DeleteFilter
  - Habilitado
  - ListCoverage
  - ListCoverageStatistics
  - ListFilters
  - ListFindings
  - ListUsageTotals

Acciones

`BatchGetAccountStatus`

En el siguiente ejemplo de código, se muestra cómo utilizar `BatchGetAccountStatus`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Retrieves the account status using the Inspector2Client.
    */
   public CompletableFuture<String> getAccountStatusAsync() {
       BatchGetAccountStatusRequest request =
BatchGetAccountStatusRequest.builder()
               .accountIds(Collections.emptyList())
               .build();
```

```
        return getAsyncClient().batchGetAccountStatus(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof AccessDeniedException) {
                            throw new CompletionException(
                                    "You do not have sufficient access:
%s".formatted(cause.getMessage()),
                                    cause
                            );

                        }

                        if (cause instanceof Inspector2Exception) {
                            Inspector2Exception e = (Inspector2Exception) cause;

                            throw new CompletionException(
                                    "Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                    e
                            );
                        }

                        throw new CompletionException(
                                "Unexpected error getting account status:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                .thenApply(response -> {

                    StringBuilder sb = new StringBuilder();
                    List<AccountState> accounts = response.accounts();

                    if (accounts == null || accounts.isEmpty()) {
                        sb.append("No account status returned.\n");
                        return sb.toString();
                    }

                    sb.append("Inspector Account Status:\n");
                    for (AccountState account : accounts) {

                        String accountId = account.accountId() != null
```

```
                                ? account.accountId()
                                : "Unknown";

                        sb.append("  Account ID: ").append(accountId).append("\n");

                        // Overall account state
                        if (account.state() != null && account.state().status() !=
null) {
                            sb.append("  Overall State: ")
                                    .append(account.state().status())
                                    .append("\n");
                        } else {
                            sb.append("  Overall State: Unknown\n");
                        }

                        // Resource state (only status available)
                        ResourceState resources = account.resourceState();
                        if (resources != null) {
                            sb.append("  Resource Status: available\n");
                        }

                        sb.append("\n");
                    }

                    return sb.toString();
                });
    }
```

- Para obtener más información sobre la API, consulta BatchGetAccountStatusla Referencia AWS SDK for Java 2.x de la API.

`BatchGetFindingDetails`

En el siguiente ejemplo de código, se muestra cómo utilizar `BatchGetFindingDetails`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Retrieves detailed information about a specific AWS Inspector2 finding
asynchronously.
    *
    * @param findingArn The ARN of the finding to look up.
    * @return A {@link CompletableFuture} that, when completed, provides a
formatted string
    * containing all available details for the finding.
    * @throws RuntimeException if the async call to Inspector2 fails.
    */
   public CompletableFuture<String> getFindingDetailsAsync(String findingArn) {
       BatchGetFindingDetailsRequest request =
BatchGetFindingDetailsRequest.builder()
               .findingArns(findingArn)
               .build();

       return getAsyncClient().batchGetFindingDetails(request)
               .thenApply(response -> {
                   if (response.findingDetails() == null ||
response.findingDetails().isEmpty()) {
                       return String.format("No details found for ARN: ",
findingArn);
                   }

                   StringBuilder sb = new StringBuilder();
                   response.findingDetails().forEach(detail -> {
                       sb.append("Finding ARN:
").append(detail.findingArn()).append("\n")
                                .append("Risk Score:
").append(detail.riskScore()).append("\n");

                       // ExploitObserved timings
                       if (detail.exploitObserved() != null) {
```

```
                            sb.append("Exploit First Seen:
").append(detail.exploitObserved().firstSeen()).append("\n")
                                    .append("Exploit Last Seen:
").append(detail.exploitObserved().lastSeen()).append("\n");
                        }

                        // Reference URLs
                        if (detail.hasReferenceUrls()) {
                            sb.append("Reference URLs:\n");
                            detail.referenceUrls().forEach(url -> sb.append("  •
").append(url).append("\n"));
                        }

                        // Tools
                        if (detail.hasTools()) {
                            sb.append("Tools:\n");
                            detail.tools().forEach(tool -> sb.append("  •
").append(tool).append("\n"));
                        }

                        // TTPs
                        if (detail.hasTtps()) {
                            sb.append("TTPs:\n");
                            detail.ttps().forEach(ttp -> sb.append("  •
").append(ttp).append("\n"));
                        }

                        // CWEs
                        if (detail.hasCwes()) {
                            sb.append("CWEs:\n");
                            detail.cwes().forEach(cwe -> sb.append("  •
").append(cwe).append("\n"));
                        }

                        // Evidence
                        if (detail.hasEvidences()) {
                            sb.append("Evidence:\n");
                            detail.evidences().forEach(ev -> {
                                sb.append("  - Severity:
").append(ev.severity()).append("\n");

                            });
                        }
```

```
                    sb.append("\n");
                });

                return sb.toString();
            })
            .exceptionally(ex -> {
                Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                if (cause instanceof ResourceNotFoundException rnfe) {
                    return "Finding not found: %s".formatted(findingArn);
                }

                // Fallback for other exceptions
                throw new RuntimeException("Failed to get finding details for
ARN: " + findingArn, cause);
            });
    }
```

- Para obtener más información sobre la API, consulta BatchGetFindingDetailsla Referencia AWS SDK for Java 2.x de la API.

`CreateFilter`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateFilter`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new LOW severity filter in AWS Inspector2 to suppress findings.
     *
     * @param filterName  the name of the filter to create
     * @param description a descriptive string explaining the purpose of the filter
     * @return a CompletableFuture that completes with the ARN of the created filter
```

```
     * @throws CompletionException wraps any validation, Inspector2 service, or
unexpected errors
     */
    public CompletableFuture<String> createLowSeverityFilterAsync(
            String filterName,
            String description) {

        // Define a filter to match LOW severity findings.
        StringFilter severityFilter = StringFilter.builder()
                .value(Severity.LOW.toString())
                .comparison(StringComparison.EQUALS)
                .build();

        // Create filter criteria.
        FilterCriteria filterCriteria = FilterCriteria.builder()
                .severity(Collections.singletonList(severityFilter))
                .build();

        // Build the filter creation request.
        CreateFilterRequest request = CreateFilterRequest.builder()
                .name(filterName)
                .filterCriteria(filterCriteria)
                .action(FilterAction.SUPPRESS)
                .description(description)
                .build();

        return getAsyncClient().createFilter(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof ValidationException ve) {
                            throw new CompletionException(
                                    "Validation error creating filter:
%s".formatted(ve.getMessage()),
                                    ve
                            );
                        }

                        if (cause instanceof Inspector2Exception e) {
                            throw new CompletionException(
                                    "Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
```

```
                                    e
                            );
                        }

                        // Unexpected async error
                        throw new CompletionException(
                                "Unexpected error creating filter:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                // Extract and return the ARN of the created filter.
                .thenApply(CreateFilterResponse::arn);
    }
```

- Para obtener más información sobre la API, consulta CreateFilterla Referencia AWS SDK for Java 2.x de la API.

`DeleteFilter`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteFilter`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes an AWS Inspector2 filter.
     *
     * @param filterARN The ARN of the filter to delete.
     */
    public CompletableFuture<Void> deleteFilterAsync(String filterARN) {
        return getAsyncClient().deleteFilter(
                        DeleteFilterRequest.builder()
```

```
                                .arn(filterARN)
                                .build()
                )
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof ResourceNotFoundException rnfe) {
                            String msg = "Filter not found for ARN:
%s".formatted(filterARN);
                            logger.warn(msg, rnfe);
                            throw new CompletionException(msg, rnfe);
                        }

                        throw new RuntimeException("Failed to delete the filter: " +
cause, cause);
                    }
                    return null;
                });
    }
```

- Para obtener más información sobre la API, consulta DeleteFilterla Referencia AWS SDK for Java 2.x de la API.

`Disable`

En el siguiente ejemplo de código, se muestra cómo utilizar `Disable`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously disables AWS Inspector for the specified accounts and resource
types.
```

```
     *
     * @param accountIds a {@link List} of AWS account IDs for which to disable
 Inspector;
     *                   may be {@code null} or empty to target the current account
     * @return a {@link CompletableFuture} that, when completed, returns a {@link
 String}
     *         summarizing the disable results for each account
     * @throws CompletionException if the disable operation fails due to validation
 errors,
     *                             service errors, or other exceptions
     * @see <a href="https://docs.aws.amazon.com/inspector/latest/APIReference/
API_Disable.html">
     *      AWS Inspector2 Disable API</a>
     */
    public CompletableFuture<String> disableInspectorAsync(List<String> accountIds)
 {

        // The resource types to disable.
        List<ResourceScanType> resourceTypes = List.of(
                ResourceScanType.EC2,
                ResourceScanType.ECR,
                ResourceScanType.LAMBDA,
                ResourceScanType.LAMBDA_CODE
        );

        // Build the request.
        DisableRequest.Builder requestBuilder = DisableRequest.builder()
                .resourceTypes(resourceTypes);

        if (accountIds != null && !accountIds.isEmpty()) {
            requestBuilder.accountIds(accountIds);
        }

        DisableRequest request = requestBuilder.build();

        return getAsyncClient().disable(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ValidationException) {
                            throw new CompletionException(
                                    "Inspector may already be disabled for this
 account: %s".formatted(cause.getMessage()),
                                    cause
```

```
                            );
                    }

                    if (cause instanceof Inspector2Exception) {
                        Inspector2Exception e = (Inspector2Exception) cause;
                        throw new CompletionException(
                                "AWS Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                cause
                        );
                    }

                    throw new CompletionException(
                            "Failed to disable Inspector:
%s".formatted(exception.getMessage()),
                            exception
                    );
                }
            })
            .thenApply(response -> {
                StringBuilder summary = new StringBuilder("Disable results:\n");

                if (response.accounts() == null ||
response.accounts().isEmpty()) {
                    summary.append("Inspector may already be disabled for all
target accounts.");
                    return summary.toString();
                }

                for (Account account : response.accounts()) {
                    String accountId = account.accountId() != null ?
account.accountId() : "Unknown";
                    String status = account.status() != null ?
account.statusAsString() : "Unknown";
                    summary.append(" • Account: ").append(accountId)
                            .append(" # Status: ").append(status).append("\n");
                }

                return summary.toString();
            });
   }
```

- Para obtener más información sobre la API, consulta la sección Inhabilitar en la referencia de la AWS SDK for Java 2.x API.

`Enable`

En el siguiente ejemplo de código, se muestra cómo utilizar `Enable`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Enables AWS Inspector for the provided account(s) and default resource types.
 *
 * @param accountIds Optional list of AWS account IDs.
 */
public CompletableFuture<String> enableInspectorAsync(List<String> accountIds) {

    // The resource types to enable.
    List<ResourceScanType> resourceTypes = List.of(
            ResourceScanType.EC2,
            ResourceScanType.ECR,
            ResourceScanType.LAMBDA,
            ResourceScanType.LAMBDA_CODE
    );

    // Build the request.
    EnableRequest.Builder requestBuilder = EnableRequest.builder()
            .resourceTypes(resourceTypes);

    if (accountIds != null && !accountIds.isEmpty()) {
        requestBuilder.accountIds(accountIds);
    }

    EnableRequest request = requestBuilder.build();
    return getAsyncClient().enable(request)
            .whenComplete((response, exception) -> {
```

```
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ValidationException) {
                            throw new CompletionException(
                                    "Inspector may already be enabled for this
account: %s".formatted(cause.getMessage()),
                                    cause
                            );

                        }

                        if (cause instanceof Inspector2Exception) {
                            Inspector2Exception e = (Inspector2Exception) cause;
                            throw new CompletionException(
                                    "AWS Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                    cause
                            );
                        }

                        throw new CompletionException(
                                "Failed to enable Inspector:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                .thenApply(response -> {
                    StringBuilder summary = new StringBuilder("Enable results:\n");

                    if (response.accounts() == null ||
response.accounts().isEmpty()) {
                        summary.append("Inspector may already be enabled for all
target accounts.");
                        return summary.toString();
                    }

                    for (Account account : response.accounts()) {
                        String accountId = account.accountId() != null ?
account.accountId() : "Unknown";
                        String status = account.status() != null ?
account.statusAsString() : "Unknown";
                        summary.append(" • Account: ").append(accountId)
                                .append(" # Status: ").append(status).append("\n");
```

```
                }

                return summary.toString();
            });
    }
```

- Para obtener más información sobre la API, consulta la sección Habilitar en la referencia de la AWS SDK for Java 2.x API.

`ListCoverage`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListCoverage`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Lists AWS Inspector2 coverage details for scanned resources using a
paginator.
     *
     * @param maxResults Maximum number of resources to return.
     */
    public CompletableFuture<String> listCoverageAsync(int maxResults) {
        ListCoverageRequest initialRequest = ListCoverageRequest.builder()
                .maxResults(maxResults)
                .build();

        ListCoveragePublisher paginator =
getAsyncClient().listCoveragePaginator(initialRequest);
        StringBuilder summary = new StringBuilder();

        return paginator.subscribe(response -> {
            List<CoveredResource> coveredResources = response.coveredResources();
```

```
            if (coveredResources == null || coveredResources.isEmpty()) {
                summary.append("No coverage information available for this page.
\n");
                return;
            }

            Map<String, List<CoveredResource>> byType = coveredResources.stream()

 .collect(Collectors.groupingBy(CoveredResource::resourceTypeAsString));

            byType.forEach((type, list) ->
                    summary.append("  ").append(type)
                            .append(": ").append(list.size())
                            .append(" resource(s)\n")
            );

            // Include up to 3 sample resources per page
            for (int i = 0; i < Math.min(coveredResources.size(), 3); i++) {
                CoveredResource r = coveredResources.get(i);
                summary.append("  - ").append(r.resourceTypeAsString())
                        .append(": ").append(r.resourceId()).append("\n");
                summary.append("    Scan Type:
 ").append(r.scanTypeAsString()).append("\n");
                if (r.scanStatus() != null) {
                    summary.append("    Status:
 ").append(r.scanStatus().statusCodeAsString()).append("\n");
                }
                if (r.accountId() != null) {
                    summary.append("    Account ID:
 ").append(r.accountId()).append("\n");
                }
                summary.append("\n");
            }

        }).thenApply(v -> {
            if (summary.length() == 0) {
                return "No coverage information found across all pages.";
            } else {
                return "Coverage Information:\n" + summary.toString();
            }
        }).exceptionally(ex -> {
            Throwable cause = ex.getCause();
            if (cause instanceof ValidationException) {
                throw new CompletionException(
```

```
                        "Validation error listing coverage: " + cause.getMessage(),
cause);
            } else if (cause instanceof Inspector2Exception e) {
                throw new CompletionException(
                        "Inspector2 service error: " +
e.awsErrorDetails().errorMessage(), e);
            }
            throw new CompletionException("Unexpected error listing coverage: " +
ex.getMessage(), ex);
        });
    }
```

- Para obtener más información sobre la API, consulta ListCoveragela Referencia AWS SDK for Java 2.x de la API.

`ListCoverageStatistics`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListCoverageStatistics`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Retrieves and prints the coverage statistics using a paginator.
     */
    public CompletableFuture<String> listCoverageStatisticsAsync() {
        ListCoverageStatisticsRequest request =
ListCoverageStatisticsRequest.builder()
                .build();

        return getAsyncClient().listCoverageStatistics(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
```

```
                    if (cause instanceof ValidationException) {
                        throw new CompletionException(
                                "Validation error listing coverage statistics:
%s".formatted(cause.getMessage()),
                                cause
                        );
                    }

                    if (cause instanceof Inspector2Exception) {
                        Inspector2Exception e = (Inspector2Exception) cause;

                        throw new CompletionException(
                                "Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                e
                        );
                    }

                    throw new CompletionException(
                            "Unexpected error listing coverage statistics:
%s".formatted(exception.getMessage()),
                            exception
                    );
                }
            })
            .thenApply(response -> {
                List<Counts> countsList = response.countsByGroup();
                StringBuilder sb = new StringBuilder();

                if (countsList == null || countsList.isEmpty()) {
                    sb.append("No coverage statistics available.\n");
                    return sb.toString();
                }

                sb.append("Coverage Statistics:\n");

                for (Counts c : countsList) {
                    sb.append("  Group: ").append(c.groupKey()).append("\n")
                            .append("    Total Count:
").append(c.count()).append("\n\n");
                }

                return sb.toString();
```

```
                });
    }
```

- Para obtener más información sobre la API, consulta ListCoverageStatisticsla Referencia AWS SDK for Java 2.x de la API.

`ListFilters`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListFilters`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously lists Inspector2 filters using a paginator.
     *
     * @param maxResults maximum filters per page (nullable)
     * @return CompletableFuture completed with summary text
     */
    public CompletableFuture<String> listFiltersAsync(Integer maxResults) {
        logger.info("Starting async filters paginator…");

        ListFiltersRequest.Builder builder = ListFiltersRequest.builder();
        if (maxResults != null) {
            builder.maxResults(maxResults);
        }

        ListFiltersRequest request = builder.build();

        // Paginator from SDK
        ListFiltersPublisher paginator =
getAsyncClient().listFiltersPaginator(request);
        StringBuilder collectedFilterIds = new StringBuilder();
```

```
        return paginator.subscribe(response -> {
            response.filters().forEach(filter -> {
                logger.info("Filter: " + filter.arn());
                collectedFilterIds.append(filter.arn()).append("\n");
            });
        }).thenApply(v -> {
            String result = collectedFilterIds.toString();
            logger.info("Successfully listed all filters.");
            return result.isEmpty() ? "No filters found." : result;
        }).exceptionally(ex -> {
            Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

            if (cause instanceof ValidationException ve) {
                throw new CompletionException(
                        "Validation error listing filters:
%s".formatted(ve.getMessage()),
                        ve
                );
            }

            throw new RuntimeException("Failed to list filters", ex);
        });
    }
```

- Para obtener más información sobre la API, consulta ListFilterslа Referencia AWS SDK for Java 2.x de la API.

`ListFindings`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListFindings`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Lists all AWS Inspector findings of LOW severity asynchronously.
     *
     * @return CompletableFuture containing a List of finding ARNs.
     * Returns an empty list if no LOW severity findings are found.
     */
    public CompletableFuture<ArrayList<String>> listLowSeverityFindingsAsync() {
        logger.info("Starting async LOW severity findings paginator…");

        // Build a filter criteria for LOW severity.
        StringFilter severityFilter = StringFilter.builder()
                .value(Severity.LOW.toString())
                .comparison(StringComparison.EQUALS)
                .build();

        FilterCriteria filterCriteria = FilterCriteria.builder()
                .severity(Collections.singletonList(severityFilter))
                .build();

        // Build the request.
        ListFindingsRequest request = ListFindingsRequest.builder()
                .filterCriteria(filterCriteria)
                .build();

        ListFindingsPublisher paginator =
 getAsyncClient().listFindingsPaginator(request);
        List<String> allArns = Collections.synchronizedList(new ArrayList<>());

        return paginator.subscribe(response -> {
                    if (response.findings() != null && !
response.findings().isEmpty()) {
                        response.findings().forEach(finding -> {
                            logger.info("Finding ARN: {}", finding.findingArn());
                            allArns.add(finding.findingArn());
                        });
                    } else {
                        logger.info("Page contained no findings.");
                    }
                })
                .thenRun(() -> logger.info("Successfully listed all LOW severity
 findings."))
                .thenApply(v -> new ArrayList<>(allArns)) // Return list instead of
 a formatted string
                .exceptionally(ex -> {
```

```
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;
                    if (cause instanceof ValidationException ve) {
                        throw new CompletionException(
                                "Validation error listing LOW severity findings:
%s".formatted(ve.getMessage()),
                                ve
                        );
                    }
                    throw new RuntimeException("Failed to list LOW severity
findings", ex);
                });
    }
```

- Para obtener más información sobre la API, consulta ListFindingsla Referencia AWS SDK for Java 2.x de la API.

`ListUsageTotals`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListUsageTotals`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously lists Inspector2 usage totals using a paginator.
     *
     * @param accountIds optional list of account IDs
     * @param maxResults maximum results per page
     * @return CompletableFuture completed with formatted summary text
     */
    public CompletableFuture<String> listUsageTotalsAsync(
            List<String> accountIds,
            int maxResults) {
```

```
        logger.info("Starting usage totals paginator…");

        ListUsageTotalsRequest.Builder builder = ListUsageTotalsRequest.builder()
                .maxResults(maxResults);

        if (accountIds != null && !accountIds.isEmpty()) {
            builder.accountIds(accountIds);
        }

        ListUsageTotalsRequest request = builder.build();
        ListUsageTotalsPublisher paginator =
getAsyncClient().listUsageTotalsPaginator(request);
        StringBuilder summaryBuilder = new StringBuilder();

        return paginator.subscribe(response -> {
                    if (response.totals() != null && !response.totals().isEmpty()) {
                        response.totals().forEach(total -> {
                            if (total.usage() != null) {
                                total.usage().forEach(usage -> {
                                    logger.info("Usage: {} = {}",
usage.typeAsString(), usage.total());
                                    summaryBuilder.append(usage.typeAsString())
                                            .append(": ")
                                            .append(usage.total())
                                            .append("\n");
                                });
                            }
                        });
                    } else {
                        logger.info("Page contained no usage totals.");
                    }
                }).thenRun(() -> logger.info("Successfully listed usage totals."))
                .thenApply(v -> {
                    String summary = summaryBuilder.toString();
                    return summary.isEmpty() ? "No usage totals found." : summary;
                }).exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ValidationException ve) {
                        throw new CompletionException(
                                "Validation error listing usage totals:
%s".formatted(ve.getMessage()),
                                ve
```

```
                        );
                }

                throw new CompletionException("Failed to list usage totals",
cause);
            });
    }
```

- Para obtener más información sobre la API, consulta ListUsageTotalsla Referencia AWS SDK for Java 2.x de la API.

AWS IoT ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with AWS IoT.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hola AWS IoT

En el siguiente ejemplo de código se muestra cómo empezar a utilizar AWS IoT.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iot.IotClient;
import software.amazon.awssdk.services.iot.model.ListThingsRequest;
import software.amazon.awssdk.services.iot.model.ListThingsResponse;
import software.amazon.awssdk.services.iot.model.ThingAttribute;
import software.amazon.awssdk.services.iot.paginators.ListThingsIterable;

import java.util.List;

public class HelloIoT {
    public static void main(String[] args) {
        System.out.println("Hello AWS IoT. Here is a listing of your AWS IoT
 Things:");
        IotClient iotClient = IotClient.builder()
            .region(Region.US_EAST_1)
            .build();

        listAllThings(iotClient);
    }

    public static void listAllThings(IotClient iotClient) {
        iotClient.listThingsPaginator(ListThingsRequest.builder()
                .maxResults(10)
                .build())
            .stream()
            .flatMap(response -> response.things().stream())
            .forEach(attribute -> {
                System.out.println("Thing name: " + attribute.thingName());
                System.out.println("Thing ARN: " + attribute.thingArn());
            });
    }
}
```

- Para obtener información sobre la API, consulte listThings en la Referencia de la API de AWS SDK for Java 2.x .

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crea una AWS IoT cosa.
- Generar un certificado de dispositivo.
- Actualiza AWS IoT cualquier cosa con atributos.
- Devolver un punto de conexión único.
- Enumere sus AWS IoT certificados.
- Actualiza y AWS IoT oculta.
- Escribir la información de estado.
- Crear una regla.
- Mostrar las reglas.
- Buscar objetos con el nombre de objeto.
- Elimina cualquier AWS IoT cosa.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario interactivo que demuestre AWS IoT las funciones.

```
import java.util.Scanner;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
```

```
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This Java example performs these tasks:
 *
 * 1. Creates an AWS IoT Thing.
 * 2. Generate and attach a device certificate.
 * 3. Update an AWS IoT Thing with Attributes.
 * 4. Get an AWS IoT Endpoint.
 * 5. List your certificates.
 * 6. Updates the shadow for the specified thing..
 * 7. Write out the state information, in JSON format
 * 8. Creates a rule
 * 9. List rules
 * 10. Search things
 * 11. Detach amd delete the certificate.
 * 12. Delete Thing.
 */
public class IotScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) {
        final String usage =
            """
                Usage:
                    <roleARN> <snsAction>

                Where:
                    roleARN - The ARN of an IAM role that has permission to work
 with AWS IOT.
                    snsAction  - An ARN of an SNS topic.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        IotActions iotActions = new IotActions();
        String thingName;
        String ruleName;
        String roleARN = args[0];
```

```
        String snsAction = args[1];
        Scanner scanner = new Scanner(System.in);

        System.out.println(DASHES);
        System.out.println("Welcome to the AWS IoT basics scenario.");
        System.out.println("""
            This example program demonstrates various interactions with the AWS
Internet of Things (IoT) Core service. The program guides you through a series of
steps,
            including creating an IoT Thing, generating a device certificate,
updating the Thing with attributes, and so on.
            It utilizes the AWS SDK for Java V2 and incorporates functionality for
creating and managing IoT Things, certificates, rules,
            shadows, and performing searches. The program aims to showcase AWS IoT
capabilities and provides a comprehensive example for
            developers working with AWS IoT in a Java environment.

            Let's get started...

            """);
        System.out.println(DASHES);

        System.out.println("1. Create an AWS IoT Thing.");
        System.out.println("""
            An AWS IoT Thing represents a virtual entity in the AWS IoT service that
can be associated with
            a physical device.
            """);
        // Prompt the user for input.
        System.out.print("Enter Thing name: ");
        thingName = scanner.nextLine();
        iotActions.createIoTThing(thingName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Generate a device certificate.");
        System.out.println("""
            A device certificate performs a role in securing the communication
between devices (Things)
            and the AWS IoT platform.
            """);

        System.out.print("Do you want to create a certificate for " +thingName +"?
(y/n)");
```

```
        String certAns = scanner.nextLine();
        String certificateArn="" ;
        if (certAns != null && certAns.trim().equalsIgnoreCase("y")) {
            certificateArn = iotActions.createCertificate();
            System.out.println("Attach the certificate to the AWS IoT Thing.");
            iotActions.attachCertificateToThing(thingName, certificateArn);
        } else {
            System.out.println("A device certificate was not created.");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Update an AWS IoT Thing with Attributes.");
        System.out.println("""
             IoT Thing attributes, represented as key-value pairs, offer a pivotal
advantage in facilitating efficient data
             management and retrieval within the AWS IoT ecosystem.
            """);
        waitForInputToContinue(scanner);
        iotActions.updateShadowThing(thingName);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Return a unique endpoint specific to the Amazon Web
Services account.");
        System.out.println("""
            An IoT Endpoint refers to a specific URL or Uniform Resource Locator
that serves as the entry point for communication between IoT devices and the AWS
IoT service.
           """);
        waitForInputToContinue(scanner);
        String endpointUrl = iotActions.describeEndpoint();
        System.out.println("The endpoint is "+endpointUrl);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. List your AWS IoT certificates");
        waitForInputToContinue(scanner);
        if (certificateArn.length() > 0) {
            iotActions.listCertificates();
        } else {
```

```
            System.out.println("You did not create a certificates. Skipping this
step.");
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Create an IoT shadow that refers to a digital
representation or virtual twin of a physical IoT device");
        System.out.println("""
            A Thing Shadow refers to a feature that enables you to create a virtual
representation, or "shadow,"
            of a physical device or thing. The Thing Shadow allows you to
synchronize and control the state of a device between
            the cloud and the device itself. and the AWS IoT service. For example,
you can write and retrieve JSON data from a Thing Shadow.
           """);
        waitForInputToContinue(scanner);
        iotActions.updateShadowThing(thingName);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Write out the state information, in JSON format.");
        waitForInputToContinue(scanner);
        iotActions.getPayload(thingName);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Creates a rule");
        System.out.println("""
        Creates a rule that is an administrator-level action.
        Any user who has permission to create rules will be able to access data
processed by the rule.
        """);
        System.out.print("Enter Rule name: ");
        ruleName = scanner.nextLine();
        iotActions.createIoTRule(roleARN, ruleName, snsAction);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. List your rules.");
```

```
        waitForInputToContinue(scanner);
        iotActions.listIoTRules();
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Search things using the Thing name.");
        waitForInputToContinue(scanner);
        String queryString = "thingName:"+thingName ;
        iotActions.searchThings(queryString);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        if (certificateArn.length() > 0) {
            System.out.print("Do you want to detach and delete the certificate for "
+thingName +"? (y/n)");
            String delAns = scanner.nextLine();
            if (delAns != null && delAns.trim().equalsIgnoreCase("y")) {
                System.out.println("11. You selected to detach amd delete the
certificate.");
                waitForInputToContinue(scanner);
                iotActions.detachThingPrincipal(thingName, certificateArn);
                iotActions.deleteCertificate(certificateArn);
                waitForInputToContinue(scanner);
            } else {
                System.out.println("11. You selected not to delete the
certificate.");
            }
        } else {
            System.out.println("11. You did not create a certificate so there is
nothing to delete.");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Delete the AWS IoT Thing.");
        System.out.print("Do you want to delete the IoT Thing? (y/n)");
        String delAns = scanner.nextLine();
        if (delAns != null && delAns.trim().equalsIgnoreCase("y")) {
            iotActions.deleteIoTThing(thingName);
        } else {
            System.out.println("The IoT Thing was not deleted.");
        }
```

```
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The AWS IoT workflow has successfully completed.");
        System.out.println(DASHES);
    }


    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println("");
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }
}
```

Una clase contenedora para los métodos AWS IoT del SDK.

```
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.core.retry.RetryPolicy;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iot.IotAsyncClient;
import software.amazon.awssdk.services.iot.model.Action;
import software.amazon.awssdk.services.iot.model.AttachThingPrincipalRequest;
import software.amazon.awssdk.services.iot.model.AttachThingPrincipalResponse;
import software.amazon.awssdk.services.iot.model.Certificate;
import software.amazon.awssdk.services.iot.model.CreateKeysAndCertificateResponse;
```

```
import software.amazon.awssdk.services.iot.model.CreateThingRequest;
import software.amazon.awssdk.services.iot.model.CreateThingResponse;
import software.amazon.awssdk.services.iot.model.CreateTopicRuleRequest;
import software.amazon.awssdk.services.iot.model.CreateTopicRuleResponse;
import software.amazon.awssdk.services.iot.model.DeleteCertificateRequest;
import software.amazon.awssdk.services.iot.model.DeleteCertificateResponse;
import software.amazon.awssdk.services.iot.model.DeleteThingRequest;
import software.amazon.awssdk.services.iot.model.DeleteThingResponse;
import software.amazon.awssdk.services.iot.model.DescribeEndpointRequest;
import software.amazon.awssdk.services.iot.model.DescribeEndpointResponse;
import software.amazon.awssdk.services.iot.model.DescribeThingRequest;
import software.amazon.awssdk.services.iot.model.DescribeThingResponse;
import software.amazon.awssdk.services.iot.model.DetachThingPrincipalRequest;
import software.amazon.awssdk.services.iot.model.DetachThingPrincipalResponse;
import software.amazon.awssdk.services.iot.model.IotException;
import software.amazon.awssdk.services.iot.model.ListCertificatesResponse;
import software.amazon.awssdk.services.iot.model.ListTopicRulesRequest;
import software.amazon.awssdk.services.iot.model.ListTopicRulesResponse;
import software.amazon.awssdk.services.iot.model.SearchIndexRequest;
import software.amazon.awssdk.services.iot.model.SearchIndexResponse;
import software.amazon.awssdk.services.iot.model.TopicRuleListItem;
import software.amazon.awssdk.services.iot.model.SnsAction;
import software.amazon.awssdk.services.iot.model.TopicRulePayload;
import software.amazon.awssdk.services.iotdataplane.IotDataPlaneAsyncClient;
import software.amazon.awssdk.services.iotdataplane.model.GetThingShadowRequest;
import software.amazon.awssdk.services.iotdataplane.model.GetThingShadowResponse;
import software.amazon.awssdk.services.iotdataplane.model.UpdateThingShadowRequest;
import software.amazon.awssdk.services.iotdataplane.model.UpdateThingShadowResponse;
import java.nio.charset.StandardCharsets;
import java.time.Duration;
import java.util.List;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;
import java.util.regex.Matcher;
import java.util.regex.Pattern;

public class IotActions {

    private static IotAsyncClient iotAsyncClient;

    private static IotDataPlaneAsyncClient iotAsyncDataPlaneClient;

    private static final String TOPIC = "your-iot-topic";
```

```
    private static IotDataPlaneAsyncClient getAsyncDataPlaneClient() {
        SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
            .maxConcurrency(100)
            .connectionTimeout(Duration.ofSeconds(60))
            .readTimeout(Duration.ofSeconds(60))
            .writeTimeout(Duration.ofSeconds(60))
            .build();

        ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
            .apiCallTimeout(Duration.ofMinutes(2))
            .apiCallAttemptTimeout(Duration.ofSeconds(90))
            .retryPolicy(RetryPolicy.builder()
                .numRetries(3)
                .build())
            .build();

        if (iotAsyncDataPlaneClient == null) {
            iotAsyncDataPlaneClient = IotDataPlaneAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return iotAsyncDataPlaneClient;
    }


    private static IotAsyncClient getAsyncClient() {
        SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
            .maxConcurrency(100)
            .connectionTimeout(Duration.ofSeconds(60))
            .readTimeout(Duration.ofSeconds(60))
            .writeTimeout(Duration.ofSeconds(60))
            .build();

        ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
            .apiCallTimeout(Duration.ofMinutes(2))
            .apiCallAttemptTimeout(Duration.ofSeconds(90))
            .retryPolicy(RetryPolicy.builder()
                .numRetries(3)
                .build())
            .build();
```

```
        if (iotAsyncClient == null) {
            iotAsyncClient = IotAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return iotAsyncClient;
    }

    /**
     * Creates an IoT certificate asynchronously.
     *
     * @return The ARN of the created certificate.
     * <p>
     * This method initiates an asynchronous request to create an IoT certificate.
     * If the request is successful, it prints the certificate details and returns
the certificate ARN.
     * If an exception occurs, it prints the error message.
     */
    public String createCertificate() {
        CompletableFuture<CreateKeysAndCertificateResponse> future =
getAsyncClient().createKeysAndCertificate();
        final String[] certificateArn = {null};
        future.whenComplete((response, ex) -> {
            if (response != null) {
                String certificatePem = response.certificatePem();
                certificateArn[0] = response.certificateArn();

                // Print the details.
                System.out.println("\nCertificate:");
                System.out.println(certificatePem);
                System.out.println("\nCertificate ARN:");
                System.out.println(certificateArn[0]);

            } else {
                Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + cause.getMessage());
```

```
                }
            }
        });

        future.join();
        return certificateArn[0];
    }

    /**
     * Creates an IoT Thing with the specified name asynchronously.
     *
     * @param thingName The name of the IoT Thing to create.
     *
     * This method initiates an asynchronous request to create an IoT Thing with the
specified name.
     * If the request is successful, it prints the name of the thing and its ARN
value.
     * If an exception occurs, it prints the error message.
     */
    public void createIoTThing(String thingName) {
        CreateThingRequest createThingRequest = CreateThingRequest.builder()
            .thingName(thingName)
            .build();

        CompletableFuture<CreateThingResponse> future =
getAsyncClient().createThing(createThingRequest);
        future.whenComplete((createThingResponse, ex) -> {
            if (createThingResponse != null) {
                System.out.println(thingName + " was successfully created. The ARN
value is " + createThingResponse.thingArn());
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + cause.getMessage());
                }
            }
        });

        future.join();
    }
```

```
   /**
    * Attaches a certificate to an IoT Thing asynchronously.
    *
    * @param thingName The name of the IoT Thing.
    * @param certificateArn The ARN of the certificate to attach.
    *
    * This method initiates an asynchronous request to attach a certificate to an
IoT Thing.
    * If the request is successful, it prints a confirmation message and additional
information about the Thing.
    * If an exception occurs, it prints the error message.
    */
   public void attachCertificateToThing(String thingName, String certificateArn) {
       AttachThingPrincipalRequest principalRequest =
AttachThingPrincipalRequest.builder()
           .thingName(thingName)
           .principal(certificateArn)
           .build();

       CompletableFuture<AttachThingPrincipalResponse> future =
getAsyncClient().attachThingPrincipal(principalRequest);
       future.whenComplete((attachResponse, ex) -> {
           if (attachResponse != null &&
attachResponse.sdkHttpResponse().isSuccessful()) {
               System.out.println("Certificate attached to Thing successfully.");

               // Print additional information about the Thing.
               describeThing(thingName);
           } else {
               Throwable cause = ex != null ? ex.getCause() : null;
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
               } else if (cause != null) {
                   System.err.println("Unexpected error: " + cause.getMessage());
               } else {
                   System.err.println("Failed to attach certificate to Thing. HTTP
Status Code: " +
                           attachResponse.sdkHttpResponse().statusCode());
               }
           }
       });

       future.join();
```

```
    }

    /**
     * Describes an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing.
     *
     * This method initiates an asynchronous request to describe an IoT Thing.
     * If the request is successful, it prints the Thing details.
     * If an exception occurs, it prints the error message.
     */
    private void describeThing(String thingName) {
        DescribeThingRequest thingRequest = DescribeThingRequest.builder()
            .thingName(thingName)
            .build();

        CompletableFuture<DescribeThingResponse> future =
getAsyncClient().describeThing(thingRequest);
        future.whenComplete((describeResponse, ex) -> {
            if (describeResponse != null) {
                System.out.println("Thing Details:");
                System.out.println("Thing Name: " + describeResponse.thingName());
                System.out.println("Thing ARN: " + describeResponse.thingArn());
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to describe Thing.");
                }
            }
        });

        future.join();
    }

    /**
     * Updates the shadow of an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing.
     *
```

```
    * This method initiates an asynchronous request to update the shadow of an IoT
Thing.
    * If the request is successful, it prints a confirmation message.
    * If an exception occurs, it prints the error message.
    */
   public void updateShadowThing(String thingName) {
       // Create Thing Shadow State Document.
       String stateDocument = "{\"state\":{\"reported\":{\"temperature\":25,
\"humidity\":50}}}";
       SdkBytes data = SdkBytes.fromString(stateDocument, StandardCharsets.UTF_8);
       UpdateThingShadowRequest updateThingShadowRequest =
UpdateThingShadowRequest.builder()
           .thingName(thingName)
           .payload(data)
           .build();

       CompletableFuture<UpdateThingShadowResponse> future =
getAsyncDataPlaneClient().updateThingShadow(updateThingShadowRequest);
       future.whenComplete((updateResponse, ex) -> {
           if (updateResponse != null) {
               System.out.println("Thing Shadow updated successfully.");
           } else {
               Throwable cause = ex != null ? ex.getCause() : null;
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
               } else if (cause != null) {
                   System.err.println("Unexpected error: " + cause.getMessage());
               } else {
                   System.err.println("Failed to update Thing Shadow.");
               }
           }
       });

       future.join();
   }

   /**
    * Describes the endpoint of the IoT service asynchronously.
    *
    * @return A CompletableFuture containing the full endpoint URL.
    *
    * This method initiates an asynchronous request to describe the endpoint of the
IoT service.
```

```
     * If the request is successful, it prints and returns the full endpoint URL.
     * If an exception occurs, it prints the error message.
     */
    public String describeEndpoint() {
        CompletableFuture<DescribeEndpointResponse> future =
 getAsyncClient().describeEndpoint(DescribeEndpointRequest.builder().endpointType("iot:Data-
ATS").build());
        final String[] result = {null};

        future.whenComplete((endpointResponse, ex) -> {
            if (endpointResponse != null) {
                String endpointUrl = endpointResponse.endpointAddress();
                String exString = getValue(endpointUrl);
                String fullEndpoint = "https://" + exString + "-ats.iot.us-
east-1.amazonaws.com";

                System.out.println("Full Endpoint URL: " + fullEndpoint);
                result[0] = fullEndpoint;
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
 ex.getCause() : ex;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
 cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + cause.getMessage());
                }
            }
        });

        future.join();
        return result[0];
    }

    /**
     * Extracts a specific value from the endpoint URL.
     *
     * @param input The endpoint URL to process.
     * @return The extracted value from the endpoint URL.
     */
    private static String getValue(String input) {
        // Define a regular expression pattern for extracting the subdomain.
        Pattern pattern = Pattern.compile("^(.*?)\\.iot\\.us-east-1\\.amazonaws\
\.com");
```

```
        // Match the pattern against the input string.
        Matcher matcher = pattern.matcher(input);

        // Check if a match is found.
        if (matcher.find()) {
            // Extract the subdomain from the first capturing group.
            String subdomain = matcher.group(1);
            System.out.println("Extracted subdomain: " + subdomain);
            return subdomain ;
        } else {
            System.out.println("No match found");
        }
        return "" ;
    }

    /**
     * Lists all certificates asynchronously.
     *
     * This method initiates an asynchronous request to list all certificates.
     * If the request is successful, it prints the certificate IDs and ARNs.
     * If an exception occurs, it prints the error message.
     */
    public void listCertificates() {
        CompletableFuture<ListCertificatesResponse> future =
getAsyncClient().listCertificates();
        future.whenComplete((response, ex) -> {
            if (response != null) {
                List<Certificate> certList = response.certificates();
                for (Certificate cert : certList) {
                    System.out.println("Cert id: " + cert.certificateId());
                    System.out.println("Cert Arn: " + cert.certificateArn());
                }
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to list certificates.");
                }
            }
```

```
        });

        future.join();
    }

    /**
     * Retrieves the payload of a Thing's shadow asynchronously.
     *
     * @param thingName The name of the IoT Thing.
     *
     * This method initiates an asynchronous request to get the payload of a Thing's
shadow.
     * If the request is successful, it prints the shadow data.
     * If an exception occurs, it prints the error message.
     */
    public void getPayload(String thingName) {
        GetThingShadowRequest getThingShadowRequest =
GetThingShadowRequest.builder()
            .thingName(thingName)
            .build();

        CompletableFuture<GetThingShadowResponse> future =
getAsyncDataPlaneClient().getThingShadow(getThingShadowRequest);
        future.whenComplete((getThingShadowResponse, ex) -> {
            if (getThingShadowResponse != null) {
                // Extracting payload from response.
                SdkBytes payload = getThingShadowResponse.payload();
                String payloadString = payload.asUtf8String();
                System.out.println("Received Shadow Data: " + payloadString);
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to get Thing Shadow payload.");
                }
            }
        });

        future.join();
    }
```

```
   /**
    * Creates an IoT rule asynchronously.
    *
    * @param roleARN The ARN of the IAM role that grants access to the rule's
actions.
    * @param ruleName The name of the IoT rule.
    * @param action The ARN of the action to perform when the rule is triggered.
    *
    * This method initiates an asynchronous request to create an IoT rule.
    * If the request is successful, it prints a confirmation message.
    * If an exception occurs, it prints the error message.
    */
   public void createIoTRule(String roleARN, String ruleName, String action) {
       String sql = "SELECT * FROM '" + TOPIC + "'";
       SnsAction action1 = SnsAction.builder()
           .targetArn(action)
           .roleArn(roleARN)
           .build();

       // Create the action.
       Action myAction = Action.builder()
           .sns(action1)
           .build();

       // Create the topic rule payload.
       TopicRulePayload topicRulePayload = TopicRulePayload.builder()
           .sql(sql)
           .actions(myAction)
           .build();

       // Create the topic rule request.
       CreateTopicRuleRequest topicRuleRequest = CreateTopicRuleRequest.builder()
           .ruleName(ruleName)
           .topicRulePayload(topicRulePayload)
           .build();

       CompletableFuture<CreateTopicRuleResponse> future =
getAsyncClient().createTopicRule(topicRuleRequest);
       future.whenComplete((response, ex) -> {
           if (response != null) {
               System.out.println("IoT Rule created successfully.");
           } else {
               Throwable cause = ex != null ? ex.getCause() : null;
```

```
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to create IoT Rule.");
                }
            }
        });

        future.join();
    }

    /**
     * Lists IoT rules asynchronously.
     *
     * This method initiates an asynchronous request to list IoT rules.
     * If the request is successful, it prints the names and ARNs of the rules.
     * If an exception occurs, it prints the error message.
     */
    public void listIoTRules() {
        ListTopicRulesRequest listTopicRulesRequest =
ListTopicRulesRequest.builder().build();
        CompletableFuture<ListTopicRulesResponse> future =
getAsyncClient().listTopicRules(listTopicRulesRequest);
        future.whenComplete((listTopicRulesResponse, ex) -> {
            if (listTopicRulesResponse != null) {
                System.out.println("List of IoT Rules:");
                List<TopicRuleListItem> ruleList = listTopicRulesResponse.rules();
                for (TopicRuleListItem rule : ruleList) {
                    System.out.println("Rule Name: " + rule.ruleName());
                    System.out.println("Rule ARN: " + rule.ruleArn());
                    System.out.println("--------------");
                }
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to list IoT Rules.");
```

```
                }
            }
        });

        future.join();
    }

    /**
     * Searches for IoT Things asynchronously based on a query string.
     *
     * @param queryString The query string to search for Things.
     *
     * This method initiates an asynchronous request to search for IoT Things.
     * If the request is successful and Things are found, it prints their IDs.
     * If no Things are found, it prints a message indicating so.
     * If an exception occurs, it prints the error message.
     */
    public void searchThings(String queryString) {
        SearchIndexRequest searchIndexRequest = SearchIndexRequest.builder()
            .queryString(queryString)
            .build();

        CompletableFuture<SearchIndexResponse> future =
getAsyncClient().searchIndex(searchIndexRequest);
        future.whenComplete((searchIndexResponse, ex) -> {
            if (searchIndexResponse != null) {
                // Process the result.
                if (searchIndexResponse.things().isEmpty()) {
                    System.out.println("No things found.");
                } else {
                    searchIndexResponse.things().forEach(thing ->
System.out.println("Thing id found using search is " + thing.thingId()));
                }
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to search for IoT Things.");
                }
            }
```

```
        });

        future.join();
    }

    /**
     * Detaches a principal (certificate) from an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing.
     * @param certificateArn The ARN of the certificate to detach.
     *
     * This method initiates an asynchronous request to detach a certificate from an
IoT Thing.
     * If the detachment is successful, it prints a confirmation message.
     * If an exception occurs, it prints the error message.
     */
    public void detachThingPrincipal(String thingName, String certificateArn) {
        DetachThingPrincipalRequest thingPrincipalRequest =
DetachThingPrincipalRequest.builder()
            .principal(certificateArn)
            .thingName(thingName)
            .build();

        CompletableFuture<DetachThingPrincipalResponse> future =
getAsyncClient().detachThingPrincipal(thingPrincipalRequest);
        future.whenComplete((voidResult, ex) -> {
            if (ex == null) {
                System.out.println(certificateArn + " was successfully removed from
" + thingName);
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + ex.getMessage());
                }
            }
        });

        future.join();
    }

    /**
```

```
     * Deletes a certificate asynchronously.
     *
     * @param certificateArn The ARN of the certificate to delete.
     *
     * This method initiates an asynchronous request to delete a certificate.
     * If the deletion is successful, it prints a confirmation message.
     * If an exception occurs, it prints the error message.
     */
    public void deleteCertificate(String certificateArn) {
        DeleteCertificateRequest certificateProviderRequest =
DeleteCertificateRequest.builder()
            .certificateId(extractCertificateId(certificateArn))
            .build();

        CompletableFuture<DeleteCertificateResponse> future =
getAsyncClient().deleteCertificate(certificateProviderRequest);
        future.whenComplete((voidResult, ex) -> {
            if (ex == null) {
                System.out.println(certificateArn + " was successfully deleted.");
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + ex.getMessage());
                }
            }
        });

        future.join();
    }

    /**
     * Deletes an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing to delete.
     *
     * This method initiates an asynchronous request to delete an IoT Thing.
     * If the deletion is successful, it prints a confirmation message.
     * If an exception occurs, it prints the error message.
     */
    public void deleteIoTThing(String thingName) {
        DeleteThingRequest deleteThingRequest = DeleteThingRequest.builder()
```

```
            .thingName(thingName)
            .build();

        CompletableFuture<DeleteThingResponse> future =
 getAsyncClient().deleteThing(deleteThingRequest);
        future.whenComplete((voidResult, ex) -> {
            if (ex == null) {
                System.out.println("Deleted Thing " + thingName);
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
 cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + ex.getMessage());
                }
            }
        });

        future.join();
    }

    // Get the cert Id  from the Cert ARN value.
    private String extractCertificateId(String certificateArn) {
        // Example ARN: arn:aws:iot:region:account-id:cert/certificate-id.
        String[] arnParts = certificateArn.split(":");
        String certificateIdPart = arnParts[arnParts.length - 1];
        return certificateIdPart.substring(certificateIdPart.lastIndexOf("/") + 1);
    }
}
```

Acciones

`AttachThingPrincipal`

En el siguiente ejemplo de código, se muestra cómo utilizar `AttachThingPrincipal`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Attaches a certificate to an IoT Thing asynchronously.
    *
    * @param thingName The name of the IoT Thing.
    * @param certificateArn The ARN of the certificate to attach.
    *
    * This method initiates an asynchronous request to attach a certificate to an
IoT Thing.
    * If the request is successful, it prints a confirmation message and additional
information about the Thing.
    * If an exception occurs, it prints the error message.
    */
   public void attachCertificateToThing(String thingName, String certificateArn) {
       AttachThingPrincipalRequest principalRequest =
AttachThingPrincipalRequest.builder()
           .thingName(thingName)
           .principal(certificateArn)
           .build();

       CompletableFuture<AttachThingPrincipalResponse> future =
getAsyncClient().attachThingPrincipal(principalRequest);
       future.whenComplete((attachResponse, ex) -> {
           if (attachResponse != null &&
attachResponse.sdkHttpResponse().isSuccessful()) {
               System.out.println("Certificate attached to Thing successfully.");

               // Print additional information about the Thing.
               describeThing(thingName);
           } else {
               Throwable cause = ex != null ? ex.getCause() : null;
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
               } else if (cause != null) {
```

```
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to attach certificate to Thing. HTTP
Status Code: " +
                            attachResponse.sdkHttpResponse().statusCode());
                }
            }
        });

        future.join();
    }
```

- Para obtener más información sobre la API, consulta AttachThingPrincipalla Referencia AWS SDK for Java 2.x de la API.

`CreateKeysAndCertificate`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateKeysAndCertificate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates an IoT certificate asynchronously.
     *
     * @return The ARN of the created certificate.
     * <p>
     * This method initiates an asynchronous request to create an IoT certificate.
     * If the request is successful, it prints the certificate details and returns
the certificate ARN.
     * If an exception occurs, it prints the error message.
     */
    public String createCertificate() {
        CompletableFuture<CreateKeysAndCertificateResponse> future =
getAsyncClient().createKeysAndCertificate();
```

```
        final String[] certificateArn = {null};
        future.whenComplete((response, ex) -> {
            if (response != null) {
                String certificatePem = response.certificatePem();
                certificateArn[0] = response.certificateArn();

                // Print the details.
                System.out.println("\nCertificate:");
                System.out.println(certificatePem);
                System.out.println("\nCertificate ARN:");
                System.out.println(certificateArn[0]);

            } else {
                Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + cause.getMessage());
                }
            }
        });

        future.join();
        return certificateArn[0];
    }
```

- Para obtener más información sobre la API, consulta CreateKeysAndCertificatela Referencia AWS SDK for Java 2.x de la API.

`CreateThing`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateThing`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates an IoT Thing with the specified name asynchronously.
    *
    * @param thingName The name of the IoT Thing to create.
    *
    * This method initiates an asynchronous request to create an IoT Thing with the
specified name.
    * If the request is successful, it prints the name of the thing and its ARN
value.
    * If an exception occurs, it prints the error message.
    */
   public void createIoTThing(String thingName) {
       CreateThingRequest createThingRequest = CreateThingRequest.builder()
           .thingName(thingName)
           .build();

       CompletableFuture<CreateThingResponse> future =
getAsyncClient().createThing(createThingRequest);
       future.whenComplete((createThingResponse, ex) -> {
           if (createThingResponse != null) {
               System.out.println(thingName + " was successfully created. The ARN
value is " + createThingResponse.thingArn());
           } else {
               Throwable cause = ex.getCause();
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
               } else {
                   System.err.println("Unexpected error: " + cause.getMessage());
               }
           }
       });

       future.join();
```

```
    }
```

- Para obtener más información sobre la API, consulta CreateThingla Referencia AWS SDK for Java 2.x de la API.

`CreateTopicRule`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateTopicRule`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates an IoT rule asynchronously.
    *
    * @param roleARN The ARN of the IAM role that grants access to the rule's
actions.
    * @param ruleName The name of the IoT rule.
    * @param action The ARN of the action to perform when the rule is triggered.
    *
    * This method initiates an asynchronous request to create an IoT rule.
    * If the request is successful, it prints a confirmation message.
    * If an exception occurs, it prints the error message.
    */
   public void createIoTRule(String roleARN, String ruleName, String action) {
       String sql = "SELECT * FROM '" + TOPIC + "'";
       SnsAction action1 = SnsAction.builder()
           .targetArn(action)
           .roleArn(roleARN)
           .build();

       // Create the action.
       Action myAction = Action.builder()
           .sns(action1)
           .build();
```

```
        // Create the topic rule payload.
        TopicRulePayload topicRulePayload = TopicRulePayload.builder()
            .sql(sql)
            .actions(myAction)
            .build();

        // Create the topic rule request.
        CreateTopicRuleRequest topicRuleRequest = CreateTopicRuleRequest.builder()
            .ruleName(ruleName)
            .topicRulePayload(topicRulePayload)
            .build();

        CompletableFuture<CreateTopicRuleResponse> future =
getAsyncClient().createTopicRule(topicRuleRequest);
        future.whenComplete((response, ex) -> {
            if (response != null) {
                System.out.println("IoT Rule created successfully.");
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to create IoT Rule.");
                }
            }
        });

        future.join();
    }
```

- Para obtener más información sobre la API, consulta CreateTopicRulela Referencia AWS SDK for Java 2.x de la API.

`DeleteCertificate`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteCertificate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deletes a certificate asynchronously.
    *
    * @param certificateArn The ARN of the certificate to delete.
    *
    * This method initiates an asynchronous request to delete a certificate.
    * If the deletion is successful, it prints a confirmation message.
    * If an exception occurs, it prints the error message.
    */
   public void deleteCertificate(String certificateArn) {
       DeleteCertificateRequest certificateProviderRequest =
DeleteCertificateRequest.builder()
           .certificateId(extractCertificateId(certificateArn))
           .build();

       CompletableFuture<DeleteCertificateResponse> future =
getAsyncClient().deleteCertificate(certificateProviderRequest);
       future.whenComplete((voidResult, ex) -> {
           if (ex == null) {
               System.out.println(certificateArn + " was successfully deleted.");
           } else {
               Throwable cause = ex.getCause();
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
               } else {
                   System.err.println("Unexpected error: " + ex.getMessage());
               }
           }
       });

       future.join();
   }
```

- Para obtener más información sobre la API, consulta DeleteCertificatela Referencia AWS SDK for Java 2.x de la API.

`DeleteThing`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteThing`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing to delete.
     *
     * This method initiates an asynchronous request to delete an IoT Thing.
     * If the deletion is successful, it prints a confirmation message.
     * If an exception occurs, it prints the error message.
     */
    public void deleteIoTThing(String thingName) {
        DeleteThingRequest deleteThingRequest = DeleteThingRequest.builder()
            .thingName(thingName)
            .build();

        CompletableFuture<DeleteThingResponse> future =
getAsyncClient().deleteThing(deleteThingRequest);
        future.whenComplete((voidResult, ex) -> {
            if (ex == null) {
                System.out.println("Deleted Thing " + thingName);
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + ex.getMessage());
                }
```

```
            }
        });

        future.join();
    }
```

- Para obtener más información sobre la API, consulta DeleteThingla Referencia AWS SDK for Java 2.x de la API.

`DescribeEndpoint`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeEndpoint`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Describes the endpoint of the IoT service asynchronously.
     *
     * @return A CompletableFuture containing the full endpoint URL.
     *
     * This method initiates an asynchronous request to describe the endpoint of the
 IoT service.
     * If the request is successful, it prints and returns the full endpoint URL.
     * If an exception occurs, it prints the error message.
     */
    public String describeEndpoint() {
        CompletableFuture<DescribeEndpointResponse> future =
 getAsyncClient().describeEndpoint(DescribeEndpointRequest.builder().endpointType("iot:Data-
ATS").build());
        final String[] result = {null};

        future.whenComplete((endpointResponse, ex) -> {
            if (endpointResponse != null) {
                String endpointUrl = endpointResponse.endpointAddress();
```

```
                String exString = getValue(endpointUrl);
                String fullEndpoint = "https://" + exString + "-ats.iot.us-
east-1.amazonaws.com";

                System.out.println("Full Endpoint URL: " + fullEndpoint);
                result[0] = fullEndpoint;
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
 ex.getCause() : ex;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
 cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + cause.getMessage());
                }
            }
        });

        future.join();
        return result[0];
    }
```

- Para obtener más información sobre la API, consulta DescribeEndpointla Referencia AWS SDK for Java 2.x de la API.

`DescribeThing`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeThing`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Describes an IoT Thing asynchronously.
     *
```

```
     * @param thingName The name of the IoT Thing.
     *
     * This method initiates an asynchronous request to describe an IoT Thing.
     * If the request is successful, it prints the Thing details.
     * If an exception occurs, it prints the error message.
     */
    private void describeThing(String thingName) {
        DescribeThingRequest thingRequest = DescribeThingRequest.builder()
            .thingName(thingName)
            .build();

        CompletableFuture<DescribeThingResponse> future =
getAsyncClient().describeThing(thingRequest);
        future.whenComplete((describeResponse, ex) -> {
            if (describeResponse != null) {
                System.out.println("Thing Details:");
                System.out.println("Thing Name: " + describeResponse.thingName());
                System.out.println("Thing ARN: " + describeResponse.thingArn());
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to describe Thing.");
                }
            }
        });

        future.join();
    }
```

- Para obtener más información sobre la API, consulta DescribeThingla Referencia AWS SDK for Java 2.x de la API.

`DetachThingPrincipal`

En el siguiente ejemplo de código, se muestra cómo utilizar `DetachThingPrincipal`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Detaches a principal (certificate) from an IoT Thing asynchronously.
    *
    * @param thingName The name of the IoT Thing.
    * @param certificateArn The ARN of the certificate to detach.
    *
    * This method initiates an asynchronous request to detach a certificate from an
IoT Thing.
    * If the detachment is successful, it prints a confirmation message.
    * If an exception occurs, it prints the error message.
    */
   public void detachThingPrincipal(String thingName, String certificateArn) {
       DetachThingPrincipalRequest thingPrincipalRequest =
DetachThingPrincipalRequest.builder()
           .principal(certificateArn)
           .thingName(thingName)
           .build();

       CompletableFuture<DetachThingPrincipalResponse> future =
getAsyncClient().detachThingPrincipal(thingPrincipalRequest);
       future.whenComplete((voidResult, ex) -> {
           if (ex == null) {
               System.out.println(certificateArn + " was successfully removed from
" + thingName);
           } else {
               Throwable cause = ex.getCause();
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
               } else {
                   System.err.println("Unexpected error: " + ex.getMessage());
               }
           }
       });
```

```
        future.join();
    }
```

- Para obtener más información sobre la API, consulta DetachThingPrincipalla Referencia AWS SDK for Java 2.x de la API.

`ListCertificates`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListCertificates`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Lists all certificates asynchronously.
     *
     * This method initiates an asynchronous request to list all certificates.
     * If the request is successful, it prints the certificate IDs and ARNs.
     * If an exception occurs, it prints the error message.
     */
    public void listCertificates() {
        CompletableFuture<ListCertificatesResponse> future =
getAsyncClient().listCertificates();
        future.whenComplete((response, ex) -> {
            if (response != null) {
                List<Certificate> certList = response.certificates();
                for (Certificate cert : certList) {
                    System.out.println("Cert id: " + cert.certificateId());
                    System.out.println("Cert Arn: " + cert.certificateArn());
                }
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
```

```
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to list certificates.");
                }
            }
        });

        future.join();
    }
```

- Para obtener más información sobre la API, consulta ListCertificatesla Referencia AWS SDK for Java 2.x de la API.

`SearchIndex`

En el siguiente ejemplo de código, se muestra cómo utilizar `SearchIndex`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Searches for IoT Things asynchronously based on a query string.
     *
     * @param queryString The query string to search for Things.
     *
     * This method initiates an asynchronous request to search for IoT Things.
     * If the request is successful and Things are found, it prints their IDs.
     * If no Things are found, it prints a message indicating so.
     * If an exception occurs, it prints the error message.
     */
    public void searchThings(String queryString) {
        SearchIndexRequest searchIndexRequest = SearchIndexRequest.builder()
```

```
            .queryString(queryString)
            .build();

        CompletableFuture<SearchIndexResponse> future =
getAsyncClient().searchIndex(searchIndexRequest);
        future.whenComplete((searchIndexResponse, ex) -> {
            if (searchIndexResponse != null) {
                // Process the result.
                if (searchIndexResponse.things().isEmpty()) {
                    System.out.println("No things found.");
                } else {
                    searchIndexResponse.things().forEach(thing ->
System.out.println("Thing id found using search is " + thing.thingId()));
                }
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to search for IoT Things.");
                }
            }
        });

        future.join();
    }
```

- Para obtener más información sobre la API, consulta SearchIndexla Referencia AWS SDK for Java 2.x de la API.

AWS IoT data ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with AWS IoT data.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`GetThingShadow`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetThingShadow`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Retrieves the payload of a Thing's shadow asynchronously.
    *
    * @param thingName The name of the IoT Thing.
    *
    * This method initiates an asynchronous request to get the payload of a Thing's
shadow.
    * If the request is successful, it prints the shadow data.
    * If an exception occurs, it prints the error message.
    */
   public void getPayload(String thingName) {
       GetThingShadowRequest getThingShadowRequest =
GetThingShadowRequest.builder()
           .thingName(thingName)
           .build();

       CompletableFuture<GetThingShadowResponse> future =
getAsyncDataPlaneClient().getThingShadow(getThingShadowRequest);
       future.whenComplete((getThingShadowResponse, ex) -> {
           if (getThingShadowResponse != null) {
```

```
                // Extracting payload from response.
                SdkBytes payload = getThingShadowResponse.payload();
                String payloadString = payload.asUtf8String();
                System.out.println("Received Shadow Data: " + payloadString);
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to get Thing Shadow payload.");
                }
            }
        });

        future.join();
    }
```

- Para obtener más información sobre la API, consulta GetThingShadowla Referencia AWS SDK for Java 2.x de la API.

`UpdateThingShadow`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateThingShadow`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Updates the shadow of an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing.
     *
```

```
    * This method initiates an asynchronous request to update the shadow of an IoT
Thing.
    * If the request is successful, it prints a confirmation message.
    * If an exception occurs, it prints the error message.
    */
   public void updateShadowThing(String thingName) {
       // Create Thing Shadow State Document.
       String stateDocument = "{\"state\":{\"reported\":{\"temperature\":25,
\"humidity\":50}}}";
       SdkBytes data = SdkBytes.fromString(stateDocument, StandardCharsets.UTF_8);
       UpdateThingShadowRequest updateThingShadowRequest =
UpdateThingShadowRequest.builder()
           .thingName(thingName)
           .payload(data)
           .build();

       CompletableFuture<UpdateThingShadowResponse> future =
getAsyncDataPlaneClient().updateThingShadow(updateThingShadowRequest);
       future.whenComplete((updateResponse, ex) -> {
           if (updateResponse != null) {
               System.out.println("Thing Shadow updated successfully.");
           } else {
               Throwable cause = ex != null ? ex.getCause() : null;
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
               } else if (cause != null) {
                   System.err.println("Unexpected error: " + cause.getMessage());
               } else {
                   System.err.println("Failed to update Thing Shadow.");
               }
           }
       });

       future.join();
   }
```

- Para obtener más información sobre la API, consulta UpdateThingShadowla Referencia AWS SDK for Java 2.x de la API.

AWS IoT FleetWise ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with AWS IoT FleetWise.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hola AWS IoT FleetWise

En el siguiente ejemplo de código se muestra cómo empezar a utilizar AWS IoT FleetWise.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public class HelloFleetwise {

        public static void main(String[] args) {
            ListSignalCatalogs();
        }
```

```
       public static void  ListSignalCatalogs() {
           try (IoTFleetWiseClient fleetWiseClient = IoTFleetWiseClient.builder()
                   .region(Region.US_EAST_1)
                   .credentialsProvider(DefaultCredentialsProvider.create())
                   .build()) {

               ListSignalCatalogsRequest request =
ListSignalCatalogsRequest.builder()
                       .maxResults(10) // Optional: limit per page
                       .build();

               ListSignalCatalogsIterable paginator =
fleetWiseClient.listSignalCatalogsPaginator(request);
               boolean found = false;

               for (ListSignalCatalogsResponse response : paginator) {
                   for (SignalCatalogSummary summary : response.summaries()) {
                       found = true;
                       System.out.println("Catalog Name: " + summary.name());
                       System.out.println("ARN: " + summary.arn());
                       System.out.println("Created: " + summary.creationTime());
                       System.out.println("Last Modified: " +
summary.lastModificationTime());
                       System.out.println("---------------");
                   }
               }

               if (!found) {
                   System.out.println("No AWS Fleetwise Signal Catalogs were
found.");
               }

           } catch (IoTFleetWiseException e) {
               System.err.println("Error listing signal catalogs: " +
e.awsErrorDetails().errorMessage());
               throw new RuntimeException(e);
           }
       }
   }
```

- Para obtener más información sobre la API, consulta listSignalCatalogsPaginator en la referencia de la AWS SDK for Java 2.x API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crear una colección de señales estandarizadas.
- Crear una flota que represente un grupo de vehículos.
- Crear un manifiesto del modelo.
- Cree un manifiesto del decodificador.
- Comprobar el estado del manifiesto del modelo.
- Comprobar el estado del descodificador.
- Crear un objeto de IoT.
- Creación de un vehículo
- Mostrar los detalles del vehículo.
- Elimine los activos AWS IoT FleetWise .

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario interactivo que demuestre AWS IoT SiteWise las funciones.

```
public class FleetwiseScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    static FleetwiseActions actions = new FleetwiseActions();
    private static final Logger logger =
 LoggerFactory.getLogger(FleetwiseScenario.class);
    static Scanner scanner = new Scanner(System.in);
```

```
   public static void main(String[] args) {
       final String usage =
               """
               Usage:
                   <signalCatalogName> <manifestName> <fleetId> <vecName> <decName>

               Where:
                   signalCatalogName     - The name of the Signal Catalog to create
(eg, catalog30).
                   manifestName          - The name of the Vehicle Model (Model
Manifest) to create (eg, manifest30).
                   fleetId               - The ID of the Fleet to create (eg,
fleet30).
                   vecName               - The name of the Vehicle to create (eg,
vehicle30).
                   decName               - The name of the Decoder Manifest to
create (eg, decManifest30).
               """;

       if (args.length != 5) {
           logger.info(usage);
           return;
       }

       String signalCatalogName = args[0];
       String manifestName = args[1];
       String fleetId = args[2];
       String vecName = args[3];
       String decName = args[4];

       logger.info(
               """
                AWS IoT FleetWise is a managed service that simplifies the
                process of collecting, organizing, and transmitting vehicle
                data to the cloud in near real-time. Designed for automakers
                and fleet operators, it allows you to define vehicle models,
                specify the exact data you want to collect (such as engine
                temperature, speed, or battery status), and send this data to
                AWS for analysis. By using intelligent data collection
                techniques, IoT FleetWise reduces the volume of data
                transmitted by filtering and transforming it at the edge,
                helping to minimize bandwidth usage and costs.

               At its core, AWS IoT FleetWise helps organizations build
```

```
                scalable systems for vehicle data management and analytics,
                supporting a wide variety of vehicles and sensor configurations.
                You can define signal catalogs and decoder manifests that describe
                how raw CAN bus signals are translated into readable data, making
                the platform highly flexible and extensible. This allows
                manufacturers to optimize vehicle performance, improve safety,
                and reduce maintenance costs by gaining real-time visibility
                into fleet operations.
                """);

        waitForInputToContinue(scanner);
        logger.info(DASHES);
        try {
            runScenario(signalCatalogName, manifestName, fleetId, vecName, decName);
        } catch (RuntimeException e) {
            logger.info(e.getMessage());
        }
    }

    private static void runScenario(String signalCatalogName,
                                    String manifestName,
                                    String fleetId,
                                    String vecName,
                                    String decName) {
        logger.info(DASHES);
        logger.info("1. Creates a collection of standardized signals that can be
reused to create vehicle models");
        String signalCatalogArn;
        try {
            signalCatalogArn =
actions.createSignalCatalogAsync(signalCatalogName).join();
            logger.info("The collection ARN is " + signalCatalogArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ValidationException) {
                logger.error("The request failed due to a validation issue: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);
```

```
        logger.info(DASHES);
        logger.info("2. Create a fleet that represents a group of vehicles");
        logger.info(
                """
                Creating an IoT FleetWise fleet allows you to efficiently collect,
                organize, and transfer vehicle data to the cloud, enabling real-
time
                insights into vehicle performance and health.

                It helps reduce data costs by allowing you to filter and prioritize
                only the most relevant vehicle signals, supporting advanced
 analytics
                and predictive maintenance use cases.
                """);

        waitForInputToContinue(scanner);
        String fleetid;
        try {
            fleetid = actions.createFleetAsync(signalCatalogArn, fleetId).join();
            logger.info("The fleet Id is " + fleetid);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The resource was not found: {}", cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Create a model manifest");
        logger.info(
                """
                An AWS IoT FleetWise manifest defines the structure and
                relationships of vehicle data. The model manifest specifies
                which signals to collect and how they relate to vehicle systems,
                while the decoder manifest defines how to decode raw vehicle data
                into meaningful signals.
                """);
        waitForInputToContinue(scanner);
```

```
        String manifestArn;
        try {
            List<Node> nodes =
actions.listSignalCatalogNodeAsync(signalCatalogName).join();
            manifestArn = actions.createModelManifestAsync(manifestName,
signalCatalogArn, nodes).join();
            logger.info("The manifest ARN is {}", manifestArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            logger.error("An unexpected error occurred.", cause);
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Create a decoder manifest");
        logger.info(
                """
                A decoder manifest in AWS IoT FleetWise defines how raw vehicle
                data (such as CAN signals) should be interpreted and decoded
                into meaningful signals. It acts as a translation layer
                that maps vehicle-specific protocols to standardized data formats
                using decoding rules. This is crucial for extracting usable
                data from different vehicle models, even when their data
                formats vary.

                """);
        waitForInputToContinue(scanner);
        String decArn;
        try {
            decArn = actions.createDecoderManifestAsync(decName,
manifestArn).join();
            logger.info("The decoder manifest ARN is {}", decArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            logger.error("An unexpected error occurred.", cause);
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("5. Check the status of the model manifest");
        logger.info(
```

```
                """
                The model manifest must be in an ACTIVE state before it can be used
                to create or update a vehicle.
                """);
        waitForInputToContinue(scanner);
        try {
            actions.updateModelManifestAsync(manifestName);
            actions.waitForModelManifestActiveAsync(manifestName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            logger.error("An unexpected error occurred while waiting for the model
manifest status.", cause);
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("6. Check the status of the decoder");
        logger.info(
                """
                The decoder manifest must be in an ACTIVE state before it can be
used
                to create or update a vehicle.
                """);
        waitForInputToContinue(scanner);
        try {
            actions.updateDecoderManifestAsync(decName);
            actions.waitForDecoderManifestActiveAsync(decName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            logger.error("An unexpected error occurred while waiting for the decoder
manifest status.", cause);
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Create an IoT Thing");
        logger.info(
                """
                AWS IoT FleetWise expects an existing AWS IoT Thing with the same
                name as the vehicle name you are passing to createVehicle method.
                Before calling createVehicle(), you must create an AWS IoT Thing
```

```
                with the same name using the AWS IoT Core service.
                """);
        waitForInputToContinue(scanner);
        try {
            actions.createThingIfNotExistsAsync(vecName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceAlreadyExistsException) {
                logger.error("The resource exists: {}", cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. Create a vehicle");
        logger.info(
                """
                Creating a vehicle in AWS IoT FleetWise allows you to digitally
                represent and manage a physical vehicle within the AWS ecosystem.
                This enables efficient ingestion, transformation, and transmission
                of vehicle telemetry data to the cloud for analysis.
                """);
        waitForInputToContinue(scanner);
        try {
            actions.createVehicleAsync(vecName, manifestArn, decArn).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();

            if (cause instanceof ResourceNotFoundException) {
                logger.error("The required resource was not found: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred while creating vehicle.",
cause);
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
```

```
        logger.info("9. Display vehicle details");
        waitForInputToContinue(scanner);
        try {
            actions.getVehicleDetailsAsync(vecName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The resource was not found: {}", cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("10. Delete the AWS IoT Fleetwise Assets");
        logger.info("Would you like to delete the IoT Fleetwise Assets? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            try {
                actions.deleteVehicleAsync(vecName).join();
                actions.deleteDecoderManifestAsync(decName).join();
                actions.deleteModelManifestAsync(manifestName).join();
                actions.deleteFleetAsync(fleetid).join();
                actions.deleteSignalCatalogAsync(signalCatalogName).join();
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException) {
                    // Handle the case where the resource is not found.
                    logger.error("The resource was not found: {}",
cause.getMessage());
                } else if (cause instanceof RuntimeException) {
                    // Handle other runtime exceptions.
                    logger.error("An unexpected error occurred: {}",
cause.getMessage());
                } else {
                    // Catch any other unexpected exceptions.
                    logger.error("An unknown error occurred.", cause);
                }
                return;
            }
```

```
            logger.info(DASHES);
            logger.info(
                    """
                    Thank you for checking out the AWS IoT Fleetwise Service Use
 demo. We hope you
                    learned something new, or got some inspiration for your own apps
 today.
                    For more AWS code examples, have a look at:
                    https://docs.aws.amazon.com/code-library/latest/ug/what-is-code-
library.html
                    """);
            logger.info(DASHES);
        } else {
            logger.info("The AWS resources will not be deleted.");
        }
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Una clase contenedora para los métodos AWS IoT FleetWise del SDK.

```
public class FleetwiseActions {
    private static final Logger logger =
 LoggerFactory.getLogger(FleetwiseActions.class);
    private static IoTFleetWiseAsyncClient ioTFleetWiseAsyncClient;

    private static IoTFleetWiseAsyncClient getAsyncClient() {
```

```
        if (ioTFleetWiseAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                    .maxConcurrency(100)
                    .connectionTimeout(Duration.ofSeconds(60))
                    .readTimeout(Duration.ofSeconds(60))
                    .writeTimeout(Duration.ofSeconds(60))
                    .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                    .apiCallTimeout(Duration.ofMinutes(2))
                    .apiCallAttemptTimeout(Duration.ofSeconds(90))
                    .retryStrategy(RetryMode.STANDARD)
                    .build();

            ioTFleetWiseAsyncClient = IoTFleetWiseAsyncClient.builder()
                    .httpClient(httpClient)
                    .overrideConfiguration(overrideConfig)
                    .build();
        }
        return ioTFleetWiseAsyncClient;
    }


    /**
     * Creates a signal catalog.
     *
     * @param signalCatalogName the name of the signal catalog to be created
     * @return a {@link CompletableFuture} that completes with the Amazon Resource
Name (ARN) of the created signal catalog
     */
    public CompletableFuture<String> createSignalCatalogAsync(String
signalCatalogName) {
        return deleteSignalCatalogIfExistsAsync(signalCatalogName)
                .thenCompose(ignored -> delayAsync(2000)) // Wait for 2 seconds
                .thenCompose(ignored -> {
                    List<Node> nodes = List.of(
                            Node.builder().branch(
                                    Branch.builder()
                                            .fullyQualifiedName("Vehicle")
                                            .description("Root branch")
                                            .build()
                            ).build(),
                            Node.builder().branch(
```

```
                                    Branch.builder()

.fullyQualifiedName("Vehicle.Powertrain")
                                            .description("Powertrain branch")
                                            .build()
                            ).build(),
                            Node.builder().sensor(
                                    Sensor.builder()

.fullyQualifiedName("Vehicle.Powertrain.EngineRPM")
                                            .description("Engine RPM")
                                            .dataType(NodeDataType.DOUBLE)
                                            .unit("rpm")
                                            .build()
                            ).build(),
                            Node.builder().sensor(
                                    Sensor.builder()

.fullyQualifiedName("Vehicle.Powertrain.VehicleSpeed")
                                            .description("Vehicle Speed")
                                            .dataType(NodeDataType.DOUBLE)
                                            .unit("km/h")
                                            .build()
                            ).build()
                    );

                    CreateSignalCatalogRequest request =
CreateSignalCatalogRequest.builder()
                            .name(signalCatalogName)
                            .nodes(nodes)
                            .build();

                    CompletableFuture<String> result = new CompletableFuture<>();

                    getAsyncClient().createSignalCatalog(request)
                            .whenComplete((response, exception) -> {
                                if (exception != null) {
                                    Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                                    if (cause instanceof ValidationException) {
                                        result.completeExceptionally(cause);
                                    } else {
```

```
                                        result.completeExceptionally(new
RuntimeException("Error creating the catalog", cause));
                                    }
                                } else {
                                    result.complete(response.arn());
                                }
                            });

                    return result;
                });
    }

    /**
     * Delays the execution of the current thread asynchronously for the specified
duration.
     *
     * @param millis the duration of the delay in milliseconds
     * @return a {@link CompletableFuture} that completes after the specified delay
     */
    private static CompletableFuture<Void> delayAsync(long millis) {
        return CompletableFuture.runAsync(() -> {
            try {
                Thread.sleep(millis);
            } catch (InterruptedException e) {
                throw new CompletionException("Sleep interrupted", e);
            }
        });
    }

    /**
     * Deletes the specified signal catalog.
     *
     * @param signalCatalogName the name of the signal catalog to delete
     * @return a {@link CompletableFuture} representing the asynchronous operation.
     */
    public static CompletableFuture<Void> deleteSignalCatalogIfExistsAsync(String
signalCatalogName) {
        DeleteSignalCatalogRequest request = DeleteSignalCatalogRequest.builder()
                .name(signalCatalogName)
                .build();

        return getAsyncClient().deleteSignalCatalog(request)
                .handle((response, exception) -> {
                    if (exception != null) {
```

```
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                           throw new CompletionException(new
RuntimeException("Signal Catalog not found: " + signalCatalogName));
                        }
                        throw new RuntimeException("Failed to delete signal catalog:
" + signalCatalogName, cause);
                    }
                    return null;
                });
    }


    /**
     * Creates a new decoder manifest.
     *
     * @param name             the name of the decoder manifest
     * @param modelManifestArn the ARN of the model manifest
     * @return a {@link CompletableFuture} that completes with the ARN of the
created decoder manifest
     */
    public CompletableFuture<String> createDecoderManifestAsync(String name, String
modelManifestArn) {
        String interfaceId = "can0";
        NetworkInterface networkInterface = NetworkInterface.builder()
                .interfaceId(interfaceId)
                .type(NetworkInterfaceType.CAN_INTERFACE)
                .canInterface(CanInterface.builder()
                        .name("canInterface0")
                        .protocolName("CAN")
                        .protocolVersion("1.0")
                        .build())
                .build();

        // Vehicle.Powertrain.EngineRPM decoder.
        SignalDecoder engineRpmDecoder = SignalDecoder.builder()
                .fullyQualifiedName("Vehicle.Powertrain.EngineRPM")
                .interfaceId(interfaceId)
                .type(SignalDecoderType.CAN_SIGNAL)
                .canSignal(CanSignal.builder()
                        .messageId(100)
                        .isBigEndian(false)
                        .isSigned(false)
```

```
                        .startBit(0)
                        .length(16)
                        .factor(1.0)
                        .offset(0.0)
                        .build())
                .build();

        // Vehicle.Powertrain.VehicleSpeed decoder.
        SignalDecoder vehicleSpeedDecoder = SignalDecoder.builder()
                .fullyQualifiedName("Vehicle.Powertrain.VehicleSpeed")
                .interfaceId(interfaceId)
                .type(SignalDecoderType.CAN_SIGNAL)
                .canSignal(CanSignal.builder()
                        .messageId(101)
                        .isBigEndian(false)
                        .isSigned(false)
                        .startBit(16)
                        .length(16)
                        .factor(1.0)
                        .offset(0.0)
                        .build())
                .build();

        CreateDecoderManifestRequest request =
CreateDecoderManifestRequest.builder()
                .name(name)
                .modelManifestArn(modelManifestArn)
                .networkInterfaces(List.of(networkInterface))
                .signalDecoders(List.of(engineRpmDecoder, vehicleSpeedDecoder))
                .build();

        CompletableFuture<String> result = new CompletableFuture<>();

        getAsyncClient().createDecoderManifest(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof DecoderManifestValidationException) {
                            result.completeExceptionally(new
CompletionException("The request contains signal decoders with validation errors: "
+ cause.getMessage(), cause));
                        } else {
```

```
                            result.completeExceptionally(new
CompletionException("Failed to create decoder manifest: " + exception.getMessage(),
exception));
                        }
                    } else {
                        result.complete(response.arn()); // Complete successfully
with the ARN
                    }
                });

        return result;
    }

    /**
     * Deletes a decoder manifest.
     *
     * @param name the name of the decoder manifest to delete
     * @return a {@link CompletableFuture} that completes when the decoder manifest
has been deleted
     */
    public CompletableFuture<Void> deleteDecoderManifestAsync(String name) {
        return
getAsyncClient().deleteDecoderManifest(DeleteDecoderManifestRequest.builder().name(name).bu
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the decoder
manifest: " + cause);
                    }
                    return null;
                });
    }


    /**
     * Deletes a vehicle with the specified name.
     *
     * @param vecName the name of the vehicle to be deleted
     * @return a {@link CompletableFuture} that completes when the vehicle has been
deleted
```

```
     */
    public CompletableFuture<Void> deleteVehicleAsync(String vecName) {
        DeleteVehicleRequest request = DeleteVehicleRequest.builder()
                .vehicleName(vecName)
                .build();

        return getAsyncClient().deleteVehicle(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the vehicle: "
+ cause);
                    }
                    return null;
                });
    }


    /**
     * Updates the model manifest.
     *
     * @param name the name of the model manifest to update
     */
    public void updateModelManifestAsync(String name) {
        UpdateModelManifestRequest request = UpdateModelManifestRequest.builder()
                .name(name)
                .status(ManifestStatus.ACTIVE)
                .build();

        getAsyncClient().updateModelManifest(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        throw new CompletionException("Failed to update model
manifest: " + exception.getMessage(), exception);
                    }
                })
                .thenApply(response -> null);
    }
```

```
   /**
    * Updates the decoder manifest with the given name.
    *
    * @param name the name of the decoder manifest to update
    * @return a {@link CompletableFuture} that completes when the update operation
is finished
    */
   public CompletableFuture<Void> updateDecoderManifestAsync(String name) {
       UpdateDecoderManifestRequest request =
UpdateDecoderManifestRequest.builder()
               .name(name)
               .status(ManifestStatus.ACTIVE)
               .build();

       return getAsyncClient().updateDecoderManifest(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       throw new CompletionException("Failed to update decoder
manifest: " + exception.getMessage(), exception);
                   }
               })
               .thenApply(response -> null);
   }


   /**
    * Creates a new vehicle in the system.
    *
    * @param vecName     the name of the vehicle to be created
    * @param manifestArn the Amazon Resource Name (ARN) of the model manifest for
the vehicle
    * @param decArn      the Amazon Resource Name (ARN) of the decoder manifest for
the vehicle
    * @return a {@link CompletableFuture} that completes when the vehicle has been
created, or throws a
    */
   public CompletableFuture<Void> createVehicleAsync(String vecName, String
manifestArn, String decArn) {
       CreateVehicleRequest request = CreateVehicleRequest.builder()
               .vehicleName(vecName)
               .modelManifestArn(manifestArn)
               .decoderManifestArn(decArn)
               .build();
```

```
        CompletableFuture<Void> result = new CompletableFuture<>();
        getAsyncClient().createVehicle(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception instanceof CompletionException ?
exception.getCause() : exception;

                        if (cause instanceof ResourceNotFoundException) {
                            result.completeExceptionally(cause);
                        } else {
                            result.completeExceptionally(new
RuntimeException("Failed to create vehicle: " + cause.getMessage(), cause));
                        }
                    } else {
                        logger.info("Vehicle '{}' created successfully.", vecName);
                        result.complete(null); // mark future as complete
                    }
                });

        return result;
    }


    /**
     * Waits for the decoder manifest to become active.
     *
     * @param decoderName the name of the decoder to wait for
     * @return a {@link CompletableFuture} that completes when the decoder manifest
becomes active, or exceptionally if an error occurs or the manifest becomes invalid
     */
    public CompletableFuture<Void> waitForDecoderManifestActiveAsync(String
decoderName) {
        CompletableFuture<Void> result = new CompletableFuture<>();

        ScheduledExecutorService scheduler =
Executors.newSingleThreadScheduledExecutor();
        AtomicInteger secondsElapsed = new AtomicInteger(0);
        AtomicReference<ManifestStatus> lastStatus = new
AtomicReference<>(ManifestStatus.DRAFT);

        logger.info(" Elapsed: 0s | Decoder Status: DRAFT");

        final Runnable pollTask = new Runnable() {
            @Override
```

```
            public void run() {
                int elapsed = secondsElapsed.incrementAndGet();

                // Check status every 5 seconds
                if (elapsed % 5 == 0) {
                    GetDecoderManifestRequest request =
GetDecoderManifestRequest.builder()
                            .name(decoderName)
                            .build();

                    getAsyncClient().getDecoderManifest(request)
                            .whenComplete((response, exception) -> {
                                if (exception != null) {
                                    Throwable cause = exception instanceof
CompletionException ? exception.getCause() : exception;

                                    scheduler.shutdown();
                                    if (cause instanceof ResourceNotFoundException)
{
                                        result.completeExceptionally(new
RuntimeException("Decoder manifest not found: " + cause.getMessage(), cause));
                                    } else {
                                        result.completeExceptionally(new
RuntimeException("Error while polling decoder manifest status: " +
exception.getMessage(), exception));
                                    }
                                    return;
                                }

                                ManifestStatus status = response.status();
                                lastStatus.set(status);

                                if (status == ManifestStatus.ACTIVE) {
                                    logger.info("\r Elapsed: {}s | Decoder Status:
ACTIVE", elapsed);
                                    scheduler.shutdown();
                                    result.complete(null);
                                } else if (status == ManifestStatus.INVALID) {
                                    logger.info("\r Elapsed: {}s | Decoder Status:
INVALID", elapsed);
                                    scheduler.shutdown();
                                    result.completeExceptionally(new
RuntimeException("Decoder manifest became INVALID. Cannot proceed."));
                                } else {
```

```
                                    logger.info("\r# Elapsed: {}s | Decoder Status:
{}", elapsed, status);
                                }
                            });
                } else {
                    logger.info("\r Elapsed: {}s | Decoder Status: {}", elapsed,
lastStatus.get());
                }
            }
        };

        // Start the task with an initial delay of 1 second, and repeat every second
        scheduler.scheduleAtFixedRate(pollTask, 1, 1, TimeUnit.SECONDS);
        return result;
    }



    /**
     * Waits for the specified model manifest to become active.
     *
     * @param manifestName the name of the model manifest to wait for
     */
    public CompletableFuture<Void> waitForModelManifestActiveAsync(String
manifestName) {
        CompletableFuture<Void> result = new CompletableFuture<>();

        ScheduledExecutorService scheduler =
Executors.newSingleThreadScheduledExecutor();
        AtomicInteger secondsElapsed = new AtomicInteger(0);
        AtomicReference<ManifestStatus> lastStatus = new
AtomicReference<>(ManifestStatus.DRAFT);

        logger.info("Elapsed: 0s | Status: DRAFT");

        final Runnable pollTask = new Runnable() {
            @Override
            public void run() {
                int elapsed = secondsElapsed.incrementAndGet();

                // Only check status every 5 seconds
                if (elapsed % 5 == 0) {
                    GetModelManifestRequest request =
GetModelManifestRequest.builder()
```

```
                            .name(manifestName)
                            .build();

                    getAsyncClient().getModelManifest(request)
                            .whenComplete((response, exception) -> {
                                if (exception != null) {
                                    Throwable cause = exception instanceof
CompletionException ? exception.getCause() : exception;

                                    scheduler.shutdown();
                                    if (cause instanceof ResourceNotFoundException)
{
                                        result.completeExceptionally(new
RuntimeException("Model manifest not found: " + cause.getMessage(), cause));
                                    } else {
                                        result.completeExceptionally(new
RuntimeException("Error while polling model manifest status: " +
exception.getMessage(), exception));
                                    }
                                    return;
                                }

                                ManifestStatus status = response.status();
                                lastStatus.set(status);

                                if (status == ManifestStatus.ACTIVE) {
                                    logger.info("\rElapsed: {}s | Status: ACTIVE",
elapsed);
                                    scheduler.shutdown();
                                    result.complete(null);
                                } else if (status == ManifestStatus.INVALID) {
                                    logger.info("\rElapsed: {}s | Status: INVALID",
elapsed);
                                    scheduler.shutdown();
                                    result.completeExceptionally(new
RuntimeException("Model manifest became INVALID. Cannot proceed."));
                                } else {
                                    logger.info("\rElapsed: {}s | Status: {}",
elapsed, status);
                                }
                            });
                } else {
                    logger.info("\rElapsed: {}s | Status: {}", elapsed,
lastStatus.get());
```

```
                }
            }
        };

        // Start the task with an initial delay of 1 second, and repeat every second
        scheduler.scheduleAtFixedRate(pollTask, 1, 1, TimeUnit.SECONDS);
        return result;
    }



    /**
     * Fetches the details of a vehicle.
     *
     * @param vehicleName the name of the vehicle to fetch details for
     * @return a {@link CompletableFuture} that completes when the vehicle details
have been fetched
     */
    public CompletableFuture<Void> getVehicleDetailsAsync(String vehicleName) {
        GetVehicleRequest request = GetVehicleRequest.builder()
                .vehicleName(vehicleName)
                .build();

        CompletableFuture<Void> result = new CompletableFuture<>();

        getAsyncClient().getVehicle(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception instanceof CompletionException ?
exception.getCause() : exception;

                        if (cause instanceof ResourceNotFoundException) {
                            result.completeExceptionally(cause); // don't rewrap
                        } else {
                            result.completeExceptionally(new
RuntimeException("Failed to fetch vehicle details: " + cause.getMessage(), cause));
                        }
                    } else {
                        Map<String, Object> details = new HashMap<>();
                        details.put("vehicleName", response.vehicleName());
                        details.put("arn", response.arn());
                        details.put("modelManifestArn",
response.modelManifestArn());
```

```
                        details.put("decoderManifestArn",
response.decoderManifestArn());
                        details.put("attributes", response.attributes());
                        details.put("creationTime",
response.creationTime().toString());
                        details.put("lastModificationTime",
response.lastModificationTime().toString());

                        logger.info("Vehicle Details:");
                        details.forEach((key, value) -> logger.info("• {} : {}",
key, value));

                        result.complete(null); // mark as successful
                    }
                });

        return result;
    }


    /**
     * Creates an IoT Thing if it does not already exist.
     *
     * @param thingName the name of the IoT Thing to create
     * @return a {@link CompletableFuture} that completes when the IoT Thing has
been created or if it already exists
     */
    public CompletableFuture<Void> createThingIfNotExistsAsync(String thingName) {
        IotAsyncClient iotClient = IotAsyncClient.builder()
                .region(Region.US_EAST_1)
                .build();

        CreateThingRequest request = CreateThingRequest.builder()
                .thingName(thingName)
                .build();

        return iotClient.createThing(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        if (exception instanceof ResourceAlreadyExistsException) {
                            logger.info(" IoT Thing already exists: " + thingName);
                        } else {
                            throw new CompletionException("Failed to create IoT
Thing: " + thingName, exception);
```

```
                        }
                    } else {
                        logger.info("IoT Thing created: " + response.thingName());
                    }
                })
                .thenApply(response -> null);
    }


    /**
     * Deletes a model manifest.
     *
     * @param name the name of the model manifest to delete
     * @return a {@link CompletableFuture} that completes when the model manifest
has been deleted
     */
    public CompletableFuture<Void> deleteModelManifestAsync(String name) {
        DeleteModelManifestRequest request = DeleteModelManifestRequest.builder()
                .name(name)
                .build();

        return getAsyncClient().deleteModelManifest(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the model
manifest: " + cause);
                    }
                    logger.info("{} was successfully deleted", name);
                    return null;
                });
    }


    /**
     * Deletes a signal catalog.
     *
     * @param name the name of the signal catalog to delete
     * @return a {@link CompletableFuture} that completes when the signal catalog is
deleted
```

```
     */
    public CompletableFuture<Void> deleteSignalCatalogAsync(String name) {
        DeleteSignalCatalogRequest request = DeleteSignalCatalogRequest.builder()
                .name(name)
                .build();

        return getAsyncClient().deleteSignalCatalog(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the signal
catalog: " + cause);
                    }
                    logger.info("{} was successfully deleted", name);
                    return null;
                });
    }

    /**
     * Asynchronously retrieves a list of all nodes in the specified signal catalog.
     *
     * @param signalCatalogName the name of the signal catalog to retrieve nodes for
     * @return a {@link CompletableFuture} that, when completed, contains a {@link
List} of {@link Node} objects
     * representing all the nodes in the specified signal catalog
     */
    public CompletableFuture<List<Node>> listSignalCatalogNodeAsync(String
signalCatalogName) {
        ListSignalCatalogNodesRequest request =
ListSignalCatalogNodesRequest.builder()
                .name(signalCatalogName)
                .build();

        List<Node> allNodes = new ArrayList<>();

        return getAsyncClient().listSignalCatalogNodesPaginator(request)
                .subscribe(response -> allNodes.addAll(response.nodes()))
                .thenApply(v -> allNodes);
    }
```

```
   /**
    * Creates a model manifest.
    *
    * @param name             the name of the model manifest to create
    * @param signalCatalogArn the Amazon Resource Name (ARN) of the signal catalog
    * @param nodes            a list of nodes to include in the model manifest
    * @return a {@link CompletableFuture} that completes with the ARN of the
created model manifest
    */
   public CompletableFuture<String> createModelManifestAsync(String name,
                                                              String
signalCatalogArn,
                                                              List<Node> nodes) {
       // Extract the fully qualified names (FQNs) from each Node in the provided
list.
       List<String> fqnList = nodes.stream()
               .map(node -> {
                   if (node.sensor() != null) {
                       return node.sensor().fullyQualifiedName();
                   } else if (node.branch() != null) {
                       return node.branch().fullyQualifiedName();
                   } else if (node.attribute() != null) {
                       return node.attribute().fullyQualifiedName();
                   } else {
                       throw new RuntimeException("Unsupported node type");
                   }
               })
               .toList();

       CreateModelManifestRequest request = CreateModelManifestRequest.builder()
               .name(name)
               .signalCatalogArn(signalCatalogArn)
               .nodes(fqnList)
               .build();


       CompletableFuture<String> result = new CompletableFuture<>();
       getAsyncClient().createModelManifest(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
```

```
                    if (cause instanceof InvalidSignalsException) {
                        result.completeExceptionally(new
CompletionException("The request contains signals that aren't valid: " +
cause.getMessage(), cause));
                    } else {
                        result.completeExceptionally(new
CompletionException("Failed to create model manifest: " + exception.getMessage(),
exception));
                    }
                } else {
                    result.complete(response.arn()); // Complete successfully
with the ARN
                }
            });

        return result;
    }


    /**
     * Deletes a fleet based on the provided fleet ID.
     *
     * @param fleetId the ID of the fleet to be deleted
     */
    public CompletableFuture<Void> deleteFleetAsync(String fleetId) {
        DeleteFleetRequest request = DeleteFleetRequest.builder()
                .fleetId(fleetId)
                .build();

        return getAsyncClient().deleteFleet(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the fleet: " +
cause);
                    }
                    logger.info("{} was successfully deleted", fleetId);
                    return null;
                });
```

```
    }



    /**
     * Creates a new fleet.
     *
     * @param catARN  the Amazon Resource Name (ARN) of the signal catalog to
 associate with the fleet
     * @param fleetId the unique identifier for the fleet
     * @return a {@link CompletableFuture} that completes with the ID of the created
 fleet
     */
    public CompletableFuture<String> createFleetAsync(String catARN, String fleetId)
 {
        CreateFleetRequest fleetRequest = CreateFleetRequest.builder()
                .fleetId(fleetId)
                .signalCatalogArn(catARN)
                .description("Built using the AWS For Java V2")
                .build();

        CompletableFuture<String> result = new CompletableFuture<>();
        getAsyncClient().createFleet(fleetRequest)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
 exception.getCause() : exception;

                        if (cause instanceof ResourceNotFoundException) {
                            result.completeExceptionally(cause);
                        } else {
                            result.completeExceptionally(new RuntimeException("An
 unexpected error occurred", cause));
                        }
                    } else {
                        result.complete(response.id());
                    }
                });

        return result;
    }
}
```

Acciones

`createDecoderManifest`

En el siguiente ejemplo de código, se muestra cómo utilizar `createDecoderManifest`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new decoder manifest.
     *
     * @param name             the name of the decoder manifest
     * @param modelManifestArn the ARN of the model manifest
     * @return a {@link CompletableFuture} that completes with the ARN of the
created decoder manifest
     */
    public CompletableFuture<String> createDecoderManifestAsync(String name, String
modelManifestArn) {
        String interfaceId = "can0";
        NetworkInterface networkInterface = NetworkInterface.builder()
                .interfaceId(interfaceId)
                .type(NetworkInterfaceType.CAN_INTERFACE)
                .canInterface(CanInterface.builder()
                        .name("canInterface0")
                        .protocolName("CAN")
                        .protocolVersion("1.0")
                        .build())
                .build();

        // Vehicle.Powertrain.EngineRPM decoder.
        SignalDecoder engineRpmDecoder = SignalDecoder.builder()
                .fullyQualifiedName("Vehicle.Powertrain.EngineRPM")
                .interfaceId(interfaceId)
                .type(SignalDecoderType.CAN_SIGNAL)
                .canSignal(CanSignal.builder()
                        .messageId(100)
```

```
                        .isBigEndian(false)
                        .isSigned(false)
                        .startBit(0)
                        .length(16)
                        .factor(1.0)
                        .offset(0.0)
                        .build())
                .build();

        // Vehicle.Powertrain.VehicleSpeed decoder.
        SignalDecoder vehicleSpeedDecoder = SignalDecoder.builder()
                .fullyQualifiedName("Vehicle.Powertrain.VehicleSpeed")
                .interfaceId(interfaceId)
                .type(SignalDecoderType.CAN_SIGNAL)
                .canSignal(CanSignal.builder()
                        .messageId(101)
                        .isBigEndian(false)
                        .isSigned(false)
                        .startBit(16)
                        .length(16)
                        .factor(1.0)
                        .offset(0.0)
                        .build())
                .build();

        CreateDecoderManifestRequest request =
CreateDecoderManifestRequest.builder()
                .name(name)
                .modelManifestArn(modelManifestArn)
                .networkInterfaces(List.of(networkInterface))
                .signalDecoders(List.of(engineRpmDecoder, vehicleSpeedDecoder))
                .build();

        CompletableFuture<String> result = new CompletableFuture<>();

        getAsyncClient().createDecoderManifest(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof DecoderManifestValidationException) {
```

```
                            result.completeExceptionally(new
CompletionException("The request contains signal decoders with validation errors: "
+ cause.getMessage(), cause));
                        } else {
                            result.completeExceptionally(new
CompletionException("Failed to create decoder manifest: " + exception.getMessage(),
exception));
                        }
                    } else {
                        result.complete(response.arn()); // Complete successfully
with the ARN
                    }
                });

        return result;
    }
```

- Para obtener más información sobre la API, consulta createDecoderManifestla Referencia AWS SDK for Java 2.x de la API.

`createFleet`

En el siguiente ejemplo de código, se muestra cómo utilizar `createFleet`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new fleet.
     *
     * @param catARN  the Amazon Resource Name (ARN) of the signal catalog to
associate with the fleet
     * @param fleetId the unique identifier for the fleet
```

```
    * @return a {@link CompletableFuture} that completes with the ID of the created
fleet
    */
   public CompletableFuture<String> createFleetAsync(String catARN, String fleetId)
{
       CreateFleetRequest fleetRequest = CreateFleetRequest.builder()
               .fleetId(fleetId)
               .signalCatalogArn(catARN)
               .description("Built using the AWS For Java V2")
               .build();

       CompletableFuture<String> result = new CompletableFuture<>();
       getAsyncClient().createFleet(fleetRequest)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                       if (cause instanceof ResourceNotFoundException) {
                           result.completeExceptionally(cause);
                       } else {
                           result.completeExceptionally(new RuntimeException("An
unexpected error occurred", cause));
                       }
                   } else {
                       result.complete(response.id());
                   }
               });

       return result;
   }
```

- Para obtener información sobre la API, consulte [createFleet](#) en la Referencia de la API de AWS SDK for Java 2.x .

`createModelManifest`

En el siguiente ejemplo de código, se muestra cómo utilizar `createModelManifest`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates a model manifest.
    *
    * @param name             the name of the model manifest to create
    * @param signalCatalogArn the Amazon Resource Name (ARN) of the signal catalog
    * @param nodes            a list of nodes to include in the model manifest
    * @return a {@link CompletableFuture} that completes with the ARN of the
created model manifest
    */
   public CompletableFuture<String> createModelManifestAsync(String name,
                                                              String
signalCatalogArn,
                                                              List<Node> nodes) {
       // Extract the fully qualified names (FQNs) from each Node in the provided
list.
       List<String> fqnList = nodes.stream()
               .map(node -> {
                   if (node.sensor() != null) {
                       return node.sensor().fullyQualifiedName();
                   } else if (node.branch() != null) {
                       return node.branch().fullyQualifiedName();
                   } else if (node.attribute() != null) {
                       return node.attribute().fullyQualifiedName();
                   } else {
                       throw new RuntimeException("Unsupported node type");
                   }
               })
               .toList();

       CreateModelManifestRequest request = CreateModelManifestRequest.builder()
               .name(name)
               .signalCatalogArn(signalCatalogArn)
               .nodes(fqnList)
```

```
                .build();


        CompletableFuture<String> result = new CompletableFuture<>();
        getAsyncClient().createModelManifest(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof InvalidSignalsException) {
                            result.completeExceptionally(new
CompletionException("The request contains signals that aren't valid: " +
cause.getMessage(), cause));
                        } else {
                            result.completeExceptionally(new
CompletionException("Failed to create model manifest: " + exception.getMessage(),
exception));
                        }
                    } else {
                        result.complete(response.arn()); // Complete successfully
with the ARN
                    }
                });

        return result;
    }
```

- Para obtener más información sobre la API, consulta createModelManifestla Referencia AWS SDK for Java 2.x de la API.

`createSignalCatalog`

En el siguiente ejemplo de código, se muestra cómo utilizar `createSignalCatalog`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates a signal catalog.
    *
    * @param signalCatalogName the name of the signal catalog to be created
    * @return a {@link CompletableFuture} that completes with the Amazon Resource
Name (ARN) of the created signal catalog
    */
   public CompletableFuture<String> createSignalCatalogAsync(String
signalCatalogName) {
       return deleteSignalCatalogIfExistsAsync(signalCatalogName)
               .thenCompose(ignored -> delayAsync(2000)) // Wait for 2 seconds
               .thenCompose(ignored -> {
                   List<Node> nodes = List.of(
                           Node.builder().branch(
                                   Branch.builder()
                                           .fullyQualifiedName("Vehicle")
                                           .description("Root branch")
                                           .build()
                           ).build(),
                           Node.builder().branch(
                                   Branch.builder()

.fullyQualifiedName("Vehicle.Powertrain")
                                           .description("Powertrain branch")
                                           .build()
                           ).build(),
                           Node.builder().sensor(
                                   Sensor.builder()

.fullyQualifiedName("Vehicle.Powertrain.EngineRPM")
                                           .description("Engine RPM")
                                           .dataType(NodeDataType.DOUBLE)
                                           .unit("rpm")
```

```
                                        .build()
                        ).build(),
                        Node.builder().sensor(
                                Sensor.builder()

.fullyQualifiedName("Vehicle.Powertrain.VehicleSpeed")
                                        .description("Vehicle Speed")
                                        .dataType(NodeDataType.DOUBLE)
                                        .unit("km/h")
                                        .build()
                        ).build()
                );

                CreateSignalCatalogRequest request =
CreateSignalCatalogRequest.builder()
                        .name(signalCatalogName)
                        .nodes(nodes)
                        .build();

                CompletableFuture<String> result = new CompletableFuture<>();

                getAsyncClient().createSignalCatalog(request)
                        .whenComplete((response, exception) -> {
                            if (exception != null) {
                                Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                                if (cause instanceof ValidationException) {
                                    result.completeExceptionally(cause);
                                } else {
                                    result.completeExceptionally(new
RuntimeException("Error creating the catalog", cause));
                                }
                            } else {
                                result.complete(response.arn());
                            }
                        });

                return result;
            });
    }
```

- Para obtener más información sobre la API, consulta createSignalCatalogla Referencia AWS SDK for Java 2.x de la API.

`createVehicle`

En el siguiente ejemplo de código, se muestra cómo utilizar `createVehicle`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates a new vehicle in the system.
    *
    * @param vecName     the name of the vehicle to be created
    * @param manifestArn the Amazon Resource Name (ARN) of the model manifest for
the vehicle
    * @param decArn      the Amazon Resource Name (ARN) of the decoder manifest for
the vehicle
    * @return a {@link CompletableFuture} that completes when the vehicle has been
created, or throws a
    */
   public CompletableFuture<Void> createVehicleAsync(String vecName, String
manifestArn, String decArn) {
       CreateVehicleRequest request = CreateVehicleRequest.builder()
               .vehicleName(vecName)
               .modelManifestArn(manifestArn)
               .decoderManifestArn(decArn)
               .build();

       CompletableFuture<Void> result = new CompletableFuture<>();
       getAsyncClient().createVehicle(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception instanceof CompletionException ?
exception.getCause() : exception;
```

```
                        if (cause instanceof ResourceNotFoundException) {
                            result.completeExceptionally(cause);
                        } else {
                            result.completeExceptionally(new
RuntimeException("Failed to create vehicle: " + cause.getMessage(), cause));
                        }
                    } else {
                        logger.info("Vehicle '{}' created successfully.", vecName);
                        result.complete(null); // mark future as complete
                    }
                });

        return result;
    }
```

- Para obtener información sobre la API, consulte createVehicle en la Referencia de la API de AWS SDK for Java 2.x .

`deleteDecoderManifest`

En el siguiente ejemplo de código, se muestra cómo utilizar `deleteDecoderManifest`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a decoder manifest.
     *
     * @param name the name of the decoder manifest to delete
     * @return a {@link CompletableFuture} that completes when the decoder manifest
has been deleted
     */
    public CompletableFuture<Void> deleteDecoderManifestAsync(String name) {
```

```
        return
getAsyncClient().deleteDecoderManifest(DeleteDecoderManifestRequest.builder().name(name).bu
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the decoder
manifest: " + cause);
                    }
                    return null;
                });
    }
```

- Para obtener más información sobre la API, consulta deleteDecoderManifestla Referencia AWS SDK for Java 2.x de la API.

`deleteFleet`

En el siguiente ejemplo de código, se muestra cómo utilizar `deleteFleet`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a fleet based on the provided fleet ID.
     *
     * @param fleetId the ID of the fleet to be deleted
     */
    public CompletableFuture<Void> deleteFleetAsync(String fleetId) {
        DeleteFleetRequest request = DeleteFleetRequest.builder()
                .fleetId(fleetId)
```

```
                .build();

        return getAsyncClient().deleteFleet(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the fleet: " +
cause);
                    }
                    logger.info("{} was successfully deleted", fleetId);
                    return null;
                });
    }
```

- Para obtener información sobre la API, consulte deleteFleet en la Referencia de la API de AWS SDK for Java 2.x .

`deleteModelManifest`

En el siguiente ejemplo de código, se muestra cómo utilizar `deleteModelManifest`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a model manifest.
     *
     * @param name the name of the model manifest to delete
     * @return a {@link CompletableFuture} that completes when the model manifest
has been deleted
```

```
     */
    public CompletableFuture<Void> deleteModelManifestAsync(String name) {
        DeleteModelManifestRequest request = DeleteModelManifestRequest.builder()
                .name(name)
                .build();

        return getAsyncClient().deleteModelManifest(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the model
manifest: " + cause);
                    }
                    logger.info("{} was successfully deleted", name);
                    return null;
                });
    }
```

- Para obtener más información sobre la API, consulta deleteModelManifestla Referencia AWS SDK for Java 2.x de la API.

`deleteSignalCatalog`

En el siguiente ejemplo de código, se muestra cómo utilizar `deleteSignalCatalog`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a signal catalog.
```

```
     *
     * @param name the name of the signal catalog to delete
     * @return a {@link CompletableFuture} that completes when the signal catalog is
deleted
     */
    public CompletableFuture<Void> deleteSignalCatalogAsync(String name) {
        DeleteSignalCatalogRequest request = DeleteSignalCatalogRequest.builder()
                .name(name)
                .build();

        return getAsyncClient().deleteSignalCatalog(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the signal
catalog: " + cause);
                    }
                    logger.info("{} was successfully deleted", name);
                    return null;
                });
    }
```

- Para obtener más información sobre la API, consulta deleteSignalCatalogla Referencia AWS SDK for Java 2.x de la API.

`deleteVehicle`

En el siguiente ejemplo de código, se muestra cómo utilizar `deleteVehicle`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deletes a vehicle with the specified name.
    *
    * @param vecName the name of the vehicle to be deleted
    * @return a {@link CompletableFuture} that completes when the vehicle has been
deleted
    */
   public CompletableFuture<Void> deleteVehicleAsync(String vecName) {
       DeleteVehicleRequest request = DeleteVehicleRequest.builder()
               .vehicleName(vecName)
               .build();

       return getAsyncClient().deleteVehicle(request)
               .handle((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                       if (cause instanceof ResourceNotFoundException) {
                           throw (ResourceNotFoundException) cause;
                       }
                       throw new RuntimeException("Failed to delete the vehicle: "
+ cause);
                   }
                   return null;
               });
   }
```

- Para obtener información sobre la API, consulte deleteVehicle en la Referencia de la API de AWS SDK for Java 2.x .

`getDecoderManifest`

En el siguiente ejemplo de código, se muestra cómo utilizar `getDecoderManifest`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Waits for the decoder manifest to become active.
    *
    * @param decoderName the name of the decoder to wait for
    * @return a {@link CompletableFuture} that completes when the decoder manifest
becomes active, or exceptionally if an error occurs or the manifest becomes invalid
    */
   public CompletableFuture<Void> waitForDecoderManifestActiveAsync(String
decoderName) {
       CompletableFuture<Void> result = new CompletableFuture<>();

       ScheduledExecutorService scheduler =
Executors.newSingleThreadScheduledExecutor();
       AtomicInteger secondsElapsed = new AtomicInteger(0);
       AtomicReference<ManifestStatus> lastStatus = new
AtomicReference<>(ManifestStatus.DRAFT);

       logger.info(" Elapsed: 0s | Decoder Status: DRAFT");

       final Runnable pollTask = new Runnable() {
           @Override
           public void run() {
               int elapsed = secondsElapsed.incrementAndGet();

               // Check status every 5 seconds
               if (elapsed % 5 == 0) {
                   GetDecoderManifestRequest request =
GetDecoderManifestRequest.builder()
                           .name(decoderName)
                           .build();

                   getAsyncClient().getDecoderManifest(request)
                           .whenComplete((response, exception) -> {
                               if (exception != null) {
```

```
                                    Throwable cause = exception instanceof
CompletionException ? exception.getCause() : exception;

                                    scheduler.shutdown();
                                    if (cause instanceof ResourceNotFoundException)
{
                                        result.completeExceptionally(new
RuntimeException("Decoder manifest not found: " + cause.getMessage(), cause));
                                    } else {
                                        result.completeExceptionally(new
RuntimeException("Error while polling decoder manifest status: " +
exception.getMessage(), exception));
                                    }
                                    return;
                                }

                                ManifestStatus status = response.status();
                                lastStatus.set(status);

                                if (status == ManifestStatus.ACTIVE) {
                                    logger.info("\r Elapsed: {}s | Decoder Status:
ACTIVE", elapsed);
                                    scheduler.shutdown();
                                    result.complete(null);
                                } else if (status == ManifestStatus.INVALID) {
                                    logger.info("\r Elapsed: {}s | Decoder Status:
INVALID", elapsed);
                                    scheduler.shutdown();
                                    result.completeExceptionally(new
RuntimeException("Decoder manifest became INVALID. Cannot proceed."));
                                } else {
                                    logger.info("\r# Elapsed: {}s | Decoder Status:
{}", elapsed, status);
                                }
                            });
                } else {
                    logger.info("\r Elapsed: {}s | Decoder Status: {}", elapsed,
lastStatus.get());
                }
            }
        };

        // Start the task with an initial delay of 1 second, and repeat every second
        scheduler.scheduleAtFixedRate(pollTask, 1, 1, TimeUnit.SECONDS);
```

```
        return result;
    }
```

- Para obtener más información sobre la API, consulta getDecoderManifestla Referencia AWS SDK for Java 2.x de la API.

`getModelManifest`

En el siguiente ejemplo de código, se muestra cómo utilizar `getModelManifest`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Waits for the specified model manifest to become active.
     *
     * @param manifestName the name of the model manifest to wait for
     */
    public CompletableFuture<Void> waitForModelManifestActiveAsync(String
manifestName) {
        CompletableFuture<Void> result = new CompletableFuture<>();

        ScheduledExecutorService scheduler =
Executors.newSingleThreadScheduledExecutor();
        AtomicInteger secondsElapsed = new AtomicInteger(0);
        AtomicReference<ManifestStatus> lastStatus = new
AtomicReference<>(ManifestStatus.DRAFT);

        logger.info("Elapsed: 0s | Status: DRAFT");

        final Runnable pollTask = new Runnable() {
            @Override
            public void run() {
```

```
                int elapsed = secondsElapsed.incrementAndGet();

                // Only check status every 5 seconds
                if (elapsed % 5 == 0) {
                    GetModelManifestRequest request =
GetModelManifestRequest.builder()
                            .name(manifestName)
                            .build();

                    getAsyncClient().getModelManifest(request)
                            .whenComplete((response, exception) -> {
                                if (exception != null) {
                                    Throwable cause = exception instanceof
CompletionException ? exception.getCause() : exception;

                                    scheduler.shutdown();
                                    if (cause instanceof ResourceNotFoundException)
{
                                        result.completeExceptionally(new
RuntimeException("Model manifest not found: " + cause.getMessage(), cause));
                                    } else {
                                        result.completeExceptionally(new
RuntimeException("Error while polling model manifest status: " +
exception.getMessage(), exception));
                                    }
                                    return;
                                }

                                ManifestStatus status = response.status();
                                lastStatus.set(status);

                                if (status == ManifestStatus.ACTIVE) {
                                    logger.info("\rElapsed: {}s | Status: ACTIVE",
elapsed);
                                    scheduler.shutdown();
                                    result.complete(null);
                                } else if (status == ManifestStatus.INVALID) {
                                    logger.info("\rElapsed: {}s | Status: INVALID",
elapsed);
                                    scheduler.shutdown();
                                    result.completeExceptionally(new
RuntimeException("Model manifest became INVALID. Cannot proceed."));
                                } else {
```

```
                                    logger.info("\rElapsed: {}s | Status: {}",
elapsed, status);
                                }
                            });
                } else {
                    logger.info("\rElapsed: {}s | Status: {}", elapsed,
lastStatus.get());
                }
            }
        };

        // Start the task with an initial delay of 1 second, and repeat every second
        scheduler.scheduleAtFixedRate(pollTask, 1, 1, TimeUnit.SECONDS);
        return result;
    }
```

- Para obtener más información sobre la API, consulta [getModelManifest](la Referencia AWS SDK for Java 2.x de la API.

`getVehicle`

En el siguiente ejemplo de código, se muestra cómo utilizar `getVehicle`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Fetches the details of a vehicle.
     *
     * @param vehicleName the name of the vehicle to fetch details for
     * @return a {@link CompletableFuture} that completes when the vehicle details
have been fetched
     */
```

```
   public CompletableFuture<Void> getVehicleDetailsAsync(String vehicleName) {
       GetVehicleRequest request = GetVehicleRequest.builder()
               .vehicleName(vehicleName)
               .build();

       CompletableFuture<Void> result = new CompletableFuture<>();

       getAsyncClient().getVehicle(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception instanceof CompletionException ?
exception.getCause() : exception;

                       if (cause instanceof ResourceNotFoundException) {
                           result.completeExceptionally(cause); // don't rewrap
                       } else {
                           result.completeExceptionally(new
RuntimeException("Failed to fetch vehicle details: " + cause.getMessage(), cause));
                       }
                   } else {
                       Map<String, Object> details = new HashMap<>();
                       details.put("vehicleName", response.vehicleName());
                       details.put("arn", response.arn());
                       details.put("modelManifestArn",
response.modelManifestArn());
                       details.put("decoderManifestArn",
response.decoderManifestArn());
                       details.put("attributes", response.attributes());
                       details.put("creationTime",
response.creationTime().toString());
                       details.put("lastModificationTime",
response.lastModificationTime().toString());

                       logger.info("Vehicle Details:");
                       details.forEach((key, value) -> logger.info("• {} : {}",
key, value));

                       result.complete(null); // mark as successful
                   }
               });

       return result;
   }
```

- Para obtener información sobre la API, consulte getVehicle en la Referencia de la API de AWS SDK for Java 2.x .

`listSignalCatalogNodes`

En el siguiente ejemplo de código, se muestra cómo utilizar `listSignalCatalogNodes`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously retrieves a list of all nodes in the specified signal catalog.
    *
    * @param signalCatalogName the name of the signal catalog to retrieve nodes for
    * @return a {@link CompletableFuture} that, when completed, contains a {@link
List} of {@link Node} objects
    * representing all the nodes in the specified signal catalog
    */
   public CompletableFuture<List<Node>> listSignalCatalogNodeAsync(String
signalCatalogName) {
       ListSignalCatalogNodesRequest request =
ListSignalCatalogNodesRequest.builder()
               .name(signalCatalogName)
               .build();

       List<Node> allNodes = new ArrayList<>();

       return getAsyncClient().listSignalCatalogNodesPaginator(request)
               .subscribe(response -> allNodes.addAll(response.nodes()))
               .thenApply(v -> allNodes);
   }
```

- Para obtener más información sobre la API, consulta la listSignalCatalogsección Nodes in AWS SDK for Java 2.x API Reference.

`updateDecoderManifest`

En el siguiente ejemplo de código, se muestra cómo utilizar `updateDecoderManifest`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Updates the decoder manifest with the given name.
    *
    * @param name the name of the decoder manifest to update
    * @return a {@link CompletableFuture} that completes when the update operation
is finished
    */
   public CompletableFuture<Void> updateDecoderManifestAsync(String name) {
       UpdateDecoderManifestRequest request =
UpdateDecoderManifestRequest.builder()
               .name(name)
               .status(ManifestStatus.ACTIVE)
               .build();

       return getAsyncClient().updateDecoderManifest(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       throw new CompletionException("Failed to update decoder
manifest: " + exception.getMessage(), exception);
                   }
               })
               .thenApply(response -> null);
   }
```

- Para obtener más información sobre la API, consulta updateDecoderManifestla Referencia AWS SDK for Java 2.x de la API.

`updateModelManifest`

En el siguiente ejemplo de código, se muestra cómo utilizar `updateModelManifest`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Updates the model manifest.
     *
     * @param name the name of the model manifest to update
     */
    public void updateModelManifestAsync(String name) {
        UpdateModelManifestRequest request = UpdateModelManifestRequest.builder()
                .name(name)
                .status(ManifestStatus.ACTIVE)
                .build();

        getAsyncClient().updateModelManifest(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        throw new CompletionException("Failed to update model
manifest: " + exception.getMessage(), exception);
                    }
                })
                .thenApply(response -> null);
    }
```

- Para obtener más información sobre la API, consulta updateModelManifestla Referencia AWS SDK for Java 2.x de la API.

AWS IoT SiteWise ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with AWS IoT SiteWise.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hola AWS IoT SiteWise

En el siguiente ejemplo de código se muestra cómo empezar a utilizar AWS IoT SiteWise.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public class HelloSitewise {
    private static final Logger logger =
 LoggerFactory.getLogger(HelloSitewise.class);
    public static void main(String[] args) {
         fetchAssetModels();
```

```
    }

    /**
     * Fetches asset models using the provided {@link IoTSiteWiseAsyncClient}.
     */
    public static void fetchAssetModels() {
        IoTSiteWiseAsyncClient siteWiseAsyncClient =
 IoTSiteWiseAsyncClient.create();
        ListAssetModelsRequest assetModelsRequest = ListAssetModelsRequest.builder()
            .assetModelTypes(AssetModelType.ASSET_MODEL)
            .build();

        // Asynchronous paginator - process paginated results.
        ListAssetModelsPublisher listModelsPaginator =
 siteWiseAsyncClient.listAssetModelsPaginator(assetModelsRequest);
        CompletableFuture<Void> future = listModelsPaginator.subscribe(response -> {
            response.assetModelSummaries().forEach(assetSummary ->
                logger.info("Asset Model Name: {} ", assetSummary.name())
            );
        });

        // Wait for the asynchronous operation to complete
        future.join();
    }
}
```

- Para obtener más información sobre la API, consulta ListAssetModelsla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Cree un modelo AWS IoT SiteWise de activos.
- Cree un AWS IoT SiteWise activo.
- Recuperar los valores de ID de la propiedad.
- Envía datos a un AWS IoT SiteWise activo.
- Recupera el valor de la propiedad del AWS IoT SiteWise activo.

- Crea un AWS IoT SiteWise portal.
- Cree una AWS IoT SiteWise puerta de enlace.
- Describa la AWS IoT SiteWise puerta de enlace.
- Elimine los AWS IoT SiteWise activos.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario interactivo que demuestre AWS IoT SiteWise las funciones.

```
public class SitewiseScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    private static final Logger logger =
 LoggerFactory.getLogger(SitewiseScenario.class);
    static Scanner scanner = new Scanner(System.in);

    private static final String ROLES_STACK = "RoleSitewise";

    static SitewiseActions sitewiseActions = new SitewiseActions();

    public static void main(String[] args) throws Throwable {
        Scanner scanner = new Scanner(System.in);
        String contactEmail = "user@mydomain.com"; // Change email address.
        String assetModelName = "MyAssetModel1";
        String assetName = "MyAsset1" ;
        String portalName = "MyPortal1" ;
        String gatewayName = "MyGateway1" ;
        String myThing =  "MyThing1" ;

        logger.info("""
            AWS IoT SiteWise is a fully managed software-as-a-service (SaaS) that
            makes it easy to collect, store, organize, and monitor data from
 industrial equipment and processes.
```

```
            It is designed to help industrial and manufacturing organizations
collect data from their equipment and
            processes, and use that data to make informed decisions about their
operations.

            One of the key features of AWS IoT SiteWise is its ability to connect to
a wide range of industrial
            equipment and systems, including programmable logic controllers (PLCs),
sensors, and other
            industrial devices. It can collect data from these devices and organize
it into a unified data model,
            making it easier to analyze and gain insights from the data. AWS IoT
SiteWise also provides tools for
            visualizing the data, setting up alarms and alerts, and generating
reports.

            Another key feature of AWS IoT SiteWise is its ability to scale to
handle large volumes of data.
            It can collect and store data from thousands of devices and process
millions of data points per second,
            making it suitable for large-scale industrial operations. Additionally,
AWS IoT SiteWise is designed
            to be secure and compliant, with features like role-based access
controls, data encryption,
            and integration with other AWS services for additional security and
compliance features.

            Let's get started...
            """);

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        try {
            runScenario(assetModelName, assetName, portalName, contactEmail,
gatewayName, myThing);
        } catch (RuntimeException e) {
           logger.info(e.getMessage());
        }
    }

    public static void runScenario(String assetModelName, String assetName,  String
portalName, String contactEmail, String gatewayName, String myThing) throws
Throwable {
```

```
        logger.info("Use AWS CloudFormation to create an IAM role that is required
for this scenario.");
        CloudFormationHelper.deployCloudFormationStack(ROLES_STACK);
        Map<String, String> stackOutputs =
CloudFormationHelper.getStackOutputsAsync(ROLES_STACK).join();
        String iamRole = stackOutputs.get("SitewiseRoleArn");
        logger.info("The ARN of the IAM role is {}",iamRole);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("1. Create an AWS SiteWise Asset Model");
        logger.info("""
             An AWS IoT SiteWise Asset Model is a way to represent the physical
assets, such as equipment,
             processes, and systems, that exist in an industrial environment. This
model provides a structured and
             hierarchical representation of these assets, allowing users to define
the relationships and properties
             of each asset.

             This scenario creates two asset model properties: temperature and
humidity.
            """);
        waitForInputToContinue(scanner);
        String assetModelId = null;
        try {
            CreateAssetModelResponse response =
sitewiseActions.createAssetModelAsync(assetModelName).join();
            assetModelId = response.assetModelId();
            logger.info("Asset Model successfully created. Asset Model ID: {}. ",
assetModelId);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceAlreadyExistsException) {
                try {
                    assetModelId =
sitewiseActions.getAssetModelIdAsync(assetModelName).join();
                    logger.info("The Asset Model {} already exists. The id of the
existing model is {}. Moving on...", assetModelName, assetModelId);
                } catch (CompletionException cex) {
                    logger.error("Exception thrown acquiring the asset model id:
{}", cex.getCause().getCause(), cex);
                    return;
                }
```

```
            } else {
                logger.info("An unexpected error occurred: " + cause.getMessage(),
cause);
                return;
            }
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("2. Create an AWS IoT SiteWise Asset");
        logger.info("""
             The IoT SiteWise model that we just created defines the structure and
metadata for your physical assets.
             Now we create an asset from the asset model.

            """);
        logger.info("Let's wait 30 seconds for the asset to be ready.");
        countdown(30);
        waitForInputToContinue(scanner);
        String assetId;
        try {
            CreateAssetResponse response =
sitewiseActions.createAssetAsync(assetName, assetModelId).join();
            assetId = response.assetId();
            logger.info("Asset created with ID: {}", assetId);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.info("The asset model id was not found: {}",
cause.getMessage(), cause);
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Retrieve the property ID values");
        logger.info("""
             To send data to an asset, we need to get the property ID values. In
this scenario, we access the
```

```
             temperature and humidity property ID values.
            """);
        waitForInputToContinue(scanner);
        Map<String, String>  propertyIds = null;
        try {
            propertyIds = sitewiseActions.getPropertyIds(assetModelId).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof IoTSiteWiseException) {
                logger.error("IoTSiteWiseException occurred: {}",
cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
            return;
        }
        String humPropId =  propertyIds.get("Humidity");
        logger.info("The Humidity property Id is {}", humPropId);
        String tempPropId = propertyIds.get("Temperature");
        logger.info("The Temperature property Id is {}", tempPropId);

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Send data to an AWS IoT SiteWise Asset");
        logger.info("""
            By sending data to an IoT SiteWise Asset, you can aggregate data from
            multiple sources, normalize the data into a standard format, and store
it in a
            centralized location. This makes it easier to analyze and gain insights
from the data.

            In this example, we generate sample temperature and humidity data and
send it to the AWS IoT SiteWise asset.

            """);
        waitForInputToContinue(scanner);
        try {
            sitewiseActions.sendDataToSiteWiseAsync(assetId, tempPropId,
humPropId).join();
            logger.info("Data sent successfully.");
        } catch (CompletionException ce) {
```

```
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The AWS resource was not found: {}",
cause.getMessage(), cause);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. Retrieve the value of the IoT SiteWise Asset property");
        logger.info("""
            IoT SiteWise is an AWS service that allows you to collect, process, and
analyze industrial data
            from connected equipment and sensors. One of the key benefits of reading
an IoT SiteWise property
            is the ability to gain valuable insights from your industrial data.

            """);
        waitForInputToContinue(scanner);
        try {
            Double assetVal = sitewiseActions.getAssetPropValueAsync(tempPropId,
assetId).join();
            logger.info("The property name is: {}", "Temperature");
            logger.info("The value of this property is: {}", assetVal);

            waitForInputToContinue(scanner);

            assetVal = sitewiseActions.getAssetPropValueAsync(humPropId,
assetId).join();
            logger.info("The property name is: {}", "Humidity");
            logger.info("The value of this property is: {}", assetVal);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException) {
                    logger.info("The AWS resource was not found: {}",
cause.getMessage(), cause);
                } else {
                    logger.info("An unexpected error occurred: {}",
cause.getMessage(), cause);
```

```
                }
                return;
            }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("6. Create an IoT SiteWise Gateway");
        logger.info(
            """
                IoT SiteWise Gateway serves as the bridge between industrial
equipment, sensors, and the
                cloud-based IoT SiteWise service. It is responsible for securely
collecting, processing, and
                transmitting data from various industrial assets to the IoT SiteWise
platform,
                enabling real-time monitoring, analysis, and optimization of
industrial operations.

                """);
        waitForInputToContinue(scanner);
        String gatewayId = "";
        try {
            gatewayId = sitewiseActions.createGatewayAsync(gatewayName,
myThing).join();
            logger.info("Gateway creation completed successfully. id is {}",
gatewayId );
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof IoTSiteWiseException siteWiseEx) {
                logger.error("IoT SiteWise error occurred: Error message: {}, Error
code {}",
                        siteWiseEx.getMessage(),
siteWiseEx.awsErrorDetails().errorCode(), siteWiseEx);
            } else {
                logger.error("An unexpected error occurred: {}",
cause.getMessage());
            }
            return;
        }
        logger.info(DASHES);
        logger.info(DASHES);

        logger.info("7. Describe the IoT SiteWise Gateway");
```

```
         waitForInputToContinue(scanner);
        try {
            sitewiseActions.describeGatewayAsync(gatewayId)
                .thenAccept(response -> {
                    logger.info("Gateway Name: {}", response.gatewayName());
                    logger.info("Gateway ARN: {}", response.gatewayArn());
                    logger.info("Gateway Platform: {}", response.gatewayPlatform());
                    logger.info("Gateway Creation Date: {}",
response.creationDate());
                }).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException notFoundException) {
                logger.error("A ResourceNotFoundException occurred: Error message:
{}, Error code {}",
                        notFoundException.getMessage(),
notFoundException.awsErrorDetails().errorCode(), notFoundException);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. Delete the AWS IoT SiteWise Assets");
        logger.info(
            """
            Before you can delete the Asset Model, you must delete the assets.

            """);
        logger.info("Would you like to delete the IoT SiteWise Assets? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            logger.info("You selected to delete the SiteWise assets.");

            try {
                sitewiseActions.deleteGatewayAsync(gatewayId).join();
                logger.info("Gateway {} was deleted successfully.", gatewayId);
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException notFoundException) {
```

```
                    logger.error("A ResourceNotFoundException occurred: Error
message: {}, Error code {}",
                            notFoundException.getMessage(),
notFoundException.awsErrorDetails().errorCode(), notFoundException);
                } else {
                    logger.error("An unexpected error occurred: {}",
cause.getMessage());
                }
            }

            try {
                sitewiseActions.deleteAssetAsync(assetId).join();
                logger.info("Request to delete asset {} sent successfully",
assetId);
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException notFoundException) {
                    logger.error("A ResourceNotFoundException occurred: Error
message: {}, Error code {}",
                            notFoundException.getMessage(),
notFoundException.awsErrorDetails().errorCode(), notFoundException);
                } else {
                    logger.error("An unexpected error occurred: {}",
cause.getMessage());
                }
            }
            logger.info("Let's wait 1 minute for the asset to be deleted.");
            countdown(60);
            waitForInputToContinue(scanner);
            logger.info("Delete the AWS IoT SiteWise Asset Model");
            try {
                sitewiseActions.deleteAssetModelAsync(assetModelId).join();
                logger.info("Asset model deleted successfully.");
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException notFoundException) {
                    logger.error("A ResourceNotFoundException occurred: Error
message: {}, Error code {}",
                            notFoundException.getMessage(),
notFoundException.awsErrorDetails().errorCode(), notFoundException);
                } else {
                    logger.error("An unexpected error occurred: {}",
cause.getMessage());
                }
```

```
            }
            waitForInputToContinue(scanner);

        } else {
            logger.info("The resources will not be deleted.");
        }
        logger.info(DASHES);

        logger.info(DASHES);
        CloudFormationHelper.destroyCloudFormationStack(ROLES_STACK);
        logger.info("This concludes the AWS IoT SiteWise Scenario");
        logger.info(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                logger.info("Invalid input. Please try again.");
            }
        }
    }

    public static void countdown(int totalSeconds) throws InterruptedException {
        for (int i = totalSeconds; i >= 0; i--) {
            int displayMinutes = i / 60;
            int displaySeconds = i % 60;
            System.out.printf("\r%02d:%02d", displayMinutes, displaySeconds);
            Thread.sleep(1000); // Wait for 1 second
        }
        System.out.println(); // Move to the next line after countdown
        logger.info("Countdown complete!");
    }
}
```

Una clase contenedora para los métodos AWS IoT SiteWise del SDK.

```
public class SitewiseActions {

   private static final Logger logger =
 LoggerFactory.getLogger(SitewiseActions.class);

   private static IoTSiteWiseAsyncClient ioTSiteWiseAsyncClient;

   private static IoTSiteWiseAsyncClient getAsyncClient() {
       if (ioTSiteWiseAsyncClient == null) {
           SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
               .maxConcurrency(100)
               .connectionTimeout(Duration.ofSeconds(60))
               .readTimeout(Duration.ofSeconds(60))
               .writeTimeout(Duration.ofSeconds(60))
               .build();

           ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
               .apiCallTimeout(Duration.ofMinutes(2))
               .apiCallAttemptTimeout(Duration.ofSeconds(90))
               .retryStrategy(RetryMode.STANDARD)
               .build();

           ioTSiteWiseAsyncClient = IoTSiteWiseAsyncClient.builder()
               .httpClient(httpClient)
               .overrideConfiguration(overrideConfig)
               .build();
       }
       return ioTSiteWiseAsyncClient;
   }


   /**
    * Creates an asset model.
    *
    * @param name the name of the asset model to create.
    * @return a {@link CompletableFuture} that represents a {@link
 CreateAssetModelResponse} result. The calling code
    *         can attach callbacks, then handle the result or exception by calling
 {@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
```

```
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps it
    *         available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<CreateAssetModelResponse> createAssetModelAsync(String
name) {
       PropertyType humidity = PropertyType.builder()
           .measurement(Measurement.builder().build())
           .build();

       PropertyType temperaturePropertyType = PropertyType.builder()
           .measurement(Measurement.builder().build())
           .build();

       AssetModelPropertyDefinition temperatureProperty =
AssetModelPropertyDefinition.builder()
           .name("Temperature")
           .dataType(PropertyDataType.DOUBLE)
           .type(temperaturePropertyType)
           .build();

       AssetModelPropertyDefinition humidityProperty =
AssetModelPropertyDefinition.builder()
           .name("Humidity")
           .dataType(PropertyDataType.DOUBLE)
           .type(humidity)
           .build();

       CreateAssetModelRequest createAssetModelRequest =
CreateAssetModelRequest.builder()
           .assetModelName(name)
           .assetModelDescription("This is my asset model")
           .assetModelProperties(temperatureProperty, humidityProperty)
           .build();

       return getAsyncClient().createAssetModel(createAssetModelRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   logger.error("Failed to create asset model: {} ",
exception.getCause().getMessage());
               }
```

```
            });
    }


    /**
     * Creates an asset with the specified name and asset model Id.
     *
     * @param assetName    the name of the asset to create.
     * @param assetModelId the Id of the asset model to associate with the asset.
     * @return a {@link CompletableFuture} that represents a {@link
CreateAssetResponse} result. The calling code can
     *         attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps it
     *         available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<CreateAssetResponse> createAssetAsync(String assetName,
String assetModelId) {
        CreateAssetRequest createAssetRequest = CreateAssetRequest.builder()
            .assetModelId(assetModelId)
            .assetDescription("Created using the AWS SDK for Java")
            .assetName(assetName)
            .build();

        return getAsyncClient().createAsset(createAssetRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("Failed to create asset: {}",
exception.getCause().getMessage());
                }
            });
    }

    /**
     * Sends data to the SiteWise service.
     *
     * @param assetId        the ID of the asset to which the data will be sent.
     * @param tempPropertyId the ID of the temperature property.
```

```
    * @param humidityPropId the ID of the humidity property.
    * @return a {@link CompletableFuture} that represents a {@link
BatchPutAssetPropertyValueResponse} result. The
    *         calling code can attach callbacks, then handle the result or
exception by calling
    *         {@link CompletableFuture#join()} or {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps it
    *         available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<BatchPutAssetPropertyValueResponse>
sendDataToSiteWiseAsync(String assetId, String tempPropertyId, String
humidityPropId) {
       Map<String, Double> sampleData = generateSampleData();
       long timestamp = Instant.now().toEpochMilli();

       TimeInNanos time = TimeInNanos.builder()
           .timeInSeconds(timestamp / 1000)
           .offsetInNanos((int) ((timestamp % 1000) * 1000000))
           .build();

       BatchPutAssetPropertyValueRequest request =
BatchPutAssetPropertyValueRequest.builder()
           .entries(Arrays.asList(
               PutAssetPropertyValueEntry.builder()
                   .entryId("entry-3")
                   .assetId(assetId)
                   .propertyId(tempPropertyId)
                   .propertyValues(Arrays.asList(
                       AssetPropertyValue.builder()
                           .value(Variant.builder()
                               .doubleValue(sampleData.get("Temperature"))
                               .build())
                           .timestamp(time)
                           .build()
                   ))
                   .build(),
               PutAssetPropertyValueEntry.builder()
                   .entryId("entry-4")
                   .assetId(assetId)
```

```
                    .propertyId(humidityPropId)
                    .propertyValues(Arrays.asList(
                        AssetPropertyValue.builder()
                            .value(Variant.builder()
                                .doubleValue(sampleData.get("Humidity"))
                                .build())
                            .timestamp(time)
                            .build()
                    ))
                    .build()
            ))
            .build();

        return getAsyncClient().batchPutAssetPropertyValue(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("An exception occurred: {}",
exception.getCause().getMessage());
                }
            });
    }

    /**
     * Fetches the value of an asset property.
     *
     * @param propId  the ID of the asset property to fetch.
     * @param assetId the ID of the asset to fetch the property value for.
     * @return a {@link CompletableFuture} that represents a {@link Double} result.
The calling code can attach
     *         callbacks, then handle the result or exception by calling {@link
CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<Double> getAssetPropValueAsync(String propId, String
assetId) {
        GetAssetPropertyValueRequest assetPropertyValueRequest =
GetAssetPropertyValueRequest.builder()
```

```
                .propertyId(propId)
                .assetId(assetId)
                .build();

        return getAsyncClient().getAssetPropertyValue(assetPropertyValueRequest)
                .handle((response, exception) -> {
                    if (exception != null) {
                        logger.error("Error occurred while fetching property value:
{}.", exception.getCause().getMessage());
                        throw (CompletionException) exception;
                    }
                    return response.propertyValue().value().doubleValue();
                });
    }

    /**
     * Retrieves the property IDs associated with a specific asset model.
     *
     * @param assetModelId the ID of the asset model that defines the properties.
     * @return a {@link CompletableFuture} that represents a {@link Map} result that
associates the property name to the
     *         propert ID. The calling code can attach callbacks, then handle the
result or exception by calling
     *         {@link CompletableFuture#join()} or {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<Map<String, String>> getPropertyIds(String
assetModelId) {
        ListAssetModelPropertiesRequest modelPropertiesRequest =
ListAssetModelPropertiesRequest.builder().assetModelId(assetModelId).build();
        return getAsyncClient().listAssetModelProperties(modelPropertiesRequest)
            .handle((response, throwable) -> {
                if (response != null) {
                    return response.assetModelPropertySummaries().stream()
                        .collect(Collectors
                            .toMap(AssetModelPropertySummary::name,
AssetModelPropertySummary::id));
                } else {
```

```
                    logger.error("Error occurred while fetching property IDs: {}.",
throwable.getCause().getMessage());
                    throw (CompletionException) throwable;
                }
            });
    }

    /**
     * Deletes an asset.
     *
     * @param assetId the ID of the asset to be deleted.
     * @return a {@link CompletableFuture} that represents a {@link
DeleteAssetResponse} result. The calling code can
     *         attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<DeleteAssetResponse> deleteAssetAsync(String assetId) {
        DeleteAssetRequest deleteAssetRequest = DeleteAssetRequest.builder()
            .assetId(assetId)
            .build();

        return getAsyncClient().deleteAsset(deleteAssetRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("An error occurred deleting asset with id: {}",
assetId);
                }
            });
    }

    /**
     * Deletes an Asset Model with the specified ID.
     *
     * @param assetModelId the ID of the Asset Model to delete.
     * @return a {@link CompletableFuture} that represents a {@link
DeleteAssetModelResponse} result. The calling code
```

```
    *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<DeleteAssetModelResponse> deleteAssetModelAsync(String
assetModelId) {
       DeleteAssetModelRequest deleteAssetModelRequest =
DeleteAssetModelRequest.builder()
           .assetModelId(assetModelId)
           .build();

       return getAsyncClient().deleteAssetModel(deleteAssetModelRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   logger.error("Failed to delete asset model with ID:{}.",
exception.getMessage());
               }
           });
   }

   /**
    * Retrieves the asset model ID for the given asset model name.
    *
    * @param assetModelName the name of the asset model for the ID.
    * @return a {@link CompletableFuture} that represents a {@link String} result
of the asset model ID or null if the
    *         asset model cannot be found. The calling code can attach callbacks,
then handle the result or exception
    *         by calling {@link CompletableFuture#join()} or {@link
CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
```

```
     */
    public CompletableFuture<String> getAssetModelIdAsync(String assetModelName) {
        ListAssetModelsRequest listAssetModelsRequest =
ListAssetModelsRequest.builder().build();
        return getAsyncClient().listAssetModels(listAssetModelsRequest)
                .handle((listAssetModelsResponse, exception) -> {
                    if (exception != null) {
                        logger.error("Failed to retrieve Asset Model ID: {}",
exception.getCause().getMessage());
                        throw (CompletionException) exception;
                    }
                    for (AssetModelSummary assetModelSummary :
listAssetModelsResponse.assetModelSummaries()) {
                        if (assetModelSummary.name().equals(assetModelName)) {
                            return assetModelSummary.id();
                        }
                    }
                    return null;
                });
    }


    /**
     * Creates a new IoT Sitewise gateway.
     *
     * @param gatewayName The name of the gateway to create.
     * @param myThing     The name of the core device thing to associate with the
gateway.
     * @return a {@link CompletableFuture} that represents a {@link String} result
of the gateways ID. The calling code
     *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<String> createGatewayAsync(String gatewayName, String
myThing) {
        GreengrassV2 gg = GreengrassV2.builder()
```

```
            .coreDeviceThingName(myThing)
            .build();

        GatewayPlatform platform = GatewayPlatform.builder()
            .greengrassV2(gg)
            .build();

        Map<String, String> tag = new HashMap<>();
        tag.put("Environment", "Production");

        CreateGatewayRequest createGatewayRequest = CreateGatewayRequest.builder()
            .gatewayName(gatewayName)
            .gatewayPlatform(platform)
            .tags(tag)
            .build();

        return getAsyncClient().createGateway(createGatewayRequest)
            .handle((response, exception) -> {
                if (exception != null) {
                    logger.error("Error creating the gateway.");
                    throw (CompletionException) exception;
                }
                logger.info("The ARN of the gateway is {}" ,
response.gatewayArn());
                return response.gatewayId();
            });
    }

    /**
     * Deletes the specified gateway.
     *
     * @param gatewayId the ID of the gateway to delete.
     * @return a {@link CompletableFuture} that represents a {@link
DeleteGatewayResponse} result.. The calling code
     *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
```

```
    */
   public CompletableFuture<DeleteGatewayResponse> deleteGatewayAsync(String
gatewayId) {
       DeleteGatewayRequest deleteGatewayRequest = DeleteGatewayRequest.builder()
           .gatewayId(gatewayId)
           .build();

       return getAsyncClient().deleteGateway(deleteGatewayRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   logger.error("Failed to delete gateway: {}",
exception.getCause().getMessage());
               }
           });
   }

   /**
    * Describes the specified gateway.
    *
    * @param gatewayId the ID of the gateway to describe.
    * @return a {@link CompletableFuture} that represents a {@link
DescribeGatewayResponse} result. The calling code
    *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<DescribeGatewayResponse> describeGatewayAsync(String
gatewayId) {
       DescribeGatewayRequest request = DescribeGatewayRequest.builder()
           .gatewayId(gatewayId)
           .build();

       return getAsyncClient().describeGateway(request)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   logger.error("An error occurred during the describeGateway
method: {}", exception.getCause().getMessage());
```

```
                }
            });
    }

    private static Map<String, Double> generateSampleData() {
        Map<String, Double> data = new HashMap<>();
        data.put("Temperature", 23.5);
        data.put("Humidity", 65.0);
        return data;
    }
}
```

Acciones

`BatchPutAssetPropertyValue`

En el siguiente ejemplo de código, se muestra cómo utilizar `BatchPutAssetPropertyValue`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Sends data to the SiteWise service.
     *
     * @param assetId        the ID of the asset to which the data will be sent.
     * @param tempPropertyId the ID of the temperature property.
     * @param humidityPropId the ID of the humidity property.
     * @return a {@link CompletableFuture} that represents a {@link
 BatchPutAssetPropertyValueResponse} result. The
     *         calling code can attach callbacks, then handle the result or
 exception by calling
     *         {@link CompletableFuture#join()} or {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
 method logs the exception cause and keeps it
```

```
    *         available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<BatchPutAssetPropertyValueResponse>
sendDataToSiteWiseAsync(String assetId, String tempPropertyId, String
humidityPropId) {
       Map<String, Double> sampleData = generateSampleData();
       long timestamp = Instant.now().toEpochMilli();

       TimeInNanos time = TimeInNanos.builder()
           .timeInSeconds(timestamp / 1000)
           .offsetInNanos((int) ((timestamp % 1000) * 1000000))
           .build();

       BatchPutAssetPropertyValueRequest request =
BatchPutAssetPropertyValueRequest.builder()
           .entries(Arrays.asList(
               PutAssetPropertyValueEntry.builder()
                   .entryId("entry-3")
                   .assetId(assetId)
                   .propertyId(tempPropertyId)
                   .propertyValues(Arrays.asList(
                       AssetPropertyValue.builder()
                           .value(Variant.builder()
                               .doubleValue(sampleData.get("Temperature"))
                               .build())
                           .timestamp(time)
                           .build()
                   ))
                   .build(),
               PutAssetPropertyValueEntry.builder()
                   .entryId("entry-4")
                   .assetId(assetId)
                   .propertyId(humidityPropId)
                   .propertyValues(Arrays.asList(
                       AssetPropertyValue.builder()
                           .value(Variant.builder()
                               .doubleValue(sampleData.get("Humidity"))
                               .build())
                           .timestamp(time)
                           .build()
                   ))
```

```
                    .build()
            ))
            .build();

        return getAsyncClient().batchPutAssetPropertyValue(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("An exception occurred: {}",
exception.getCause().getMessage());
                }
            });
    }
```

- Para obtener más información sobre la API, consulta BatchPutAssetPropertyValuela Referencia AWS SDK for Java 2.x de la API.

`CreateAsset`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateAsset`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates an asset with the specified name and asset model Id.
     *
     * @param assetName    the name of the asset to create.
     * @param assetModelId the Id of the asset model to associate with the asset.
     * @return a {@link CompletableFuture} that represents a {@link
CreateAssetResponse} result. The calling code can
     *         attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
```

```
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps it
    *         available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<CreateAssetResponse> createAssetAsync(String assetName,
String assetModelId) {
       CreateAssetRequest createAssetRequest = CreateAssetRequest.builder()
           .assetModelId(assetModelId)
           .assetDescription("Created using the AWS SDK for Java")
           .assetName(assetName)
           .build();

       return getAsyncClient().createAsset(createAssetRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   logger.error("Failed to create asset: {}",
exception.getCause().getMessage());
               }
           });
   }
```

- Para obtener más información sobre la API, consulta CreateAssetla Referencia AWS SDK for Java 2.x de la API.

`CreateAssetModel`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateAssetModel`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates an asset model.
    *
    * @param name the name of the asset model to create.
    * @return a {@link CompletableFuture} that represents a {@link
CreateAssetModelResponse} result. The calling code
    *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps it
    *         available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<CreateAssetModelResponse> createAssetModelAsync(String
name) {
       PropertyType humidity = PropertyType.builder()
           .measurement(Measurement.builder().build())
           .build();

       PropertyType temperaturePropertyType = PropertyType.builder()
           .measurement(Measurement.builder().build())
           .build();

       AssetModelPropertyDefinition temperatureProperty =
AssetModelPropertyDefinition.builder()
           .name("Temperature")
           .dataType(PropertyDataType.DOUBLE)
           .type(temperaturePropertyType)
           .build();

       AssetModelPropertyDefinition humidityProperty =
AssetModelPropertyDefinition.builder()
           .name("Humidity")
           .dataType(PropertyDataType.DOUBLE)
           .type(humidity)
           .build();

       CreateAssetModelRequest createAssetModelRequest =
CreateAssetModelRequest.builder()
           .assetModelName(name)
```

```
            .assetModelDescription("This is my asset model")
            .assetModelProperties(temperatureProperty, humidityProperty)
            .build();

        return getAsyncClient().createAssetModel(createAssetModelRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("Failed to create asset model: {} ",
exception.getCause().getMessage());
                }
            });
    }
```

- Para obtener más información sobre la API, consulta CreateAssetModella Referencia AWS SDK for Java 2.x de la API.

`CreateGateway`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateGateway`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new IoT Sitewise gateway.
     *
     * @param gatewayName The name of the gateway to create.
     * @param myThing     The name of the core device thing to associate with the
gateway.
     * @return a {@link CompletableFuture} that represents a {@link String} result
of the gateways ID. The calling code
     *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
```

```
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<String> createGatewayAsync(String gatewayName, String
myThing) {
       GreengrassV2 gg = GreengrassV2.builder()
           .coreDeviceThingName(myThing)
           .build();

       GatewayPlatform platform = GatewayPlatform.builder()
           .greengrassV2(gg)
           .build();

       Map<String, String> tag = new HashMap<>();
       tag.put("Environment", "Production");

       CreateGatewayRequest createGatewayRequest = CreateGatewayRequest.builder()
           .gatewayName(gatewayName)
           .gatewayPlatform(platform)
           .tags(tag)
           .build();

       return getAsyncClient().createGateway(createGatewayRequest)
           .handle((response, exception) -> {
               if (exception != null) {
                   logger.error("Error creating the gateway.");
                   throw (CompletionException) exception;
               }
               logger.info("The ARN of the gateway is {}" ,
response.gatewayArn());
               return response.gatewayId();
           });
   }
```

- Para obtener más información sobre la API, consulta CreateGatewayla Referencia AWS SDK for Java 2.x de la API.

`DeleteAsset`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteAsset`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deletes an asset.
    *
    * @param assetId the ID of the asset to be deleted.
    * @return a {@link CompletableFuture} that represents a {@link
DeleteAssetResponse} result. The calling code can
    *         attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<DeleteAssetResponse> deleteAssetAsync(String assetId) {
       DeleteAssetRequest deleteAssetRequest = DeleteAssetRequest.builder()
           .assetId(assetId)
           .build();

       return getAsyncClient().deleteAsset(deleteAssetRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   logger.error("An error occurred deleting asset with id: {}",
assetId);
               }
           });
   }
```

- Para obtener más información sobre la API, consulta DeleteAssetla Referencia AWS SDK for Java 2.x de la API.

`DeleteAssetModel`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteAssetModel`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deletes an Asset Model with the specified ID.
    *
    * @param assetModelId the ID of the Asset Model to delete.
    * @return a {@link CompletableFuture} that represents a {@link
DeleteAssetModelResponse} result. The calling code
    *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<DeleteAssetModelResponse> deleteAssetModelAsync(String
assetModelId) {
       DeleteAssetModelRequest deleteAssetModelRequest =
DeleteAssetModelRequest.builder()
           .assetModelId(assetModelId)
           .build();
```

```
        return getAsyncClient().deleteAssetModel(deleteAssetModelRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("Failed to delete asset model with ID:{}.",
exception.getMessage());
                }
            });
    }
```

- Para obtener más información sobre la API, consulta DeleteAssetModella Referencia AWS SDK for Java 2.x de la API.

`DeleteGateway`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteGateway`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes the specified gateway.
     *
     * @param gatewayId the ID of the gateway to delete.
     * @return a {@link CompletableFuture} that represents a {@link
DeleteGatewayResponse} result.. The calling code
     *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
```

```
     */
    public CompletableFuture<DeleteGatewayResponse> deleteGatewayAsync(String
gatewayId) {
        DeleteGatewayRequest deleteGatewayRequest = DeleteGatewayRequest.builder()
            .gatewayId(gatewayId)
            .build();

        return getAsyncClient().deleteGateway(deleteGatewayRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("Failed to delete gateway: {}",
exception.getCause().getMessage());
                }
            });
    }
```

- Para obtener más información sobre la API, consulta DeleteGatewayla Referencia AWS SDK for Java 2.x de la API.

`DescribeAssetModel`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeAssetModel`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Retrieves the property IDs associated with a specific asset model.
     *
     * @param assetModelId the ID of the asset model that defines the properties.
     * @return a {@link CompletableFuture} that represents a {@link Map} result that
associates the property name to the
     *         propert ID. The calling code can attach callbacks, then handle the
result or exception by calling
     *         {@link CompletableFuture#join()} or {@link CompletableFuture#get()}.
```

```
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<Map<String, String>> getPropertyIds(String
assetModelId) {
       ListAssetModelPropertiesRequest modelPropertiesRequest =
ListAssetModelPropertiesRequest.builder().assetModelId(assetModelId).build();
       return getAsyncClient().listAssetModelProperties(modelPropertiesRequest)
           .handle((response, throwable) -> {
               if (response != null) {
                   return response.assetModelPropertySummaries().stream()
                       .collect(Collectors
                           .toMap(AssetModelPropertySummary::name,
AssetModelPropertySummary::id));
               } else {
                   logger.error("Error occurred while fetching property IDs: {}.",
throwable.getCause().getMessage());
                   throw (CompletionException) throwable;
               }
           });
   }
```

- Para obtener más información sobre la API, consulta DescribeAssetModella Referencia AWS SDK for Java 2.x de la API.

`DescribeGateway`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeGateway`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Describes the specified gateway.
    *
    * @param gatewayId the ID of the gateway to describe.
    * @return a {@link CompletableFuture} that represents a {@link
DescribeGatewayResponse} result. The calling code
    *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<DescribeGatewayResponse> describeGatewayAsync(String
gatewayId) {
       DescribeGatewayRequest request = DescribeGatewayRequest.builder()
           .gatewayId(gatewayId)
           .build();

       return getAsyncClient().describeGateway(request)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   logger.error("An error occurred during the describeGateway
method: {}", exception.getCause().getMessage());
               }
           });
   }
```

- Para obtener más información sobre la API, consulta DescribeGatewayla Referencia AWS SDK for Java 2.x de la API.

`GetAssetPropertyValue`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetAssetPropertyValue`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Fetches the value of an asset property.
    *
    * @param propId  the ID of the asset property to fetch.
    * @param assetId the ID of the asset to fetch the property value for.
    * @return a {@link CompletableFuture} that represents a {@link Double} result.
The calling code can attach
    *         callbacks, then handle the result or exception by calling {@link
CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<Double> getAssetPropValueAsync(String propId, String
assetId) {
       GetAssetPropertyValueRequest assetPropertyValueRequest =
GetAssetPropertyValueRequest.builder()
               .propertyId(propId)
               .assetId(assetId)
               .build();

       return getAsyncClient().getAssetPropertyValue(assetPropertyValueRequest)
               .handle((response, exception) -> {
                   if (exception != null) {
                       logger.error("Error occurred while fetching property value:
{}.", exception.getCause().getMessage());
                       throw (CompletionException) exception;
                   }
                   return response.propertyValue().value().doubleValue();
```

```
                });
    }
```

- Para obtener más información sobre la API, consulta GetAssetPropertyValuela Referencia AWS SDK for Java 2.x de la API.

`ListAssetModels`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListAssetModels`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Retrieves the asset model ID for the given asset model name.
     *
     * @param assetModelName the name of the asset model for the ID.
     * @return a {@link CompletableFuture} that represents a {@link String} result
of the asset model ID or null if the
     *         asset model cannot be found. The calling code can attach callbacks,
then handle the result or exception
     *         by calling {@link CompletableFuture#join()} or {@link
CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<String> getAssetModelIdAsync(String assetModelName) {
        ListAssetModelsRequest listAssetModelsRequest =
ListAssetModelsRequest.builder().build();
        return getAsyncClient().listAssetModels(listAssetModelsRequest)
```

```
                .handle((listAssetModelsResponse, exception) -> {
                    if (exception != null) {
                        logger.error("Failed to retrieve Asset Model ID: {}",
exception.getCause().getMessage());
                        throw (CompletionException) exception;
                    }
                    for (AssetModelSummary assetModelSummary :
listAssetModelsResponse.assetModelSummaries()) {
                        if (assetModelSummary.name().equals(assetModelName)) {
                            return assetModelSummary.id();
                        }
                    }
                    return null;
                });
    }
```

- Para obtener más información sobre la API, consulta ListAssetModelsla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon Keyspaces usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Amazon Keyspaces.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Introducción a Amazon Keyspaces

El siguiente ejemplo de código muestra cómo empezar a utilizar Amazon Keyspaces.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.keyspaces.KeyspacesClient;
import software.amazon.awssdk.services.keyspaces.model.KeyspaceSummary;
import software.amazon.awssdk.services.keyspaces.model.KeyspacesException;
import software.amazon.awssdk.services.keyspaces.model.ListKeyspacesRequest;
import software.amazon.awssdk.services.keyspaces.model.ListKeyspacesResponse;
import java.util.List;

/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloKeyspaces {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        KeyspacesClient keyClient = KeyspacesClient.builder()
                .region(region)
                .build();

        listKeyspaces(keyClient);
    }

    public static void listKeyspaces(KeyspacesClient keyClient) {
        try {
```

```
            ListKeyspacesRequest keyspacesRequest = ListKeyspacesRequest.builder()
                    .maxResults(10)
                    .build();

            ListKeyspacesResponse response =
 keyClient.listKeyspaces(keyspacesRequest);
            List<KeyspaceSummary> keyspaces = response.keyspaces();
            for (KeyspaceSummary keyspace : keyspaces) {
                System.out.println("The name of the keyspace is " +
 keyspace.keyspaceName());
            }

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListKeyspacesla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crear un espacio de claves y una tabla. El esquema de la tabla contiene los datos de las películas y tiene habilitada point-in-time la recuperación.
- Conectarse al espacio de claves mediante una conexión TLS segura con autenticación SigV4.
- Consultar la tabla. Agregar, recuperar y actualizar datos de películas.
- Actualizar la tabla. Añadir una columna para llevar un seguimiento de las películas vistas.
- Restaurar la tabla a su estado anterior y limpiar los recursos.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * Before running this Java code example, you must create a
 * Java keystore (JKS) file and place it in your project's resources folder.
 *
 * This file is a secure file format used to hold certificate information for
 * Java applications. This is required to make a connection to Amazon Keyspaces.
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/keyspaces/latest/devguide/using_java_driver.html
 *
 * This Java example performs the following tasks:
 *
 * 1. Create a keyspace.
 * 2. Check for keyspace existence.
 * 3. List keyspaces using a paginator.
 * 4. Create a table with a simple movie data schema and enable point-in-time
 * recovery.
 * 5. Check for the table to be in an Active state.
 * 6. List all tables in the keyspace.
 * 7. Use a Cassandra driver to insert some records into the Movie table.
 * 8. Get all records from the Movie table.
 * 9. Get a specific Movie.
 * 10. Get a UTC timestamp for the current time.
 * 11. Update the table schema to add a ‘watched’ Boolean column.
 * 12. Update an item as watched.
 * 13. Query for items with watched = True.
 * 14. Restore the table back to the previous state using the timestamp.
```

```
 * 15. Check for completion of the restore action.
 * 16. Delete the table.
 * 17. Confirm that both tables are deleted.
 * 18. Delete the keyspace.
 */

public class ScenarioKeyspaces {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    /*
     * Usage:
     * fileName - The name of the JSON file that contains movie data. (Get this file
     * from the GitHub repo at resources/sample_file.)
     * keyspaceName - The name of the keyspace to create.
     */
    public static void main(String[] args) throws InterruptedException, IOException
 {
        String fileName = "<Replace with the JSON file that contains movie data>";
        String keyspaceName = "<Replace with the name of the keyspace to create>";
        String titleUpdate = "The Family";
        int yearUpdate = 2013;
        String tableName = "Movie";
        String tableNameRestore = "MovieRestore";
        Region region = Region.US_EAST_1;
        KeyspacesClient keyClient = KeyspacesClient.builder()
                .region(region)
                .build();

        DriverConfigLoader loader =
 DriverConfigLoader.fromClasspath("application.conf");
        CqlSession session = CqlSession.builder()
                .withConfigLoader(loader)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon Keyspaces example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Create a keyspace.");
        createKeySpace(keyClient, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        Thread.sleep(5000);
        System.out.println("2. Check for keyspace existence.");
        checkKeyspaceExistence(keyClient, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. List keyspaces using a paginator.");
        listKeyspacesPaginator(keyClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Create a table with a simple movie data schema and
enable point-in-time recovery.");
        createTable(keyClient, keyspaceName, tableName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Check for the table to be in an Active state.");
        Thread.sleep(6000);
        checkTable(keyClient, keyspaceName, tableName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. List all tables in the keyspace.");
        listTables(keyClient, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Use a Cassandra driver to insert some records into
the Movie table.");
        Thread.sleep(6000);
        loadData(session, fileName, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Get all records from the Movie table.");
        getMovieData(session, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Get a specific Movie.");
        getSpecificMovie(session, keyspaceName);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("10. Get a UTC timestamp for the current time.");
        ZonedDateTime utc = ZonedDateTime.now(ZoneOffset.UTC);
        System.out.println("DATETIME = " + Date.from(utc.toInstant()));
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Update the table schema to add a watched Boolean
column.");
        updateTable(keyClient, keyspaceName, tableName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Update an item as watched.");
        Thread.sleep(10000); // Wait 10 secs for the update.
        updateRecord(session, keyspaceName, titleUpdate, yearUpdate);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("13. Query for items with watched = True.");
        getWatchedData(session, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("14. Restore the table back to the previous state using
the timestamp.");
        System.out.println("Note that the restore operation can take up to 20
minutes.");
        restoreTable(keyClient, keyspaceName, utc);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("15. Check for completion of the restore action.");
        Thread.sleep(5000);
        checkRestoredTable(keyClient, keyspaceName, "MovieRestore");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("16. Delete both tables.");
        deleteTable(keyClient, keyspaceName, tableName);
        deleteTable(keyClient, keyspaceName, tableNameRestore);
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("17. Confirm that both tables are deleted.");
        checkTableDelete(keyClient, keyspaceName, tableName);
        checkTableDelete(keyClient, keyspaceName, tableNameRestore);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("18. Delete the keyspace.");
        deleteKeyspace(keyClient, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The scenario has completed successfully.");
        System.out.println(DASHES);
    }

    public static void deleteKeyspace(KeyspacesClient keyClient, String
keyspaceName) {
        try {
            DeleteKeyspaceRequest deleteKeyspaceRequest =
DeleteKeyspaceRequest.builder()
                    .keyspaceName(keyspaceName)
                    .build();

            keyClient.deleteKeyspace(deleteKeyspaceRequest);

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void checkTableDelete(KeyspacesClient keyClient, String
keyspaceName, String tableName)
            throws InterruptedException {
        try {
            String status;
            GetTableResponse response;
            GetTableRequest tableRequest = GetTableRequest.builder()
                    .keyspaceName(keyspaceName)
                    .tableName(tableName)
                    .build();

            // Keep looping until table cannot be found and a
ResourceNotFoundException is
```

```
            // thrown.
            while (true) {
                response = keyClient.getTable(tableRequest);
                status = response.statusAsString();
                System.out.println(". The table status is " + status);
                Thread.sleep(500);
            }

        } catch (ResourceNotFoundException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println("The table is deleted");
    }

    public static void deleteTable(KeyspacesClient keyClient, String keyspaceName,
String tableName) {
        try {
            DeleteTableRequest tableRequest = DeleteTableRequest.builder()
                    .keyspaceName(keyspaceName)
                    .tableName(tableName)
                    .build();

            keyClient.deleteTable(tableRequest);

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void checkRestoredTable(KeyspacesClient keyClient, String
keyspaceName, String tableName)
            throws InterruptedException {
        try {
            boolean tableStatus = false;
            String status;
            GetTableResponse response = null;
            GetTableRequest tableRequest = GetTableRequest.builder()
                    .keyspaceName(keyspaceName)
                    .tableName(tableName)
                    .build();

            while (!tableStatus) {
                response = keyClient.getTable(tableRequest);
```

```
                status = response.statusAsString();
                System.out.println("The table status is " + status);

                if (status.compareTo("ACTIVE") == 0) {
                    tableStatus = true;
                }
                Thread.sleep(500);
            }

            List<ColumnDefinition> cols = response.schemaDefinition().allColumns();
            for (ColumnDefinition def : cols) {
                System.out.println("The column name is " + def.name());
                System.out.println("The column type is " + def.type());
            }

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void restoreTable(KeyspacesClient keyClient, String keyspaceName,
ZonedDateTime utc) {
        try {
            Instant myTime = utc.toInstant();
            RestoreTableRequest restoreTableRequest = RestoreTableRequest.builder()
                    .restoreTimestamp(myTime)
                    .sourceTableName("Movie")
                    .targetKeyspaceName(keyspaceName)
                    .targetTableName("MovieRestore")
                    .sourceKeyspaceName(keyspaceName)
                    .build();

            RestoreTableResponse response =
keyClient.restoreTable(restoreTableRequest);
            System.out.println("The ARN of the restored table is " +
response.restoredTableARN());

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

```
   public static void getWatchedData(CqlSession session, String keyspaceName) {
       ResultSet resultSet = session
               .execute("SELECT * FROM \"" + keyspaceName + "\".\"Movie\" WHERE
watched = true ALLOW FILTERING;");
       resultSet.forEach(item -> {
           System.out.println("The Movie title is " + item.getString("title"));
           System.out.println("The Movie year is " + item.getInt("year"));
           System.out.println("The plot is " + item.getString("plot"));
       });
   }

   public static void updateRecord(CqlSession session, String keySpace, String
titleUpdate, int yearUpdate) {
       String sqlStatement = "UPDATE \"" + keySpace
               + "\".\"Movie\" SET watched=true WHERE title = :k0 AND year = :k1;";
       BatchStatementBuilder builder =
BatchStatement.builder(DefaultBatchType.UNLOGGED);
       builder.setConsistencyLevel(ConsistencyLevel.LOCAL_QUORUM);
       PreparedStatement preparedStatement = session.prepare(sqlStatement);
       builder.addStatement(preparedStatement.boundStatementBuilder()
               .setString("k0", titleUpdate)
               .setInt("k1", yearUpdate)
               .build());

       BatchStatement batchStatement = builder.build();
       session.execute(batchStatement);
   }

   public static void updateTable(KeyspacesClient keyClient, String keySpace,
String tableName) {
       try {
           ColumnDefinition def = ColumnDefinition.builder()
                   .name("watched")
                   .type("boolean")
                   .build();

           UpdateTableRequest tableRequest = UpdateTableRequest.builder()
                   .keyspaceName(keySpace)
                   .tableName(tableName)
                   .addColumns(def)
                   .build();

           keyClient.updateTable(tableRequest);
```

```
        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void getSpecificMovie(CqlSession session, String keyspaceName) {
        ResultSet resultSet = session.execute(
                "SELECT * FROM \"" + keyspaceName + "\".\"Movie\" WHERE title = 'The
Family' ALLOW FILTERING ;");
        resultSet.forEach(item -> {
            System.out.println("The Movie title is " + item.getString("title"));
            System.out.println("The Movie year is " + item.getInt("year"));
            System.out.println("The plot is " + item.getString("plot"));
        });
    }

    // Get records from the Movie table.
    public static void getMovieData(CqlSession session, String keyspaceName) {
        ResultSet resultSet = session.execute("SELECT * FROM \"" + keyspaceName +
"\".\"Movie\";");
        resultSet.forEach(item -> {
            System.out.println("The Movie title is " + item.getString("title"));
            System.out.println("The Movie year is " + item.getInt("year"));
            System.out.println("The plot is " + item.getString("plot"));
        });
    }

    // Load data into the table.
    public static void loadData(CqlSession session, String fileName, String
keySpace) throws IOException {
        String sqlStatement = "INSERT INTO \"" + keySpace + "\".\"Movie\" (title,
year, plot) values (:k0, :k1, :k2)";
        JsonParser parser = new JsonFactory().createParser(new File(fileName));
        com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
        Iterator<JsonNode> iter = rootNode.iterator();
        ObjectNode currentNode;
        int t = 0;
        while (iter.hasNext()) {

            // Add 20 movies to the table.
            if (t == 20)
                break;
```

```
            currentNode = (ObjectNode) iter.next();

            int year = currentNode.path("year").asInt();
            String title = currentNode.path("title").asText();
            String plot = currentNode.path("info").path("plot").toString();

            // Insert the data into the Amazon Keyspaces table.
            BatchStatementBuilder builder =
BatchStatement.builder(DefaultBatchType.UNLOGGED);
            builder.setConsistencyLevel(ConsistencyLevel.LOCAL_QUORUM);
            PreparedStatement preparedStatement = session.prepare(sqlStatement);
            builder.addStatement(preparedStatement.boundStatementBuilder()
                    .setString("k0", title)
                    .setInt("k1", year)
                    .setString("k2", plot)
                    .build());

            BatchStatement batchStatement = builder.build();
            session.execute(batchStatement);
            t++;
        }

        System.out.println("You have added " + t + " records successfully!");
    }

    public static void listTables(KeyspacesClient keyClient, String keyspaceName) {
        try {
            ListTablesRequest tablesRequest = ListTablesRequest.builder()
                    .keyspaceName(keyspaceName)
                    .build();

            ListTablesIterable listRes =
keyClient.listTablesPaginator(tablesRequest);
            listRes.stream()
                    .flatMap(r -> r.tables().stream())
                    .forEach(content -> System.out.println(" ARN: " +
content.resourceArn() +
                            " Table name: " + content.tableName()));

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

```
   public static void checkTable(KeyspacesClient keyClient, String keyspaceName,
String tableName)
           throws InterruptedException {
       try {
           boolean tableStatus = false;
           String status;
           GetTableResponse response = null;
           GetTableRequest tableRequest = GetTableRequest.builder()
                   .keyspaceName(keyspaceName)
                   .tableName(tableName)
                   .build();

           while (!tableStatus) {
               response = keyClient.getTable(tableRequest);
               status = response.statusAsString();
               System.out.println(". The table status is " + status);

               if (status.compareTo("ACTIVE") == 0) {
                   tableStatus = true;
               }
               Thread.sleep(500);
           }

           List<ColumnDefinition> cols = response.schemaDefinition().allColumns();
           for (ColumnDefinition def : cols) {
               System.out.println("The column name is " + def.name());
               System.out.println("The column type is " + def.type());
           }

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }

   public static void createTable(KeyspacesClient keyClient, String keySpace,
String tableName) {
       try {
           // Set the columns.
           ColumnDefinition defTitle = ColumnDefinition.builder()
                   .name("title")
                   .type("text")
                   .build();
```

```
        ColumnDefinition defYear = ColumnDefinition.builder()
                .name("year")
                .type("int")
                .build();

        ColumnDefinition defReleaseDate = ColumnDefinition.builder()
                .name("release_date")
                .type("timestamp")
                .build();

        ColumnDefinition defPlot = ColumnDefinition.builder()
                .name("plot")
                .type("text")
                .build();

        List<ColumnDefinition> colList = new ArrayList<>();
        colList.add(defTitle);
        colList.add(defYear);
        colList.add(defReleaseDate);
        colList.add(defPlot);

        // Set the keys.
        PartitionKey yearKey = PartitionKey.builder()
                .name("year")
                .build();

        PartitionKey titleKey = PartitionKey.builder()
                .name("title")
                .build();

        List<PartitionKey> keyList = new ArrayList<>();
        keyList.add(yearKey);
        keyList.add(titleKey);

        SchemaDefinition schemaDefinition = SchemaDefinition.builder()
                .partitionKeys(keyList)
                .allColumns(colList)
                .build();

        PointInTimeRecovery timeRecovery = PointInTimeRecovery.builder()
                .status(PointInTimeRecoveryStatus.ENABLED)
                .build();
```

```
            CreateTableRequest tableRequest = CreateTableRequest.builder()
                    .keyspaceName(keySpace)
                    .tableName(tableName)
                    .schemaDefinition(schemaDefinition)
                    .pointInTimeRecovery(timeRecovery)
                    .build();

            CreateTableResponse response = keyClient.createTable(tableRequest);
            System.out.println("The table ARN is " + response.resourceArn());

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void listKeyspacesPaginator(KeyspacesClient keyClient) {
        try {
            ListKeyspacesRequest keyspacesRequest = ListKeyspacesRequest.builder()
                    .maxResults(10)
                    .build();

            ListKeyspacesIterable listRes =
keyClient.listKeyspacesPaginator(keyspacesRequest);
            listRes.stream()
                    .flatMap(r -> r.keyspaces().stream())
                    .forEach(content -> System.out.println(" Name: " +
content.keyspaceName()));

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void checkKeyspaceExistence(KeyspacesClient keyClient, String
keyspaceName) {
        try {
            GetKeyspaceRequest keyspaceRequest = GetKeyspaceRequest.builder()
                    .keyspaceName(keyspaceName)
                    .build();

            GetKeyspaceResponse response = keyClient.getKeyspace(keyspaceRequest);
            String name = response.keyspaceName();
```

```
            System.out.println("The " + name + " KeySpace is ready");

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void createKeySpace(KeyspacesClient keyClient, String
 keyspaceName) {
        try {
            CreateKeyspaceRequest keyspaceRequest = CreateKeyspaceRequest.builder()
                    .keyspaceName(keyspaceName)
                    .build();

            CreateKeyspaceResponse response =
 keyClient.createKeyspace(keyspaceRequest);
            System.out.println("The ARN of the KeySpace is " +
 response.resourceArn());

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateKeyspace
  - CreateTable
  - DeleteKeyspace
  - DeleteTable
  - GetKeyspace
  - GetTable
  - ListKeyspaces
  - ListTables
  - RestoreTable

- UpdateTable

Acciones

`CreateKeyspace`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateKeyspace`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void createKeySpace(KeyspacesClient keyClient, String
keyspaceName) {
       try {
           CreateKeyspaceRequest keyspaceRequest = CreateKeyspaceRequest.builder()
                   .keyspaceName(keyspaceName)
                   .build();

           CreateKeyspaceResponse response =
keyClient.createKeyspace(keyspaceRequest);
           System.out.println("The ARN of the KeySpace is " +
response.resourceArn());

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta CreateKeyspacela Referencia AWS SDK for Java 2.x de la API.

`CreateTable`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateTable`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void createTable(KeyspacesClient keyClient, String keySpace,
String tableName) {
       try {
           // Set the columns.
           ColumnDefinition defTitle = ColumnDefinition.builder()
                   .name("title")
                   .type("text")
                   .build();

           ColumnDefinition defYear = ColumnDefinition.builder()
                   .name("year")
                   .type("int")
                   .build();

           ColumnDefinition defReleaseDate = ColumnDefinition.builder()
                   .name("release_date")
                   .type("timestamp")
                   .build();

           ColumnDefinition defPlot = ColumnDefinition.builder()
                   .name("plot")
                   .type("text")
                   .build();

           List<ColumnDefinition> colList = new ArrayList<>();
           colList.add(defTitle);
           colList.add(defYear);
           colList.add(defReleaseDate);
           colList.add(defPlot);

           // Set the keys.
```

```
            PartitionKey yearKey = PartitionKey.builder()
                    .name("year")
                    .build();

            PartitionKey titleKey = PartitionKey.builder()
                    .name("title")
                    .build();

            List<PartitionKey> keyList = new ArrayList<>();
            keyList.add(yearKey);
            keyList.add(titleKey);

            SchemaDefinition schemaDefinition = SchemaDefinition.builder()
                    .partitionKeys(keyList)
                    .allColumns(colList)
                    .build();

            PointInTimeRecovery timeRecovery = PointInTimeRecovery.builder()
                    .status(PointInTimeRecoveryStatus.ENABLED)
                    .build();

            CreateTableRequest tableRequest = CreateTableRequest.builder()
                    .keyspaceName(keySpace)
                    .tableName(tableName)
                    .schemaDefinition(schemaDefinition)
                    .pointInTimeRecovery(timeRecovery)
                    .build();

            CreateTableResponse response = keyClient.createTable(tableRequest);
            System.out.println("The table ARN is " + response.resourceArn());

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta CreateTablela Referencia AWS SDK for Java 2.x de la API.

`DeleteKeyspace`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteKeyspace`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void deleteKeyspace(KeyspacesClient keyClient, String
keyspaceName) {
       try {
           DeleteKeyspaceRequest deleteKeyspaceRequest =
DeleteKeyspaceRequest.builder()
                   .keyspaceName(keyspaceName)
                   .build();

           keyClient.deleteKeyspace(deleteKeyspaceRequest);

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta DeleteKeyspacela Referencia AWS SDK for Java 2.x de la API.

`DeleteTable`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteTable`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void deleteTable(KeyspacesClient keyClient, String keyspaceName,
String tableName) {
       try {
           DeleteTableRequest tableRequest = DeleteTableRequest.builder()
                   .keyspaceName(keyspaceName)
                   .tableName(tableName)
                   .build();

           keyClient.deleteTable(tableRequest);

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta DeleteTablela Referencia AWS SDK for Java 2.x de la API.

`GetKeyspace`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetKeyspace`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void checkKeyspaceExistence(KeyspacesClient keyClient, String
keyspaceName) {
       try {
           GetKeyspaceRequest keyspaceRequest = GetKeyspaceRequest.builder()
                   .keyspaceName(keyspaceName)
                   .build();

           GetKeyspaceResponse response = keyClient.getKeyspace(keyspaceRequest);
           String name = response.keyspaceName();
           System.out.println("The " + name + " KeySpace is ready");

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta GetKeyspacela Referencia AWS SDK for Java 2.x de la API.

`GetTable`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetTable`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void checkTable(KeyspacesClient keyClient, String keyspaceName,
String tableName)
           throws InterruptedException {
       try {
           boolean tableStatus = false;
           String status;
           GetTableResponse response = null;
           GetTableRequest tableRequest = GetTableRequest.builder()
```

```
                .keyspaceName(keyspaceName)
                .tableName(tableName)
                .build();

        while (!tableStatus) {
            response = keyClient.getTable(tableRequest);
            status = response.statusAsString();
            System.out.println(". The table status is " + status);

            if (status.compareTo("ACTIVE") == 0) {
                tableStatus = true;
            }
            Thread.sleep(500);
        }

        List<ColumnDefinition> cols = response.schemaDefinition().allColumns();
        for (ColumnDefinition def : cols) {
            System.out.println("The column name is " + def.name());
            System.out.println("The column type is " + def.type());
        }

    } catch (KeyspacesException e) {
        System.err.println(e.awsErrorDetails().errorMessage());
        System.exit(1);
    }
}
```

- Para obtener más información sobre la API, consulta GetTablela Referencia AWS SDK for Java 2.x de la API.

`ListKeyspaces`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListKeyspaces`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void listKeyspacesPaginator(KeyspacesClient keyClient) {
        try {
            ListKeyspacesRequest keyspacesRequest = ListKeyspacesRequest.builder()
                    .maxResults(10)
                    .build();

            ListKeyspacesIterable listRes =
keyClient.listKeyspacesPaginator(keyspacesRequest);
            listRes.stream()
                    .flatMap(r -> r.keyspaces().stream())
                    .forEach(content -> System.out.println(" Name: " +
content.keyspaceName()));

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta ListKeyspacesla Referencia AWS SDK for Java 2.x de la API.

`ListTables`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListTables`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void listTables(KeyspacesClient keyClient, String keyspaceName) {
        try {
            ListTablesRequest tablesRequest = ListTablesRequest.builder()
                    .keyspaceName(keyspaceName)
                    .build();
```

```
            ListTablesIterable listRes =
keyClient.listTablesPaginator(tablesRequest);
            listRes.stream()
                    .flatMap(r -> r.tables().stream())
                    .forEach(content -> System.out.println(" ARN: " +
content.resourceArn() +
                            " Table name: " + content.tableName()));

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta ListTablesla Referencia AWS SDK for Java 2.x de la API.

`RestoreTable`

En el siguiente ejemplo de código, se muestra cómo utilizar `RestoreTable`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void restoreTable(KeyspacesClient keyClient, String keyspaceName,
ZonedDateTime utc) {
        try {
            Instant myTime = utc.toInstant();
            RestoreTableRequest restoreTableRequest = RestoreTableRequest.builder()
                    .restoreTimestamp(myTime)
                    .sourceTableName("Movie")
                    .targetKeyspaceName(keyspaceName)
                    .targetTableName("MovieRestore")
                    .sourceKeyspaceName(keyspaceName)
                    .build();
```

```
            RestoreTableResponse response =
keyClient.restoreTable(restoreTableRequest);
            System.out.println("The ARN of the restored table is " +
response.restoredTableARN());

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta RestoreTablela Referencia AWS SDK for Java 2.x de la API.

`UpdateTable`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateTable`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void updateTable(KeyspacesClient keyClient, String keySpace,
String tableName) {
        try {
            ColumnDefinition def = ColumnDefinition.builder()
                    .name("watched")
                    .type("boolean")
                    .build();

            UpdateTableRequest tableRequest = UpdateTableRequest.builder()
                    .keyspaceName(keySpace)
                    .tableName(tableName)
                    .addColumns(def)
                    .build();
```

```
            keyClient.updateTable(tableRequest);

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta UpdateTablela Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Kinesis que utilizan SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el AWS SDK for Java 2.x uso de Kinesis.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Ejemplos de tecnología sin servidor

Acciones

`CreateStream`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateStream`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisClient;
import software.amazon.awssdk.services.kinesis.model.CreateStreamRequest;
import software.amazon.awssdk.services.kinesis.model.KinesisException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateDataStream {
    public static void main(String[] args) {

        final String usage = """

                Usage:
                    <streamName>

                Where:
                    streamName - The Amazon Kinesis data stream (for example,
 StockTradeStream).
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String streamName = args[0];
        Region region = Region.US_EAST_1;
        KinesisClient kinesisClient = KinesisClient.builder()
```

```
                .region(region)
                .build();
        createStream(kinesisClient, streamName);
        System.out.println("Done");
        kinesisClient.close();
    }

    public static void createStream(KinesisClient kinesisClient, String streamName)
 {
        try {
            CreateStreamRequest streamReq = CreateStreamRequest.builder()
                    .streamName(streamName)
                    .shardCount(1)
                    .build();

            kinesisClient.createStream(streamReq);

        } catch (KinesisException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta CreateStreamla Referencia AWS SDK for Java 2.x de la API.

`DeleteStream`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteStream`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.kinesis.KinesisClient;
import software.amazon.awssdk.services.kinesis.model.DeleteStreamRequest;
import software.amazon.awssdk.services.kinesis.model.KinesisException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteDataStream {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <streamName>

                Where:
                    streamName - The Amazon Kinesis data stream (for example,
 StockTradeStream)
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String streamName = args[0];
        Region region = Region.US_EAST_1;
        KinesisClient kinesisClient = KinesisClient.builder()
                .region(region)
                .build();

        deleteStream(kinesisClient, streamName);
        kinesisClient.close();
        System.out.println("Done");
    }

    public static void deleteStream(KinesisClient kinesisClient, String streamName)
 {
        try {
```

```
            DeleteStreamRequest delStream = DeleteStreamRequest.builder()
                    .streamName(streamName)
                    .build();

            kinesisClient.deleteStream(delStream);

        } catch (KinesisException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteStreamla Referencia AWS SDK for Java 2.x de la API.

`GetRecords`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetRecords`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisClient;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamResponse;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamRequest;
import software.amazon.awssdk.services.kinesis.model.Shard;
import software.amazon.awssdk.services.kinesis.model.GetShardIteratorRequest;
import software.amazon.awssdk.services.kinesis.model.GetShardIteratorResponse;
import software.amazon.awssdk.services.kinesis.model.Record;
import software.amazon.awssdk.services.kinesis.model.GetRecordsRequest;
import software.amazon.awssdk.services.kinesis.model.GetRecordsResponse;
import java.util.ArrayList;
```

```
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetRecords {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <streamName>

                Where:
                    streamName - The Amazon Kinesis data stream to read from (for
 example, StockTradeStream).
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String streamName = args[0];
        Region region = Region.US_EAST_1;
        KinesisClient kinesisClient = KinesisClient.builder()
                .region(region)
                .build();

        getStockTrades(kinesisClient, streamName);
        kinesisClient.close();
    }

    public static void getStockTrades(KinesisClient kinesisClient, String
 streamName) {
        String shardIterator;
        String lastShardId = null;
        DescribeStreamRequest describeStreamRequest =
 DescribeStreamRequest.builder()
                .streamName(streamName)
```

```
                .build();

        List<Shard> shards = new ArrayList<>();
        DescribeStreamResponse streamRes;
        do {
            streamRes = kinesisClient.describeStream(describeStreamRequest);
            shards.addAll(streamRes.streamDescription().shards());

            if (shards.size() > 0) {
                lastShardId = shards.get(shards.size() - 1).shardId();
            }
        } while (streamRes.streamDescription().hasMoreShards());

        GetShardIteratorRequest itReq = GetShardIteratorRequest.builder()
                .streamName(streamName)
                .shardIteratorType("TRIM_HORIZON")
                .shardId(lastShardId)
                .build();

        GetShardIteratorResponse shardIteratorResult =
kinesisClient.getShardIterator(itReq);
        shardIterator = shardIteratorResult.shardIterator();

        // Continuously read data records from shard.
        List<Record> records;

        // Create new GetRecordsRequest with existing shardIterator.
        // Set maximum records to return to 1000.
        GetRecordsRequest recordsRequest = GetRecordsRequest.builder()
                .shardIterator(shardIterator)
                .limit(1000)
                .build();

        GetRecordsResponse result = kinesisClient.getRecords(recordsRequest);

        // Put result into record list. Result may be empty.
        records = result.records();

        // Print records
        for (Record record : records) {
            SdkBytes byteBuffer = record.data();
            System.out.printf("Seq No: %s - %s%n", record.sequenceNumber(), new
String(byteBuffer.asByteArray()));
        }
```

```
    }
}
```

- Para obtener más información sobre la API, consulta GetRecordsla Referencia AWS SDK for Java 2.x de la API.

`PutRecord`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutRecord`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisClient;
import software.amazon.awssdk.services.kinesis.model.PutRecordRequest;
import software.amazon.awssdk.services.kinesis.model.KinesisException;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamRequest;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class StockTradesWriter {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <streamName>
```

```
                Where:
                    streamName - The Amazon Kinesis data stream to which records are
written (for example, StockTradeStream)
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String streamName = args[0];
        Region region = Region.US_EAST_1;
        KinesisClient kinesisClient = KinesisClient.builder()
                .region(region)
                .build();

        // Ensure that the Kinesis Stream is valid.
        validateStream(kinesisClient, streamName);
        setStockData(kinesisClient, streamName);
        kinesisClient.close();
    }

    public static void setStockData(KinesisClient kinesisClient, String streamName)
{
        try {
            // Repeatedly send stock trades with a 100 milliseconds wait in between.
            StockTradeGenerator stockTradeGenerator = new StockTradeGenerator();

            // Put in 50 Records for this example.
            int index = 50;
            for (int x = 0; x < index; x++) {
                StockTrade trade = stockTradeGenerator.getRandomTrade();
                sendStockTrade(trade, kinesisClient, streamName);
                Thread.sleep(100);
            }

        } catch (KinesisException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }
```

```
   private static void sendStockTrade(StockTrade trade, KinesisClient
 kinesisClient,
           String streamName) {
       byte[] bytes = trade.toJsonAsBytes();

       // The bytes could be null if there is an issue with the JSON serialization
 by
       // the Jackson JSON library.
       if (bytes == null) {
           System.out.println("Could not get JSON bytes for stock trade");
           return;
       }

       System.out.println("Putting trade: " + trade);
       PutRecordRequest request = PutRecordRequest.builder()
               .partitionKey(trade.getTickerSymbol()) // We use the ticker symbol
 as the partition key, explained in
                                                      // the Supplemental
 Information section below.
               .streamName(streamName)
               .data(SdkBytes.fromByteArray(bytes))
               .build();

       try {
           kinesisClient.putRecord(request);
       } catch (KinesisException e) {
           System.err.println(e.getMessage());
       }
   }

   private static void validateStream(KinesisClient kinesisClient, String
 streamName) {
       try {
           DescribeStreamRequest describeStreamRequest =
 DescribeStreamRequest.builder()
                   .streamName(streamName)
                   .build();

           DescribeStreamResponse describeStreamResponse =
 kinesisClient.describeStream(describeStreamRequest);

           if (!
describeStreamResponse.streamDescription().streamStatus().toString().equals("ACTIVE"))
 {
```

```
                System.err.println("Stream " + streamName + " is not active. Please
 wait a few moments and try again.");
                System.exit(1);
            }

        } catch (KinesisException e) {
            System.err.println("Error found while describing the stream " +
 streamName);
            System.err.println(e);
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta PutRecordla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de tecnología sin servidor

Invocar una función de Lambda desde un desencadenador de Kinesis

En el siguiente ejemplo de código se muestra cómo implementar una función de Lambda que recibe un evento activado al recibir registros de un flujo de Kinesis. La función recupera la carga útil de Kinesis, la decodifica desde Base64 y registra el contenido del registro.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Uso de un evento de Kinesis con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package example;
```

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.LambdaLogger;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.KinesisEvent;

public class Handler implements RequestHandler<KinesisEvent, Void> {
    @Override
    public Void handleRequest(final KinesisEvent event, final Context context) {
        LambdaLogger logger = context.getLogger();
        if (event.getRecords().isEmpty()) {
            logger.log("Empty Kinesis Event received");
            return null;
        }
        for (KinesisEvent.KinesisEventRecord record : event.getRecords()) {
            try {
                logger.log("Processed Event with EventId: "+record.getEventID());
                String data = new String(record.getKinesis().getData().array());
                logger.log("Data:"+ data);
                // TODO: Do interesting work based on the new data
            }
            catch (Exception ex) {
                logger.log("An error occurred:"+ex.getMessage());
                throw ex;
            }
        }
        logger.log("Successfully processed:"+event.getRecords().size()+" records");
        return null;
    }

}
```

Notificación de los errores de los elementos del lote de las funciones de Lambda mediante un desencadenador de Kinesis

En el siguiente ejemplo de código se muestra cómo implementar una respuesta por lotes parcial para funciones de Lambda que reciben eventos de un flujo de Kinesis. La función informa los errores de los elementos del lote en la respuesta y le indica a Lambda que vuelva a intentar esos mensajes más adelante.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Notificación de los errores de los elementos del lote de Kinesis con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.KinesisEvent;
import com.amazonaws.services.lambda.runtime.events.StreamsEventResponse;

import java.io.Serializable;
import java.util.ArrayList;
import java.util.List;

public class ProcessKinesisRecords implements RequestHandler<KinesisEvent,
 StreamsEventResponse> {

    @Override
    public StreamsEventResponse handleRequest(KinesisEvent input, Context context) {

        List<StreamsEventResponse.BatchItemFailure> batchItemFailures = new
 ArrayList<>();
        String curRecordSequenceNumber = "";

        for (KinesisEvent.KinesisEventRecord kinesisEventRecord :
 input.getRecords()) {
            try {
                //Process your record
                KinesisEvent.Record kinesisRecord = kinesisEventRecord.getKinesis();
                curRecordSequenceNumber = kinesisRecord.getSequenceNumber();

            } catch (Exception e) {
                /* Since we are working with streams, we can return the failed item
 immediately.
                   Lambda will immediately begin to retry processing from this
 failed item onwards. */
```

```
                batchItemFailures.add(new
 StreamsEventResponse.BatchItemFailure(curRecordSequenceNumber));
                return new StreamsEventResponse(batchItemFailures);
            }
        }

       return new StreamsEventResponse(batchItemFailures);
    }
}
```

AWS KMS ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with AWS KMS.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hola AWS KMS

En el siguiente ejemplo de código se muestra cómo empezar a utilizar AWS Key Management Service.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.kms.KmsAsyncClient;
import software.amazon.awssdk.services.kms.model.ListKeysRequest;
import software.amazon.awssdk.services.kms.paginators.ListKeysPublisher;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloKMS {
    public static void main(String[] args) {
        listAllKeys();
    }

    public static void listAllKeys() {
        KmsAsyncClient kmsAsyncClient = KmsAsyncClient.builder()
            .build();
        ListKeysRequest listKeysRequest = ListKeysRequest.builder()
            .limit(15)
            .build();

        /*
         * The `subscribe` method is required when using paginator methods in the
 AWS SDK
         * because paginator methods return an instance of a `ListKeysPublisher`,
 which is
         * based on a reactive stream. This allows asynchronous retrieval of
 paginated
         * results as they become available. By subscribing to the stream, we can
 process
```

```
         * each page of results as they are emitted.
         */
        ListKeysPublisher keysPublisher =
 kmsAsyncClient.listKeysPaginator(listKeysRequest);
        CompletableFuture<Void> future = keysPublisher
            .subscribe(r -> r.keys().forEach(key ->
                System.out.println("The key ARN is: " + key.keyArn() + ". The key Id
 is: " + key.keyId())))
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    System.err.println("Error occurred: " + exception.getMessage());
                } else {
                    System.out.println("Successfully listed all keys.");
                }
            });

        try {
            future.join();
        } catch (Exception e) {
            System.err.println("Failed to list keys: " + e.getMessage());
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListKeysla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Creación de una clave de KMS.
- Enumerar las claves de KMS de su cuenta y obtener información sobre ellas.
- Habilitar y desactivar claves KMS.
- Generar una clave de datos simétrica que pueda usarse para el cifrado del cliente.
- Genere una clave asimétrica que se utilice para firmar digitalmente los datos.
- Tag keys (Claves de etiqueta).

- Eliminar las claves KMS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario en un símbolo del sistema.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.kms.model.AlreadyExistsException;
import software.amazon.awssdk.services.kms.model.DisabledException;
import software.amazon.awssdk.services.kms.model.EnableKeyRotationResponse;
import software.amazon.awssdk.services.kms.model.KmsException;
import software.amazon.awssdk.services.kms.model.NotFoundException;
import software.amazon.awssdk.services.kms.model.RevokeGrantResponse;
import java.util.List;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class KMSScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static String accountId = "";

    private static final Logger logger = LoggerFactory.getLogger(KMSScenario.class);
```

```
   static KMSActions kmsActions = new KMSActions();

   static Scanner scanner = new Scanner(System.in);

   static String aliasName = "alias/dev-encryption-key";

   public static void main(String[] args) {
       final String usage = """
           Usage: <granteePrincipal>

           Where:
              granteePrincipal - The principal (user, service account, or group) to
whom the grant or permission is being given.
           """;

       if (args.length != 1) {
           logger.info(usage);
           return;
       }
       String granteePrincipal = args[0];
       String policyName = "default";

       accountId = kmsActions.getAccountId();
       String keyDesc = "Created by the AWS KMS API";

       logger.info(DASHES);
       logger.info("""
           Welcome to the AWS Key Management SDK Basics scenario.

           This program demonstrates how to interact with AWS Key Management using
the AWS SDK for Java (v2).
           The AWS Key Management Service (KMS) is a secure and highly available
service that allows you to create
           and manage AWS KMS keys and control their use across a wide range of AWS
services and applications.
           KMS provides a centralized and unified approach to managing encryption
keys, making it easier to meet your
           data protection and regulatory compliance requirements.

           This Basics scenario creates two key types:

           - A symmetric encryption key is used to encrypt and decrypt data.
           - An asymmetric key used to digitally sign data.
```

```
            Let's get started...
            """);
        waitForInputToContinue(scanner);

        try {
        // Run the methods that belong to this scenario.
        String targetKeyId = runScenario(granteePrincipal, keyDesc, policyName);
        requestDeleteResources(aliasName, targetKeyId);

        } catch (Throwable rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }
    }

    private static String runScenario(String granteePrincipal, String keyDesc,
String policyName) throws Throwable {
        logger.info(DASHES);
        logger.info("1. Create a symmetric KMS key\n");
        logger.info("First, the program will creates a symmetric KMS key that you
can used to encrypt and decrypt data.");
        waitForInputToContinue(scanner);
        String targetKeyId;
        try {
            CompletableFuture<String> futureKeyId =
kmsActions.createKeyAsync(keyDesc);
            targetKeyId = futureKeyId.join();
            logger.info("A symmetric key was successfully created " + targetKeyId);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
```

```
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("""
            2. Enable a KMS key

            By default, when the SDK creates an AWS key, it is enabled. The next bit
of code checks to
            determine if the key is enabled.
             """);
        waitForInputToContinue(scanner);
        boolean isEnabled;
        try {
            CompletableFuture<Boolean> futureIsKeyEnabled =
kmsActions.isKeyEnabledAsync(targetKeyId);
            isEnabled = futureIsKeyEnabled.join();
            logger.info("Is the key enabled? {}", isEnabled);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }

        if (!isEnabled)
            try {
                CompletableFuture<Void> future =
kmsActions.enableKeyAsync(targetKeyId);
                future.join();

            } catch (RuntimeException rt) {
                Throwable cause = rt.getCause();
                if (cause instanceof KmsException kmsEx) {
                    logger.info("KMS error occurred: Error message: {}, Error code
{}", kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
                } else {
                    logger.info("An unexpected error occurred: " + rt.getMessage());
                }
                throw cause;
```

```
            }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("3. Encrypt data using the symmetric KMS key");
        String plaintext = "Hello, AWS KMS!";
        logger.info("""
            One of the main uses of symmetric keys is to encrypt and decrypt data.
            Next, the code encrypts the string {} with the SYMMETRIC_DEFAULT
encryption algorithm.
            """, plaintext);
        waitForInputToContinue(scanner);
        SdkBytes encryptedData;
        try {
            CompletableFuture<SdkBytes> future =
kmsActions.encryptDataAsync(targetKeyId, plaintext);
            encryptedData = future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof DisabledException kmsDisabledEx) {
                logger.info("KMS error occurred due to a disabled
key: Error message: {}, Error code {}", kmsDisabledEx.getMessage(),
kmsDisabledEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("4. Create an alias");
        logger.info("""

            The alias name should be prefixed with 'alias/'.
            The default, 'alias/dev-encryption-key'.
             """);
        waitForInputToContinue(scanner);

        try {
            CompletableFuture<Void> future =
kmsActions.createCustomAliasAsync(targetKeyId, aliasName);
```

```
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof AlreadyExistsException kmsExistsEx) {
                if (kmsExistsEx.getMessage().contains("already exists")) {
                    logger.info("The alias '" + aliasName + "' already exists.
Moving on...");
                }
            } else {
                logger.error("An unexpected error occurred: " + rt.getMessage(),
rt);
                deleteKey(targetKeyId);
                throw cause;
            }
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("5. List all of your aliases");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Object> future = kmsActions.listAllAliasesAsync();
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("6. Enable automatic rotation of the KMS key");
        logger.info("""

            By default, when the SDK enables automatic rotation of a KMS key,
```

```
            KMS rotates the key material of the KMS key one year (approximately 365
days) from the enable date and every year
            thereafter.
            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<EnableKeyRotationResponse> future =
kmsActions.enableKeyRotationAsync(targetKeyId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("""
            7. Create a grant

            A grant is a policy instrument that allows Amazon Web Services
principals to use KMS keys.
            It also can allow them to view a KMS key (DescribeKey) and create and
manage grants.
            When authorizing access to a KMS key, grants are considered along with
key policies and IAM policies.
            """);

        waitForInputToContinue(scanner);
        String grantId = null;
        try {
            CompletableFuture<String> futureGrantId =
kmsActions.grantKeyAsync(targetKeyId, granteePrincipal);
            grantId = futureGrantId.join();

        } catch (RuntimeException rt) {
```

```
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. List grants for the KMS key");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Object> future =
kmsActions.displayGrantIdsAsync(targetKeyId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("9. Revoke the grant");
        logger.info("""
            The revocation of a grant immediately removes the permissions and access
that the grant had provided.
            This means that any principal (user, role, or service) that was granted
access to perform specific
            KMS operations on a KMS key will no longer be able to perform those
operations.
```

```
            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<RevokeGrantResponse> future =
kmsActions.revokeKeyGrantAsync(targetKeyId, grantId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                if (kmsEx.getMessage().contains("Grant does not exist")) {
                    logger.info("The grant ID '" + grantId + "' does not exist.
Moving on...");
                } else {
                    logger.info("KMS error occurred: Error message: {}, Error code
{}", kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
                    throw cause;
                }
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
                deleteAliasName(aliasName);
                deleteKey(targetKeyId);
                throw cause;
            }
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("10. Decrypt the data\n");
        logger.info("""
            Lets decrypt the data that was encrypted in an early step.
            The code uses the same key to decrypt the string that we encrypted
earlier in the program.
            """);
        waitForInputToContinue(scanner);
        String decryptedData = "";
        try {
            CompletableFuture<String> future =
kmsActions.decryptDataAsync(encryptedData, targetKeyId);
            decryptedData = future.join();
            logger.info("Decrypted data: " + decryptedData);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
```

```
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        logger.info("Decrypted text is: " + decryptedData);
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("11. Replace a key policy\n");
        logger.info("""
            A key policy is a resource policy for a KMS key. Key policies are the
primary way to control
            access to KMS keys. Every KMS key must have exactly one key policy. The
statements in the key policy
            determine who has permission to use the KMS key and how they can use
it.
            You can also use IAM policies and grants to control access to the KMS
key, but every KMS key
            must have a key policy.

            By default, when you create a key by using the SDK, a policy is created
that
            gives the AWS account that owns the KMS key full access to the KMS key.

            Let's try to replace the automatically created policy with the following
policy.

                "Version":"2012-10-17",
                "Statement": [{
                "Effect": "Allow",
                "Principal": {"AWS": "arn:aws:iam::0000000000:root"},
                "Action": "kms:*",
                "Resource": "*"
                }]
            """);

        waitForInputToContinue(scanner);
        try {
```

```
            CompletableFuture<Boolean> future =
kmsActions.replacePolicyAsync(targetKeyId, policyName, accountId);
            boolean success = future.join();
            if (success) {
                logger.info("Key policy replacement succeeded.");
            } else {
                logger.error("Key policy replacement failed.");
            }

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("12. Get the key policy\n");
        logger.info("The next bit of code that runs gets the key policy to make sure
it exists.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<String> future =
kmsActions.getKeyPolicyAsync(targetKeyId, policyName);
            String policy = future.join();
            if (!policy.isEmpty()) {
                logger.info("Retrieved policy: " + policy);
            }

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
```

```
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("13. Create an asymmetric KMS key and sign your data\n");
        logger.info("""
             Signing your data with an AWS key can provide several benefits that
make it an attractive option
             for your data signing needs. By using an AWS KMS key, you can leverage
the
             security controls and compliance features provided by AWS,
             which can help you meet various regulatory requirements and enhance the
overall security posture
             of your organization.
            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Boolean> future = kmsActions.signVerifyDataAsync();
            boolean success = future.join();
            if (success) {
                logger.info("Sign and verify data operation succeeded.");
            } else {
                logger.error("Sign and verify data operation failed.");
            }

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("14. Tag your symmetric KMS Key\n");
```

```
        logger.info("""
            By using tags, you can improve the overall management, security, and
governance of your
            KMS keys, making it easier to organize, track, and control access to
your encrypted data within
            your AWS environment
            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future = kmsActions.tagKMSKeyAsync(targetKeyId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);
        return targetKeyId;
    }

    // Deletes KMS resources with user input.
    private static void requestDeleteResources(String aliasName, String targetKeyId)
{
        logger.info(DASHES);
        logger.info("15. Schedule the deletion of the KMS key\n");
        logger.info("""
            By default, KMS applies a waiting period of 30 days,
            but you can specify a waiting period of 7-30 days. When this operation
is successful,
            the key state of the KMS key changes to PendingDeletion and the key
can't be used in any
            cryptographic operations. It remains in this state for the duration of
the waiting period.

            Deleting a KMS key is a destructive and potentially dangerous operation.
When a KMS key is deleted,
```

```
            all data that was encrypted under the KMS key is unrecoverable.
            """);
        logger.info("Would you like to delete the Key Management resources? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            logger.info("You selected to delete the AWS KMS resources.");
            waitForInputToContinue(scanner);
            try {
                CompletableFuture<Void> future =
kmsActions.deleteSpecificAliasAsync(aliasName);
                future.join();

            } catch (RuntimeException rt) {
                Throwable cause = rt.getCause();
                if (cause instanceof KmsException kmsEx) {
                    logger.info("KMS error occurred: Error message: {}, Error code
{}", kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
                } else {
                    logger.info("An unexpected error occurred: " + rt.getMessage());
                }
            }
            waitForInputToContinue(scanner);
            try {
                CompletableFuture<Void> future =
kmsActions.disableKeyAsync(targetKeyId);
                future.join();

            } catch (RuntimeException rt) {
                Throwable cause = rt.getCause();
                if (cause instanceof KmsException kmsEx) {
                    logger.info("KMS error occurred: Error message: {}, Error code
{}", kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
                } else {
                    logger.info("An unexpected error occurred: " + rt.getMessage());
                }
            }

            try {
                CompletableFuture<Void> future =
kmsActions.deleteKeyAsync(targetKeyId);
                future.join();

            } catch (RuntimeException rt) {
                Throwable cause = rt.getCause();
```

```
                if (cause instanceof KmsException kmsEx) {
                    logger.info("KMS error occurred: Error message: {}, Error code
{}", kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
                } else {
                    logger.info("An unexpected error occurred: " + rt.getMessage());
                }
            }

        } else {
            logger.info("The Key Management resources will not be deleted");
        }

        logger.info(DASHES);
        logger.info("This concludes the AWS Key Management SDK scenario");
        logger.info(DASHES);
    }

    // This method is invoked from Exceptions to clean up the resources.
    private static void deleteKey(String targetKeyId) {
        try {
            CompletableFuture<Void> future =
kmsActions.disableKeyAsync(targetKeyId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }

        try {
            CompletableFuture<Void> future = kmsActions.deleteKeyAsync(targetKeyId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
```

```
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }
    }

    // This method is invoked from Exceptions to clean up the resources.
    private static void deleteAliasName(String aliasName) {
        try {
            CompletableFuture<Void> future =
 kmsActions.deleteSpecificAliasAsync(aliasName);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
 kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Defina una clase que ajuste las acciones de KMS.

```
public class KMSActions {
    private static final Logger logger = LoggerFactory.getLogger(KMSActions.class);
    private static KmsAsyncClient kmsAsyncClient;

    /**
     * Retrieves an asynchronous AWS Key Management Service (KMS) client.
     * <p>
     * This method creates and returns a singleton instance of the KMS async client,
 with the following configurations:
     * <ul>
     *   <li>Max concurrency: 100</li>
     *   <li>Connection timeout: 60 seconds</li>
     *   <li>Read timeout: 60 seconds</li>
     *   <li>Write timeout: 60 seconds</li>
     *   <li>API call timeout: 2 minutes</li>
     *   <li>API call attempt timeout: 90 seconds</li>
     *   <li>Retry policy: up to 3 retries</li>
     *   <li>Credentials provider: environment variable credentials provider</li>
     * </ul>
     * <p>
     * If the client instance has already been created, it is returned instead of
 creating a new one.
     *
     * @return the KMS async client instance
     */
    private static KmsAsyncClient getAsyncClient() {
        if (kmsAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryPolicy(RetryPolicy.builder()
                    .numRetries(3)
                    .build())
                .build();
```

```
            kmsAsyncClient = KmsAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return kmsAsyncClient;
    }

    /**
     * Creates a new symmetric encryption key asynchronously.
     *
     * @param keyDesc the description of the key to be created
     * @return a {@link CompletableFuture} that completes with the ID of the newly
created key
     * @throws RuntimeException if an error occurs while creating the key
     */
    public CompletableFuture<String> createKeyAsync(String keyDesc) {
        CreateKeyRequest keyRequest = CreateKeyRequest.builder()
            .description(keyDesc)
            .keySpec(KeySpec.SYMMETRIC_DEFAULT)
            .keyUsage(KeyUsageType.ENCRYPT_DECRYPT)
            .build();

        return getAsyncClient().createKey(keyRequest)
            .thenApply(resp -> resp.keyMetadata().keyId())
            .exceptionally(ex -> {
                throw new RuntimeException("An error occurred while creating the
key: " + ex.getMessage(), ex);
            });
    }

    /**
     * Asynchronously checks if a specified key is enabled.
     *
     * @param keyId the ID of the key to check
     * @return a {@link CompletableFuture} that, when completed, indicates whether
the key is enabled or not
     *
     * @throws RuntimeException if an exception occurs while checking the key state
     */
    public CompletableFuture<Boolean> isKeyEnabledAsync(String keyId) {
        DescribeKeyRequest keyRequest = DescribeKeyRequest.builder()
            .keyId(keyId)
            .build();
```

```
        CompletableFuture<DescribeKeyResponse> responseFuture =
getAsyncClient().describeKey(keyRequest);
        return responseFuture.whenComplete((resp, ex) -> {
            if (resp != null) {
                KeyState keyState = resp.keyMetadata().keyState();
                if (keyState == KeyState.ENABLED) {
                    logger.info("The key is enabled.");
                } else {
                    logger.info("The key is not enabled. Key state: {}", keyState);
                }
            } else {
                throw new RuntimeException(ex);
            }
        }).thenApply(resp -> resp.keyMetadata().keyState() == KeyState.ENABLED);
    }

    /**
     * Asynchronously enables the specified key.
     *
     * @param keyId the ID of the key to enable
     * @return a {@link CompletableFuture} that completes when the key has been
enabled
     */
    public CompletableFuture<Void> enableKeyAsync(String keyId) {
        EnableKeyRequest enableKeyRequest = EnableKeyRequest.builder()
            .keyId(keyId)
            .build();

        CompletableFuture<EnableKeyResponse> responseFuture =
getAsyncClient().enableKey(enableKeyRequest);
        responseFuture.whenComplete((response, exception) -> {
            if (exception == null) {
                logger.info("Key with ID [{}] has been enabled.", keyId);
            } else {
                if (exception instanceof KmsException kmsEx) {
                    throw new RuntimeException("KMS error occurred while enabling
key: " + kmsEx.getMessage(), kmsEx);
                } else {
                    throw new RuntimeException("An unexpected error occurred while
enabling key: " + exception.getMessage(), exception);
                }
            }
        });
```

```
        return responseFuture.thenApply(response -> null);
    }

    /**
     * Encrypts the given text asynchronously using the specified KMS client and key
ID.
     *
     * @param keyId the ID of the KMS key to use for encryption
     * @param text the text to encrypt
     * @return a CompletableFuture that completes with the encrypted data as an
SdkBytes object
     */
    public CompletableFuture<SdkBytes> encryptDataAsync(String keyId, String text) {
        SdkBytes myBytes = SdkBytes.fromUtf8String(text);
        EncryptRequest encryptRequest = EncryptRequest.builder()
            .keyId(keyId)
            .plaintext(myBytes)
            .build();

        CompletableFuture<EncryptResponse> responseFuture =
getAsyncClient().encrypt(encryptRequest).toCompletableFuture();
        return responseFuture.whenComplete((response, ex) -> {
            if (response != null) {
                String algorithm = response.encryptionAlgorithm().toString();
                logger.info("The string was encrypted with algorithm {}.",
algorithm);
            } else {
                throw new RuntimeException(ex);
            }
        }).thenApply(EncryptResponse::ciphertextBlob);
    }

    /**
     * Creates a custom alias for the specified target key asynchronously.
     *
     * @param targetKeyId the ID of the target key for the alias
     * @param aliasName   the name of the alias to create
     * @return a {@link CompletableFuture} that completes when the alias creation
operation is finished
     */
    public CompletableFuture<Void> createCustomAliasAsync(String targetKeyId, String
aliasName) {
        CreateAliasRequest aliasRequest = CreateAliasRequest.builder()
```

```
            .aliasName(aliasName)
            .targetKeyId(targetKeyId)
            .build();

       CompletableFuture<CreateAliasResponse> responseFuture =
getAsyncClient().createAlias(aliasRequest);
       responseFuture.whenComplete((response, exception) -> {
           if (exception == null) {
               logger.info("{} was successfully created.", aliasName);
           } else {
               if (exception instanceof ResourceExistsException) {
                   logger.info("Alias [{}] already exists. Moving on...",
aliasName);
               } else if (exception instanceof KmsException kmsEx) {
                   throw new RuntimeException("KMS error occurred while creating
alias: " + kmsEx.getMessage(), kmsEx);
               } else {
                   throw new RuntimeException("An unexpected error occurred while
creating alias: " + exception.getMessage(), exception);
               }
           }
       });

       return responseFuture.thenApply(response -> null);
   }

   /**
    * Asynchronously lists all the aliases in the current AWS account.
    *
    * @return a {@link CompletableFuture} that completes when the list of aliases
has been processed
    */
   public CompletableFuture<Object> listAllAliasesAsync() {
       ListAliasesRequest aliasesRequest = ListAliasesRequest.builder()
           .limit(15)
           .build();

       ListAliasesPublisher paginator =
getAsyncClient().listAliasesPaginator(aliasesRequest);
       return paginator.subscribe(response -> {
               response.aliases().forEach(alias ->
                   logger.info("The alias name is: " + alias.aliasName())
               );
           })
```

```
            .thenApply(v -> null)
            .exceptionally(ex -> {
                if (ex.getCause() instanceof KmsException) {
                    KmsException e = (KmsException) ex.getCause();
                    throw new RuntimeException("A KMS exception occurred: " +
e.getMessage());
                } else {
                    throw new RuntimeException("An unexpected error occurred: " +
ex.getMessage());
                }
            });
   }

   /**
    * Enables key rotation asynchronously for the specified key ID.
    *
    * @param keyId the ID of the key for which to enable key rotation
    * @return a CompletableFuture that represents the asynchronous operation of
enabling key rotation
    * @throws RuntimeException if there was an error enabling key rotation, either
due to a KMS exception or an unexpected error
    */
   public CompletableFuture<EnableKeyRotationResponse>
enableKeyRotationAsync(String keyId) {
       EnableKeyRotationRequest enableKeyRotationRequest =
EnableKeyRotationRequest.builder()
            .keyId(keyId)
            .build();

       CompletableFuture<EnableKeyRotationResponse> responseFuture =
getAsyncClient().enableKeyRotation(enableKeyRotationRequest);
       responseFuture.whenComplete((response, exception) -> {
           if (exception == null) {
               logger.info("Key rotation has been enabled for key with id [{}]",
keyId);
           } else {
               if (exception instanceof KmsException kmsEx) {
                   throw new RuntimeException("Failed to enable key rotation: " +
kmsEx.getMessage(), kmsEx);
               } else {
                   throw new RuntimeException("An unexpected error occurred: " +
exception.getMessage(), exception);
               }
           }
```

```
        });

        return responseFuture;
    }

    /**
     * Grants permissions to a specified principal on a customer master key (CMK)
asynchronously.
     *
     * @param keyId             The unique identifier for the customer master key
(CMK) that the grant applies to.
     * @param granteePrincipal  The principal that is given permission to perform
the operations that the grant permits on the CMK.
     * @return A {@link CompletableFuture} that, when completed, contains the ID of
the created grant.
     * @throws RuntimeException If an error occurs during the grant creation
process.
     */
    public CompletableFuture<String> grantKeyAsync(String keyId, String
granteePrincipal) {
        List<GrantOperation> grantPermissions = List.of(
            GrantOperation.ENCRYPT,
            GrantOperation.DECRYPT,
            GrantOperation.DESCRIBE_KEY
        );

        CreateGrantRequest grantRequest = CreateGrantRequest.builder()
            .keyId(keyId)
            .name("grant1")
            .granteePrincipal(granteePrincipal)
            .operations(grantPermissions)
            .build();

        CompletableFuture<CreateGrantResponse> responseFuture =
getAsyncClient().createGrant(grantRequest);
        responseFuture.whenComplete((response, ex) -> {
            if (ex == null) {
                logger.info("Grant created successfully with ID: " +
response.grantId());
            } else {
                if (ex instanceof KmsException kmsEx) {
                    throw new RuntimeException("Failed to create grant: " +
kmsEx.getMessage(), kmsEx);
                } else {
```

```
                    throw new RuntimeException("An unexpected error occurred: " +
ex.getMessage(), ex);
                }
            }
        });

        return responseFuture.thenApply(CreateGrantResponse::grantId);
    }

    /**
     * Asynchronously displays the grant IDs for the specified key ID.
     *
     * @param keyId the ID of the AWS KMS key for which to list the grants
     * @return a {@link CompletableFuture} that, when completed, will be null if
the operation succeeded, or will throw a {@link RuntimeException} if the operation
failed
     * @throws RuntimeException if there was an error listing the grants, either due
to an {@link KmsException} or an unexpected error
     */
    public CompletableFuture<Object> displayGrantIdsAsync(String keyId) {
        ListGrantsRequest grantsRequest = ListGrantsRequest.builder()
            .keyId(keyId)
            .limit(15)
            .build();

        ListGrantsPublisher paginator =
getAsyncClient().listGrantsPaginator(grantsRequest);
        return paginator.subscribe(response -> {
                response.grants().forEach(grant -> {
                    logger.info("The grant Id is: " + grant.grantId());
                });
            })
            .thenApply(v -> null)
            .exceptionally(ex -> {
                Throwable cause = ex.getCause();
                if (cause instanceof KmsException) {
                    throw new RuntimeException("Failed to list grants: " +
cause.getMessage(), cause);
                } else {
                    throw new RuntimeException("An unexpected error occurred: " +
cause.getMessage(), cause);
                }
            });
    }
```

```
   /**
    * Revokes a grant for the specified AWS KMS key asynchronously.
    *
    * @param keyId   The ID or key ARN of the AWS KMS key.
    * @param grantId The identifier of the grant to be revoked.
    * @return A {@link CompletableFuture} representing the asynchronous operation
of revoking the grant.
    *         The {@link CompletableFuture} will complete with a {@link
RevokeGrantResponse} object
    *         if the operation is successful, or with a {@code null} value if an
error occurs.
    */
   public CompletableFuture<RevokeGrantResponse> revokeKeyGrantAsync(String keyId,
String grantId) {
       RevokeGrantRequest grantRequest = RevokeGrantRequest.builder()
           .keyId(keyId)
           .grantId(grantId)
           .build();

       CompletableFuture<RevokeGrantResponse> responseFuture =
getAsyncClient().revokeGrant(grantRequest);
       responseFuture.whenComplete((response, exception) -> {
           if (exception == null) {
               logger.info("Grant ID: [" + grantId + "] was successfully
revoked!");
           } else {
               if (exception instanceof KmsException kmsEx) {
                   if (kmsEx.getMessage().contains("Grant does not exist")) {
                       logger.info("The grant ID '" + grantId + "' does not exist.
Moving on...");
                   } else {
                       throw new RuntimeException("KMS error occurred: " +
kmsEx.getMessage(), kmsEx);
                   }
               } else {
                   throw new RuntimeException("An unexpected error occurred: " +
exception.getMessage(), exception);
               }
           }
       });

       return responseFuture;
   }
```

```
   /**
    * Asynchronously decrypts the given encrypted data using the specified key ID.
    *
    * @param encryptedData The encrypted data to be decrypted.
    * @param keyId The ID of the key to be used for decryption.
    * @return A CompletableFuture that, when completed, will contain the decrypted
data as a String.
    *         If an error occurs during the decryption process, the
CompletableFuture will complete
    *         exceptionally with the error, and the method will return an empty
String.
    */
   public CompletableFuture<String> decryptDataAsync(SdkBytes encryptedData, String
keyId) {
       DecryptRequest decryptRequest = DecryptRequest.builder()
           .ciphertextBlob(encryptedData)
           .keyId(keyId)
           .build();

       CompletableFuture<DecryptResponse> responseFuture =
getAsyncClient().decrypt(decryptRequest);
       responseFuture.whenComplete((decryptResponse, exception) -> {
           if (exception == null) {
               logger.info("Data decrypted successfully for key ID: " + keyId);
           } else {
               if (exception instanceof KmsException kmsEx) {
                   throw new RuntimeException("KMS error occurred while decrypting
data: " + kmsEx.getMessage(), kmsEx);
               } else {
                   throw new RuntimeException("An unexpected error occurred while
decrypting data: " + exception.getMessage(), exception);
               }
           }
       });

       return responseFuture.thenApply(decryptResponse ->
decryptResponse.plaintext().asString(StandardCharsets.UTF_8));
   }

   /**
    * Asynchronously replaces the policy for the specified KMS key.
    *
```

```
    * @param keyId       the ID of the KMS key to replace the policy for
    * @param policyName  the name of the policy to be replaced
    * @param accountId   the AWS account ID to be used in the policy
    * @return a {@link CompletableFuture} that completes with a boolean indicating
    *         whether the policy replacement was successful or not
    */
   public CompletableFuture<Boolean> replacePolicyAsync(String keyId, String
policyName, String accountId) {
       String policy = """
   {
     "Version":"2012-10-17",
     "Statement": [{
       "Effect": "Allow",
       "Principal": {"AWS": "arn:aws:iam::%s:root"},
       "Action": "kms:*",
       "Resource": "*"
     }]
   }
   """.formatted(accountId);

       PutKeyPolicyRequest keyPolicyRequest = PutKeyPolicyRequest.builder()
           .keyId(keyId)
           .policyName(policyName)
           .policy(policy)
           .build();

       // First, get the current policy to check if it exists
       return getAsyncClient().getKeyPolicy(r ->
r.keyId(keyId).policyName(policyName))
           .thenCompose(response -> {
               logger.info("Current policy exists. Replacing it...");
               return getAsyncClient().putKeyPolicy(keyPolicyRequest);
           })
           .thenApply(putPolicyResponse -> {
               logger.info("The key policy has been replaced.");
               return true;
           })
           .exceptionally(throwable -> {
               if (throwable.getCause() instanceof LimitExceededException) {
                   logger.error("Cannot replace policy, as only one policy is
allowed per key.");
                   return false;
               }
               throw new RuntimeException("Error replacing policy", throwable);
```

```
            });
    }


    /**
     * Asynchronously retrieves the key policy for the specified key ID and policy
 name.
     *
     * @param keyId       the ID of the AWS KMS key for which to retrieve the policy
     * @param policyName the name of the key policy to retrieve
     * @return a {@link CompletableFuture} that, when completed, contains the key
 policy as a {@link String}
     */
    public CompletableFuture<String> getKeyPolicyAsync(String keyId, String
 policyName) {
        GetKeyPolicyRequest policyRequest = GetKeyPolicyRequest.builder()
            .keyId(keyId)
            .policyName(policyName)
            .build();

        return getAsyncClient().getKeyPolicy(policyRequest)
            .thenApply(response -> {
                String policy = response.policy();
                logger.info("The response is: " + policy);
                return policy;
            })
            .exceptionally(ex -> {
                throw new RuntimeException("Failed to get key policy", ex);
            });
    }

    /**
     * Asynchronously signs and verifies data using AWS KMS.
     *
     * <p>The method performs the following steps:
     * <ol>
     *     <li>Creates an AWS KMS key with the specified key spec, key usage, and
 origin.</li>
     *     <li>Signs the provided message using the created KMS key and the RSASSA-
PSS-SHA-256 algorithm.</li>
     *     <li>Verifies the signature of the message using the created KMS key and
 the RSASSA-PSS-SHA-256 algorithm.</li>
     * </ol>
     *
```

```
    * @return a {@link CompletableFuture} that completes with the result of the
signature verification,
    *         {@code true} if the signature is valid, {@code false} otherwise.
    * @throws KmsException if any error occurs during the KMS operations.
    * @throws RuntimeException if an unexpected error occurs.
    */
   public CompletableFuture<Boolean> signVerifyDataAsync() {
       String signMessage = "Here is the message that will be digitally signed";

       // Create an AWS KMS key used to digitally sign data.
       CreateKeyRequest createKeyRequest = CreateKeyRequest.builder()
           .keySpec(KeySpec.RSA_2048)
           .keyUsage(KeyUsageType.SIGN_VERIFY)
           .origin(OriginType.AWS_KMS)
           .build();

       return getAsyncClient().createKey(createKeyRequest)
           .thenCompose(createKeyResponse -> {
               String keyId = createKeyResponse.keyMetadata().keyId();

               SdkBytes messageBytes = SdkBytes.fromString(signMessage,
Charset.defaultCharset());
               SignRequest signRequest = SignRequest.builder()
                   .keyId(keyId)
                   .message(messageBytes)
                   .signingAlgorithm(SigningAlgorithmSpec.RSASSA_PSS_SHA_256)
                   .build();

               return getAsyncClient().sign(signRequest)
                   .thenCompose(signResponse -> {
                       byte[] signedBytes = signResponse.signature().asByteArray();

                       VerifyRequest verifyRequest = VerifyRequest.builder()
                           .keyId(keyId)

.message(SdkBytes.fromByteArray(signMessage.getBytes(Charset.defaultCharset())))

.signature(SdkBytes.fromByteBuffer(ByteBuffer.wrap(signedBytes)))

.signingAlgorithm(SigningAlgorithmSpec.RSASSA_PSS_SHA_256)
                           .build();

                       return getAsyncClient().verify(verifyRequest)
                           .thenApply(verifyResponse -> {
```

```
                                return (boolean) verifyResponse.signatureValid();
                            });
                    });
            })
            .exceptionally(throwable -> {
               throw new RuntimeException("Failed to sign or verify data",
throwable);
            });
    }

    /**
     * Asynchronously tags a KMS key with a specific tag.
     *
     * @param keyId the ID of the KMS key to be tagged
     * @return a {@link CompletableFuture} that completes when the tagging operation
is finished
     */
    public CompletableFuture<Void> tagKMSKeyAsync(String keyId) {
        Tag tag = Tag.builder()
            .tagKey("Environment")
            .tagValue("Production")
            .build();

        TagResourceRequest tagResourceRequest = TagResourceRequest.builder()
            .keyId(keyId)
            .tags(tag)
            .build();

        return getAsyncClient().tagResource(tagResourceRequest)
            .thenRun(() -> {
                logger.info("{} key was tagged", keyId);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to tag the KMS key", throwable);
            });
    }

    /**
     * Deletes a specific KMS alias asynchronously.
     *
     * @param aliasName the name of the alias to be deleted
     * @return a {@link CompletableFuture} representing the asynchronous operation
of deleting the specified alias
     */
```

```
    public CompletableFuture<Void> deleteSpecificAliasAsync(String aliasName) {
        DeleteAliasRequest deleteAliasRequest = DeleteAliasRequest.builder()
            .aliasName(aliasName)
            .build();

        return getAsyncClient().deleteAlias(deleteAliasRequest)
            .thenRun(() -> {
                logger.info("Alias {} has been deleted successfully", aliasName);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to delete alias: " + aliasName,
throwable);
            });
    }

    /**
     * Asynchronously disables the specified AWS Key Management Service (KMS) key.
     *
     * @param keyId the ID or Amazon Resource Name (ARN) of the KMS key to be
disabled
     * @return a CompletableFuture that, when completed, indicates that the key has
been disabled successfully
     */
    public CompletableFuture<Void> disableKeyAsync(String keyId) {
        DisableKeyRequest keyRequest = DisableKeyRequest.builder()
            .keyId(keyId)
            .build();

        return getAsyncClient().disableKey(keyRequest)
            .thenRun(() -> {
                logger.info("Key {} has been disabled successfully",keyId);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to disable key: " + keyId,
throwable);
            });
    }

    /**
     * Deletes a KMS key asynchronously.
     *
     * <p><strong>Warning:</strong> Deleting a KMS key is a destructive and
potentially dangerous operation.
```

```
     * When a KMS key is deleted, all data that was encrypted under the KMS key
 becomes unrecoverable.
     * This means that any files, databases, or other data that were encrypted using
 the deleted KMS key
     * will become permanently inaccessible. Exercise extreme caution when deleting
 KMS keys.</p>
     *
     * @param keyId the ID of the KMS key to delete
     * @return a {@link CompletableFuture} that completes when the key deletion is
 scheduled
     */
    public CompletableFuture<Void> deleteKeyAsync(String keyId) {
        ScheduleKeyDeletionRequest deletionRequest =
 ScheduleKeyDeletionRequest.builder()
            .keyId(keyId)
            .pendingWindowInDays(7)
            .build();

        return getAsyncClient().scheduleKeyDeletion(deletionRequest)
            .thenRun(() -> {
                logger.info("Key {} will be deleted in 7 days", keyId);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to schedule key deletion for key
 ID: " + keyId, throwable);
            });
    }


    public String getAccountId(){
        try (StsClient stsClient = StsClient.create()){
            GetCallerIdentityResponse callerIdentity =
 stsClient.getCallerIdentity();
            return callerIdentity.account();
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateAlias

- CreateGrant
- CreateKey
- Decrypt
- DescribeKey
- DisableKey
- EnableKey
- Encrypt
- GetKeyPolicy
- ListAliases
- ListGrants
- ListKeys
- RevokeGrant
- ScheduleKeyDeletion
- Sign
- TagResource

Acciones

`CreateAlias`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateAlias`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Creates a custom alias for the specified target key asynchronously.
 *
 * @param targetKeyId the ID of the target key for the alias
 * @param aliasName   the name of the alias to create
```

```
    * @return a {@link CompletableFuture} that completes when the alias creation
operation is finished
    */
   public CompletableFuture<Void> createCustomAliasAsync(String targetKeyId, String
aliasName) {
       CreateAliasRequest aliasRequest = CreateAliasRequest.builder()
           .aliasName(aliasName)
           .targetKeyId(targetKeyId)
           .build();

       CompletableFuture<CreateAliasResponse> responseFuture =
getAsyncClient().createAlias(aliasRequest);
       responseFuture.whenComplete((response, exception) -> {
           if (exception == null) {
               logger.info("{} was successfully created.", aliasName);
           } else {
               if (exception instanceof ResourceExistsException) {
                   logger.info("Alias [{}] already exists. Moving on...",
aliasName);
               } else if (exception instanceof KmsException kmsEx) {
                   throw new RuntimeException("KMS error occurred while creating
alias: " + kmsEx.getMessage(), kmsEx);
               } else {
                   throw new RuntimeException("An unexpected error occurred while
creating alias: " + exception.getMessage(), exception);
               }
           }
       });

       return responseFuture.thenApply(response -> null);
   }
```

- Para obtener más información sobre la API, consulta CreateAliasla Referencia AWS SDK for Java 2.x de la API.

`CreateGrant`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateGrant`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Grants permissions to a specified principal on a customer master key (CMK)
asynchronously.
    *
    * @param keyId             The unique identifier for the customer master key
(CMK) that the grant applies to.
    * @param granteePrincipal  The principal that is given permission to perform
the operations that the grant permits on the CMK.
    * @return A {@link CompletableFuture} that, when completed, contains the ID of
the created grant.
    * @throws RuntimeException If an error occurs during the grant creation
process.
    */
   public CompletableFuture<String> grantKeyAsync(String keyId, String
granteePrincipal) {
       List<GrantOperation> grantPermissions = List.of(
           GrantOperation.ENCRYPT,
           GrantOperation.DECRYPT,
           GrantOperation.DESCRIBE_KEY
       );

       CreateGrantRequest grantRequest = CreateGrantRequest.builder()
           .keyId(keyId)
           .name("grant1")
           .granteePrincipal(granteePrincipal)
           .operations(grantPermissions)
           .build();

       CompletableFuture<CreateGrantResponse> responseFuture =
getAsyncClient().createGrant(grantRequest);
       responseFuture.whenComplete((response, ex) -> {
           if (ex == null) {
               logger.info("Grant created successfully with ID: " +
response.grantId());
```

```
            } else {
                if (ex instanceof KmsException kmsEx) {
                    throw new RuntimeException("Failed to create grant: " +
kmsEx.getMessage(), kmsEx);
                } else {
                    throw new RuntimeException("An unexpected error occurred: " +
ex.getMessage(), ex);
                }
            }
        });

        return responseFuture.thenApply(CreateGrantResponse::grantId);
    }
```

- Para obtener más información sobre la API, consulta CreateGrantla Referencia AWS SDK for Java 2.x de la API.

`CreateKey`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateKey`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new symmetric encryption key asynchronously.
     *
     * @param keyDesc the description of the key to be created
     * @return a {@link CompletableFuture} that completes with the ID of the newly
created key
     * @throws RuntimeException if an error occurs while creating the key
     */
    public CompletableFuture<String> createKeyAsync(String keyDesc) {
        CreateKeyRequest keyRequest = CreateKeyRequest.builder()
            .description(keyDesc)
```

```
            .keySpec(KeySpec.SYMMETRIC_DEFAULT)
            .keyUsage(KeyUsageType.ENCRYPT_DECRYPT)
            .build();

        return getAsyncClient().createKey(keyRequest)
            .thenApply(resp -> resp.keyMetadata().keyId())
            .exceptionally(ex -> {
                throw new RuntimeException("An error occurred while creating the
key: " + ex.getMessage(), ex);
            });
    }
```

- Para obtener más información sobre la API, consulta CreateKeyla Referencia AWS SDK for Java 2.x de la API.

`Decrypt`

En el siguiente ejemplo de código, se muestra cómo utilizar `Decrypt`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously decrypts the given encrypted data using the specified key ID.
     *
     * @param encryptedData The encrypted data to be decrypted.
     * @param keyId The ID of the key to be used for decryption.
     * @return A CompletableFuture that, when completed, will contain the decrypted
data as a String.
     *         If an error occurs during the decryption process, the
CompletableFuture will complete
     *         exceptionally with the error, and the method will return an empty
String.
     */
```

```
   public CompletableFuture<String> decryptDataAsync(SdkBytes encryptedData, String
keyId) {
       DecryptRequest decryptRequest = DecryptRequest.builder()
           .ciphertextBlob(encryptedData)
           .keyId(keyId)
           .build();

       CompletableFuture<DecryptResponse> responseFuture =
getAsyncClient().decrypt(decryptRequest);
       responseFuture.whenComplete((decryptResponse, exception) -> {
           if (exception == null) {
               logger.info("Data decrypted successfully for key ID: " + keyId);
           } else {
               if (exception instanceof KmsException kmsEx) {
                   throw new RuntimeException("KMS error occurred while decrypting
data: " + kmsEx.getMessage(), kmsEx);
               } else {
                   throw new RuntimeException("An unexpected error occurred while
decrypting data: " + exception.getMessage(), exception);
               }
           }
       });

       return responseFuture.thenApply(decryptResponse ->
decryptResponse.plaintext().asString(StandardCharsets.UTF_8));
   }
```

- Para obtener información sobre la API, consulte Decrypt en la Referencia de la API de AWS SDK for Java 2.x .

`DeleteAlias`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteAlias`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a specific KMS alias asynchronously.
     *
     * @param aliasName the name of the alias to be deleted
     * @return a {@link CompletableFuture} representing the asynchronous operation
of deleting the specified alias
     */
    public CompletableFuture<Void> deleteSpecificAliasAsync(String aliasName) {
        DeleteAliasRequest deleteAliasRequest = DeleteAliasRequest.builder()
            .aliasName(aliasName)
            .build();

        return getAsyncClient().deleteAlias(deleteAliasRequest)
            .thenRun(() -> {
                logger.info("Alias {} has been deleted successfully", aliasName);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to delete alias: " + aliasName,
throwable);
            });
    }
```

- Para obtener más información sobre la API, consulta DeleteAliasla Referencia AWS SDK for Java 2.x de la API.

`DescribeKey`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeKey`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously checks if a specified key is enabled.
     *
```

```
     * @param keyId the ID of the key to check
     * @return a {@link CompletableFuture} that, when completed, indicates whether
the key is enabled or not
     *
     * @throws RuntimeException if an exception occurs while checking the key state
     */
    public CompletableFuture<Boolean> isKeyEnabledAsync(String keyId) {
        DescribeKeyRequest keyRequest = DescribeKeyRequest.builder()
            .keyId(keyId)
            .build();

        CompletableFuture<DescribeKeyResponse> responseFuture =
getAsyncClient().describeKey(keyRequest);
        return responseFuture.whenComplete((resp, ex) -> {
            if (resp != null) {
                KeyState keyState = resp.keyMetadata().keyState();
                if (keyState == KeyState.ENABLED) {
                    logger.info("The key is enabled.");
                } else {
                    logger.info("The key is not enabled. Key state: {}", keyState);
                }
            } else {
                throw new RuntimeException(ex);
            }
        }).thenApply(resp -> resp.keyMetadata().keyState() == KeyState.ENABLED);
    }
```

- Para obtener más información sobre la API, consulta DescribeKeyla Referencia AWS SDK for Java 2.x de la API.

`DisableKey`

En el siguiente ejemplo de código, se muestra cómo utilizar `DisableKey`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously disables the specified AWS Key Management Service (KMS) key.
     *
     * @param keyId the ID or Amazon Resource Name (ARN) of the KMS key to be
disabled
     * @return a CompletableFuture that, when completed, indicates that the key has
been disabled successfully
     */
    public CompletableFuture<Void> disableKeyAsync(String keyId) {
        DisableKeyRequest keyRequest = DisableKeyRequest.builder()
            .keyId(keyId)
            .build();

        return getAsyncClient().disableKey(keyRequest)
            .thenRun(() -> {
                logger.info("Key {} has been disabled successfully",keyId);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to disable key: " + keyId,
throwable);
            });
    }
```

- Para obtener más información sobre la API, consulta DisableKeyla Referencia AWS SDK for Java 2.x de la API.

`EnableKey`

En el siguiente ejemplo de código, se muestra cómo utilizar `EnableKey`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously enables the specified key.
```

```
     *
     * @param keyId the ID of the key to enable
     * @return a {@link CompletableFuture} that completes when the key has been
enabled
     */
    public CompletableFuture<Void> enableKeyAsync(String keyId) {
        EnableKeyRequest enableKeyRequest = EnableKeyRequest.builder()
            .keyId(keyId)
            .build();

        CompletableFuture<EnableKeyResponse> responseFuture =
getAsyncClient().enableKey(enableKeyRequest);
        responseFuture.whenComplete((response, exception) -> {
            if (exception == null) {
                logger.info("Key with ID [{}] has been enabled.", keyId);
            } else {
                if (exception instanceof KmsException kmsEx) {
                    throw new RuntimeException("KMS error occurred while enabling
key: " + kmsEx.getMessage(), kmsEx);
                } else {
                    throw new RuntimeException("An unexpected error occurred while
enabling key: " + exception.getMessage(), exception);
                }
            }
        });

        return responseFuture.thenApply(response -> null);
    }
```

- Para obtener más información sobre la API, consulta EnableKeyla Referencia AWS SDK for Java 2.x de la API.

`Encrypt`

En el siguiente ejemplo de código, se muestra cómo utilizar `Encrypt`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Encrypts the given text asynchronously using the specified KMS client and key
ID.
    *
    * @param keyId the ID of the KMS key to use for encryption
    * @param text the text to encrypt
    * @return a CompletableFuture that completes with the encrypted data as an
SdkBytes object
    */
   public CompletableFuture<SdkBytes> encryptDataAsync(String keyId, String text) {
       SdkBytes myBytes = SdkBytes.fromUtf8String(text);
       EncryptRequest encryptRequest = EncryptRequest.builder()
           .keyId(keyId)
           .plaintext(myBytes)
           .build();

       CompletableFuture<EncryptResponse> responseFuture =
getAsyncClient().encrypt(encryptRequest).toCompletableFuture();
       return responseFuture.whenComplete((response, ex) -> {
           if (response != null) {
               String algorithm = response.encryptionAlgorithm().toString();
               logger.info("The string was encrypted with algorithm {}.",
algorithm);
           } else {
               throw new RuntimeException(ex);
           }
       }).thenApply(EncryptResponse::ciphertextBlob);
   }
```

- Para obtener información sobre la API, consulte Encrypt en la referencia de la API de AWS SDK for Java 2.x .

`ListAliases`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListAliases`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously lists all the aliases in the current AWS account.
    *
    * @return a {@link CompletableFuture} that completes when the list of aliases
has been processed
    */
   public CompletableFuture<Object> listAllAliasesAsync() {
       ListAliasesRequest aliasesRequest = ListAliasesRequest.builder()
           .limit(15)
           .build();

       ListAliasesPublisher paginator =
getAsyncClient().listAliasesPaginator(aliasesRequest);
       return paginator.subscribe(response -> {
               response.aliases().forEach(alias ->
                   logger.info("The alias name is: " + alias.aliasName())
               );
           })
           .thenApply(v -> null)
           .exceptionally(ex -> {
               if (ex.getCause() instanceof KmsException) {
                   KmsException e = (KmsException) ex.getCause();
                   throw new RuntimeException("A KMS exception occurred: " +
e.getMessage());
               } else {
                   throw new RuntimeException("An unexpected error occurred: " +
ex.getMessage());
               }
           });
   }
```

- Para obtener más información sobre la API, consulta ListAliasesla Referencia AWS SDK for Java 2.x de la API.

`ListGrants`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListGrants`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously displays the grant IDs for the specified key ID.
    *
    * @param keyId the ID of the AWS KMS key for which to list the grants
    * @return a {@link CompletableFuture} that, when completed, will be null if
the operation succeeded, or will throw a {@link RuntimeException} if the operation
failed
    * @throws RuntimeException if there was an error listing the grants, either due
to an {@link KmsException} or an unexpected error
    */
   public CompletableFuture<Object> displayGrantIdsAsync(String keyId) {
       ListGrantsRequest grantsRequest = ListGrantsRequest.builder()
           .keyId(keyId)
           .limit(15)
           .build();

       ListGrantsPublisher paginator =
getAsyncClient().listGrantsPaginator(grantsRequest);
       return paginator.subscribe(response -> {
               response.grants().forEach(grant -> {
                   logger.info("The grant Id is: " + grant.grantId());
               });
           })
           .thenApply(v -> null)
```

```
            .exceptionally(ex -> {
                Throwable cause = ex.getCause();
                if (cause instanceof KmsException) {
                    throw new RuntimeException("Failed to list grants: " +
cause.getMessage(), cause);
                } else {
                    throw new RuntimeException("An unexpected error occurred: " +
cause.getMessage(), cause);
                }
            });
    }
```

- Para obtener más información sobre la API, consulta ListGrantsla Referencia AWS SDK for Java 2.x de la API.

`ListKeyPolicies`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListKeyPolicies`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously retrieves the key policy for the specified key ID and policy
name.
     *
     * @param keyId       the ID of the AWS KMS key for which to retrieve the policy
     * @param policyName the name of the key policy to retrieve
     * @return a {@link CompletableFuture} that, when completed, contains the key
policy as a {@link String}
     */
    public CompletableFuture<String> getKeyPolicyAsync(String keyId, String
policyName) {
        GetKeyPolicyRequest policyRequest = GetKeyPolicyRequest.builder()
            .keyId(keyId)
```

```
            .policyName(policyName)
            .build();

        return getAsyncClient().getKeyPolicy(policyRequest)
            .thenApply(response -> {
                String policy = response.policy();
                logger.info("The response is: " + policy);
                return policy;
            })
            .exceptionally(ex -> {
                throw new RuntimeException("Failed to get key policy", ex);
            });
    }
```

- Para obtener más información sobre la API, consulta ListKeyPolicieslа Referencia AWS SDK for Java 2.x de la API.

`ListKeys`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListKeys`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.kms.KmsAsyncClient;
import software.amazon.awssdk.services.kms.model.ListKeysRequest;
import software.amazon.awssdk.services.kms.paginators.ListKeysPublisher;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloKMS {
    public static void main(String[] args) {
        listAllKeys();
    }

    public static void listAllKeys() {
        KmsAsyncClient kmsAsyncClient = KmsAsyncClient.builder()
            .build();
        ListKeysRequest listKeysRequest = ListKeysRequest.builder()
            .limit(15)
            .build();

        /*
         * The `subscribe` method is required when using paginator methods in the
 AWS SDK
         * because paginator methods return an instance of a `ListKeysPublisher`,
 which is
         * based on a reactive stream. This allows asynchronous retrieval of
 paginated
         * results as they become available. By subscribing to the stream, we can
 process
         * each page of results as they are emitted.
         */
        ListKeysPublisher keysPublisher =
 kmsAsyncClient.listKeysPaginator(listKeysRequest);
        CompletableFuture<Void> future = keysPublisher
            .subscribe(r -> r.keys().forEach(key ->
                System.out.println("The key ARN is: " + key.keyArn() + ". The key Id
 is: " + key.keyId())))
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    System.err.println("Error occurred: " + exception.getMessage());
                } else {
                    System.out.println("Successfully listed all keys.");
                }
            });

        try {
            future.join();
        } catch (Exception e) {
            System.err.println("Failed to list keys: " + e.getMessage());
        }
```

```
    }
}
```

- Para obtener más información sobre la API, consulta ListKeysla Referencia AWS SDK for Java 2.x de la API.

`RevokeGrant`

En el siguiente ejemplo de código, se muestra cómo utilizar `RevokeGrant`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Revokes a grant for the specified AWS KMS key asynchronously.
    *
    * @param keyId   The ID or key ARN of the AWS KMS key.
    * @param grantId The identifier of the grant to be revoked.
    * @return A {@link CompletableFuture} representing the asynchronous operation
of revoking the grant.
    *         The {@link CompletableFuture} will complete with a {@link
RevokeGrantResponse} object
    *         if the operation is successful, or with a {@code null} value if an
error occurs.
    */
   public CompletableFuture<RevokeGrantResponse> revokeKeyGrantAsync(String keyId,
String grantId) {
       RevokeGrantRequest grantRequest = RevokeGrantRequest.builder()
           .keyId(keyId)
           .grantId(grantId)
           .build();

       CompletableFuture<RevokeGrantResponse> responseFuture =
getAsyncClient().revokeGrant(grantRequest);
       responseFuture.whenComplete((response, exception) -> {
```

```
            if (exception == null) {
                logger.info("Grant ID: [" + grantId + "] was successfully
revoked!");
            } else {
                if (exception instanceof KmsException kmsEx) {
                    if (kmsEx.getMessage().contains("Grant does not exist")) {
                        logger.info("The grant ID '" + grantId + "' does not exist.
Moving on...");
                    } else {
                        throw new RuntimeException("KMS error occurred: " +
kmsEx.getMessage(), kmsEx);
                    }
                } else {
                    throw new RuntimeException("An unexpected error occurred: " +
exception.getMessage(), exception);
                }
            }
        });

        return responseFuture;
    }
```

- Para obtener más información sobre la API, consulta RevokeGrantla Referencia AWS SDK for Java 2.x de la API.

`ScheduleKeyDeletion`

En el siguiente ejemplo de código, se muestra cómo utilizar `ScheduleKeyDeletion`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a KMS key asynchronously.
```

```
    *
    * <p><strong>Warning:</strong> Deleting a KMS key is a destructive and
potentially dangerous operation.
    * When a KMS key is deleted, all data that was encrypted under the KMS key
becomes unrecoverable.
    * This means that any files, databases, or other data that were encrypted using
the deleted KMS key
    * will become permanently inaccessible. Exercise extreme caution when deleting
KMS keys.</p>
    *
    * @param keyId the ID of the KMS key to delete
    * @return a {@link CompletableFuture} that completes when the key deletion is
scheduled
    */
   public CompletableFuture<Void> deleteKeyAsync(String keyId) {
       ScheduleKeyDeletionRequest deletionRequest =
ScheduleKeyDeletionRequest.builder()
           .keyId(keyId)
           .pendingWindowInDays(7)
           .build();

       return getAsyncClient().scheduleKeyDeletion(deletionRequest)
           .thenRun(() -> {
               logger.info("Key {} will be deleted in 7 days", keyId);
           })
           .exceptionally(throwable -> {
               throw new RuntimeException("Failed to schedule key deletion for key
ID: " + keyId, throwable);
           });
   }
```

- Para obtener más información sobre la API, consulta ScheduleKeyDeletionla Referencia AWS SDK for Java 2.x de la API.

`Sign`

En el siguiente ejemplo de código, se muestra cómo utilizar `Sign`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously signs and verifies data using AWS KMS.
     *
     * <p>The method performs the following steps:
     * <ol>
     *     <li>Creates an AWS KMS key with the specified key spec, key usage, and
 origin.</li>
     *     <li>Signs the provided message using the created KMS key and the RSASSA-
PSS-SHA-256 algorithm.</li>
     *     <li>Verifies the signature of the message using the created KMS key and
 the RSASSA-PSS-SHA-256 algorithm.</li>
     * </ol>
     *
     * @return a {@link CompletableFuture} that completes with the result of the
 signature verification,
     *         {@code true} if the signature is valid, {@code false} otherwise.
     * @throws KmsException if any error occurs during the KMS operations.
     * @throws RuntimeException if an unexpected error occurs.
     */
    public CompletableFuture<Boolean> signVerifyDataAsync() {
        String signMessage = "Here is the message that will be digitally signed";

        // Create an AWS KMS key used to digitally sign data.
        CreateKeyRequest createKeyRequest = CreateKeyRequest.builder()
            .keySpec(KeySpec.RSA_2048)
            .keyUsage(KeyUsageType.SIGN_VERIFY)
            .origin(OriginType.AWS_KMS)
            .build();

        return getAsyncClient().createKey(createKeyRequest)
            .thenCompose(createKeyResponse -> {
                String keyId = createKeyResponse.keyMetadata().keyId();
```

```
                SdkBytes messageBytes = SdkBytes.fromString(signMessage,
Charset.defaultCharset());
                SignRequest signRequest = SignRequest.builder()
                    .keyId(keyId)
                    .message(messageBytes)
                    .signingAlgorithm(SigningAlgorithmSpec.RSASSA_PSS_SHA_256)
                    .build();

                return getAsyncClient().sign(signRequest)
                    .thenCompose(signResponse -> {
                        byte[] signedBytes = signResponse.signature().asByteArray();

                        VerifyRequest verifyRequest = VerifyRequest.builder()
                            .keyId(keyId)

.message(SdkBytes.fromByteArray(signMessage.getBytes(Charset.defaultCharset())))

.signature(SdkBytes.fromByteBuffer(ByteBuffer.wrap(signedBytes)))

.signingAlgorithm(SigningAlgorithmSpec.RSASSA_PSS_SHA_256)
                            .build();

                        return getAsyncClient().verify(verifyRequest)
                            .thenApply(verifyResponse -> {
                                return (boolean) verifyResponse.signatureValid();
                            });
                    });
            })
            .exceptionally(throwable -> {
               throw new RuntimeException("Failed to sign or verify data",
throwable);
            });
   }
```

- Para obtener información sobre la API, consulte Sign en la referencia de la API de AWS SDK for Java 2.x .

`TagResource`

En el siguiente ejemplo de código, se muestra cómo utilizar `TagResource`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously tags a KMS key with a specific tag.
     *
     * @param keyId the ID of the KMS key to be tagged
     * @return a {@link CompletableFuture} that completes when the tagging operation
is finished
     */
    public CompletableFuture<Void> tagKMSKeyAsync(String keyId) {
        Tag tag = Tag.builder()
            .tagKey("Environment")
            .tagValue("Production")
            .build();

        TagResourceRequest tagResourceRequest = TagResourceRequest.builder()
            .keyId(keyId)
            .tags(tag)
            .build();

        return getAsyncClient().tagResource(tagResourceRequest)
            .thenRun(() -> {
                logger.info("{} key was tagged", keyId);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to tag the KMS key", throwable);
            });
    }
```

- Para obtener más información sobre la API, consulta TagResourcela Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Lambda usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Lambda.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

AWS Las contribuciones de la comunidad son ejemplos que fueron creados y mantenidos por varios AWS equipos. Para enviar comentarios, utilice el mecanismo previsto en los repositorios vinculados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios
- Ejemplos de tecnología sin servidor
- AWS contribuciones de la comunidad

Introducción

Introducción a Lambda

El siguiente ejemplo de código muestra cómo empezar a utilizar Lambda.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Lists the AWS Lambda functions associated with the current AWS account.
     *
     * @param awsLambda an instance of the {@link LambdaClient} class, which is used
to interact with the AWS Lambda service
     *
     * @throws LambdaException if an error occurs while interacting with the AWS
Lambda service
     */
    public static void listFunctions(LambdaClient awsLambda) {
        try {
            ListFunctionsResponse functionResult = awsLambda.listFunctions();
            List<FunctionConfiguration> list = functionResult.functions();
            for (FunctionConfiguration config : list) {
                System.out.println("The function name is " + config.functionName());
            }

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta ListFunctionsla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crear un rol de IAM y una función de Lambda y, a continuación, cargar el código de controlador.
- Invocar la función con un único parámetro y obtener resultados.
- Actualizar el código de la función y configurar con una variable de entorno.
- Invocar la función con un nuevo parámetro y obtener resultados. Mostrar el registro de ejecución devuelto.
- Enumerar las funciones de su cuenta y, luego, limpiar los recursos.

Para obtener información, consulte Crear una función de Lambda con la consola.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/*
 *  Lambda function names appear as:
 *
 *  arn:aws:lambda:us-west-2:335556666777:function:HelloFunction
 *
 *  To find this value, look at the function in the AWS Management Console.
 *
 *  Before running this Java code example, set up your development environment,
including your credentials.
 *
 *  For more information, see this documentation topic:
 *
 *  https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 *  This example performs the following tasks:
 *
 * 1. Creates an AWS Lambda function.
 * 2. Gets a specific AWS Lambda function.
 * 3. Lists all Lambda functions.
 * 4. Invokes a Lambda function.
 * 5. Updates the Lambda function code and invokes it again.
 * 6. Updates a Lambda function's configuration value.
 * 7. Deletes a Lambda function.
```

```
 */

public class LambdaScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws InterruptedException {
        final String usage = """

            Usage:
                <functionName> <role> <handler> <bucketName> <key>\s

            Where:
                functionName - The name of the Lambda function.\s
                role - The AWS Identity and Access Management (IAM) service role
 that has Lambda permissions.\s
                handler - The fully qualified method name (for example,
 example.Handler::handleRequest).\s
                bucketName - The Amazon Simple Storage Service (Amazon S3) bucket
 name that contains the .zip or .jar used to update the Lambda function's code.\s
                key - The Amazon S3 key name that represents the .zip or .jar (for
 example, LambdaHello-1.0-SNAPSHOT.jar).
                """;

       if (args.length != 5) {
             System.out.println(usage);
             return;
       }

       String functionName = args[0];
       String role = args[1];
       String handler = args[2];
       String bucketName = args[3];
       String key = args[4];
       LambdaClient awsLambda = LambdaClient.builder()
           .build();

       System.out.println(DASHES);
       System.out.println("Welcome to the AWS Lambda Basics scenario.");
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("1. Create an AWS Lambda function.");
       String funArn = createLambdaFunction(awsLambda, functionName, key,
 bucketName, role, handler);
```

```
        System.out.println("The AWS Lambda ARN is " + funArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Get the " + functionName + " AWS Lambda function.");
        getFunction(awsLambda, functionName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. List all AWS Lambda functions.");
        listFunctions(awsLambda);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Invoke the Lambda function.");
        System.out.println("*** Sleep for 1 min to get Lambda function ready.");
        Thread.sleep(60000);
        invokeFunction(awsLambda, functionName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Update the Lambda function code and invoke it
again.");
        updateFunctionCode(awsLambda, functionName, bucketName, key);
        System.out.println("*** Sleep for 1 min to get Lambda function ready.");
        Thread.sleep(60000);
        invokeFunction(awsLambda, functionName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Update a Lambda function's configuration value.");
        updateFunctionConfiguration(awsLambda, functionName, handler);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Delete the AWS Lambda function.");
        LambdaScenario.deleteLambdaFunction(awsLambda, functionName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The AWS Lambda scenario completed successfully");
        System.out.println(DASHES);
        awsLambda.close();
    }
```

```
   /**
    * Creates a new Lambda function in AWS using the AWS Lambda Java API.
    *
    * @param awsLambda    the AWS Lambda client used to interact with the AWS
Lambda service
    * @param functionName the name of the Lambda function to create
    * @param key          the S3 key of the function code
    * @param bucketName   the name of the S3 bucket containing the function code
    * @param role         the IAM role to assign to the Lambda function
    * @param handler      the fully qualified class name of the function handler
    * @return the Amazon Resource Name (ARN) of the created Lambda function
    */
   public static String createLambdaFunction(LambdaClient awsLambda,
                                              String functionName,
                                              String key,
                                              String bucketName,
                                              String role,
                                              String handler) {

       try {
           LambdaWaiter waiter = awsLambda.waiter();
           FunctionCode code = FunctionCode.builder()
               .s3Key(key)
               .s3Bucket(bucketName)
               .build();

           CreateFunctionRequest functionRequest = CreateFunctionRequest.builder()
               .functionName(functionName)
               .description("Created by the Lambda Java API")
               .code(code)
               .handler(handler)
               .runtime(Runtime.JAVA17)
               .role(role)
               .build();

           // Create a Lambda function using a waiter
           CreateFunctionResponse functionResponse =
awsLambda.createFunction(functionRequest);
           GetFunctionRequest getFunctionRequest = GetFunctionRequest.builder()
               .functionName(functionName)
               .build();
           WaiterResponse<GetFunctionResponse> waiterResponse =
waiter.waitUntilFunctionExists(getFunctionRequest);
```

```
            waiterResponse.matched().response().ifPresent(System.out::println);
            return functionResponse.functionArn();

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }

    /**
     * Retrieves information about an AWS Lambda function.
     *
     * @param awsLambda    an instance of the {@link LambdaClient} class, which is
used to interact with the AWS Lambda service
     * @param functionName the name of the AWS Lambda function to retrieve
information about
     */
    public static void getFunction(LambdaClient awsLambda, String functionName) {
        try {
            GetFunctionRequest functionRequest = GetFunctionRequest.builder()
                .functionName(functionName)
                .build();

            GetFunctionResponse response = awsLambda.getFunction(functionRequest);
            System.out.println("The runtime of this Lambda function is " +
response.configuration().runtime());

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    /**
     * Lists the AWS Lambda functions associated with the current AWS account.
     *
     * @param awsLambda an instance of the {@link LambdaClient} class, which is used
to interact with the AWS Lambda service
     *
     * @throws LambdaException if an error occurs while interacting with the AWS
Lambda service
     */
    public static void listFunctions(LambdaClient awsLambda) {
```

```
        try {
            ListFunctionsResponse functionResult = awsLambda.listFunctions();
            List<FunctionConfiguration> list = functionResult.functions();
            for (FunctionConfiguration config : list) {
                System.out.println("The function name is " + config.functionName());
            }

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    /**
     * Invokes a specific AWS Lambda function.
     *
     * @param awsLambda    an instance of {@link LambdaClient} to interact with the
AWS Lambda service
     * @param functionName the name of the AWS Lambda function to be invoked
     */
    public static void invokeFunction(LambdaClient awsLambda, String functionName) {
        InvokeResponse res;
        try {
            // Need a SdkBytes instance for the payload.
            JSONObject jsonObj = new JSONObject();
            jsonObj.put("inputValue", "2000");
            String json = jsonObj.toString();
            SdkBytes payload = SdkBytes.fromUtf8String(json);

            InvokeRequest request = InvokeRequest.builder()
                .functionName(functionName)
                .payload(payload)
                .build();

            res = awsLambda.invoke(request);
            String value = res.payload().asUtf8String();
            System.out.println(value);

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

```
   /**
    * Updates the code for an AWS Lambda function.
    *
    * @param awsLambda  the AWS Lambda client
    * @param functionName the name of the Lambda function to update
    * @param bucketName the name of the S3 bucket where the function code is
located
    * @param key the key (file name) of the function code in the S3 bucket
    * @throws LambdaException if there is an error updating the function code
    */
   public static void updateFunctionCode(LambdaClient awsLambda, String
functionName, String bucketName, String key) {
       try {
           LambdaWaiter waiter = awsLambda.waiter();
           UpdateFunctionCodeRequest functionCodeRequest =
UpdateFunctionCodeRequest.builder()
               .functionName(functionName)
               .publish(true)
               .s3Bucket(bucketName)
               .s3Key(key)
               .build();

           UpdateFunctionCodeResponse response =
awsLambda.updateFunctionCode(functionCodeRequest);
           GetFunctionConfigurationRequest getFunctionConfigRequest =
GetFunctionConfigurationRequest.builder()
               .functionName(functionName)
               .build();

           WaiterResponse<GetFunctionConfigurationResponse> waiterResponse = waiter
               .waitUntilFunctionUpdated(getFunctionConfigRequest);
           waiterResponse.matched().response().ifPresent(System.out::println);
           System.out.println("The last modified value is " +
response.lastModified());

       } catch (LambdaException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }

   /**
    * Updates the configuration of an AWS Lambda function.
    *
```

```
    * @param awsLambda     the {@link LambdaClient} instance to use for the AWS
Lambda operation
    * @param functionName  the name of the AWS Lambda function to update
    * @param handler       the new handler for the AWS Lambda function
    *
    * @throws LambdaException if there is an error while updating the function
configuration
    */
   public static void updateFunctionConfiguration(LambdaClient awsLambda, String
functionName, String handler) {
       try {
           UpdateFunctionConfigurationRequest configurationRequest =
UpdateFunctionConfigurationRequest.builder()
                .functionName(functionName)
                .handler(handler)
                .runtime(Runtime.JAVA17)
                .build();

           awsLambda.updateFunctionConfiguration(configurationRequest);

       } catch (LambdaException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }

   /**
    * Deletes an AWS Lambda function.
    *
    * @param awsLambda     an instance of the {@link LambdaClient} class, which is
used to interact with the AWS Lambda service
    * @param functionName  the name of the Lambda function to be deleted
    *
    * @throws LambdaException if an error occurs while deleting the Lambda function
    */
   public static void deleteLambdaFunction(LambdaClient awsLambda, String
functionName) {
       try {
           DeleteFunctionRequest request = DeleteFunctionRequest.builder()
               .functionName(functionName)
               .build();

           awsLambda.deleteFunction(request);
           System.out.println("The " + functionName + " function was deleted");
```

```
        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateFunction
  - DeleteFunction
  - GetFunction
  - Invoke
  - ListFunctions
  - UpdateFunctionCode
  - UpdateFunctionConfiguration

Acciones

`CreateFunction`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateFunction`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new Lambda function in AWS using the AWS Lambda Java API.
     *
     * @param awsLambda    the AWS Lambda client used to interact with the AWS
Lambda service
```

```
     * @param functionName the name of the Lambda function to create
     * @param key          the S3 key of the function code
     * @param bucketName   the name of the S3 bucket containing the function code
     * @param role         the IAM role to assign to the Lambda function
     * @param handler      the fully qualified class name of the function handler
     * @return the Amazon Resource Name (ARN) of the created Lambda function
     */
    public static String createLambdaFunction(LambdaClient awsLambda,
                                               String functionName,
                                               String key,
                                               String bucketName,
                                               String role,
                                               String handler) {

        try {
            LambdaWaiter waiter = awsLambda.waiter();
            FunctionCode code = FunctionCode.builder()
                .s3Key(key)
                .s3Bucket(bucketName)
                .build();

            CreateFunctionRequest functionRequest = CreateFunctionRequest.builder()
                .functionName(functionName)
                .description("Created by the Lambda Java API")
                .code(code)
                .handler(handler)
                .runtime(Runtime.JAVA17)
                .role(role)
                .build();

            // Create a Lambda function using a waiter
            CreateFunctionResponse functionResponse =
awsLambda.createFunction(functionRequest);
            GetFunctionRequest getFunctionRequest = GetFunctionRequest.builder()
                .functionName(functionName)
                .build();
            WaiterResponse<GetFunctionResponse> waiterResponse =
waiter.waitUntilFunctionExists(getFunctionRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            return functionResponse.functionArn();

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
```

```
        }
        return "";
    }
```

- Para obtener más información sobre la API, consulta CreateFunctionla Referencia AWS SDK for Java 2.x de la API.

`DeleteFunction`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteFunction`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes an AWS Lambda function.
     *
     * @param awsLambda     an instance of the {@link LambdaClient} class, which is
used to interact with the AWS Lambda service
     * @param functionName  the name of the Lambda function to be deleted
     *
     * @throws LambdaException if an error occurs while deleting the Lambda function
     */
    public static void deleteLambdaFunction(LambdaClient awsLambda, String
functionName) {
        try {
            DeleteFunctionRequest request = DeleteFunctionRequest.builder()
                .functionName(functionName)
                .build();

            awsLambda.deleteFunction(request);
            System.out.println("The " + functionName + " function was deleted");

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
```

```
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteFunctionla Referencia AWS SDK for Java 2.x de la API.

`GetFunction`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetFunction`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Retrieves information about an AWS Lambda function.
     *
     * @param awsLambda    an instance of the {@link LambdaClient} class, which is
used to interact with the AWS Lambda service
     * @param functionName the name of the AWS Lambda function to retrieve
information about
     */
    public static void getFunction(LambdaClient awsLambda, String functionName) {
        try {
            GetFunctionRequest functionRequest = GetFunctionRequest.builder()
                .functionName(functionName)
                .build();

            GetFunctionResponse response = awsLambda.getFunction(functionRequest);
            System.out.println("The runtime of this Lambda function is " +
response.configuration().runtime());

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
```

```
        }
    }
```

- Para obtener más información sobre la API, consulta GetFunctionla Referencia AWS SDK for Java 2.x de la API.

`Invoke`

En el siguiente ejemplo de código, se muestra cómo utilizar `Invoke`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Invokes a specific AWS Lambda function.
     *
     * @param awsLambda    an instance of {@link LambdaClient} to interact with the
AWS Lambda service
     * @param functionName the name of the AWS Lambda function to be invoked
     */
    public static void invokeFunction(LambdaClient awsLambda, String functionName) {
        InvokeResponse res;
        try {
            // Need a SdkBytes instance for the payload.
            JSONObject jsonObj = new JSONObject();
            jsonObj.put("inputValue", "2000");
            String json = jsonObj.toString();
            SdkBytes payload = SdkBytes.fromUtf8String(json);

            InvokeRequest request = InvokeRequest.builder()
                .functionName(functionName)
                .payload(payload)
                .build();

            res = awsLambda.invoke(request);
```

```
            String value = res.payload().asUtf8String();
            System.out.println(value);

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Para obtener información sobre la API, consulte Invocar en la Referencia de la API de AWS SDK for Java 2.x .

`UpdateFunctionCode`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateFunctionCode`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Updates the code for an AWS Lambda function.
     *
     * @param awsLambda  the AWS Lambda client
     * @param functionName the name of the Lambda function to update
     * @param bucketName the name of the S3 bucket where the function code is
located
     * @param key the key (file name) of the function code in the S3 bucket
     * @throws LambdaException if there is an error updating the function code
     */
    public static void updateFunctionCode(LambdaClient awsLambda, String
functionName, String bucketName, String key) {
        try {
            LambdaWaiter waiter = awsLambda.waiter();
            UpdateFunctionCodeRequest functionCodeRequest =
UpdateFunctionCodeRequest.builder()
```

```
                .functionName(functionName)
                .publish(true)
                .s3Bucket(bucketName)
                .s3Key(key)
                .build();

            UpdateFunctionCodeResponse response =
awsLambda.updateFunctionCode(functionCodeRequest);
            GetFunctionConfigurationRequest getFunctionConfigRequest =
GetFunctionConfigurationRequest.builder()
                .functionName(functionName)
                .build();

            WaiterResponse<GetFunctionConfigurationResponse> waiterResponse = waiter
                .waitUntilFunctionUpdated(getFunctionConfigRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("The last modified value is " +
response.lastModified());

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta UpdateFunctionCodela Referencia AWS SDK for Java 2.x de la API.

`UpdateFunctionConfiguration`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateFunctionConfiguration`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Updates the configuration of an AWS Lambda function.
    *
    * @param awsLambda     the {@link LambdaClient} instance to use for the AWS
Lambda operation
    * @param functionName  the name of the AWS Lambda function to update
    * @param handler       the new handler for the AWS Lambda function
    *
    * @throws LambdaException if there is an error while updating the function
configuration
    */
   public static void updateFunctionConfiguration(LambdaClient awsLambda, String
functionName, String handler) {
       try {
           UpdateFunctionConfigurationRequest configurationRequest =
UpdateFunctionConfigurationRequest.builder()
                   .functionName(functionName)
                   .handler(handler)
                   .runtime(Runtime.JAVA17)
                   .build();

           awsLambda.updateFunctionConfiguration(configurationRequest);

       } catch (LambdaException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta UpdateFunctionConfigurationla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación de una aplicación sin servidor para administrar fotos

En el siguiente ejemplo de código se muestra cómo crear una aplicación sin servidor que permita a los usuarios administrar fotos mediante etiquetas.

SDK para Java 2.x

Muestra cómo desarrollar una aplicación de administración de activos fotográficos que detecte las etiquetas de las imágenes mediante Amazon Rekognition y las almacene para su posterior recuperación.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Para profundizar en el origen de este ejemplo, consulte la publicación en Comunidad de AWS.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB
- Lambda
- Amazon Rekognition
- Amazon S3
- Amazon SNS

Creación de una aplicación para analizar los comentarios de los clientes

El siguiente ejemplo de código muestra cómo crear una aplicación que analice las tarjetas de comentarios de los clientes, las traduzca del idioma original, determine sus opiniones y genere un archivo de audio a partir del texto traducido.

SDK para Java 2.x

Esta aplicación de ejemplo analiza y almacena las tarjetas de comentarios de los clientes. Concretamente, satisface la necesidad de un hotel ficticio en la ciudad de Nueva York. El hotel recibe comentarios de los huéspedes en varios idiomas en forma de tarjetas de comentarios físicas. Esos comentarios se cargan en la aplicación a través de un cliente web. Una vez cargada la imagen de una tarjeta de comentarios, se llevan a cabo los siguientes pasos:

- El texto se extrae de la imagen mediante Amazon Textract.
- Amazon Comprehend determina la opinión del texto extraído y su idioma.
- El texto extraído se traduce al inglés mediante Amazon Translate.
- Amazon Polly sintetiza un archivo de audio a partir del texto extraído.

La aplicación completa se puede implementar con AWS CDK. Para obtener el código fuente y las instrucciones de implementación, consulte el proyecto en GitHub.

Servicios utilizados en este ejemplo

- Amazon Comprehend
- Lambda
- Amazon Polly
- Amazon Textract
- Amazon Translate

Uso de API Gateway para invocar una función de Lambda

El siguiente ejemplo de código muestra cómo crear una AWS Lambda función invocada por Amazon API Gateway.

SDK para Java 2.x

Muestra cómo crear una AWS Lambda función mediante la API de tiempo de ejecución Lambda Java. En este ejemplo, se invocan diferentes AWS servicios para realizar un caso de uso específico. En este ejemplo se indica cómo crear una función de Lambda invocada por Amazon API Gateway que escanea una tabla de Amazon DynamoDB en busca de aniversarios laborales y utiliza Amazon Simple Notification Service (Amazon SNS) para enviar un mensaje de texto a sus empleados que les felicite en la fecha de su primer aniversario.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB
- Lambda
- Amazon SNS

Uso de Step Functions para invocar funciones de Lambda

El siguiente ejemplo de código muestra cómo crear una máquina de AWS Step Functions estados que invoque AWS Lambda funciones en secuencia.

SDK para Java 2.x

Muestra cómo crear un flujo de trabajo AWS sin servidor mediante AWS Step Functions y el. AWS SDK for Java 2.x Cada paso del flujo de trabajo se implementa mediante una AWS Lambda función.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- DynamoDB
- Lambda
- Amazon SES
- Step Functions

Uso de eventos programados para invocar una función de Lambda

El siguiente ejemplo de código muestra cómo crear una AWS Lambda función invocada por un evento EventBridge programado de Amazon.

SDK para Java 2.x

Muestra cómo crear un evento EventBridge programado de Amazon que invoque una AWS Lambda función. Configure EventBridge para usar una expresión cron para programar cuándo se invoca la función Lambda. En este ejemplo, creará una función de Lambda utilizando la API de tiempo de ejecución de Java de Lambda. En este ejemplo, se invocan diferentes AWS servicios para realizar un caso de uso específico. Este ejemplo indica cómo crear una aplicación que envíe un mensaje de texto a sus empleados para felicitarles por su primer aniversario.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- CloudWatch Registros
- DynamoDB
- EventBridge
- Lambda
- Amazon SNS

Usa la API de Neptune para consultar datos de grafos

El siguiente ejemplo de código muestra cómo utilizar la API de Neptune para consultar datos de grafos.

SDK para Java 2.x

Muestra cómo utilizar la API Java de Amazon Neptune para crear una función de Lambda que consulte los datos de grafos dentro de la VPC.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Lambda
- Neptune

Ejemplos de tecnología sin servidor

Conexión a una base de datos de Amazon RDS en una función de Lambda

En el siguiente ejemplo de código, se muestra cómo implementar una función de Lambda que se conecta a una base de datos de RDS. La función realiza una solicitud sencilla a la base de datos y devuelve el resultado.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Conexión a una base de datos de Amazon RDS en una función de Lambda mediante Java.

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.APIGatewayProxyRequestEvent;
import com.amazonaws.services.lambda.runtime.events.APIGatewayProxyResponseEvent;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
```

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rdsdata.RdsDataClient;
import software.amazon.awssdk.services.rdsdata.model.ExecuteStatementRequest;
import software.amazon.awssdk.services.rdsdata.model.ExecuteStatementResponse;
import software.amazon.awssdk.services.rdsdata.model.Field;

import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.PreparedStatement;
import java.sql.ResultSet;

public class RdsLambdaHandler implements RequestHandler<APIGatewayProxyRequestEvent,
 APIGatewayProxyResponseEvent> {

    @Override
    public APIGatewayProxyResponseEvent handleRequest(APIGatewayProxyRequestEvent
 event, Context context) {
        APIGatewayProxyResponseEvent response = new APIGatewayProxyResponseEvent();

        try {
            // Obtain auth token
            String token = createAuthToken();

            // Define connection configuration
            String connectionString = String.format("jdbc:mysql://%s:%s/%s?
useSSL=true&requireSSL=true",
                    System.getenv("ProxyHostName"),
                    System.getenv("Port"),
                    System.getenv("DBName"));

            // Establish a connection to the database
            try (Connection connection =
 DriverManager.getConnection(connectionString, System.getenv("DBUserName"), token);
                 PreparedStatement statement = connection.prepareStatement("SELECT ?
 + ? AS sum")) {

                statement.setInt(1, 3);
                statement.setInt(2, 2);

                try (ResultSet resultSet = statement.executeQuery()) {
                    if (resultSet.next()) {
                        int sum = resultSet.getInt("sum");
                        response.setStatusCode(200);
                        response.setBody("The selected sum is: " + sum);
```

```
                    }
                }
            }

        } catch (Exception e) {
            response.setStatusCode(500);
            response.setBody("Error: " + e.getMessage());
        }

        return response;
    }

    private String createAuthToken() {
        // Create RDS Data Service client
        RdsDataClient rdsDataClient = RdsDataClient.builder()
                .region(Region.of(System.getenv("AWS_REGION")))
                .credentialsProvider(DefaultCredentialsProvider.create())
                .build();

        // Define authentication request
        ExecuteStatementRequest request = ExecuteStatementRequest.builder()
                .resourceArn(System.getenv("ProxyHostName"))
                .secretArn(System.getenv("DBUserName"))
                .database(System.getenv("DBName"))
                .sql("SELECT 'RDS IAM Authentication'")
                .build();

        // Execute request and obtain authentication token
        ExecuteStatementResponse response = rdsDataClient.executeStatement(request);
        Field tokenField = response.records().get(0).get(0);

        return tokenField.stringValue();
    }
}
```

Invocar una función de Lambda desde un desencadenador de Kinesis

En el siguiente ejemplo de código se muestra cómo implementar una función de Lambda que recibe un evento activado al recibir registros de un flujo de Kinesis. La función recupera la carga útil de Kinesis, la decodifica desde Base64 y registra el contenido del registro.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Uso de un evento de Kinesis con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package example;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.LambdaLogger;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.KinesisEvent;

public class Handler implements RequestHandler<KinesisEvent, Void> {
    @Override
    public Void handleRequest(final KinesisEvent event, final Context context) {
        LambdaLogger logger = context.getLogger();
        if (event.getRecords().isEmpty()) {
            logger.log("Empty Kinesis Event received");
            return null;
        }
        for (KinesisEvent.KinesisEventRecord record : event.getRecords()) {
            try {
                logger.log("Processed Event with EventId: "+record.getEventID());
                String data = new String(record.getKinesis().getData().array());
                logger.log("Data:"+ data);
                // TODO: Do interesting work based on the new data
            }
            catch (Exception ex) {
                logger.log("An error occurred:"+ex.getMessage());
                throw ex;
            }
        }
        logger.log("Successfully processed:"+event.getRecords().size()+" records");
        return null;
    }
```

```
}
```

Invocación de una función de Lambda desde un desencadenador de DynamoDB

El siguientes ejemplo de código muestra cómo implementar una función de Lambda que recibe un evento desencadenado al recibir registros de una secuencia de DynamoDB. La función recupera la carga útil de DynamoDB y registra el contenido del registro.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Consumo de un evento de DynamoDB con Lambda mediante Java.

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.DynamodbEvent;
import
 com.amazonaws.services.lambda.runtime.events.DynamodbEvent.DynamodbStreamRecord;
import com.google.gson.Gson;
import com.google.gson.GsonBuilder;

public class example implements RequestHandler<DynamodbEvent, Void> {

    private static final Gson GSON = new GsonBuilder().setPrettyPrinting().create();

    @Override
    public Void handleRequest(DynamodbEvent event, Context context) {
        System.out.println(GSON.toJson(event));
        event.getRecords().forEach(this::logDynamoDBRecord);
        return null;
    }

    private void logDynamoDBRecord(DynamodbStreamRecord record) {
        System.out.println(record.getEventID());
        System.out.println(record.getEventName());
```

```
        System.out.println("DynamoDB Record: " + GSON.toJson(record.getDynamodb()));
    }
}
```

Invocación de una función de Lambda desde un desencadenador de Amazon DocumentDB

El siguiente ejemplo de código muestra cómo implementar una función de Lambda que recibe un evento desencadenado al recibir registros de una secuencia de cambios de DocumentDB. La función recupera la carga útil de DocumentDB y registra el contenido del registro.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Cómo consumir un evento de Amazon DocumentDB con Lambda mediante Java.

```
import java.util.List;
import java.util.Map;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;

public class Example implements RequestHandler<Map<String, Object>, String> {

    @SuppressWarnings("unchecked")
    @Override
    public String handleRequest(Map<String, Object> event, Context context) {
        List<Map<String, Object>> events = (List<Map<String, Object>>)
 event.get("events");
        for (Map<String, Object> record : events) {
            Map<String, Object> eventData = (Map<String, Object>)
 record.get("event");
            processEventData(eventData);
        }

        return "OK";
    }
```

```
    @SuppressWarnings("unchecked")
    private void processEventData(Map<String, Object> eventData) {
        String operationType = (String) eventData.get("operationType");
        System.out.println("operationType: %s".formatted(operationType));

        Map<String, Object> ns = (Map<String, Object>) eventData.get("ns");

        String db = (String) ns.get("db");
        System.out.println("db: %s".formatted(db));
        String coll = (String) ns.get("coll");
        System.out.println("coll: %s".formatted(coll));

        Map<String, Object> fullDocument = (Map<String, Object>)
 eventData.get("fullDocument");
        System.out.println("fullDocument: %s".formatted(fullDocument));
    }

}
```

Invocación de una función de Lambda desde un desencadenador de Amazon MSK

El siguientes ejemplo de código muestra cómo implementar una función de Lambda que recibe un evento desencadenado al recibir registros de un clúster de Amazon MSK. La función recupera la carga útil de MSK y registra el contenido del registro.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Uso de un evento de Amazon MSK con Lambda mediante Java.

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.KafkaEvent;
```

```
import com.amazonaws.services.lambda.runtime.events.KafkaEvent.KafkaEventRecord;

import java.util.Base64;
import java.util.Map;

public class Example implements RequestHandler<KafkaEvent, Void> {

    @Override
    public Void handleRequest(KafkaEvent event, Context context) {
        for (Map.Entry<String, java.util.List<KafkaEventRecord>> entry :
 event.getRecords().entrySet()) {
            String key = entry.getKey();
            System.out.println("Key: " + key);

            for (KafkaEventRecord record : entry.getValue()) {
                System.out.println("Record: " + record);

                byte[] value = Base64.getDecoder().decode(record.getValue());
                String message = new String(value);
                System.out.println("Message: " + message);
            }
        }

        return null;
    }
}
```

Invocación de una función de Lambda desde un desencadenador de Amazon S3

En el siguiente ejemplo de código se muestra cómo implementar una función de Lambda que recibe un evento activado al cargar un objeto en un bucket de S3. La función recupera el nombre del bucket de S3 y la clave del objeto del parámetro de evento y llama a la API de Amazon S3 para recuperar y registrar el tipo de contenido del objeto.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos sin servidor.

Uso de un evento de S3 con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package example;

import software.amazon.awssdk.services.s3.model.HeadObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadObjectResponse;
import software.amazon.awssdk.services.s3.S3Client;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.S3Event;
import
 com.amazonaws.services.lambda.runtime.events.models.s3.S3EventNotification.S3EventNotificat

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

public class Handler implements RequestHandler<S3Event, String> {
    private static final Logger logger = LoggerFactory.getLogger(Handler.class);
    @Override
    public String handleRequest(S3Event s3event, Context context) {
        try {
          S3EventNotificationRecord record = s3event.getRecords().get(0);
          String srcBucket = record.getS3().getBucket().getName();
          String srcKey = record.getS3().getObject().getUrlDecodedKey();

          S3Client s3Client = S3Client.builder().build();
          HeadObjectResponse headObject = getHeadObject(s3Client, srcBucket,
 srcKey);

          logger.info("Successfully retrieved " + srcBucket + "/" + srcKey + " of
 type " + headObject.contentType());

          return "Ok";
        } catch (Exception e) {
          throw new RuntimeException(e);
        }
    }

    private HeadObjectResponse getHeadObject(S3Client s3Client, String bucket,
 String key) {
        HeadObjectRequest headObjectRequest = HeadObjectRequest.builder()
```

```
                .bucket(bucket)
                .key(key)
                .build();
        return s3Client.headObject(headObjectRequest);
    }
}
```

Invocación de una función de Lambda desde un desencadenador de Amazon SNS

En el siguiente ejemplo de código se muestra cómo implementar una función de Lambda que recibe un evento activado al recibir mensajes de un tema de SNS. La función recupera los mensajes del parámetro de eventos y registra el contenido de cada mensaje.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Uso de un evento de SNS con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package example;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.LambdaLogger;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.SNSEvent;
import com.amazonaws.services.lambda.runtime.events.SNSEvent.SNSRecord;


import java.util.Iterator;
import java.util.List;

public class SNSEventHandler implements RequestHandler<SNSEvent, Boolean> {
    LambdaLogger logger;

    @Override
```

```
    public Boolean handleRequest(SNSEvent event, Context context) {
        logger = context.getLogger();
        List<SNSRecord> records = event.getRecords();
        if (!records.isEmpty()) {
            Iterator<SNSRecord> recordsIter = records.iterator();
            while (recordsIter.hasNext()) {
                processRecord(recordsIter.next());
            }
        }
        return Boolean.TRUE;
    }

    public void processRecord(SNSRecord record) {
        try {
            String message = record.getSNS().getMessage();
            logger.log("message: " + message);
        } catch (Exception e) {
            throw new RuntimeException(e);
        }
    }

}
```

Invocar una función de Lambda desde un desencadenador de Amazon SQS

En el siguiente ejemplo de código se muestra cómo implementar una función de Lambda que recibe un evento activado al recibir mensajes de una cola de SQS. La función recupera los mensajes del parámetro de eventos y registra el contenido de cada mensaje.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Uso de un evento de SQS con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.SQSEvent;
import com.amazonaws.services.lambda.runtime.events.SQSEvent.SQSMessage;

public class Function implements RequestHandler<SQSEvent, Void> {
    @Override
    public Void handleRequest(SQSEvent sqsEvent, Context context) {
        for (SQSMessage msg : sqsEvent.getRecords()) {
            processMessage(msg, context);
        }
        context.getLogger().log("done");
        return null;
    }

    private void processMessage(SQSMessage msg, Context context) {
        try {
            context.getLogger().log("Processed message " + msg.getBody());

            // TODO: Do interesting work based on the new message

        } catch (Exception e) {
            context.getLogger().log("An error occurred");
            throw e;
        }

    }
}
```

Notificación de los errores de los elementos del lote de las funciones de Lambda mediante un desencadenador de Kinesis

En el siguiente ejemplo de código se muestra cómo implementar una respuesta por lotes parcial para funciones de Lambda que reciben eventos de un flujo de Kinesis. La función informa los errores de los elementos del lote en la respuesta y le indica a Lambda que vuelva a intentar esos mensajes más adelante.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Notificación de los errores de los elementos del lote de Kinesis con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.KinesisEvent;
import com.amazonaws.services.lambda.runtime.events.StreamsEventResponse;

import java.io.Serializable;
import java.util.ArrayList;
import java.util.List;

public class ProcessKinesisRecords implements RequestHandler<KinesisEvent,
 StreamsEventResponse> {

    @Override
    public StreamsEventResponse handleRequest(KinesisEvent input, Context context) {

        List<StreamsEventResponse.BatchItemFailure> batchItemFailures = new
 ArrayList<>();
        String curRecordSequenceNumber = "";

        for (KinesisEvent.KinesisEventRecord kinesisEventRecord :
 input.getRecords()) {
            try {
                //Process your record
                KinesisEvent.Record kinesisRecord = kinesisEventRecord.getKinesis();
                curRecordSequenceNumber = kinesisRecord.getSequenceNumber();

            } catch (Exception e) {
                /* Since we are working with streams, we can return the failed item
 immediately.
                   Lambda will immediately begin to retry processing from this
 failed item onwards. */
```

```
                batchItemFailures.add(new
 StreamsEventResponse.BatchItemFailure(curRecordSequenceNumber));
                return new StreamsEventResponse(batchItemFailures);
            }
        }

       return new StreamsEventResponse(batchItemFailures);
    }
}
```

Notificación de los errores de los elementos del lote de las funciones de Lambda con un desencadenador de DynamoDB

El siguiente ejemplo de código muestra cómo implementar una respuesta parcial por lotes para las funciones de Lambda que reciben eventos de una secuencia de DynamoDB. La función informa los errores de los elementos del lote en la respuesta y le indica a Lambda que vuelva a intentar esos mensajes más adelante.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Notificación de los errores de los elementos del lote de DynamoDB con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.DynamodbEvent;
import com.amazonaws.services.lambda.runtime.events.StreamsEventResponse;
import com.amazonaws.services.lambda.runtime.events.models.dynamodb.StreamRecord;

import java.util.ArrayList;
import java.util.List;
```

```
public class ProcessDynamodbRecords implements RequestHandler<DynamodbEvent,
 StreamsEventResponse> {

    @Override
    public StreamsEventResponse handleRequest(DynamodbEvent input, Context context)
 {

        List<StreamsEventResponse.BatchItemFailure> batchItemFailures = new
 ArrayList<>();
        String curRecordSequenceNumber = "";

        for (DynamodbEvent.DynamodbStreamRecord dynamodbStreamRecord :
 input.getRecords()) {
          try {
                //Process your record
                StreamRecord dynamodbRecord = dynamodbStreamRecord.getDynamodb();
                curRecordSequenceNumber = dynamodbRecord.getSequenceNumber();

            } catch (Exception e) {
                /* Since we are working with streams, we can return the failed item
 immediately.
                   Lambda will immediately begin to retry processing from this
 failed item onwards. */
                batchItemFailures.add(new
 StreamsEventResponse.BatchItemFailure(curRecordSequenceNumber));
                return new StreamsEventResponse(batchItemFailures);
            }
        }

       return new StreamsEventResponse();
    }
}
```

Notificación de los errores de los elementos del lote de las funciones de Lambda mediante un desencadenador de Amazon SQS.

En el siguiente ejemplo de código se muestra cómo implementar una respuesta por lotes parcial para funciones de Lambda que reciben eventos de una cola de SQS. La función informa los errores de los elementos del lote en la respuesta y le indica a Lambda que vuelva a intentar esos mensajes más adelante.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Notificación de los errores de los elementos del lote de SQS con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.SQSEvent;
import com.amazonaws.services.lambda.runtime.events.SQSBatchResponse;

import java.util.ArrayList;
import java.util.List;

public class ProcessSQSMessageBatch implements RequestHandler<SQSEvent,
 SQSBatchResponse> {
    @Override
    public SQSBatchResponse handleRequest(SQSEvent sqsEvent, Context context) {
         List<SQSBatchResponse.BatchItemFailure> batchItemFailures = new
 ArrayList<SQSBatchResponse.BatchItemFailure>();

         for (SQSEvent.SQSMessage message : sqsEvent.getRecords()) {
             try {
                 //process your message
             } catch (Exception e) {
                 //Add failed message identifier to the batchItemFailures list
                 batchItemFailures.add(new
 SQSBatchResponse.BatchItemFailure(message.getMessageId()));
             }
         }
         return new SQSBatchResponse(batchItemFailures);
     }
}
```

AWS contribuciones de la comunidad

Cómo crear y probar una aplicación sin servidor

El siguiente ejemplo de código muestra cómo crear y probar una aplicación sin servidor mediante API Gateway con Lambda y DynamoDB.

SDK para Java 2.x

Muestra cómo crear y probar una aplicación sin servidor que consta de una API Gateway con Lambda y DynamoDB mediante el SDK de Java.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB
- Lambda

Ejemplos de Amazon Lex con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes AWS SDK for Java 2.x mediante Amazon Lex.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Escenarios

Escenarios

Crear un chatbot de Amazon Lex

En el siguiente ejemplo de código se muestra cómo crear un chatbot para atraer a visitantes a su sitio web.

SDK para Java 2.x

Indica cómo utilizar la API de Amazon Lex para crear un Chatbot dentro de una aplicación web con el fin de atraer visitantes a su sitio web.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Amazon Comprehend
- Amazon Lex
- Amazon Translate

Ejemplos de Amazon Location con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el AWS SDK for Java 2.x uso de Amazon Location.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Introducción a Amazon Location

El siguiente ejemplo de código muestra cómo empezar a utilizar Amazon Location Service.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * In addition, you need to create a collection using the AWS Management
 * console. For information, see the following documentation.
 *
 * https://docs.aws.amazon.com/location/latest/developerguide/geofence-gs.html

 */
public class HelloLocation {

    private static LocationAsyncClient locationAsyncClient;
    private static final Logger logger =
 LoggerFactory.getLogger(HelloLocation.class);

    // This Singleton pattern ensures that only one `LocationClient`
    // instance.
    private static LocationAsyncClient getClient() {
        if (locationAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
```

```
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            locationAsyncClient = LocationAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return locationAsyncClient;
    }

    public static void main(String[] args) {
        final String usage = """

            Usage:
                <collectionName>

            Where:
                collectionName - The Amazon location collection name.
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionName = args[0];
        listGeofences(collectionName);
    }

    /**
     * Lists geofences from a specified geofence collection asynchronously.
     *
     * @param collectionName The name of the geofence collection to list geofences
from.
     * @return A {@link CompletableFuture} representing the result of the
asynchronous operation.
```

```
     *         The future completes when all geofences have been processed and
 logged.
     */
    public static CompletableFuture<Void> listGeofences(String collectionName) {
        ListGeofencesRequest geofencesRequest = ListGeofencesRequest.builder()
                .collectionName(collectionName)
                .build();

        ListGeofencesPublisher paginator =
 getClient().listGeofencesPaginator(geofencesRequest);
        CompletableFuture<Void> future = paginator.subscribe(response -> {
            if (response.entries().isEmpty()) {
                logger.info("No Geofences were found in the collection.");
            } else {
                response.entries().forEach(geofence ->
                        logger.info("Geofence ID: " + geofence.geofenceId())
                );
            }
        });
        return future;
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - ListGeofenceCollections
  - ListGeofences

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crear un mapa de Amazon Location.
- Crear una clave de API de Amazon Location.
- Mostrar la URL del mapa.
- Crear una colección de geocercas
- Almacenar una geometría de geocercas.

- Crear un recurso de rastreo
- Actualizar la posición de un dispositivo.
- Recuperar la actualización de posición más reciente de un dispositivo específico.
- Crear una calculadora de rutas.
- Determinar la distancia entre Seattle y Vancouver.
- Usa Amazon Location en un nivel superior APIs.
- Eliminar los activos de Amazon Location.

SDK para Java 2.x

> **Note**
>
> Hay más información sobre GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecutar un escenario interactivo en el que se muestren las características de Amazon Location Service.

```
/*
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 */
public class LocationScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    private static final Logger logger =
 LoggerFactory.getLogger(LocationScenario.class);
    static Scanner scanner = new Scanner(System.in);

    static LocationActions locationActions = new LocationActions();

    public static void main(String[] args) {
```

```
        final String usage = """

            Usage:    <mapName> <keyName> <collectionName> <geoId> <trackerName>
<calculatorName> <deviceId>

            Where:
              mapName - The name of the map to be create (e.g., "AWSMap").
              keyName - The name of the API key to create (e.g., "AWSApiKey").
              collectionName - The name of the geofence collection (e.g.,
"AWSLocationCollection").
              geoId - The geographic identifier used for the geofence or map (e.g.,
"geoId").
              trackerName - The name of the tracker (e.g., "geoTracker").
              calculatorName - The name of the route calculator (e.g.,
"AWSRouteCalc").
              deviceId - The ID of the device (e.g., "iPhone-112356").
            """;

        if (args.length != 7) {
            logger.info(usage);
            return;
        }

        String mapName = args[0];
        String keyName = args[1];
        String collectionName = args[2];
        String geoId = args[3];
        String trackerName = args[4];
        String calculatorName = args[5];
        String deviceId = args[6];

        logger.info("""
            AWS Location Service is a fully managed service offered by Amazon Web
Services (AWS) that
            provides location-based services for developers. This service simplifies
            the integration of location-based features into applications, making it
            easier to build and deploy location-aware applications.

            The AWS Location Service offers a range of location-based services,
            including:

            Maps: The service provides access to high-quality maps, satellite
imagery,\s
            and geospatial data from various providers, allowing developers to\s
```

```
            easily embed maps into their applications.

            Tracking: The Location Service enables real-time tracking of mobile
devices,\s
            assets, or other entities, allowing developers to build applications\s
            that can monitor the location of people, vehicles, or other objects.

            Geocoding: The service provides the ability to convert addresses or\s
            location names into geographic coordinates (latitude and longitude),\s
            and vice versa, enabling developers to integrate location-based search\s
            and routing functionality into their applications.
            """);
        waitForInputToContinue(scanner);
        try {
            runScenario(mapName, keyName, collectionName, geoId, trackerName,
calculatorName, deviceId);
        } catch (RuntimeException e) {
            // Clean up AWS Resources.
            cleanUp(mapName, keyName, collectionName, trackerName, calculatorName);
            logger.info(e.getMessage());
        }
    }

    public static void runScenario(String mapName, String keyName, String
collectionName, String geoId, String trackerName, String calculatorName, String
deviceId) {
        logger.info(DASHES);
        logger.info("1. Create a map");
        logger.info("""
             An AWS Location map can enhance the user experience of your
             application by providing accurate and personalized location-based
             features. For example, you could use the geocoding capabilities to
             allow users to search for and locate businesses, landmarks, or
             other points of interest within a specific region.
            """);

        waitForInputToContinue(scanner);
        String mapArn;
        try {
            mapArn = locationActions.createMap(mapName).join();
            logger.info("The Map ARN is: {}", mapArn);  // Log success in calling
code
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
```

```
            if (cause instanceof ServiceQuotaExceededException) {
                logger.error("The request exceeded the maximum quota: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred while creating the map.",
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("2. Create an AWS Location API key");
        logger.info("""
            When you embed a map in a web app or website, the API key is
            included in the map tile URL to authenticate requests. You can
            restrict API keys to specific AWS Location operations (e.g., only
            maps, not geocoding). API keys can expire, ensuring temporary
            access control.
            """);

        try {
            String keyArn = locationActions.createKey(keyName, mapArn).join();
            logger.info("The API key was successfully created: {}", keyArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof AccessDeniedException) {
                logger.error("Request was denied: {}", cause.getMessage());
            } else {
                logger.error("An unexpected error occurred while creating the API
key.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Display Map URL");
        logger.info("""
            In order to get the MAP URL, you need to get the API Key value.
            You can get the key value using the AWS Management Console under
            Location Services. This operation cannot be completed using the
```

```
            AWS SDK. For more information about getting the key value, see
            the AWS Location Documentation.
            """);
        String mapUrl = "https://maps.geo.aws.amazon.com/maps/v0/maps/"+mapName+"/
tiles/{z}/{x}/{y}?key={KeyValue}";
        logger.info("Embed this URL in your Web app: " + mapUrl);
        logger.info("");
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Create a geofence collection, which manages and stores
 geofences.");
        waitForInputToContinue(scanner);
        try {
            String collectionArn =
 locationActions.createGeofenceCollection(collectionName).join();
            logger.info("The geofence collection was successfully created: {}",
 collectionArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ConflictException) {
                logger.error("A conflict occurred: {}", cause.getMessage());
            } else {
                logger.error("An unexpected error occurred while creating the
 geofence collection.", cause);
            }
            return;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. Store a geofence geometry in a given geofence collection.");
        logger.info("""
            An AWS Location geofence is a virtual boundary that defines a geographic
 area
            on a map. It is a useful feature for tracking the location of
            assets or monitoring the movement of objects within a specific region.

            To define a geofence, you need to specify the coordinates of a
            polygon that represents the area of interest. The polygon must be
            defined in a counter-clockwise direction, meaning that the points of
```

```
            the polygon must be listed in a counter-clockwise order.

            This is a requirement for the AWS Location service to correctly
            interpret the geofence and ensure that the location data is
            accurately processed within the defined area.
            """);

        waitForInputToContinue(scanner);
        try {
            locationActions.putGeofence(collectionName, geoId).join();
            logger.info("Successfully created geofence: {}", geoId);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ValidationException) {
                logger.error("A validation error occurred while creating geofence:
{}", cause.getMessage());
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("6. Create a tracker resource which lets you retrieve current
and historical location of devices..");
        waitForInputToContinue(scanner);
        try {
            String trackerArn = locationActions.createTracker(trackerName).join();
            logger.info("Successfully created tracker. ARN: {}", trackerArn);  //
Log success
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ConflictException) {
                logger.error("A conflict occurred while creating the tracker: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
```

```
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Update the position of a device in the location tracking
system.");
        logger.info("""
            The AWS location service does not enforce a strict format for deviceId,
but it must:
              - Be a string (case-sensitive).
              - Be 1-100 characters long.
              - Contain only:
                - Alphanumeric characters (A-Z, a-z, 0-9)
                - Underscores (_)
                - Hyphens (-)
                - Be the same ID used when sending and retrieving positions.
            """);

        waitForInputToContinue(scanner);
        try {
            CompletableFuture<BatchUpdateDevicePositionResponse> future =
locationActions.updateDevicePosition(trackerName, deviceId);
            future.join();
            logger.info(deviceId + " was successfully updated in the location
tracking system.");
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.info("The resource was not found: {}", cause.getMessage(),
cause);
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("8. Retrieve the most recent position update for a specified
device..");
        waitForInputToContinue(scanner);
        try {
            GetDevicePositionResponse response =
locationActions.getDevicePosition(trackerName, deviceId).join();
```

```
            logger.info("Successfully fetched device position: {}",
response.position());
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.info("The resource was not found: {}", cause.getMessage(),
cause);
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("9. Create a route calculator.");
        waitForInputToContinue(scanner);
        try {
            CreateRouteCalculatorResponse response =
locationActions.createRouteCalculator(calculatorName).join();
            logger.info("Route calculator created successfully: {}",
response.calculatorArn());
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ConflictException) {
                logger.info("A conflict occurred: {}", cause.getMessage(), cause);
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("10. Determine the distance between Seattle and Vancouver using
the route calculator.");
        waitForInputToContinue(scanner);
        try {
            CalculateRouteResponse response =
locationActions.calcDistanceAsync(calculatorName).join();
```

```
            logger.info("Successfully calculated route. The distance in kilometers
is {}", response.summary().distance());
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.info("The resource was not found: {}", cause.getMessage(),
cause);
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("11. Use the GeoPlacesAsyncClient to perform additional
operations.");
        logger.info("""
            This scenario will show use of the GeoPlacesClient that enables
            location search and geocoding capabilities for your applications.\s

            We are going to use this client to perform these AWS Location tasks:
             - Reverse Geocoding (reverseGeocode): Converts geographic coordinates
into addresses.
             - Place Search (searchText): Finds places based on search queries.
             - Nearby Search (searchNearby): Finds places near a specific location.
            """);

        logger.info("First we will perform a Reverse Geocoding operation");
        waitForInputToContinue(scanner);
        try {
            locationActions.reverseGeocode().join();
            logger.info("Now we are going to perform a text search using coffee
shop.");
            waitForInputToContinue(scanner);
            locationActions.searchText("coffee shop").join();
            waitForInputToContinue(scanner);

            logger.info("Now we are going to perform a nearby Search.");
            //waitForInputToContinue(scanner);
            locationActions.searchNearBy().join();
            waitForInputToContinue(scanner);
        } catch (CompletionException ce) {
```

```
            Throwable cause = ce.getCause();
            if (cause instanceof
software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                logger.error("A validation error occurred: {}", cause.getMessage(),
cause);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        logger.info(DASHES);

        logger.info("12. Delete the AWS Location Services resources.");
        logger.info("Would you like to delete the AWS Location Services resources?
(y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            cleanUp(mapName, keyName, collectionName, trackerName, calculatorName);
        } else {
            logger.info("The AWS resources will not be deleted.");
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info(" This concludes the AWS Location Service scenario.");
        logger.info(DASHES);
    }

    /**
     * Cleans up resources by deleting the specified map, key, geofence collection,
tracker, and route calculator.
     *
     * @param mapName The name of the map to delete.
     * @param keyName The name of the key to delete.
     * @param collectionName The name of the geofence collection to delete.
     * @param trackerName The name of the tracker to delete.
     * @param calculatorName The name of the route calculator to delete.
     */
    private static void cleanUp(String mapName, String keyName, String
collectionName, String trackerName, String calculatorName) {
        try {
            locationActions.deleteMap(mapName).join();
```

```
            locationActions.deleteKey(keyName).join();
            locationActions.deleteGeofenceCollectionAsync(collectionName).join();
            locationActions.deleteTracker(trackerName).join();
            locationActions.deleteRouteCalculator(calculatorName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.info("The resource was not found: {}", cause.getMessage(),
 cause);
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage(),
 cause);
            }
            return;
        }
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Una clase contenedora para métodos del SDK de Amazon Location Service.

```
public class LocationActions {

    private static LocationAsyncClient locationAsyncClient;

    private static GeoPlacesAsyncClient geoPlacesAsyncClient;
```

```
    private static final Logger logger =
LoggerFactory.getLogger(LocationActions.class);

    // This Singleton pattern ensures that only one `LocationClient`
    // instance is used throughout the application.
    private LocationAsyncClient getClient() {
        if (locationAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            locationAsyncClient = LocationAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return locationAsyncClient;
    }

    private static GeoPlacesAsyncClient getGeoPlacesClient() {
        if (geoPlacesAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();
```

```
            geoPlacesAsyncClient = GeoPlacesAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return geoPlacesAsyncClient;
    }


    /**
     * Performs a nearby places search based on the provided geographic coordinates
 (latitude and longitude).
     * The method sends an asynchronous request to search for places within a 1-
kilometer radius of the specified location.
     * The results are processed and printed once the search completes successfully.
     */
    public CompletableFuture<SearchNearbyResponse> searchNearBy() {
        double latitude = 37.7749;  // San Francisco
        double longitude = -122.4194;
        List<Double> queryPosition = List.of(longitude, latitude);

        // Set up the request for searching nearby places.
        SearchNearbyRequest request = SearchNearbyRequest.builder()
            .queryPosition(queryPosition)  // Set the position
            .queryRadius(1000L)  // Radius in meters (1000 meters = 1 km).
            .build();

        return getGeoPlacesClient().searchNearby(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof
 software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                        throw new CompletionException("A validation error occurred:
 " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error performing place search",
 exception);
                }

                // Process the response and print the results.
                response.resultItems().forEach(result -> {
                    logger.info("Place Name: " + result.placeType().name());
```

```
                    logger.info("Address: " + result.address().label());
                    logger.info("Distance: " + result.distance() + " meters");
                    logger.info("-------------------------");
                });
            });
    }


    /**
     * Searches for a place using the provided search query and prints the detailed
information of the first result.
     *
     * @param searchQuery the search query to be used for the place search (ex,
coffee shop)
     */
    public CompletableFuture<Void> searchText(String searchQuery) {
        double latitude = 37.7749;  // San Francisco
        double longitude = -122.4194;
        List<Double> queryPosition = List.of(longitude, latitude);

        SearchTextRequest request = SearchTextRequest.builder()
                .queryText(searchQuery)
                .biasPosition(queryPosition)
                .build();

        return getGeoPlacesClient().searchText(request)
                .thenCompose(response -> {
                    if (response.resultItems().isEmpty()) {
                        logger.info("No places found.");
                        return CompletableFuture.completedFuture(null);
                    }

                    // Get the first place ID
                    String placeId = response.resultItems().get(0).placeId();
                    logger.info("Found Place with id: " + placeId);

                    // Fetch detailed info using getPlace
                    GetPlaceRequest getPlaceRequest = GetPlaceRequest.builder()
                            .placeId(placeId)
                            .build();

                    return getGeoPlacesClient().getPlace(getPlaceRequest)
                            .thenAccept(placeResponse -> {
                                logger.info("Detailed Place Information:");
```

```
                                logger.info("Name: " +
 placeResponse.placeType().name());
                                logger.info("Address: " +
 placeResponse.address().label());

                                if (placeResponse.foodTypes() != null && !
placeResponse.foodTypes().isEmpty()) {
                                    logger.info("Food Types:");
                                    placeResponse.foodTypes().forEach(foodType -> {
                                        logger.info("  - " + foodType);
                                    });
                                } else {
                                    logger.info("No food types available.");
                                }
                                logger.info("-------------------------");
                            });
                })
                .exceptionally(exception -> {
                    Throwable cause = exception.getCause();
                    if (cause instanceof
 software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                        throw new CompletionException("A validation error occurred:
 " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error performing place search",
 exception);
                });
    }



    /**
     * Performs reverse geocoding using the AWS Geo Places API.
     * Reverse geocoding is the process of converting geographic coordinates
 (latitude and longitude) to a human-readable address.
     * This method uses the latitude and longitude of San Francisco as the input,
 and prints the resulting address.
     */
    public CompletableFuture<ReverseGeocodeResponse> reverseGeocode() {
        double latitude = 37.7749;  // San Francisco
        double longitude = -122.4194;
        logger.info("Use latitude 37.7749 and longitude -122.4194");

        // AWS expects [longitude, latitude].
```

```
        List<Double> queryPosition = List.of(longitude, latitude);
        ReverseGeocodeRequest request = ReverseGeocodeRequest.builder()
            .queryPosition(queryPosition)
            .build();
        CompletableFuture<ReverseGeocodeResponse> futureResponse =
            getGeoPlacesClient().reverseGeocode(request);

        return futureResponse.whenComplete((response, exception) -> {
            if (exception != null) {
                Throwable cause = exception.getCause();
                if (cause instanceof
software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                    throw new CompletionException("A validation error occurred: " +
cause.getMessage(), cause);
                }
                throw new CompletionException("Error performing reverse geocoding",
exception);
            }

            response.resultItems().forEach(result ->
                logger.info("The address is: " + result.address().label())
            );
        });
    }


    /**
     * Calculates the distance between two locations asynchronously.
     *
     * @param routeCalcName the name of the route calculator to use
     * @return a {@link CompletableFuture} that will complete with a {@link
CalculateRouteResponse} containing the distance and estimated duration of the route
     */
    public CompletableFuture<CalculateRouteResponse> calcDistanceAsync(String
routeCalcName) {
        // Define coordinates for Seattle, WA and Vancouver, BC.
        List<Double> departurePosition = Arrays.asList(-122.3321, 47.6062);
        List<Double> arrivePosition = Arrays.asList(-123.1216, 49.2827);

        CalculateRouteRequest request = CalculateRouteRequest.builder()
            .calculatorName(routeCalcName)
            .departurePosition(departurePosition)
            .destinationPosition(arrivePosition)
            .travelMode("Car") // Options: Car, Truck, Walking, Bicycle
```

```
            .distanceUnit("Kilometers") // Options: Meters, Kilometers, Miles
            .build();

        return getClient().calculateRoute(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The AWS resource was not
found: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Failed to calculate route: " +
exception.getMessage(), exception);
                }
            });
    }


    /**
     * Creates a new route calculator with the specified name and data source.
     *
     * @param routeCalcName the name of the route calculator to be created
     */
    public CompletableFuture<CreateRouteCalculatorResponse>
createRouteCalculator(String routeCalcName) {
        String dataSource = "Esri"; // or "Here"
        CreateRouteCalculatorRequest request =
CreateRouteCalculatorRequest.builder()
            .calculatorName(routeCalcName)
            .dataSource(dataSource)
            .build();

        return getClient().createRouteCalculator(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("A conflict error occurred: "
+ cause.getMessage(), cause);
                    }
                    throw new CompletionException("Failed to create route
calculator: " + exception.getMessage(), exception);
                }
            });
```

```
    }


    /**
     * Retrieves the position of a device using the provided LocationClient.
     *
     * @param trackerName The name of the tracker associated with the device.
     * @param deviceId    The ID of the device to retrieve the position for.
     * @throws RuntimeException If there is an error fetching the device position.
     */
    public CompletableFuture<GetDevicePositionResponse> getDevicePosition(String
trackerName, String deviceId) {
        GetDevicePositionRequest request = GetDevicePositionRequest.builder()
            .trackerName(trackerName)
            .deviceId(deviceId)
            .build();

        return getClient().getDevicePosition(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The AWS resource was not
found: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error fetching device position: "
+ exception.getMessage(), exception);
                }
            });
    }


    /**
     * Updates the position of a device in the location tracking system.
     *
     * @param trackerName the name of the tracker associated with the device
     * @param deviceId    the unique identifier of the device
     * @throws RuntimeException if an error occurs while updating the device
position
     */
    public CompletableFuture<BatchUpdateDevicePositionResponse>
updateDevicePosition(String trackerName, String deviceId) {
        double latitude = 37.7749;  // Example: San Francisco
        double longitude = -122.4194;
```

```
        DevicePositionUpdate positionUpdate = DevicePositionUpdate.builder()
            .deviceId(deviceId)
            .sampleTime(Instant.now()) // Timestamp of position update.
            .position(Arrays.asList(longitude, latitude)) // AWS requires
[longitude, latitude]
            .build();

        BatchUpdateDevicePositionRequest request =
BatchUpdateDevicePositionRequest.builder()
            .trackerName(trackerName)
            .updates(positionUpdate)
            .build();

        CompletableFuture<BatchUpdateDevicePositionResponse> futureResponse =
getClient().batchUpdateDevicePosition(request);
        return futureResponse.whenComplete((response, exception) -> {
            if (exception != null) {
                Throwable cause = exception.getCause();
                if (cause instanceof ResourceNotFoundException) {
                    throw new CompletionException("The resource was not found: " +
cause.getMessage(), cause);
                } else {
                    throw new CompletionException("Error updating device position: "
+ exception.getMessage(), exception);
                }
            }
        });
    }


    /**
     * Creates a new tracker resource in your AWS account, which you can use to
track the location of devices.
     *
     * @param trackerName the name of the tracker to be created
     * @return a {@link CompletableFuture} that, when completed, will contain the
Amazon Resource Name (ARN) of the created tracker
     */
    public CompletableFuture<String> createTracker(String trackerName) {
        CreateTrackerRequest trackerRequest = CreateTrackerRequest.builder()
            .description("Created using the Java V2 SDK")
            .trackerName(trackerName)
```

```
            .positionFiltering("TimeBased") // Options: TimeBased, DistanceBased,
AccuracyBased
            .build();

        return getClient().createTracker(trackerRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("Conflict occurred while
creating tracker: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error creating tracker: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(CreateTrackerResponse::trackerArn); // Return only the
tracker ARN
    }



    /**
     * Adds a new geofence to the specified collection.
     *
     * @param collectionName the name of the geofence collection to add the geofence
to
     * @param geoId          the unique identifier for the geofence
     */
    public CompletableFuture<PutGeofenceResponse> putGeofence(String collectionName,
String geoId) {
        // Define the geofence geometry (polygon).
        GeofenceGeometry geofenceGeometry = GeofenceGeometry.builder()
            .polygon(List.of(
                List.of(
                    List.of(-122.3381, 47.6101), // First point
                    List.of(-122.3281, 47.6101),
                    List.of(-122.3281, 47.6201),
                    List.of(-122.3381, 47.6201),
                    List.of(-122.3381, 47.6101) // Closing the polygon
                )
            ))
            .build();
```

```
        PutGeofenceRequest geofenceRequest = PutGeofenceRequest.builder()
            .collectionName(collectionName) // Specify the collection.
            .geofenceId(geoId) // Unique ID for the geofence.
            .geometry(geofenceGeometry)
            .build();

        return getClient().putGeofence(geofenceRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ValidationException) {
                        throw new CompletionException("Validation error while
creating geofence: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error creating geofence: " +
exception.getMessage(), exception);
                }
            });
    }


    /**
     * Creates a new geofence collection.
     *
     * @param collectionName the name of the geofence collection to be created
     */
    public CompletableFuture<String> createGeofenceCollection(String collectionName)
{
        CreateGeofenceCollectionRequest collectionRequest =
CreateGeofenceCollectionRequest.builder()
            .collectionName(collectionName)
            .description("Created by using the AWS SDK for Java")
            .build();

        return getClient().createGeofenceCollection(collectionRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("The geofence collection was
not created due to ConflictException.", cause);
                    }
                    throw new CompletionException("Failed to create geofence
collection: " + exception.getMessage(), exception);
```

```
                }
            })
            .thenApply(response -> response.collectionArn()); // Return only the ARN
    }




    /**
     * Creates a new API key with the specified name and restrictions.
     *
     * @param keyName the name of the API key to be created
     * @param mapArn  the Amazon Resource Name (ARN) of the map resource to which
the API key will be associated
     * @return a {@link CompletableFuture} that completes with the Amazon Resource
Name (ARN) of the created API key,
     * or {@code null} if the operation failed
     */
    public CompletableFuture<String> createKey(String keyName, String mapArn) {
        ApiKeyRestrictions keyRestrictions = ApiKeyRestrictions.builder()
            .allowActions("geo:GetMap*")
            .allowResources(mapArn)
            .build();

        CreateKeyRequest request = CreateKeyRequest.builder()
            .keyName(keyName)
            .restrictions(keyRestrictions)
            .noExpiry(true)
            .build();

        return getClient().createKey(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof AccessDeniedException) {
                        throw new CompletionException("The request was denied
because of insufficient access or permissions.", cause);
                    }
                    throw new CompletionException("Failed to create API key: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response.keyArn()); // This will never return
null if the response reaches here
```

```
    }



    /**
     * Creates a new map with the specified name and configuration.
     *
     * @param mapName the name of the map to be created
     * @return a {@link CompletableFuture} that, when completed, will contain the
Amazon Resource Name (ARN) of the created map
     * @throws CompletionException if an error occurs while creating the map, such
as exceeding the service quota
     */
    public CompletableFuture<String> createMap(String mapName) {
        MapConfiguration configuration = MapConfiguration.builder()
            .style("VectorEsriNavigation")
            .build();

        CreateMapRequest mapRequest = CreateMapRequest.builder()
            .mapName(mapName)
            .configuration(configuration)
            .description("A map created using the Java V2 API")
            .build();

        return getClient().createMap(mapRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ServiceQuotaExceededException) {
                        throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                    }
                    throw new CompletionException("Failed to create map: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response.mapArn()); // Return the map ARN
    }



    /**
     * Deletes a geofence collection asynchronously.
     *
```

```
    * @param collectionName the name of the geofence collection to be deleted
    * @return a {@link CompletableFuture} that completes when the geofence
collection has been deleted
    */
   public CompletableFuture<Void> deleteGeofenceCollectionAsync(String
collectionName) {
       DeleteGeofenceCollectionRequest collectionRequest =
DeleteGeofenceCollectionRequest.builder()
           .collectionName(collectionName)
           .build();

       return getClient().deleteGeofenceCollection(collectionRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The requested geofence
collection was not found.", cause);
                   }
                   throw new CompletionException("Failed to delete geofence
collection: " + exception.getMessage(), exception);
               }
               logger.info("The geofence collection {} was deleted.",
collectionName);
           })
           .thenApply(response -> null);
   }



   /**
    * Deletes the specified key from the key-value store.
    *
    * @param keyName the name of the key to be deleted
    * @return a {@link CompletableFuture} that completes when the key has been
deleted
    * @throws CompletionException if the key was not found or if an error occurred
during the deletion process
    */
   public CompletableFuture<Void> deleteKey(String keyName) {
       DeleteKeyRequest keyRequest = DeleteKeyRequest.builder()
           .keyName(keyName)
           .build();
```

```
        return getClient().deleteKey(keyRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The key was not found.",
cause);
                    }
                    throw new CompletionException("Failed to delete key: " +
exception.getMessage(), exception);
                }
                logger.info("The key {} was deleted.", keyName);
            })
            .thenApply(response -> null);
    }


    /**
     * Deletes a map with the specified name.
     *
     * @param mapName the name of the map to be deleted
     * @return a {@link CompletableFuture} that completes when the map deletion is
successful, or throws a {@link CompletionException} if an error occurs
     */
    public CompletableFuture<Void> deleteMap(String mapName) {
        DeleteMapRequest mapRequest = DeleteMapRequest.builder()
            .mapName(mapName)
            .build();

        return getClient().deleteMap(mapRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The map was not found.",
cause);
                    }
                    throw new CompletionException("Failed to delete map: " +
exception.getMessage(), exception);
                }
                logger.info("The map {} was deleted.", mapName);
            })
            .thenApply(response -> null);
    }
```

```
   /**
    * Deletes a tracker with the specified name.
    *
    * @param trackerName the name of the tracker to be deleted
    * @return a {@link CompletableFuture} that completes when the tracker has been
deleted
    * @throws CompletionException if an error occurs while deleting the tracker
    *                             - if the tracker was not found, a {@link
ResourceNotFoundException} is thrown wrapped in the CompletionException
    *                             - if any other error occurs, a generic
CompletionException is thrown with the error message
    */
   public CompletableFuture<Void> deleteTracker(String trackerName) {
       DeleteTrackerRequest trackerRequest = DeleteTrackerRequest.builder()
           .trackerName(trackerName)
           .build();

       return getClient().deleteTracker(trackerRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The tracker was not found.",
cause);
                   }
                   throw new CompletionException("Failed to delete the tracker: " +
exception.getMessage(), exception);
               }
               logger.info("The tracker {} was deleted.", trackerName);
           })
           .thenApply(response -> null); // Ensures CompletableFuture<Void>
   }


   /**
    * Deletes a route calculator from the system.
    *
    * @param calcName the name of the route calculator to delete
    * @return a {@link CompletableFuture} that completes when the route calculator
has been deleted
    * @throws CompletionException if an error occurs while deleting the route
calculator
```

```
     *                               - If the route calculator was not found, a {@link
 ResourceNotFoundException} will be thrown
     *                               - If any other error occurs, a generic {@link
 CompletionException} will be thrown
     */
    public CompletableFuture<Void> deleteRouteCalculator(String calcName) {
        DeleteRouteCalculatorRequest calculatorRequest =
 DeleteRouteCalculatorRequest.builder()
            .calculatorName(calcName)
            .build();

        return getClient().deleteRouteCalculator(calculatorRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The route calculator was not
 found.", cause);
                    }
                    throw new CompletionException("Failed to delete the route
 calculator: " + exception.getMessage(), exception);
                }
                logger.info("The route calculator {} was deleted.", calcName);
            })
            .thenApply(response -> null);
    }
}
```

Acciones

`BatchUpdateDevicePosition`

En el siguiente ejemplo de código, se muestra cómo utilizar `BatchUpdateDevicePosition`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Updates the position of a device in the location tracking system.
    *
    * @param trackerName the name of the tracker associated with the device
    * @param deviceId    the unique identifier of the device
    * @throws RuntimeException if an error occurs while updating the device
position
    */
   public CompletableFuture<BatchUpdateDevicePositionResponse>
updateDevicePosition(String trackerName, String deviceId) {
       double latitude = 37.7749;  // Example: San Francisco
       double longitude = -122.4194;

       DevicePositionUpdate positionUpdate = DevicePositionUpdate.builder()
           .deviceId(deviceId)
           .sampleTime(Instant.now()) // Timestamp of position update.
           .position(Arrays.asList(longitude, latitude)) // AWS requires
[longitude, latitude]
           .build();

       BatchUpdateDevicePositionRequest request =
BatchUpdateDevicePositionRequest.builder()
           .trackerName(trackerName)
           .updates(positionUpdate)
           .build();

       CompletableFuture<BatchUpdateDevicePositionResponse> futureResponse =
getClient().batchUpdateDevicePosition(request);
       return futureResponse.whenComplete((response, exception) -> {
           if (exception != null) {
               Throwable cause = exception.getCause();
               if (cause instanceof ResourceNotFoundException) {
                   throw new CompletionException("The resource was not found: " +
cause.getMessage(), cause);
               } else {
                   throw new CompletionException("Error updating device position: "
+ exception.getMessage(), exception);
               }
           }
       });
   }
```

- Para obtener más información sobre la API, consulta BatchUpdateDevicePositionla Referencia AWS SDK for Java 2.x de la API.

`CalculateRoute`

En el siguiente ejemplo de código, se muestra cómo utilizar `CalculateRoute`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Calculates the distance between two locations asynchronously.
    *
    * @param routeCalcName the name of the route calculator to use
    * @return a {@link CompletableFuture} that will complete with a {@link
CalculateRouteResponse} containing the distance and estimated duration of the route
    */
   public CompletableFuture<CalculateRouteResponse> calcDistanceAsync(String
routeCalcName) {
       // Define coordinates for Seattle, WA and Vancouver, BC.
       List<Double> departurePosition = Arrays.asList(-122.3321, 47.6062);
       List<Double> arrivePosition = Arrays.asList(-123.1216, 49.2827);

       CalculateRouteRequest request = CalculateRouteRequest.builder()
           .calculatorName(routeCalcName)
           .departurePosition(departurePosition)
           .destinationPosition(arrivePosition)
           .travelMode("Car") // Options: Car, Truck, Walking, Bicycle
           .distanceUnit("Kilometers") // Options: Meters, Kilometers, Miles
           .build();

       return getClient().calculateRoute(request)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
```

```
                        throw new CompletionException("The AWS resource was not
found: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Failed to calculate route: " +
exception.getMessage(), exception);
                }
            });
    }
```

- Para obtener más información sobre la API, consulta CalculateRoutela Referencia AWS SDK for Java 2.x de la API.

`CreateGeofenceCollection`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateGeofenceCollection`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new geofence collection.
     *
     * @param collectionName the name of the geofence collection to be created
     */
    public CompletableFuture<String> createGeofenceCollection(String collectionName)
{
        CreateGeofenceCollectionRequest collectionRequest =
CreateGeofenceCollectionRequest.builder()
            .collectionName(collectionName)
            .description("Created by using the AWS SDK for Java")
            .build();

        return getClient().createGeofenceCollection(collectionRequest)
            .whenComplete((response, exception) -> {
```

```
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("The geofence collection was
not created due to ConflictException.", cause);
                    }
                    throw new CompletionException("Failed to create geofence
collection: " + exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response.collectionArn()); // Return only the ARN
    }
```

- Para obtener más información sobre la API, consulta CreateGeofenceCollectionla Referencia AWS SDK for Java 2.x de la API.

`CreateKey`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateKey`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new API key with the specified name and restrictions.
     *
     * @param keyName the name of the API key to be created
     * @param mapArn  the Amazon Resource Name (ARN) of the map resource to which
the API key will be associated
     * @return a {@link CompletableFuture} that completes with the Amazon Resource
Name (ARN) of the created API key,
     * or {@code null} if the operation failed
```

```
     */
    public CompletableFuture<String> createKey(String keyName, String mapArn) {
        ApiKeyRestrictions keyRestrictions = ApiKeyRestrictions.builder()
            .allowActions("geo:GetMap*")
            .allowResources(mapArn)
            .build();

        CreateKeyRequest request = CreateKeyRequest.builder()
            .keyName(keyName)
            .restrictions(keyRestrictions)
            .noExpiry(true)
            .build();

        return getClient().createKey(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof AccessDeniedException) {
                        throw new CompletionException("The request was denied
because of insufficient access or permissions.", cause);
                    }
                    throw new CompletionException("Failed to create API key: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response.keyArn()); // This will never return
null if the response reaches here
    }
```

- Para obtener más información sobre la API, consulta CreateKeyla Referencia AWS SDK for Java 2.x de la API.

`CreateMap`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateMap`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates a new map with the specified name and configuration.
    *
    * @param mapName the name of the map to be created
    * @return a {@link CompletableFuture} that, when completed, will contain the
Amazon Resource Name (ARN) of the created map
    * @throws CompletionException if an error occurs while creating the map, such
as exceeding the service quota
    */
   public CompletableFuture<String> createMap(String mapName) {
       MapConfiguration configuration = MapConfiguration.builder()
           .style("VectorEsriNavigation")
           .build();

       CreateMapRequest mapRequest = CreateMapRequest.builder()
           .mapName(mapName)
           .configuration(configuration)
           .description("A map created using the Java V2 API")
           .build();

       return getClient().createMap(mapRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ServiceQuotaExceededException) {
                       throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                   }
                   throw new CompletionException("Failed to create map: " +
exception.getMessage(), exception);
               }
           })
           .thenApply(response -> response.mapArn()); // Return the map ARN
```

```
    }
```

- Para obtener más información sobre la API, consulta CreateMapla Referencia AWS SDK for Java 2.x de la API.

`CreateRouteCalculator`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateRouteCalculator`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates a new route calculator with the specified name and data source.
    *
    * @param routeCalcName the name of the route calculator to be created
    */
   public CompletableFuture<CreateRouteCalculatorResponse>
createRouteCalculator(String routeCalcName) {
       String dataSource = "Esri"; // or "Here"
       CreateRouteCalculatorRequest request =
CreateRouteCalculatorRequest.builder()
           .calculatorName(routeCalcName)
           .dataSource(dataSource)
           .build();

       return getClient().createRouteCalculator(request)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ConflictException) {
                       throw new CompletionException("A conflict error occurred: "
+ cause.getMessage(), cause);
```

```
                    }
                    throw new CompletionException("Failed to create route
calculator: " + exception.getMessage(), exception);
                }
            });
    }
```

- Para obtener más información sobre la API, consulta CreateRouteCalculatorla Referencia AWS SDK for Java 2.x de la API.

`CreateTracker`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateTracker`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new tracker resource in your AWS account, which you can use to
track the location of devices.
     *
     * @param trackerName the name of the tracker to be created
     * @return a {@link CompletableFuture} that, when completed, will contain the
Amazon Resource Name (ARN) of the created tracker
     */
    public CompletableFuture<String> createTracker(String trackerName) {
        CreateTrackerRequest trackerRequest = CreateTrackerRequest.builder()
            .description("Created using the Java V2 SDK")
            .trackerName(trackerName)
            .positionFiltering("TimeBased") // Options: TimeBased, DistanceBased,
AccuracyBased
            .build();

        return getClient().createTracker(trackerRequest)
```

```
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("Conflict occurred while
creating tracker: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error creating tracker: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(CreateTrackerResponse::trackerArn); // Return only the
tracker ARN
    }
```

- Para obtener más información sobre la API, consulta CreateTrackerla Referencia AWS SDK for Java 2.x de la API.

`DeleteGeofenceCollection`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteGeofenceCollection`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a geofence collection asynchronously.
     *
     * @param collectionName the name of the geofence collection to be deleted
     * @return a {@link CompletableFuture} that completes when the geofence
collection has been deleted
     */
```

```
   public CompletableFuture<Void> deleteGeofenceCollectionAsync(String
collectionName) {
       DeleteGeofenceCollectionRequest collectionRequest =
DeleteGeofenceCollectionRequest.builder()
           .collectionName(collectionName)
           .build();

       return getClient().deleteGeofenceCollection(collectionRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The requested geofence
collection was not found.", cause);
                   }
                   throw new CompletionException("Failed to delete geofence
collection: " + exception.getMessage(), exception);
               }
               logger.info("The geofence collection {} was deleted.",
collectionName);
           })
           .thenApply(response -> null);
   }
```

- Para obtener más información sobre la API, consulta DeleteGeofenceCollectionla Referencia AWS SDK for Java 2.x de la API.

`DeleteKey`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteKey`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deletes the specified key from the key-value store.
    *
    * @param keyName the name of the key to be deleted
    * @return a {@link CompletableFuture} that completes when the key has been
deleted
    * @throws CompletionException if the key was not found or if an error occurred
during the deletion process
    */
   public CompletableFuture<Void> deleteKey(String keyName) {
       DeleteKeyRequest keyRequest = DeleteKeyRequest.builder()
           .keyName(keyName)
           .build();

       return getClient().deleteKey(keyRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The key was not found.",
cause);
                   }
                   throw new CompletionException("Failed to delete key: " +
exception.getMessage(), exception);
               }
               logger.info("The key {} was deleted.", keyName);
           })
           .thenApply(response -> null);
   }
```

- Para obtener más información sobre la API, consulta DeleteKeyla Referencia AWS SDK for Java 2.x de la API.

`DeleteMap`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteMap`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deletes a map with the specified name.
    *
    * @param mapName the name of the map to be deleted
    * @return a {@link CompletableFuture} that completes when the map deletion is
successful, or throws a {@link CompletionException} if an error occurs
    */
   public CompletableFuture<Void> deleteMap(String mapName) {
       DeleteMapRequest mapRequest = DeleteMapRequest.builder()
           .mapName(mapName)
           .build();

       return getClient().deleteMap(mapRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The map was not found.",
cause);
                   }
                   throw new CompletionException("Failed to delete map: " +
exception.getMessage(), exception);
               }
               logger.info("The map {} was deleted.", mapName);
           })
           .thenApply(response -> null);
   }
```

- Para obtener más información sobre la API, consulta DeleteMapla Referencia AWS SDK for Java 2.x de la API.

`DeleteRouteCalculator`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteRouteCalculator`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deletes a route calculator from the system.
    *
    * @param calcName the name of the route calculator to delete
    * @return a {@link CompletableFuture} that completes when the route calculator
has been deleted
    * @throws CompletionException if an error occurs while deleting the route
calculator
    *                             - If the route calculator was not found, a {@link
ResourceNotFoundException} will be thrown
    *                             - If any other error occurs, a generic {@link
CompletionException} will be thrown
    */
   public CompletableFuture<Void> deleteRouteCalculator(String calcName) {
       DeleteRouteCalculatorRequest calculatorRequest =
DeleteRouteCalculatorRequest.builder()
           .calculatorName(calcName)
           .build();

       return getClient().deleteRouteCalculator(calculatorRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The route calculator was not
found.", cause);
                   }
                   throw new CompletionException("Failed to delete the route
calculator: " + exception.getMessage(), exception);
               }
```

```
                logger.info("The route calculator {} was deleted.", calcName);
            })
            .thenApply(response -> null);
    }
```

- Para obtener más información sobre la API, consulta DeleteRouteCalculatorla Referencia AWS SDK for Java 2.x de la API.

`DeleteTracker`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteTracker`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a tracker with the specified name.
     *
     * @param trackerName the name of the tracker to be deleted
     * @return a {@link CompletableFuture} that completes when the tracker has been
deleted
     * @throws CompletionException if an error occurs while deleting the tracker
     *                             - if the tracker was not found, a {@link
ResourceNotFoundException} is thrown wrapped in the CompletionException
     *                             - if any other error occurs, a generic
CompletionException is thrown with the error message
     */
    public CompletableFuture<Void> deleteTracker(String trackerName) {
        DeleteTrackerRequest trackerRequest = DeleteTrackerRequest.builder()
            .trackerName(trackerName)
            .build();

        return getClient().deleteTracker(trackerRequest)
            .whenComplete((response, exception) -> {
```

```
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The tracker was not found.",
cause);
                    }
                    throw new CompletionException("Failed to delete the tracker: " +
exception.getMessage(), exception);
                }
                logger.info("The tracker {} was deleted.", trackerName);
            })
            .thenApply(response -> null); // Ensures CompletableFuture<Void>
    }
```

- Para obtener más información sobre la API, consulta DeleteTrackerla Referencia AWS SDK for Java 2.x de la API.

`GetDevicePosition`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetDevicePosition`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Retrieves the position of a device using the provided LocationClient.
     *
     * @param trackerName The name of the tracker associated with the device.
     * @param deviceId    The ID of the device to retrieve the position for.
     * @throws RuntimeException If there is an error fetching the device position.
     */
    public CompletableFuture<GetDevicePositionResponse> getDevicePosition(String
trackerName, String deviceId) {
        GetDevicePositionRequest request = GetDevicePositionRequest.builder()
```

```
            .trackerName(trackerName)
            .deviceId(deviceId)
            .build();

        return getClient().getDevicePosition(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The AWS resource was not
found: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error fetching device position: "
+ exception.getMessage(), exception);
                }
            });
    }
```

- Para obtener más información sobre la API, consulta GetDevicePositionla Referencia AWS SDK for Java 2.x de la API.

`PutGeofence`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutGeofence`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Adds a new geofence to the specified collection.
     *
     * @param collectionName the name of the geofence collection to add the geofence
to
     * @param geoId          the unique identifier for the geofence
```

```
     */
    public CompletableFuture<PutGeofenceResponse> putGeofence(String collectionName,
String geoId) {
        // Define the geofence geometry (polygon).
        GeofenceGeometry geofenceGeometry = GeofenceGeometry.builder()
            .polygon(List.of(
                List.of(
                    List.of(-122.3381, 47.6101), // First point
                    List.of(-122.3281, 47.6101),
                    List.of(-122.3281, 47.6201),
                    List.of(-122.3381, 47.6201),
                    List.of(-122.3381, 47.6101) // Closing the polygon
                )
            ))
            .build();

        PutGeofenceRequest geofenceRequest = PutGeofenceRequest.builder()
            .collectionName(collectionName) // Specify the collection.
            .geofenceId(geoId) // Unique ID for the geofence.
            .geometry(geofenceGeometry)
            .build();

        return getClient().putGeofence(geofenceRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ValidationException) {
                        throw new CompletionException("Validation error while
creating geofence: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error creating geofence: " +
exception.getMessage(), exception);
                }
            });
    }
```

- Para obtener más información sobre la API, consulta PutGeofencela Referencia AWS SDK for Java 2.x de la API.

Ejemplos básicos de Location Service Places con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante Location Service Places. AWS SDK for Java 2.x

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`ReverseGeocode`

En el siguiente ejemplo de código, se muestra cómo utilizar `ReverseGeocode`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Performs reverse geocoding using the AWS Geo Places API.
     * Reverse geocoding is the process of converting geographic coordinates
(latitude and longitude) to a human-readable address.
     * This method uses the latitude and longitude of San Francisco as the input,
and prints the resulting address.
     */
```

```
    public CompletableFuture<ReverseGeocodeResponse> reverseGeocode() {
        double latitude = 37.7749;  // San Francisco
        double longitude = -122.4194;
        logger.info("Use latitude 37.7749 and longitude -122.4194");

        // AWS expects [longitude, latitude].
        List<Double> queryPosition = List.of(longitude, latitude);
        ReverseGeocodeRequest request = ReverseGeocodeRequest.builder()
            .queryPosition(queryPosition)
            .build();
        CompletableFuture<ReverseGeocodeResponse> futureResponse =
            getGeoPlacesClient().reverseGeocode(request);

        return futureResponse.whenComplete((response, exception) -> {
            if (exception != null) {
                Throwable cause = exception.getCause();
                if (cause instanceof
software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                    throw new CompletionException("A validation error occurred: " +
cause.getMessage(), cause);
                }
                throw new CompletionException("Error performing reverse geocoding",
exception);
            }

            response.resultItems().forEach(result ->
                logger.info("The address is: " + result.address().label())
            );
        });
    }
```

- Para obtener más información sobre la API, consulta ReverseGeocodela Referencia AWS SDK for Java 2.x de la API.

`SearchNearby`

En el siguiente ejemplo de código, se muestra cómo utilizar `SearchNearby`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Performs a nearby places search based on the provided geographic coordinates
 (latitude and longitude).
     * The method sends an asynchronous request to search for places within a 1-
kilometer radius of the specified location.
     * The results are processed and printed once the search completes successfully.
     */
    public CompletableFuture<SearchNearbyResponse> searchNearBy() {
        double latitude = 37.7749;  // San Francisco
        double longitude = -122.4194;
        List<Double> queryPosition = List.of(longitude, latitude);

        // Set up the request for searching nearby places.
        SearchNearbyRequest request = SearchNearbyRequest.builder()
            .queryPosition(queryPosition)  // Set the position
            .queryRadius(1000L)  // Radius in meters (1000 meters = 1 km).
            .build();

        return getGeoPlacesClient().searchNearby(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof
 software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                        throw new CompletionException("A validation error occurred:
 " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error performing place search",
 exception);
                }

                // Process the response and print the results.
                response.resultItems().forEach(result -> {
```

```
                    logger.info("Place Name: " + result.placeType().name());
                    logger.info("Address: " + result.address().label());
                    logger.info("Distance: " + result.distance() + " meters");
                    logger.info("-------------------------");
                });
            });
    }
```

- Para obtener más información sobre la API, consulta SearchNearbyla Referencia AWS SDK for Java 2.x de la API.

`SearchText`

En el siguiente ejemplo de código, se muestra cómo utilizar `SearchText`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Searches for a place using the provided search query and prints the detailed
information of the first result.
     *
     * @param searchQuery the search query to be used for the place search (ex,
coffee shop)
     */
    public CompletableFuture<Void> searchText(String searchQuery) {
        double latitude = 37.7749;  // San Francisco
        double longitude = -122.4194;
        List<Double> queryPosition = List.of(longitude, latitude);

        SearchTextRequest request = SearchTextRequest.builder()
                .queryText(searchQuery)
                .biasPosition(queryPosition)
                .build();
```

```
        return getGeoPlacesClient().searchText(request)
                .thenCompose(response -> {
                    if (response.resultItems().isEmpty()) {
                        logger.info("No places found.");
                        return CompletableFuture.completedFuture(null);
                    }

                    // Get the first place ID
                    String placeId = response.resultItems().get(0).placeId();
                    logger.info("Found Place with id: " + placeId);

                    // Fetch detailed info using getPlace
                    GetPlaceRequest getPlaceRequest = GetPlaceRequest.builder()
                            .placeId(placeId)
                            .build();

                    return getGeoPlacesClient().getPlace(getPlaceRequest)
                            .thenAccept(placeResponse -> {
                                logger.info("Detailed Place Information:");
                                logger.info("Name: " +
 placeResponse.placeType().name());
                                logger.info("Address: " +
 placeResponse.address().label());

                                if (placeResponse.foodTypes() != null && !
placeResponse.foodTypes().isEmpty()) {
                                    logger.info("Food Types:");
                                    placeResponse.foodTypes().forEach(foodType -> {
                                        logger.info("  - " + foodType);
                                    });
                                } else {
                                    logger.info("No food types available.");
                                }
                                logger.info("------------------------");
                            });
                })
                .exceptionally(exception -> {
                    Throwable cause = exception.getCause();
                    if (cause instanceof
 software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                        throw new CompletionException("A validation error occurred:
 " + cause.getMessage(), cause);
                    }
```

```
                    throw new CompletionException("Error performing place search",
exception);
                });
    }
```

- Para obtener más información sobre la API, consulta SearchTextla Referencia AWS SDK for Java 2.x de la API.

AWS Marketplace Ejemplos de API de catálogo con SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante la API AWS SDK for Java 2.x with AWS Marketplace Catalog.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Productos de AMI
- Ofertas de socios del canal
- Productos de contenedor
- Entidades
- Ofertas
- Productos
- Autorización de reventa
- Productos SaaS de
- Utilidades

Productos de AMI

Cómo añadir una dimensión a un producto de AMI existente y actualizar las condiciones de precios de la oferta

El siguiente ejemplo de código muestra cómo añadir una dimensión a un producto de AMI existente y actualizar las condiciones de precios de la oferta.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Identifier": "prod-1111111111111",
                "Type": "AmiProduct@1.0"
            },
            "DetailsDocument": [
                {
                    "Key": "m7g.8xlarge",
                    "Description": "m7g.8xlarge",
                    "Name": "m7g.8xlarge",
                    "Types": [
                        "Metered"
                    ],
                    "Unit": "Hrs"
                }
            ]
        },
```

```
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "m5.large",
                                        "Price": "0.15"
                                    },
                                    {
                                        "DimensionKey": "m7g.4xlarge",
                                        "Price": "0.45"
                                    },
                                    {
                                        "DimensionKey": "m7g.2xlarge",
                                        "Price": "0.45"
                                    },
                                    {
                                        "DimensionKey": "m7g.8xlarge",
                                        "Price": "0.55"
                                    }
                                ]
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Cómo añadir una región con un producto de AMI implementado

El siguiente ejemplo de código muestra cómo añadir una región con un producto de AMI implementado.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "AddRegions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "prod-1111111111111"
            },
            "DetailsDocument": {
                "Regions": [
                    "us-east-2",
                    "us-west-2"
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de un producto de AMI público o limitado y una oferta pública con precios anuales por hora

El siguiente ejemplo de código muestra cómo crear un producto de AMI público o limitado y una oferta pública con precios anuales por hora. En este ejemplo se crea un EULA estándar o personalizado.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "AmiProduct@1.0"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
                    "Sample highlight"
                ],
```

```
                "SearchKeywords": [
                    "Sample keyword"
                ],
                "Categories": [
                    "Operating Systems"
                ],
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "AddRegions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Regions": [
                    "us-east-1"
                ]
            }
        },
        {
            "ChangeType": "AddInstanceTypes",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "InstanceTypes": [
                    "t2.micro"
                ]
            }
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
```

```
                "Version": {
                    "VersionTitle": "Test AMI Version1.0",
                    "ReleaseNotes": "Test AMI Version"
                },
                "DeliveryOptions": [
                    {
                        "Details": {
                            "AmiDeliveryOptionDetails": {
                                "AmiSource": {
                                    "AmiId": "ami-1111111111111111",
                                    "AccessRoleArn":
"arn:aws:iam::111111111111:role/AWSMarketplaceAmiIngestion",
                                    "UserName": "ec2-user",
                                    "OperatingSystemName": "AMAZONLINUX",
                                    "OperatingSystemVersion": "10.0.14393",
                                    "ScanningPort": 22
                                },
                                "UsageInstructions": "Test AMI Version",
                                "RecommendedInstanceType": "t2.micro",
                                "SecurityGroups": [
                                    {
                                        "IpProtocol": "tcp",
                                        "IpRanges": [
                                            "0.0.0.0/0"
                                        ],
                                        "FromPort": 10,
                                        "ToPort": 22
                                    }
                                ]
                            }
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": [
                {
                    "Key": "t2.micro",
```

```
                "Description": "t2.micro",
                "Name": "t2.micro",
                "Types": [
                    "Metered"
                ],
                "Unit": "Hrs"
            }
        ]
    },
    {
        "ChangeType": "UpdateTargeting",
        "Entity": {
            "Type": "AmiProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "PositiveTargeting": {
                "BuyerAccounts": [
                    "111111111111",
                    "222222222222"
                ]
            }
        }
    },
    {
        "ChangeType": "ReleaseProduct",
        "Entity": {
            "Type": "AmiProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": {}
    },
    {
        "ChangeType": "CreateOffer",
        "ChangeName": "CreateOfferChange",
        "Entity": {
            "Type": "Offer@1.0"
        },
        "DetailsDocument": {
            "ProductId": "$CreateProductChange.Entity.Identifier"
        }
    },
    {
        "ChangeType": "UpdateInformation",
```

```
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public offer for AmiProduct using AWS Marketplace API
Reference Code",
                "Description": "Test public offer with hourly-annual pricing for
AmiProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.micro",
                                        "Price": "0.15"
                                    }
                                ]
                            }
                        ]
                    },
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P365D"
                                },
                                "RateCard": [
```

```
                                {
                                    "DimensionKey": "t2.micro",
                                    "Price": "150"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "StandardEula",
                            "Version": "2022-07-14"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateSupportTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
```

```
                        "Type": "SupportTerm",
                        "RefundPolicy": "Absolutely no refund, period."
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de un producto de AMI público o limitado y una oferta pública con precios mensuales por hora

El siguiente ejemplo de código muestra cómo crear un producto de AMI público o limitado y una oferta pública con precios mensuales por hora. En este ejemplo se crea un EULA estándar o personalizado.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
```

```
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "AmiProduct@1.0"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
                    "Sample highlight"
                ],
                "SearchKeywords": [
                    "Sample keyword"
                ],
                "Categories": [
                    "Operating Systems"
                ],
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "AddRegions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Regions": [
                    "us-east-1"
```

```
                ]
            }
        },
        {
            "ChangeType": "AddInstanceTypes",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "InstanceTypes": [
                    "t2.micro"
                ]
            }
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Version": {
                    "VersionTitle": "Test AMI Version1.0",
                    "ReleaseNotes": "Test AMI Version"
                },
                "DeliveryOptions": [
                    {
                        "Details": {
                            "AmiDeliveryOptionDetails": {
                                "AmiSource": {
                                    "AmiId": "ami-1111111111111111",
                                    "AccessRoleArn":
"arn:aws:iam::111111111111:role/AWSMarketplaceAmiIngestion",
                                    "UserName": "ec2-user",
                                    "OperatingSystemName": "AMAZONLINUX",
                                    "OperatingSystemVersion": "10.0.14393",
                                    "ScanningPort": 22
                                },
                                "UsageInstructions": "Test AMI Version",
                                "RecommendedInstanceType": "t2.micro",
                                "SecurityGroups": [
                                    {
                                        "IpProtocol": "tcp",
```

```
                                    "IpRanges": [
                                        "0.0.0.0/0"
                                    ],
                                    "FromPort": 10,
                                    "ToPort": 22
                                }
                            ]
                        }
                    }
                }
            ]
        }
    },
    {
        "ChangeType": "AddDimensions",
        "Entity": {
            "Type": "AmiProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": [
            {
                "Key": "t2.micro",
                "Description": "t2.micro",
                "Name": "t2.micro",
                "Types": [
                    "Metered"
                ],
                "Unit": "Hrs"
            }
        ]
    },
    {
        "ChangeType": "UpdateTargeting",
        "Entity": {
            "Type": "AmiProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "PositiveTargeting": {
                "BuyerAccounts": [
                    "111111111111",
                    "222222222222"
                ]
            }
```

```
            }
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public offer for AmiProduct using AWS Marketplace API
Reference Code",
                "Description": "Test public offer with hourly-monthly pricing for
AmiProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
```

```
                    "CurrencyCode": "USD",
                    "RateCards": [
                        {
                            "RateCard": [
                                {
                                    "DimensionKey": "t2.micro",
                                    "Price": "0.15"
                                }
                            ]
                        }
                    ]
                },
                {
                    "Type": "RecurringPaymentTerm",
                    "CurrencyCode": "USD",
                    "BillingPeriod": "Monthly",
                    "Price": "15.0"
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "StandardEula",
                            "Version": "2022-07-14"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateSupportTerms",
        "Entity": {
```

```
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "SupportTerm",
                        "RefundPolicy": "Absolutely no refund, period."
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de un producto de AMI público o limitado y una oferta pública con precios por hora

El siguiente ejemplo de código muestra cómo crear un producto de AMI público o limitado y una oferta pública con precios por hora. En este ejemplo se crea un EULA estándar o personalizado.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "AmiProduct@1.0"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
                    "Sample highlight"
                ],
                "SearchKeywords": [
                    "Sample keyword"
                ],
                "Categories": [
                    "Operating Systems"
                ],
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "AddRegions",
            "Entity": {
```

```
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Regions": [
                    "us-east-1"
                ]
            }
        },
        {
            "ChangeType": "AddInstanceTypes",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "InstanceTypes": [
                    "t2.micro"
                ]
            }
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Version": {
                    "VersionTitle": "Test AMI Version1.0",
                    "ReleaseNotes": "Test AMI Version"
                },
                "DeliveryOptions": [
                    {
                        "Details": {
                            "AmiDeliveryOptionDetails": {
                                "AmiSource": {
                                    "AmiId": "ami-1111111111111111",
                                    "AccessRoleArn":
"arn:aws:iam::111111111111:role/AWSMarketplaceAmiIngestion",
                                    "UserName": "ec2-user",
                                    "OperatingSystemName": "AMAZONLINUX",
                                    "OperatingSystemVersion": "10.0.14393",
                                    "ScanningPort": 22
```

```
                            },
                            "UsageInstructions": "Test AMI Version",
                            "RecommendedInstanceType": "t2.micro",
                            "SecurityGroups": [
                                {
                                    "IpProtocol": "tcp",
                                    "IpRanges": [
                                        "0.0.0.0/0"
                                    ],
                                    "FromPort": 10,
                                    "ToPort": 22
                                }
                            ]
                        }
                    }
                }
            ]
        }
    },
    {
        "ChangeType": "AddDimensions",
        "Entity": {
            "Type": "AmiProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": [
            {
                "Key": "t2.micro",
                "Description": "t2.micro",
                "Name": "t2.micro",
                "Types": [
                    "Metered"
                ],
                "Unit": "Hrs"
            }
        ]
    },
    {
        "ChangeType": "UpdateTargeting",
        "Entity": {
            "Type": "AmiProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": {
```

```
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public offer for AmiProduct using AWS Marketplace API
Reference Code",
                "Description": "Test public offer with hourly pricing for AmiProduct
using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
```

```
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.micro",
                                        "Price": "0.15"
                                    }
                                ]
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateSupportTerms",
            "Entity": {
```

```
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "SupportTerm",
                        "RefundPolicy": "Absolutely no refund, period."
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de un borrador de producto de AMI con un borrador de oferta pública

El siguiente ejemplo de código muestra cómo crear un borrador de producto de AMI con un borrador de oferta pública.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "AmiProduct@1.0"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product"
            }
        },
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier",
                "Name": "Test Offer"
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Restricción de una región con un producto de AMI implementado

El siguiente ejemplo de código muestra cómo restringir una región con un producto de AMI implementado.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "RestrictRegions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "prod-1111111111111"
            },
            "DetailsDocument": {
                "Regions": [
                    "us-west-2"
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Restricción de la visibilidad de un producto

El siguiente ejemplo de código muestra cómo restringir la visibilidad de productos.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateVisibility",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "prod-1111111111111"
            },
            "DetailsDocument": {
                "TargetVisibility": "Restricted"
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Cómo especificar si los activos de AMI están implementados en nuevas regiones

El siguiente ejemplo de código muestra cómo especificar si los activos de la AMI se implementan en las nuevas regiones creadas AWS para dar soporte a las futuras regiones.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateFutureRegionSupport",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "prod-1111111111111"
            },
            "DetailsDocument": {
                "FutureRegionSupport": {
                    "SupportedRegions": [
                        "All"
                    ]
                }
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Ofertas de socios del canal

Creación de un borrador de CPPO para cualquier tipo de producto

El siguiente ejemplo de código muestra cómo crear un borrador de CPPO para cualquier tipo de producto para poder revisarlo internamente antes de publicarlo para los compradores.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOfferUsingResaleAuthorization",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ResaleAuthorizationId": "11111111-1111-1111-1111-111111111111",
                "Name": "Test Offer",
                "Description": "Test product"
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de una oferta privada que sustituya una autorización de reventa con un precio contractual

El siguiente ejemplo de código muestra cómo crear una oferta privada que sustituya una autorización de reventa a partir de un acuerdo existente con un precio contractual.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType" : "CreateReplacementOfferUsingResaleAuthorization",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateReplacementOfferResaleAuth",
            "DetailsDocument": {
                "AgreementId": "agmt-11111111111111111111111",
                "ResaleAuthorizationId": "resaleauthz-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test replacement offer for SaaSProduct using AWS
 Marketplace API Reference Codes",
                "Description": "Test private resale replacement offer with contract
 pricing for SaaSProduct"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
```

```
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "FixedUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "Price": "0.0",
                        "Duration": "P12M",
                        "Grants": [
                            {
                                "DimensionKey": "BasicService",
                                "MaxQuantity": 2
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "ValidityTerm",
                        "AgreementEndDate": "2024-01-30"
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdatePaymentScheduleTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
```

```
                {
                    "Type": "PaymentScheduleTerm",
                    "CurrencyCode": "USD",
                    "Schedule": [
                        {
                            "ChargeDate": "2024-01-01",
                            "ChargeAmount": "0"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "StandardEula",
                            "Version": "2022-07-14"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateAvailability",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
        },
        "DetailsDocument": {
            "AvailabilityEndDate": "2023-12-31"
        }
    },
    {
```

```
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Enumere todo lo CPPOs creado por un socio de canal

El siguiente ejemplo de código muestra cómo enumerar todo lo CPPOs creado por un socio de canal.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
package com.example.awsmarketplace.catalogapi;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.core.document.Document;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
```

```
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.EntitySummary;
import software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesResponse;

public class ListAllCppoOffers {

 /*
  * List all CPPOs created by a channel partner
  */
 public static void main(String[] args) {

  List<String> cppoOfferIds = getAllCppoOfferIds();

  ReferenceCodesUtils.formatOutput(cppoOfferIds);
 }

 public static List<String> getAllCppoOfferIds() {
  MarketplaceCatalogClient marketplaceCatalogClient =
    MarketplaceCatalogClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  // get all offer entity ids
  List<String> entityIdList = new ArrayList<String>();

  ListEntitiesRequest listEntitiesRequest =
    ListEntitiesRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityType(ENTITY_TYPE_OFFER)
    .maxResults(10)
    .nextToken(null)
    .build();

  ListEntitiesResponse listEntitiesResponse =
 marketplaceCatalogClient.listEntities(listEntitiesRequest);

  for (EntitySummary entitySummary : listEntitiesResponse.entitySummaryList()) {
   entityIdList.add(entitySummary.entityId());
  }
```

```
  while (listEntitiesResponse.nextToken() != null) {
   listEntitiesRequest =
     ListEntitiesRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityType(ENTITY_TYPE_OFFER)
     .maxResults(10)
     .nextToken(listEntitiesResponse.nextToken())
     .build();
   listEntitiesResponse =
 marketplaceCatalogClient.listEntities(listEntitiesRequest);

   for (EntitySummary entitySummary : listEntitiesResponse.entitySummaryList()) {
    entityIdList.add(entitySummary.entityId());
   }
  }

  // filter for CPPO offers: ResaleAuthorizationId exists in Details

  List<String> cppoOfferIds = new ArrayList<String>();

  for (String entityId : entityIdList) {
   DescribeEntityRequest describeEntityRequest =
     DescribeEntityRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityId(entityId)
     .build();
   DescribeEntityResponse describeEntityResponse =
 marketplaceCatalogClient.describeEntity(describeEntityRequest);

   Document resaleAuthorizationDocument =
 describeEntityResponse.detailsDocument().asMap().get(ATTRIBUTE_RESALE_AUTHORIZATION_ID);
   String resaleAuthorizationId = resaleAuthorizationDocument != null ?
 resaleAuthorizationDocument.asString() : "";

   if (!resaleAuthorizationId.isEmpty()) {
       cppoOfferIds.add(resaleAuthorizationId);
   }
  }
  return cppoOfferIds;
 }

}
```

- Para obtener más información sobre la API, consulta ListEntitiesla Referencia AWS SDK for Java 2.x de la API.

Cómo mostrar todas las autorizaciones de reventa compartidas disponibles para un socio del canal

El siguiente ejemplo de código muestra cómo enumerar todas las autorizaciones de reventa compartidas disponibles para un socio del canal.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
package com.example.awsmarketplace.catalogapi;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesResponse;

public class ListAllSharedResaleAuthorizations {

 /*
  * list all resale authorizations shared to an account
  */
 public static void main(String[] args) {

  List<ListEntitiesResponse> responseList = getListEntityResponseList();
  ReferenceCodesUtils.formatOutput(responseList);
```

```
 }

 public static List<ListEntitiesResponse> getListEntityResponseList() {
  MarketplaceCatalogClient marketplaceCatalogClient =
    MarketplaceCatalogClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  List<ListEntitiesResponse> responseList = new ArrayList<ListEntitiesResponse>();

  ListEntitiesRequest listEntitiesRequest =
    ListEntitiesRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityType(ENTITY_TYPE_RESALE_AUTHORIZATION)
    .maxResults(10)
    .ownershipType(OWNERSHIP_TYPE_SHARED)
    .nextToken(null)
    .build();

  ListEntitiesResponse listEntitiesResponse =
 marketplaceCatalogClient.listEntities(listEntitiesRequest);

  responseList.add(listEntitiesResponse);

  while (listEntitiesResponse.nextToken() != null) {
   listEntitiesRequest = ListEntitiesRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityType(ENTITY_TYPE_RESALE_AUTHORIZATION)
     .maxResults(10)
     .ownershipType(OWNERSHIP_TYPE_SHARED)
     .nextToken(listEntitiesResponse.nextToken())
     .build();

   listEntitiesResponse =
 marketplaceCatalogClient.listEntities(listEntitiesRequest);

   responseList.add(listEntitiesResponse);
  }
  return responseList;
 }

}
```

- Para obtener más información sobre la API, consulta ListEntitiesla Referencia AWS SDK for Java 2.x de la API.

Cómo publicar una CPPO y adjuntar un EULA de comprador

El siguiente ejemplo de código muestra cómo publicar una CPPO y adjuntar un EULA de comprador.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType" : "CreateOfferUsingResaleAuthorization",
            "Entity": {
            "Type": "Offer@1.0"
            },
            "ChangeName": "CreateCPPOoffer",
            "DetailsDocument": {
                "ResaleAuthorizationId":"resaleauthz-1111111111111",
                "Name": "Test Offer",
                "Description":"Test product"
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
```

```
            },
            "DetailsDocument": {
                "Terms": [
           {
               "Type": "LegalTerm",
               "Documents": [
                {
                 "Type": "CustomEula",
                 "Url": "https://s3.amazonaws.com/sample-bucket/custom-eula.pdf"
                }
               ]
           }
       ]
         }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": ["222222222222"]
                    }
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-07-31"
                }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
```

```
                "Terms": [
                    {
                        "Type": "ValidityTerm",
                        "AgreementDuration": "P450D"
                    }
                ]
             }
        },
        {
            "ChangeType":"ReleaseOffer",
            "Entity":{
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una CPPO con una autorización de reventa única y actualización del margen de precios

El siguiente ejemplo de código muestra cómo publicar una CPPO mediante una autorización de reventa única en productos de AMI, SaaS o contenedor y actualizar el margen de precios.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
```

```
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType" : "CreateOfferUsingResaleAuthorization",
            "Entity": {
            "Type": "Offer@1.0"
            },
            "ChangeName": "CreateCPPOoffer",
            "DetailsDocument": {
                "ResaleAuthorizationId":"resaleauthz-1111111111111",
                "Name": "Test Offer",
                "Description":"Test product"
            }
        },
        {
            "ChangeType": "UpdateMarkup",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Percentage" : "5.0"
        }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": ["222222222222"]
                    }
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-07-31"
```

```
                }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "ValidityTerm",
                        "AgreementDuration": "P450D"
                    }
                ]
             }
        },
        {
            "ChangeType":"ReleaseOffer",
            "Entity":{
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de un borrador de CPPO y actualización del margen de precios

El siguiente ejemplo de código muestra cómo publicar un borrador de CPPO y actualizar el margen de precios.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType" : "CreateOfferUsingResaleAuthorization",
            "Entity": {
            "Type": "Offer@1.0"
            },
            "ChangeName": "CreateCPPOoffer",
            "DetailsDocument": {
                "ResaleAuthorizationId":"resaleauthz-1111111111111",
                "Name": "Test Offer",
                "Description":"Test product"
            }
        },
        {
            "ChangeType": "UpdateMarkup",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Percentage" : "5.0"
        }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
```

```
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": ["222222222222"]
                    }
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-07-31"
                }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "ValidityTerm",
                        "AgreementDuration": "P450D"
                    }
                ]
             }
        },
        {
            "ChangeType":"ReleaseOffer",
            "Entity":{
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Actualización de la fecha de caducidad de una CPPO

El siguiente ejemplo de código muestra cómo actualizar la fecha de caducidad de una CPPO para que los compradores tengan más tiempo de evaluar y aceptar la oferta.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2025-07-31"
                }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Productos de contenedor

Creación de un borrador de producto de contenedor con un borrador de oferta pública

El siguiente ejemplo de código muestra cómo crear un borrador de producto de contenedor con un borrador de oferta pública.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog":"AWSMarketplace",
    "changeSet":[
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "ContainerProduct@1.0"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product"
            }
        },
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier",
                "Name": "Test Offer"
            }
```

```
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de un producto de contenedor limitado con una oferta pública y precios contractuales

El siguiente ejemplo de código muestra cómo crear un producto de contenedor limitado con una oferta pública, precios contractuales y un EULA estándar.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "Entity": {
                "Type": "ContainerProduct@1.0"
            },
            "DetailsDocument": {},
            "ChangeName": "CreateProductChange"
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "ContainerProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "Categories": [
                    "Streaming solutions"
                ],
                "ProductTitle": "ContainerProduct",
                "AdditionalResources": [],
                "LongDescription": "Long description goes here",
                "SearchKeywords": [
                    "container streaming"
                ],
                "ShortDescription": "Description1",
                "Highlights": [
                    "Highlight 1",
                    "Highlight 2"
                ],
                "SupportDescription": "No support available",
                "VideoUrls": []
            }
        },
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "ContainerProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": [
                {
                    "Key": "Cores",
                    "Description": "Cores per cluster",
                    "Name": "Cores",
                    "Types": [
                        "Entitled"
                    ],
                    "Unit": "Units"
                }
            ]
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "ContainerProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111"
                    ]
                }
            }
        },
        {
            "ChangeType": "AddRepositories",
            "Entity": {
                "Type": "ContainerProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Repositories": [
                    {
                        "RepositoryName": "uniquerepositoryname",
                        "RepositoryType": "ECR"
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "ContainerProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            },
            "ChangeName": "CreateOfferChange"
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
```

```
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "Constraints": {
                                    "MultipleDimensionSelection": "Disallowed",
                                    "QuantityConfiguration": "Disallowed"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "Cores",
                                        "Price": "0.25"
                                    }
                                ]
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
```

```
                            "Version": "2022-07-14"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateSupportTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "SupportTerm",
                    "RefundPolicy": "No refunds"
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateInformation",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Name": "Some container offer Name",
            "Description": "Some interesting container offer description"
        }
    },
    {
        "ChangeType": "UpdateRenewalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "RenewalTerm"
                }
```

```
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Entidades

Descripción de todas las entidades en una sola llamada

El siguiente ejemplo de código muestra cómo describir todas las entidades en una sola llamada.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.catalogapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
```

```
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.BatchDescribeEntitiesRequest;
import software.amazon.awssdk.services.marketplacecatalog.model.EntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.BatchDescribeEntitiesResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.EntityDetail;
import
 software.amazon.awssdk.services.marketplacecatalog.model.BatchDescribeErrorDetail;

import java.util.Arrays;
import java.util.Map;

public class BatchDescribeEntities {

    /*
     * BatchDescribe my entities in a single call and
     *  check if it contains all the information I need to know about the entities.
     */
    public static void main(String[] args) {

        MarketplaceCatalogClient marketplaceCatalogClient =
                MarketplaceCatalogClient.builder()
                        .httpClient(ApacheHttpClient.builder().build())
                        .credentialsProvider(ProfileCredentialsProvider.create())
                        .build();

        BatchDescribeEntitiesRequest batchDescribeEntitiesRequest =
                BatchDescribeEntitiesRequest.builder()
                        .entityRequestList(Arrays.asList(
                                EntityRequest.builder()
                                        .catalog(AWS_MP_CATALOG).entityId(OFFER_ID)
                                        .build(),
                                EntityRequest.builder()

 .catalog(AWS_MP_CATALOG).entityId(PRODUCT_ID)
                                        .build()))
                        .build();

        BatchDescribeEntitiesResponse batchDescribeEntitiesResponse =
 marketplaceCatalogClient.batchDescribeEntities(batchDescribeEntitiesRequest);

        // Reading the successful entities response
```

```
        Map<String, EntityDetail> entityDetailsMap =
 batchDescribeEntitiesResponse.entityDetails();
        for (Map.Entry<String, EntityDetail> entry : entityDetailsMap.entrySet()) {
            System.out.println("EntityId: " + entry.getKey());
            ReferenceCodesUtils.formatOutput(entry.getValue());
        }

        // Logging the failed entities error details
        Map<String, BatchDescribeErrorDetail> entityErrorsMap =
 batchDescribeEntitiesResponse.errors();
        for (Map.Entry<String, BatchDescribeErrorDetail> entry :
 entityErrorsMap.entrySet()) {
            System.out.println(String.format("EntityId: %s, ErrorCode: %s,
 ErrorMessage: %s", entry.getKey(),
                    entry.getValue().errorCode(), entry.getValue().errorMessage()));
        }
    }
}
```

- Para obtener más información sobre la API, consulta BatchDescribeEntitiesla Referencia AWS SDK for Java 2.x de la API.

Cómo mostrar y describir todas las ofertas asociadas a un producto

El siguiente ejemplo de código muestra cómo enumerar y describir todas las ofertas asociadas a un producto.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
package com.example.awsmarketplace.catalogapi;

import java.util.ArrayList;
import java.util.List;
```

```
import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.EntitySummary;
import software.amazon.awssdk.services.marketplacecatalog.model.EntityTypeFilters;
import software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.OfferFilters;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferProductIdFilter;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferTargetingFilter;

public class ListProductPrivateOffers {

 private static MarketplaceCatalogClient marketplaceCatalogClient =
   MarketplaceCatalogClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();
 /*
  * retrieve all private offer information related to a single product
  */
 public static void main(String[] args) {

  List<EntitySummary> entitySummaryList = getEntitySummaryList();

  // for each offer id, output the offer detail using DescribeEntity API

  for (EntitySummary entitySummary : entitySummaryList) {
   DescribeEntityRequest describeEntityRequest =
     DescribeEntityRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityId(entitySummary.entityId())
     .build();
```

```
  DescribeEntityResponse describeEntityResponse =
marketplaceCatalogClient.describeEntity(describeEntityRequest);
  ReferenceCodesUtils.formatOutput(describeEntityResponse);
 }
}
public static List<EntitySummary> getEntitySummaryList() {
 // define list entities filters

 EntityTypeFilters entityTypeFilters =
   EntityTypeFilters.builder()
   .offerFilters(OfferFilters.builder()
     .targeting(OfferTargetingFilter.builder()
       .valueListWithStrings(OFFER_TARGETING_BUYERACCOUNTS)
       .build())
     .productId(OfferProductIdFilter.builder()
       .valueList(PRODUCT_ID)
       .build())
     .build())
   .build();

 ListEntitiesRequest listEntitiesRequest =
   ListEntitiesRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityType(ENTITY_TYPE_OFFER).maxResults(50)
   .entityTypeFilters(entityTypeFilters)
   .nextToken(null)
   .build();

 ListEntitiesResponse listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);

 // save all entitySummary of the results into entitySummaryList

 List<EntitySummary> entitySummaryList = new ArrayList<EntitySummary>();

 entitySummaryList.addAll(listEntitiesResponse.entitySummaryList());

 while ( listEntitiesResponse.nextToken() != null &&
listEntitiesResponse.nextToken().length() > 0) {
  listEntitiesRequest =
    ListEntitiesRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityType(ENTITY_TYPE_OFFER).maxResults(50)
    .entityTypeFilters(entityTypeFilters)
```

```
            .nextToken(listEntitiesResponse.nextToken())
            .build();
        listEntitiesResponse =
    marketplaceCatalogClient.listEntities(listEntitiesRequest);
        entitySummaryList.addAll(listEntitiesResponse.entitySummaryList());
      }
      return entitySummaryList;
    }

}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - DescribeEntity
  - ListEntities

Ofertas

Creación de una dimensión personalizada para un producto de SaaS y creación de una oferta privada

El siguiente ejemplo de código muestra cómo crear una dimensión personalizada para un producto de SaaS y crear una oferta privada.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
```

```
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "prod-1111111111111"
            },
            "DetailsDocument": [
                {
                    "Types": [
                        "Entitled"
                    ],
                    "Description": "Custom Pricing 4 w/ terms and coverage to be
defined in Private Offer",
                    "Unit": "Units",
                    "Key": "Custom4",
                    "Name": "Custom Pricing 4"
                }
            ]
        },
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            },
            "ChangeName": "CreateOfferChange"
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Private Test Offer - SaaS Contract Product",
                "Description": "Private Test Offer - SaaS Contract Product"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
```

```
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
```

```
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "Custom4",
                                        "Price": "300.0"
                                    }
                                ],
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P36M"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ],
    "ChangeSetName": "PrivateOfferWithCustomDimension"
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de un borrador de oferta privada para un producto de AMI o SaaS

El siguiente ejemplo de código muestra cómo crear un borrador de oferta privada para un producto de AMI o SaaS para poder revisarlo internamente antes de publicarlo para los compradores.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "Test Private Offer"
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Cree una oferta privada con contrato y Pay-As-You-Go precio para un producto SaaS

El siguiente ejemplo de código muestra cómo crear una oferta privada con contrato y Pay-As-You-Go precio para un producto SaaS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for SaaSProduct using AWS Marketplace
 API Reference Code",
                "Description": "Test private offer with subscription pricing for
 SaaSProduct using AWS Marketplace API Reference Code"
            }
```

```
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "WorkloadSmall",
                                        "Price": "0.15"
                                    },
                                    {
                                        "DimensionKey": "WorkloadMedium",
                                        "Price": "0.25"
                                    }
                                ]
                            }
                        ]
                    },
                    {
```

```
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "BasicService",
                                        "Price": "150"
                                    },
                                    {
                                        "DimensionKey": "PremiumService",
                                        "Price": "300"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
```

```
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de una oferta privada con precios contractuales y un calendario de pagos flexible para un producto de SaaS

El siguiente ejemplo de código muestra cómo crear una oferta privada con precios contractuales y un calendario de pagos flexible para un producto de SaaS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for SaaSProduct using AWS Marketplace
 API Reference Code",
                "Description": "Test private offer with subscription pricing for
 SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
```

```
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "PositiveTargeting": {
                "BuyerAccounts": [
                    "111111111111",
                    "222222222222"
                ]
            }
        }
    },
    {
        "ChangeType": "UpdatePricingTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "PricingModel": "Contract",
            "Terms": [
                {
                    "Type": "FixedUpfrontPricingTerm",
                    "CurrencyCode": "USD",
                    "Price": "0.0",
                    "Grants": [
                        {
                            "DimensionKey": "BasicService",
                            "MaxQuantity": 1
                        },
                        {
                            "DimensionKey": "PremiumService",
                            "MaxQuantity": 1
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateValidityTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
```

```
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "ValidityTerm",
                        "AgreementDuration": "P12M"
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdatePaymentScheduleTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "PaymentScheduleTerm",
                        "CurrencyCode": "USD",
                        "Schedule": [
                            {
                                "ChargeDate": "2024-01-01",
                                "ChargeAmount": "200.00"
                            },
                            {
                                "ChargeDate": "2024-02-01",
                                "ChargeAmount": "170.00"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
```

```
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de una oferta privada con precios contractuales para un producto de contenedor

El siguiente ejemplo de código muestra cómo crear de una oferta privada con precios contractuales para un producto de contenedor.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for Container product using AWS
 Marketplace API Reference Code",
                "Description": "Test private offer for Container product with
 contract pricing using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
```

```
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "Constraints": {
                                    "MultipleDimensionSelection": "Disallowed",
                                    "QuantityConfiguration": "Disallowed"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "ReqPerHour",
                                        "Price": "0.25"
                                    }
                                ]
                            }
                        ]
                    }
                ]
            }
        },
```

```
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de una oferta privada con precios contractuales para un producto de AMI

El siguiente ejemplo de código muestra cómo crear una oferta privada con precios contractuales para un producto de AMI.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for AmiProduct using AWS Marketplace API
 Reference Code",
                "Description": "Test private offer with hourly annual pricing for
 AmiProduct using AWS Marketplace API Reference Code"
            }
```

```
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
```

```
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "ReadOnlyUsers",
                                        "Price": "220.00"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
```

```
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de una oferta privada con precios anuales por hora y un calendario de pagos flexible para un producto de AMI

El siguiente ejemplo de código muestra cómo crear una oferta privada con precios anuales por hora y un calendario de pagos flexible para un producto de AMI.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
```

```
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for AmiProduct using AWS Marketplace API
 Reference Code",
                "Description": "Test private offer with hourly annual pricing for
 AmiProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
```

```
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.micro",
                                        "Price": "0.17"
                                    }
                                ]
                            }
                        ]
                    },
                    {
                        "Type": "FixedUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "Price": "0.0",
                        "Duration": "P365D",
                        "Grants": [
                            {
                                "DimensionKey": "t2.micro",
                                "MaxQuantity": 1
```

```
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateValidityTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "ValidityTerm",
                    "AgreementDuration": "P650D"
                }
            ]
        }
    },
    {
        "ChangeType": "UpdatePaymentScheduleTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "PaymentScheduleTerm",
                    "CurrencyCode": "USD",
                    "Schedule": [
                        {
                            "ChargeDate": "2024-01-01",
                            "ChargeAmount": "200.00"
                        },
                        {
                            "ChargeDate": "2024-02-01",
                            "ChargeAmount": "170.00"
                        }
                    ]
                }
            ]
```

```
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de una oferta privada con precios anuales por hora para un producto de AMI

El siguiente ejemplo de código muestra cómo crear una oferta privada con precios anuales por hora para un producto de AMI.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
```

```
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for AmiProduct using AWS Marketplace API
Reference Code",
                "Description": "Test private offer with hourly annual pricing for
AmiProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
```

```
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.micro",
                                        "Price": "0.17"
                                    }
                                ]
                            }
                        ]
                    },
                    {
```

```
                    "Type": "ConfigurableUpfrontPricingTerm",
                    "CurrencyCode": "USD",
                    "RateCards": [
                        {
                            "Selector": {
                                "Type": "Duration",
                                "Value": "P365D"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "t2.micro",
                                    "Price": "220.00"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateValidityTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "ValidityTerm",
                    "AgreementDuration": "P650D"
                }
            ]
        }
    },
    {
        "ChangeType": "ReleaseOffer",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
```

```
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de una oferta privada con precios por hora para un producto de AMI

El siguiente ejemplo de código muestra cómo crear una oferta privada con precios por hora para un producto de AMI.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
```

```
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for AmiProduct using AWS Marketplace API
Reference Code",
                "Description": "Test private offer with hourly pricing for
AmiProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
```

```
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2025-01-01"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.micro",
                                        "Price": "0.15"
                                    }
                                ]
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "ValidityTerm",
                        "AgreementDuration": "P30D"
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de una oferta privada con precios de suscripción para un producto de SaaS

El siguiente ejemplo de código muestra cómo crear una oferta privada con precios de suscripción para un producto de SaaS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
```

```
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for SaaSProduct using AWS Marketplace
API Reference Code",
                "Description": "Test private offer with subscription pricing for
SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
```

```
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "WorkloadSmall",
                                        "Price": "0.13"
                                    },
                                    {
                                        "DimensionKey": "WorkloadMedium",
                                        "Price": "0.22"
                                    }
                                ]
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "ValidityTerm",
                        "AgreementDuration": "P30D"
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
```

```
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de una oferta privada con precios contractuales escalonados para un producto de SaaS

El siguiente ejemplo de código muestra cómo crear de una oferta privada con precios contractuales escalonados para un producto de SaaS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for SaaSProduct using AWS Marketplace
 API Reference Code",
                "Description": "Test private offer with subscription pricing for
 SaaSProduct using AWS Marketplace API Reference Code"
            }
```

```
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "BasicService",
                                        "Price": "120.00"
                                    },
                                    {
                                        "DimensionKey": "PremiumService",
                                        "Price": "200.00"
                                    }
                                ],
```

```
                                "Constraints": {
                                    "MultipleDimensionSelection": "Disallowed",
                                    "QuantityConfiguration": "Disallowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
```

```
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de una oferta de prueba gratuita con precios de suscripción para un producto de SaaS

El siguiente ejemplo de código muestra cómo crear una oferta de prueba gratuita pública con precios de suscripción para un producto de SaaS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
```

```
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public free trial offer for SaaSProduct using AWS
Marketplace API Reference Code",
                "Description": "Test public free trial offer with subscription
pricing for SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Free",
                "Terms": [
                    {
                        "Type": "FreeTrialPricingTerm",
                        "Duration": "P20D",
                        "Grants": [
                            {
                                "DimensionKey": "WorkloadSmall"
                            },
                            {
                                "DimensionKey": "WorkloadMedium"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
```

```
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de una oferta privada de sustitución con un precio contractual

El siguiente ejemplo de código muestra cómo crear una oferta privada de sustitución a partir de un acuerdo existente con un precio contractual.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType" : "CreateReplacementOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateReplacementOffer",
            "DetailsDocument": {
                "AgreementId": "agmt-11111111111111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test replacement offer for SaaSProduct using AWS
 Marketplace API Reference Codes",
                "Description": "Test private replacement offer with contract pricing
 for SaaSProduct"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "FixedUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "Price": "0.0",
                        "Grants": [
```

```
                        {
                            "DimensionKey": "BasicService",
                            "MaxQuantity": 2
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateValidityTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateReplacementOffer.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "ValidityTerm",
                    "AgreementEndDate": "2024-01-30"
                }
            ]
        }
    },
    {
        "ChangeType": "UpdatePaymentScheduleTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateReplacementOffer.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "PaymentScheduleTerm",
                    "CurrencyCode": "USD",
                    "Schedule": [
                        {
                            "ChargeDate": "2024-01-01",
                            "ChargeAmount": "0"
                        }
                    ]
                }
            ]
        }
```

```
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOffer.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Descripción de una oferta pública

El siguiente ejemplo de código muestra cómo describir una oferta pública.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.catalogapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;

public class DescribeEntity {

 /*
  * Describe my AMI or SaaS or Container product and check if it contains all the
 information I need to know about the product
  */
 public static void main(String[] args) {

  String offerId = args.length > 0 ? args[0] : OFFER_ID;
```

```
 DescribeEntityResponse describeEntityResponse =
getDescribeEntityResponse(offerId);

 ReferenceCodesUtils.formatOutput(describeEntityResponse);
}

public static DescribeEntityResponse getDescribeEntityResponse(String offerId) {
 MarketplaceCatalogClient marketplaceCatalogClient =
   MarketplaceCatalogClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 DescribeEntityRequest describeEntityRequest =
   DescribeEntityRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityId(offerId)
   .build();

 DescribeEntityResponse describeEntityResponse =
marketplaceCatalogClient.describeEntity(describeEntityRequest);
 return describeEntityResponse;
}
}
```

- Para obtener más información sobre la API, consulta DescribeEntityla Referencia AWS SDK for Java 2.x de la API.

Cómo hacer que caduque un borrador de oferta privada

El siguiente ejemplo de código muestra cómo establecer la fecha de caducidad de una oferta privada en una fecha anterior para que los compradores dejen de ver la oferta.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-01-01"
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Cómo mostrar todas las ofertas privadas

El siguiente ejemplo de código muestra cómo enumerar todas las ofertas privadas.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
package com.example.awsmarketplace.catalogapi;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
```

```
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.EntitySummary;
import software.amazon.awssdk.services.marketplacecatalog.model.EntityTypeFilters;
import software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesResponse;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferAvailabilityEndDateFilter;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferAvailabilityEndDateFilterDate
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferBuyerAccountsFilter;
import software.amazon.awssdk.services.marketplacecatalog.model.OfferFilters;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferReleaseDateFilter;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferReleaseDateFilterDateRange;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferTargetingFilter;

public class ListAllPrivateOffers {

 /*
  * List all my private offers and sort or filter them by Offer Publish Date, Offer
 Expiry Date and Buyer IDs
  *
  * OfferTargetingFilter = BuyerAccounts (private offer);
  * OfferBuyerAccountsFilter: Buyer IDs filter
  * OfferAvailabilityEndDateFilter : Offer Expiry Date filter
  * OfferReleaseDateFilter : Offer Publish Date filter
  */

 private static MarketplaceCatalogClient marketplaceCatalogClient =
   MarketplaceCatalogClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
```

```
   .build();

 public static void main(String[] args) {

  String offerReleaseDateAfterValue = "2023-01-01T23:59:59Z";
  String offerAvailableEndDateAfterValue = "2040-12-24T23:59:59Z";

  List<EntitySummary> entitySummaryList =
getEntitySummaryList(offerReleaseDateAfterValue, offerAvailableEndDateAfterValue);

  // for each offer id, output the offer detail using DescribeEntity API


  for (EntitySummary entitySummary : entitySummaryList) {
   DescribeEntityRequest describeEntityRequest =
     DescribeEntityRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityId(entitySummary.entityId())
     .build();
   DescribeEntityResponse describeEntityResponse =
marketplaceCatalogClient.describeEntity(describeEntityRequest);
   ReferenceCodesUtils.formatOutput(describeEntityResponse);
  }
 }

 public static List<EntitySummary> getEntitySummaryList (String
offerReleaseDateAfterValue, String offerAvailableEndDateAfterValue) {

  EntityTypeFilters entityTypeFilters =
    EntityTypeFilters.builder()
    .offerFilters(OfferFilters.builder()
      .targeting(OfferTargetingFilter.builder()
        .valueListWithStrings(OFFER_TARGETING_BUYERACCOUNTS)
        .build())
      .buyerAccounts(OfferBuyerAccountsFilter.builder()
        .wildCardValue(BUYER_ACCOUNT_ID)
        .build())
      .availabilityEndDate(OfferAvailabilityEndDateFilter.builder()
        .dateRange(OfferAvailabilityEndDateFilterDateRange.builder()
          .afterValue(offerAvailableEndDateAfterValue).build())
        .build())
      .releaseDate(OfferReleaseDateFilter.builder()
        .dateRange(OfferReleaseDateFilterDateRange.builder()
          .afterValue(offerReleaseDateAfterValue)
```

```
            .build())
          .build())
        .build())
      .build();

  ListEntitiesRequest listEntitiesRequest =
    ListEntitiesRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityType(ENTITY_TYPE_OFFER).maxResults(10)
    .entityTypeFilters(entityTypeFilters)
    .nextToken(null)
    .build();

  ListEntitiesResponse listEntitiesResponse =
 marketplaceCatalogClient.listEntities(listEntitiesRequest);
  List<EntitySummary> entitySummaryList = new ArrayList<EntitySummary>();

  entitySummaryList.addAll(listEntitiesResponse.entitySummaryList());

  while ( listEntitiesResponse.nextToken() != null &&
 listEntitiesResponse.nextToken().length() > 0) {
    listEntitiesRequest =
      ListEntitiesRequest.builder()
      .catalog(AWS_MP_CATALOG)
      .entityType(ENTITY_TYPE_OFFER)
      .maxResults(10)
      .entityTypeFilters(entityTypeFilters)
      .nextToken(listEntitiesResponse.nextToken())
      .build();
    listEntitiesResponse =
 marketplaceCatalogClient.listEntities(listEntitiesRequest);
    entitySummaryList.addAll(listEntitiesResponse.entitySummaryList());
  }

  return entitySummaryList;
 }

}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Cómo mostrar las ofertas públicas y privadas publicadas para un ID de producto específico

El siguiente ejemplo de código muestra cómo enumerar las ofertas públicas y privadas publicadas para un ID de producto específico.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
package com.example.awsmarketplace.catalogapi;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import software.amazon.awssdk.services.marketplacecatalog.model.EntitySummary;
import software.amazon.awssdk.services.marketplacecatalog.model.EntityTypeFilters;
import software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.OfferFilters;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferProductIdFilter;
import software.amazon.awssdk.services.marketplacecatalog.model.OfferStateFilter;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferTargetingFilter;

public class ListProductPublicOrPrivateReleasedOffers {

 /*
  * List released Public/Private offers for a specific product id.
  * Example below is to list released public offers.
```

```
 * To change to released private offers, change OFFER_TARGETING_NONE (None) to
OFFER_TARGETING_BUYERACCOUNTS(BuyerAccounts)
 */
public static void main(String[] args) {

 List<EntitySummary> entitySummaryList = getEntitySummaryLIst();
 ReferenceCodesUtils.formatOutput(entitySummaryList);
}

public static List<EntitySummary> getEntitySummaryLIst() {
 MarketplaceCatalogClient marketplaceCatalogClient =
   MarketplaceCatalogClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 // define list entities filters

 EntityTypeFilters entityTypeFilters =
   EntityTypeFilters.builder()
   .offerFilters(OfferFilters.builder()
     .targeting(OfferTargetingFilter.builder()
       .valueListWithStrings(OFFER_TARGETING_NONE)
       .build())
     .state(OfferStateFilter.builder()
       .valueListWithStrings(OFFER_STATE_RELEASED)
       .build())
     .productId(OfferProductIdFilter.builder()
       .valueList(PRODUCT_ID)
       .build())
     .build())
   .build();

 ListEntitiesRequest listEntitiesRequest =
   ListEntitiesRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityType(ENTITY_TYPE_OFFER)
   .maxResults(10)
   .entityTypeFilters(entityTypeFilters)
   .nextToken(null)
   .build();

 ListEntitiesResponse listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);
```

```
  // save all entitySummary of the results into entitySummaryList

  List<EntitySummary> entitySummaryList = new ArrayList<EntitySummary>();

  entitySummaryList.addAll(listEntitiesResponse.entitySummaryList());

  while ( listEntitiesResponse.nextToken() != null &&
 listEntitiesResponse.nextToken().length() > 0) {
   listEntitiesRequest =
     ListEntitiesRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityType(ENTITY_TYPE_OFFER)
     .maxResults(10)
     .entityTypeFilters(entityTypeFilters)
     .nextToken(listEntitiesResponse.nextToken())
     .build();
   listEntitiesResponse =
 marketplaceCatalogClient.listEntities(listEntitiesRequest);
   entitySummaryList.addAll(listEntitiesResponse.entitySummaryList());
  }
  return entitySummaryList;
 }

}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Actualiza una oferta para aplicar un contrato con Pay-As-You-Go precios

El siguiente ejemplo de código muestra cómo actualizar una oferta para aplicar un contrato con Pay-As-You-Go precios.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "WorkloadSmall",
                                        "Price": "0.15"
                                    },
                                    {
                                        "DimensionKey": "WorkloadMedium",
                                        "Price": "0.25"
                                    }
                                ]
                            }
                        ]
                    },
```

```
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "BasicService",
                                        "Price": "150"
                                    },
                                    {
                                        "DimensionKey": "PremiumService",
                                        "Price": "300"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Actualización de una oferta para aplicar precios anuales por hora

El siguiente ejemplo de código muestra cómo actualizar una oferta para aplicar un precio anual por hora.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "m5.large",
                                        "Price": "0.13"
                                    }
                                ]
                            }
                        ]
                    },
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
```

```
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P365D"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "m5.large",
                                        "Price": "20.03"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Actualización de una oferta para aplicar la segmentación a regiones geográficas específicas

El siguiente ejemplo de código muestra cómo actualizar una oferta para aplicar la segmentación a regiones geográficas específicas.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "CountryCodes": [
                        "US",
                        "ES",
                        "FR",
                        "AU"
                    ]
                }
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Actualización del nombre y la descripción de una oferta pública

El siguiente ejemplo de código muestra cómo actualizar el nombre y la descripción de una oferta pública.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Actualización del EULA de una oferta

El siguiente ejemplo de código muestra cómo actualizar el EULA de una oferta.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "Name": "New offer name",
                "Description": "New offer description"
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Actualización de la fecha de caducidad de una oferta privada a una fecha futura

El siguiente ejemplo de código muestra cómo actualizar la fecha de caducidad de una oferta privada a una fecha futura para que los compradores tengan más tiempo de evaluar y aceptar la oferta.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2026-01-01"
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Actualización de la duración de la prueba gratuita de una oferta pública de prueba gratuita de un producto de SaaS

El siguiente ejemplo de código muestra cómo actualizar la duración de la prueba gratuita de una oferta pública de prueba gratuita de un producto de SaaS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "FreeTrialPricingTerm",
                        "Duration": "P21D",
                        "Grants": [
                            {
                                "DimensionKey": "WorkloadSmall"
                            },
                            {
                                "DimensionKey": "WorkloadMedium"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Actualización de la política de reembolso de una oferta

El siguiente ejemplo de código muestra cómo actualizar la política de reembolso de una oferta.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateSupportTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "SupportTerm",
                        "RefundPolicy": "Updated refund policy description"
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Productos

Descripción de un producto de AMI, SaaS o contenedor

El siguiente ejemplo de código muestra cómo describir un producto de AMI, SaaS o contenedor y comprobar si contiene toda la información que desea conocer sobre el producto.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.catalogapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;

public class DescribeEntity {

 /*
  * Describe my AMI or SaaS or Container product and check if it contains all the
 information I need to know about the product
  */
 public static void main(String[] args) {
```

```
 String offerId = args.length > 0 ? args[0] : OFFER_ID;

 DescribeEntityResponse describeEntityResponse =
getDescribeEntityResponse(offerId);

 ReferenceCodesUtils.formatOutput(describeEntityResponse);
}

public static DescribeEntityResponse getDescribeEntityResponse(String offerId) {
 MarketplaceCatalogClient marketplaceCatalogClient =
   MarketplaceCatalogClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 DescribeEntityRequest describeEntityRequest =
   DescribeEntityRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityId(offerId)
   .build();

 DescribeEntityResponse describeEntityResponse =
marketplaceCatalogClient.describeEntity(describeEntityRequest);
 return describeEntityResponse;
}
}
```

- Para obtener más información sobre la API, consulta DescribeEntityla Referencia AWS SDK for Java 2.x de la API.

Cómo mostrar todos los productos de AMI, SaaS o contenedor y las ofertas públicas asociadas

El siguiente ejemplo de código muestra cómo enumerar todos los productos de AMI, SaaS o contenedor y las ofertas públicas asociadas.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
package com.example.awsmarketplace.catalogapi;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import software.amazon.awssdk.services.marketplacecatalog.model.EntitySummary;
import software.amazon.awssdk.services.marketplacecatalog.model.EntityTypeFilters;
import software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.OfferFilters;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferProductIdFilter;
import software.amazon.awssdk.services.marketplacecatalog.model.OfferStateFilter;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferTargetingFilter;

public class ListEntities {

 /*
  * List all my AMI or SaaS or Container products and associated public offers
  */
 public static void main(String[] args) {
```

```
 Map<String, List<EntitySummary>> allProductsWithOffers =
getAllProductsWithOffers();

 ReferenceCodesUtils.formatOutput(allProductsWithOffers);
}

public static Map<String, List<EntitySummary>> getAllProductsWithOffers() {
 MarketplaceCatalogClient marketplaceCatalogClient =
   MarketplaceCatalogClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 Map<String, List<EntitySummary>> allProductsWithOffers = new HashMap<String,
List<EntitySummary>> ();

 // get all product entities
 List<EntitySummary> productEntityList = new ArrayList<EntitySummary>();

 ListEntitiesRequest listEntitiesRequest =
   ListEntitiesRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityType(PRODUCT_TYPE_AMI)
   .maxResults(10)
   .nextToken(null)
   .build();


 ListEntitiesResponse listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);

 productEntityList.addAll(listEntitiesResponse.entitySummaryList());


 while (listEntitiesResponse.nextToken() != null) {
  listEntitiesRequest =
    ListEntitiesRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityType(PRODUCT_TYPE_AMI)
    .maxResults(10)
    .nextToken(listEntitiesResponse.nextToken())
    .build();
  listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);
```

```
   productEntityList.addAll(listEntitiesResponse.entitySummaryList());
  }

  // loop through each product entity and get the public released offers associated
using product id filter

  for ( EntitySummary productEntitySummary : productEntityList) {
   EntityTypeFilters entityTypeFilters =
     EntityTypeFilters.builder()
     .offerFilters(OfferFilters.builder()
       .targeting(OfferTargetingFilter.builder()
         .valueListWithStrings(OFFER_TARGETING_NONE)
         .build())
       .state(OfferStateFilter.builder()
         .valueListWithStrings(OFFER_STATE_RELEASED)
         .build())
       .productId(OfferProductIdFilter.builder()
         .valueList(productEntitySummary.entityId())
         .build())
       .build())
     .build();

   listEntitiesRequest =
     ListEntitiesRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityType(ENTITY_TYPE_OFFER)
     .maxResults(10)
     .entityTypeFilters(entityTypeFilters)
     .nextToken(null)
     .build();

   listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);

   // save all entitySummary of the results into entitySummaryList

   List<EntitySummary> offerEntitySummaryList = new ArrayList<EntitySummary>();

   offerEntitySummaryList.addAll(listEntitiesResponse.entitySummaryList());

   while ( listEntitiesResponse.nextToken() != null &&
listEntitiesResponse.nextToken().length() > 0) {
    listEntitiesRequest =
      ListEntitiesRequest.builder()
```

```
      .catalog(AWS_MP_CATALOG)
      .entityType(ENTITY_TYPE_OFFER)
      .maxResults(10)
      .entityTypeFilters(entityTypeFilters)
      .nextToken(listEntitiesResponse.nextToken())
      .build();
    listEntitiesResponse =
 marketplaceCatalogClient.listEntities(listEntitiesRequest);
    offerEntitySummaryList.addAll(listEntitiesResponse.entitySummaryList());
   }

   // save final results into map; key = product id; value = offer entity summary
 list

   allProductsWithOffers.put(productEntitySummary.entityId(),
 offerEntitySummaryList);
  }
  return allProductsWithOffers;
 }

}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - DescribeEntity
  - ListEntities

Autorización de reventa

Creación de un borrador de autorización de reventa

El siguiente ejemplo de código muestra cómo crear un borrador de autorización de reventa para cualquier tipo de producto para poder revisarlo internamente antes de publicarlo para un socio del canal.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Descripción de una autorización de reventa

El siguiente ejemplo de código muestra cómo describir una autorización de reventa.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.catalogapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;

public class DescribeEntity {

 /*
  * Describe my AMI or SaaS or Container product and check if it contains all the
 information I need to know about the product
  */
 public static void main(String[] args) {

  String offerId = args.length > 0 ? args[0] : OFFER_ID;

  DescribeEntityResponse describeEntityResponse =
 getDescribeEntityResponse(offerId);

  ReferenceCodesUtils.formatOutput(describeEntityResponse);
 }

 public static DescribeEntityResponse getDescribeEntityResponse(String offerId) {
  MarketplaceCatalogClient marketplaceCatalogClient =
```

```
    MarketplaceCatalogClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  DescribeEntityRequest describeEntityRequest =
    DescribeEntityRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityId(offerId)
    .build();

  DescribeEntityResponse describeEntityResponse =
 marketplaceCatalogClient.describeEntity(describeEntityRequest);
  return describeEntityResponse;
 }
}
```

- Para obtener más información sobre la API, consulta DescribeEntityla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa única con una oferta privada

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa única con una oferta privada para que un socio de canal pueda utilizarla para crear una oferta privada de socio del canal (CPPO).

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
```

```
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
```

```
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "OffersMaxQuantity": 1
            }
        }
    ]
```

```
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa multiuso con fecha de caducidad

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa multiuso con fecha de caducidad para un producto de AMI con un precio anual por hora, de modo que un socio del canal pueda utilizarla para crear una CPPO.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
```

```
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
```

```
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-05-31"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa multiuso con fecha de caducidad y un EULA

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa multiuso con una fecha de caducidad para cualquier tipo de producto y añadir un EULA personalizado para enviarlo al comprador.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-05-31"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa multiuso con fecha de caducidad e incorporación de la documentación de contrato del revendedor

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa multiuso con una fecha de caducidad para cualquier tipo de producto y añadir documentación del contrato del revendedor entre el ISV y el socio del canal.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
```

```
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-05-31"
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
```

```
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    },
                    {
                        "Type": "ResaleLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomResellerContract",
                                "Url": "https://s3.amazonaws.com/aws-mp-standard-
contracts/Standard-Contact-for-AWS-Marketplace-2022-07-14.pdf"}
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
```

```
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa multiuso con fecha de caducidad e incorporación de una cuenta de comprador específica

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa multiuso con una fecha de caducidad para cualquier tipo de producto y añadir una cuenta de comprador específica para la reventa.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
```

```
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-05-31"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
```

```
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "t2.small",
                                    "Price": "150"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateBuyerTargetingTerms",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "BuyerTargetingTerm",
                    "PositiveTargeting": {
                        "BuyerAccounts": [
                            "111111111111"
                        ]
                    }
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
```

```
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa multiuso sin fecha de caducidad

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa multiuso sin fecha de caducidad para un producto de AMI con un precio anual por hora, de modo que un socio del canal pueda utilizarla para crear una CPPO.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
```

```
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
```

```
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa multiuso sin fecha de caducidad y un EULA

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa multiuso sin una fecha de caducidad para cualquier tipo de producto y añadir un EULA personalizado para enviarlo al comprador.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
```

```
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa multiuso sin fecha de caducidad e incorporación de la documentación de contrato del revendedor

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa multiuso sin una fecha de caducidad para cualquier tipo de producto y añadir documentación del contrato del revendedor entre el ISV y el socio del canal.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
```

```
            "Name": "TestResaleAuthorization",
            "Description": "Worldwide ResaleAuthorization for Test Product",
            "ResellerAccountId": "111111111111"
        }
    },
    {
        "ChangeType": "ReleaseResaleAuthorization",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {}
    },
    {
        "ChangeType": "UpdatePricingTerms",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {
            "PricingModel": "Contract",
            "Terms": [
                {
                    "Type": "ResaleConfigurableUpfrontPricingTerm",
                    "CurrencyCode": "USD",
                    "RateCards": [
                        {
                            "Selector": {
                                "Type": "Duration",
                                "Value": "P12M"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "t2.small",
                                    "Price": "150"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        }
                    ]
                }
```

```
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    },
                    {
                        "Type": "ResaleLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomResellerContract",
                                "Url": "https://s3.amazonaws.com/aws-mp-standard-
contracts/Standard-Contact-for-AWS-Marketplace-2022-07-14.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa multiuso sin fecha de caducidad e incorporación de una cuenta de comprador específica

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa multiuso sin una fecha de caducidad para cualquier tipo de producto y añadir una cuenta de comprador específica para la reventa.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
```

```
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateBuyerTargetingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
```

```
                        "Type": "BuyerTargetingTerm",
                        "PositiveTargeting": {
                            "BuyerAccounts": [
                                "111111111111"
                            ]
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa única e incorporación de un calendario de pagos flexible

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa única para cualquier tipo de producto y añadir un calendario de pagos flexible.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleFixedUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "Price": "0.00",
                        "Duration": "P12M",
                        "Grants": [
                          {
                            "DimensionKey": "Users",
                            "MaxQuantity": 10
                          }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdatePaymentScheduleTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "ResalePaymentScheduleTerm",
                        "CurrencyCode": "USD",
                        "Schedule": [
                            {
                                "ChargeDate": "2023-09-01",
                                "ChargeAmount": "200.00"
                            },
                            {
                                "ChargeDate": "2023-12-01",
                                "ChargeAmount": "250.00"
                            }
                        ]
                    }
                ]
            }
        },
        {
```

```
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-06-30",
                "OffersMaxQuantity": 1
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa única y adición de un EULA

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa única para cualquier tipo de producto y añadir un EULA personalizado para enviarlo al comprador.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "OffersMaxQuantity": 1
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa única e incorporación de una cuenta de comprador específica

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa única para cualquier tipo de producto y añadir una cuenta de comprador específica para la reventa.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
```

```
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
```

```
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "OffersMaxQuantity": "1"
            }
        },
        {
```

```
            "ChangeType": "UpdateBuyerTargetingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerTargetingTerm",
                        "PositiveTargeting": {
                            "BuyerAccounts": [
                                "111111111111"
                            ]
                        }
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa única e incorporación de documentación de contrato del revendedor

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa única para cualquier tipo de producto y añadir documentación del contrato del revendedor entre el ISV y el socio del canal.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "OffersMaxQuantity": 1
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
```

```
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de una autorización de reventa única y especificación de si se trata de una renovación

El siguiente ejemplo de código muestra cómo publicar una autorización de reventa única para cualquier tipo de producto y especificar si se trata de una renovación.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
```

```
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "UpdateBuyerTargetingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerTargetingTerm",
                        "PositiveTargeting": {
                            "BuyerAccounts": [
                                "222222222222"
                            ]
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "OffersMaxQuantity": 1
            }
        },
        {
            "ChangeType":"UpdateInformation",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "PreExistingBuyerAgreement": {
                    "AcquisitionChannel": "AwsMarketplace",
                    "PricingModel": "Contract"
```

```
                }
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Restricción de una autorización de reventa

El siguiente ejemplo de código muestra cómo restringir una autorización de reventa.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "RestrictResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "resaleauthz-1111111111111"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Actualización del nombre y la descripción de una autorización de reventa única o multiuso

El siguiente ejemplo de código muestra cómo actualizar el nombre y la descripción de una autorización de reventa única o multiuso antes de publicarla para cualquier tipo de producto.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType":"UpdateInformation",
            "Entity": {
             "Type": "ResaleAuthorization@1.0",
             "Identifier": "resaleauthz-1111111111111"
            },
            "DetailsDocument": {
             "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product"
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Productos SaaS de

Creación de un borrador de producto de SaaS con un borrador de oferta pública

El siguiente ejemplo de código muestra cómo crear un borrador de producto de SaaS con un borrador de oferta pública.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog":"AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "SaaSProduct@1.0"
            },
            "DetailsDocument": {
              "ProductTitle": "Sample product"
            }
        },
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier",
                "Name": "Test Offer"
            }
```

```
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de un producto de SaaS público o limitado y una oferta pública con precios contractuales

El siguiente ejemplo de código muestra cómo crear un producto de SaaS público o limitado y una oferta pública con precios contractuales. En este ejemplo se crea un EULA estándar o personalizado.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0"
            },
            "ChangeName": "CreateProductChange",
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
                    "Sample highlight"
                ],
                "SearchKeywords": [
                    "Sample keyword"
                ],
                "Categories": [
                    "Data Catalogs"
                ],
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "DeliveryOptions": [
                    {
```

```
                        "Details": {
                            "SaaSUrlDeliveryOptionDetails": {
                                "FulfillmentUrl":"https://sample.amazonaws.com/
sample-saas-fulfillment-url"
                            }
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": [
                {
                    "Key": "BasicService",
                    "Description": "Basic Service",
                    "Name": "Basic Service",
                    "Types": [
                        "Entitled"
                    ],
                    "Unit": "Units"
                },
                {
                    "Key": "PremiumService",
                    "Description": "Premium Service",
                    "Name": "Premium Service",
                    "Types": [
                        "Entitled"
                    ],
                    "Unit": "Units"
                }
            ]
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {}
```

```
        },
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public offer for SaaSProduct using AWS Marketplace API
Reference Code",
                "Description": "Test public offer with contract pricing for
SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P1M"
                                },
                                "RateCard": [
                                    {
```

```
                                    "DimensionKey": "BasicService",
                                    "Price": "20"
                                },
                                {
                                    "DimensionKey": "PremiumService",
                                    "Price": "25"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        },
                        {
                            "Selector": {
                                "Type": "Duration",
                                "Value": "P12M"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "BasicService",
                                    "Price": "150"
                                },
                                {
                                    "DimensionKey": "PremiumService",
                                    "Price": "300"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
```

```
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateSupportTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "SupportTerm",
                        "RefundPolicy": "Absolutely no refund, period."
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Cree un producto SaaS público o limitado y una oferta pública con contrato y precio Pay-As-You-Go

El siguiente ejemplo de código muestra cómo crear un producto SaaS público o limitado y una oferta pública con un contrato con Pay-As-You-Go precios. En este ejemplo se crea un EULA estándar o personalizado.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0"
            },
            "ChangeName": "CreateProductChange",
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
                    "Sample highlight"
                ],
```

```
                "SearchKeywords": [
                    "Sample keyword"
                ],
                "Categories": [
                    "Data Catalogs"
                ],
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "DeliveryOptions": [
                    {
                        "Details": {
                            "SaaSUrlDeliveryOptionDetails": {
                                "FulfillmentUrl":"https://sample.amazonaws.com/
sample-saas-fulfillment-url"
                            }
                        }
                    }
```

```
                ]
            }
        },
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": [
                {
                    "Key": "BasicService",
                    "Description": "Basic Service",
                    "Name": "Basic Service",
                    "Types": [
                        "Entitled"
                    ],
                    "Unit": "Units"
                },
                {
                    "Key": "PremiumService",
                    "Description": "Premium Service",
                    "Name": "Premium Service",
                    "Types": [
                        "Entitled"
                    ],
                    "Unit": "Units"
                },
                {
                    "Key": "WorkloadSmall",
                    "Description": "Workload: Per medium instance",
                    "Name": "Workload: Per medium instance",
                    "Types": [
                        "ExternallyMetered"
                    ],
                    "Unit": "Units"
                },
                {
                    "Key": "WorkloadMedium",
                    "Description": "Workload: Per large instance",
                    "Name": "Workload: Per large instance",
                    "Types": [
                        "ExternallyMetered"
                    ],
```

```
                    "Unit": "Units"
                }
            ]
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public offer for SaaSProduct using AWS Marketplace API
Reference Code",
                "Description": "Test public offer with contract pricing for
SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
```

```
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "WorkloadSmall",
                                        "Price": "0.15"
                                    },
                                    {
                                        "DimensionKey": "WorkloadMedium",
                                        "Price": "0.25"
                                    }
                                ]
                            }
                        ]
                    },
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "BasicService",
                                        "Price": "150"
                                    },
                                    {
                                        "DimensionKey": "PremiumService",
                                        "Price": "300"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
```

```
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateSupportTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "SupportTerm",
                        "RefundPolicy": "Absolutely no refund, period."
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
```

```
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Creación de un producto de SaaS público o limitado y una oferta pública con precios de suscripción

El siguiente ejemplo de código muestra cómo crear un producto de SaaS público o limitado y una oferta pública con precios de suscripción. En este ejemplo se crea un EULA estándar o personalizado.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0"
            },
            "ChangeName": "CreateProductChange",
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "SaaSProduct@1.0",
```

```
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "ProductTitle": "Sample product",
            "ShortDescription": "Brief description",
            "LongDescription": "Detailed description",
            "Highlights": [
                "Sample highlight"
            ],
            "SearchKeywords": [
                "Sample keyword"
            ],
            "Categories": [
                "Data Catalogs"
            ],
            "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
            "VideoUrls": [
                "https://sample.amazonaws.com/awsmp-video-1"
            ],
            "AdditionalResources": []
        }
    },
    {
        "ChangeType": "UpdateTargeting",
        "Entity": {
            "Type": "SaaSProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "PositiveTargeting": {
                "BuyerAccounts": [
                    "111111111111",
                    "222222222222"
                ]
            }
        }
    },
    {
        "ChangeType": "AddDeliveryOptions",
        "Entity": {
            "Type": "SaaSProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": {
```

```
                "DeliveryOptions": [
                    {
                        "Details": {
                            "SaaSUrlDeliveryOptionDetails": {
                                "FulfillmentUrl":"https://sample.amazonaws.com/
sample-saas-fulfillment-url"
                            }
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": [
                {
                    "Key": "WorkloadSmall",
                    "Description": "Workload: Per medium instance",
                    "Name": "Workload: Per medium instance",
                    "Types": [
                        "ExternallyMetered"
                    ],
                    "Unit": "Units"
                },
                {
                    "Key": "WorkloadMedium",
                    "Description": "Workload: Per large instance",
                    "Name": "Workload: Per large instance",
                    "Types": [
                        "ExternallyMetered"
                    ],
                    "Unit": "Units"
                }
            ]
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
```

```
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public offer for SaaSProduct using AWS Marketplace API
Reference Code",
                "Description": "Test public offer with contract pricing for
SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "WorkloadSmall",
                                        "Price": "0.15"
```

```
                                },
                                {
                                    "DimensionKey": "WorkloadMedium",
                                    "Price": "0.25"
                                }
                            ]
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "StandardEula",
                            "Version": "2022-07-14"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateSupportTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "SupportTerm",
                    "RefundPolicy": "Absolutely no refund, period."
                }
```

```
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de un producto de SaaS y una oferta pública asociada

El siguiente ejemplo de código muestra cómo publicar un producto de SaaS y la oferta pública asociada. El producto tendrá el estado limitado de forma predeterminada.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog":"AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
```

```
                "Type": "SaaSProduct@1.0"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
                    "Sample highlight"
                ],
                "SearchKeywords": [
                    "Sample keyword"
                ],
                "Categories": [
                    "Data Catalogs"
                ],
                "LogoUrl": "https://bucketname.s3.amazonaws.com/logo.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": [
                {
                    "Key": "BasicService",
                    "Description": "Basic Service",
                    "Name": "Basic Service",
                    "Types": [
                        "Entitled"
                    ],
```

```
                    "Unit": "Units"
                },
                {
                    "Key": "PremiumService",
                    "Description": "Premium Service",
                    "Name": "Premium Service",
                    "Types": [
                        "Entitled"
                    ],
                    "Unit": "Units"
                }
            ]
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "DeliveryOptions": [
                    {
                        "Details": {
                            "SaaSUrlDeliveryOptionDetails": {
                                "FulfillmentUrl": "https://www.aws.amazon.com/
marketplace/management"
                            }
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
```

```
            "Type": "Offer@1.0"
        },
        "DetailsDocument": {
            "ProductId": "$CreateProductChange.Entity.Identifier"
        }
    },
    {
        "ChangeType": "UpdateInformation",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Name": "New Test Offer",
            "Description": "New offer description"
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "StandardEula",
                            "Version": "2022-07-14"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateSupportTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
```

```
                "Terms": [
                    {
                        "Type": "SupportTerm",
                        "RefundPolicy": "Updated refund policy description"
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P1M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "BasicService",
                                        "Price": "20"
                                    },
                                    {
                                        "DimensionKey": "PremiumService",
                                        "Price": "25"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            },
                            {
                                "Selector": {
                                    "Type": "Duration",
```

```
                                "Value": "P12M"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "BasicService",
                                    "Price": "150"
                                },
                                {
                                    "DimensionKey": "PremiumService",
                                    "Price": "300"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateRenewalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "RenewalTerm"
                }
            ]
        }
    },
    {
        "ChangeType":"ReleaseOffer",
        "Entity":{
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {}
    }
```

```
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Publicación de un producto de SaaS y una oferta pública asociada a partir de un borrador existente

El siguiente ejemplo de código muestra cómo publicar un producto de SaaS y la oferta pública asociada a partir de un borrador existente. El producto tendrá el estado limitado de forma predeterminada.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
{
    "Catalog":"AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateVisibility",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "prod-1111111111111"
            },
            "DetailsDocument": {
                "TargetVisibility": "Public"
            }
        }
    ]
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Actualización de las dimensiones de un producto de AMI o SaaS

El siguiente ejemplo de código muestra cómo actualizar las dimensiones de un producto de AMI o SaaS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Para ejecutar este ejemplo, pase el siguiente conjunto de cambios de JSON a `RunChangesets` en Utilidades para iniciar un conjunto de cambios desde la sección Utilidades.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateDimensions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "prod-111111111111"
            },
            "DetailsDocument": [
                {
                    "Key": "BasicService",
                    "Types": [
                        "Entitled"
                    ],
                    "Name": "Some new name",
                    "Description": "Some new description"
                }
            ]
        }
    ]
```

```
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

Utilidades

Utilidades para iniciar un conjunto de cambios

El siguiente ejemplo de código muestra cómo definir utilidades para iniciar un conjunto de cambios.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

Utilidad para cargar un conjunto de cambios desde un archivo JSON y empezar a procesarlo.

```
package com.example.awsmarketplace.catalogapi;

import java.io.ByteArrayInputStream;
import java.io.IOException;
import java.io.InputStream;
import java.util.ArrayList;
import java.util.List;

import org.apache.commons.io.IOUtils;
import org.apache.commons.lang3.StringUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.core.document.Document;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.protocols.json.internal.unmarshall.document.DocumentUnmarshaller;
import software.amazon.awssdk.protocols.jsoncore.JsonNodeParser;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
```

```
import software.amazon.awssdk.services.marketplacecatalog.model.Change;
import software.amazon.awssdk.services.marketplacecatalog.model.Entity;
import
 software.amazon.awssdk.services.marketplacecatalog.model.StartChangeSetRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.StartChangeSetResponse;
import com.google.gson.Gson;
import com.google.gson.GsonBuilder;
import com.google.gson.ToNumberPolicy;
import com.example.awsmarketplace.catalogapi.Entity.ChangeSet;
import com.example.awsmarketplace.catalogapi.Entity.ChangeSetEntity;
import com.example.awsmarketplace.catalogapi.Entity.Root;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;
import com.example.awsmarketplace.utils.StringSerializer;

/**
 * Before running this Java V2 code example, convert all Details attribute to
 DetailsDocument if any
 */

public class RunChangesets {

 private static final Gson GSON = new GsonBuilder()
   .setObjectToNumberStrategy(ToNumberPolicy.LAZILY_PARSED_NUMBER)
   .registerTypeAdapter(String.class, new StringSerializer())
   .create();

 public static void main(String[] args) {

  // input json can be specified here or passed from input parameter
  String inputChangeSetFile = "changeSets/offers/
CreateReplacementOfferFromAGWithContractPricingDetailDocument.json";

  if (args.length > 0)
   inputChangeSetFile = args[0];

  // parse the input changeset file to string for process
  String changeSetsInput = readChangeSetToString(inputChangeSetFile);

  // process the changeset request
  try {
   StartChangeSetResponse result = getChangeSetRequestResult(changeSetsInput);
   ReferenceCodesUtils.formatOutput(result);
  } catch (Exception e) {
```

```
   e.printStackTrace();
  }
 }

 public static StartChangeSetResponse getChangeSetRequestResult(String
 changeSetsInput) throws IOException {

  //set up AWS credentials
  MarketplaceCatalogClient marketplaceCatalogClient =
    MarketplaceCatalogClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  //changeset list to save all the changesets in the changesets file
  List<Change> changeSetLists = new ArrayList<Change>();

  // read all changesets into object
  Root root = GSON.fromJson(changeSetsInput, Root.class);

  // process each changeset and add each changeset request to changesets list
  for (ChangeSet cs : root.changeSet) {

   ChangeSetEntity entity = cs.Entity;
   String entityType = entity.Type;
   String entityIdentifier = StringUtils.defaultIfBlank(entity.Identifier, null);
   Document detailsDocument = getDocumentFromObject(cs.DetailsDocument);

   Entity awsEntity =
     Entity.builder()
     .type(entityType)
     .identifier(entityIdentifier)
     .build();

   Change inputChangeRequest =
     Change.builder()
     .changeType(cs.ChangeType)
     .changeName(cs.ChangeName)
     .entity(awsEntity)
     .detailsDocument(detailsDocument)
     .build();

   changeSetLists.add(inputChangeRequest);
  }
```

```
 // process all changeset requests
 StartChangeSetRequest startChangeSetRequest =
   StartChangeSetRequest.builder()
   .catalog(root.catalog)
   .changeSet(changeSetLists)
   .build();

 StartChangeSetResponse result =
marketplaceCatalogClient.startChangeSet(startChangeSetRequest);

 return result;
}

public static Document getDocumentFromObject(Object detailsObject) {

 String detailsString = "{}";
 try {
  detailsString = IOUtils.toString(new
ByteArrayInputStream(GSON.toJson(detailsObject).getBytes()), "UTF-8");
 } catch (IOException e) {
  e.printStackTrace();
 }

 JsonNodeParser jsonNodeParser = JsonNodeParser.create();
 Document doc = jsonNodeParser.parse(detailsString).visit(new
DocumentUnmarshaller());
 return doc;
}


public static String readChangeSetToString (String inputChangeSetFile) {

 InputStream changesetInputStream =
RunChangesets.class.getClassLoader().getResourceAsStream(inputChangeSetFile);

 String changeSetsInput = null;

 try {
  changeSetsInput = IOUtils.toString(changesetInputStream, "UTF-8");
 } catch (IOException e) {
  e.printStackTrace();
 }
```

```
  return changeSetsInput;

 }
}
```

- Para obtener más información sobre la API, consulta StartChangeSetla Referencia AWS SDK for Java 2.x de la API.

AWS Marketplace Ejemplos de API de acuerdos con SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante la API AWS SDK for Java 2.x with AWS Marketplace Agreement.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acuerdos

Acuerdos

Obtenga todo el acuerdo IDs

El siguiente ejemplo de código muestra cómo conseguir que todos estén de acuerdo IDs.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
```

```
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.AgreementViewSummary;
import software.amazon.awssdk.services.marketplaceagreement.model.Filter;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsResponse;

import java.util.ArrayList;
import java.util.Arrays;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAllAgreementsIds {

 /*
  * Get all purchase agreements ids with party type = proposer;
  * Depend on the number of agreements in your account, this code may take some time
 to finish.
  */
 public static void main(String[] args) {

  List<String> agreementIds = getAllAgreementIds();

  ReferenceCodesUtils.formatOutput(agreementIds);

 }

 public static List<String> getAllAgreementIds() {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  // get all filters
```

```
 Filter partyType = Filter.builder().name(PARTY_TYPE_FILTER_NAME)
   .values(PARTY_TYPE_FILTER_VALUE_PROPOSER).build();

 Filter agreementType = Filter.builder().name(AGREEMENT_TYPE_FILTER_NAME)
   .values(AGREEMENT_TYPE_FILTER_VALUE_PURCHASEAGREEMENT).build();

 List<Filter> searchFilters = new ArrayList<Filter>();

 searchFilters.addAll(Arrays.asList(partyType, agreementType));

 // Save all results in a list array
 List<AgreementViewSummary> agreementSummaryList = new
ArrayList<AgreementViewSummary>();

 SearchAgreementsRequest searchAgreementsRequest =
   SearchAgreementsRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .filters(searchFilters)
   .build();

 SearchAgreementsResponse searchAgreementsResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);

 agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());

 while (searchAgreementsResponse.nextToken() != null &&
searchAgreementsResponse.nextToken().length() > 0) {
  searchAgreementsRequest =
    SearchAgreementsRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .nextToken(searchAgreementsResponse.nextToken())
    .filters(searchFilters)
    .build();
  searchAgreementsResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
  agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());
 }

 List<String> agreementIds = new ArrayList<String>();
 for (AgreementViewSummary summary : agreementSummaryList) {
  agreementIds.add(summary.agreementId());
 }
 return agreementIds;
}
```

```
}
```

- Para obtener más información sobre la API, consulta SearchAgreementsla Referencia AWS SDK for Java 2.x de la API.

Obtención de todos los contratos

El siguiente ejemplo de código muestra cómo obtener todos los contratos.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.AgreementViewSummary;
import software.amazon.awssdk.services.marketplaceagreement.model.Filter;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsResponse;

import java.util.ArrayList;
import java.util.Arrays;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
```

```
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAllAgreements {

 /*
  * Get all purchase agreements with party type = proposer;
  * Depend on the number of agreements in your account, this code may take some time
 to finish.
  */
 public static void main(String[] args) {

  List<AgreementViewSummary> agreementSummaryList = getAllAgreements();

  ReferenceCodesUtils.formatOutput(agreementSummaryList);
 }

 public static List<AgreementViewSummary> getAllAgreements() {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  // get all filters

  Filter partyType = Filter.builder().name(PARTY_TYPE_FILTER_NAME)
    .values(PARTY_TYPE_FILTER_VALUE_PROPOSER).build();

  Filter agreementType = Filter.builder().name(AGREEMENT_TYPE_FILTER_NAME)
    .values(AGREEMENT_TYPE_FILTER_VALUE_PURCHASEAGREEMENT).build();

  List<Filter> searchFilters = new ArrayList<Filter>();

  searchFilters.addAll(Arrays.asList(partyType, agreementType));

  // Save all results in a list array

  List<AgreementViewSummary> agreementSummaryList = new
 ArrayList<AgreementViewSummary>();

  SearchAgreementsRequest searchAgreementsRequest =
    SearchAgreementsRequest.builder()
    .catalog(AWS_MP_CATALOG)
```

```
    .filters(searchFilters)
    .build();

 SearchAgreementsResponse searchAgreementsResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);

 agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());

 while (searchAgreementsResponse.nextToken() != null &&
searchAgreementsResponse.nextToken().length() > 0) {
  searchAgreementsRequest =
    SearchAgreementsRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .nextToken(searchAgreementsResponse.nextToken())
    .filters(searchFilters).build();
  searchAgreementsResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
  agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());
 }
 return agreementSummaryList;
}

}
```

- Para obtener más información sobre la API, consulta SearchAgreementsla Referencia AWS SDK for Java 2.x de la API.

Obtención del ID de cliente de un contrato

El siguiente ejemplo de código muestra cómo obtener el ID de cliente de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementResponse;

public class GetAgreementCustomerInfo {

 /*
  * Obtain metadata about the customer who created the agreement, such as the
 customer's AWS Account ID
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  DescribeAgreementResponse describeAgreementResponse =
 getDescribeAgreementResponse(agreementId);

  System.out.println("Customer's AWS Account ID is " +
 describeAgreementResponse.acceptor().accountId());

 }

 public static DescribeAgreementResponse getDescribeAgreementResponse(String
 agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  DescribeAgreementRequest describeAgreementRequest =
    DescribeAgreementRequest.builder()
```

```
    .agreementId(agreementId)
    .build();

  DescribeAgreementResponse describeAgreementResponse =
 marketplaceAgreementClient.describeAgreement(describeAgreementRequest);
  return describeAgreementResponse;
 }

}
```

- Para obtener más información sobre la API, consulta DescribeAgreementla Referencia AWS SDK for Java 2.x de la API.

Obtención de los detalles financieros de un contrato

El siguiente ejemplo de código muestra cómo obtener los detalles financieros de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementResponse;
```

```
public class GetAgreementFinancialDetails {

 /*
  * Obtain financial details, such as Total Contract Value of the agreement from a
 given agreement
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  String totalContractValue = getTotalContractValue(agreementId);

  System.out.println("Total Contract Value is " + totalContractValue);

 }

 public static String getTotalContractValue(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  DescribeAgreementRequest describeAgreementRequest =
    DescribeAgreementRequest.builder()
    .agreementId(agreementId)
    .build();

  DescribeAgreementResponse describeAgreementResponse =
 marketplaceAgreementClient.describeAgreement(describeAgreementRequest);

  String totalContractValue = "N/A";

  if ( describeAgreementResponse.estimatedCharges() != null ) {
   totalContractValue =
 describeAgreementResponse.estimatedCharges().agreementValue()
     + " "
     + describeAgreementResponse.estimatedCharges().currencyCode();
  }
  return totalContractValue;
 }
}
```

- Para obtener más información sobre la API, consulta DescribeAgreementla Referencia AWS SDK for Java 2.x de la API.

Obtención de los detalles de una prueba gratuita de un contrato

El siguiente ejemplo de código muestra obtener los detalles de una prueba gratuita de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.FreeTrialPricingTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;

import java.util.ArrayList;
import java.util.List;

import com.example.awsmarketplace.utils.ReferenceCodesUtils;
```

```
public class GetAgreementTermsFreeTrialDetails {

 /*
  * Obtain the details from an agreement of a free trial I have provided to the
 customer
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<FreeTrialPricingTerm> freeTrialPricingTerms =
 getFreeTrialPricingTerms(agreementId);

  ReferenceCodesUtils.formatOutput(freeTrialPricingTerms);
 }

 public static List<FreeTrialPricingTerm> getFreeTrialPricingTerms(String
 agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
     .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
 marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

  List<FreeTrialPricingTerm> freeTrialPricingTerms = new
 ArrayList<FreeTrialPricingTerm>();

  for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
   if (acceptedTerm.freeTrialPricingTerm() != null) {
    freeTrialPricingTerms.add(acceptedTerm.freeTrialPricingTerm());
   }
  }
  return freeTrialPricingTerms;
 }
}
```

- Para obtener más información sobre la API, consulta DescribeAgreementla Referencia AWS SDK for Java 2.x de la API.

Obtención de información sobre un contrato

El siguiente ejemplo de código muestra cómo obtener información sobre un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementResponse;

public class DescribeAgreement {

 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  DescribeAgreementResponse describeAgreementResponse = getResponse(agreementId);

  ReferenceCodesUtils.formatOutput(describeAgreementResponse);
```

```
 }

 public static DescribeAgreementResponse getResponse(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  DescribeAgreementRequest describeAgreementRequest =
    DescribeAgreementRequest.builder()
    .agreementId(agreementId)
    .build();

  DescribeAgreementResponse describeAgreementResponse =
 marketplaceAgreementClient.describeAgreement(describeAgreementRequest);
  return describeAgreementResponse;
 }

}
```

- Para obtener más información sobre la API, consulta DescribeAgreementla Referencia AWS SDK for Java 2.x de la API.

Obtención de los detalles del producto y la oferta de un contrato

El siguiente ejemplo de código muestra cómo obtener los detalles del producto y la oferta de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
```

```
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementResponse;
import software.amazon.awssdk.services.marketplaceagreement.model.Resource;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;

public class GetProductAndOfferDetailFromAgreement {

 public static void main(String[] args) {

  // call Agreement API to get offer and product information for the agreement

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<DescribeEntityResponse> entityResponseList = getEntities(agreementId);

  for (DescribeEntityResponse response : entityResponseList) {
   ReferenceCodesUtils.formatOutput(response);
  }
 }

 public static List<DescribeEntityResponse> getEntities(String agreementId) {
  List<DescribeEntityResponse> entityResponseList = new
 ArrayList<DescribeEntityResponse> ();
```

```
 MarketplaceAgreementClient marketplaceAgreementClient =
   MarketplaceAgreementClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 DescribeAgreementRequest describeAgreementRequest =
   DescribeAgreementRequest.builder()
   .agreementId(agreementId)
   .build();

 DescribeAgreementResponse describeAgreementResponse =
marketplaceAgreementClient.describeAgreement(describeAgreementRequest);

 // get offer id for the given agreement

 String offerId = describeAgreementResponse.proposalSummary().offerId();

 // get all the product ids for this agreement

 List<String> productIds = new ArrayList<String>();
 for (Resource resource : describeAgreementResponse.proposalSummary().resources())
{
  productIds.add(resource.id());
 }

 // call Catalog API to get the details of the offer and products

 MarketplaceCatalogClient marketplaceCatalogClient =
   MarketplaceCatalogClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 DescribeEntityRequest describeEntityRequest =
   DescribeEntityRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityId(offerId).build();

 DescribeEntityResponse describeEntityResponse =
marketplaceCatalogClient.describeEntity(describeEntityRequest);

 entityResponseList.add(describeEntityResponse);
```

```
  for (String productId : productIds) {
   describeEntityRequest =
     DescribeEntityRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityId(productId).build();
   describeEntityResponse =
 marketplaceCatalogClient.describeEntity(describeEntityRequest);
   System.out.println("Print details for product " + productId);
   entityResponseList.add(describeEntityResponse);
  }
  return entityResponseList;
 }
}
```

- Para obtener más información sobre la API, consulta DescribeAgreementla Referencia AWS SDK for Java 2.x de la API.

Obtención del EULA de un contrato

El siguiente ejemplo de código muestra cómo obtener el EULA de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.DocumentItem;
```

```
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementTermsEula {

 /*
  * Obtain the EULA I have entered into with my customer via the agreement
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<DocumentItem> legalEulaArray = getLegalEula(agreementId);

  ReferenceCodesUtils.formatOutput(legalEulaArray);
 }

 public static List<DocumentItem> getLegalEula(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
 marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

  List<DocumentItem> legalEulaArray = new ArrayList<>();

  getAgreementTermsResponse.acceptedTerms().stream()
      .filter(acceptedTerm -> acceptedTerm.legalTerm() != null &&
 acceptedTerm.legalTerm().hasDocuments())
```

```
        .flatMap(acceptedTerm -> acceptedTerm.legalTerm().documents().stream())
        .filter(docItem -> docItem.type() != null)
        .forEach(legalEulaArray::add);
    return legalEulaArray;
  }

}
```

- Para obtener más información sobre la API, consulta GetAgreementTermsla Referencia AWS SDK for Java 2.x de la API.

Obtención de los términos de renovación automática de un contrato

El siguiente ejemplo de código muestra cómo obtener los términos de renovación automática de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;
```

```
public class GetAgreementAutoRenewal {

 /*
  * Obtain the auto-renewal status of the agreement
  */

 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  String autoRenewal = getAutoRenewal(agreementId);

  System.out.println("Auto-Renewal status is " + autoRenewal);
 }

 public static String getAutoRenewal(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder()
    .agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

  String autoRenewal = "No Auto Renewal";

  for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
   if (acceptedTerm.renewalTerm() != null &&
acceptedTerm.renewalTerm().configuration() != null
     && acceptedTerm.renewalTerm().configuration().enableAutoRenew() != null) {
    autoRenewal =
String.valueOf(acceptedTerm.renewalTerm().configuration().enableAutoRenew().booleanValue())
    break;
   }
  }
  return autoRenewal;
 }
```

```
}
```

- Para obtener más información sobre la API, consulta GetAgreementTermsla Referencia AWS SDK for Java 2.x de la API.

Obtención de las dimensiones adquiridas en un contrato

El siguiente ejemplo de código muestra cómo obtener las dimensiones adquiridas en un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import software.amazon.awssdk.services.marketplaceagreement.model.Dimension;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;
```

```
public class GetAgreementTermsDimensionPurchased {

 /*
  * Obtain the dimensions the buyer has purchased from me via the agreement
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<String> dimensionKeys = getDimensionKeys(agreementId);

  ReferenceCodesUtils.formatOutput(dimensionKeys);
 }

 public static List<String> getDimensionKeys(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

  List<String> dimensionKeys = new ArrayList<String>();
  for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
   if (acceptedTerm.configurableUpfrontPricingTerm() != null) {
    if
(acceptedTerm.configurableUpfrontPricingTerm().configuration().selectorValue() !=
null) {
     List<Dimension> dimensions =
acceptedTerm.configurableUpfrontPricingTerm().configuration().dimensions();
     for (Dimension dimension : dimensions) {
      dimensionKeys.add(dimension.dimensionKey());
     }
    }

   }
  }
  return dimensionKeys;
```

```
 }
}
```

- Para obtener más información sobre la API, consulta GetAgreementTermsla Referencia AWS SDK for Java 2.x de la API.

Obtención de las instancias de cada dimensión adquirida en un contrato

El siguiente ejemplo de código muestra cómo obtener las instancias de cada dimensión adquirida en un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import software.amazon.awssdk.services.marketplaceagreement.model.Dimension;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;
```

```
import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementTermsDimensionInstances {

 /*
  * get instances of each dimension that buyer has purchased in the agreement
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  Map<String, List<Dimension>> dimensionMap = getDimensions(agreementId);

  ReferenceCodesUtils.formatOutput(dimensionMap);
 }

 public static Map<String, List<Dimension>> getDimensions(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
 marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

  Map<String, List<Dimension>> dimensionMap = new HashMap<String,
 List<Dimension>>();

  for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
   List<Dimension> dimensionsList = new ArrayList<Dimension>();
   if (acceptedTerm.configurableUpfrontPricingTerm() != null) {
    String selectorValue = "";
    if (acceptedTerm.configurableUpfrontPricingTerm().configuration() != null) {
     if
 (acceptedTerm.configurableUpfrontPricingTerm().configuration().selectorValue() !=
 null) {
      selectorValue =
 acceptedTerm.configurableUpfrontPricingTerm().configuration().selectorValue();
```

```
    }
    if
 (acceptedTerm.configurableUpfrontPricingTerm().configuration().hasDimensions()) {
     dimensionsList =
 acceptedTerm.configurableUpfrontPricingTerm().configuration().dimensions();
    }
   }
   if (selectorValue.length() > 0) {
    dimensionMap.put(selectorValue, dimensionsList);
   }
  }
 }
 return dimensionMap;
}
}
```

- Para obtener más información sobre la API, consulta GetAgreementTermsla Referencia AWS SDK for Java 2.x de la API.

Obtención del calendario de pagos de un contrato

El siguiente ejemplo de código muestra cómo obtener el calendario de pagos de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
```

```
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;
import
 software.amazon.awssdk.services.marketplaceagreement.model.PaymentScheduleTerm;
import software.amazon.awssdk.services.marketplaceagreement.model.ScheduleItem;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementTermsPaymentSchedule {

 /*
  * Obtain the payment schedule I have agreed to with the agreement, including the
 invoice date and invoice amount
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<Map<String, Object>> paymentScheduleArray = getPaymentSchedules(agreementId);

  ReferenceCodesUtils.formatOutput(paymentScheduleArray);
 }

 public static List<Map<String, Object>> getPaymentSchedules(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();
```

```
  GetAgreementTermsResponse getAgreementTermsResponse =
 marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);
  List<Map<String, Object>> paymentScheduleArray = new ArrayList<>();

  String currencyCode = "";

  for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
   if (acceptedTerm.paymentScheduleTerm() != null) {
    PaymentScheduleTerm paymentScheduleTerm = acceptedTerm.paymentScheduleTerm();
    if (paymentScheduleTerm.currencyCode() != null) {
     currencyCode = paymentScheduleTerm.currencyCode();
    }
    if (paymentScheduleTerm.hasSchedule()) {
     for (ScheduleItem schedule : paymentScheduleTerm.schedule()) {
      if (schedule.chargeDate() != null) {
       String chargeDate = schedule.chargeDate().toString();
       String chargeAmount = schedule.chargeAmount();
       Map<String, Object> scheduleMap = new HashMap<>();
       scheduleMap.put(ATTRIBUTE_CURRENCY_CODE, currencyCode);
       scheduleMap.put(ATTRIBUTE_CHARGE_DATE, chargeDate);
       scheduleMap.put(ATTRIBUTE_CHARGE_AMOUNT, chargeAmount);
       paymentScheduleArray.add(scheduleMap);
      }
     }
    }
   }
  }
  return paymentScheduleArray;
 }
}
```

- Para obtener más información sobre la API, consulta GetAgreementTermsla Referencia AWS SDK for Java 2.x de la API.

Obtención de los precios por dimensión de un contrato

El siguiente ejemplo de código muestra cómo obtener los precios por dimensión de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementTermsPricingEachDimension {

 /*
  * Obtain pricing per each dimension in the agreement
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<Object> dimensions = getDimensions(agreementId);

  ReferenceCodesUtils.formatOutput(dimensions);
 }
```

```
 public static List<Object> getDimensions(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

  List<Object> dimensions = new ArrayList<Object>();

  for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
   List<Object> rateInfo = new ArrayList<Object>();
   if (acceptedTerm.configurableUpfrontPricingTerm() != null) {
    if (acceptedTerm.configurableUpfrontPricingTerm().type() != null) {
     rateInfo.add(acceptedTerm.configurableUpfrontPricingTerm().type());
    }
    if (acceptedTerm.configurableUpfrontPricingTerm().currencyCode() != null) {
     rateInfo.add(acceptedTerm.configurableUpfrontPricingTerm().currencyCode());
    }
    if (acceptedTerm.configurableUpfrontPricingTerm().hasRateCards()) {
     rateInfo.add(acceptedTerm.configurableUpfrontPricingTerm().rateCards());
    }
    dimensions.add(rateInfo);
   }
  }
  return dimensions;
 }
}
```

- Para obtener más información sobre la API, consulta GetAgreementTermsla Referencia AWS SDK for Java 2.x de la API.

Obtención del tipo de precios de un contrato

El siguiente ejemplo de código muestra cómo obtener el tipo de precios de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.AgreementViewSummary;
import software.amazon.awssdk.services.marketplaceagreement.model.Filter;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsResponse;

import com.fasterxml.jackson.annotation.JsonAutoDetect.Visibility;

import java.util.ArrayList;
import java.util.Arrays;
import java.util.HashMap;
import java.util.HashSet;
import java.util.Iterator;
import java.util.List;
import java.util.Map;
import java.util.Objects;
import java.util.Set;
```

```
import org.apache.commons.lang3.tuple.Triple;

import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.fasterxml.jackson.annotation.PropertyAccessor;
import com.fasterxml.jackson.core.JsonProcessingException;
import com.fasterxml.jackson.databind.JsonNode;
import com.fasterxml.jackson.databind.ObjectMapper;
import com.fasterxml.jackson.databind.ObjectWriter;
import com.fasterxml.jackson.datatype.jsr310.JavaTimeModule;

/*
 * Obtain the pricing type of the agreement (contract, FPS, metered, free etc.)
 */
public class GetAgreementPricingType {

 private static final String FILTER_NAME = "OfferId";

 private static final String FILTER_VALUE = OFFER_ID;

 // Product types
 private static final String SAAS_PRODUCT = "SaaSProduct";
 private static final String AMI_PRODUCT = "AmiProduct";
 private static final String ML_PRODUCT = "MachineLearningProduct";
 private static final String CONTAINER_PRODUCT = "ContainerProduct";
 private static final String DATA_PRODUCT = "DataProduct";
 private static final String PROSERVICE_PRODUCT = "ProfessionalServicesProduct";
 private static final String AIQ_PRODUCT = "AiqProduct";

 // Pricing types
 private static final String CCP = "CCP";
 private static final String ANNUAL = "Annual";
 private static final String CONTRACT = "Contract";
 private static final String SFT = "SaaS Free Trial";
 private static final String HMA = "Hourly and Monthly Agreements";
 private static final String HOURLY = "Hourly";
 private static final String MONTHLY = "Monthly";
 private static final String AFPS = "Annual FPS";
 private static final String CFPS = "Contract FPS";
```

```
private static final String CCPFPS = "CCP with FPS";
private static final String BYOL = "BYOL";
private static final String FREE = "Free";
private static final String FTH = "Free Trials and Hourly";

// Agreement term pricing types
private static final Set<String> LEGAL = Set.of("LegalTerm");
private static final Set<String> CONFIGURABLE_UPFRONT =
Set.of("ConfigurableUpfrontPricingTerm");
private static final Set<String> USAGE_BASED = Set.of("UsageBasedPricingTerm");
private static final Set<String> CONFIGURABLE_UPFRONT_AND_USAGE_BASED =
Set.of("ConfigurableUpfrontPricingTerm", "UsageBasedPricingTerm");
private static final Set<String> FREE_TRIAL = Set.of("FreeTrialPricingTerm");
private static final Set<String> RECURRING_PAYMENT =
Set.of("RecurringPaymentTerm");
private static final Set<String> USAGE_BASED_AND_RECURRING_PAYMENT =
Set.of("UsageBasedPricingTerm", "RecurringPaymentTerm");
private static final Set<String> FIXED_UPFRONT_AND_PAYMENT_SCHEDULE =
Set.of("FixedUpfrontPricingTerm", "PaymentScheduleTerm");
private static final Set<String> FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED
= Set.of("FixedUpfrontPricingTerm", "PaymentScheduleTerm",
"UsageBasedPricingTerm");
private static final Set<String> BYOL_PRICING = Set.of("ByolPricingTerm");
private static final Set<String> FREE_TRIAL_AND_USAGE_BASED =
Set.of("FreeTrialPricingTerm", "UsageBasedPricingTerm");

private static final List<Set<String>> ALL_AGREEMENT_TERM_TYPES_COMBINATION
= Arrays.asList(LEGAL, CONFIGURABLE_UPFRONT, USAGE_BASED,
CONFIGURABLE_UPFRONT_AND_USAGE_BASED,
  FREE_TRIAL, RECURRING_PAYMENT, USAGE_BASED_AND_RECURRING_PAYMENT,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED, BYOL_PRICING,
FREE_TRIAL_AND_USAGE_BASED);

private static  MarketplaceAgreementClient marketplaceAgreementClient =
  MarketplaceAgreementClient.builder()
  .httpClient(ApacheHttpClient.builder().build())
  .credentialsProvider(ProfileCredentialsProvider.create())
  .build();

private static MarketplaceCatalogClient marketplaceCatalogClient =
  MarketplaceCatalogClient.builder()
  .httpClient(ApacheHttpClient.builder().build())
  .credentialsProvider(ProfileCredentialsProvider.create())
```

```
  .build();

   /*
    * Get agreement Pricing Type given product type, agreement term types and offer
types if needed
    */
public static String getPricingType(String productType, Set<String>
agreementTermType, Set<String> offerType) {
 Map<Triple<String, Set<String>, Set<String>>, String> pricingTypes = new
HashMap<>();

 pricingTypes.put(Triple.of(SAAS_PRODUCT, CONFIGURABLE_UPFRONT_AND_USAGE_BASED, new
HashSet<>()), CCP);
 pricingTypes.put(Triple.of(DATA_PRODUCT, CONFIGURABLE_UPFRONT_AND_USAGE_BASED, new
HashSet<>()), CCP);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, CONFIGURABLE_UPFRONT,
CONFIGURABLE_UPFRONT_AND_USAGE_BASED), ANNUAL);
 pricingTypes.put(Triple.of(AMI_PRODUCT, CONFIGURABLE_UPFRONT,
CONFIGURABLE_UPFRONT_AND_USAGE_BASED), ANNUAL);
 pricingTypes.put(Triple.of(ML_PRODUCT, CONFIGURABLE_UPFRONT,
CONFIGURABLE_UPFRONT_AND_USAGE_BASED), ANNUAL);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, CONFIGURABLE_UPFRONT,
CONFIGURABLE_UPFRONT), CONTRACT);
 pricingTypes.put(Triple.of(AMI_PRODUCT, CONFIGURABLE_UPFRONT,
CONFIGURABLE_UPFRONT), CONTRACT);
 pricingTypes.put(Triple.of(SAAS_PRODUCT, CONFIGURABLE_UPFRONT, new HashSet<>()),
CONTRACT);
 pricingTypes.put(Triple.of(DATA_PRODUCT, CONFIGURABLE_UPFRONT, new HashSet<>()),
CONTRACT);
 pricingTypes.put(Triple.of(AIQ_PRODUCT, CONFIGURABLE_UPFRONT, new HashSet<>()),
CONTRACT);
 pricingTypes.put(Triple.of(PROSERVICE_PRODUCT, CONFIGURABLE_UPFRONT, new
HashSet<>()), CONTRACT);
 pricingTypes.put(Triple.of(SAAS_PRODUCT, FREE_TRIAL, new HashSet<>()), SFT);
 pricingTypes.put(Triple.of(AMI_PRODUCT, USAGE_BASED_AND_RECURRING_PAYMENT, new
HashSet<>()), HMA);
 pricingTypes.put(Triple.of(SAAS_PRODUCT, USAGE_BASED, new HashSet<>()), HOURLY);
 pricingTypes.put(Triple.of(AMI_PRODUCT, USAGE_BASED, new HashSet<>()), HOURLY);
 pricingTypes.put(Triple.of(ML_PRODUCT, USAGE_BASED, new HashSet<>()), HOURLY);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, RECURRING_PAYMENT, new HashSet<>()),
MONTHLY);
 pricingTypes.put(Triple.of(AMI_PRODUCT, RECURRING_PAYMENT, new HashSet<>()),
MONTHLY);
```

```
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED), AFPS);
 pricingTypes.put(Triple.of(AMI_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED), AFPS);
 pricingTypes.put(Triple.of(ML_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE, new
HashSet<>()), AFPS);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE,
new HashSet<>()), CFPS);
 pricingTypes.put(Triple.of(AMI_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE), CFPS);
 pricingTypes.put(Triple.of(SAAS_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE, new
HashSet<>()), CFPS);
 pricingTypes.put(Triple.of(DATA_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE, new
HashSet<>()), CFPS);
 pricingTypes.put(Triple.of(AIQ_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE, new
HashSet<>()), CFPS);
 pricingTypes.put(Triple.of(PROSERVICE_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE,
new HashSet<>()), CFPS);
 pricingTypes.put(Triple.of(SAAS_PRODUCT,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED, new HashSet<>()), CCPFPS);
 pricingTypes.put(Triple.of(DATA_PRODUCT,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED, new HashSet<>()), CCPFPS);
 pricingTypes.put(Triple.of(AIQ_PRODUCT,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED, new HashSet<>()), CCPFPS);
 pricingTypes.put(Triple.of(PROSERVICE_PRODUCT,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED, new HashSet<>()), CCPFPS);
 pricingTypes.put(Triple.of(AMI_PRODUCT, BYOL_PRICING, new HashSet<>()), BYOL);
 pricingTypes.put(Triple.of(SAAS_PRODUCT, BYOL_PRICING, new HashSet<>()), BYOL);
 pricingTypes.put(Triple.of(PROSERVICE_PRODUCT, BYOL_PRICING, new HashSet<>()),
BYOL);
 pricingTypes.put(Triple.of(AIQ_PRODUCT, BYOL_PRICING, new HashSet<>()), BYOL);
 pricingTypes.put(Triple.of(ML_PRODUCT, BYOL_PRICING, new HashSet<>()), BYOL);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, BYOL_PRICING, new HashSet<>()),
BYOL);
 pricingTypes.put(Triple.of(DATA_PRODUCT, BYOL_PRICING, new HashSet<>()), BYOL);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, LEGAL, new HashSet<>()), FREE);
 pricingTypes.put(Triple.of(AMI_PRODUCT, FREE_TRIAL_AND_USAGE_BASED, new
HashSet<>()), FTH);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, FREE_TRIAL_AND_USAGE_BASED, new
HashSet<>()), FTH);
 pricingTypes.put(Triple.of(ML_PRODUCT, FREE_TRIAL_AND_USAGE_BASED, new
HashSet<>()), FTH);
```

```
 Triple<String, Set<String>, Set<String>> key = Triple.of(productType,
agreementTermType, offerType);

 if (pricingTypes.containsKey(key)) {
  return pricingTypes.get(key);
 } else {
  return "Unknown";
 }
}

/*
 * Given product type and agreement term types, some combinations need to check
offer term types as well.
 */
public static String needToCheckOfferTermsType(String productType, Set<String>
agreementTermTypes) {
 Map<KeyPair, String> offerTermTypes = new HashMap<>();
 offerTermTypes.put(new KeyPair(CONTAINER_PRODUCT, CONFIGURABLE_UPFRONT), "Y");
 offerTermTypes.put(new KeyPair(AMI_PRODUCT, CONFIGURABLE_UPFRONT), "Y");
 offerTermTypes.put(new KeyPair(CONTAINER_PRODUCT,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE), "Y");
 offerTermTypes.put(new KeyPair(AMI_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE),
"Y");

 KeyPair key = new KeyPair(productType, agreementTermTypes);
 if (offerTermTypes.containsKey(key)) {
  return offerTermTypes.get(key);
 } else {
  return null;
 }
}

public static List<AgreementViewSummary> getAgreementsById() {

 List<AgreementViewSummary> agreementSummaryList = new
ArrayList<AgreementViewSummary>();

 Filter partyType =
Filter.builder().name(PARTY_TYPE_FILTER_NAME).values(PARTY_TYPE_FILTER_VALUE_PROPOSER).buil

 Filter agreementType =
Filter.builder().name(AGREEMENT_TYPE_FILTER_NAME).values(AGREEMENT_TYPE_FILTER_VALUE_PURCHA
```

```
 Filter customizeFilter =
Filter.builder().name(FILTER_NAME).values(FILTER_VALUE).build();

 SearchAgreementsRequest searchAgreementsRequest =
   SearchAgreementsRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .filters(partyType, agreementType, customizeFilter).build();

 SearchAgreementsResponse searchResultResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);

 agreementSummaryList.addAll(searchResultResponse.agreementViewSummaries());

 while (searchResultResponse.nextToken() != null &&
searchResultResponse.nextToken().length() > 0) {
  searchAgreementsRequest =
SearchAgreementsRequest.builder().catalog(AWS_MP_CATALOG)
    .filters(partyType,
agreementType).nextToken(searchResultResponse.nextToken()).build();
  searchResultResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
  agreementSummaryList.addAll(searchResultResponse.agreementViewSummaries());
 }
 return agreementSummaryList;

}

static class KeyPair {
 private final String first;
 private final Set<String> second;

 public KeyPair(String productType, Set<String> second) {
  this.first = productType;
  this.second = second;
 }

 @Override
 public int hashCode() {
  return Objects.hash(first, second);
 }

 @Override
 public boolean equals(Object obj) {
  if (this == obj)
```

```
    return true;
   if (obj == null || getClass() != obj.getClass())
    return false;
   KeyPair other = (KeyPair) obj;
   return Objects.equals(first, other.first) && Objects.equals(second,
other.second);
  }
}

/*
 * Get all the term types for the offer
 */
public static Set<String> getOfferTermTypes(String offerId) {

 Set<String> offerTermTypes = new HashSet<String>();

 DescribeEntityRequest request =
   DescribeEntityRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityId(offerId)
   .build();

 DescribeEntityResponse result = marketplaceCatalogClient.describeEntity(request);

 String details = result.details();

 try {
  ObjectMapper objectMapper = new ObjectMapper();
  JsonNode rootNode = objectMapper.readTree(details);
  JsonNode termsNode = rootNode.get(ATTRIBUTE_TERMS);

  for (JsonNode termNode : termsNode) {
   if (termNode.get(ATTRIBUTE_TYPE_ENTITY) != null ) {
    offerTermTypes.add(termNode.get(ATTRIBUTE_TYPE_ENTITY).asText());
   }
  }
 } catch (Exception e) {
  e.printStackTrace();
 }

 return offerTermTypes;

}
```

```
/*
 * Get all the agreement term types
 */
public static Set<String> getAgreementTermTypes(GetAgreementTermsResponse
agreementTerm) {
 Set<String> agreementTermTypes = new HashSet<String>();
 try {
  for (AcceptedTerm term : agreementTerm.acceptedTerms()) {
   ObjectMapper objectMapper = new ObjectMapper();
   JsonNode termNode = objectMapper.readTree(getJson(term));
   Iterator<Map.Entry<String, JsonNode>> fieldsIterator = termNode.fields();
   while (fieldsIterator.hasNext()) {
    Map.Entry<String, JsonNode> entry = fieldsIterator.next();
    JsonNode value = entry.getValue();
    if (value.isObject() && value.has(ATTRIBUTE_TYPE_AGREEMENT)) {
     agreementTermTypes.add(value.get(ATTRIBUTE_TYPE_AGREEMENT).asText());
    }
   }
  }
 } catch (Exception e) {
  e.printStackTrace();
 }
 return agreementTermTypes;

}

/*
 * make sure all elements in array2 exist in array1
 */
public static boolean allElementsExist(Set<String> array1, Set<String> array2) {
 for (String element : array2) {
  boolean found = false;
  for (String str : array1) {
   if (element.equals(str)) {
    found = true;
    break;
   }
  }
  if (!found) {
   return false;
  }
 }
 return true;
}
```

```
/*
 * Find the combinations of the agreement term types for the agreement
 */
public static Set<String> getMatchedTermTypesCombination(Set<String>
agreementTermTypes) {
 Set<String> matchedCombination = new HashSet<String>();
 for (Set<String> element : ALL_AGREEMENT_TERM_TYPES_COMBINATION) {
  if (allElementsExist(agreementTermTypes, element)) {
   matchedCombination = element;
  }
 }
 return matchedCombination;
}

public static void main(String[] args) {

 List<AgreementViewSummary> agreements = getAgreementsById();

 for (AgreementViewSummary summary : agreements) {
  String pricingType = "";
  String agreementId = summary.agreementId();
  System.out.println(agreementId);
  String offerId = summary.proposalSummary().offerId();

  //get all pricing term types for the offer in the agreement
  Set<String> offerTermTypes = getOfferTermTypes(offerId);
  String productType = summary.proposalSummary().resources().get(0).type();

  //get all pricing term types for the agreement
  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();
  GetAgreementTermsResponse getAgreementTermsResponse =
marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);
  Set<String> agreementTermTypes =
getAgreementTermTypes(getAgreementTermsResponse);

  //get matched pricing term type combination set
  Set<String> agreementMatchedTermType =
getMatchedTermTypesCombination(agreementTermTypes);

  //check to see if this agreement pricing term combination needs additional check
on offer pricing terms
```

```
    String needToCheckOfferType = needToCheckOfferTermsType(productType,
 agreementMatchedTermType);

    // get the pricing type for the agreement based on the product type, agreement
 term types and offer term types if needed
    if (needToCheckOfferType != null) {
     Set<String> offerMatchedTermType =
 getMatchedTermTypesCombination(offerTermTypes);
     pricingType = getPricingType(productType, agreementMatchedTermType,
 offerMatchedTermType);
    } else if (agreementMatchedTermType == LEGAL) {
     pricingType = FREE;
    } else {
     pricingType = getPricingType(productType, agreementMatchedTermType, new
 HashSet());
    }
    System.out.println("Pricing type is " + pricingType);
   }
  }

  private static String getJson(Object result) {
   String json = "";

   try {
    ObjectMapper om = new ObjectMapper();
    om.setVisibility(PropertyAccessor.FIELD, Visibility.ANY);
    om.registerModule(new JavaTimeModule());
    ObjectWriter ow = om.writer().withDefaultPrettyPrinter();

    json = ow.writeValueAsString(result);
   } catch (JsonProcessingException e) {
    e.printStackTrace();
   }
   return json;
  }

}
```

- Para obtener más información sobre la API, consulta DescribeAgreementla Referencia AWS SDK for Java 2.x de la API.

Obtención del tipo de producto de un contrato

El siguiente ejemplo de código muestra cómo obtener el tipo de producto de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementResponse;
import software.amazon.awssdk.services.marketplaceagreement.model.Resource;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;

import java.util.ArrayList;
import java.util.List;

import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementProductType {

 /*
  * Obtain the Product Type of the product the agreement was created on
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;
```

```
 List<String> productIds = getProducts(agreementId);

 ReferenceCodesUtils.formatOutput(productIds);
}

public static List<String> getProducts(String agreementId) {
 MarketplaceAgreementClient marketplaceAgreementClient =
   MarketplaceAgreementClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 DescribeAgreementRequest describeAgreementRequest =
   DescribeAgreementRequest.builder()
   .agreementId(agreementId)
   .build();

 DescribeAgreementResponse describeAgreementResponse =
marketplaceAgreementClient.describeAgreement(describeAgreementRequest);

 List<String> productIds = new ArrayList<String>();
 for (Resource resource : describeAgreementResponse.proposalSummary().resources())
{
  productIds.add(resource.id() + ":" + resource.type());
 }
 return productIds;
}
}
```

- Para obtener más información sobre la API, consulta DescribeAgreementla Referencia AWS SDK for Java 2.x de la API.

Obtención del estado de un contrato

El siguiente ejemplo de código muestra cómo obtener el estado de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementResponse;

public class GetAgreementStatus {

 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  DescribeAgreementResponse describeAgreementResponse =
 getDescribeAgreementResponse(agreementId);

  System.out.println("Agreement status is " + describeAgreementResponse.status());

 }

 public static DescribeAgreementResponse getDescribeAgreementResponse(String
 agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
```

```
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  DescribeAgreementRequest describeAgreementRequest =
    DescribeAgreementRequest.builder()
    .agreementId(agreementId)
    .build();

  DescribeAgreementResponse describeAgreementResponse =
 marketplaceAgreementClient.describeAgreement(describeAgreementRequest);
  return describeAgreementResponse;
 }

}
```

- Para obtener más información sobre la API, consulta DescribeAgreementla Referencia AWS SDK for Java 2.x de la API.

Obtención de las condiciones de soporte de un contrato

El siguiente ejemplo de código muestra cómo obtener las condiciones de soporte de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
```

```
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;
import software.amazon.awssdk.services.marketplaceagreement.model.SupportTerm;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementTermsSupportTerm {

 /*
  * Obtain the support and refund policy I have provided to the customer
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<SupportTerm> supportTerms = getSupportTerms(agreementId);

  ReferenceCodesUtils.formatOutput(supportTerms);
 }

 public static List<SupportTerm> getSupportTerms(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
 marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

  List<SupportTerm> supportTerms = new ArrayList<>();

  for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
   if (acceptedTerm.supportTerm() != null) {
```

```
    supportTerms.add(acceptedTerm.supportTerm());
   }
  }
  return supportTerms;
 }

}
```

- Para obtener más información sobre la API, consulta GetAgreementTermsla Referencia AWS SDK for Java 2.x de la API.

Obtención de las condiciones de un contrato

El siguiente ejemplo de código muestra cómo obtener las condiciones de un contrato.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;
```

```
public class GetAgreementTerms {

 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  GetAgreementTermsResponse getAgreementTermsResponse =
 getAgreementTermsResponse(agreementId);

  ReferenceCodesUtils.formatOutput(getAgreementTermsResponse);

 }

 public static GetAgreementTermsResponse getAgreementTermsResponse(String
 agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder()
    .agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
 marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);
  return getAgreementTermsResponse;
 }

}
```

- Para obtener más información sobre la API, consulta GetAgreementTermsla Referencia AWS SDK for Java 2.x de la API.

Búsqueda de contratos por fecha de finalización

El siguiente ejemplo de código muestra cómo buscar contratos por fecha de finalización.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.AgreementViewSummary;
import software.amazon.awssdk.services.marketplaceagreement.model.Filter;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsResponse;

import java.util.ArrayList;
import java.util.Arrays;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class SearchAgreementsByEndDate {

 static String beforeOrAfterEndtimeFilterName =
 BeforeOrAfterEndTimeFilterName.BeforeEndTime.name();

 static String cutoffDate = "2050-11-18T00:00:00Z";

 static String partyTypeFilterValue = PARTY_TYPE_FILTER_VALUE_PROPOSER;

 public static void main(String[] args) {
```

```
 List<AgreementViewSummary> agreementSummaryList = getAgreements();

 ReferenceCodesUtils.formatOutput(agreementSummaryList);
}

public static List<AgreementViewSummary> getAgreements() {
 MarketplaceAgreementClient marketplaceAgreementClient =
   MarketplaceAgreementClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 // set up filters

 Filter partyTypeFilter = Filter.builder().name(PARTY_TYPE_FILTER_NAME)
   .values(PARTY_TYPE_FILTER_VALUE_PROPOSER).build();

 Filter agreementTypeFilter = Filter.builder().name(AGREEMENT_TYPE_FILTER_NAME)
   .values(AGREEMENT_TYPE_FILTER_VALUE_PURCHASEAGREEMENT).build();

 Filter customizeFilter =
Filter.builder().name(beforeOrAfterEndtimeFilterName).values(cutoffDate).build();

 List<Filter> filters = new ArrayList<Filter>();

 filters.addAll(Arrays.asList(partyTypeFilter, agreementTypeFilter,
customizeFilter));

 // search agreement with filters

 SearchAgreementsRequest searchAgreementsRequest =
   SearchAgreementsRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .filters(filters)
   .build();

 SearchAgreementsResponse searchAgreementResponse=
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);

 List<AgreementViewSummary> agreementSummaryList = new
ArrayList<AgreementViewSummary>();

 agreementSummaryList.addAll(searchAgreementResponse.agreementViewSummaries());
```

```
  while (searchAgreementResponse.nextToken() != null &&
 searchAgreementResponse.nextToken().length() > 0) {
   searchAgreementsRequest =
     SearchAgreementsRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .filters(filters)
     .nextToken(searchAgreementResponse.nextToken())
     .build();
   searchAgreementResponse =
 marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
   agreementSummaryList.addAll(searchAgreementResponse.agreementViewSummaries());
  }
  return agreementSummaryList;
 }

}
```

- Para obtener más información sobre la API, consulta SearchAgreementsla Referencia AWS SDK for Java 2.x de la API.

Búsqueda de contratos con un filtro personalizado

El siguiente ejemplo de código muestra cómo buscar contratos con un filtro personalizado.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
```

```
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.AgreementViewSummary;
import software.amazon.awssdk.services.marketplaceagreement.model.Filter;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsResponse;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;

import java.util.ArrayList;
import java.util.Arrays;
import java.util.List;

import com.example.awsmarketplace.utils.ReferenceCodesUtils;

/**
 * To search by
 * offer id: OfferId;
 * product id: ResourceIdentifier;
 * customer AWS account id: AcceptorAccountId
 * product type: ResourceType (i.e. SaasProduct)
 * status: Status. status values can be: ACTIVE, CANCELED,
 *   EXPIRED, RENEWED, REPLACED, ROLLED_BACK, SUPERSEDED, TERMINATED
 */

public class SearchAgreementsByOneFilter {

 private static final String FILTER_NAME = "ResourceType";

 private static final String FILTER_VALUE = "SaaSProduct";

 /*
  * search agreements by one customize filter
  */
 public static void main(String[] args) {

  List<AgreementViewSummary> agreementSummaryList = getAgreements();

  ReferenceCodesUtils.formatOutput(agreementSummaryList);
 }
```

```
public static List<AgreementViewSummary> getAgreements() {
 MarketplaceAgreementClient marketplaceAgreementClient =
   MarketplaceAgreementClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 Filter partyTypeFilter = Filter.builder().name(PARTY_TYPE_FILTER_NAME)
   .values(PARTY_TYPE_FILTER_VALUE_PROPOSER).build();

 Filter agreementTypeFilter = Filter.builder().name(AGREEMENT_TYPE_FILTER_NAME)
   .values(AGREEMENT_TYPE_FILTER_VALUE_PURCHASEAGREEMENT).build();

 Filter customizeFilter =
Filter.builder().name(FILTER_NAME).values(FILTER_VALUE).build();

 List<Filter> filters = new ArrayList<Filter>();

 filters.addAll(Arrays.asList(partyTypeFilter, agreementTypeFilter,
customizeFilter));

 SearchAgreementsRequest searchAgreementsRequest =
   SearchAgreementsRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .filters(filters)
   .build();
 SearchAgreementsResponse searchAgreementsResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);

 List<AgreementViewSummary> agreementSummaryList = new
ArrayList<AgreementViewSummary>();

 agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());

 while (searchAgreementsResponse.nextToken() != null &&
searchAgreementsResponse.nextToken().length() > 0) {
  searchAgreementsRequest =
    SearchAgreementsRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .filters(filters)
    .nextToken(searchAgreementsResponse.nextToken())
    .build();
  searchAgreementsResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
```

```
    agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());
   }
   return agreementSummaryList;
  }

}
```

- Para obtener más información sobre la API, consulta SearchAgreementsla Referencia AWS SDK for Java 2.x de la API.

Búsqueda de contratos con dos filtros personalizados

El siguiente ejemplo de código muestra cómo buscar contratos con dos filtros personalizados.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Biblioteca de código de referencia de la API de AWS Marketplace.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.AwsCredentialsProvider;
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.AgreementViewSummary;
import software.amazon.awssdk.services.marketplaceagreement.model.Filter;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsResponse;
```

```
import java.util.ArrayList;
import java.util.Arrays;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

/**
 * Party Type = Proposer AND Acceptor:
 *  AfterEndTime
 *  BeforeEndTime
 *  ResourceIdentifier + BeforeEndTime
 *  ResourceIdentifier + AfterEndTime
 *  ResourceType + BeforeEndTime
 *  ResourceType + AfterEndTime
 *
 * Party Type = Proposer
 *  ResourceIdentifier
 *  OfferId
 *  AcceptorAccountId
 *  Status (ACTIVE)
 *  Status (ACTIVE) + ResourceIdentifier
 *  Status (ACTIVE) + AcceptorAccountId
 *  Status (ACTIVE) + OfferId
 *  Status (ACTIVE) + ResourceType
 *  AcceptorAccountId + BeforeEndTime
 *  AcceptorAccountId + AfterEndTime
 *  AcceptorAccountId + AfterEndTime
 *  OfferId + BeforeEndTime
 *
 * Status values can be: ACTIVE, CANCELLED, EXPIRED, RENEWED, REPLACED, ROLLED_BACK,
 SUPERSEDED, TERMINATED
 */

public class SearchAgreementsByTwoFilters {

 public static final String FILTER_1_NAME = "ResourceType";

 public static final String FILTER_1_VALUE = "SaaSProduct";

 public static final String FILTER_2_NAME = "Status";

 public static final String FILTER_2_VALUE = "ACTIVE";
```

```
/*
 * search agreements by two customize filter
 */
public static void main(String[] args) {

 List<AgreementViewSummary> agreementSummaryList = getAgreements();

 ReferenceCodesUtils.formatOutput(agreementSummaryList);

}

public static List<AgreementViewSummary> getAgreements() {
 MarketplaceAgreementClient marketplaceAgreementClient =
   MarketplaceAgreementClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 Filter partyTypeFilter = Filter.builder().name(PARTY_TYPE_FILTER_NAME)
   .values(PARTY_TYPE_FILTER_VALUE_PROPOSER).build();

 Filter agreementTypeFilter = Filter.builder().name(AGREEMENT_TYPE_FILTER_NAME)
   .values(AGREEMENT_TYPE_FILTER_VALUE_PURCHASEAGREEMENT).build();

 Filter customizeFilter1 =
Filter.builder().name(FILTER_1_NAME).values(FILTER_1_VALUE).build();

 Filter customizeFilter2 =
Filter.builder().name(FILTER_2_NAME).values(FILTER_2_VALUE).build();


 List<Filter> filters = new ArrayList<Filter>();

 filters.addAll(Arrays.asList(partyTypeFilter, agreementTypeFilter,
customizeFilter1, customizeFilter2));

 SearchAgreementsRequest searchAgreementsRequest =
   SearchAgreementsRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .filters(filters)
   .build();
```

```
 SearchAgreementsResponse searchAgreementsResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);

 List<AgreementViewSummary> agreementSummaryList = new
ArrayList<AgreementViewSummary>();

 agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());

 while (searchAgreementsResponse.nextToken() != null &&
searchAgreementsResponse.nextToken().length() > 0) {
  searchAgreementsRequest =
    SearchAgreementsRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .filters(filters)
    .nextToken(searchAgreementsResponse.nextToken())
    .build();
  searchAgreementsResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
  agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());
 }
 return agreementSummaryList;
}

}
```

- Para obtener más información sobre la API, consulta SearchAgreementsla Referencia AWS SDK for Java 2.x de la API.

MediaConvert ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with MediaConvert.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`CreateJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
package com.example.mediaconvert;

import java.net.URI;
import java.util.HashMap;
import java.util.Map;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediaconvert.MediaConvertClient;
import software.amazon.awssdk.services.mediaconvert.model.DescribeEndpointsResponse;
import software.amazon.awssdk.services.mediaconvert.model.DescribeEndpointsRequest;
import software.amazon.awssdk.services.mediaconvert.model.Output;
import software.amazon.awssdk.services.mediaconvert.model.MediaConvertException;
import software.amazon.awssdk.services.mediaconvert.model.OutputGroup;
import software.amazon.awssdk.services.mediaconvert.model.OutputGroupSettings;
import software.amazon.awssdk.services.mediaconvert.model.HlsGroupSettings;
import software.amazon.awssdk.services.mediaconvert.model.OutputGroupType;
import software.amazon.awssdk.services.mediaconvert.model.HlsDirectoryStructure;
import software.amazon.awssdk.services.mediaconvert.model.HlsManifestDurationFormat;
import software.amazon.awssdk.services.mediaconvert.model.HlsStreamInfResolution;
import software.amazon.awssdk.services.mediaconvert.model.HlsClientCache;
import software.amazon.awssdk.services.mediaconvert.model.HlsCaptionLanguageSetting;
import software.amazon.awssdk.services.mediaconvert.model.HlsManifestCompression;
import software.amazon.awssdk.services.mediaconvert.model.HlsCodecSpecification;
import software.amazon.awssdk.services.mediaconvert.model.HlsOutputSelection;
import software.amazon.awssdk.services.mediaconvert.model.HlsProgramDateTime;
import software.amazon.awssdk.services.mediaconvert.model.HlsTimedMetadataId3Frame;
import software.amazon.awssdk.services.mediaconvert.model.HlsSegmentControl;
```

```
import software.amazon.awssdk.services.mediaconvert.model.FileGroupSettings;
import software.amazon.awssdk.services.mediaconvert.model.ContainerSettings;
import software.amazon.awssdk.services.mediaconvert.model.VideoDescription;
import software.amazon.awssdk.services.mediaconvert.model.ContainerType;
import software.amazon.awssdk.services.mediaconvert.model.ScalingBehavior;
import software.amazon.awssdk.services.mediaconvert.model.VideoTimecodeInsertion;
import software.amazon.awssdk.services.mediaconvert.model.ColorMetadata;
import software.amazon.awssdk.services.mediaconvert.model.RespondToAfd;
import software.amazon.awssdk.services.mediaconvert.model.AfdSignaling;
import software.amazon.awssdk.services.mediaconvert.model.DropFrameTimecode;
import software.amazon.awssdk.services.mediaconvert.model.VideoCodecSettings;
import software.amazon.awssdk.services.mediaconvert.model.H264Settings;
import software.amazon.awssdk.services.mediaconvert.model.VideoCodec;
import software.amazon.awssdk.services.mediaconvert.model.CreateJobRequest;
import software.amazon.awssdk.services.mediaconvert.model.H264RateControlMode;
import software.amazon.awssdk.services.mediaconvert.model.H264QualityTuningLevel;
import software.amazon.awssdk.services.mediaconvert.model.H264SceneChangeDetect;
import
 software.amazon.awssdk.services.mediaconvert.model.AacAudioDescriptionBroadcasterMix;
import software.amazon.awssdk.services.mediaconvert.model.H264ParControl;
import software.amazon.awssdk.services.mediaconvert.model.AacRawFormat;
import software.amazon.awssdk.services.mediaconvert.model.H264QvbrSettings;
import
 software.amazon.awssdk.services.mediaconvert.model.H264FramerateConversionAlgorithm;
import software.amazon.awssdk.services.mediaconvert.model.H264CodecLevel;
import software.amazon.awssdk.services.mediaconvert.model.H264FramerateControl;
import software.amazon.awssdk.services.mediaconvert.model.AacCodingMode;
import software.amazon.awssdk.services.mediaconvert.model.H264Telecine;
import
 software.amazon.awssdk.services.mediaconvert.model.H264FlickerAdaptiveQuantization;
import software.amazon.awssdk.services.mediaconvert.model.H264GopSizeUnits;
import software.amazon.awssdk.services.mediaconvert.model.H264CodecProfile;
import software.amazon.awssdk.services.mediaconvert.model.H264GopBReference;
import software.amazon.awssdk.services.mediaconvert.model.AudioTypeControl;
import software.amazon.awssdk.services.mediaconvert.model.AntiAlias;
import software.amazon.awssdk.services.mediaconvert.model.H264SlowPal;
import
 software.amazon.awssdk.services.mediaconvert.model.H264SpatialAdaptiveQuantization;
import software.amazon.awssdk.services.mediaconvert.model.H264Syntax;
import software.amazon.awssdk.services.mediaconvert.model.M3u8Settings;
import software.amazon.awssdk.services.mediaconvert.model.InputDenoiseFilter;
import
 software.amazon.awssdk.services.mediaconvert.model.H264TemporalAdaptiveQuantization;
import software.amazon.awssdk.services.mediaconvert.model.CreateJobResponse;
```

```
import
 software.amazon.awssdk.services.mediaconvert.model.H264UnregisteredSeiTimecode;
import software.amazon.awssdk.services.mediaconvert.model.H264EntropyEncoding;
import software.amazon.awssdk.services.mediaconvert.model.InputPsiControl;
import software.amazon.awssdk.services.mediaconvert.model.ColorSpace;
import software.amazon.awssdk.services.mediaconvert.model.H264RepeatPps;
import software.amazon.awssdk.services.mediaconvert.model.H264FieldEncoding;
import software.amazon.awssdk.services.mediaconvert.model.M3u8NielsenId3;
import software.amazon.awssdk.services.mediaconvert.model.InputDeblockFilter;
import software.amazon.awssdk.services.mediaconvert.model.InputRotate;
import software.amazon.awssdk.services.mediaconvert.model.H264DynamicSubGop;
import software.amazon.awssdk.services.mediaconvert.model.TimedMetadata;
import software.amazon.awssdk.services.mediaconvert.model.JobSettings;
import software.amazon.awssdk.services.mediaconvert.model.AudioDefaultSelection;
import software.amazon.awssdk.services.mediaconvert.model.VideoSelector;
import software.amazon.awssdk.services.mediaconvert.model.AacSpecification;
import software.amazon.awssdk.services.mediaconvert.model.Input;
import software.amazon.awssdk.services.mediaconvert.model.OutputSettings;
import software.amazon.awssdk.services.mediaconvert.model.H264AdaptiveQuantization;
import software.amazon.awssdk.services.mediaconvert.model.AudioLanguageCodeControl;
import software.amazon.awssdk.services.mediaconvert.model.InputFilterEnable;
import software.amazon.awssdk.services.mediaconvert.model.AudioDescription;
import software.amazon.awssdk.services.mediaconvert.model.H264InterlaceMode;
import software.amazon.awssdk.services.mediaconvert.model.AudioCodecSettings;
import software.amazon.awssdk.services.mediaconvert.model.AacSettings;
import software.amazon.awssdk.services.mediaconvert.model.AudioCodec;
import software.amazon.awssdk.services.mediaconvert.model.AacRateControlMode;
import software.amazon.awssdk.services.mediaconvert.model.AacCodecProfile;
import software.amazon.awssdk.services.mediaconvert.model.HlsIFrameOnlyManifest;
import software.amazon.awssdk.services.mediaconvert.model.FrameCaptureSettings;
import software.amazon.awssdk.services.mediaconvert.model.AudioSelector;
import software.amazon.awssdk.services.mediaconvert.model.M3u8PcrControl;
import software.amazon.awssdk.services.mediaconvert.model.InputTimecodeSource;
import software.amazon.awssdk.services.mediaconvert.model.HlsSettings;
import software.amazon.awssdk.services.mediaconvert.model.M3u8Scte35Source;

/**
 * Create a MediaConvert job. Must supply MediaConvert access role Amazon
 * Resource Name (ARN), and a
 * valid video input file via Amazon S3 URL.
 *
 * Also, set up your development environment, including your credentials.
 *
 * For information, see this documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 */
public class CreateJob {
        public static void main(String[] args) {
                final String usage = """

                                Usage:
                                    <mcRoleARN> <fileInput>\s

                                Where:
                                    mcRoleARN - The MediaConvert Role ARN.\s
                                    fileInput -  The URL of an Amazon S3 bucket
 where the input file is located.\s
                                """;

                if (args.length != 2) {
                        System.out.println(usage);
                        System.exit(1);
                }

                String mcRoleARN = args[0];
                String fileInput = args[1];
                Region region = Region.US_WEST_2;
                MediaConvertClient mc = MediaConvertClient.builder()
                                .region(region)
                                .build();

                String id = createMediaJob(mc, mcRoleARN, fileInput);
                System.out.println("MediaConvert job created. Job Id = " + id);
                mc.close();
        }

        public static String createMediaJob(MediaConvertClient mc, String mcRoleARN,
 String fileInput) {

                String s3path = fileInput.substring(0, fileInput.lastIndexOf('/') +
 1) + "javasdk/out/";
                String fileOutput = s3path + "index";
                String thumbsOutput = s3path + "thumbs/";
                String mp4Output = s3path + "mp4/";

                try {
```

```
                        System.out.println("MediaConvert role arn: " + mcRoleARN);
                        System.out.println("MediaConvert input file: " + fileInput);
                        System.out.println("MediaConvert output path: " + s3path);

                        // output group Preset HLS low profile
                        Output hlsLow = createOutput("hls_low", "_low", "_$dt$",
 750000, 7, 1920, 1080, 640);
                        // output group Preset HLS media profile
                        Output hlsMedium = createOutput("hls_medium", "_medium", "_
$dt$", 1200000, 7, 1920, 1080, 1280);
                        // output group Preset HLS high profole
                        Output hlsHigh = createOutput("hls_high", "_high", "_$dt$",
 3500000, 8, 1920, 1080, 1920);

                        OutputGroup appleHLS = OutputGroup.builder().name("Apple
 HLS").customName("Example")

 .outputGroupSettings(OutputGroupSettings.builder()

 .type(OutputGroupType.HLS_GROUP_SETTINGS)

 .hlsGroupSettings(HlsGroupSettings.builder()

 .directoryStructure(

    HlsDirectoryStructure.SINGLE_DIRECTORY)

 .manifestDurationFormat(

    HlsManifestDurationFormat.INTEGER)

 .streamInfResolution(

    HlsStreamInfResolution.INCLUDE)

 .clientCache(HlsClientCache.ENABLED)

 .captionLanguageSetting(

    HlsCaptionLanguageSetting.OMIT)

 .manifestCompression(

    HlsManifestCompression.NONE)
```

```
.codecSpecification(

   HlsCodecSpecification.RFC_4281)

.outputSelection(

   HlsOutputSelection.MANIFESTS_AND_SEGMENTS)

.programDateTime(HlsProgramDateTime.EXCLUDE)

.programDateTimePeriod(600)

.timedMetadataId3Frame(

   HlsTimedMetadataId3Frame.PRIV)

.timedMetadataId3Period(10)

.destination(fileOutput)

.segmentControl(HlsSegmentControl.SEGMENTED_FILES)

.minFinalSegmentLength((double) 0)

.segmentLength(4).minSegmentLength(0).build())
                                                        .build())
                                        .outputs(hlsLow, hlsMedium,
hlsHigh).build();

                        OutputGroup fileMp4 = OutputGroup.builder().name("File
Group").customName("mp4")

.outputGroupSettings(OutputGroupSettings.builder()

.type(OutputGroupType.FILE_GROUP_SETTINGS)

.fileGroupSettings(FileGroupSettings.builder()

.destination(mp4Output).build())
                                                        .build())
                                        .outputs(Output.builder().extension("mp4")

.containerSettings(ContainerSettings.builder()
```

```
.container(ContainerType.MP4).build())

.videoDescription(VideoDescription.builder().width(1280)
                                                                    .height(720)

.scalingBehavior(ScalingBehavior.DEFAULT)

.sharpness(50).antiAlias(AntiAlias.ENABLED)

.timecodeInsertion(

   VideoTimecodeInsertion.DISABLED)

.colorMetadata(ColorMetadata.INSERT)

.respondToAfd(RespondToAfd.NONE)

.afdSignaling(AfdSignaling.NONE)

.dropFrameTimecode(DropFrameTimecode.ENABLED)

.codecSettings(VideoCodecSettings.builder()

   .codec(VideoCodec.H_264)

   .h264Settings(H264Settings

                  .builder()

                  .rateControlMode(

                                 H264RateControlMode.QVBR)

                  .parControl(H264ParControl.INITIALIZE_FROM_SOURCE)

                  .qualityTuningLevel(

                                 H264QualityTuningLevel.SINGLE_PASS)

                  .qvbrSettings(

                                 H264QvbrSettings.builder()
```

```
                                        .qvbrQualityLevel(
                                                8)
                                        .build())
                .codecLevel(H264CodecLevel.AUTO)
                .codecProfile(H264CodecProfile.MAIN)
                .maxBitrate(2400000)
                .framerateControl(
                        H264FramerateControl.INITIALIZE_FROM_SOURCE)
                .gopSize(2.0)
                .gopSizeUnits(H264GopSizeUnits.SECONDS)
                .numberBFramesBetweenReferenceFrames(
                        2)
                .gopClosedCadence(
                        1)
                .gopBReference(H264GopBReference.DISABLED)
                .slowPal(H264SlowPal.DISABLED)
                .syntax(H264Syntax.DEFAULT)
                .numberReferenceFrames(
                        3)
                .dynamicSubGop(H264DynamicSubGop.STATIC)
                .fieldEncoding(H264FieldEncoding.PAFF)
                .sceneChangeDetect(
```

```
                        H264SceneChangeDetect.ENABLED)
                .minIInterval(0)
                .telecine(H264Telecine.NONE)
                .framerateConversionAlgorithm(
                        H264FramerateConversionAlgorithm.DUPLICATE_DROP)
                .entropyEncoding(
                        H264EntropyEncoding.CABAC)
                .slices(1)
                .unregisteredSeiTimecode(
                        H264UnregisteredSeiTimecode.DISABLED)
                .repeatPps(H264RepeatPps.DISABLED)
                .adaptiveQuantization(
                        H264AdaptiveQuantization.HIGH)
                .spatialAdaptiveQuantization(
                        H264SpatialAdaptiveQuantization.ENABLED)
                .temporalAdaptiveQuantization(
                        H264TemporalAdaptiveQuantization.ENABLED)
                .flickerAdaptiveQuantization(
                        H264FlickerAdaptiveQuantization.DISABLED)
                .softness(0)
                .interlaceMode(H264InterlaceMode.PROGRESSIVE)
                .build())
```

```
   .build())
                                                                    .build())
.audioDescriptions(AudioDescription.builder()
.audioTypeControl(AudioTypeControl.FOLLOW_INPUT)
.languageCodeControl(
   AudioLanguageCodeControl.FOLLOW_INPUT)
.codecSettings(AudioCodecSettings.builder()
   .codec(AudioCodec.AAC)
   .aacSettings(AacSettings
                  .builder()
                  .codecProfile(AacCodecProfile.LC)
                  .rateControlMode(
                                AacRateControlMode.CBR)
                  .codingMode(AacCodingMode.CODING_MODE_2_0)
                  .sampleRate(44100)
                  .bitrate(160000)
                  .rawFormat(AacRawFormat.NONE)
                  .specification(AacSpecification.MPEG4)
                  .audioDescriptionBroadcasterMix(
                                AacAudioDescriptionBroadcasterMix.NORMAL)
                  .build())
   .build())
                                                                    .build())
```

```
                                                        .build())
                                        .build();
                        OutputGroup thumbs = OutputGroup.builder().name("File
Group").customName("thumbs")

.outputGroupSettings(OutputGroupSettings.builder()

.type(OutputGroupType.FILE_GROUP_SETTINGS)

.fileGroupSettings(FileGroupSettings.builder()

.destination(thumbsOutput).build())
                                                        .build())
                                        .outputs(Output.builder().extension("jpg")

.containerSettings(ContainerSettings.builder()

.container(ContainerType.RAW).build())

.videoDescription(VideoDescription.builder()

.scalingBehavior(ScalingBehavior.DEFAULT)

.sharpness(50).antiAlias(AntiAlias.ENABLED)

.timecodeInsertion(

   VideoTimecodeInsertion.DISABLED)

.colorMetadata(ColorMetadata.INSERT)

.dropFrameTimecode(DropFrameTimecode.ENABLED)

.codecSettings(VideoCodecSettings.builder()

   .codec(VideoCodec.FRAME_CAPTURE)

   .frameCaptureSettings(

                  FrameCaptureSettings

                                    .builder()

                                    .framerateNumerator(
```

```
                                                    1)

                                    .framerateDenominator(

                                                    1)

                                    .maxCaptures(10000000)

                                    .quality(80)

                                    .build())

   .build())
                                                                        .build())
                                                        .build())
                                        .build();

                        Map<String, AudioSelector> audioSelectors = new HashMap<>();
                        audioSelectors.put("Audio Selector 1",

AudioSelector.builder().defaultSelection(AudioDefaultSelection.DEFAULT)
                                                        .offset(0).build());

                        JobSettings jobSettings =
JobSettings.builder().inputs(Input.builder()
                                        .audioSelectors(audioSelectors)
                                        .videoSelector(

VideoSelector.builder().colorSpace(ColorSpace.FOLLOW)

.rotate(InputRotate.DEGREE_0).build())

.filterEnable(InputFilterEnable.AUTO).filterStrength(0)
                                        .deblockFilter(InputDeblockFilter.DISABLED)

.denoiseFilter(InputDenoiseFilter.DISABLED).psiControl(InputPsiControl.USE_PSI)

.timecodeSource(InputTimecodeSource.EMBEDDED).fileInput(fileInput).build())
                                        .outputGroups(appleHLS, thumbs,
fileMp4).build();

                        CreateJobRequest createJobRequest =
CreateJobRequest.builder().role(mcRoleARN)
```

```
                                        .settings(jobSettings)
                                        .build();

                        CreateJobResponse createJobResponse =
mc.createJob(createJobRequest);
                        return createJobResponse.job().id();

                } catch (MediaConvertException e) {
                        System.out.println(e.toString());
                        System.exit(0);
                }
                return "";
        }

        private final static Output createOutput(String customName,
                        String nameModifier,
                        String segmentModifier,
                        int qvbrMaxBitrate,
                        int qvbrQualityLevel,
                        int originWidth,
                        int originHeight,
                        int targetWidth) {

                int targetHeight = Math.round(originHeight * targetWidth /
originWidth)
                                - (Math.round(originHeight * targetWidth /
originWidth) % 4);
                Output output = null;
                try {
                        output =
Output.builder().nameModifier(nameModifier).outputSettings(OutputSettings.builder()

.hlsSettings(HlsSettings.builder().segmentModifier(segmentModifier)

.audioGroupId("program_audio")

.iFrameOnlyManifest(HlsIFrameOnlyManifest.EXCLUDE).build())
                                        .build())

.containerSettings(ContainerSettings.builder().container(ContainerType.M3_U8)

.m3u8Settings(M3u8Settings.builder().audioFramesPerPes(4)

.pcrControl(M3u8PcrControl.PCR_EVERY_PES_PACKET)
```

```
.pmtPid(480).privateMetadataPid(503)

.programNumber(1).patInterval(0).pmtInterval(0)

.scte35Source(M3u8Scte35Source.NONE)

.scte35Pid(500).nielsenId3(M3u8NielsenId3.NONE)

.timedMetadata(TimedMetadata.NONE)

.timedMetadataPid(502).videoPid(481)

.audioPids(482, 483, 484, 485, 486, 487, 488,

   489, 490, 491, 492)
                                                                        .build())
                                                          .build())
                                        .videoDescription(

VideoDescription.builder().width(targetWidth)

.height(targetHeight)

.scalingBehavior(ScalingBehavior.DEFAULT)

.sharpness(50).antiAlias(AntiAlias.ENABLED)

.timecodeInsertion(

   VideoTimecodeInsertion.DISABLED)

.colorMetadata(ColorMetadata.INSERT)

.respondToAfd(RespondToAfd.NONE)

.afdSignaling(AfdSignaling.NONE)

.dropFrameTimecode(DropFrameTimecode.ENABLED)

.codecSettings(VideoCodecSettings.builder()

   .codec(VideoCodec.H_264)
```

```
    .h264Settings(H264Settings
                    .builder()
                    .rateControlMode(
                                    H264RateControlMode.QVBR)
                    .parControl(H264ParControl.INITIALIZE_FROM_SOURCE)
                    .qualityTuningLevel(
                                    H264QualityTuningLevel.SINGLE_PASS)
                    .qvbrSettings(H264QvbrSettings
                                    .builder()
                                    .qvbrQualityLevel(
                                                    qvbrQualityLevel)
                                    .build())
                    .codecLevel(H264CodecLevel.AUTO)
                    .codecProfile((targetHeight > 720
                                    && targetWidth > 1280)
                                                    ? H264CodecProfile.HIGH
                                                    : H264CodecProfile.MAIN)
                    .maxBitrate(qvbrMaxBitrate)
                    .framerateControl(
                                    H264FramerateControl.INITIALIZE_FROM_SOURCE)
                    .gopSize(2.0)
                    .gopSizeUnits(H264GopSizeUnits.SECONDS)
```

```
                .numberBFramesBetweenReferenceFrames(
                        2)
                .gopClosedCadence(
                        1)
                .gopBReference(H264GopBReference.DISABLED)
                .slowPal(H264SlowPal.DISABLED)
                .syntax(H264Syntax.DEFAULT)
                .numberReferenceFrames(
                        3)
                .dynamicSubGop(H264DynamicSubGop.STATIC)
                .fieldEncoding(H264FieldEncoding.PAFF)
                .sceneChangeDetect(
                        H264SceneChangeDetect.ENABLED)
                .minIInterval(0)
                .telecine(H264Telecine.NONE)
                .framerateConversionAlgorithm(
                        H264FramerateConversionAlgorithm.DUPLICATE_DROP)
                .entropyEncoding(
                        H264EntropyEncoding.CABAC)
                .slices(1)
                .unregisteredSeiTimecode(
                        H264UnregisteredSeiTimecode.DISABLED)
```

```
                    .repeatPps(H264RepeatPps.DISABLED)
                    .adaptiveQuantization(
                                    H264AdaptiveQuantization.HIGH)
                    .spatialAdaptiveQuantization(
                                    H264SpatialAdaptiveQuantization.ENABLED)
                    .temporalAdaptiveQuantization(
                                    H264TemporalAdaptiveQuantization.ENABLED)
                    .flickerAdaptiveQuantization(
                                    H264FlickerAdaptiveQuantization.DISABLED)
                    .softness(0)
                    .interlaceMode(H264InterlaceMode.PROGRESSIVE)
                    .build())
    .build())
                                                                    .build())
.audioDescriptions(AudioDescription.builder()
.audioTypeControl(AudioTypeControl.FOLLOW_INPUT)
.languageCodeControl(AudioLanguageCodeControl.FOLLOW_INPUT)
.codecSettings(AudioCodecSettings.builder()
.codec(AudioCodec.AAC).aacSettings(AacSettings
    .builder()
    .codecProfile(AacCodecProfile.LC)
    .rateControlMode(
```

```
                    AacRateControlMode.CBR)
    .codingMode(AacCodingMode.CODING_MODE_2_0)
    .sampleRate(44100)
    .bitrate(96000)
    .rawFormat(AacRawFormat.NONE)
    .specification(AacSpecification.MPEG4)
    .audioDescriptionBroadcasterMix(
                    AacAudioDescriptionBroadcasterMix.NORMAL)
    .build())
                                                                .build())
                                                        .build())
                                    .build();
            } catch (MediaConvertException e) {
                    e.printStackTrace();
                    System.exit(0);
            }
            return output;
        }
}
```

- Para obtener más información sobre la API, consulta CreateJobla Referencia AWS SDK for Java 2.x de la API.

`GetJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediaconvert.model.DescribeEndpointsResponse;
import software.amazon.awssdk.services.mediaconvert.model.GetJobRequest;
import software.amazon.awssdk.services.mediaconvert.model.DescribeEndpointsRequest;
import software.amazon.awssdk.services.mediaconvert.model.GetJobResponse;
import software.amazon.awssdk.services.mediaconvert.model.MediaConvertException;
import software.amazon.awssdk.services.mediaconvert.MediaConvertClient;
import java.net.URI;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetJob {

    public static void main(String[] args) {

        final String usage = "\n" +
                "  <jobId> \n\n" +
                "Where:\n" +
                "  jobId - The job id value.\n\n";

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String jobId = args[0];
        Region region = Region.US_WEST_2;
        MediaConvertClient mc = MediaConvertClient.builder()
```

```
                .region(region)
                .build();

        getSpecificJob(mc, jobId);
        mc.close();
    }

    public static void getSpecificJob(MediaConvertClient mc, String jobId) {
        try {
            GetJobRequest jobRequest = GetJobRequest.builder()
                    .id(jobId)
                    .build();

            GetJobResponse response = mc.getJob(jobRequest);
            System.out.println("The ARN of the job is " + response.job().arn());

        } catch (MediaConvertException e) {
            System.out.println(e.toString());
            System.exit(0);
        }
    }
}
```

- Para obtener más información sobre la API, consulta GetJobla Referencia AWS SDK for Java 2.x de la API.

`ListJobs`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListJobs`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediaconvert.MediaConvertClient;
```

```
import software.amazon.awssdk.services.mediaconvert.model.ListJobsRequest;
import software.amazon.awssdk.services.mediaconvert.model.DescribeEndpointsResponse;
import software.amazon.awssdk.services.mediaconvert.model.DescribeEndpointsRequest;
import software.amazon.awssdk.services.mediaconvert.model.ListJobsResponse;
import software.amazon.awssdk.services.mediaconvert.model.Job;
import software.amazon.awssdk.services.mediaconvert.model.MediaConvertException;
import java.net.URI;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListJobs {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        MediaConvertClient mc = MediaConvertClient.builder()
                .region(region)
                .build();

        listCompleteJobs(mc);
        mc.close();
    }

    public static void listCompleteJobs(MediaConvertClient mc) {
        try {
            // Create the ListJobsRequest
            ListJobsRequest jobsRequest = ListJobsRequest.builder()
                    .maxResults(10)
                    .status("COMPLETE")
                    .build();

            // Call the listJobs operation
            ListJobsResponse jobsResponse = mc.listJobs(jobsRequest);
            List<Job> jobs = jobsResponse.jobs();
            for (Job job : jobs) {
                System.out.println("The JOB ARN is : " + job.arn());
            }

        } catch (MediaConvertException e) {
```

```
            System.out.println(e.toString());
            System.exit(0);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListJobsla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Migration Hub usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el AWS SDK for Java 2.x uso de Migration Hub.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`DeleteProgressUpdateStream`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteProgressUpdateStream`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import
 software.amazon.awssdk.services.migrationhub.model.DeleteProgressUpdateStreamRequest;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteProgressStream {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <progressStream>\s

                Where:
                    progressStream - the name of a progress stream to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String progressStream = args[0];
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        deleteStream(migrationClient, progressStream);
        migrationClient.close();
    }

    public static void deleteStream(MigrationHubClient migrationClient, String
 streamName) {
        try {
```

```
            DeleteProgressUpdateStreamRequest deleteProgressUpdateStreamRequest =
 DeleteProgressUpdateStreamRequest
                    .builder()
                    .progressUpdateStreamName(streamName)
                    .build();


 migrationClient.deleteProgressUpdateStream(deleteProgressUpdateStreamRequest);
            System.out.println(streamName + " is deleted");

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteProgressUpdateStreamla Referencia AWS SDK for Java 2.x de la API.

`DescribeApplicationState`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeApplicationState`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import
 software.amazon.awssdk.services.migrationhub.model.DescribeApplicationStateRequest;
import
 software.amazon.awssdk.services.migrationhub.model.DescribeApplicationStateResponse;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeAppState {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    DescribeAppState <appId>\s

                Where:
                    appId -  the application id value.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        describeApplicationState(migrationClient, appId);
        migrationClient.close();
    }

    public static void describeApplicationState(MigrationHubClient migrationClient,
 String appId) {
        try {
            DescribeApplicationStateRequest applicationStateRequest =
 DescribeApplicationStateRequest.builder()
                    .applicationId(appId)
                    .build();

            DescribeApplicationStateResponse applicationStateResponse =
 migrationClient
```

```
                    .describeApplicationState(applicationStateRequest);
            System.out.println("The application status is " +
 applicationStateResponse.applicationStatusAsString());

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DescribeApplicationStatela Referencia AWS SDK for Java 2.x de la API.

`DescribeMigrationTask`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeMigrationTask`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import
 software.amazon.awssdk.services.migrationhub.model.DescribeMigrationTaskRequest;
import
 software.amazon.awssdk.services.migrationhub.model.DescribeMigrationTaskResponse;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeMigrationTask {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    DescribeMigrationTask <migrationTask> <progressStream>\s

                Where:
                    migrationTask - the name of a migration task.\s
                    progressStream - the name of a progress stream.\s
                """;

        if (args.length < 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String migrationTask = args[0];
        String progressStream = args[1];
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        describeMigTask(migrationClient, migrationTask, progressStream);
        migrationClient.close();
    }

    public static void describeMigTask(MigrationHubClient migrationClient, String
 migrationTask,
            String progressStream) {
        try {
            DescribeMigrationTaskRequest migrationTaskRequestRequest =
 DescribeMigrationTaskRequest.builder()
                    .progressUpdateStream(progressStream)
                    .migrationTaskName(migrationTask)
                    .build();

            DescribeMigrationTaskResponse migrationTaskResponse = migrationClient
                    .describeMigrationTask(migrationTaskRequestRequest);
```

```
            System.out.println("The name is " +
 migrationTaskResponse.migrationTask().migrationTaskName());

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DescribeMigrationTaskla Referencia AWS SDK for Java 2.x de la API.

`ImportMigrationTask`

En el siguiente ejemplo de código, se muestra cómo utilizar `ImportMigrationTask`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import
 software.amazon.awssdk.services.migrationhub.model.CreateProgressUpdateStreamRequest;
import
 software.amazon.awssdk.services.migrationhub.model.ImportMigrationTaskRequest;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class ImportMigrationTask {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <migrationTask> <progressStream>\s

                Where:
                    migrationTask - the name of a migration task.\s
                    progressStream - the name of a progress stream.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String migrationTask = args[0];
        String progressStream = args[1];
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        importMigrTask(migrationClient, migrationTask, progressStream);
        migrationClient.close();
    }

    public static void importMigrTask(MigrationHubClient migrationClient, String
 migrationTask, String progressStream) {
        try {
            CreateProgressUpdateStreamRequest progressUpdateStreamRequest =
 CreateProgressUpdateStreamRequest.builder()
                    .progressUpdateStreamName(progressStream)
                    .dryRun(false)
                    .build();

            migrationClient.createProgressUpdateStream(progressUpdateStreamRequest);
            ImportMigrationTaskRequest migrationTaskRequest =
 ImportMigrationTaskRequest.builder()
                    .migrationTaskName(migrationTask)
                    .progressUpdateStream(progressStream)
                    .dryRun(false)
```

```
                    .build();

            migrationClient.importMigrationTask(migrationTaskRequest);

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ImportMigrationTaskla Referencia AWS SDK for Java 2.x de la API.

`ListApplications`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListApplications`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import software.amazon.awssdk.services.migrationhub.model.ApplicationState;
import
 software.amazon.awssdk.services.migrationhub.model.ListApplicationStatesRequest;
import
 software.amazon.awssdk.services.migrationhub.model.ListApplicationStatesResponse;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListApplications {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        listApps(migrationClient);
        migrationClient.close();
    }

    public static void listApps(MigrationHubClient migrationClient) {
        try {
            ListApplicationStatesRequest applicationStatesRequest =
 ListApplicationStatesRequest.builder()
                    .maxResults(10)
                    .build();

            ListApplicationStatesResponse response =
 migrationClient.listApplicationStates(applicationStatesRequest);
            List<ApplicationState> apps = response.applicationStateList();
            for (ApplicationState appState : apps) {
                System.out.println("App Id is " + appState.applicationId());
                System.out.println("The status is " +
 appState.applicationStatus().toString());
            }

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListApplicationsla Referencia AWS SDK for Java 2.x de la API.

`ListCreatedArtifacts`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListCreatedArtifacts`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import software.amazon.awssdk.services.migrationhub.model.CreatedArtifact;
import
 software.amazon.awssdk.services.migrationhub.model.ListCreatedArtifactsRequest;
import
 software.amazon.awssdk.services.migrationhub.model.ListCreatedArtifactsResponse;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;
import java.util.List;

/**
 * To run this Java V2 code example, ensure that you have setup your development
 * environment, including your credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListCreatedArtifacts {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        listArtifacts(migrationClient);
        migrationClient.close();
    }

    public static void listArtifacts(MigrationHubClient migrationClient) {
        try {
```

```
            ListCreatedArtifactsRequest listCreatedArtifactsRequest =
 ListCreatedArtifactsRequest.builder()
                    .maxResults(10)
                    .migrationTaskName("SampleApp5")
                    .progressUpdateStream("ProgressSteamB")
                    .build();

            ListCreatedArtifactsResponse response =
 migrationClient.listCreatedArtifacts(listCreatedArtifactsRequest);
            List<CreatedArtifact> apps = response.createdArtifactList();
            for (CreatedArtifact artifact : apps) {
                System.out.println("APp Id is " + artifact.description());
                System.out.println("The name is " + artifact.name());
            }

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListCreatedArtifactsla Referencia AWS SDK for Java 2.x de la API.

`ListMigrationTasks`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListMigrationTasks`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import software.amazon.awssdk.services.migrationhub.model.ListMigrationTasksRequest;
```

```
import
 software.amazon.awssdk.services.migrationhub.model.ListMigrationTasksResponse;
import software.amazon.awssdk.services.migrationhub.model.MigrationTaskSummary;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListMigrationTasks {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        listMigrTasks(migrationClient);
        migrationClient.close();
    }

    public static void listMigrTasks(MigrationHubClient migrationClient) {
        try {
            ListMigrationTasksRequest listMigrationTasksRequest =
 ListMigrationTasksRequest.builder()
                    .maxResults(10)
                    .build();

            ListMigrationTasksResponse response =
 migrationClient.listMigrationTasks(listMigrationTasksRequest);
            List<MigrationTaskSummary> migrationList =
 response.migrationTaskSummaryList();
            for (MigrationTaskSummary migration : migrationList) {
                System.out.println("Migration task name is " +
 migration.migrationTaskName());
                System.out.println("The Progress update stream is " +
 migration.progressUpdateStream());
            }

        } catch (MigrationHubException e) {
```

```
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListMigrationTasksla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon MSK con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes AWS SDK for Java 2.x mediante Amazon MSK.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Ejemplos de tecnología sin servidor

Ejemplos de tecnología sin servidor

Invocación de una función de Lambda desde un desencadenador de Amazon MSK

El siguientes ejemplo de código muestra cómo implementar una función de Lambda que recibe un evento desencadenado al recibir registros de un clúster de Amazon MSK. La función recupera la carga útil de MSK y registra el contenido del registro.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Uso de un evento de Amazon MSK con Lambda mediante Java.

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.KafkaEvent;
import com.amazonaws.services.lambda.runtime.events.KafkaEvent.KafkaEventRecord;

import java.util.Base64;
import java.util.Map;

public class Example implements RequestHandler<KafkaEvent, Void> {

    @Override
    public Void handleRequest(KafkaEvent event, Context context) {
        for (Map.Entry<String, java.util.List<KafkaEventRecord>> entry :
 event.getRecords().entrySet()) {
            String key = entry.getKey();
            System.out.println("Key: " + key);

            for (KafkaEventRecord record : entry.getValue()) {
                System.out.println("Record: " + record);

                byte[] value = Base64.getDecoder().decode(record.getValue());
                String message = new String(value);
                System.out.println("Message: " + message);
            }
        }

        return null;
    }
}
```

Ejemplos de Neptune con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso de AWS SDK for Java 2.x Neptune.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios

Introducción

Hello Neptune

El siguiente ejemplo de código muestra cómo empezar a utilizar Neptune.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloNeptune {
```

```
   public static void main(String[] args) {
       NeptuneAsyncClient neptuneClient = NeptuneAsyncClient.create();
       describeDbCluster(neptuneClient).join(); // This ensures the async code runs
to completion
   }

   /**
    * Describes the Amazon Neptune DB clusters.
    *
    * @param neptuneClient the Neptune asynchronous client used to make the request
    * @return a {@link CompletableFuture} that completes when the operation is
finished
    */
   public static CompletableFuture<Void> describeDbCluster(NeptuneAsyncClient
neptuneClient) {
       DescribeDbClustersRequest request = DescribeDbClustersRequest.builder()
               .maxRecords(20)
               .build();

       SdkPublisher<DescribeDbClustersResponse> paginator =
neptuneClient.describeDBClustersPaginator(request);
       CompletableFuture<Void> future = new CompletableFuture<>();

       paginator.subscribe(new Subscriber<DescribeDbClustersResponse>() {
           private Subscription subscription;

           @Override
           public void onSubscribe(Subscription s) {
               this.subscription = s;
               s.request(Long.MAX_VALUE); // request all items
           }

           @Override
           public void onNext(DescribeDbClustersResponse response) {
               response.dbClusters().forEach(cluster -> {
                   System.out.println("Cluster Identifier: " +
cluster.dbClusterIdentifier());
                   System.out.println("Status: " + cluster.status());
               });
           }

           @Override
           public void onError(Throwable t) {
               future.completeExceptionally(t);
```

```
            }

            @Override
            public void onComplete() {
                future.complete(null);
            }
        });

        return future.whenComplete((result, throwable) -> {
            neptuneClient.close();
            if (throwable != null) {
                System.err.println("Error describing DB clusters: " +
throwable.getMessage());
            }
        });
    }
```

- Para obtener más información sobre la API, consulta Describe DBClusters Paginator en la referencia de la AWS SDK for Java 2.x API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crear un grupo de subredes de Amazon Neptune.
- Crear un clúster de Neptune.
- Crear una instancia de Neptune.
- Comprobar el estado de una instancia de Neptune.
- Mostrar los detalles de un clúster de Neptune.
- Detener el clúster de Neptune.
- Iniciar el clúster de Neptune.
- Eliminar los activos de Neptune.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecutar un escenario interactivo en el que se muestran las características de Neptune.

```
public class NeptuneScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final Logger logger =
 LoggerFactory.getLogger(NeptuneScenario.class);
    static Scanner scanner = new Scanner(System.in);
    static NeptuneActions neptuneActions = new NeptuneActions();

    public static void main(String[] args) {
        final String usage =
                """
                Usage:
                    <subnetGroupName> <clusterName> <dbInstanceId>

                Where:
                    subnetGroupName - The name of an existing Neptune DB subnet
 group that includes subnets in at least two Availability Zones.
                    clusterName     - The unique identifier for the Neptune DB
 cluster.
                    dbInstanceId    - The identifier for a specific Neptune DB
 instance within the cluster.
                """;
        String subnetGroupName = "neptuneSubnetGroup65";
        String clusterName = "neptuneCluster65";
        String dbInstanceId = "neptuneDB65";

        logger.info("""
                   Amazon Neptune is a fully managed graph
                   database service by AWS, designed specifically
                   for handling complex relationships and connected
                   datasets at scale. It supports two popular graph models:
                   property graphs (via openCypher and Gremlin) and RDF
                   graphs (via SPARQL). This makes Neptune ideal for
                   use cases such as knowledge graphs, fraud detection,
```

```
                    social networking, recommendation engines, and
                    network management, where relationships between
                    entities are central to the data.

                    Being fully managed, Neptune handles database
                    provisioning, patching, backups, and replication,
                    while also offering high availability and durability
                    within AWS's infrastructure.

                    For developers, programming with Neptune allows
                    for building intelligent, relationship-aware
                    applications that go beyond traditional tabular
                    databases. Developers can use the AWS SDK for Java
                    to automate infrastructure operations (via NeptuneClient).

                     Let's get started...
                     """);
        waitForInputToContinue(scanner);
        runScenario(subnetGroupName, dbInstanceId, clusterName);
    }

    public static void runScenario(String subnetGroupName, String dbInstanceId,
String clusterName) {
        logger.info(DASHES);
        logger.info("1. Create a Neptune DB Subnet Group");
        logger.info("The Neptune DB subnet group is used when launching a Neptune
cluster");
        waitForInputToContinue(scanner);
        try {
            neptuneActions.createSubnetGroupAsync(subnetGroupName).join();

        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ServiceQuotaExceededException) {
                logger.error("The request failed due to service quota exceeded: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);
```

```
        logger.info(DASHES);
        logger.info("2. Create a Neptune Cluster");
        logger.info("A Neptune Cluster allows you to store and query highly
connected datasets with low latency.");
        waitForInputToContinue(scanner);
        String dbClusterId;
        try {
            dbClusterId = neptuneActions.createDBClusterAsync(clusterName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ServiceQuotaExceededException) {
                logger.error("The request failed due to service quota exceeded: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Create a Neptune DB Instance");
        logger.info("In this step, we add a new database instance to the Neptune
cluster");
        waitForInputToContinue(scanner);
        try {
        neptuneActions.createDBInstanceAsync(dbInstanceId, dbClusterId).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ServiceQuotaExceededException) {
                logger.error("The request failed due to service quota exceeded: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Check the status of the Neptune DB Instance");
```

```
        logger.info("""
                    In this step, we will wait until the DB instance
                    becomes available. This may take around 10 minutes.
                    """);
        waitForInputToContinue(scanner);
        try {
            neptuneActions.checkInstanceStatus(dbInstanceId, "available").join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            logger.error("An unexpected error occurred.", cause);
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5.Show Neptune Cluster details");
        waitForInputToContinue(scanner);
        try {
            neptuneActions.describeDBClustersAsync(clusterName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The request failed due to the resource not found: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("6. Stop the Amazon Neptune cluster");
        logger.info("""
                    Once stopped, this step polls the status
                    until the cluster is in a stopped state.
                    """);
        waitForInputToContinue(scanner);
        try {
            neptuneActions.stopDBClusterAsync(dbClusterId);
            neptuneActions.waitForClusterStatus(dbClusterId, "stopped");
        } catch (CompletionException ce) {
```

```
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The request failed due to the resource not found: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Start the Amazon Neptune cluster");
        logger.info("""
                    Once started, this step polls the clusters
                    status until it's in an available state.
                    We will also poll the instance status.
                    """);
        waitForInputToContinue(scanner);
        try {
            neptuneActions.startDBClusterAsync(dbClusterId);
            neptuneActions.waitForClusterStatus(dbClusterId, "available");
            neptuneActions.checkInstanceStatus(dbInstanceId, "available").join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The request failed due to the resource not found: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. Delete the Neptune Assets");
        logger.info("Would you like to delete the Neptune Assets? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            logger.info("You selected to delete the Neptune assets.");
            try {
```

```
                neptuneActions.deleteNeptuneResourcesAsync(dbInstanceId,
 clusterName, subnetGroupName);
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException) {
                    logger.error("The request failed due to the resource not found:
 {}", cause.getMessage());
                } else {
                    logger.error("An unexpected error occurred.", cause);
                }
                return;
            }
        } else {
            logger.info("You selected not to delete Neptune assets.");
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info(
                """
                Thank you for checking out the Amazon Neptune Service Use demo. We
 hope you
                learned something new, or got some inspiration for your own apps
 today.
                For more AWS code examples, have a look at:
                https://docs.aws.amazon.com/code-library/latest/ug/what-is-code-
library.html
                """);
        logger.info(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                logger.info("Invalid input. Please try again.");
```

```
            }
        }
    }
}
```

Una clase contenedora de métodos del SDK de Neptune.

```
public class NeptuneActions {
    private CompletableFuture<Void> instanceCheckFuture;
    private static NeptuneAsyncClient neptuneAsyncClient;
    private final Region region = Region.US_EAST_1;
    private static final Logger logger =
 LoggerFactory.getLogger(NeptuneActions.class);
    private final NeptuneClient neptuneClient =
 NeptuneClient.builder().region(region).build();

    /**
     * Retrieves an instance of the NeptuneAsyncClient.
     * <p>
     * This method initializes and returns a singleton instance of the
 NeptuneAsyncClient. The client
     * is configured with the following settings:
     * <ul>
     *     <li>Maximum concurrency: 100</li>
     *     <li>Connection timeout: 60 seconds</li>
     *     <li>Read timeout: 60 seconds</li>
     *     <li>Write timeout: 60 seconds</li>
     *     <li>API call timeout: 2 minutes</li>
     *     <li>API call attempt timeout: 90 seconds</li>
     *     <li>Retry strategy: STANDARD</li>
     * </ul>
     * The client is built using the NettyNioAsyncHttpClient.
     *
     * @return the singleton instance of the NeptuneAsyncClient
     */
    private static NeptuneAsyncClient getAsyncClient() {
        if (neptuneAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                    .maxConcurrency(100)
                    .connectionTimeout(Duration.ofSeconds(60))
                    .readTimeout(Duration.ofSeconds(60))
                    .writeTimeout(Duration.ofSeconds(60))
```

```
                    .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                    .apiCallTimeout(Duration.ofMinutes(2))
                    .apiCallAttemptTimeout(Duration.ofSeconds(90))
                    .retryStrategy(RetryMode.STANDARD)
                    .build();

            neptuneAsyncClient = NeptuneAsyncClient.builder()
                    .httpClient(httpClient)
                    .overrideConfiguration(overrideConfig)
                    .build();
        }
        return neptuneAsyncClient;
    }

    /**
     * Asynchronously deletes a set of Amazon Neptune resources in a defined order.
     * <p>
     * The method performs the following operations in sequence:
     * <ol>
     *     <li>Deletes the Neptune DB instance identified by {@code dbInstanceId}.</
li>
     *     <li>Waits until the DB instance is fully deleted.</li>
     *     <li>Deletes the Neptune DB cluster identified by {@code dbClusterId}.</
li>
     *     <li>Deletes the Neptune DB subnet group identified by {@code
 subnetGroupName}.</li>
     * </ol>
     * <p>
     * If any step fails, the subsequent operations are not performed, and the
 exception
     * is logged. This method blocks the calling thread until all operations
 complete.
     *
     * @param dbInstanceId      the ID of the Neptune DB instance to delete
     * @param dbClusterId       the ID of the Neptune DB cluster to delete
     * @param subnetGroupName   the name of the Neptune DB subnet group to delete
     */
    public void deleteNeptuneResourcesAsync(String dbInstanceId, String dbClusterId,
 String subnetGroupName) {
        deleteDBInstanceAsync(dbInstanceId)
                .thenCompose(v -> waitUntilInstanceDeletedAsync(dbInstanceId))
```

```
                .thenCompose(v -> deleteDBClusterAsync(dbClusterId))
                .thenCompose(v -> deleteDBSubnetGroupAsync(subnetGroupName))
                .whenComplete((v, ex) -> {
                    if (ex != null) {
                        logger.info("Failed to delete Neptune resources: " +
ex.getMessage());
                    } else {
                        logger.info("Neptune resources deleted successfully.");
                    }
                })
                .join(); // Waits for the entire async chain to complete
    }

    /**
     * Deletes a subnet group.
     *
     * @param subnetGroupName the identifier of the subnet group to delete
     * @return a {@link CompletableFuture} that completes when the cluster has been
deleted
     */
    public CompletableFuture<Void> deleteDBSubnetGroupAsync(String subnetGroupName)
{
        DeleteDbSubnetGroupRequest request = DeleteDbSubnetGroupRequest.builder()
                .dbSubnetGroupName(subnetGroupName)
                .build();

        return getAsyncClient().deleteDBSubnetGroup(request)
                .thenAccept(response -> logger.info("## Deleting Subnet Group: " +
subnetGroupName));
    }

    /**
     * Deletes a DB instance asynchronously.
     *
     * @param clusterId the identifier of the cluster to delete
     * @return a {@link CompletableFuture} that completes when the cluster has been
deleted
     */
    public CompletableFuture<Void> deleteDBClusterAsync(String clusterId) {
        DeleteDbClusterRequest request = DeleteDbClusterRequest.builder()
                .dbClusterIdentifier(clusterId)
                .skipFinalSnapshot(true)
                .build();
```

```
        return getAsyncClient().deleteDBCluster(request)
                .thenAccept(response -> System.out.println("## Deleting DB Cluster:
" + clusterId));
    }

    public CompletableFuture<Void> waitUntilInstanceDeletedAsync(String instanceId)
{
        CompletableFuture<Void> future = new CompletableFuture<>();
        long startTime = System.currentTimeMillis();
        checkInstanceDeletedRecursive(instanceId, startTime, future);
        return future;
    }

    /**
     * Deletes a DB instance asynchronously.
     *
     * @param instanceId the identifier of the DB instance to be deleted
     * @return a {@link CompletableFuture} that completes when the DB instance has
been deleted
     */
    public CompletableFuture<Void> deleteDBInstanceAsync(String instanceId) {
        DeleteDbInstanceRequest request = DeleteDbInstanceRequest.builder()
                .dbInstanceIdentifier(instanceId)
                .skipFinalSnapshot(true)
                .build();

        return getAsyncClient().deleteDBInstance(request)
                .thenAccept(response -> System.out.println("## Deleting DB Instance:
" + instanceId));
    }


    private void checkInstanceDeletedRecursive(String instanceId, long startTime,
CompletableFuture<Void> future) {
        DescribeDbInstancesRequest request = DescribeDbInstancesRequest.builder()
                .dbInstanceIdentifier(instanceId)
                .build();

        getAsyncClient().describeDBInstances(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof NeptuneException &&
```

```
                                ((NeptuneException)
cause).awsErrorDetails().errorCode().equals("DBInstanceNotFound")) {
                            long elapsed = (System.currentTimeMillis() -
startTime) / 1000;
                            logger.info("\r Instance %s deleted after %ds%n",
instanceId, elapsed);
                            future.complete(null);
                            return;
                        }
                        future.completeExceptionally(new CompletionException("Error
polling DB instance", cause));
                        return;
                    }

                    String status =
response.dbInstances().get(0).dbInstanceStatus();
                    long elapsed = (System.currentTimeMillis() - startTime) / 1000;
                    System.out.printf("\r  Waiting: Instance %s status: %-10s (%ds
elapsed)", instanceId, status, elapsed);
                    System.out.flush();

                    CompletableFuture.delayedExecutor(20, TimeUnit.SECONDS)
                            .execute(() -> checkInstanceDeletedRecursive(instanceId,
startTime, future));
                });
    }


    public void waitForClusterStatus(String clusterId, String desiredStatus) {
        System.out.printf("Waiting for cluster '%s' to reach status '%s'...\n",
clusterId, desiredStatus);
        CompletableFuture<Void> future = new CompletableFuture<>();
        checkClusterStatusRecursive(clusterId, desiredStatus,
System.currentTimeMillis(), future);
        future.join();
    }

    private void checkClusterStatusRecursive(String clusterId, String desiredStatus,
long startTime, CompletableFuture<Void> future) {
        DescribeDbClustersRequest request = DescribeDbClustersRequest.builder()
                .dbClusterIdentifier(clusterId)
                .build();

        getAsyncClient().describeDBClusters(request)
```

```
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        future.completeExceptionally(
                                new CompletionException("Error checking Neptune
cluster status", cause)
                        );
                        return;
                    }

                    List<DBCluster> clusters = response.dbClusters();
                    if (clusters.isEmpty()) {
                        future.completeExceptionally(new RuntimeException("Cluster
not found: " + clusterId));
                        return;
                    }

                    String currentStatus = clusters.get(0).status();
                    long elapsedSeconds = (System.currentTimeMillis() - startTime) /
1000;
                    System.out.printf("\r Elapsed: %-20s  Cluster status: %-20s",
formatElapsedTime((int) elapsedSeconds), currentStatus);
                    System.out.flush();

                    if (desiredStatus.equalsIgnoreCase(currentStatus)) {
                        System.out.printf("\r Neptune cluster reached desired status
'%s' after %s.\n", desiredStatus, formatElapsedTime((int) elapsedSeconds));
                        future.complete(null);
                    } else {
                        CompletableFuture.delayedExecutor(20, TimeUnit.SECONDS)
                                .execute(() ->
checkClusterStatusRecursive(clusterId, desiredStatus, startTime, future));
                    }
                });
    }


    /**
     * Starts an Amazon Neptune DB cluster.
     *
     * @param clusterIdentifier the unique identifier of the DB cluster to be
stopped
     */
```

```
   public CompletableFuture<StartDbClusterResponse> startDBClusterAsync(String
clusterIdentifier) {
       StartDbClusterRequest clusterRequest = StartDbClusterRequest.builder()
               .dbClusterIdentifier(clusterIdentifier)
               .build();

       return getAsyncClient().startDBCluster(clusterRequest)
               .whenComplete((response, error) -> {
                   if (error != null) {
                       Throwable cause = error.getCause() != null ?
error.getCause() : error;

                       if (cause instanceof ResourceNotFoundException) {
                           throw (ResourceNotFoundException) cause;
                       }

                       throw new RuntimeException("Failed to start DB cluster: " +
cause.getMessage(), cause);
                   } else {
                       logger.info("DB Cluster starting: " + clusterIdentifier);
                   }
               });
   }

   /**
    * Stops an Amazon Neptune DB cluster.
    *
    * @param clusterIdentifier the unique identifier of the DB cluster to be
stopped
    */
   public CompletableFuture<StopDbClusterResponse> stopDBClusterAsync(String
clusterIdentifier) {
       StopDbClusterRequest clusterRequest = StopDbClusterRequest.builder()
               .dbClusterIdentifier(clusterIdentifier)
               .build();

       return getAsyncClient().stopDBCluster(clusterRequest)
               .whenComplete((response, error) -> {
                   if (error != null) {
                       Throwable cause = error.getCause() != null ?
error.getCause() : error;

                       if (cause instanceof ResourceNotFoundException) {
                           throw (ResourceNotFoundException) cause;
```

```
                        }

                        throw new RuntimeException("Failed to stop DB cluster: " +
cause.getMessage(), cause);
                    } else {
                        logger.info("DB Cluster stopped: " + clusterIdentifier);
                    }
                });
    }



    /**
     * Asynchronously describes the specified Amazon RDS DB cluster.
     *
     * @param clusterId the identifier of the DB cluster to describe
     * @return a {@link CompletableFuture} that completes when the operation is
done, or throws a {@link RuntimeException}
     * if an error occurs
     */
    public CompletableFuture<Void> describeDBClustersAsync(String clusterId) {
        DescribeDbClustersRequest request = DescribeDbClustersRequest.builder()
                .dbClusterIdentifier(clusterId)
                .build();

        return getAsyncClient().describeDBClusters(request)
                .thenAccept(response -> {
                    for (DBCluster cluster : response.dbClusters()) {
                        logger.info("Cluster Identifier: " +
cluster.dbClusterIdentifier());
                        logger.info("Status: " + cluster.status());
                        logger.info("Engine: " + cluster.engine());
                        logger.info("Engine Version: " + cluster.engineVersion());
                        logger.info("Endpoint: " + cluster.endpoint());
                        logger.info("Reader Endpoint: " + cluster.readerEndpoint());
                        logger.info("Availability Zones: " +
cluster.availabilityZones());
                        logger.info("Subnet Group: " + cluster.dbSubnetGroup());
                        logger.info("VPC Security Groups:");
                        cluster.vpcSecurityGroups().forEach(vpcGroup ->
                                logger.info("  - " +
vpcGroup.vpcSecurityGroupId()));
                        logger.info("Storage Encrypted: " +
cluster.storageEncrypted());
```

```
                        logger.info("IAM DB Auth Enabled: " +
cluster.iamDatabaseAuthenticationEnabled());
                        logger.info("Backup Retention Period: " +
cluster.backupRetentionPeriod() + " days");
                        logger.info("Preferred Backup Window: " +
cluster.preferredBackupWindow());
                        logger.info("Preferred Maintenance Window: " +
cluster.preferredMaintenanceWindow());
                        logger.info("------");
                    }
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ResourceNotFoundException) {
                        throw (ResourceNotFoundException) cause;
                    }

                    throw new RuntimeException("Failed to describe the DB cluster: "
+ cause.getMessage(), cause);
                });
    }


    public CompletableFuture<Void> checkInstanceStatus(String instanceId, String
desiredStatus) {
        CompletableFuture<Void> future = new CompletableFuture<>();
        long startTime = System.currentTimeMillis();
        checkStatusRecursive(instanceId, desiredStatus.toLowerCase(), startTime,
future);
        return future;
    }

    /**
     * Checks the status of a Neptune instance recursively until the desired status
is reached or a timeout occurs.
     *
     * @param instanceId     the ID of the Neptune instance to check
     * @param desiredStatus  the desired status of the Neptune instance
     * @param startTime      the start time of the operation, used to calculate the
elapsed time
     * @param future         a {@link CompletableFuture} that will be completed when
the desired status is reached
     */
```

```
   private void checkStatusRecursive(String instanceId, String desiredStatus, long
startTime, CompletableFuture<Void> future) {
       DescribeDbInstancesRequest request = DescribeDbInstancesRequest.builder()
               .dbInstanceIdentifier(instanceId)
               .build();

       getAsyncClient().describeDBInstances(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause();
                       future.completeExceptionally(
                               new CompletionException("Error checking Neptune
instance status", cause)
                       );
                       return;
                   }

                   List<DBInstance> instances = response.dbInstances();
                   if (instances.isEmpty()) {
                       future.completeExceptionally(new RuntimeException("Instance
not found: " + instanceId));
                       return;
                   }

                   String currentStatus = instances.get(0).dbInstanceStatus();
                   long elapsedSeconds = (System.currentTimeMillis() - startTime) /
1000;
                   System.out.printf("\r Elapsed: %-20s  Status: %-20s",
formatElapsedTime((int) elapsedSeconds), currentStatus);
                   System.out.flush();

                   if (desiredStatus.equalsIgnoreCase(currentStatus)) {
                       System.out.printf("\r Neptune instance reached desired
status '%s' after %s.\n", desiredStatus, formatElapsedTime((int) elapsedSeconds));
                       future.complete(null);
                   } else {
                       CompletableFuture.delayedExecutor(20, TimeUnit.SECONDS)
                               .execute(() -> checkStatusRecursive(instanceId,
desiredStatus, startTime, future));
                   }
               });
   }
```

```
    private String formatElapsedTime(int seconds) {
        int minutes = seconds / 60;
        int remainingSeconds = seconds % 60;

        if (minutes > 0) {
            return minutes + (minutes == 1 ? " min" : " mins") + ", " +
                    remainingSeconds + (remainingSeconds == 1 ? " sec" : " secs");
        } else {
            return remainingSeconds + (remainingSeconds == 1 ? " sec" : " secs");
        }
    }


    /**
     * Creates a new Amazon Neptune DB instance asynchronously.
     *
     * @param dbInstanceId the identifier for the new DB instance
     * @param dbClusterId  the identifier for the DB cluster that the new instance
will be a part of
     * @return a {@link CompletableFuture} that completes with the identifier of the
newly created DB instance
     * @throws CompletionException if the operation fails, with a cause of either:
     *                             - {@link ServiceQuotaExceededException} if the
request would exceed the maximum quota, or
     *                             - a general exception with the failure message
     */
    public CompletableFuture<String> createDBInstanceAsync(String dbInstanceId,
String dbClusterId) {
        CreateDbInstanceRequest request = CreateDbInstanceRequest.builder()
                .dbInstanceIdentifier(dbInstanceId)
                .dbInstanceClass("db.r5.large")
                .engine("neptune")
                .dbClusterIdentifier(dbClusterId)
                .build();

        return getAsyncClient().createDBInstance(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ServiceQuotaExceededException) {
                            throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                        }
```

```
                        throw new CompletionException("Failed to create Neptune DB
instance: " + exception.getMessage(), exception);
                    }
                })
                .thenApply(response -> {
                    String instanceId =
response.dbInstance().dbInstanceIdentifier();
                    logger.info("Created Neptune DB Instance: " + instanceId);
                    return instanceId;
                });
    }


    /**
     * Creates a new Amazon Neptune DB cluster asynchronously.
     *
     * @param dbName the name of the DB cluster to be created
     * @return a CompletableFuture that, when completed, provides the ID of the
created DB cluster
     * @throws CompletionException if the operation fails for any reason, including
if the request would exceed the maximum quota
     */
    public CompletableFuture<String> createDBClusterAsync(String dbName) {
        CreateDbClusterRequest request = CreateDbClusterRequest.builder()
                .dbClusterIdentifier(dbName)
                .engine("neptune")
                .deletionProtection(false)
                .backupRetentionPeriod(1)
                .build();

        return getAsyncClient().createDBCluster(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ServiceQuotaExceededException) {
                            throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                        }
                        throw new CompletionException("Failed to create Neptune DB
cluster: " + exception.getMessage(), exception);
                    }
                })
                .thenApply(response -> {
                    String clusterId = response.dbCluster().dbClusterIdentifier();
```

```
                    logger.info("DB Cluster created: " + clusterId);
                    return clusterId;
                });
    }


    /**
     * Creates a new DB subnet group asynchronously.
     *
     * @param groupName the name of the subnet group to create
     * @return a CompletableFuture that, when completed, returns the Amazon Resource
Name (ARN) of the created subnet group
     * @throws CompletionException if the operation fails, with a cause that may be
a ServiceQuotaExceededException if the request would exceed the maximum quota
     */
    public CompletableFuture<String> createSubnetGroupAsync(String groupName) {

        // Get the Amazon Virtual Private Cloud (VPC) where the Neptune cluster and
resources will be created
        String vpcId = getDefaultVpcId();
        logger.info("VPC is : " + vpcId);

        List<String> subnetList = getSubnetIds(vpcId);
        for (String subnetId : subnetList) {
            System.out.println("Subnet group:" +subnetId);
        }

        CreateDbSubnetGroupRequest request = CreateDbSubnetGroupRequest.builder()
                .dbSubnetGroupName(groupName)
                .dbSubnetGroupDescription("Subnet group for Neptune cluster")
                .subnetIds(subnetList)
                .build();

        return getAsyncClient().createDBSubnetGroup(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ServiceQuotaExceededException) {
                            throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                        }
                        throw new CompletionException("Failed to create subnet
group: " + exception.getMessage(), exception);
                    }
```

```
                })
                .thenApply(response -> {
                    String name = response.dbSubnetGroup().dbSubnetGroupName();
                    String arn = response.dbSubnetGroup().dbSubnetGroupArn();
                    logger.info("Subnet group created: " + name);
                    return arn;
                });
    }

    private List<String> getSubnetIds(String vpcId) {
        try (Ec2Client ec2 = Ec2Client.builder().region(region).build()) {
            DescribeSubnetsRequest request = DescribeSubnetsRequest.builder()
                    .filters(builder -> builder.name("vpc-id").values(vpcId))
                    .build();

            DescribeSubnetsResponse response = ec2.describeSubnets(request);
            return response.subnets().stream()
                    .map(Subnet::subnetId)
                    .collect(Collectors.toList());
        }
    }

    public static String getDefaultVpcId() {
        Ec2Client ec2 = Ec2Client.builder()
                .region(Region.US_EAST_1)
                .build();

        Filter myFilter = Filter.builder()
                .name("isDefault")
                .values("true")
                .build();

        List<Filter> filterList = new ArrayList<>();
        filterList.add(myFilter);

        DescribeVpcsRequest request = DescribeVpcsRequest.builder()
                .filters(filterList)
                .build();


        DescribeVpcsResponse response = ec2.describeVpcs(request);
        if (!response.vpcs().isEmpty()) {
            Vpc defaultVpc = response.vpcs().get(0);
            return defaultVpc.vpcId();
```

```
        } else {
            throw new RuntimeException("No default VPC found in this region.");
        }
    }
}
```

Acciones

`CreateDBCluster`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDBCluster`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates a new Amazon Neptune DB cluster asynchronously.
    *
    * @param dbName the name of the DB cluster to be created
    * @return a CompletableFuture that, when completed, provides the ID of the
created DB cluster
    * @throws CompletionException if the operation fails for any reason, including
if the request would exceed the maximum quota
    */
   public CompletableFuture<String> createDBClusterAsync(String dbName) {
       CreateDbClusterRequest request = CreateDbClusterRequest.builder()
               .dbClusterIdentifier(dbName)
               .engine("neptune")
               .deletionProtection(false)
               .backupRetentionPeriod(1)
               .build();

       return getAsyncClient().createDBCluster(request)
               .whenComplete((response, exception) -> {
```

```
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ServiceQuotaExceededException) {
                            throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                        }
                        throw new CompletionException("Failed to create Neptune DB
cluster: " + exception.getMessage(), exception);
                    }
                })
                .thenApply(response -> {
                    String clusterId = response.dbCluster().dbClusterIdentifier();
                    logger.info("DB Cluster created: " + clusterId);
                    return clusterId;
                });
    }
```

- Para obtener más información sobre la API, consulta la sección Crear DBCluster en la referencia de la AWS SDK for Java 2.x API.

`CreateDBInstance`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDBInstance`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates a new Amazon Neptune DB instance asynchronously.
     *
     * @param dbInstanceId the identifier for the new DB instance
     * @param dbClusterId  the identifier for the DB cluster that the new instance
will be a part of
```

```
    * @return a {@link CompletableFuture} that completes with the identifier of the
newly created DB instance
    * @throws CompletionException if the operation fails, with a cause of either:
    *                             - {@link ServiceQuotaExceededException} if the
request would exceed the maximum quota, or
    *                             - a general exception with the failure message
    */
   public CompletableFuture<String> createDBInstanceAsync(String dbInstanceId,
String dbClusterId) {
       CreateDbInstanceRequest request = CreateDbInstanceRequest.builder()
               .dbInstanceIdentifier(dbInstanceId)
               .dbInstanceClass("db.r5.large")
               .engine("neptune")
               .dbClusterIdentifier(dbClusterId)
               .build();

       return getAsyncClient().createDBInstance(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause();
                       if (cause instanceof ServiceQuotaExceededException) {
                           throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                       }
                       throw new CompletionException("Failed to create Neptune DB
instance: " + exception.getMessage(), exception);
                   }
               })
               .thenApply(response -> {
                   String instanceId =
response.dbInstance().dbInstanceIdentifier();
                   logger.info("Created Neptune DB Instance: " + instanceId);
                   return instanceId;
               });
   }
```

- Para obtener más información sobre la API, consulta la sección Crear DBInstance en la referencia de la AWS SDK for Java 2.x API.

`CreateDBSubnetGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDBSubnetGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates a new DB subnet group asynchronously.
    *
    * @param groupName the name of the subnet group to create
    * @return a CompletableFuture that, when completed, returns the Amazon Resource
Name (ARN) of the created subnet group
    * @throws CompletionException if the operation fails, with a cause that may be
a ServiceQuotaExceededException if the request would exceed the maximum quota
    */
   public CompletableFuture<String> createSubnetGroupAsync(String groupName) {

       // Get the Amazon Virtual Private Cloud (VPC) where the Neptune cluster and
resources will be created
       String vpcId = getDefaultVpcId();
       logger.info("VPC is : " + vpcId);

       List<String> subnetList = getSubnetIds(vpcId);
       for (String subnetId : subnetList) {
           System.out.println("Subnet group:" +subnetId);
       }

       CreateDbSubnetGroupRequest request = CreateDbSubnetGroupRequest.builder()
               .dbSubnetGroupName(groupName)
               .dbSubnetGroupDescription("Subnet group for Neptune cluster")
               .subnetIds(subnetList)
               .build();

       return getAsyncClient().createDBSubnetGroup(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause();
                       if (cause instanceof ServiceQuotaExceededException) {
```

```
                            throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                        }
                        throw new CompletionException("Failed to create subnet
group: " + exception.getMessage(), exception);
                    }
                })
                .thenApply(response -> {
                    String name = response.dbSubnetGroup().dbSubnetGroupName();
                    String arn = response.dbSubnetGroup().dbSubnetGroupArn();
                    logger.info("Subnet group created: " + name);
                    return arn;
                });
    }
```

- Para obtener más información sobre la API, consulta Crear un DBSubnet grupo en la referencia AWS SDK for Java 2.x de la API.

`CreateGraph`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateGraph`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Executes the process of creating a new Neptune graph.
     *
     * @param client        the Neptune graph client used to interact with the
Neptune service
     * @param graphName     the name of the graph to be created
     * @throws NeptuneGraphException if an error occurs while creating the graph
     */
    public static void executeCreateGraph(NeptuneGraphClient client, String
graphName) {
```

```
        try {
            // Create the graph request
            CreateGraphRequest request = CreateGraphRequest.builder()
                    .graphName(graphName)
                    .provisionedMemory(16)
                    .build();

            // Create the graph
            CreateGraphResponse response = client.createGraph(request);

            // Extract the graph name and ARN
            String createdGraphName = response.name();
            String graphArn = response.arn();
            String graphEndpoint = response.endpoint();

            System.out.println("Graph created successfully!");
            System.out.println("Graph Name: " + createdGraphName);
            System.out.println("Graph ARN: " + graphArn);
            System.out.println("Graph Endpoint: " +graphEndpoint );

        } catch (NeptuneGraphException e) {
            System.err.println("Failed to create graph: " +
e.awsErrorDetails().errorMessage());
        } finally {
            client.close();
        }
    }
```

- Para obtener más información sobre la API, consulta CreateGraphla Referencia AWS SDK for Java 2.x de la API.

`DeleteDBCluster`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDBCluster`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a DB instance asynchronously.
     *
     * @param clusterId the identifier of the cluster to delete
     * @return a {@link CompletableFuture} that completes when the cluster has been
deleted
     */
    public CompletableFuture<Void> deleteDBClusterAsync(String clusterId) {
        DeleteDbClusterRequest request = DeleteDbClusterRequest.builder()
                .dbClusterIdentifier(clusterId)
                .skipFinalSnapshot(true)
                .build();

        return getAsyncClient().deleteDBCluster(request)
                .thenAccept(response -> System.out.println("## Deleting DB Cluster:
" + clusterId));
    }
```

- Para obtener más información sobre la API, consulta Eliminar DBCluster en la referencia AWS SDK for Java 2.x de la API.

`DeleteDBInstance`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDBInstance`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a DB instance asynchronously.
     *
     * @param instanceId the identifier of the DB instance to be deleted
     * @return a {@link CompletableFuture} that completes when the DB instance has
been deleted
     */
    public CompletableFuture<Void> deleteDBInstanceAsync(String instanceId) {
        DeleteDbInstanceRequest request = DeleteDbInstanceRequest.builder()
                .dbInstanceIdentifier(instanceId)
                .skipFinalSnapshot(true)
                .build();

        return getAsyncClient().deleteDBInstance(request)
                .thenAccept(response -> System.out.println("## Deleting DB Instance:
" + instanceId));
    }
```

- Para obtener más información sobre la API, consulta Eliminar DBInstance en la referencia AWS SDK for Java 2.x de la API.

`DeleteDBSubnetGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDBSubnetGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes a subnet group.
     *
     * @param subnetGroupName the identifier of the subnet group to delete
     * @return a {@link CompletableFuture} that completes when the cluster has been
deleted
     */
```

```
    public CompletableFuture<Void> deleteDBSubnetGroupAsync(String subnetGroupName)
{
        DeleteDbSubnetGroupRequest request = DeleteDbSubnetGroupRequest.builder()
                .dbSubnetGroupName(subnetGroupName)
                .build();

        return getAsyncClient().deleteDBSubnetGroup(request)
                .thenAccept(response -> logger.info("## Deleting Subnet Group: " +
subnetGroupName));
    }
```

- Para obtener más información sobre la API, consulta Eliminar DBSubnet grupo en la referencia AWS SDK for Java 2.x de la API.

`DescribeDBClusters`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDBClusters`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously describes the specified Amazon RDS DB cluster.
     *
     * @param clusterId the identifier of the DB cluster to describe
     * @return a {@link CompletableFuture} that completes when the operation is
done, or throws a {@link RuntimeException}
     * if an error occurs
     */
    public CompletableFuture<Void> describeDBClustersAsync(String clusterId) {
        DescribeDbClustersRequest request = DescribeDbClustersRequest.builder()
                .dbClusterIdentifier(clusterId)
                .build();
```

```
        return getAsyncClient().describeDBClusters(request)
                .thenAccept(response -> {
                    for (DBCluster cluster : response.dbClusters()) {
                        logger.info("Cluster Identifier: " +
cluster.dbClusterIdentifier());
                        logger.info("Status: " + cluster.status());
                        logger.info("Engine: " + cluster.engine());
                        logger.info("Engine Version: " + cluster.engineVersion());
                        logger.info("Endpoint: " + cluster.endpoint());
                        logger.info("Reader Endpoint: " + cluster.readerEndpoint());
                        logger.info("Availability Zones: " +
cluster.availabilityZones());
                        logger.info("Subnet Group: " + cluster.dbSubnetGroup());
                        logger.info("VPC Security Groups:");
                        cluster.vpcSecurityGroups().forEach(vpcGroup ->
                                logger.info("  - " +
vpcGroup.vpcSecurityGroupId()));
                        logger.info("Storage Encrypted: " +
cluster.storageEncrypted());
                        logger.info("IAM DB Auth Enabled: " +
cluster.iamDatabaseAuthenticationEnabled());
                        logger.info("Backup Retention Period: " +
cluster.backupRetentionPeriod() + " days");
                        logger.info("Preferred Backup Window: " +
cluster.preferredBackupWindow());
                        logger.info("Preferred Maintenance Window: " +
cluster.preferredMaintenanceWindow());
                        logger.info("------");
                    }
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ResourceNotFoundException) {
                        throw (ResourceNotFoundException) cause;
                    }

                    throw new RuntimeException("Failed to describe the DB cluster: "
+ cause.getMessage(), cause);
                });
    }
```

- Para obtener más información sobre la API, consulta la sección Describir DBClusters en la referencia de la AWS SDK for Java 2.x API.

`DescribeDBInstances`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDBInstances`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Checks the status of a Neptune instance recursively until the desired status
is reached or a timeout occurs.
    *
    * @param instanceId     the ID of the Neptune instance to check
    * @param desiredStatus  the desired status of the Neptune instance
    * @param startTime      the start time of the operation, used to calculate the
elapsed time
    * @param future         a {@link CompletableFuture} that will be completed when
the desired status is reached
    */
   private void checkStatusRecursive(String instanceId, String desiredStatus, long
startTime, CompletableFuture<Void> future) {
       DescribeDbInstancesRequest request = DescribeDbInstancesRequest.builder()
               .dbInstanceIdentifier(instanceId)
               .build();

       getAsyncClient().describeDBInstances(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause();
                       future.completeExceptionally(
                               new CompletionException("Error checking Neptune
instance status", cause)
                       );
                       return;
                   }
```

```
                    List<DBInstance> instances = response.dbInstances();
                    if (instances.isEmpty()) {
                        future.completeExceptionally(new RuntimeException("Instance
not found: " + instanceId));
                        return;
                    }

                    String currentStatus = instances.get(0).dbInstanceStatus();
                    long elapsedSeconds = (System.currentTimeMillis() - startTime) /
1000;
                    System.out.printf("\r Elapsed: %-20s  Status: %-20s",
formatElapsedTime((int) elapsedSeconds), currentStatus);
                    System.out.flush();

                    if (desiredStatus.equalsIgnoreCase(currentStatus)) {
                        System.out.printf("\r Neptune instance reached desired
status '%s' after %s.\n", desiredStatus, formatElapsedTime((int) elapsedSeconds));
                        future.complete(null);
                    } else {
                        CompletableFuture.delayedExecutor(20, TimeUnit.SECONDS)
                                .execute(() -> checkStatusRecursive(instanceId,
desiredStatus, startTime, future));
                    }
                });
    }
```

- Para obtener más información sobre la API, consulta la sección Describir DBInstances en la referencia de la AWS SDK for Java 2.x API.

`ExecuteGremlinProfileQuery`

En el siguiente ejemplo de código, se muestra cómo utilizar `ExecuteGremlinProfileQuery`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Executes a Gremlin query against an Amazon Neptune database using the
provided {@link NeptunedataClient}.
    *
    * @param client the {@link NeptunedataClient} instance to use for executing the
Gremlin query
    */
   public static void executeGremlinQuery(NeptunedataClient client) {
       try {
           System.out.println("Querying Neptune...");
           ExecuteGremlinQueryRequest request =
ExecuteGremlinQueryRequest.builder()
                   .gremlinQuery("g.V().has('code', 'ANC')")
                   .build();

           ExecuteGremlinQueryResponse response =
client.executeGremlinQuery(request);

           System.out.println("Full Response:");
           System.out.println(response);

           // Retrieve and print the result
           if (response.result() != null) {
               System.out.println("Query Result:");
               System.out.println(response.result().toString());
           } else {
               System.out.println("No result returned from the query.");
           }
       } catch (NeptunedataException e) {
           System.err.println("Error calling Neptune: " +
e.awsErrorDetails().errorMessage());
       } catch (Exception e) {
           System.err.println("Unexpected error: " + e.getMessage());
       } finally {
           client.close();
       }
   }
```

- Para obtener más información sobre la API, consulta ExecuteGremlinProfileQueryla Referencia AWS SDK for Java 2.x de la API.

`ExecuteGremlinQuery`

En el siguiente ejemplo de código, se muestra cómo utilizar `ExecuteGremlinQuery`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Executes a Gremlin PROFILE query using the provided NeptunedataClient.
    *
    * @param client The NeptunedataClient instance to be used for executing the
Gremlin PROFILE query.
    */
   private static void executeGremlinProfileQuery(NeptunedataClient client) {
       System.out.println("Executing Gremlin PROFILE query...");

       ExecuteGremlinProfileQueryRequest request =
ExecuteGremlinProfileQueryRequest.builder()
               .gremlinQuery("g.V().has('code', 'ANC')")
               .build();

       ExecuteGremlinProfileQueryResponse response =
client.executeGremlinProfileQuery(request);
       if (response.output() != null) {
           System.out.println("Query Profile Output:");
           System.out.println(response.output());
       } else {
           System.out.println("No output returned from the profile query.");
       }
   }
```

- Para obtener más información sobre la API, consulta ExecuteGremlinQueryla Referencia AWS SDK for Java 2.x de la API.

`ExecuteOpenCypherExplainQuery`

En el siguiente ejemplo de código, se muestra cómo utilizar `ExecuteOpenCypherExplainQuery`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Executes an OpenCypher EXPLAIN query using the provided Neptune data client.
    *
    * @param client The Neptune data client to use for the query execution.
    */
   public static void executeGremlinQuery(NeptunedataClient client) {
       try {
           System.out.println("Executing OpenCypher EXPLAIN query...");
           ExecuteOpenCypherExplainQueryRequest request =
ExecuteOpenCypherExplainQueryRequest.builder()
                   .openCypherQuery("MATCH (n {code: 'ANC'}) RETURN n")
                   .explainMode("debug")
                   .build();

           ExecuteOpenCypherExplainQueryResponse response =
client.executeOpenCypherExplainQuery(request);

           if (response.results() != null) {
               System.out.println("Explain Results:");
               System.out.println(response.results().asUtf8String());
           } else {
               System.out.println("No explain results returned.");
           }

       } catch (NeptunedataException e) {
           System.err.println("Neptune error: " +
e.awsErrorDetails().errorMessage());
       } catch (Exception e) {
           System.err.println("Unexpected error: " + e.getMessage());
       } finally {
           client.close();
```

```
        }
    }
```

- Para obtener más información sobre la API, consulta ExecuteOpenCypherExplainQueryla Referencia AWS SDK for Java 2.x de la API.

`ExecuteQuery`

En el siguiente ejemplo de código, se muestra cómo utilizar `ExecuteQuery`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Executes a Gremlin profile query on the Neptune Analytics graph.
    *
    * @param client       the {@link NeptuneGraphClient} instance to use for the
query
    * @param graphId      the identifier of the graph to execute the query on
    *
    * @throws NeptuneGraphException if an error occurs while executing the query on
the Neptune Graph
    * @throws Exception if an unexpected error occurs
    */
   public static void executeGremlinProfileQuery(NeptuneGraphClient client, String
graphId) {

       try {
           System.out.println("Running openCypher query on Neptune Analytics...");

           ExecuteQueryRequest request = ExecuteQueryRequest.builder()
                   .graphIdentifier(graphId)
                   .queryString("MATCH (n {code: 'ANC'}) RETURN n")
                   .language("OPEN_CYPHER")
                   .build();
```

```
            ResponseInputStream<ExecuteQueryResponse> response =
client.executeQuery(request);
            try (BufferedReader reader = new BufferedReader(new
InputStreamReader(response, StandardCharsets.UTF_8))) {
                String result = reader.lines().collect(Collectors.joining("\n"));
                System.out.println("Query Result:");
                System.out.println(result);
            } catch (Exception e) {
                System.err.println("Error reading response: " + e.getMessage());
            }

        } catch (NeptuneGraphException e) {
            System.err.println("NeptuneGraph error: " +
e.awsErrorDetails().errorMessage());
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
        } finally {
            client.close();
        }
    }
```

- Para obtener más información sobre la API, consulta ExecuteQueryla Referencia AWS SDK for Java 2.x de la API.

`StartDBCluster`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartDBCluster`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Starts an Amazon Neptune DB cluster.
     *
```

```
    * @param clusterIdentifier the unique identifier of the DB cluster to be
stopped
    */
   public CompletableFuture<StartDbClusterResponse> startDBClusterAsync(String
clusterIdentifier) {
       StartDbClusterRequest clusterRequest = StartDbClusterRequest.builder()
               .dbClusterIdentifier(clusterIdentifier)
               .build();

       return getAsyncClient().startDBCluster(clusterRequest)
               .whenComplete((response, error) -> {
                   if (error != null) {
                       Throwable cause = error.getCause() != null ?
error.getCause() : error;

                       if (cause instanceof ResourceNotFoundException) {
                           throw (ResourceNotFoundException) cause;
                       }

                       throw new RuntimeException("Failed to start DB cluster: " +
cause.getMessage(), cause);
                   } else {
                       logger.info("DB Cluster starting: " + clusterIdentifier);
                   }
               });
   }
```

- Para obtener más información sobre la API, consulta la referencia sobre cómo empezar DBCluster en la AWS SDK for Java 2.x API.

`StopDBCluster`

En el siguiente ejemplo de código, se muestra cómo utilizar `StopDBCluster`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Stops an Amazon Neptune DB cluster.
    *
    * @param clusterIdentifier the unique identifier of the DB cluster to be
stopped
    */
   public CompletableFuture<StopDbClusterResponse> stopDBClusterAsync(String
clusterIdentifier) {
       StopDbClusterRequest clusterRequest = StopDbClusterRequest.builder()
               .dbClusterIdentifier(clusterIdentifier)
               .build();

       return getAsyncClient().stopDBCluster(clusterRequest)
               .whenComplete((response, error) -> {
                   if (error != null) {
                       Throwable cause = error.getCause() != null ?
error.getCause() : error;

                       if (cause instanceof ResourceNotFoundException) {
                           throw (ResourceNotFoundException) cause;
                       }

                       throw new RuntimeException("Failed to stop DB cluster: " +
cause.getMessage(), cause);
                   } else {
                       logger.info("DB Cluster stopped: " + clusterIdentifier);
                   }
               });
   }
```

- Para obtener más información sobre la API, consulta la referencia sobre Stop DBCluster in AWS SDK for Java 2.x API.

Escenarios

Usa la API de Neptune para consultar datos de grafos

El siguiente ejemplo de código muestra cómo utilizar la API de Neptune para consultar datos de grafos.

SDK para Java 2.x

Muestra cómo utilizar la API Java de Amazon Neptune para crear una función de Lambda que consulte los datos de grafos dentro de la VPC.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Lambda
- Neptune

Ejemplos de Centro de socios con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes mediante el AWS SDK for Java 2.x uso de Partner Central.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`AssignOpportunity`

En el siguiente ejemplo de código, se muestra cómo utilizar `AssignOpportunity`.

SDK para Java 2.x

Reasignar una oportunidad existente a otro usuario.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.AssignOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.AssignOpportunityResponse;
import software.amazon.awssdk.services.partnercentralselling.model.AssigneeContact;

/*
Purpose
PC-API-07 Assigning a new owner
*/

public class AssignOpportunity {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     String assigneeFirstName = "John";

     String assigneeLastName = "Doe";

     String assigneeEmail = "test@test.com";
```

```
    String businessTitle = "PartnerAccountManager";

    AssignOpportunityResponse response = getResponse(opportunityId,
assigneeFirstName, assigneeLastName, assigneeEmail, businessTitle);

    ReferenceCodesUtils.formatOutput(response);
   }

static AssignOpportunityResponse getResponse(String opportunityId, String
assigneeFirstName, String assigneeLastName, String assigneeEmail, String
businessTitle) {

 AssignOpportunityRequest assignOpportunityRequest =
AssignOpportunityRequest.builder()
   .catalog(Constants.CATALOG_TO_USE)
         .identifier(opportunityId)
         .assignee(AssigneeContact.builder()
           .firstName(assigneeFirstName)
           .lastName(assigneeLastName)
           .email(assigneeEmail)
           .businessTitle(businessTitle)
           .build())
         .build();

       AssignOpportunityResponse response =
client.assignOpportunity(assignOpportunityRequest);

       return response;
 }
}
```

- Para obtener más información sobre la API, consulte AssignOpportunityla referencia AWS SDK for Java 2.x de la API.

`AssociateOpportunity`

En el siguiente ejemplo de código, se muestra cómo utilizar `AssociateOpportunity`.

SDK para Java 2.x

Crear una asociación formal entre una oportunidad y varias entidades relacionadas.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.AssociateOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.AssociateOpportunityResponse;

/*
Purpose
PC-API -11 Associating a product
PC-API -12 Associating a solution
PC-API -13 Associating an offer
entity_type = Solutions | AWSProducts | AWSMarketplaceOffers
*/

public class AssociateOpportunity {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     String entityType = "Solutions";

     String entityIdentifier = "S-0000000";

     AssociateOpportunityResponse response = getResponse(opportunityId, entityType,
 entityIdentifier );
```

```
     ReferenceCodesUtils.formatOutput(response);
    }

static AssociateOpportunityResponse getResponse(String opportunityId, String
 entityType, String entityIdentifier) {

        AssociateOpportunityRequest associateOpportunityRequest =
 AssociateOpportunityRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .opportunityIdentifier(opportunityId)
          .relatedEntityType(entityType)
          .relatedEntityIdentifier(entityIdentifier)
          .build();

        AssociateOpportunityResponse response =
 client.associateOpportunity(associateOpportunityRequest);

        return response;
 }
}
```

- Para obtener más información sobre la API, consulte AssociateOpportunityla Referencia AWS SDK for Java 2.x de la API.

`CreateOpportunity`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateOpportunity`.

SDK para Java 2.x

Crear una oportunidad.

```
package org.example;

import java.time.Instant;
import java.util.ArrayList;
import java.util.List;

import static org.example.utils.Constants.*;

import org.example.entity.Root;
```

```
import org.example.utils.ReferenceCodesUtils;
import org.example.utils.StringSerializer;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import software.amazon.awssdk.services.partnercentralselling.model.Account;
import software.amazon.awssdk.services.partnercentralselling.model.Address;
import software.amazon.awssdk.services.partnercentralselling.model.Contact;
import
 software.amazon.awssdk.services.partnercentralselling.model.CreateOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.CreateOpportunityResponse;
import software.amazon.awssdk.services.partnercentralselling.model.Customer;
import
 software.amazon.awssdk.services.partnercentralselling.model.ExpectedCustomerSpend;
import software.amazon.awssdk.services.partnercentralselling.model.LifeCycle;
import software.amazon.awssdk.services.partnercentralselling.model.Marketing;
import software.amazon.awssdk.services.partnercentralselling.model.MonetaryValue;
import software.amazon.awssdk.services.partnercentralselling.model.NextStepsHistory;
import software.amazon.awssdk.services.partnercentralselling.model.Project;
import software.amazon.awssdk.services.partnercentralselling.model.SoftwareRevenue;

import com.google.gson.Gson;
import com.google.gson.GsonBuilder;
import com.google.gson.ToNumberPolicy;

public class CreateOpportunity {

 static final Gson GSON = new GsonBuilder()
   .setObjectToNumberStrategy(ToNumberPolicy.LAZILY_PARSED_NUMBER)
   .registerTypeAdapter(String.class, new StringSerializer())
   .create();

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

 public static void main(String[] args) {
```

```
 String inputFile = "CreateOpportunity2.json";

 if (args.length > 0)
  inputFile = args[0];

 CreateOpportunityResponse response = createOpportunity(inputFile);

 client.close();
}

static CreateOpportunityResponse createOpportunity(String inputFile) {

 String inputString = ReferenceCodesUtils.readInputFileToString(inputFile);

 Root root = GSON.fromJson(inputString, Root.class);

 List<NextStepsHistory> nextStepsHistories = new ArrayList<NextStepsHistory>();
 if ( root.lifeCycle != null && root.lifeCycle.nextStepsHistories != null) {
  for (org.example.entity.NextStepsHistory nextStepsHistoryJson :
root.lifeCycle.nextStepsHistories) {
   NextStepsHistory nextStepsHistory = NextStepsHistory.builder()
     .time(Instant.parse(nextStepsHistoryJson.time))
     .value(nextStepsHistoryJson.value)
                 .build();
   nextStepsHistories.add(nextStepsHistory);
  }
 }

 LifeCycle lifeCycle = null;
 if ( root.lifeCycle != null ) {
  lifeCycle = LifeCycle.builder()
   .closedLostReason(root.lifeCycle.closedLostReason)
   .nextSteps(root.lifeCycle.nextSteps)
   .nextStepsHistory(nextStepsHistories)
   .reviewComments(root.lifeCycle.reviewComments)
   .reviewStatus(root.lifeCycle.reviewStatus)
   .reviewStatusReason(root.lifeCycle.reviewStatusReason)
   .stage(root.lifeCycle.stage)
   .targetCloseDate(root.lifeCycle.targetCloseDate)
   .build();
 }

 Marketing marketing = null;
 if ( root.marketing != null ) {
```

```
   marketing = Marketing.builder()
     .awsFundingUsed(root.marketing.awsFundingUsed)
     .campaignName(root.marketing.campaignName)
     .channels(root.marketing.channels)
     .source(root.marketing.source)
     .useCases(root.marketing.useCases)
     .build();

  }

  Address address = null;
  if ( root.customer != null && root.customer.account != null &&
root.customer.account.address != null ) {
   address = Address.builder()
    .city(root.customer.account.address.city)
                .postalCode(root.customer.account.address.postalCode)
                .stateOrRegion(root.customer.account.address.stateOrRegion)
                .countryCode(root.customer.account.address.countryCode)
                .streetAddress(root.customer.account.address.streetAddress)
                .build();
  }

  Account account = null;
  if ( root.customer != null && root.customer.account!= null) {
   account = Account.builder()
              .address(address)
              .awsAccountId(root.customer.account.awsAccountId)
                 .duns(root.customer.account.duns)
                 .industry(root.customer.account.industry)
                 .otherIndustry(root.customer.account.otherIndustry)
                 .companyName(root.customer.account.companyName)
                 .websiteUrl(root.customer.account.websiteUrl)
                 .build();
  }

  List<Contact> contacts = new ArrayList<Contact>();
  if ( root.customer != null && root.customer.contacts != null) {
   for (org.example.entity.Contact jsonContact : root.customer.contacts) {
    Contact contact = Contact.builder()
                  .email(jsonContact.email)
                  .firstName(jsonContact.firstName)
                  .lastName(jsonContact.lastName)
                  .phone(jsonContact.phone)
                  .businessTitle(jsonContact.businessTitle)
```

```
                .build();
   contacts.add(contact);
  }
 }

 Customer customer = Customer.builder()
   .account(account)
   .contacts(contacts)
   .build();

 Contact oportunityTeamContact = null;
 if (root.opportunityTeam != null && root.opportunityTeam.get(0) != null ) {
  oportunityTeamContact = Contact.builder()
              .firstName(root.opportunityTeam.get(0).firstName)
              .lastName(root.opportunityTeam.get(0).lastName)
              .email(root.opportunityTeam.get(0).email)
              .phone(root.opportunityTeam.get(0).phone)
              .businessTitle(root.opportunityTeam.get(0).businessTitle)
              .build();
 }

 List<ExpectedCustomerSpend> expectedCustomerSpends = new
ArrayList<ExpectedCustomerSpend>();
 if ( root.project != null && root.project.expectedCustomerSpend != null) {
  for (org.example.entity.ExpectedCustomerSpend expectedCustomerSpendJson :
root.project.expectedCustomerSpend) {
   ExpectedCustomerSpend expectedCustomerSpend = null;
   expectedCustomerSpend = ExpectedCustomerSpend.builder()
     .amount(expectedCustomerSpendJson.amount)
     .currencyCode(expectedCustomerSpendJson.currencyCode)
     .frequency(expectedCustomerSpendJson.frequency)
     .targetCompany(expectedCustomerSpendJson.targetCompany)
     .build();
   expectedCustomerSpends.add(expectedCustomerSpend);
  }
      }

      Project project = null;
      if ( root.project != null) {
       project = Project.builder()
              .title(root.project.title)
              .customerBusinessProblem(root.project.customerBusinessProblem)
              .customerUseCase(root.project.customerUseCase)
              .deliveryModels(root.project.deliveryModels)
```

```
                .expectedCustomerSpend(expectedCustomerSpends)
                .salesActivities(root.project.salesActivities)
                .competitorName(root.project.competitorName)
                .otherSolutionDescription(root.project.otherSolutionDescription)
                .build();
        }

        SoftwareRevenue softwareRevenue = null;
        if ( root.softwareRevenue != null) {
         MonetaryValue monetaryValue = null;
         if ( root.softwareRevenue.value != null) {
          monetaryValue = MonetaryValue.builder()
             .amount(root.softwareRevenue.value.amount)
             .currencyCode(root.softwareRevenue.value.currencyCode)
             .build();
         }
         softwareRevenue = SoftwareRevenue.builder()
           .deliveryModel(root.softwareRevenue.deliveryModel)
           .effectiveDate(root.softwareRevenue.effectiveDate)
           .expirationDate(root.softwareRevenue.expirationDate)
           .value(monetaryValue)
           .build();
        }

 // Building the Actual CreateOpportunity Request
 CreateOpportunityRequest createOpportunityRequest =
CreateOpportunityRequest.builder()
   .catalog(CATALOG_TO_USE)
   .clientToken(root.clientToken)
   .primaryNeedsFromAwsWithStrings(root.primaryNeedsFromAws)
   .opportunityType(root.opportunityType)
   .lifeCycle(lifeCycle)
   .marketing(marketing)
   .nationalSecurity(root.nationalSecurity)
   .origin(root.origin)
   .customer(customer)
   .project(project)
   .partnerOpportunityIdentifier(root.partnerOpportunityIdentifier)
   .opportunityTeam(oportunityTeamContact)
   .softwareRevenue(softwareRevenue)
   .build();

 CreateOpportunityResponse response =
client.createOpportunity(createOpportunityRequest);
```

```
  System.out.println("Successfully created: " + response);

  return response;
    }

}
```

- Para obtener más información sobre la API, consulte CreateOpportunityla Referencia AWS SDK for Java 2.x de la API.

`DisassociateOpportunity`

En el siguiente ejemplo de código, se muestra cómo utilizar `DisassociateOpportunity`.

SDK para Java 2.x

Eliminar una asociación existente entre una oportunidad y entidades relacionadas.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.DisassociateOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.DisassociateOpportunityResponse

/*
Purpose
PC-API -14 Removing a Solution
PC-API -15 Removing an offer
PC-API -16 Removing a product
entity_type = Solutions | AWSProducts | AWSMarketplaceOffers
*/
```

```
public class DisassociateOpportunity {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     String entityType = "Solutions";

     String entityIdentifier = "S-0000000";

     DisassociateOpportunityResponse response = getResponse(opportunityId,
 entityType, entityIdentifier );

     ReferenceCodesUtils.formatOutput(response);
    }

 static DisassociateOpportunityResponse getResponse(String opportunityId, String
 entityType, String entityIdentifier) {

  DisassociateOpportunityRequest disassociateOpportunityRequest =
 DisassociateOpportunityRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .opportunityIdentifier(opportunityId)
          .relatedEntityType(entityType)
          .relatedEntityIdentifier(entityIdentifier)
          .build();

        DisassociateOpportunityResponse response =
 client.disassociateOpportunity(disassociateOpportunityRequest);

        return response;
 }
}
```

- Para obtener más información sobre la API, consulte DisassociateOpportunityla Referencia AWS SDK for Java 2.x de la API.

`GetAwsOpportunitySummary`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetAwsOpportunitySummary`.

SDK para Java 2.x

Recupera un resumen de una AWS oportunidad.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetAwsOpportunitySummaryRequest
import
 software.amazon.awssdk.services.partnercentralselling.model.GetAwsOpportunitySummaryRespons

/*
 * Purpose
 * PC-API-25 Retrieves a summary of an AWS Opportunity.
 */

public class GetAwsOpportunitySummary {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {
```

```
     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     GetAwsOpportunitySummaryResponse response = getResponse(opportunityId);

     ReferenceCodesUtils.formatOutput(response);
    }

 public static GetAwsOpportunitySummaryResponse getResponse(String opportunityId) {

  GetAwsOpportunitySummaryRequest getOpportunityRequest =
 GetAwsOpportunitySummaryRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .relatedOpportunityIdentifier(opportunityId)
          .build();

  GetAwsOpportunitySummaryResponse response =
 client.getAwsOpportunitySummary(getOpportunityRequest);

        return response;
 }
}
```

- Para obtener más información sobre la API, consulte GetAwsOpportunitySummaryla referencia de AWS SDK for Java 2.x la API.

`GetEngagementInvitation`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetEngagementInvitation`.

SDK para Java 2.x

Recupera los detalles de una invitación de compromiso compartida AWS con un socio.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
```

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetEngagementInvitationRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetEngagementInvitationResponse

/*
 * Purpose
 * PC-API-22 Get engagement invitation opportunity
 */

public class GetEngagementInvitation {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     GetEngagementInvitationResponse response = getResponse(opportunityId);

     ReferenceCodesUtils.formatOutput(response);
    }

 static GetEngagementInvitationResponse getResponse(String opportunityId) {

  GetEngagementInvitationRequest getOpportunityRequest =
 GetEngagementInvitationRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .identifier(opportunityId)
          .build();

  GetEngagementInvitationResponse response =
 client.getEngagementInvitation(getOpportunityRequest);

        return response;
 }
}
```

- Para obtener más información sobre la API, consulte GetEngagementInvitationla Referencia de AWS SDK for Java 2.x la API.

`GetOpportunity`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetOpportunity`.

SDK para Java 2.x

Obtener una oportunidad.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetOpportunityResponse;

/*
 * Purpose
 * PC-API-08 Get updated Opportunity
 */

public class GetOpportunity {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();
```

```
    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     GetOpportunityResponse response = getResponse(opportunityId);

     ReferenceCodesUtils.formatOutput(response);
    }

 public static GetOpportunityResponse getResponse(String opportunityId) {

        GetOpportunityRequest getOpportunityRequest =
 GetOpportunityRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .identifier(opportunityId)
          .build();

        GetOpportunityResponse response =
 client.getOpportunity(getOpportunityRequest);

        return response;
 }
}
```

- Para obtener más información sobre la API, consulte GetOpportunityla Referencia AWS SDK for Java 2.x de la API.

`ListEngagementInvitations`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListEngagementInvitations`.

SDK para Java 2.x

Recupera una lista de las invitaciones de participación enviadas al socio.

```
package org.example;

import java.util.ArrayList;
import java.util.List;

import org.example.utils.ReferenceCodesUtils;
import static org.example.utils.Constants.*;
```

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.ListEngagementInvitationsReques
import
 software.amazon.awssdk.services.partnercentralselling.model.ListEngagementInvitationsRespon
import software.amazon.awssdk.services.partnercentralselling.model.ParticipantType;
import
 software.amazon.awssdk.services.partnercentralselling.model.EngagementInvitationSummary;

public class ListEngagementInvitations {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     List<EngagementInvitationSummary> opportunitySummaries = getResponse();
        ReferenceCodesUtils.formatOutput(opportunitySummaries);
    }

    static List<EngagementInvitationSummary> getResponse() {

  List<EngagementInvitationSummary> opportunitySummaries = new
 ArrayList<EngagementInvitationSummary>();

  ListEngagementInvitationsRequest listOpportunityRequest =
 ListEngagementInvitationsRequest.builder()
                .catalog(CATALOG_TO_USE)
                .participantType(ParticipantType.RECEIVER)
          .maxResults(5)
          .build();

  ListEngagementInvitationsResponse response =
 client.listEngagementInvitations(listOpportunityRequest);

     opportunitySummaries.addAll(response.engagementInvitationSummaries());
```

```
    client.close();

       return opportunitySummaries;
 }
}
```

- Para obtener más información sobre la API, consulte ListEngagementInvitationsla Referencia AWS SDK for Java 2.x de la API.

`ListOpportunities`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListOpportunities`.

SDK para Java 2.x

Mostrar las oportunidades.

```
package org.example;

import java.util.ArrayList;
import java.util.List;

import org.example.utils.ReferenceCodesUtils;
import static org.example.utils.Constants.*;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.ListOpportunitiesRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.ListOpportunitiesResponse;
import
 software.amazon.awssdk.services.partnercentralselling.model.OpportunitySummary;

/*
 * Purpose
 * PC-API-18 Getting list of Opportunities
 */
```

```
public class ListOpportunititesPaging {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {
     List<OpportunitySummary> opportunitySummaries = getResponse();
        ReferenceCodesUtils.formatOutput(opportunitySummaries);
    }

    private static List<OpportunitySummary> getResponse() {
     List<OpportunitySummary> opportunitySummaries = new
 ArrayList<OpportunitySummary>();

  ListOpportunitiesRequest listOpportunityRequest =
 ListOpportunitiesRequest.builder()
                .catalog(CATALOG_TO_USE)
          .maxResults(5)
          .build();

     ListOpportunitiesResponse response =
 client.listOpportunities(listOpportunityRequest);

     opportunitySummaries.addAll(response.opportunitySummaries());

     while (response.nextToken() != null && response.nextToken().length() > 0) {
      listOpportunityRequest = ListOpportunitiesRequest.builder()
                    .catalog(CATALOG_TO_USE)
              .maxResults(5)
              .nextToken(response.nextToken())
              .build();
      response = client.listOpportunities(listOpportunityRequest);
      opportunitySummaries.addAll(response.opportunitySummaries());
     }

     client.close();

        return opportunitySummaries;
 }
}
```

- Para obtener más información sobre la API, consulte ListOpportunitiesla Referencia AWS SDK for Java 2.x de la API.

`ListSolutions`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListSolutions`.

SDK para Java 2.x

Recupera una lista de las soluciones para socios que el socio registró en Centro de socios.

```
package org.example;

import java.util.ArrayList;
import java.util.List;

import static org.example.utils.Constants.*;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.ListSolutionsRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.ListSolutionsResponse;
import software.amazon.awssdk.services.partnercentralselling.model.SolutionBase;

/*
 * Purpose
 * PC-API-10 Getting list of solutions
 */

public class ListSolutions {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
```

```
            .build();

    public static void main(String[] args) {
     List<SolutionBase> solutionSummaries = getResponse();
        ReferenceCodesUtils.formatOutput(solutionSummaries);
    }

    static List<SolutionBase> getResponse() {
  List<SolutionBase> solutionSummaries = new ArrayList<SolutionBase>();

  ListSolutionsRequest listSolutionsRequest = ListSolutionsRequest.builder()
    .catalog(CATALOG_TO_USE)
          .maxResults(5)
          .build();

     ListSolutionsResponse response = client.listSolutions(listSolutionsRequest);

     solutionSummaries.addAll(response.solutionSummaries());

        return solutionSummaries;
 }
}
```

- Para obtener más información sobre la API, consulte ListSolutionsla Referencia AWS SDK for Java 2.x de la API.

`RejectEngagementInvitation`

En el siguiente ejemplo de código, se muestra cómo utilizar `RejectEngagementInvitation`.

SDK para Java 2.x

Rechaza una EngagementInvitation que se AWS comparte.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
```

```
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.RejectEngagementInvitationReque
import
 software.amazon.awssdk.services.partnercentralselling.model.RejectEngagementInvitationRespo

/*
 * Purpose
 * PC-API-05 AWS Originated(AO) rejection
 */

public class RejectEngagementInvitation {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

  RejectEngagementInvitationResponse response = getResponse(opportunityId);

     ReferenceCodesUtils.formatOutput(response);
    }

 static RejectEngagementInvitationResponse getResponse(String invitationId) {

        RejectEngagementInvitationRequest rejectOpportunityRequest =
 RejectEngagementInvitationRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .identifier(invitationId)
          .rejectionReason("Unable to support")
          .build();

  RejectEngagementInvitationResponse response =
 client.rejectEngagementInvitation(rejectOpportunityRequest);

        return response;
```

```
 }
}
```

- Para obtener más información sobre la API, consulte RejectEngagementInvitationla Referencia AWS SDK for Java 2.x de la API.

`StartEngagementByAcceptingInvitationTask`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartEngagementByAcceptingInvitationTask`.

SDK para Java 2.x

Comienza la participación aceptando un EngagementInvitation.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.StartEngagementByAcceptingInvit
import
 software.amazon.awssdk.services.partnercentralselling.model.StartEngagementByAcceptingInvit
import
 software.amazon.awssdk.services.partnercentralselling.model.GetEngagementInvitationRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetEngagementInvitationResponse
import software.amazon.awssdk.services.partnercentralselling.model.InvitationStatus;

/*
Purpose
PC-API-04: Start Engagement By Accepting InvitationTask for AWS Originated(AO)
 opportunity
*/
```

```
public class StartEngagementByAcceptingInvitationTask {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

 static String clientToken = "test-a30d161";

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     StartEngagementByAcceptingInvitationTaskResponse response =
 getResponse(opportunityId);

     if ( response == null) {
      System.out.println("Opportunity is not AWS Originated.");
     } else {
      ReferenceCodesUtils.formatOutput(response);
     }
    }

    private static GetEngagementInvitationResponse getInvitation(String
 invitationId) {

     GetEngagementInvitationRequest getRequest =
 GetEngagementInvitationRequest.builder()
          .catalog(Constants.CATALOG_TO_USE)
          .identifier(invitationId)
          .build();

  GetEngagementInvitationResponse response =
 client.getEngagementInvitation(getRequest);

        return response;
 }

 static StartEngagementByAcceptingInvitationTaskResponse getResponse(String
 invitationId) {

  if ( getInvitation(invitationId).status().equals(InvitationStatus.PENDING)) {
```

```
   StartEngagementByAcceptingInvitationTaskRequest acceptOpportunityRequest =
     StartEngagementByAcceptingInvitationTaskRequest.builder()
     .catalog(Constants.CATALOG_TO_USE)
           .identifier(invitationId)
           .clientToken(clientToken)
           .build();

   StartEngagementByAcceptingInvitationTaskResponse response =
 client.startEngagementByAcceptingInvitationTask(acceptOpportunityRequest);
         return response;
  }
  return null;
 }
}
```

- Para obtener detalles sobre la API, consulte StartEngagementByAcceptingInvitationTaskla referencia AWS SDK for Java 2.x de la API.

`StartEngagementFromOpportunityTask`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartEngagementFromOpportunityTask`.

SDK para Java 2.x

Inicia el proceso de participación a partir de una oportunidad existente al aceptar la invitación de participación y crear la oportunidad correspondiente en el sistema del socio.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import software.amazon.awssdk.services.partnercentralselling.model.AwsSubmission;
```

```
import
 software.amazon.awssdk.services.partnercentralselling.model.SalesInvolvementType;
import
 software.amazon.awssdk.services.partnercentralselling.model.StartEngagementFromOpportunityT
import
 software.amazon.awssdk.services.partnercentralselling.model.StartEngagementFromOpportunityT
import software.amazon.awssdk.services.partnercentralselling.model.Visibility;

/*
 * Purpose
 * PC-API-01 Partner Originated (PO) opp submission(Start Engagement From
 Opportunity Task for AO Originated Opportunity)
 */

public class StartEngagementFromOpportunityTask {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     StartEngagementFromOpportunityTaskResponse response =
 getResponse(opportunityId);

     ReferenceCodesUtils.formatOutput(response);
    }

 static StartEngagementFromOpportunityTaskResponse getResponse(String opportunityId)
 {

  StartEngagementFromOpportunityTaskRequest submitOpportunityRequest =
 StartEngagementFromOpportunityTaskRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .identifier(opportunityId)
          .clientToken("test-annjqwesdsd99")

 .awsSubmission(AwsSubmission.builder().involvementType(SalesInvolvementType.CO_SELL).visibi
          .build();
```

```
  StartEngagementFromOpportunityTaskResponse response =
 client.startEngagementFromOpportunityTask(submitOpportunityRequest);

        return response;
 }
}
```

- Para obtener más información sobre la API, consulte StartEngagementFromOpportunityTaskla Referencia AWS SDK for Java 2.x de la API.

`UpdateOpportunity`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateOpportunity`.

SDK para Java 2.x

Actualizar una oportunidad.

```
package org.example;

import java.time.Instant;
import java.util.ArrayList;
import java.util.List;

import static org.example.utils.Constants.*;

import org.example.entity.Root;
import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;
import org.example.utils.StringSerializer;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import software.amazon.awssdk.services.partnercentralselling.model.Account;
import software.amazon.awssdk.services.partnercentralselling.model.Address;
import software.amazon.awssdk.services.partnercentralselling.model.Contact;
import software.amazon.awssdk.services.partnercentralselling.model.Customer;
import
 software.amazon.awssdk.services.partnercentralselling.model.ExpectedCustomerSpend;
```

```
import
 software.amazon.awssdk.services.partnercentralselling.model.GetOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetOpportunityResponse;
import software.amazon.awssdk.services.partnercentralselling.model.LifeCycle;
import software.amazon.awssdk.services.partnercentralselling.model.Marketing;
import software.amazon.awssdk.services.partnercentralselling.model.NextStepsHistory;
import software.amazon.awssdk.services.partnercentralselling.model.Project;
import software.amazon.awssdk.services.partnercentralselling.model.ReviewStatus;
import
 software.amazon.awssdk.services.partnercentralselling.model.UpdateOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.UpdateOpportunityResponse;

import com.google.gson.Gson;
import com.google.gson.GsonBuilder;
import com.google.gson.ToNumberPolicy;

/*
 * Purpose
 * PC-API-02/06 Update opportunity when LifeCycle.ReviewStatus is not Submitted or
 In-Review
 */

public class UpdateOpportunity {

 static final Gson GSON = new GsonBuilder()
   .setObjectToNumberStrategy(ToNumberPolicy.LAZILY_PARSED_NUMBER)
   .registerTypeAdapter(String.class, new StringSerializer())
   .create();

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

 static String OPPORTUNITY_ORIGIN = ORIGIN_PARTNER_ORIGINATED;

 public static void main(String[] args) {

  String inputFile = "updateOpportunity.json";

  if (args.length > 0)
```

```
  inputFile = args[0];

 UpdateOpportunityResponse response = updateOpportunity(inputFile);

 client.close();
}

public static GetOpportunityResponse getResponse(String opportunityId) {

       GetOpportunityRequest getOpportunityRequest =
GetOpportunityRequest.builder()
   .catalog(Constants.CATALOG_TO_USE)
         .identifier(opportunityId)
         .build();

       GetOpportunityResponse response =
client.getOpportunity(getOpportunityRequest);
       System.out.println(opportunityId + ":" + response);
       return response;
}

public static UpdateOpportunityResponse updateOpportunity(String inputFile) {

 String inputString = ReferenceCodesUtils.readInputFileToString(inputFile);

 Root root = GSON.fromJson(inputString, Root.class);
 GetOpportunityResponse response = getResponse(root.identifier);

 if (response != null
   && response.lifeCycle() != null
   && response.lifeCycle().reviewStatus() != null
   && response.lifeCycle().reviewStatus() != ReviewStatus.SUBMITTED
   && response.lifeCycle().reviewStatus() != ReviewStatus.IN_REVIEW) {

  List<NextStepsHistory> nextStepsHistories = new ArrayList<NextStepsHistory>();
  if ( root.lifeCycle != null && root.lifeCycle.nextStepsHistories != null) {
   for (org.example.entity.NextStepsHistory nextStepsHistoryJson :
root.lifeCycle.nextStepsHistories) {
    NextStepsHistory nextStepsHistory = NextStepsHistory.builder()
      .time(Instant.parse(nextStepsHistoryJson.time))
      .value(nextStepsHistoryJson.value)
                  .build();
    nextStepsHistories.add(nextStepsHistory);
   }
```

```
  }

  LifeCycle lifeCycle = null;
  if ( root.lifeCycle != null ) {
   lifeCycle = LifeCycle.builder()
    .closedLostReason(root.lifeCycle.closedLostReason)
    .nextSteps(root.lifeCycle.nextSteps)
    .nextStepsHistory(nextStepsHistories)
    .reviewComments(root.lifeCycle.reviewComments)
    .reviewStatus(root.lifeCycle.reviewStatus)
    .reviewStatusReason(root.lifeCycle.reviewStatusReason)
    .stage(root.lifeCycle.stage)
    .targetCloseDate(root.lifeCycle.targetCloseDate)
    .build();
  }

  Marketing marketing = null;
  if ( root.marketing != null ) {
   marketing = Marketing.builder()
     .awsFundingUsed(root.marketing.awsFundingUsed)
     .campaignName(root.marketing.campaignName)
     .channels(root.marketing.channels)
     .source(root.marketing.source)
     .useCases(root.marketing.useCases)
     .build();

  }

  Address address = null;
  if (root.customer != null && root.customer.account != null &&
root.customer.account.address != null) {
   address = Address.builder().postalCode(root.customer.account.address.postalCode)
     .stateOrRegion(root.customer.account.address.stateOrRegion)
     .countryCode(root.customer.account.address.countryCode).build();
  }

  Account account = null;
  if (root.customer != null && root.customer.account != null) {
   account = Account.builder().address(address).duns(root.customer.account.duns)

.industry(root.customer.account.industry).companyName(root.customer.account.companyName)
     .websiteUrl(root.customer.account.websiteUrl).build();
  }
```

```
  List<Contact> contacts = new ArrayList<Contact>();
  if ( root.customer != null && root.customer.contacts != null) {
   for (org.example.entity.Contact jsonContact : root.customer.contacts) {
    Contact contact = Contact.builder()
                  .email(jsonContact.email)
                  .firstName(jsonContact.firstName)
                  .lastName(jsonContact.lastName)
                  .phone(jsonContact.phone)
                  .businessTitle(jsonContact.businessTitle)
                  .build();
    contacts.add(contact);
   }
  }

  Customer customer =
Customer.builder().account(account).contacts(contacts).build();

  List<ExpectedCustomerSpend> expectedCustomerSpends = new
ArrayList<ExpectedCustomerSpend>();
  if ( root.project != null && root.project.expectedCustomerSpend != null) {
   for (org.example.entity.ExpectedCustomerSpend expectedCustomerSpendJson :
root.project.expectedCustomerSpend) {
    ExpectedCustomerSpend expectedCustomerSpend = null;
    expectedCustomerSpend = ExpectedCustomerSpend.builder()
      .amount(expectedCustomerSpendJson.amount)
      .currencyCode(expectedCustomerSpendJson.currencyCode)
      .frequency(expectedCustomerSpendJson.frequency)
      .targetCompany(expectedCustomerSpendJson.targetCompany)
      .build();
    expectedCustomerSpends.add(expectedCustomerSpend);
   }
        }

  Project project = null;
  if (root.project != null) {
   project = Project.builder().title(root.project.title)
     .customerBusinessProblem(root.project.customerBusinessProblem)

.customerUseCase(root.project.customerUseCase).deliveryModels(root.project.deliveryModels)
     .expectedCustomerSpend(expectedCustomerSpends)

.salesActivities(root.project.salesActivities).competitorName(root.project.competitorName)
     .otherSolutionDescription(root.project.otherSolutionDescription).build();
  }
```

```
  // Building the Actual CreateOpportunity Request
  UpdateOpportunityRequest updateOpportunityRequest =
UpdateOpportunityRequest.builder().catalog(root.catalog)

.identifier(root.identifier).lastModifiedDate(Instant.parse(root.lastModifiedDate))

.primaryNeedsFromAwsWithStrings(root.primaryNeedsFromAws).opportunityType(root.opportunityT
    .lifeCycle(lifeCycle)
    .customer(customer)
    .project(project)
    .partnerOpportunityIdentifier(root.partnerOpportunityIdentifier)
    .marketing(marketing)
    .nationalSecurity(root.nationalSecurity)
    .opportunityType(root.opportunityType)
    .build();

  UpdateOpportunityResponse updateResponse =
client.updateOpportunity(updateOpportunityRequest);
  System.out.println("Successfully updated opportunity: " + updateResponse);

  return updateResponse;
 } else {
  System.out.println("Opportunity cannot be updated.");
  return null;
 }
   }
}
```

- Para obtener más información sobre la API, consulte UpdateOpportunityla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Actualizar la entidad asociada a una oportunidad

En el siguiente ejemplo de código, se muestra cómo:

- Desvincular una entidad antigua.
- Asociar una entidad nueva.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurarlo y ejecutarlo en el repositorio Escenarios.

Actualizar la entidad asociada a una oportunidad

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.AssociateOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.AssociateOpportunityResponse;
import
 software.amazon.awssdk.services.partnercentralselling.model.DisassociateOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.DisassociateOpportunityResponse

/*
Purpose
PC-API -17 Replacing a solution
*/

public class ReplaceSolution {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();
```

```
   public static void main(String[] args) {

    String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

    String entityType = "Solutions";
    String originalEntityIdentifier = "S-0000000";
    String newEntityIdentifier = "S-0011111";

    disassociateOppornititityResponse(opportunityId, entityType,
originalEntityIdentifier );
    AssociateOpportunityResponse associateOpportunityResponse =
associateOpportunityResponse(opportunityId, entityType, newEntityIdentifier );

    ReferenceCodesUtils.formatOutput(associateOpportunityResponse);
   }

private static AssociateOpportunityResponse associateOpportunityResponse(String
opportunityId, String entityType, String entityIdentifier) {

       AssociateOpportunityRequest associateOpportunityRequest =
AssociateOpportunityRequest.builder()
   .catalog(Constants.CATALOG_TO_USE)
         .opportunityIdentifier(opportunityId)
         .relatedEntityType(entityType)
         .relatedEntityIdentifier(entityIdentifier)
         .build();

       AssociateOpportunityResponse response =
client.associateOpportunity(associateOpportunityRequest);

       return response;
}

private static DisassociateOpportunityResponse
disassociateOppornititityResponse(String opportunityId, String entityType, String
entityIdentifier) {
 PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
           .region(Region.US_EAST_1)
           .credentialsProvider(DefaultCredentialsProvider.create())
           .httpClient(ApacheHttpClient.builder().build())
           .build();
```

```
        DisassociateOpportunityRequest disassociateOpportunityRequest =
 DisassociateOpportunityRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .opportunityIdentifier(opportunityId)
          .relatedEntityType(entityType)
          .relatedEntityIdentifier(entityIdentifier)
          .build();

        DisassociateOpportunityResponse response =
 client.disassociateOpportunity(disassociateOpportunityRequest);

        return response;
 }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - AssociateOpportunity
  - DisassociateOpportunity

Ejemplos de Amazon Personalize usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Amazon Personalize.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`CreateBatchInferenceJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateBatchInferenceJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
        public static String createPersonalizeBatchInferenceJob(PersonalizeClient
personalizeClient,
                        String solutionVersionArn,
                        String jobName,
                        String s3InputDataSourcePath,
                        String s3DataDestinationPath,
                        String roleArn,
                        String explorationWeight,
                        String explorationItemAgeCutOff) {

                long waitInMilliseconds = 60 * 1000;
                String status;
                String batchInferenceJobArn;

                try {

                        // Set up data input and output parameters.
                        S3DataConfig inputSource = S3DataConfig.builder()
                                        .path(s3InputDataSourcePath)
                                        .build();

                        S3DataConfig outputDestination = S3DataConfig.builder()
                                        .path(s3DataDestinationPath)
                                        .build();

                        BatchInferenceJobInput jobInput =
BatchInferenceJobInput.builder()
                                        .s3DataSource(inputSource)
```

```
                                        .build();

                        BatchInferenceJobOutput jobOutputLocation =
BatchInferenceJobOutput.builder()
                                        .s3DataDestination(outputDestination)
                                        .build();

                        // Optional code to build the User-Personalization specific
item exploration
                        // config.
                        HashMap<String, String> explorationConfig = new HashMap<>();

                        explorationConfig.put("explorationWeight",
explorationWeight);
                        explorationConfig.put("explorationItemAgeCutOff",
explorationItemAgeCutOff);

                        BatchInferenceJobConfig jobConfig =
BatchInferenceJobConfig.builder()
                                        .itemExplorationConfig(explorationConfig)
                                        .build();

                        // End optional User-Personalization recipe specific code.

                        CreateBatchInferenceJobRequest
createBatchInferenceJobRequest = CreateBatchInferenceJobRequest
                                        .builder()
                                        .solutionVersionArn(solutionVersionArn)
                                        .jobInput(jobInput)
                                        .jobOutput(jobOutputLocation)
                                        .jobName(jobName)
                                        .roleArn(roleArn)
                                        .batchInferenceJobConfig(jobConfig) //
Optional
                                        .build();

                        batchInferenceJobArn =
personalizeClient.createBatchInferenceJob(createBatchInferenceJobRequest)
                                        .batchInferenceJobArn();

                        DescribeBatchInferenceJobRequest
describeBatchInferenceJobRequest = DescribeBatchInferenceJobRequest
                                        .builder()
                                        .batchInferenceJobArn(batchInferenceJobArn)
```

```
                                        .build();

                        long maxTime = Instant.now().getEpochSecond() + 3 * 60 * 60;
                        while (Instant.now().getEpochSecond() < maxTime) {

                                BatchInferenceJob batchInferenceJob =
personalizeClient

.describeBatchInferenceJob(describeBatchInferenceJobRequest)
                                                        .batchInferenceJob();

                                status = batchInferenceJob.status();
                                System.out.println("Batch inference job status: " +
status);

                                if (status.equals("ACTIVE") || status.equals("CREATE
FAILED")) {
                                        break;
                                }
                                try {
                                        Thread.sleep(waitInMilliseconds);
                                } catch (InterruptedException e) {
                                        System.out.println(e.getMessage());
                                }
                        }
                        return batchInferenceJobArn;

                } catch (PersonalizeException e) {
                        System.out.println(e.awsErrorDetails().errorMessage());
                }
                return "";
        }
```

- Para obtener más información sobre la API, consulta CreateBatchInferenceJobla Referencia AWS SDK for Java 2.x de la API.

`CreateCampaign`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateCampaign`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createPersonalCompaign(PersonalizeClient personalizeClient,
String solutionVersionArn,
           String name) {

       try {
           CreateCampaignRequest createCampaignRequest =
CreateCampaignRequest.builder()
                   .minProvisionedTPS(1)
                   .solutionVersionArn(solutionVersionArn)
                   .name(name)
                   .build();

           CreateCampaignResponse campaignResponse =
personalizeClient.createCampaign(createCampaignRequest);
           System.out.println("The campaign ARN is " +
campaignResponse.campaignArn());
           return campaignResponse.campaignArn();
       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
       return null;
   }
```

- Para obtener más información sobre la API, consulta CreateCampaignla Referencia AWS SDK for Java 2.x de la API.

`CreateDataset`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDataset`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public static String createDataset(PersonalizeClient personalizeClient,
        String datasetName,
        String datasetGroupArn,
        String datasetType,
        String schemaArn) {
    try {
        CreateDatasetRequest request = CreateDatasetRequest.builder()
                .name(datasetName)
                .datasetGroupArn(datasetGroupArn)
                .datasetType(datasetType)
                .schemaArn(schemaArn)
                .build();

        String datasetArn = personalizeClient.createDataset(request)
                .datasetArn();
        System.out.println("Dataset " + datasetName + " created.");
        return datasetArn;

    } catch (PersonalizeException e) {
        System.err.println(e.awsErrorDetails().errorMessage());
        System.exit(1);
    }
    return "";
}
```

- Para obtener más información sobre la API, consulta CreateDatasetla Referencia AWS SDK for Java 2.x de la API.

`CreateDatasetExportJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDatasetExportJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createDatasetExportJob(PersonalizeClient personalizeClient,
           String jobName,
           String datasetArn,
           IngestionMode ingestionMode,
           String roleArn,
           String s3BucketPath,
           String kmsKeyArn) {

       long waitInMilliseconds = 30 * 1000; // 30 seconds
       String status = null;

       try {

           S3DataConfig exportS3DataConfig =
S3DataConfig.builder().path(s3BucketPath).kmsKeyArn(kmsKeyArn).build();
           DatasetExportJobOutput jobOutput =
DatasetExportJobOutput.builder().s3DataDestination(exportS3DataConfig)
                   .build();

           CreateDatasetExportJobRequest createRequest =
CreateDatasetExportJobRequest.builder()
                   .jobName(jobName)
                   .datasetArn(datasetArn)
                   .ingestionMode(ingestionMode)
                   .jobOutput(jobOutput)
                   .roleArn(roleArn)
                   .build();

           String datasetExportJobArn =
personalizeClient.createDatasetExportJob(createRequest).datasetExportJobArn();

           DescribeDatasetExportJobRequest describeDatasetExportJobRequest =
DescribeDatasetExportJobRequest.builder()
                   .datasetExportJobArn(datasetExportJobArn)
```

```
                .build();

        long maxTime = Instant.now().getEpochSecond() + 3 * 60 * 60;

        while (Instant.now().getEpochSecond() < maxTime) {

            DatasetExportJob datasetExportJob = personalizeClient
                    .describeDatasetExportJob(describeDatasetExportJobRequest)
                    .datasetExportJob();

            status = datasetExportJob.status();
            System.out.println("Export job status: " + status);

            if (status.equals("ACTIVE") || status.equals("CREATE FAILED")) {
                return status;
            }
            try {
                Thread.sleep(waitInMilliseconds);
            } catch (InterruptedException e) {
                System.out.println(e.getMessage());
            }
        }
    } catch (PersonalizeException e) {
        System.out.println(e.awsErrorDetails().errorMessage());
    }
    return "";
}
```

- Para obtener más información sobre la API, consulta CreateDatasetExportJobla Referencia AWS SDK for Java 2.x de la API.

`CreateDatasetGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDatasetGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createDatasetGroup(PersonalizeClient personalizeClient,
String datasetGroupName) {

       try {
           CreateDatasetGroupRequest createDatasetGroupRequest =
CreateDatasetGroupRequest.builder()
                   .name(datasetGroupName)
                   .build();
           return
personalizeClient.createDatasetGroup(createDatasetGroupRequest).datasetGroupArn();
       } catch (PersonalizeException e) {
           System.out.println(e.awsErrorDetails().errorMessage());
       }
       return "";
   }
```

Crear un grupo de conjuntos de datos de dominios.

```
   public static String createDomainDatasetGroup(PersonalizeClient
personalizeClient,
           String datasetGroupName,
           String domain) {

       try {
           CreateDatasetGroupRequest createDatasetGroupRequest =
CreateDatasetGroupRequest.builder()
                   .name(datasetGroupName)
                   .domain(domain)
                   .build();
           return
personalizeClient.createDatasetGroup(createDatasetGroupRequest).datasetGroupArn();
       } catch (PersonalizeException e) {
           System.out.println(e.awsErrorDetails().errorMessage());
```

```
        }
        return "";
    }
```

- Para obtener más información sobre la API, consulta CreateDatasetGroupla Referencia AWS SDK for Java 2.x de la API.

`CreateDatasetImportJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDatasetImportJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createPersonalizeDatasetImportJob(PersonalizeClient
personalizeClient,
           String jobName,
           String datasetArn,
           String s3BucketPath,
           String roleArn) {

       long waitInMilliseconds = 60 * 1000;
       String status;
       String datasetImportJobArn;

       try {
           DataSource importDataSource = DataSource.builder()
                   .dataLocation(s3BucketPath)
                   .build();

           CreateDatasetImportJobRequest createDatasetImportJobRequest =
CreateDatasetImportJobRequest.builder()
                   .datasetArn(datasetArn)
                   .dataSource(importDataSource)
                   .jobName(jobName)
```

```
                    .roleArn(roleArn)
                    .build();

            datasetImportJobArn =
personalizeClient.createDatasetImportJob(createDatasetImportJobRequest)
                    .datasetImportJobArn();
            DescribeDatasetImportJobRequest describeDatasetImportJobRequest =
DescribeDatasetImportJobRequest.builder()
                    .datasetImportJobArn(datasetImportJobArn)
                    .build();

            long maxTime = Instant.now().getEpochSecond() + 3 * 60 * 60;

            while (Instant.now().getEpochSecond() < maxTime) {

                DatasetImportJob datasetImportJob = personalizeClient
                        .describeDatasetImportJob(describeDatasetImportJobRequest)
                        .datasetImportJob();

                status = datasetImportJob.status();
                System.out.println("Dataset import job status: " + status);

                if (status.equals("ACTIVE") || status.equals("CREATE FAILED")) {
                    break;
                }
                try {
                    Thread.sleep(waitInMilliseconds);
                } catch (InterruptedException e) {
                    System.out.println(e.getMessage());
                }
            }
            return datasetImportJobArn;

        } catch (PersonalizeException e) {
            System.out.println(e.awsErrorDetails().errorMessage());
        }
        return "";
    }
```

- Para obtener más información sobre la API, consulta CreateDatasetImportJobla Referencia AWS SDK for Java 2.x de la API.

`CreateEventTracker`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateEventTracker`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createEventTracker(PersonalizeClient personalizeClient,
String eventTrackerName,
           String datasetGroupArn) {

       String eventTrackerId = "";
       String eventTrackerArn;
       long maxTime = 3 * 60 * 60; // 3 hours
       long waitInMilliseconds = 20 * 1000; // 20 seconds
       String status;

       try {

           CreateEventTrackerRequest createEventTrackerRequest =
CreateEventTrackerRequest.builder()
                   .name(eventTrackerName)
                   .datasetGroupArn(datasetGroupArn)
                   .build();

           CreateEventTrackerResponse createEventTrackerResponse =
personalizeClient
                   .createEventTracker(createEventTrackerRequest);

           eventTrackerArn = createEventTrackerResponse.eventTrackerArn();
           eventTrackerId = createEventTrackerResponse.trackingId();
           System.out.println("Event tracker ARN: " + eventTrackerArn);
           System.out.println("Event tracker ID: " + eventTrackerId);

           maxTime = Instant.now().getEpochSecond() + maxTime;

           DescribeEventTrackerRequest describeRequest =
DescribeEventTrackerRequest.builder()
```

```
                    .eventTrackerArn(eventTrackerArn)
                    .build();

            while (Instant.now().getEpochSecond() < maxTime) {

                status =
personalizeClient.describeEventTracker(describeRequest).eventTracker().status();
                System.out.println("EventTracker status: " + status);

                if (status.equals("ACTIVE") || status.equals("CREATE FAILED")) {
                    break;
                }
                try {
                    Thread.sleep(waitInMilliseconds);
                } catch (InterruptedException e) {
                    System.out.println(e.getMessage());
                }
            }
            return eventTrackerId;
        } catch (PersonalizeException e) {
            System.out.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return eventTrackerId;
    }
```

- Para obtener más información sobre la API, consulta CreateEventTrackerla Referencia AWS SDK for Java 2.x de la API.

`CreateFilter`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateFilter`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static String createFilter(PersonalizeClient personalizeClient,
            String filterName,
            String datasetGroupArn,
            String filterExpression) {
        try {
            CreateFilterRequest request = CreateFilterRequest.builder()
                    .name(filterName)
                    .datasetGroupArn(datasetGroupArn)
                    .filterExpression(filterExpression)
                    .build();

            return personalizeClient.createFilter(request).filterArn();
        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

- Para obtener más información sobre la API, consulta CreateFilterla Referencia AWS SDK for Java 2.x de la API.

`CreateRecommender`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateRecommender`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static String createRecommender(PersonalizeClient personalizeClient,
            String name,
            String datasetGroupArn,
            String recipeArn) {

        long maxTime = 0;
```

```
        long waitInMilliseconds = 30 * 1000; // 30 seconds
        String recommenderStatus = "";

        try {
            CreateRecommenderRequest createRecommenderRequest =
CreateRecommenderRequest.builder()
                    .datasetGroupArn(datasetGroupArn)
                    .name(name)
                    .recipeArn(recipeArn)
                    .build();

            CreateRecommenderResponse recommenderResponse = personalizeClient
                    .createRecommender(createRecommenderRequest);
            String recommenderArn = recommenderResponse.recommenderArn();
            System.out.println("The recommender ARN is " + recommenderArn);

            DescribeRecommenderRequest describeRecommenderRequest =
DescribeRecommenderRequest.builder()
                    .recommenderArn(recommenderArn)
                    .build();

            maxTime = Instant.now().getEpochSecond() + 3 * 60 * 60;

            while (Instant.now().getEpochSecond() < maxTime) {

                recommenderStatus =
personalizeClient.describeRecommender(describeRecommenderRequest).recommender()
                        .status();
                System.out.println("Recommender status: " + recommenderStatus);

                if (recommenderStatus.equals("ACTIVE") ||
recommenderStatus.equals("CREATE FAILED")) {
                    break;
                }
                try {
                    Thread.sleep(waitInMilliseconds);
                } catch (InterruptedException e) {
                    System.out.println(e.getMessage());
                }
            }
            return recommenderArn;

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
        return "";
    }
```

- Para obtener más información sobre la API, consulta CreateRecommenderla Referencia AWS SDK for Java 2.x de la API.

`CreateSchema`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateSchema`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static String createSchema(PersonalizeClient personalizeClient, String
schemaName, String filePath) {

        String schema = null;
        try {
            schema = new String(Files.readAllBytes(Paths.get(filePath)));
        } catch (IOException e) {
            System.out.println(e.getMessage());
        }

        try {
            CreateSchemaRequest createSchemaRequest = CreateSchemaRequest.builder()
                    .name(schemaName)
                    .schema(schema)
                    .build();

            String schemaArn =
personalizeClient.createSchema(createSchemaRequest).schemaArn();

            System.out.println("Schema arn: " + schemaArn);
```

```
            return schemaArn;

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

Cree un esquema con un dominio.

```
    public static String createDomainSchema(PersonalizeClient personalizeClient,
String schemaName, String domain,
            String filePath) {

        String schema = null;
        try {
            schema = new String(Files.readAllBytes(Paths.get(filePath)));
        } catch (IOException e) {
            System.out.println(e.getMessage());
        }

        try {
            CreateSchemaRequest createSchemaRequest = CreateSchemaRequest.builder()
                    .name(schemaName)
                    .domain(domain)
                    .schema(schema)
                    .build();

            String schemaArn =
personalizeClient.createSchema(createSchemaRequest).schemaArn();

            System.out.println("Schema arn: " + schemaArn);

            return schemaArn;

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
```

```
    }
```

- Para obtener más información sobre la API, consulta CreateSchemala Referencia AWS SDK for Java 2.x de la API.

`CreateSolution`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateSolution`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createPersonalizeSolution(PersonalizeClient
personalizeClient,
           String datasetGroupArn,
           String solutionName,
           String recipeArn) {

       try {
           CreateSolutionRequest solutionRequest = CreateSolutionRequest.builder()
                   .name(solutionName)
                   .datasetGroupArn(datasetGroupArn)
                   .recipeArn(recipeArn)
                   .build();

           CreateSolutionResponse solutionResponse =
personalizeClient.createSolution(solutionRequest);
           return solutionResponse.solutionArn();

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
       return "";
   }
```

- Para obtener más información sobre la API, consulta CreateSolutionla Referencia AWS SDK for Java 2.x de la API.

`CreateSolutionVersion`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateSolutionVersion`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createPersonalizeSolutionVersion(PersonalizeClient
personalizeClient, String solutionArn) {
       long maxTime = 0;
       long waitInMilliseconds = 30 * 1000; // 30 seconds
       String solutionStatus = "";
       String solutionVersionStatus = "";
       String solutionVersionArn = "";

       try {
           DescribeSolutionRequest describeSolutionRequest =
DescribeSolutionRequest.builder()
                   .solutionArn(solutionArn)
                   .build();

           maxTime = Instant.now().getEpochSecond() + 3 * 60 * 60;

           // Wait until solution is active.
           while (Instant.now().getEpochSecond() < maxTime) {

               solutionStatus =
personalizeClient.describeSolution(describeSolutionRequest).solution().status();
               System.out.println("Solution status: " + solutionStatus);
```

```
                if (solutionStatus.equals("ACTIVE") || solutionStatus.equals("CREATE
FAILED")) {
                    break;
                }
                try {
                    Thread.sleep(waitInMilliseconds);
                } catch (InterruptedException e) {
                    System.out.println(e.getMessage());
                }
            }

            if (solutionStatus.equals("ACTIVE")) {

                CreateSolutionVersionRequest createSolutionVersionRequest =
CreateSolutionVersionRequest.builder()
                        .solutionArn(solutionArn)
                        .build();

                CreateSolutionVersionResponse createSolutionVersionResponse =
personalizeClient
                        .createSolutionVersion(createSolutionVersionRequest);
                solutionVersionArn =
createSolutionVersionResponse.solutionVersionArn();

                System.out.println("Solution version ARN: " + solutionVersionArn);

                DescribeSolutionVersionRequest describeSolutionVersionRequest =
DescribeSolutionVersionRequest.builder()
                        .solutionVersionArn(solutionVersionArn)
                        .build();

                while (Instant.now().getEpochSecond() < maxTime) {

                    solutionVersionStatus =
personalizeClient.describeSolutionVersion(describeSolutionVersionRequest)
                            .solutionVersion().status();
                    System.out.println("Solution version status: " +
solutionVersionStatus);

                    if (solutionVersionStatus.equals("ACTIVE") ||
solutionVersionStatus.equals("CREATE FAILED")) {
                        break;
                    }
                    try {
```

```
                    Thread.sleep(waitInMilliseconds);
                } catch (InterruptedException e) {
                    System.out.println(e.getMessage());
                }
            }
            return solutionVersionArn;
        }
    } catch (PersonalizeException e) {
        System.err.println(e.awsErrorDetails().errorMessage());
        System.exit(1);
    }
    return "";
}
```

- Para obtener más información sobre la API, consulta CreateSolutionVersionla Referencia AWS SDK for Java 2.x de la API.

`DeleteCampaign`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteCampaign`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public static void deleteSpecificCampaign(PersonalizeClient personalizeClient,
String campaignArn) {
    try {
        DeleteCampaignRequest campaignRequest = DeleteCampaignRequest.builder()
                .campaignArn(campaignArn)
                .build();

        personalizeClient.deleteCampaign(campaignRequest);
        System.out.println("Delete request sent successfully.");
    } catch (PersonalizeException e) {
```

```
            System.err.println("Error deleting campaign: " +
 e.awsErrorDetails().errorMessage());
            throw new RuntimeException(e);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteCampaignla Referencia AWS SDK for Java 2.x de la API.

`DeleteEventTracker`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteEventTracker`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void deleteEventTracker(PersonalizeClient personalizeClient,
String eventTrackerArn) {
       try {
           DeleteEventTrackerRequest deleteEventTrackerRequest =
DeleteEventTrackerRequest.builder()
                   .eventTrackerArn(eventTrackerArn)
                   .build();

           int status =
personalizeClient.deleteEventTracker(deleteEventTrackerRequest).sdkHttpResponse().statusCod

           System.out.println("Status code:" + status);

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta DeleteEventTrackerla Referencia AWS SDK for Java 2.x de la API.

`DeleteSolution`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteSolution`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void deleteGivenSolution(PersonalizeClient personalizeClient,
String solutionArn) {

        try {
            DeleteSolutionRequest solutionRequest = DeleteSolutionRequest.builder()
                    .solutionArn(solutionArn)
                    .build();

            personalizeClient.deleteSolution(solutionRequest);
            System.out.println("Done");

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteSolutionla Referencia AWS SDK for Java 2.x de la API.

`DescribeCampaign`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeCampaign`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void describeSpecificCampaign(PersonalizeClient personalizeClient,
String campaignArn) {

       try {
           DescribeCampaignRequest campaignRequest =
DescribeCampaignRequest.builder()
                   .campaignArn(campaignArn)
                   .build();

           DescribeCampaignResponse campaignResponse =
personalizeClient.describeCampaign(campaignRequest);
           Campaign myCampaign = campaignResponse.campaign();
           System.out.println("The Campaign name is " + myCampaign.name());
           System.out.println("The Campaign status is " + myCampaign.status());

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta DescribeCampaignla Referencia AWS SDK for Java 2.x de la API.

`DescribeRecipe`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeRecipe`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void describeSpecificRecipe(PersonalizeClient personalizeClient,
String recipeArn) {

       try {
           DescribeRecipeRequest recipeRequest = DescribeRecipeRequest.builder()
                   .recipeArn(recipeArn)
                   .build();

           DescribeRecipeResponse recipeResponse =
personalizeClient.describeRecipe(recipeRequest);
           System.out.println("The recipe name is " +
recipeResponse.recipe().name());

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta DescribeRecipela Referencia AWS SDK for Java 2.x de la API.

`DescribeSolution`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeSolution`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void describeSpecificSolution(PersonalizeClient personalizeClient,
String solutionArn) {

       try {
           DescribeSolutionRequest solutionRequest =
DescribeSolutionRequest.builder()
                   .solutionArn(solutionArn)
                   .build();

           DescribeSolutionResponse response =
personalizeClient.describeSolution(solutionRequest);
           System.out.println("The Solution name is " +
response.solution().name());

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta DescribeSolutionla Referencia AWS SDK for Java 2.x de la API.

`ListCampaigns`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListCampaigns`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void listAllCampaigns(PersonalizeClient personalizeClient, String
solutionArn) {

       try {
           ListCampaignsRequest campaignsRequest = ListCampaignsRequest.builder()
                   .maxResults(10)
                   .solutionArn(solutionArn)
                   .build();

           ListCampaignsResponse response =
personalizeClient.listCampaigns(campaignsRequest);
           List<CampaignSummary> campaigns = response.campaigns();
           for (CampaignSummary campaign : campaigns) {
               System.out.println("Campaign name is : " + campaign.name());
               System.out.println("Campaign ARN is : " + campaign.campaignArn());
           }

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta ListCampaignsla Referencia AWS SDK for Java 2.x de la API.

`ListDatasetGroups`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListDatasetGroups`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void listDSGroups(PersonalizeClient personalizeClient) {

       try {
           ListDatasetGroupsRequest groupsRequest =
ListDatasetGroupsRequest.builder()
                   .maxResults(15)
                   .build();

           ListDatasetGroupsResponse groupsResponse =
personalizeClient.listDatasetGroups(groupsRequest);
           List<DatasetGroupSummary> groups = groupsResponse.datasetGroups();
           for (DatasetGroupSummary group : groups) {
               System.out.println("The DataSet name is : " + group.name());
               System.out.println("The DataSet ARN is : " +
group.datasetGroupArn());
           }

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta ListDatasetGroupsla Referencia AWS SDK for Java 2.x de la API.

`ListRecipes`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListRecipes`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void listAllRecipes(PersonalizeClient personalizeClient) {

        try {
            ListRecipesRequest recipesRequest = ListRecipesRequest.builder()
                    .maxResults(15)
                    .build();

            ListRecipesResponse response =
personalizeClient.listRecipes(recipesRequest);
            List<RecipeSummary> recipes = response.recipes();
            for (RecipeSummary recipe : recipes) {
                System.out.println("The recipe ARN is: " + recipe.recipeArn());
                System.out.println("The recipe name is: " + recipe.name());
            }

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta ListRecipesla Referencia AWS SDK for Java 2.x de la API.

`ListSolutions`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListSolutions`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void listAllSolutions(PersonalizeClient personalizeClient, String
datasetGroupArn) {

       try {
           ListSolutionsRequest solutionsRequest = ListSolutionsRequest.builder()
                   .maxResults(10)
                   .datasetGroupArn(datasetGroupArn)
                   .build();

           ListSolutionsResponse response =
personalizeClient.listSolutions(solutionsRequest);
           List<SolutionSummary> solutions = response.solutions();
           for (SolutionSummary solution : solutions) {
               System.out.println("The solution ARN is: " +
solution.solutionArn());
               System.out.println("The solution name is: " + solution.name());
           }

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta ListSolutionsla Referencia AWS SDK for Java 2.x de la API.

`UpdateCampaign`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateCampaign`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String updateCampaign(PersonalizeClient personalizeClient,
           String campaignArn,
           String solutionVersionArn,
           Integer minProvisionedTPS) {

       try {
           // build the updateCampaignRequest
           UpdateCampaignRequest updateCampaignRequest =
UpdateCampaignRequest.builder()
                   .campaignArn(campaignArn)
                   .solutionVersionArn(solutionVersionArn)
                   .minProvisionedTPS(minProvisionedTPS)
                   .build();

           // update the campaign
           personalizeClient.updateCampaign(updateCampaignRequest);

           DescribeCampaignRequest campaignRequest =
DescribeCampaignRequest.builder()
                   .campaignArn(campaignArn)
                   .build();

           DescribeCampaignResponse campaignResponse =
personalizeClient.describeCampaign(campaignRequest);
           Campaign updatedCampaign = campaignResponse.campaign();

           System.out.println("The Campaign status is " +
updatedCampaign.status());
           return updatedCampaign.status();

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
```

```
        return "";
    }
```

- Para obtener más información sobre la API, consulta UpdateCampaignla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de eventos de Amazon Personalize usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante Amazon Personalize Events. AWS SDK for Java 2.x

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`PutEvents`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutEvents`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
        public static int putItems(PersonalizeEventsClient personalizeEventsClient,
```

```
                        String datasetArn,
                        String item1Id,
                        String item1PropertyName,
                        String item1PropertyValue,
                        String item2Id,
                        String item2PropertyName,
                        String item2PropertyValue) {

                int responseCode = 0;
                ArrayList<Item> items = new ArrayList<>();

                try {
                        Item item1 = Item.builder()
                                        .itemId(item1Id)
                                        .properties(String.format("{\"%1$s\": \"%2$s
\"}",
                                                                item1PropertyName,
 item1PropertyValue))
                                        .build();

                        items.add(item1);

                        Item item2 = Item.builder()
                                        .itemId(item2Id)
                                        .properties(String.format("{\"%1$s\": \"%2$s
\"}",
                                                                item2PropertyName,
 item2PropertyValue))
                                        .build();

                        items.add(item2);

                        PutItemsRequest putItemsRequest = PutItemsRequest.builder()
                                        .datasetArn(datasetArn)
                                        .items(items)
                                        .build();

                        responseCode =
 personalizeEventsClient.putItems(putItemsRequest).sdkHttpResponse().statusCode();
                        System.out.println("Response code: " + responseCode);
                        return responseCode;

                } catch (PersonalizeEventsException e) {
                        System.out.println(e.awsErrorDetails().errorMessage());
```

```
                }
                return responseCode;
        }
```

- Para obtener más información sobre la API, consulta PutEventsla Referencia AWS SDK for Java 2.x de la API.

`PutUsers`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutUsers`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
        public static int putUsers(PersonalizeEventsClient personalizeEventsClient,
                        String datasetArn,
                        String user1Id,
                        String user1PropertyName,
                        String user1PropertyValue,
                        String user2Id,
                        String user2PropertyName,
                        String user2PropertyValue) {

                int responseCode = 0;
                ArrayList<User> users = new ArrayList<>();

                try {
                        User user1 = User.builder()
                                        .userId(user1Id)
                                        .properties(String.format("{\"%1$s\": \"%2$s
\"}",
                                                                user1PropertyName,
 user1PropertyValue))
                                        .build();
```

```
                        users.add(user1);

                        User user2 = User.builder()
                                        .userId(user2Id)
                                        .properties(String.format("{\"%1$s\": \"%2$s
\"}",
                                                                  user2PropertyName,
 user2PropertyValue))
                                        .build();

                        users.add(user2);

                        PutUsersRequest putUsersRequest = PutUsersRequest.builder()
                                        .datasetArn(datasetArn)
                                        .users(users)
                                        .build();

                        responseCode =
 personalizeEventsClient.putUsers(putUsersRequest).sdkHttpResponse().statusCode();
                        System.out.println("Response code: " + responseCode);
                        return responseCode;

                } catch (PersonalizeEventsException e) {
                        System.out.println(e.awsErrorDetails().errorMessage());
                }
                return responseCode;
        }
```

- Para obtener más información sobre la API, consulta PutUsersla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon Personalize Runtime usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante Amazon Personalize Runtime. AWS SDK for Java 2.x

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`GetPersonalizedRanking`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetPersonalizedRanking`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static List<PredictedItem> getRankedRecs(PersonalizeRuntimeClient
personalizeRuntimeClient,
           String campaignArn,
           String userId,
           ArrayList<String> items) {

       try {
           GetPersonalizedRankingRequest rankingRecommendationsRequest =
GetPersonalizedRankingRequest.builder()
                   .campaignArn(campaignArn)
                   .userId(userId)
                   .inputList(items)
                   .build();

           GetPersonalizedRankingResponse recommendationsResponse =
personalizeRuntimeClient
                   .getPersonalizedRanking(rankingRecommendationsRequest);
           List<PredictedItem> rankedItems =
recommendationsResponse.personalizedRanking();
           int rank = 1;
           for (PredictedItem item : rankedItems) {
```

```
                System.out.println("Item ranked at position " + rank + " details");
                System.out.println("Item Id is : " + item.itemId());
                System.out.println("Item score is : " + item.score());
                System.out.println("-----------------------------------------");
                rank++;
            }
            return rankedItems;
        } catch (PersonalizeRuntimeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }
```

- Para obtener más información sobre la API, consulta GetPersonalizedRankingla Referencia AWS SDK for Java 2.x de la API.

`GetRecommendations`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetRecommendations`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Obtener una lista de artículos recomendados.

```
    public static void getRecs(PersonalizeRuntimeClient personalizeRuntimeClient,
String campaignArn, String userId) {

        try {
            GetRecommendationsRequest recommendationsRequest =
GetRecommendationsRequest.builder()
                    .campaignArn(campaignArn)
                    .numResults(20)
                    .userId(userId)
                    .build();
```

```
            GetRecommendationsResponse recommendationsResponse =
personalizeRuntimeClient
                    .getRecommendations(recommendationsRequest);
            List<PredictedItem> items = recommendationsResponse.itemList();
            for (PredictedItem item : items) {
                System.out.println("Item Id is : " + item.itemId());
                System.out.println("Item score is : " + item.score());
            }

        } catch (AwsServiceException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Obtenga una lista de recomendaciones de un recomendador creado en un grupo de conjuntos de datos de dominio.

```
    public static void getRecs(PersonalizeRuntimeClient personalizeRuntimeClient,
String recommenderArn,
            String userId) {

        try {
            GetRecommendationsRequest recommendationsRequest =
GetRecommendationsRequest.builder()
                    .recommenderArn(recommenderArn)
                    .numResults(20)
                    .userId(userId)
                    .build();

            GetRecommendationsResponse recommendationsResponse =
personalizeRuntimeClient
                    .getRecommendations(recommendationsRequest);
            List<PredictedItem> items = recommendationsResponse.itemList();

            for (PredictedItem item : items) {
                System.out.println("Item Id is : " + item.itemId());
                System.out.println("Item score is : " + item.score());
            }
        } catch (AwsServiceException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
    }
```

Use un filtro cuando solicite recomendaciones.

```
    public static void getFilteredRecs(PersonalizeRuntimeClient
personalizeRuntimeClient,
            String campaignArn,
            String userId,
            String filterArn,
            String parameter1Name,
            String parameter1Value1,
            String parameter1Value2,
            String parameter2Name,
            String parameter2Value) {

        try {

            Map<String, String> filterValues = new HashMap<>();

            filterValues.put(parameter1Name, String.format("\"%1$s\",\"%2$s\"",
                    parameter1Value1, parameter1Value2));
            filterValues.put(parameter2Name, String.format("\"%1$s\"",
                    parameter2Value));

            GetRecommendationsRequest recommendationsRequest =
GetRecommendationsRequest.builder()
                    .campaignArn(campaignArn)
                    .numResults(20)
                    .userId(userId)
                    .filterArn(filterArn)
                    .filterValues(filterValues)
                    .build();

            GetRecommendationsResponse recommendationsResponse =
personalizeRuntimeClient
                    .getRecommendations(recommendationsRequest);
            List<PredictedItem> items = recommendationsResponse.itemList();

            for (PredictedItem item : items) {
                System.out.println("Item Id is : " + item.itemId());
```

```
                System.out.println("Item score is : " + item.score());
            }
        } catch (PersonalizeRuntimeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta GetRecommendationsla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon Pinpoint usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Amazon Pinpoint.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`CreateApp`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateApp`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.CreateAppRequest;
import software.amazon.awssdk.services.pinpoint.model.CreateAppResponse;
import software.amazon.awssdk.services.pinpoint.model.CreateApplicationRequest;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateApp {
    public static void main(String[] args) {
        final String usage = """

                 Usage:  <appName>

                 Where:
                  appName - The name of the application to create.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }
        String appName = args[0];
        System.out.println("Creating an application with name: " + appName);

        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String appID = createApplication(pinpoint, appName);
        System.out.println("App ID is: " + appID);
        pinpoint.close();
    }
```

```
    public static String createApplication(PinpointClient pinpoint, String appName)
 {
        try {
            CreateApplicationRequest appRequest = CreateApplicationRequest.builder()
                    .name(appName)
                    .build();

            CreateAppRequest request = CreateAppRequest.builder()
                    .createApplicationRequest(appRequest)
                    .build();

            CreateAppResponse result = pinpoint.createApp(request);
            return result.applicationResponse().id();

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulta CreateAppla Referencia AWS SDK for Java 2.x de la API.

`CreateCampaign`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateCampaign`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Crear una campaña.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
```

```
import software.amazon.awssdk.services.pinpoint.model.CampaignResponse;
import software.amazon.awssdk.services.pinpoint.model.Message;
import software.amazon.awssdk.services.pinpoint.model.Schedule;
import software.amazon.awssdk.services.pinpoint.model.Action;
import software.amazon.awssdk.services.pinpoint.model.MessageConfiguration;
import software.amazon.awssdk.services.pinpoint.model.WriteCampaignRequest;
import software.amazon.awssdk.services.pinpoint.model.CreateCampaignResponse;
import software.amazon.awssdk.services.pinpoint.model.CreateCampaignRequest;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateCampaign {
    public static void main(String[] args) {

        final String usage = """

                Usage:   <appId> <segmentId>

                Where:
                  appId - The ID of the application to create the campaign in.
                  segmentId - The ID of the segment to create the campaign from.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        String segmentId = args[1];
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        createPinCampaign(pinpoint, appId, segmentId);
        pinpoint.close();
    }
```

```
   public static void createPinCampaign(PinpointClient pinpoint, String appId,
String segmentId) {
       CampaignResponse result = createCampaign(pinpoint, appId, segmentId);
       System.out.println("Campaign " + result.name() + " created.");
       System.out.println(result.description());
   }

   public static CampaignResponse createCampaign(PinpointClient client, String
appID, String segmentID) {

       try {
           Schedule schedule = Schedule.builder()
                   .startTime("IMMEDIATE")
                   .build();

           Message defaultMessage = Message.builder()
                   .action(Action.OPEN_APP)
                   .body("My message body.")
                   .title("My message title.")
                   .build();

           MessageConfiguration messageConfiguration =
MessageConfiguration.builder()
                   .defaultMessage(defaultMessage)
                   .build();

           WriteCampaignRequest request = WriteCampaignRequest.builder()
                   .description("My description")
                   .schedule(schedule)
                   .name("MyCampaign")
                   .segmentId(segmentID)
                   .messageConfiguration(messageConfiguration)
                   .build();

           CreateCampaignResponse result =
client.createCampaign(CreateCampaignRequest.builder()
                   .applicationId(appID)
                   .writeCampaignRequest(request).build());

           System.out.println("Campaign ID: " + result.campaignResponse().id());
           return result.campaignResponse();

       } catch (PinpointException e) {
```

```
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return null;
    }
}
```

- Para obtener más información sobre la API, consulta CreateCampaignla Referencia AWS SDK for Java 2.x de la API.

`CreateExportJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateExportJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Exportar un punto de conexión.

```
import software.amazon.awssdk.core.ResponseBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.ExportJobRequest;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import software.amazon.awssdk.services.pinpoint.model.CreateExportJobRequest;
import software.amazon.awssdk.services.pinpoint.model.CreateExportJobResponse;
import software.amazon.awssdk.services.pinpoint.model.GetExportJobResponse;
import software.amazon.awssdk.services.pinpoint.model.GetExportJobRequest;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Request;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Response;
import software.amazon.awssdk.services.s3.model.S3Object;
import software.amazon.awssdk.services.s3.model.GetObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;
```

```
import java.io.File;
import java.io.FileOutputStream;
import java.io.IOException;
import java.io.OutputStream;
import java.text.SimpleDateFormat;
import java.util.ArrayList;
import java.util.Date;
import java.util.List;
import java.util.concurrent.TimeUnit;
import java.util.stream.Collectors;

/**
 * To run this code example, you need to create an AWS Identity and Access
 * Management (IAM) role with the correct policy as described in this
 * documentation:
 * https://docs.aws.amazon.com/pinpoint/latest/developerguide/audience-data-
export.html
 *
 * Also, set up your development environment, including your credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class ExportEndpoints {
    public static void main(String[] args) {
        final String usage = """

                This program performs the following steps:

                1. Exports the endpoints to an Amazon S3 bucket.
                2. Downloads the exported endpoints files from Amazon S3.
                3. Parses the endpoints files to obtain the endpoint IDs and prints
 them.
                Usage: ExportEndpoints <applicationId> <s3BucketName>
 <iamExportRoleArn> <path>

                Where:
                  applicationId - The ID of the Amazon Pinpoint application that has
 the endpoint.
                  s3BucketName - The name of the Amazon S3 bucket to export the JSON
 file to.\s
```

```
                 iamExportRoleArn - The ARN of an IAM role that grants Amazon
Pinpoint write permissions to the S3 bucket.  path - The path where the files
downloaded from the Amazon S3 bucket are written (for example, C:/AWS/).
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String applicationId = args[0];
        String s3BucketName = args[1];
        String iamExportRoleArn = args[2];
        String path = args[3];
        System.out.println("Deleting an application with ID: " + applicationId);

        Region region = Region.US_EAST_1;
        PinpointClient pinpoint = PinpointClient.builder()
                .region(region)
                .build();

        S3Client s3Client = S3Client.builder()
                .region(region)
                .build();

        exportAllEndpoints(pinpoint, s3Client, applicationId, s3BucketName, path,
iamExportRoleArn);
        pinpoint.close();
        s3Client.close();
    }

    public static void exportAllEndpoints(PinpointClient pinpoint,
            S3Client s3Client,
            String applicationId,
            String s3BucketName,
            String path,
            String iamExportRoleArn) {

        try {
            List<String> objectKeys = exportEndpointsToS3(pinpoint, s3Client,
s3BucketName, iamExportRoleArn,
                    applicationId);
            List<String> endpointFileKeys = objectKeys.stream().filter(o ->
o.endsWith(".gz"))
```

```
                    .collect(Collectors.toList());
            downloadFromS3(s3Client, path, s3BucketName, endpointFileKeys);

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static List<String> exportEndpointsToS3(PinpointClient pinpoint, S3Client
 s3Client, String s3BucketName,
            String iamExportRoleArn, String applicationId) {

        SimpleDateFormat dateFormat = new SimpleDateFormat("yyyy-MM-dd-
HH_mm:ss.SSS_z");
        String endpointsKeyPrefix = "exports/" + applicationId + "_" +
 dateFormat.format(new Date());
        String s3UrlPrefix = "s3://" + s3BucketName + "/" + endpointsKeyPrefix +
 "/";
        List<String> objectKeys = new ArrayList<>();
        String key;

        try {
            // Defines the export job that Amazon Pinpoint runs.
            ExportJobRequest jobRequest = ExportJobRequest.builder()
                    .roleArn(iamExportRoleArn)
                    .s3UrlPrefix(s3UrlPrefix)
                    .build();

            CreateExportJobRequest exportJobRequest =
 CreateExportJobRequest.builder()
                    .applicationId(applicationId)
                    .exportJobRequest(jobRequest)
                    .build();

            System.out.format("Exporting endpoints from Amazon Pinpoint application
 %s to Amazon S3 " +
                    "bucket %s . . .\n", applicationId, s3BucketName);

            CreateExportJobResponse exportResult =
 pinpoint.createExportJob(exportJobRequest);
            String jobId = exportResult.exportJobResponse().id();
            System.out.println(jobId);
            printExportJobStatus(pinpoint, applicationId, jobId);
```

```
            ListObjectsV2Request v2Request = ListObjectsV2Request.builder()
                    .bucket(s3BucketName)
                    .prefix(endpointsKeyPrefix)
                    .build();

            // Create a list of object keys.
            ListObjectsV2Response v2Response = s3Client.listObjectsV2(v2Request);
            List<S3Object> objects = v2Response.contents();
            for (S3Object object : objects) {
                key = object.key();
                objectKeys.add(key);
            }

            return objectKeys;

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    private static void printExportJobStatus(PinpointClient pinpointClient,
            String applicationId,
            String jobId) {

        GetExportJobResponse getExportJobResult;
        String status;

        try {
            // Checks the job status until the job completes or fails.
            GetExportJobRequest exportJobRequest = GetExportJobRequest.builder()
                    .jobId(jobId)
                    .applicationId(applicationId)
                    .build();

            do {
                getExportJobResult = pinpointClient.getExportJob(exportJobRequest);
                status =
getExportJobResult.exportJobResponse().jobStatus().toString().toUpperCase();
                System.out.format("Export job %s . . .\n", status);
                TimeUnit.SECONDS.sleep(3);
```

```
            } while (!status.equals("COMPLETED") && !status.equals("FAILED"));

            if (status.equals("COMPLETED")) {
                System.out.println("Finished exporting endpoints.");
            } else {
                System.err.println("Failed to export endpoints.");
                System.exit(1);
            }

        } catch (PinpointException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    // Download files from an Amazon S3 bucket and write them to the path location.
    public static void downloadFromS3(S3Client s3Client, String path, String
s3BucketName, List<String> objectKeys) {

        String newPath;
        try {
            for (String key : objectKeys) {
                GetObjectRequest objectRequest = GetObjectRequest.builder()
                        .bucket(s3BucketName)
                        .key(key)
                        .build();

                ResponseBytes<GetObjectResponse> objectBytes =
s3Client.getObjectAsBytes(objectRequest);
                byte[] data = objectBytes.asByteArray();

                // Write the data to a local file.
                String fileSuffix = new
SimpleDateFormat("yyyyMMddHHmmss").format(new Date());
                newPath = path + fileSuffix + ".gz";
                File myFile = new File(newPath);
                OutputStream os = new FileOutputStream(myFile);
                os.write(data);
            }
            System.out.println("Download finished.");

        } catch (S3Exception | NullPointerException | IOException e) {
            System.err.println(e.getMessage());
            System.exit(1);
```

```
        }
    }
}
```

- Para obtener más información sobre la API, consulta CreateExportJobla Referencia AWS SDK for Java 2.x de la API.

`CreateImportJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateImportJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Importar un segmento.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.CreateImportJobRequest;
import software.amazon.awssdk.services.pinpoint.model.ImportJobResponse;
import software.amazon.awssdk.services.pinpoint.model.ImportJobRequest;
import software.amazon.awssdk.services.pinpoint.model.Format;
import software.amazon.awssdk.services.pinpoint.model.CreateImportJobResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ImportSegment {
    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:   <appId> <bucket> <key> <roleArn>\s

                Where:
                  appId - The application ID to create a segment for.
                  bucket - The name of the Amazon S3 bucket that contains the
 segment definitons.
                  key - The key of the S3 object.
                  roleArn - ARN of the role that allows Amazon Pinpoint to
 access S3. You need to set trust management for this to work. See https://
docs.aws.amazon.com/IAM/latest/UserGuide/reference_policies_elements_principal.html
                  """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        String bucket = args[1];
        String key = args[2];
        String roleArn = args[3];

        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        ImportJobResponse response = createImportSegment(pinpoint, appId, bucket,
 key, roleArn);
        System.out.println("Import job for " + bucket + " submitted.");
        System.out.println("See application " + response.applicationId() + " for
 import job status.");
        System.out.println("See application " + response.jobStatus() + " for import
 job status.");
        pinpoint.close();
    }

    public static ImportJobResponse createImportSegment(PinpointClient client,
            String appId,
            String bucket,
            String key,
            String roleArn) {

        try {
```

```
            ImportJobRequest importRequest = ImportJobRequest.builder()
                    .defineSegment(true)
                    .registerEndpoints(true)
                    .roleArn(roleArn)
                    .format(Format.JSON)
                    .s3Url("s3://" + bucket + "/" + key)
                    .build();

            CreateImportJobRequest jobRequest = CreateImportJobRequest.builder()
                    .importJobRequest(importRequest)
                    .applicationId(appId)
                    .build();

            CreateImportJobResponse jobResponse =
 client.createImportJob(jobRequest);
            return jobResponse.importJobResponse();

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }
}
```

- Para obtener más información sobre la API, consulta CreateImportJobla Referencia AWS SDK for Java 2.x de la API.

`CreateSegment`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateSegment`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.AttributeDimension;
import software.amazon.awssdk.services.pinpoint.model.SegmentResponse;
import software.amazon.awssdk.services.pinpoint.model.AttributeType;
import software.amazon.awssdk.services.pinpoint.model.RecencyDimension;
import software.amazon.awssdk.services.pinpoint.model.SegmentBehaviors;
import software.amazon.awssdk.services.pinpoint.model.SegmentDemographics;
import software.amazon.awssdk.services.pinpoint.model.SegmentLocation;
import software.amazon.awssdk.services.pinpoint.model.SegmentDimensions;
import software.amazon.awssdk.services.pinpoint.model.WriteSegmentRequest;
import software.amazon.awssdk.services.pinpoint.model.CreateSegmentRequest;
import software.amazon.awssdk.services.pinpoint.model.CreateSegmentResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import java.util.HashMap;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateSegment {
        public static void main(String[] args) {
                final String usage = """

                                Usage:   <appId>

                                Where:
                                  appId - The application ID to create a segment
 for.

                                """;

                if (args.length != 1) {
                        System.out.println(usage);
                        System.exit(1);
                }

                String appId = args[0];
```

```
                PinpointClient pinpoint = PinpointClient.builder()
                                .region(Region.US_EAST_1)
                                .build();

                SegmentResponse result = createSegment(pinpoint, appId);
                System.out.println("Segment " + result.name() + " created.");
                System.out.println(result.segmentType());
                pinpoint.close();
        }

        public static SegmentResponse createSegment(PinpointClient client, String
appId) {
                try {
                        Map<String, AttributeDimension> segmentAttributes = new
HashMap<>();
                        segmentAttributes.put("Team", AttributeDimension.builder()
                                        .attributeType(AttributeType.INCLUSIVE)
                                        .values("Lakers")
                                        .build());

                        RecencyDimension recencyDimension =
RecencyDimension.builder()
                                        .duration("DAY_30")
                                        .recencyType("ACTIVE")
                                        .build();

                        SegmentBehaviors segmentBehaviors =
SegmentBehaviors.builder()
                                        .recency(recencyDimension)
                                        .build();

                        SegmentDemographics segmentDemographics =
SegmentDemographics
                                        .builder()
                                        .build();

                        SegmentLocation segmentLocation = SegmentLocation
                                        .builder()
                                        .build();

                        SegmentDimensions dimensions = SegmentDimensions
                                        .builder()
                                        .attributes(segmentAttributes)
                                        .behavior(segmentBehaviors)
```

```
                                        .demographic(segmentDemographics)
                                        .location(segmentLocation)
                                        .build();

                        WriteSegmentRequest writeSegmentRequest =
 WriteSegmentRequest.builder()
                                        .name("MySegment")
                                        .dimensions(dimensions)
                                        .build();

                        CreateSegmentRequest createSegmentRequest =
 CreateSegmentRequest.builder()
                                        .applicationId(appId)
                                        .writeSegmentRequest(writeSegmentRequest)
                                        .build();

                        CreateSegmentResponse createSegmentResult =
 client.createSegment(createSegmentRequest);
                        System.out.println("Segment ID: " +
 createSegmentResult.segmentResponse().id());
                        System.out.println("Done");
                        return createSegmentResult.segmentResponse();

                } catch (PinpointException e) {
                        System.err.println(e.awsErrorDetails().errorMessage());
                        System.exit(1);
                }
                return null;
        }
}
```

- Para obtener más información sobre la API, consulta CreateSegmentla Referencia AWS SDK for Java 2.x de la API.

`DeleteApp`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteApp`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Elimine una aplicación.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.DeleteAppRequest;
import software.amazon.awssdk.services.pinpoint.model.DeleteAppResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteApp {
    public static void main(String[] args) {
        final String usage = """

                Usage:  <appId>

                Where:
                 appId - The ID of the application to delete.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        System.out.println("Deleting an application with ID: " + appId);
        PinpointClient pinpoint = PinpointClient.builder()
```

```
                .region(Region.US_EAST_1)
                .build();

        deletePinApp(pinpoint, appId);
        System.out.println("Done");
        pinpoint.close();
    }

    public static void deletePinApp(PinpointClient pinpoint, String appId) {
        try {
            DeleteAppRequest appRequest = DeleteAppRequest.builder()
                    .applicationId(appId)
                    .build();

            DeleteAppResponse result = pinpoint.deleteApp(appRequest);
            String appName = result.applicationResponse().name();
            System.out.println("Application " + appName + " has been deleted.");

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteAppla Referencia AWS SDK for Java 2.x de la API.

`DeleteEndpoint`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteEndpoint`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Eliminar un punto de conexión.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.DeleteEndpointRequest;
import software.amazon.awssdk.services.pinpoint.model.DeleteEndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteEndpoint {
    public static void main(String[] args) {
        final String usage = """

                Usage:   <appName> <endpointId >

                Where:
                  appId - The id of the application to delete.
                  endpointId - The id of the endpoint to delete.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        String endpointId = args[1];
        System.out.println("Deleting an endpoint with id: " + endpointId);
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        deletePinEncpoint(pinpoint, appId, endpointId);
        pinpoint.close();
    }

    public static void deletePinEncpoint(PinpointClient pinpoint, String appId,
 String endpointId) {
```

```
        try {
            DeleteEndpointRequest appRequest = DeleteEndpointRequest.builder()
                    .applicationId(appId)
                    .endpointId(endpointId)
                    .build();

            DeleteEndpointResponse result = pinpoint.deleteEndpoint(appRequest);
            String id = result.endpointResponse().id();
            System.out.println("The deleted endpoint id  " + id);

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }
}
```

- Para obtener más información sobre la API, consulta DeleteEndpointla Referencia AWS SDK for Java 2.x de la API.

`GetEndpoint`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetEndpoint`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import com.google.gson.FieldNamingPolicy;
import com.google.gson.Gson;
import com.google.gson.GsonBuilder;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.EndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.GetEndpointResponse;
```

```
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import software.amazon.awssdk.services.pinpoint.model.GetEndpointRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class LookUpEndpoint {
    public static void main(String[] args) {
        final String usage = """

                Usage:   <appId> <endpoint>

                Where:
                  appId - The ID of the application to delete.
                  endpoint - The ID of the endpoint.\s
                  """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        String endpoint = args[1];
        System.out.println("Looking up an endpoint point with ID: " + endpoint);
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        lookupPinpointEndpoint(pinpoint, appId, endpoint);
        pinpoint.close();
    }

    public static void lookupPinpointEndpoint(PinpointClient pinpoint, String appId,
 String endpoint) {
        try {
            GetEndpointRequest appRequest = GetEndpointRequest.builder()
                    .applicationId(appId)
                    .endpointId(endpoint)
```

```
                    .build();

            GetEndpointResponse result = pinpoint.getEndpoint(appRequest);
            EndpointResponse endResponse = result.endpointResponse();

            // Uses the Google Gson library to pretty print the endpoint JSON.
            Gson gson = new GsonBuilder()
                    .setFieldNamingPolicy(FieldNamingPolicy.UPPER_CAMEL_CASE)
                    .setPrettyPrinting()
                    .create();

            String endpointJson = gson.toJson(endResponse);
            System.out.println(endpointJson);

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }
}
```

- Para obtener más información sobre la API, consulta GetEndpointla Referencia AWS SDK for Java 2.x de la API.

`GetSegments`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetSegments`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Enumerar segmentos.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
```

```
import software.amazon.awssdk.services.pinpoint.model.GetSegmentsRequest;
import software.amazon.awssdk.services.pinpoint.model.GetSegmentsResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import software.amazon.awssdk.services.pinpoint.model.SegmentResponse;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListSegments {
    public static void main(String[] args) {
        final String usage = """

                Usage:   <appId>

                Where:
                  appId - The ID of the application that contains a segment.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listSegs(pinpoint, appId);
        pinpoint.close();
    }

    public static void listSegs(PinpointClient pinpoint, String appId) {
        try {
            GetSegmentsRequest request = GetSegmentsRequest.builder()
                    .applicationId(appId)
                    .build();
```

```
            GetSegmentsResponse response = pinpoint.getSegments(request);
            List<SegmentResponse> segments = response.segmentsResponse().item();
            for (SegmentResponse segment : segments) {
                System.out
                        .println("Segement " + segment.id() + " " + segment.name() +
 " " + segment.lastModifiedDate());
            }

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta GetSegmentsla Referencia AWS SDK for Java 2.x de la API.

`GetSmsChannel`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetSmsChannel`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.SMSChannelResponse;
import software.amazon.awssdk.services.pinpoint.model.GetSmsChannelRequest;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import software.amazon.awssdk.services.pinpoint.model.SMSChannelRequest;
import software.amazon.awssdk.services.pinpoint.model.UpdateSmsChannelRequest;
import software.amazon.awssdk.services.pinpoint.model.UpdateSmsChannelResponse;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class UpdateChannel {
    public static void main(String[] args) {
        final String usage = """

                Usage: CreateChannel <appId>

                Where:
                  appId - The name of the application whose channel is updated.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        SMSChannelResponse getResponse = getSMSChannel(pinpoint, appId);
        toggleSmsChannel(pinpoint, appId, getResponse);
        pinpoint.close();
    }

    private static SMSChannelResponse getSMSChannel(PinpointClient client, String
 appId) {
        try {
            GetSmsChannelRequest request = GetSmsChannelRequest.builder()
                    .applicationId(appId)
                    .build();

            SMSChannelResponse response =
 client.getSmsChannel(request).smsChannelResponse();
            System.out.println("Channel state is " + response.enabled());
```

```
            return response;

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    private static void toggleSmsChannel(PinpointClient client, String appId,
 SMSChannelResponse getResponse) {
        boolean enabled = !getResponse.enabled();
        try {
            SMSChannelRequest request = SMSChannelRequest.builder()
                    .enabled(enabled)
                    .build();

            UpdateSmsChannelRequest updateRequest =
 UpdateSmsChannelRequest.builder()
                    .smsChannelRequest(request)
                    .applicationId(appId)
                    .build();

            UpdateSmsChannelResponse result =
 client.updateSmsChannel(updateRequest);
            System.out.println("Channel state: " +
 result.smsChannelResponse().enabled());

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta GetSmsChannella Referencia AWS SDK for Java 2.x de la API.

`GetUserEndpoints`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetUserEndpoints`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.EndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.GetUserEndpointsRequest;
import software.amazon.awssdk.services.pinpoint.model.GetUserEndpointsResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListEndpointIds {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <applicationId> <userId>

                Where:
                   applicationId - The ID of the Amazon Pinpoint application that
 has the endpoint.
                   userId - The user id applicable to the endpoints""";

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String applicationId = args[0];
        String userId = args[1];
```

```
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listAllEndpoints(pinpoint, applicationId, userId);
        pinpoint.close();
    }

    public static void listAllEndpoints(PinpointClient pinpoint,
            String applicationId,
            String userId) {

        try {
            GetUserEndpointsRequest endpointsRequest =
 GetUserEndpointsRequest.builder()
                    .userId(userId)
                    .applicationId(applicationId)
                    .build();

            GetUserEndpointsResponse response =
 pinpoint.getUserEndpoints(endpointsRequest);
            List<EndpointResponse> endpoints = response.endpointsResponse().item();

            // Display the results.
            for (EndpointResponse endpoint : endpoints) {
                System.out.println("The channel type is: " +
 endpoint.channelType());
                System.out.println("The address is  " + endpoint.address());
            }

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta GetUserEndpointsla Referencia AWS SDK for Java 2.x de la API.

`SendMessages`

En el siguiente ejemplo de código, se muestra cómo utilizar `SendMessages`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Enviar un mensaje de correo electrónico.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.AddressConfiguration;
import software.amazon.awssdk.services.pinpoint.model.ChannelType;
import software.amazon.awssdk.services.pinpoint.model.SimpleEmailPart;
import software.amazon.awssdk.services.pinpoint.model.SimpleEmail;
import software.amazon.awssdk.services.pinpoint.model.EmailMessage;
import software.amazon.awssdk.services.pinpoint.model.DirectMessageConfiguration;
import software.amazon.awssdk.services.pinpoint.model.MessageRequest;
import software.amazon.awssdk.services.pinpoint.model.SendMessagesRequest;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import software.amazon.awssdk.services.pinpointemail.PinpointEmailClient;
import software.amazon.awssdk.services.pinpointemail.model.Body;
import software.amazon.awssdk.services.pinpointemail.model.Content;
import software.amazon.awssdk.services.pinpointemail.model.Destination;
import software.amazon.awssdk.services.pinpointemail.model.EmailContent;
import software.amazon.awssdk.services.pinpointemail.model.Message;
import software.amazon.awssdk.services.pinpointemail.model.SendEmailRequest;

import java.util.HashMap;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class SendEmailMessage {

       // The character encoding the you want to use for the subject line and
       // message body of the email.
       public static String charset = "UTF-8";

   // The body of the email for recipients whose email clients support HTML
 content.
   static final String body = """
       Amazon Pinpoint test (AWS SDK for Java 2.x)

       This email was sent through the Amazon Pinpoint Email API using the AWS SDK
 for Java 2.x

       """;

       public static void main(String[] args) {
              final String usage = """

                                Usage:    <subject> <appId> <senderAddress>
 <toAddress>

           Where:
              subject - The email subject to use.
              senderAddress - The from address. This address has to be verified in
 Amazon Pinpoint in the region you're using to send email\s
              toAddress - The to address. This address has to be verified in Amazon
 Pinpoint in the region you're using to send email\s
           """;

       if (args.length != 3) {
           System.out.println(usage);
           System.exit(1);
       }

       String subject = args[0];
       String senderAddress = args[1];
       String toAddress = args[2];
       System.out.println("Sending a message");
       PinpointEmailClient pinpoint = PinpointEmailClient.builder()
           .region(Region.US_EAST_1)
           .build();
```

```
        sendEmail(pinpoint, subject, senderAddress, toAddress);
        System.out.println("Email was sent");
        pinpoint.close();
    }

    public static void sendEmail(PinpointEmailClient pinpointEmailClient, String
 subject, String senderAddress, String toAddress) {
        try {
            Content content = Content.builder()
                .data(body)
                .build();

            Body messageBody = Body.builder()
                .text(content)
                .build();

            Message message = Message.builder()
                .body(messageBody)
                .subject(Content.builder().data(subject).build())
                .build();

            Destination destination = Destination.builder()
                .toAddresses(toAddress)
                .build();

            EmailContent emailContent = EmailContent.builder()
                .simple(message)
                .build();

            SendEmailRequest sendEmailRequest = SendEmailRequest.builder()
                .fromEmailAddress(senderAddress)
                .destination(destination)
                .content(emailContent)
                .build();

            pinpointEmailClient.sendEmail(sendEmailRequest);
            System.out.println("Message Sent");

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Envíe un mensaje de correo electrónico con valores de CC.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import  software.amazon.awssdk.services.pinpointemail.PinpointEmailClient;
import software.amazon.awssdk.services.pinpointemail.model.Body;
import software.amazon.awssdk.services.pinpointemail.model.Content;
import software.amazon.awssdk.services.pinpointemail.model.Destination;
import software.amazon.awssdk.services.pinpointemail.model.EmailContent;
import software.amazon.awssdk.services.pinpointemail.model.Message;
import software.amazon.awssdk.services.pinpointemail.model.SendEmailRequest;
import java.util.ArrayList;

/**
 * Before running this Java V2 code example, set up your development environment,
 including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendEmailMessageCC {

    // The body of the email.
    static final String body = """
        Amazon Pinpoint test (AWS SDK for Java 2.x)

        This email was sent through the Amazon Pinpoint Email API using the AWS SDK
 for Java 2.x

        """;
    public static void main(String[] args) {
        final String usage = """

            Usage:    <subject> <senderAddress> <toAddress> <ccAddress>

            Where:
               subject - The email subject to use.
               senderAddress - The from address. This address has to be verified in
 Amazon Pinpoint in the region you're using to send email\s
```

```
                toAddress - The to address. This address has to be verified in Amazon
Pinpoint in the region you're using to send email\s
                ccAddress - The CC address.
            """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String subject = args[0];
        String senderAddress = args[1];
        String toAddress = args[2];
        String ccAddress = args[3];

        System.out.println("Sending a message");
        PinpointEmailClient pinpoint = PinpointEmailClient.builder()
            .region(Region.US_EAST_1)
            .build();

        ArrayList<String> ccList = new ArrayList<>();
        ccList.add(ccAddress);
        sendEmail(pinpoint, subject, senderAddress, toAddress, ccList);
        pinpoint.close();
    }

    public static void sendEmail(PinpointEmailClient pinpointEmailClient, String
subject, String senderAddress, String toAddress, ArrayList<String> ccAddresses) {
        try {
            Content content = Content.builder()
                .data(body)
                .build();

            Body messageBody = Body.builder()
                .text(content)
                .build();

            Message message = Message.builder()
                .body(messageBody)
                .subject(Content.builder().data(subject).build())
                .build();

            Destination destination = Destination.builder()
                .toAddresses(toAddress)
```

```
                .ccAddresses(ccAddresses)
                .build();

            EmailContent emailContent = EmailContent.builder()
                .simple(message)
                .build();

            SendEmailRequest sendEmailRequest = SendEmailRequest.builder()
                .fromEmailAddress(senderAddress)
                .destination(destination)
                .content(emailContent)
                .build();

            pinpointEmailClient.sendEmail(sendEmailRequest);
            System.out.println("Message Sent");

        } catch (PinpointException e) {
            // Handle exception
            e.printStackTrace();
        }
    }
}
```

Enviar un mensaje SMS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.DirectMessageConfiguration;
import software.amazon.awssdk.services.pinpoint.model.SMSMessage;
import software.amazon.awssdk.services.pinpoint.model.AddressConfiguration;
import software.amazon.awssdk.services.pinpoint.model.ChannelType;
import software.amazon.awssdk.services.pinpoint.model.MessageRequest;
import software.amazon.awssdk.services.pinpoint.model.SendMessagesRequest;
import software.amazon.awssdk.services.pinpoint.model.SendMessagesResponse;
import software.amazon.awssdk.services.pinpoint.model.MessageResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import java.util.HashMap;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
```

```
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendMessage {

        // The type of SMS message that you want to send. If you plan to send
        // time-sensitive content, specify TRANSACTIONAL. If you plan to send
        // marketing-related content, specify PROMOTIONAL.
        public static String messageType = "TRANSACTIONAL";

        // The registered keyword associated with the originating short code.
        public static String registeredKeyword = "myKeyword";

        // The sender ID to use when sending the message. Support for sender ID
        // varies by country or region. For more information, see
        // https://docs.aws.amazon.com/pinpoint/latest/userguide/channels-sms-
countries.html
        public static String senderId = "MySenderID";

        public static void main(String[] args) {
                final String usage = """

                                Usage:   <message> <appId> <originationNumber>
 <destinationNumber>\s

                                Where:
                                  message - The body of the message to send.
                                  appId - The Amazon Pinpoint project/application ID
 to use when you send this message.
                                  originationNumber - The phone number or short code
 that you specify has to be associated with your Amazon Pinpoint account. For best
 results, specify long codes in E.164 format (for example, +1-555-555-5654).
                                  destinationNumber - The recipient's phone number.
 For best results, you should specify the phone number in E.164 format (for example,
 +1-555-555-5654).\s
                                  """;

                if (args.length != 4) {
                        System.out.println(usage);
                        System.exit(1);
                }
```

```
                String message = args[0];
                String appId = args[1];
                String originationNumber = args[2];
                String destinationNumber = args[3];
                System.out.println("Sending a message");
                PinpointClient pinpoint = PinpointClient.builder()
                                .region(Region.US_EAST_1)
                                .build();

                sendSMSMessage(pinpoint, message, appId, originationNumber,
destinationNumber);
                pinpoint.close();
        }

        public static void sendSMSMessage(PinpointClient pinpoint, String message,
String appId,
                        String originationNumber,
                        String destinationNumber) {
                try {
                        Map<String, AddressConfiguration> addressMap = new
HashMap<String, AddressConfiguration>();
                        AddressConfiguration addConfig =
AddressConfiguration.builder()
                                        .channelType(ChannelType.SMS)
                                        .build();

                        addressMap.put(destinationNumber, addConfig);
                        SMSMessage smsMessage = SMSMessage.builder()
                                        .body(message)
                                        .messageType(messageType)
                                        .originationNumber(originationNumber)
                                        .senderId(senderId)
                                        .keyword(registeredKeyword)
                                        .build();

                        // Create a DirectMessageConfiguration object.
                        DirectMessageConfiguration direct =
DirectMessageConfiguration.builder()
                                        .smsMessage(smsMessage)
                                        .build();

                        MessageRequest msgReq = MessageRequest.builder()
                                        .addresses(addressMap)
                                        .messageConfiguration(direct)
```

```
                                        .build();

                        // create a SendMessagesRequest object
                        SendMessagesRequest request = SendMessagesRequest.builder()
                                        .applicationId(appId)
                                        .messageRequest(msgReq)
                                        .build();

                        SendMessagesResponse response =
 pinpoint.sendMessages(request);
                        MessageResponse msg1 = response.messageResponse();
                        Map map1 = msg1.result();

                        // Write out the result of sendMessage.
                        map1.forEach((k, v) -> System.out.println((k + ":" + v)));

                } catch (PinpointException e) {
                        System.err.println(e.awsErrorDetails().errorMessage());
                        System.exit(1);
                }
        }
}
```

Enviar mensajes SMS por lotes.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.DirectMessageConfiguration;
import software.amazon.awssdk.services.pinpoint.model.SMSMessage;
import software.amazon.awssdk.services.pinpoint.model.AddressConfiguration;
import software.amazon.awssdk.services.pinpoint.model.ChannelType;
import software.amazon.awssdk.services.pinpoint.model.MessageRequest;
import software.amazon.awssdk.services.pinpoint.model.SendMessagesRequest;
import software.amazon.awssdk.services.pinpoint.model.SendMessagesResponse;
import software.amazon.awssdk.services.pinpoint.model.MessageResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;

import java.util.HashMap;
import java.util.Map;

/**
```

```
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendMessageBatch {

    // The type of SMS message that you want to send. If you plan to send
    // time-sensitive content, specify TRANSACTIONAL. If you plan to send
    // marketing-related content, specify PROMOTIONAL.
    public static String messageType = "TRANSACTIONAL";

    // The registered keyword associated with the originating short code.
    public static String registeredKeyword = "myKeyword";

    // The sender ID to use when sending the message. Support for sender ID
    // varies by country or region. For more information, see
    // https://docs.aws.amazon.com/pinpoint/latest/userguide/channels-sms-
countries.html
    public static String senderId = "MySenderID";

    public static void main(String[] args) {
        final String usage = """

                Usage:   <message> <appId> <originationNumber> <destinationNumber>
 <destinationNumber1>\s

                Where:
                  message - The body of the message to send.
                  appId - The Amazon Pinpoint project/application ID to use when you
 send this message.
                  originationNumber - The phone number or short code that you
 specify has to be associated with your Amazon Pinpoint account. For best results,
 specify long codes in E.164 format (for example, +1-555-555-5654).
                  destinationNumber - The recipient's phone number.  For best
 results, you should specify the phone number in E.164 format (for example,
 +1-555-555-5654).
                  destinationNumber1 - The second recipient's phone number.  For
 best results, you should specify the phone number in E.164 format (for example,
 +1-555-555-5654).\s
                """;
```

```
        if (args.length != 5) {
            System.out.println(usage);
            System.exit(1);
        }

        String message = args[0];
        String appId = args[1];
        String originationNumber = args[2];
        String destinationNumber = args[3];
        String destinationNumber1 = args[4];
        System.out.println("Sending a message");
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        sendSMSMessage(pinpoint, message, appId, originationNumber,
destinationNumber, destinationNumber1);
        pinpoint.close();
    }

    public static void sendSMSMessage(PinpointClient pinpoint, String message,
String appId,
                                      String originationNumber,
                                      String destinationNumber, String
destinationNumber1) {
        try {
            Map<String, AddressConfiguration> addressMap = new HashMap<String,
AddressConfiguration>();
            AddressConfiguration addConfig = AddressConfiguration.builder()
                    .channelType(ChannelType.SMS)
                    .build();

            // Add an entry to the Map object for each number to whom you want to
send a
            // message.
            addressMap.put(destinationNumber, addConfig);
            addressMap.put(destinationNumber1, addConfig);
            SMSMessage smsMessage = SMSMessage.builder()
                    .body(message)
                    .messageType(messageType)
                    .originationNumber(originationNumber)
                    .senderId(senderId)
                    .keyword(registeredKeyword)
                    .build();
```

```
            // Create a DirectMessageConfiguration object.
            DirectMessageConfiguration direct = DirectMessageConfiguration.builder()
                    .smsMessage(smsMessage)
                    .build();

            MessageRequest msgReq = MessageRequest.builder()
                    .addresses(addressMap)
                    .messageConfiguration(direct)
                    .build();

            // Create a SendMessagesRequest object.
            SendMessagesRequest request = SendMessagesRequest.builder()
                    .applicationId(appId)
                    .messageRequest(msgReq)
                    .build();

            SendMessagesResponse response = pinpoint.sendMessages(request);
            MessageResponse msg1 = response.messageResponse();
            Map map1 = msg1.result();

            // Write out the result of sendMessage.
            map1.forEach((k, v) -> System.out.println((k + ":" + v)));

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta SendMessagesla Referencia AWS SDK for Java 2.x de la API.

`UpdateEndpoint`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateEndpoint`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.EndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.EndpointRequest;
import software.amazon.awssdk.services.pinpoint.model.UpdateEndpointRequest;
import software.amazon.awssdk.services.pinpoint.model.UpdateEndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.GetEndpointRequest;
import software.amazon.awssdk.services.pinpoint.model.GetEndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import software.amazon.awssdk.services.pinpoint.model.EndpointDemographic;
import software.amazon.awssdk.services.pinpoint.model.EndpointLocation;
import software.amazon.awssdk.services.pinpoint.model.EndpointUser;
import java.text.DateFormat;
import java.text.SimpleDateFormat;
import java.util.List;
import java.util.UUID;
import java.util.ArrayList;
import java.util.HashMap;
import java.util.Map;
import java.util.Date;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class UpdateEndpoint {
    public static void main(String[] args) {
        final String usage = """

                Usage:  <appId>
```

```
                Where:
                  appId - The ID of the application to create an endpoint for.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        EndpointResponse response = createEndpoint(pinpoint, appId);
        System.out.println("Got Endpoint: " + response.id());
        pinpoint.close();
    }

    public static EndpointResponse createEndpoint(PinpointClient client, String
appId) {
        String endpointId = UUID.randomUUID().toString();
        System.out.println("Endpoint ID: " + endpointId);

        try {
            EndpointRequest endpointRequest = createEndpointRequestData();
            UpdateEndpointRequest updateEndpointRequest =
UpdateEndpointRequest.builder()
                    .applicationId(appId)
                    .endpointId(endpointId)
                    .endpointRequest(endpointRequest)
                    .build();

            UpdateEndpointResponse updateEndpointResponse =
client.updateEndpoint(updateEndpointRequest);
            System.out.println("Update Endpoint Response: " +
updateEndpointResponse.messageBody());

            GetEndpointRequest getEndpointRequest = GetEndpointRequest.builder()
                    .applicationId(appId)
                    .endpointId(endpointId)
                    .build();
```

```
            GetEndpointResponse getEndpointResponse =
client.getEndpoint(getEndpointRequest);
            System.out.println(getEndpointResponse.endpointResponse().address());

System.out.println(getEndpointResponse.endpointResponse().channelType());

System.out.println(getEndpointResponse.endpointResponse().applicationId());

System.out.println(getEndpointResponse.endpointResponse().endpointStatus());
            System.out.println(getEndpointResponse.endpointResponse().requestId());
            System.out.println(getEndpointResponse.endpointResponse().user());

            return getEndpointResponse.endpointResponse();

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    private static EndpointRequest createEndpointRequestData() {
        try {
            List<String> favoriteTeams = new ArrayList<>();
            favoriteTeams.add("Lakers");
            favoriteTeams.add("Warriors");
            HashMap<String, List<String>> customAttributes = new HashMap<>();
            customAttributes.put("team", favoriteTeams);

            EndpointDemographic demographic = EndpointDemographic.builder()
                    .appVersion("1.0")
                    .make("apple")
                    .model("iPhone")
                    .modelVersion("7")
                    .platform("ios")
                    .platformVersion("10.1.1")
                    .timezone("America/Los_Angeles")
                    .build();

            EndpointLocation location = EndpointLocation.builder()
                    .city("Los Angeles")
                    .country("US")
                    .latitude(34.0)
```

```
                    .longitude(-118.2)
                    .postalCode("90068")
                    .region("CA")
                    .build();

            Map<String, Double> metrics = new HashMap<>();
            metrics.put("health", 100.00);
            metrics.put("luck", 75.00);

            EndpointUser user = EndpointUser.builder()
                    .userId(UUID.randomUUID().toString())
                    .build();

            DateFormat df = new SimpleDateFormat("yyyy-MM-dd'T'HH:mm'Z'"); // Quoted
 "Z" to indicate UTC, no timezone
                                                                           // offset
            String nowAsISO = df.format(new Date());

            return EndpointRequest.builder()
                    .address(UUID.randomUUID().toString())
                    .attributes(customAttributes)
                    .channelType("APNS")
                    .demographic(demographic)
                    .effectiveDate(nowAsISO)
                    .location(location)
                    .metrics(metrics)
                    .optOut("NONE")
                    .requestId(UUID.randomUUID().toString())
                    .user(user)
                    .build();

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }
}
```

- Para obtener más información sobre la API, consulta UpdateEndpointla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de código de la API de SMS y voz de Amazon Pinpoint usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes mediante la AWS SDK for Java 2.x API de SMS y voz de Amazon Pinpoint.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`SendVoiceMessage`

En el siguiente ejemplo de código, se muestra cómo utilizar `SendVoiceMessage`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpointsmsvoice.PinpointSmsVoiceClient;
import software.amazon.awssdk.services.pinpointsmsvoice.model.SSMLMessageType;
import software.amazon.awssdk.services.pinpointsmsvoice.model.VoiceMessageContent;
import
 software.amazon.awssdk.services.pinpointsmsvoice.model.SendVoiceMessageRequest;
```

```
import
 software.amazon.awssdk.services.pinpointsmsvoice.model.PinpointSmsVoiceException;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendVoiceMessage {

    // The Amazon Polly voice that you want to use to send the message. For a list
    // of voices, see https://docs.aws.amazon.com/polly/latest/dg/voicelist.html
    static final String voiceName = "Matthew";

    // The language to use when sending the message. For a list of supported
    // languages, see
    // https://docs.aws.amazon.com/polly/latest/dg/SupportedLanguage.html
    static final String languageCode = "en-US";

    // The content of the message. This example uses SSML to customize and control
    // certain aspects of the message, such as by adding pauses and changing
    // phonation. The message can't contain any line breaks.
    static final String ssmlMessage = "<speak>This is a test message sent from "
            + "<emphasis>Amazon Pinpoint</emphasis> "
            + "using the <break strength='weak'/>AWS "
            + "SDK for Java. "
            + "<amazon:effect phonation='soft'>Thank "
            + "you for listening.</amazon:effect></speak>";

    public static void main(String[] args) {

        final String usage = """
                Usage:   <originationNumber> <destinationNumber>\s

                Where:
```

```
                originationNumber - The phone number or short code that you
specify has to be associated with your Amazon Pinpoint account. For best results,
specify long codes in E.164 format (for example, +1-555-555-5654).
                destinationNumber - The recipient's phone number.  For best
results, you should specify the phone number in E.164 format (for example,
+1-555-555-5654).\s
               """;

       if (args.length != 2) {
           System.out.println(usage);
           System.exit(1);
       }
       String originationNumber = args[0];
       String destinationNumber = args[1];
       System.out.println("Sending a voice message");

       // Set the content type to application/json.
       List<String> listVal = new ArrayList<>();
       listVal.add("application/json");
       Map<String, List<String>> values = new HashMap<>();
       values.put("Content-Type", listVal);

       ClientOverrideConfiguration config2 = ClientOverrideConfiguration.builder()
               .headers(values)
               .build();

       PinpointSmsVoiceClient client = PinpointSmsVoiceClient.builder()
               .overrideConfiguration(config2)
               .region(Region.US_EAST_1)
               .build();

       sendVoiceMsg(client, originationNumber, destinationNumber);
       client.close();
   }

   public static void sendVoiceMsg(PinpointSmsVoiceClient client, String
originationNumber,
                                   String destinationNumber) {
       try {
           SSMLMessageType ssmlMessageType = SSMLMessageType.builder()
                   .languageCode(languageCode)
                   .text(ssmlMessage)
                   .voiceId(voiceName)
                   .build();
```

```
            VoiceMessageContent content = VoiceMessageContent.builder()
                    .ssmlMessage(ssmlMessageType)
                    .build();

            SendVoiceMessageRequest voiceMessageRequest =
 SendVoiceMessageRequest.builder()
                    .destinationPhoneNumber(destinationNumber)
                    .originationPhoneNumber(originationNumber)
                    .content(content)
                    .build();

            client.sendVoiceMessage(voiceMessageRequest);
            System.out.println("The message was sent successfully.");

        } catch (PinpointSmsVoiceException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta SendVoiceMessagela Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon Polly usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Amazon Polly.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`DescribeVoices`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeVoices`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.polly.PollyClient;
import software.amazon.awssdk.services.polly.model.DescribeVoicesRequest;
import software.amazon.awssdk.services.polly.model.DescribeVoicesResponse;
import software.amazon.awssdk.services.polly.model.PollyException;
import software.amazon.awssdk.services.polly.model.Voice;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeVoicesSample {
    public static void main(String args[]) {
        PollyClient polly = PollyClient.builder()
                .region(Region.US_WEST_2)
                .build();

        describeVoice(polly);
        polly.close();
```

```
    }

    public static void describeVoice(PollyClient polly) {
        try {
            DescribeVoicesRequest voicesRequest = DescribeVoicesRequest.builder()
                    .languageCode("en-US")
                    .build();

            DescribeVoicesResponse enUsVoicesResult =
 polly.describeVoices(voicesRequest);
            List<Voice> voices = enUsVoicesResult.voices();
            for (Voice myVoice : voices) {
                System.out.println("The ID of the voice is " + myVoice.id());
                System.out.println("The gender of the voice is " +
 myVoice.gender());
            }

        } catch (PollyException e) {
            System.err.println("Exception caught: " + e);
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DescribeVoicesla Referencia AWS SDK for Java 2.x de la API.

`ListLexicons`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListLexicons`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.polly.PollyClient;
import software.amazon.awssdk.services.polly.model.ListLexiconsResponse;
import software.amazon.awssdk.services.polly.model.ListLexiconsRequest;
import software.amazon.awssdk.services.polly.model.LexiconDescription;
import software.amazon.awssdk.services.polly.model.PollyException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListLexicons {
    public static void main(String args[]) {
        PollyClient polly = PollyClient.builder()
                .region(Region.US_WEST_2)
                .build();

        listLexicons(polly);
        polly.close();
    }

    public static void listLexicons(PollyClient client) {
        try {
            ListLexiconsRequest listLexiconsRequest = ListLexiconsRequest.builder()
                    .build();

            ListLexiconsResponse listLexiconsResult =
 client.listLexicons(listLexiconsRequest);
            List<LexiconDescription> lexiconDescription =
 listLexiconsResult.lexicons();
            for (LexiconDescription lexDescription : lexiconDescription) {
                System.out.println("The name of the Lexicon is " +
 lexDescription.name());
            }

        } catch (PollyException e) {
            System.err.println("Exception caught: " + e);
            System.exit(1);
        }
    }
```

```
}
```

- Para obtener más información sobre la API, consulta ListLexiconsla Referencia AWS SDK for Java 2.x de la API.

`SynthesizeSpeech`

En el siguiente ejemplo de código, se muestra cómo utilizar `SynthesizeSpeech`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import javazoom.jl.decoder.JavaLayerException;
import software.amazon.awssdk.core.ResponseInputStream;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.polly.PollyClient;
import software.amazon.awssdk.services.polly.model.DescribeVoicesRequest;
import software.amazon.awssdk.services.polly.model.Voice;
import software.amazon.awssdk.services.polly.model.DescribeVoicesResponse;
import software.amazon.awssdk.services.polly.model.OutputFormat;
import software.amazon.awssdk.services.polly.model.PollyException;
import software.amazon.awssdk.services.polly.model.SynthesizeSpeechRequest;
import software.amazon.awssdk.services.polly.model.SynthesizeSpeechResponse;
import java.io.IOException;
import java.io.InputStream;
import javazoom.jl.player.advanced.AdvancedPlayer;
import javazoom.jl.player.advanced.PlaybackEvent;
import javazoom.jl.player.advanced.PlaybackListener;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PollyDemo {
    private static final String SAMPLE = "Congratulations. You have successfully
 built this working demo " +
            " of Amazon Polly in Java Version 2. Have fun building voice enabled
 apps with Amazon Polly (that's me!), and always "
            +
            " look at the AWS website for tips and tricks on using Amazon Polly and
 other great services from AWS";

    public static void main(String args[]) {
        PollyClient polly = PollyClient.builder()
                .region(Region.US_WEST_2)
                .build();

        talkPolly(polly);
        polly.close();
    }

    public static void talkPolly(PollyClient polly) {
        try {
            DescribeVoicesRequest describeVoiceRequest =
 DescribeVoicesRequest.builder()
                    .engine("standard")
                    .build();

            DescribeVoicesResponse describeVoicesResult =
 polly.describeVoices(describeVoiceRequest);
            Voice voice = describeVoicesResult.voices().stream()
                    .filter(v -> v.name().equals("Joanna"))
                    .findFirst()
                    .orElseThrow(() -> new RuntimeException("Voice not found"));
            InputStream stream = synthesize(polly, SAMPLE, voice, OutputFormat.MP3);
            AdvancedPlayer player = new AdvancedPlayer(stream,

 javazoom.jl.player.FactoryRegistry.systemRegistry().createAudioDevice());
            player.setPlayBackListener(new PlaybackListener() {
                public void playbackStarted(PlaybackEvent evt) {
                    System.out.println("Playback started");
                    System.out.println(SAMPLE);
                }

                public void playbackFinished(PlaybackEvent evt) {
```

```
                    System.out.println("Playback finished");
                }
            });

            // play it!
            player.play();

        } catch (PollyException | JavaLayerException | IOException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static InputStream synthesize(PollyClient polly, String text, Voice
 voice, OutputFormat format)
            throws IOException {
        SynthesizeSpeechRequest synthReq = SynthesizeSpeechRequest.builder()
                .text(text)
                .voiceId(voice.id())
                .outputFormat(format)
                .build();

        ResponseInputStream<SynthesizeSpeechResponse> synthRes =
 polly.synthesizeSpeech(synthReq);
        return synthRes;
    }
}
```

- Para obtener más información sobre la API, consulta SynthesizeSpeechla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación de una aplicación para analizar los comentarios de los clientes

El siguiente ejemplo de código muestra cómo crear una aplicación que analice las tarjetas de comentarios de los clientes, las traduzca del idioma original, determine sus opiniones y genere un archivo de audio a partir del texto traducido.

SDK para Java 2.x

Esta aplicación de ejemplo analiza y almacena las tarjetas de comentarios de los clientes. Concretamente, satisface la necesidad de un hotel ficticio en la ciudad de Nueva York. El hotel recibe comentarios de los huéspedes en varios idiomas en forma de tarjetas de comentarios físicas. Esos comentarios se cargan en la aplicación a través de un cliente web. Una vez cargada la imagen de una tarjeta de comentarios, se llevan a cabo los siguientes pasos:

- El texto se extrae de la imagen mediante Amazon Textract.
- Amazon Comprehend determina la opinión del texto extraído y su idioma.
- El texto extraído se traduce al inglés mediante Amazon Translate.
- Amazon Polly sintetiza un archivo de audio a partir del texto extraído.

La aplicación completa se puede implementar con AWS CDK. Para ver el código fuente y las instrucciones de implementación, consulta el proyecto en GitHub.

Servicios utilizados en este ejemplo

- Amazon Comprehend
- Lambda
- Amazon Polly
- Amazon Textract
- Amazon Translate

Ejemplos de Amazon RDS usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Amazon RDS.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios
- Ejemplos de tecnología sin servidor

Introducción

Introducción a Amazon RDS

El siguiente ejemplo de código muestra cómo empezar a utilizar Amazon RDS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.DescribeDbInstancesResponse;
import software.amazon.awssdk.services.rds.model.DBInstance;
import software.amazon.awssdk.services.rds.model.RdsException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
```

```
public class DescribeDBInstances {

    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        describeInstances(rdsClient);
        rdsClient.close();
    }

    public static void describeInstances(RdsClient rdsClient) {
        try {
            DescribeDbInstancesResponse response = rdsClient.describeDBInstances();
            List<DBInstance> instanceList = response.dbInstances();
            for (DBInstance instance : instanceList) {
                System.out.println("Instance ARN is: " + instance.dbInstanceArn());
                System.out.println("The Engine is " + instance.engine());
                System.out.println("Connection endpoint is" +
 instance.endpoint().address());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta la sección Describir DBInstances en la referencia de la AWS SDK for Java 2.x API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Cree un grupo de parámetros de base de datos personalizado y defina los valores de los parámetros.

- Cree una instancia de base de datos que esté configurada para utilizar el grupo de parámetros. La instancia de base de datos también contiene una base de datos.
- Cree una instantánea de la instancia.
- Elimine la instancia y el grupo de parámetros.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute varias operaciones.

```
import com.google.gson.Gson;
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.CreateDbInstanceRequest;
import software.amazon.awssdk.services.rds.model.CreateDbInstanceResponse;
import software.amazon.awssdk.services.rds.model.CreateDbParameterGroupResponse;
import software.amazon.awssdk.services.rds.model.CreateDbSnapshotRequest;
import software.amazon.awssdk.services.rds.model.CreateDbSnapshotResponse;
import software.amazon.awssdk.services.rds.model.DBEngineVersion;
import software.amazon.awssdk.services.rds.model.DBInstance;
import software.amazon.awssdk.services.rds.model.DBParameterGroup;
import software.amazon.awssdk.services.rds.model.DBSnapshot;
import software.amazon.awssdk.services.rds.model.DeleteDbInstanceRequest;
import software.amazon.awssdk.services.rds.model.DeleteDbInstanceResponse;
import software.amazon.awssdk.services.rds.model.DescribeDbEngineVersionsRequest;
import software.amazon.awssdk.services.rds.model.DescribeDbEngineVersionsResponse;
import software.amazon.awssdk.services.rds.model.DescribeDbInstancesRequest;
import software.amazon.awssdk.services.rds.model.DescribeDbInstancesResponse;
import software.amazon.awssdk.services.rds.model.DescribeDbParameterGroupsResponse;
import software.amazon.awssdk.services.rds.model.DescribeDbParametersResponse;
import software.amazon.awssdk.services.rds.model.DescribeDbSnapshotsRequest;
import software.amazon.awssdk.services.rds.model.DescribeDbSnapshotsResponse;
import
 software.amazon.awssdk.services.rds.model.DescribeOrderableDbInstanceOptionsResponse;
```

```
import software.amazon.awssdk.services.rds.model.ModifyDbParameterGroupResponse;
import software.amazon.awssdk.services.rds.model.OrderableDBInstanceOption;
import software.amazon.awssdk.services.rds.model.Parameter;
import software.amazon.awssdk.services.rds.model.RdsException;
import software.amazon.awssdk.services.rds.model.CreateDbParameterGroupRequest;
import software.amazon.awssdk.services.rds.model.DescribeDbParameterGroupsRequest;
import software.amazon.awssdk.services.rds.model.DescribeDbParametersRequest;
import software.amazon.awssdk.services.rds.model.ModifyDbParameterGroupRequest;
import
 software.amazon.awssdk.services.rds.model.DescribeOrderableDbInstanceOptionsRequest;
import software.amazon.awssdk.services.rds.model.DeleteDbParameterGroupRequest;
import software.amazon.awssdk.services.secretsmanager.SecretsManagerClient;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueRequest;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueResponse;
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This example requires an AWS Secrets Manager secret that contains the
 * database credentials. If you do not create a
 * secret, this example will not work. For details, see:
 *
 * https://docs.aws.amazon.com/secretsmanager/latest/userguide/integrating_how-
services-use-secrets_RS.html
 *
 * This Java example performs these tasks:
 *
 * 1. Returns a list of the available DB engines.
 * 2. Selects an engine family and create a custom DB parameter group.
 * 3. Gets the parameter groups.
 * 4. Gets parameters in the group.
 * 5. Modifies the auto_increment_offset parameter.
 * 6. Gets and displays the updated parameters.
 * 7. Gets a list of allowed engine versions.
 * 8. Gets a list of micro instance classes available for the selected engine.
 * 9. Creates an RDS database instance that contains a MySql database and uses
 * the parameter group.
```

```
 * 10. Waits for the DB instance to be ready and prints out the connection
 * endpoint value.
 * 11. Creates a snapshot of the DB instance.
 * 12. Waits for an RDS DB snapshot to be ready.
 * 13. Deletes the RDS DB instance.
 * 14. Deletes the parameter group.
 */
public class RDSScenario {
    public static long sleepTime = 20;
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws InterruptedException {
        final String usage = """

                Usage:
                    <dbGroupName> <dbParameterGroupFamily> <dbInstanceIdentifier>
 <dbName> <dbSnapshotIdentifier> <secretName>

                Where:
                    dbGroupName - The database group name.\s
                    dbParameterGroupFamily - The database parameter group name (for
 example, mysql8.0).
                    dbInstanceIdentifier - The database instance identifier\s
                    dbName - The database name.\s
                    dbSnapshotIdentifier - The snapshot identifier.\s
                    secretName - The name of the AWS Secrets Manager secret that
 contains the database credentials"
                """;

        if (args.length != 6) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbGroupName = args[0];
        String dbParameterGroupFamily = args[1];
        String dbInstanceIdentifier = args[2];
        String dbName = args[3];
        String dbSnapshotIdentifier = args[4];
        String secretName = args[5];

        Gson gson = new Gson();
        User user = gson.fromJson(String.valueOf(getSecretValues(secretName)),
 User.class);
```

```
        String masterUsername = user.getUsername();
        String masterUserPassword = user.getPassword();

        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();
        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon RDS example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Return a list of the available DB engines");
        describeDBEngines(rdsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create a custom parameter group");
        createDBParameterGroup(rdsClient, dbGroupName, dbParameterGroupFamily);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Get the parameter group");
        describeDbParameterGroups(rdsClient, dbGroupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Get the parameters in the group");
        describeDbParameters(rdsClient, dbGroupName, 0);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Modify the auto_increment_offset parameter");
        modifyDBParas(rdsClient, dbGroupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Display the updated value");
        describeDbParameters(rdsClient, dbGroupName, -1);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Get a list of allowed engine versions");
        getAllowedEngines(rdsClient, dbParameterGroupFamily);
```

```
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Get a list of micro instance classes available for
the selected engine");
        getMicroInstances(rdsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(
                "9. Create an RDS database instance that contains a MySql database
and uses the parameter group");
        String dbARN = createDatabaseInstance(rdsClient, dbGroupName,
dbInstanceIdentifier, dbName, masterUsername,
                masterUserPassword);
        System.out.println("The ARN of the new database is " + dbARN);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Wait for DB instance to be ready");
        waitForInstanceReady(rdsClient, dbInstanceIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Create a snapshot of the DB instance");
        createSnapshot(rdsClient, dbInstanceIdentifier, dbSnapshotIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Wait for DB snapshot to be ready");
        waitForSnapshotReady(rdsClient, dbInstanceIdentifier, dbSnapshotIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("13. Delete the DB instance");
        deleteDatabaseInstance(rdsClient, dbInstanceIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("14. Delete the parameter group");
        deleteParaGroup(rdsClient, dbGroupName, dbARN);
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("The Scenario has successfully completed.");
        System.out.println(DASHES);

        rdsClient.close();
    }

    private static SecretsManagerClient getSecretClient() {
        Region region = Region.US_WEST_2;
        return SecretsManagerClient.builder()
            .region(region)
            .build();
    }

    public static String getSecretValues(String secretName) {
        SecretsManagerClient secretClient = getSecretClient();
        GetSecretValueRequest valueRequest = GetSecretValueRequest.builder()
                .secretId(secretName)
                .build();

        GetSecretValueResponse valueResponse =
secretClient.getSecretValue(valueRequest);
        return valueResponse.secretString();
    }

    // Delete the parameter group after database has been deleted.
    // An exception is thrown if you attempt to delete the para group while database
    // exists.
    public static void deleteParaGroup(RdsClient rdsClient, String dbGroupName,
String dbARN)
            throws InterruptedException {
        try {
            boolean isDataDel = false;
            boolean didFind;
            String instanceARN;

            // Make sure that the database has been deleted.
            while (!isDataDel) {
                DescribeDbInstancesResponse response =
rdsClient.describeDBInstances();
                List<DBInstance> instanceList = response.dbInstances();
                int listSize = instanceList.size();
                didFind = false;
                int index = 1;
                for (DBInstance instance : instanceList) {
```

```
                    instanceARN = instance.dbInstanceArn();
                    if (instanceARN.compareTo(dbARN) == 0) {
                        System.out.println(dbARN + " still exists");
                        didFind = true;
                    }
                    if ((index == listSize) && (!didFind)) {
                        // Went through the entire list and did not find the
database ARN.
                        isDataDel = true;
                    }
                    Thread.sleep(sleepTime * 1000);
                    index++;
                }
            }

            // Delete the para group.
            DeleteDbParameterGroupRequest parameterGroupRequest =
DeleteDbParameterGroupRequest.builder()
                    .dbParameterGroupName(dbGroupName)
                    .build();

            rdsClient.deleteDBParameterGroup(parameterGroupRequest);
            System.out.println(dbGroupName + " was deleted.");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Delete the DB instance.
    public static void deleteDatabaseInstance(RdsClient rdsClient, String
dbInstanceIdentifier) {
        try {
            DeleteDbInstanceRequest deleteDbInstanceRequest =
DeleteDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .deleteAutomatedBackups(true)
                    .skipFinalSnapshot(true)
                    .build();

            DeleteDbInstanceResponse response =
rdsClient.deleteDBInstance(deleteDbInstanceRequest);
```

```
            System.out.print("The status of the database is " +
response.dbInstance().dbInstanceStatus());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Waits until the snapshot instance is available.
    public static void waitForSnapshotReady(RdsClient rdsClient, String
dbInstanceIdentifier,
            String dbSnapshotIdentifier) {
        try {
            boolean snapshotReady = false;
            String snapshotReadyStr;
            System.out.println("Waiting for the snapshot to become available.");

            DescribeDbSnapshotsRequest snapshotsRequest =
DescribeDbSnapshotsRequest.builder()
                    .dbSnapshotIdentifier(dbSnapshotIdentifier)
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .build();

            while (!snapshotReady) {
                DescribeDbSnapshotsResponse response =
rdsClient.describeDBSnapshots(snapshotsRequest);
                List<DBSnapshot> snapshotList = response.dbSnapshots();
                for (DBSnapshot snapshot : snapshotList) {
                    snapshotReadyStr = snapshot.status();
                    if (snapshotReadyStr.contains("available")) {
                        snapshotReady = true;
                    } else {
                        System.out.print(".");
                        Thread.sleep(sleepTime * 1000);
                    }
                }
            }

            System.out.println("The Snapshot is available!");
        } catch (RdsException | InterruptedException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
```

```
   }

   // Create an Amazon RDS snapshot.
   public static void createSnapshot(RdsClient rdsClient, String
dbInstanceIdentifier, String dbSnapshotIdentifier) {
       try {
           CreateDbSnapshotRequest snapshotRequest =
CreateDbSnapshotRequest.builder()
                   .dbInstanceIdentifier(dbInstanceIdentifier)
                   .dbSnapshotIdentifier(dbSnapshotIdentifier)
                   .build();

           CreateDbSnapshotResponse response =
rdsClient.createDBSnapshot(snapshotRequest);
           System.out.println("The Snapshot id is " +
response.dbSnapshot().dbiResourceId());

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }

   // Waits until the database instance is available.
   public static void waitForInstanceReady(RdsClient rdsClient, String
dbInstanceIdentifier) {
       boolean instanceReady = false;
       String instanceReadyStr;
       System.out.println("Waiting for instance to become available.");
       try {
           DescribeDbInstancesRequest instanceRequest =
DescribeDbInstancesRequest.builder()
                   .dbInstanceIdentifier(dbInstanceIdentifier)
                   .build();

           String endpoint = "";
           while (!instanceReady) {
               DescribeDbInstancesResponse response =
rdsClient.describeDBInstances(instanceRequest);
               List<DBInstance> instanceList = response.dbInstances();
               for (DBInstance instance : instanceList) {
                   instanceReadyStr = instance.dbInstanceStatus();
                   if (instanceReadyStr.contains("available")) {
                       endpoint = instance.endpoint().address();
```

```
                    instanceReady = true;
                } else {
                    System.out.print(".");
                    Thread.sleep(sleepTime * 1000);
                }
            }
        }
        System.out.println("Database instance is available! The connection
endpoint is " + endpoint);

    } catch (RdsException | InterruptedException e) {
        System.err.println(e.getMessage());
        System.exit(1);
    }
}

// Create a database instance and return the ARN of the database.
public static String createDatabaseInstance(RdsClient rdsClient,
        String dbGroupName,
        String dbInstanceIdentifier,
        String dbName,
        String userName,
        String userPassword) {

    try {
        CreateDbInstanceRequest instanceRequest =
CreateDbInstanceRequest.builder()
            .dbInstanceIdentifier(dbInstanceIdentifier)
            .allocatedStorage(100)
            .dbName(dbName)
            .engine("mysql")
            .dbInstanceClass("db.t3.medium") // Updated to a supported class
            .engineVersion("8.0.32")         // Updated to a supported version
            .storageType("gp2")             // Changed to General Purpose SSD
(gp2)
            .masterUsername(userName)
            .masterUserPassword(userPassword)
            .build();

        CreateDbInstanceResponse response =
rdsClient.createDBInstance(instanceRequest);
        System.out.print("The status is " +
response.dbInstance().dbInstanceStatus());
        return response.dbInstance().dbInstanceArn();
```

```
        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }

        return "";
    }

    // Get a list of micro instances.
    public static void getMicroInstances(RdsClient rdsClient) {
        try {
            DescribeOrderableDbInstanceOptionsRequest dbInstanceOptionsRequest =
DescribeOrderableDbInstanceOptionsRequest
                    .builder()
                    .engine("mysql")
                    .build();

            DescribeOrderableDbInstanceOptionsResponse response = rdsClient
                    .describeOrderableDBInstanceOptions(dbInstanceOptionsRequest);
            List<OrderableDBInstanceOption> orderableDBInstances =
response.orderableDBInstanceOptions();
            for (OrderableDBInstanceOption dbInstanceOption : orderableDBInstances)
{
                System.out.println("The engine version is " +
dbInstanceOption.engineVersion());
                System.out.println("The engine description is " +
dbInstanceOption.engine());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Get a list of allowed engine versions.
    public static void getAllowedEngines(RdsClient rdsClient, String
dbParameterGroupFamily) {
        try {
            DescribeDbEngineVersionsRequest versionsRequest =
DescribeDbEngineVersionsRequest.builder()
                    .dbParameterGroupFamily(dbParameterGroupFamily)
                    .engine("mysql")
```

```
                    .build();

            DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(versionsRequest);
            List<DBEngineVersion> dbEngines = response.dbEngineVersions();
            for (DBEngineVersion dbEngine : dbEngines) {
                System.out.println("The engine version is " +
dbEngine.engineVersion());
                System.out.println("The engine description is " +
dbEngine.dbEngineDescription());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Modify auto_increment_offset and auto_increment_increment parameters.
    public static void modifyDBParas(RdsClient rdsClient, String dbGroupName) {
        try {
            Parameter parameter1 = Parameter.builder()
                    .parameterName("auto_increment_offset")
                    .applyMethod("immediate")
                    .parameterValue("5")
                    .build();

            List<Parameter> paraList = new ArrayList<>();
            paraList.add(parameter1);
            ModifyDbParameterGroupRequest groupRequest =
ModifyDbParameterGroupRequest.builder()
                    .dbParameterGroupName(dbGroupName)
                    .parameters(paraList)
                    .build();

            ModifyDbParameterGroupResponse response =
rdsClient.modifyDBParameterGroup(groupRequest);
            System.out.println("The parameter group " +
response.dbParameterGroupName() + " was successfully modified");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
```

```
   }

   // Retrieve parameters in the group.
   public static void describeDbParameters(RdsClient rdsClient, String dbGroupName,
int flag) {
       try {
           DescribeDbParametersRequest dbParameterGroupsRequest;
           if (flag == 0) {
               dbParameterGroupsRequest = DescribeDbParametersRequest.builder()
                       .dbParameterGroupName(dbGroupName)
                       .build();
           } else {
               dbParameterGroupsRequest = DescribeDbParametersRequest.builder()
                       .dbParameterGroupName(dbGroupName)
                       .source("user")
                       .build();
           }

           DescribeDbParametersResponse response =
rdsClient.describeDBParameters(dbParameterGroupsRequest);
           List<Parameter> dbParameters = response.parameters();
           String paraName;
           for (Parameter para : dbParameters) {
               // Only print out information about either auto_increment_offset or
               // auto_increment_increment.
               paraName = para.parameterName();
               if ((paraName.compareTo("auto_increment_offset") == 0)
                       || (paraName.compareTo("auto_increment_increment ") == 0)) {
                   System.out.println("*** The parameter name is  " + paraName);
                   System.out.println("*** The parameter value is  " +
para.parameterValue());
                   System.out.println("*** The parameter data type is " +
para.dataType());
                   System.out.println("*** The parameter description is " +
para.description());
                   System.out.println("*** The parameter allowed values  is " +
para.allowedValues());
               }
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
```

```
   }

   public static void describeDbParameterGroups(RdsClient rdsClient, String
dbGroupName) {
       try {
           DescribeDbParameterGroupsRequest groupsRequest =
DescribeDbParameterGroupsRequest.builder()
                   .dbParameterGroupName(dbGroupName)
                   .maxRecords(20)
                   .build();

           DescribeDbParameterGroupsResponse response =
rdsClient.describeDBParameterGroups(groupsRequest);
           List<DBParameterGroup> groups = response.dbParameterGroups();
           for (DBParameterGroup group : groups) {
               System.out.println("The group name is " +
group.dbParameterGroupName());
               System.out.println("The group description is " +
group.description());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }

   public static void createDBParameterGroup(RdsClient rdsClient, String
dbGroupName, String dbParameterGroupFamily) {
       try {
           CreateDbParameterGroupRequest groupRequest =
CreateDbParameterGroupRequest.builder()
                   .dbParameterGroupName(dbGroupName)
                   .dbParameterGroupFamily(dbParameterGroupFamily)
                   .description("Created by using the AWS SDK for Java")
                   .build();

           CreateDbParameterGroupResponse response =
rdsClient.createDBParameterGroup(groupRequest);
           System.out.println("The group name is " +
response.dbParameterGroup().dbParameterGroupName());

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
```

```
            System.exit(1);
        }
    }

    public static void describeDBEngines(RdsClient rdsClient) {
        try {
            DescribeDbEngineVersionsRequest engineVersionsRequest =
 DescribeDbEngineVersionsRequest.builder()
                    .defaultOnly(true)
                    .engine("mysql")
                    .maxRecords(20)
                    .build();

            DescribeDbEngineVersionsResponse response =
 rdsClient.describeDBEngineVersions(engineVersionsRequest);
            List<DBEngineVersion> engines = response.dbEngineVersions();

            // Get all DBEngineVersion objects.
            for (DBEngineVersion engineOb : engines) {
                System.out.println("The name of the DB parameter group family for
 the database engine is "
                        + engineOb.dbParameterGroupFamily());
                System.out.println("The name of the database engine " +
 engineOb.engine());
                System.out.println("The version number of the database engine " +
 engineOb.engineVersion());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CrearDBInstance
  - Crear DBParameter grupo
  - CrearDBSnapshot
  - DeleteDBInstance

- Eliminar DBParameter grupo
- Describa DBEngine las versiones
- DescribirDBInstances
- Describa DBParameter los grupos
- DescribirDBParameters
- DescribirDBSnapshots
- DescribeOrderableDBInstanceOpciones
- Modificar DBParameter grupo

Acciones

`CreateDBInstance`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDBInstance`.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import com.google.gson.Gson;
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.DescribeDbInstancesRequest;
import software.amazon.awssdk.services.rds.model.CreateDbInstanceRequest;
import software.amazon.awssdk.services.rds.model.CreateDbInstanceResponse;
import software.amazon.awssdk.services.rds.model.RdsException;
import software.amazon.awssdk.services.rds.model.DescribeDbInstancesResponse;
import software.amazon.awssdk.services.rds.model.DBInstance;
import software.amazon.awssdk.services.secretsmanager.SecretsManagerClient;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueRequest;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueResponse;
```

```
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This example requires an AWS Secrets Manager secret that contains the
 * database credentials. If you do not create a
 * secret, this example will not work. For more details, see:
 *
 * https://docs.aws.amazon.com/secretsmanager/latest/userguide/integrating_how-
services-use-secrets_RS.html
 *
 *
 */

public class CreateDBInstance {
    public static long sleepTime = 20;

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <dbInstanceIdentifier> <dbName> <secretName>

                Where:
                    dbInstanceIdentifier - The database instance identifier.\s
                    dbName - The database name.\s
                    secretName - The name of the AWS Secrets Manager secret that
 contains the database credentials."
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbInstanceIdentifier = args[0];
        String dbName = args[1];
        String secretName = args[2];
```

```
        Gson gson = new Gson();
        User user = gson.fromJson(String.valueOf(getSecretValues(secretName)),
User.class);
        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        createDatabaseInstance(rdsClient, dbInstanceIdentifier, dbName,
user.getUsername(), user.getPassword());
        waitForInstanceReady(rdsClient, dbInstanceIdentifier);
        rdsClient.close();
    }

    private static SecretsManagerClient getSecretClient() {
        Region region = Region.US_WEST_2;
        return SecretsManagerClient.builder()
                .region(region)

.credentialsProvider(EnvironmentVariableCredentialsProvider.create())
                .build();
    }

    private static String getSecretValues(String secretName) {
        SecretsManagerClient secretClient = getSecretClient();
        GetSecretValueRequest valueRequest = GetSecretValueRequest.builder()
                .secretId(secretName)
                .build();

        GetSecretValueResponse valueResponse =
secretClient.getSecretValue(valueRequest);
        return valueResponse.secretString();
    }

    public static void createDatabaseInstance(RdsClient rdsClient,
            String dbInstanceIdentifier,
            String dbName,
            String userName,
            String userPassword) {

        try {
            CreateDbInstanceRequest instanceRequest =
CreateDbInstanceRequest.builder()
                .dbInstanceIdentifier(dbInstanceIdentifier)
```

```
                .allocatedStorage(100)
                .dbName(dbName)
                .engine("mysql")
                .dbInstanceClass("db.t3.medium") // Updated to a supported class
                .engineVersion("8.0.32")         // Updated to a supported version
                .storageType("gp2")             // Changed to General Purpose SSD
(gp2)
                .masterUsername(userName)
                .masterUserPassword(userPassword)
                .build();

            CreateDbInstanceResponse response =
rdsClient.createDBInstance(instanceRequest);
            System.out.print("The status is " +
response.dbInstance().dbInstanceStatus());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Waits until the database instance is available.
    public static void waitForInstanceReady(RdsClient rdsClient, String
dbInstanceIdentifier) {
        boolean instanceReady = false;
        String instanceReadyStr;
        System.out.println("Waiting for instance to become available.");
        try {
            DescribeDbInstancesRequest instanceRequest =
DescribeDbInstancesRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .build();

            // Loop until the cluster is ready.
            while (!instanceReady) {
                DescribeDbInstancesResponse response =
rdsClient.describeDBInstances(instanceRequest);
                List<DBInstance> instanceList = response.dbInstances();
                for (DBInstance instance : instanceList) {
                    instanceReadyStr = instance.dbInstanceStatus();
                    if (instanceReadyStr.contains("available"))
                        instanceReady = true;
                    else {
```

```
                    System.out.print(".");
                    Thread.sleep(sleepTime * 1000);
                }
            }
        }
        System.out.println("Database instance is available!");

    } catch (RdsException | InterruptedException e) {
        System.err.println(e.getMessage());
        System.exit(1);
    }
}
```

- Para obtener más información sobre la API, consulta la sección Crear DBInstance en la referencia de la AWS SDK for Java 2.x API.

`CreateDBParameterGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDBParameterGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void createDBParameterGroup(RdsClient rdsClient, String
dbGroupName, String dbParameterGroupFamily) {
       try {
           CreateDbParameterGroupRequest groupRequest =
CreateDbParameterGroupRequest.builder()
                   .dbParameterGroupName(dbGroupName)
                   .dbParameterGroupFamily(dbParameterGroupFamily)
                   .description("Created by using the AWS SDK for Java")
                   .build();

           CreateDbParameterGroupResponse response =
rdsClient.createDBParameterGroup(groupRequest);
```

```
            System.out.println("The group name is " +
response.dbParameterGroup().dbParameterGroupName());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta Crear un DBParameter grupo en la referencia AWS SDK for Java 2.x de la API.

`CreateDBSnapshot`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDBSnapshot`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    // Create an Amazon RDS snapshot.
    public static void createSnapshot(RdsClient rdsClient, String
dbInstanceIdentifier, String dbSnapshotIdentifier) {
        try {
            CreateDbSnapshotRequest snapshotRequest =
CreateDbSnapshotRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .dbSnapshotIdentifier(dbSnapshotIdentifier)
                    .build();

            CreateDbSnapshotResponse response =
rdsClient.createDBSnapshot(snapshotRequest);
            System.out.println("The Snapshot id is " +
response.dbSnapshot().dbiResourceId());

        } catch (RdsException e) {
```

```
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta la sección Crear DBSnapshot en la referencia de la AWS SDK for Java 2.x API.

`DeleteDBInstance`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDBInstance`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.DeleteDbInstanceRequest;
import software.amazon.awssdk.services.rds.model.DeleteDbInstanceResponse;
import software.amazon.awssdk.services.rds.model.RdsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteDBInstance {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <dbInstanceIdentifier>\s
```

```
                Where:
                    dbInstanceIdentifier - The database instance identifier\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbInstanceIdentifier = args[0];
        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        deleteDatabaseInstance(rdsClient, dbInstanceIdentifier);
        rdsClient.close();
    }

    public static void deleteDatabaseInstance(RdsClient rdsClient, String
 dbInstanceIdentifier) {
        try {
            DeleteDbInstanceRequest deleteDbInstanceRequest =
 DeleteDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .deleteAutomatedBackups(true)
                    .skipFinalSnapshot(true)
                    .build();

            DeleteDbInstanceResponse response =
 rdsClient.deleteDBInstance(deleteDbInstanceRequest);
            System.out.print("The status of the database is " +
 response.dbInstance().dbInstanceStatus());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta Eliminar DBInstance en la referencia AWS SDK for Java 2.x de la API.

`DeleteDBParameterGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDBParameterGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   // Delete the parameter group after database has been deleted.
   // An exception is thrown if you attempt to delete the para group while database
   // exists.
   public static void deleteParaGroup(RdsClient rdsClient, String dbGroupName,
String dbARN)
           throws InterruptedException {
       try {
           boolean isDataDel = false;
           boolean didFind;
           String instanceARN;

           // Make sure that the database has been deleted.
           while (!isDataDel) {
               DescribeDbInstancesResponse response =
rdsClient.describeDBInstances();
               List<DBInstance> instanceList = response.dbInstances();
               int listSize = instanceList.size();
               didFind = false;
               int index = 1;
               for (DBInstance instance : instanceList) {
                   instanceARN = instance.dbInstanceArn();
                   if (instanceARN.compareTo(dbARN) == 0) {
                       System.out.println(dbARN + " still exists");
                       didFind = true;
                   }
                   if ((index == listSize) && (!didFind)) {
```

```
                        // Went through the entire list and did not find the
database ARN.
                        isDataDel = true;
                    }
                    Thread.sleep(sleepTime * 1000);
                    index++;
                }
            }

            // Delete the para group.
            DeleteDbParameterGroupRequest parameterGroupRequest =
DeleteDbParameterGroupRequest.builder()
                    .dbParameterGroupName(dbGroupName)
                    .build();

            rdsClient.deleteDBParameterGroup(parameterGroupRequest);
            System.out.println(dbGroupName + " was deleted.");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta Eliminar DBParameter grupo en la referencia AWS SDK for Java 2.x de la API.

`DescribeAccountAttributes`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeAccountAttributes`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.AccountQuota;
import software.amazon.awssdk.services.rds.model.RdsException;
import software.amazon.awssdk.services.rds.model.DescribeAccountAttributesResponse;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeAccountAttributes {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        getAccountAttributes(rdsClient);
        rdsClient.close();
    }

    public static void getAccountAttributes(RdsClient rdsClient) {
        try {
            DescribeAccountAttributesResponse response =
 rdsClient.describeAccountAttributes();
            List<AccountQuota> quotasList = response.accountQuotas();
            for (AccountQuota quotas : quotasList) {
                System.out.println("Name is: " + quotas.accountQuotaName());
                System.out.println("Max value is " + quotas.max());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DescribeAccountAttributesla Referencia AWS SDK for Java 2.x de la API.

`DescribeDBEngineVersions`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDBEngineVersions`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void describeDBEngines(RdsClient rdsClient) {
       try {
           DescribeDbEngineVersionsRequest engineVersionsRequest =
DescribeDbEngineVersionsRequest.builder()
                   .defaultOnly(true)
                   .engine("mysql")
                   .maxRecords(20)
                   .build();

           DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(engineVersionsRequest);
           List<DBEngineVersion> engines = response.dbEngineVersions();

           // Get all DBEngineVersion objects.
           for (DBEngineVersion engineOb : engines) {
               System.out.println("The name of the DB parameter group family for
the database engine is "
                       + engineOb.dbParameterGroupFamily());
               System.out.println("The name of the database engine " +
engineOb.engine());
               System.out.println("The version number of the database engine " +
engineOb.engineVersion());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
```

```
        }
    }
```

- Para obtener más información sobre la API, consulta la sección Describir DBEngine las versiones en la referencia de la AWS SDK for Java 2.x API.

`DescribeDBInstances`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDBInstances`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.DescribeDbInstancesResponse;
import software.amazon.awssdk.services.rds.model.DBInstance;
import software.amazon.awssdk.services.rds.model.RdsException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeDBInstances {

    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();
```

```
        describeInstances(rdsClient);
        rdsClient.close();
    }

    public static void describeInstances(RdsClient rdsClient) {
        try {
            DescribeDbInstancesResponse response = rdsClient.describeDBInstances();
            List<DBInstance> instanceList = response.dbInstances();
            for (DBInstance instance : instanceList) {
                System.out.println("Instance ARN is: " + instance.dbInstanceArn());
                System.out.println("The Engine is " + instance.engine());
                System.out.println("Connection endpoint is" +
 instance.endpoint().address());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta la sección Describir DBInstances en la referencia de la AWS SDK for Java 2.x API.

`DescribeDBParameterGroups`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDBParameterGroups`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void describeDbParameterGroups(RdsClient rdsClient, String
 dbGroupName) {
```

```
        try {
            DescribeDbParameterGroupsRequest groupsRequest =
DescribeDbParameterGroupsRequest.builder()
                    .dbParameterGroupName(dbGroupName)
                    .maxRecords(20)
                    .build();

            DescribeDbParameterGroupsResponse response =
rdsClient.describeDBParameterGroups(groupsRequest);
            List<DBParameterGroup> groups = response.dbParameterGroups();
            for (DBParameterGroup group : groups) {
                System.out.println("The group name is " +
group.dbParameterGroupName());
                System.out.println("The group description is " +
group.description());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta la sección Describir DBParameter los grupos en la referencia de la AWS SDK for Java 2.x API.

`DescribeDBParameters`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeDBParameters`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    // Retrieve parameters in the group.
```

```
   public static void describeDbParameters(RdsClient rdsClient, String dbGroupName,
int flag) {
       try {
           DescribeDbParametersRequest dbParameterGroupsRequest;
           if (flag == 0) {
               dbParameterGroupsRequest = DescribeDbParametersRequest.builder()
                       .dbParameterGroupName(dbGroupName)
                       .build();
           } else {
               dbParameterGroupsRequest = DescribeDbParametersRequest.builder()
                       .dbParameterGroupName(dbGroupName)
                       .source("user")
                       .build();
           }

           DescribeDbParametersResponse response =
rdsClient.describeDBParameters(dbParameterGroupsRequest);
           List<Parameter> dbParameters = response.parameters();
           String paraName;
           for (Parameter para : dbParameters) {
               // Only print out information about either auto_increment_offset or
               // auto_increment_increment.
               paraName = para.parameterName();
               if ((paraName.compareTo("auto_increment_offset") == 0)
                       || (paraName.compareTo("auto_increment_increment ") == 0)) {
                   System.out.println("*** The parameter name is  " + paraName);
                   System.out.println("*** The parameter value is  " +
para.parameterValue());
                   System.out.println("*** The parameter data type is " +
para.dataType());
                   System.out.println("*** The parameter description is " +
para.description());
                   System.out.println("*** The parameter allowed values  is " +
para.allowedValues());
               }
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta la sección Describir DBParameters en la referencia de la AWS SDK for Java 2.x API.

`GenerateRDSAuthToken`

En el siguiente ejemplo de código, se muestra cómo utilizar `GenerateRDSAuthToken`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Usa la RdsUtilitiesclase para generar un token de autenticación.

```
public class GenerateRDSAuthToken {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <dbInstanceIdentifier> <masterUsername>

                Where:
                    dbInstanceIdentifier - The database instance identifier.\s
                    masterUsername - The master user name.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbInstanceIdentifier = args[0];
        String masterUsername = args[1];
        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();
```

```
        String token = getAuthToken(rdsClient, dbInstanceIdentifier,
 masterUsername);
        System.out.println("The token response is " + token);
    }

    public static String getAuthToken(RdsClient rdsClient, String
 dbInstanceIdentifier, String masterUsername) {

        RdsUtilities utilities = rdsClient.utilities();
        try {
            GenerateAuthenticationTokenRequest tokenRequest =
 GenerateAuthenticationTokenRequest.builder()
                    .credentialsProvider(ProfileCredentialsProvider.create())
                    .username(masterUsername)
                    .port(3306)
                    .hostname(dbInstanceIdentifier)
                    .build();

            return utilities.generateAuthenticationToken(tokenRequest);

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulte Generar RDSAuth token en la referencia AWS SDK for Java 2.x de la API.

`ModifyDBInstance`

En el siguiente ejemplo de código, se muestra cómo utilizar `ModifyDBInstance`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.ModifyDbInstanceRequest;
import software.amazon.awssdk.services.rds.model.ModifyDbInstanceResponse;
import software.amazon.awssdk.services.rds.model.RdsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ModifyDBInstance {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <dbInstanceIdentifier> <dbSnapshotIdentifier>\s
                Where:
                    dbInstanceIdentifier - The database instance identifier.\s
                    masterUserPassword - The updated password that corresponds to
 the master user name.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbInstanceIdentifier = args[0];
        String masterUserPassword = args[1];
        Region region = Region.US_WEST_2;
```

```
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        updateIntance(rdsClient, dbInstanceIdentifier, masterUserPassword);
        rdsClient.close();
    }

    public static void updateIntance(RdsClient rdsClient, String
 dbInstanceIdentifier, String masterUserPassword) {
        try {
            // For a demo - modify the DB instance by modifying the master password.
            ModifyDbInstanceRequest modifyDbInstanceRequest =
 ModifyDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .publiclyAccessible(true)
                    .masterUserPassword(masterUserPassword)
                    .build();

            ModifyDbInstanceResponse instanceResponse =
 rdsClient.modifyDBInstance(modifyDbInstanceRequest);
            System.out.print("The ARN of the modified database is: " +
 instanceResponse.dbInstance().dbInstanceArn());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta Modificar DBInstance en la referencia AWS SDK for Java 2.x de la API.

`ModifyDBParameterGroup`

En el siguiente ejemplo de código, se muestra cómo utilizar `ModifyDBParameterGroup`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   // Modify auto_increment_offset and auto_increment_increment parameters.
   public static void modifyDBParas(RdsClient rdsClient, String dbGroupName) {
       try {
           Parameter parameter1 = Parameter.builder()
                   .parameterName("auto_increment_offset")
                   .applyMethod("immediate")
                   .parameterValue("5")
                   .build();

           List<Parameter> paraList = new ArrayList<>();
           paraList.add(parameter1);
           ModifyDbParameterGroupRequest groupRequest =
ModifyDbParameterGroupRequest.builder()
                   .dbParameterGroupName(dbGroupName)
                   .parameters(paraList)
                   .build();

           ModifyDbParameterGroupResponse response =
rdsClient.modifyDBParameterGroup(groupRequest);
           System.out.println("The parameter group " +
response.dbParameterGroupName() + " was successfully modified");

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta Modificar el DBParameter grupo en la referencia de la AWS SDK for Java 2.x API.

`RebootDBInstance`

En el siguiente ejemplo de código, se muestra cómo utilizar `RebootDBInstance`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.RebootDbInstanceRequest;
import software.amazon.awssdk.services.rds.model.RebootDbInstanceResponse;
import software.amazon.awssdk.services.rds.model.RdsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class RebootDBInstance {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <dbInstanceIdentifier>\s

                Where:
                    dbInstanceIdentifier - The database instance identifier\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbInstanceIdentifier = args[0];
```

```
        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        rebootInstance(rdsClient, dbInstanceIdentifier);
        rdsClient.close();
    }

    public static void rebootInstance(RdsClient rdsClient, String
 dbInstanceIdentifier) {
        try {
            RebootDbInstanceRequest rebootDbInstanceRequest =
 RebootDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .build();

            RebootDbInstanceResponse instanceResponse =
 rdsClient.rebootDBInstance(rebootDbInstanceRequest);
            System.out.print("The database " +
 instanceResponse.dbInstance().dbInstanceArn() + " was rebooted");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta Reiniciar DBInstance en la referencia AWS SDK for Java 2.x de la API.

Escenarios

Crear un rastreador de elementos de trabajo de Aurora Serverless

El siguiente ejemplos de código muestra cómo crear una aplicación web que realice un seguimiento de los elementos de trabajo de una base de datos de Amazon Aurora sin servidor y use Amazon Simple Email Service (Amazon SES) para enviar informes.

SDK para Java 2.x

Muestra cómo crear una aplicación web que haga un seguimiento de los elementos de trabajo almacenados en una base de datos de Amazon RDS e informe al respecto.

Para obtener el código fuente completo y las instrucciones sobre cómo configurar una API REST de Spring que consulte los datos de Amazon Aurora Serverless y para que la utilice una aplicación React, consulte el ejemplo completo en GitHub.

Para obtener el código fuente completo y las instrucciones sobre cómo configurar y ejecutar un ejemplo que utilice la API JDBC, consulte el ejemplo completo en. GitHub

Servicios utilizados en este ejemplo

- Aurora
- Amazon RDS
- Servicio de datos de Amazon RDS
- Amazon SES

Ejemplos de tecnología sin servidor

Conexión a una base de datos de Amazon RDS en una función de Lambda

En el siguiente ejemplo de código, se muestra cómo implementar una función de Lambda que se conecta a una base de datos de RDS. La función realiza una solicitud sencilla a la base de datos y devuelve el resultado.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Conexión a una base de datos de Amazon RDS en una función de Lambda mediante Java.

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.APIGatewayProxyRequestEvent;
```

```
import com.amazonaws.services.lambda.runtime.events.APIGatewayProxyResponseEvent;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rdsdata.RdsDataClient;
import software.amazon.awssdk.services.rdsdata.model.ExecuteStatementRequest;
import software.amazon.awssdk.services.rdsdata.model.ExecuteStatementResponse;
import software.amazon.awssdk.services.rdsdata.model.Field;

import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.PreparedStatement;
import java.sql.ResultSet;

public class RdsLambdaHandler implements RequestHandler<APIGatewayProxyRequestEvent,
 APIGatewayProxyResponseEvent> {

    @Override
    public APIGatewayProxyResponseEvent handleRequest(APIGatewayProxyRequestEvent
 event, Context context) {
        APIGatewayProxyResponseEvent response = new APIGatewayProxyResponseEvent();

        try {
            // Obtain auth token
            String token = createAuthToken();

            // Define connection configuration
            String connectionString = String.format("jdbc:mysql://%s:%s/%s?
useSSL=true&requireSSL=true",
                    System.getenv("ProxyHostName"),
                    System.getenv("Port"),
                    System.getenv("DBName"));

            // Establish a connection to the database
            try (Connection connection =
 DriverManager.getConnection(connectionString, System.getenv("DBUserName"), token);
                 PreparedStatement statement = connection.prepareStatement("SELECT ?
 + ? AS sum")) {

                statement.setInt(1, 3);
                statement.setInt(2, 2);

                try (ResultSet resultSet = statement.executeQuery()) {
                    if (resultSet.next()) {
                        int sum = resultSet.getInt("sum");
```

```
                        response.setStatusCode(200);
                        response.setBody("The selected sum is: " + sum);
                    }
                }
            }

        } catch (Exception e) {
            response.setStatusCode(500);
            response.setBody("Error: " + e.getMessage());
        }

        return response;
    }

    private String createAuthToken() {
        // Create RDS Data Service client
        RdsDataClient rdsDataClient = RdsDataClient.builder()
                .region(Region.of(System.getenv("AWS_REGION")))
                .credentialsProvider(DefaultCredentialsProvider.create())
                .build();

        // Define authentication request
        ExecuteStatementRequest request = ExecuteStatementRequest.builder()
                .resourceArn(System.getenv("ProxyHostName"))
                .secretArn(System.getenv("DBUserName"))
                .database(System.getenv("DBName"))
                .sql("SELECT 'RDS IAM Authentication'")
                .build();

        // Execute request and obtain authentication token
        ExecuteStatementResponse response = rdsDataClient.executeStatement(request);
        Field tokenField = response.records().get(0).get(0);

        return tokenField.stringValue();
    }
}
```

Ejemplos de Amazon RDS Data Service con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes mediante Amazon RDS Data Service. AWS SDK for Java 2.x

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Escenarios

Escenarios

Crear un rastreador de elementos de trabajo de Aurora Serverless

El siguiente ejemplos de código muestra cómo crear una aplicación web que realice un seguimiento de los elementos de trabajo de una base de datos de Amazon Aurora sin servidor y use Amazon Simple Email Service (Amazon SES) para enviar informes.

SDK para Java 2.x

Muestra cómo crear una aplicación web que haga un seguimiento de los elementos de trabajo almacenados en una base de datos de Amazon RDS e informe al respecto.

Para obtener el código fuente completo y las instrucciones sobre cómo configurar una API REST de Spring que consulte los datos de Amazon Aurora Serverless y para que la utilice una aplicación React, consulte el ejemplo completo en GitHub.

Para obtener el código fuente completo y las instrucciones sobre cómo configurar y ejecutar un ejemplo que utilice la API JDBC, consulte el ejemplo completo en. GitHub

Servicios utilizados en este ejemplo

- Aurora
- Amazon RDS
- Servicio de datos de Amazon RDS
- Amazon SES

Ejemplos de Amazon Redshift usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Amazon Redshift.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios

Introducción

Hello Amazon Redshift

En el siguiente ejemplo de código se muestra cómo empezar a utilizar Amazon Redshift.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.redshift.RedshiftClient;
import software.amazon.awssdk.services.redshift.paginators.DescribeClustersIterable;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloRedshift {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        RedshiftClient redshiftClient = RedshiftClient.builder()
            .region(region)
            .build();

        listClustersPaginator(redshiftClient);
    }

    public static void listClustersPaginator(RedshiftClient redshiftClient) {
        DescribeClustersIterable clustersIterable =
 redshiftClient.describeClustersPaginator();
        clustersIterable.stream()
            .flatMap(r -> r.clusters().stream())
            .forEach(cluster -> System.out
                .println(" Cluster identifier: " + cluster.clusterIdentifier() + "
 status = " + cluster.clusterStatus()));
    }
}
```

- Para obtener más información sobre la API, consulta DescribeClustersla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crear un clúster de Redshift.
- Enumerar las bases de datos del clúster.
- Crear una tabla denominada "Movies".
- Rellenar la tabla "Movies".
- Consultar la tabla "Movies" por año.
- Modificar el clúster de Redshift.
- Eliminar el clúster de Amazon Redshift.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario interactivo en el que se demuestren las características de Amazon Redshift.

```
import com.example.redshift.User;
import com.google.gson.Gson;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.redshift.model.ClusterAlreadyExistsException;
import software.amazon.awssdk.services.redshift.model.CreateClusterResponse;
import software.amazon.awssdk.services.redshift.model.DeleteClusterResponse;
import software.amazon.awssdk.services.redshift.model.ModifyClusterResponse;
import software.amazon.awssdk.services.redshift.model.RedshiftException;
import software.amazon.awssdk.services.redshiftdata.model.ExecuteStatementResponse;
import software.amazon.awssdk.services.redshiftdata.model.RedshiftDataException;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;
import software.amazon.awssdk.services.secretsmanager.SecretsManagerClient;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueRequest;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
```

```
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 *
 *  This example requires an AWS Secrets Manager secret that contains the
 *  database credentials. If you do not create a
 *  secret that specifies user name and password, this example will not work. For
 details, see:
 *
 *  https://docs.aws.amazon.com/secretsmanager/latest/userguide/integrating_how-
services-use-secrets_RS.html
 *
 This Java example performs these tasks:
 *
 * 1. Prompts the user for a unique cluster ID or use the default value.
 * 2. Creates a Redshift cluster with the specified or default cluster Id value.
 * 3. Waits until the Redshift cluster is available for use.
 * 4. Lists all databases using a pagination API call.
 * 5. Creates a table named "Movies" with fields ID, title, and year.
 * 6. Inserts a specified number of records into the "Movies" table by reading the
 Movies JSON file.
 * 7. Prompts the user for a movie release year.
 * 8. Runs a SQL query to retrieve movies released in the specified year.
 * 9. Modifies the Redshift cluster.
 * 10. Prompts the user for confirmation to delete the Redshift cluster.
 * 11. If confirmed, deletes the specified Redshift cluster.
 */

public class RedshiftScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final Logger logger =
 LoggerFactory.getLogger(RedshiftScenario.class);

    static RedshiftActions redshiftActions = new RedshiftActions();
    public static void main(String[] args) throws Exception {
        final String usage = """

            Usage:
                <jsonFilePath> <secretName>\s

            Where:
```

```
                jsonFilePath - The path to the Movies JSON file (you can locate that
file in ../../../resources/sample_files/movies.json)
                secretName - The name of the secret that belongs to Secret Manager
that stores the user name and password used in this scenario.
            """;

        if (args.length != 2) {
            logger.info(usage);
            return;
        }

        String jsonFilePath = args[0];
        String secretName = args[1];
        Scanner scanner = new Scanner(System.in);
        logger.info(DASHES);
        logger.info("Welcome to the Amazon Redshift SDK Basics scenario.");
        logger.info("""
            This Java program demonstrates how to interact with Amazon Redshift by
using the AWS SDK for Java (v2).\s
            Amazon Redshift is a fully managed, petabyte-scale data warehouse
service hosted in the cloud.

            The program's primary functionalities include cluster creation,
verification of cluster readiness,\s
            list databases, table creation, data population within the table, and
execution of SQL statements.
            Furthermore, it demonstrates the process of querying data from the Movie
table.\s

            Upon completion of the program, all AWS resources are cleaned up.
            """);

        logger.info("Lets get started...");
        logger.info("""
            First, we will retrieve the user name and password from Secrets Manager.

            Using Amazon Secrets Manager to store Redshift credentials provides
several security benefits.
            It allows you to securely store and manage sensitive information, such
as passwords, API keys, and
            database credentials, without embedding them directly in your
application code.

            More information can be found here:
```

```
            https://docs.aws.amazon.com/secretsmanager/latest/userguide/
integrating_how-services-use-secrets_RS.html
            """);
        Gson gson = new Gson();
        User user = gson.fromJson(String.valueOf(getSecretValues(secretName)),
 User.class);
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        try {
            runScenario(user, scanner, jsonFilePath);
        } catch (RuntimeException e) {
            e.printStackTrace();
        } catch (Throwable e) {
            throw new RuntimeException(e);
        }
    }

    private static void runScenario(User user, Scanner scanner,  String
 jsonFilePath) throws Throwable {
        String databaseName = "dev";
        System.out.println(DASHES);
        logger.info("Create a Redshift Cluster");
        logger.info("A Redshift cluster refers to the collection of computing
 resources and storage that work together to process and analyze large volumes of
 data.");
        logger.info("Enter a cluster id value or accept the default by hitting Enter
(default is redshift-cluster-movies): ");
        String userClusterId = scanner.nextLine();
        String clusterId = userClusterId.isEmpty() ? "redshift-cluster-movies" :
userClusterId;
        try {
            CompletableFuture<CreateClusterResponse> future =
 redshiftActions.createClusterAsync(clusterId, user.getUserName(),
user.getUserPassword());
            CreateClusterResponse response = future.join();
            logger.info("Cluster successfully created. Cluster Identifier {} ",
 response.cluster().clusterIdentifier());

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof ClusterAlreadyExistsException) {
```

```
                logger.info("The Cluster {} already exists. Moving on...",
 clusterId);
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("Wait until {} is available.", clusterId);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
 redshiftActions.waitForClusterReadyAsync(clusterId);
            future.join();
            logger.info("Cluster is ready!");

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftException redshiftEx) {
                logger.info("Redshift error occurred: Error message: {}, Error code
 {}", redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        String databaseInfo = """
            When you created $clusteridD, the dev database is created by default and
 used in this scenario.\s

            To create a custom database, you need to have a CREATEDB privilege.\s
            For more information, see the documentation here: https://
docs.aws.amazon.com/redshift/latest/dg/r_CREATE_DATABASE.html.
           """.replace("$clusteridD", clusterId);

        logger.info(databaseInfo);
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
```

```
        logger.info("List databases in {} ",clusterId);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
redshiftActions.listAllDatabasesAsync(clusterId, user.getUserName(), "dev");
            future.join();
            logger.info("Databases listed successfully.");

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.error("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.error("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("Now you will create a table named Movies.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<ExecuteStatementResponse> future =
redshiftActions.createTableAsync(clusterId, databaseName, user.getUserName());
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("Populate the Movies table using the Movies.json file.");
        logger.info("Specify the number of records you would like to add to the
Movies Table.");
```

```
        logger.info("Please enter a value between 50 and 200.");
        int numRecords;
        do {
            logger.info("Enter a value: ");
            while (!scanner.hasNextInt()) {
                logger.info("Invalid input. Please enter a value between 50 and
200.");
                logger.info("Enter a year: ");
                scanner.next();
            }
            numRecords = scanner.nextInt();
        } while (numRecords < 50 || numRecords > 200);
        try {
            redshiftActions.popTableAsync(clusterId, databaseName,
user.getUserName(), jsonFilePath, numRecords).join();  // Wait for the operation to
complete
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("Query the Movies table by year. Enter a value between
2012-2014.");
        int movieYear;
        do {
            logger.info("Enter a year: ");
            while (!scanner.hasNextInt()) {
                logger.info("Invalid input. Please enter a valid year between 2012
and 2014.");
                logger.info("Enter a year: ");
                scanner.next();
            }
            movieYear = scanner.nextInt();
            scanner.nextLine();
        } while (movieYear < 2012 || movieYear > 2014);
```

```
        String id;
        try {
            CompletableFuture<String> future =
redshiftActions.queryMoviesByYearAsync(databaseName, user.getUserName(), movieYear,
clusterId);
            id = future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }

        logger.info("The identifier of the statement is " + id);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
redshiftActions.checkStatementAsync(id);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future = redshiftActions.getResultsAsync(id);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
```

```
                logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("Now you will modify the Redshift cluster.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<ModifyClusterResponse> future =
redshiftActions.modifyClusterAsync(clusterId);;
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("Would you like to delete the Amazon Redshift cluster? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            logger.info("You selected to delete {} ", clusterId);
            waitForInputToContinue(scanner);
            try {
                CompletableFuture<DeleteClusterResponse> future =
redshiftActions.deleteRedshiftClusterAsync(clusterId);;
                future.join();

            } catch (RuntimeException rt) {
                Throwable cause = rt.getCause();
```

```
                if (cause instanceof RedshiftDataException redshiftEx) {
                    logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
                } else {
                    logger.info("An unexpected error occurred: {}",
rt.getMessage());
                }
                throw cause;
            }
        } else {
            logger.info("The {}  was not deleted", clusterId);
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("This concludes the Amazon Redshift SDK Basics scenario.");
        logger.info(DASHES);
    }

    private static SecretsManagerClient getSecretClient() {
        Region region = Region.US_EAST_1;
        return SecretsManagerClient.builder()
            .region(region)
            .build();
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println("");
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }

    // Get the Amazon Redshift credentials from AWS Secrets Manager.
```

```
    private static String getSecretValues(String secretName) {
        SecretsManagerClient secretClient = getSecretClient();
        GetSecretValueRequest valueRequest = GetSecretValueRequest.builder()
            .secretId(secretName)
            .build();

        GetSecretValueResponse valueResponse =
 secretClient.getSecretValue(valueRequest);
        return valueResponse.secretString();
    }
}
```

Una clase contenedora para métodos del SDK de Amazon Redshift.

```
public class RedshiftActions {

    private static final Logger logger =
 LoggerFactory.getLogger(RedshiftActions.class);
    private static RedshiftDataAsyncClient redshiftDataAsyncClient;

    private static RedshiftAsyncClient redshiftAsyncClient;

    private static RedshiftAsyncClient getAsyncClient() {
        if (redshiftAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            redshiftAsyncClient = RedshiftAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
```

```
        }
        return redshiftAsyncClient;
    }

    private static RedshiftDataAsyncClient getAsyncDataClient() {
        if (redshiftDataAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            redshiftDataAsyncClient = RedshiftDataAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return redshiftDataAsyncClient;
    }

    /**
     * Creates a new Amazon Redshift cluster asynchronously.
     * @param clusterId     the unique identifier for the cluster
     * @param username      the username for the administrative user
     * @param userPassword  the password for the administrative user
     * @return a CompletableFuture that represents the asynchronous operation of
creating the cluster
     * @throws RuntimeException if the cluster creation fails
     */
    public CompletableFuture<CreateClusterResponse> createClusterAsync(String
clusterId, String username, String userPassword) {
        CreateClusterRequest clusterRequest = CreateClusterRequest.builder()
            .clusterIdentifier(clusterId)
            .masterUsername(username)
            .masterUserPassword(userPassword)
            .nodeType("ra3.4xlarge")
```

```
            .publiclyAccessible(true)
            .numberOfNodes(2)
            .build();

        return getAsyncClient().createCluster(clusterRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("Created cluster ");
                } else {
                    throw new RuntimeException("Failed to create cluster: " +
exception.getMessage(), exception);
                }
            });
    }

    /**
     * Waits asynchronously for the specified cluster to become available.
     * @param clusterId the identifier of the cluster to wait for
     * @return a {@link CompletableFuture} that completes when the cluster is ready
     */
    public CompletableFuture<Void> waitForClusterReadyAsync(String clusterId) {
        DescribeClustersRequest clustersRequest = DescribeClustersRequest.builder()
            .clusterIdentifier(clusterId)
            .build();

        logger.info("Waiting for cluster to become available. This may take a few
minutes.");
        long startTime = System.currentTimeMillis();

        // Recursive method to poll the cluster status.
        return checkClusterStatusAsync(clustersRequest, startTime);
    }

    private CompletableFuture<Void> checkClusterStatusAsync(DescribeClustersRequest
clustersRequest, long startTime) {
        return getAsyncClient().describeClusters(clustersRequest)
            .thenCompose(clusterResponse -> {
                List<Cluster> clusterList = clusterResponse.clusters();
                boolean clusterReady = false;
                for (Cluster cluster : clusterList) {
                    if ("available".equals(cluster.clusterStatus())) {
                        clusterReady = true;
                        break;
                    }
```

```
                }

                if (clusterReady) {
                    logger.info(String.format("Cluster is available!"));
                    return CompletableFuture.completedFuture(null);
                } else {
                    long elapsedTimeMillis = System.currentTimeMillis() - startTime;
                    long elapsedSeconds = elapsedTimeMillis / 1000;
                    long minutes = elapsedSeconds / 60;
                    long seconds = elapsedSeconds % 60;
                    System.out.printf("\rElapsed Time: %02d:%02d - Waiting for
cluster...", minutes, seconds);
                    System.out.flush();

                    // Wait 1 second before the next status check
                    return CompletableFuture.runAsync(() -> {
                        try {
                            TimeUnit.SECONDS.sleep(1);
                        } catch (InterruptedException e) {
                            throw new RuntimeException("Error during sleep: " +
e.getMessage(), e);
                        }
                    }).thenCompose(ignored ->
checkClusterStatusAsync(clustersRequest, startTime));
                }
            }).exceptionally(exception -> {
                throw new RuntimeException("Failed to get cluster status: " +
exception.getMessage(), exception);
            });
    }

    /**
     * Lists all databases asynchronously for the specified cluster, database user,
and database.
     * @param clusterId the identifier of the cluster to list databases for
     * @param dbUser the database user to use for the list databases request
     * @param database the database to list databases for
     * @return a {@link CompletableFuture} that completes when the database listing
is complete, or throws a {@link RuntimeException} if there was an error
     */
    public CompletableFuture<Void> listAllDatabasesAsync(String clusterId, String
dbUser, String database) {
        ListDatabasesRequest databasesRequest = ListDatabasesRequest.builder()
            .clusterIdentifier(clusterId)
```

```
            .dbUser(dbUser)
            .database(database)
            .build();

        // Asynchronous paginator for listing databases.
        ListDatabasesPublisher databasesPaginator =
getAsyncDataClient().listDatabasesPaginator(databasesRequest);
        CompletableFuture<Void> future = databasesPaginator.subscribe(response -> {
            response.databases().forEach(db -> {
                logger.info("The database name is {} ", db);
            });
        });

        // Return the future for asynchronous handling.
        return future.exceptionally(exception -> {
            throw new RuntimeException("Failed to list databases: " +
exception.getMessage(), exception);
        });
    }

    /**
     * Creates an asynchronous task to execute a SQL statement for creating a new
table.
     *
     * @param clusterId    the identifier of the Amazon Redshift cluster
     * @param databaseName the name of the database to create the table in
     * @param userName     the username to use for the database connection
     * @return a {@link CompletableFuture} that completes with the result of the SQL
statement execution
     * @throws RuntimeException if there is an error creating the table
     */
    public CompletableFuture<ExecuteStatementResponse> createTableAsync(String
clusterId, String databaseName, String userName) {
        ExecuteStatementRequest createTableRequest =
ExecuteStatementRequest.builder()
            .clusterIdentifier(clusterId)
            .dbUser(userName)
            .database(databaseName)
            .sql("CREATE TABLE Movies (" +
                "id INT PRIMARY KEY, " +
                "title VARCHAR(100), " +
                "year INT)")
            .build();
```

```
        return getAsyncDataClient().executeStatement(createTableRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Error creating table: " +
exception.getMessage(), exception);
                } else {
                    logger.info("Table created: Movies");
                }
            });
    }

    /**
     * Asynchronously pops a table from a JSON file.
     *
     * @param clusterId   the ID of the cluster
     * @param databaseName the name of the database
     * @param userName    the username
     * @param fileName    the name of the JSON file
     * @param number      the number of records to process
     * @return a CompletableFuture that completes with the number of records added
to the Movies table
     */
    public CompletableFuture<Integer> popTableAsync(String clusterId, String
databaseName, String userName, String fileName, int number) {
        return CompletableFuture.supplyAsync(() -> {
                try {
                    JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                    JsonNode rootNode = new ObjectMapper().readTree(parser);
                    Iterator<JsonNode> iter = rootNode.iterator();
                    return iter;
                } catch (IOException e) {
                    throw new RuntimeException("Failed to read or parse JSON file: "
+ e.getMessage(), e);
                }
            }).thenCompose(iter -> processNodesAsync(clusterId, databaseName,
userName, iter, number))
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    logger.info("Error {} ", exception.getMessage());
                } else {
                    logger.info("{} records were added to the Movies table." ,
result);
                }
```

```
            });
    }

    private CompletableFuture<Integer> processNodesAsync(String clusterId, String
databaseName, String userName, Iterator<JsonNode> iter, int number) {
        return CompletableFuture.supplyAsync(() -> {
            int t = 0;
            try {
                while (iter.hasNext()) {
                    if (t == number)
                        break;
                    JsonNode currentNode = iter.next();
                    int year = currentNode.get("year").asInt();
                    String title = currentNode.get("title").asText();

                    // Use SqlParameter to avoid SQL injection.
                    List<SqlParameter> parameterList = new ArrayList<>();
                    String sqlStatement = "INSERT INTO Movies
VALUES( :id , :title, :year);";
                    SqlParameter idParam = SqlParameter.builder()
                        .name("id")
                        .value(String.valueOf(t))
                        .build();

                    SqlParameter titleParam = SqlParameter.builder()
                        .name("title")
                        .value(title)
                        .build();

                    SqlParameter yearParam = SqlParameter.builder()
                        .name("year")
                        .value(String.valueOf(year))
                        .build();
                    parameterList.add(idParam);
                    parameterList.add(titleParam);
                    parameterList.add(yearParam);

                    ExecuteStatementRequest insertStatementRequest =
ExecuteStatementRequest.builder()
                        .clusterIdentifier(clusterId)
                        .sql(sqlStatement)
                        .database(databaseName)
                        .dbUser(userName)
                        .parameters(parameterList)
```

```
                        .build();

                    getAsyncDataClient().executeStatement(insertStatementRequest);
                    logger.info("Inserted: " + title + " (" + year + ")");
                    t++;
                }
            } catch (RedshiftDataException e) {
                throw new RuntimeException("Error inserting data: " +
e.getMessage(), e);
            }
            return t;
        });
    }

    /**
     * Checks the status of an SQL statement asynchronously and handles the
completion of the statement.
     *
     * @param sqlId the ID of the SQL statement to check
     * @return a {@link CompletableFuture} that completes when the SQL statement's
status is either "FINISHED" or "FAILED"
     */
    public CompletableFuture<Void> checkStatementAsync(String sqlId) {
        DescribeStatementRequest statementRequest =
DescribeStatementRequest.builder()
            .id(sqlId)
            .build();

        return getAsyncDataClient().describeStatement(statementRequest)
            .thenCompose(response -> {
                String status = response.statusAsString();
                logger.info("... Status: {} ", status);

                if ("FAILED".equals(status)) {
                    throw new RuntimeException("The Query Failed. Ending program");
                } else if ("FINISHED".equals(status)) {
                    return CompletableFuture.completedFuture(null);
                } else {
                    // Sleep for 1 second and recheck status
                    return CompletableFuture.runAsync(() -> {
                        try {
                            TimeUnit.SECONDS.sleep(1);
                        } catch (InterruptedException e) {
```

```
                            throw new RuntimeException("Error during sleep: " +
e.getMessage(), e);
                        }
                    }).thenCompose(ignore -> checkStatementAsync(sqlId)); //
Recursively call until status is FINISHED or FAILED
                }
            }).whenComplete((result, exception) -> {
                if (exception != null) {
                    // Handle exceptions
                    logger.info("Error: {} ", exception.getMessage());
                } else {
                    logger.info("The statement is finished!");
                }
            });
    }

    /**
     * Asynchronously retrieves the results of a statement execution.
     *
     * @param statementId the ID of the statement for which to retrieve the results
     * @return a {@link CompletableFuture} that completes when the statement result
has been processed
     */
    public CompletableFuture<Void> getResultsAsync(String statementId) {
        GetStatementResultRequest resultRequest =
GetStatementResultRequest.builder()
            .id(statementId)
            .build();

        return getAsyncDataClient().getStatementResult(resultRequest)
            .handle((response, exception) -> {
                if (exception != null) {
                    logger.info("Error getting statement result {} ",
exception.getMessage());
                    throw new RuntimeException("Error getting statement result: " +
exception.getMessage(), exception);
                }

                // Extract and print the field values using streams if the response
is valid.
                response.records().stream()
                    .flatMap(List::stream)
                    .map(Field::stringValue)
                    .filter(value -> value != null)
```

```
                    .forEach(value -> System.out.println("The Movie title field is "
+ value));

                return response;
            }).thenAccept(response -> {
                // Optionally add more logic here if needed after handling the
response
            });
    }


    /**
     * Asynchronously queries movies by a given year from a Redshift database.
     *
     * @param database    the name of the database to query
     * @param dbUser      the user to connect to the database with
     * @param year        the year to filter the movies by
     * @param clusterId   the identifier of the Redshift cluster to connect to
     * @return a {@link CompletableFuture} containing the response ID of the
executed SQL statement
     */
    public CompletableFuture<String> queryMoviesByYearAsync(String database,
                                                            String dbUser,
                                                            int year,
                                                            String clusterId)
{

        String sqlStatement = "SELECT * FROM Movies WHERE year = :year";
        SqlParameter yearParam = SqlParameter.builder()
            .name("year")
            .value(String.valueOf(year))
            .build();

        ExecuteStatementRequest statementRequest = ExecuteStatementRequest.builder()
            .clusterIdentifier(clusterId)
            .database(database)
            .dbUser(dbUser)
            .parameters(yearParam)
            .sql(sqlStatement)
            .build();

        return CompletableFuture.supplyAsync(() -> {
            try {
```

```
                ExecuteStatementResponse response =
getAsyncDataClient().executeStatement(statementRequest).join(); // Use join() to
wait for the result
                return response.id();
            } catch (RedshiftDataException e) {
                throw new RuntimeException("Error executing statement: " +
e.getMessage(), e);
            }
        }).exceptionally(exception -> {
            logger.info("Error: {}", exception.getMessage());
            return "";
        });
    }

    /**
     * Modifies an Amazon Redshift cluster asynchronously.
     *
     * @param clusterId the identifier of the cluster to be modified
     * @return a {@link CompletableFuture} that completes when the cluster
modification is complete
     */
    public CompletableFuture<ModifyClusterResponse> modifyClusterAsync(String
clusterId) {
        ModifyClusterRequest modifyClusterRequest = ModifyClusterRequest.builder()
            .clusterIdentifier(clusterId)
            .preferredMaintenanceWindow("wed:07:30-wed:08:00")
            .build();

        return getAsyncClient().modifyCluster(modifyClusterRequest)
            .whenComplete((clusterResponse, exception) -> {
                if (exception != null) {
                    if (exception.getCause() instanceof RedshiftException) {
                        logger.info("Error: {} ", exception.getMessage());
                    } else {
                        logger.info("Unexpected error: {} ",
exception.getMessage());
                    }
                } else {
                    logger.info("The modified cluster was successfully modified and
has "
                        + clusterResponse.cluster().preferredMaintenanceWindow() + "
as the maintenance window");
                }
            });
```

```
    }

    /**
     * Deletes a Redshift cluster asynchronously.
     *
     * @param clusterId the identifier of the Redshift cluster to be deleted
     * @return a {@link CompletableFuture} that represents the asynchronous
 operation of deleting the Redshift cluster
     */
    public CompletableFuture<DeleteClusterResponse>
 deleteRedshiftClusterAsync(String clusterId) {
        DeleteClusterRequest deleteClusterRequest = DeleteClusterRequest.builder()
            .clusterIdentifier(clusterId)
            .skipFinalClusterSnapshot(true)
            .build();

        return getAsyncClient().deleteCluster(deleteClusterRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    // Handle exceptions
                    if (exception.getCause() instanceof RedshiftException) {
                        logger.info("Error: {}", exception.getMessage());
                    } else {
                        logger.info("Unexpected error: {}", exception.getMessage());
                    }
                } else {
                    // Handle successful response
                    logger.info("The status is {}",
 response.cluster().clusterStatus());
                }
            });
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateCluster
  - DescribeClusters
  - DescribeStatement
  - ExecuteStatement

- GetStatementResult
- ListDatabasesPaginator
- ModifyCluster

Acciones

`CreateCluster`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateCluster`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Cree el clúster.

```
   /**
    * Creates a new Amazon Redshift cluster asynchronously.
    * @param clusterId     the unique identifier for the cluster
    * @param username      the username for the administrative user
    * @param userPassword  the password for the administrative user
    * @return a CompletableFuture that represents the asynchronous operation of
creating the cluster
    * @throws RuntimeException if the cluster creation fails
    */
   public CompletableFuture<CreateClusterResponse> createClusterAsync(String
clusterId, String username, String userPassword) {
       CreateClusterRequest clusterRequest = CreateClusterRequest.builder()
           .clusterIdentifier(clusterId)
           .masterUsername(username)
           .masterUserPassword(userPassword)
           .nodeType("ra3.4xlarge")
           .publiclyAccessible(true)
           .numberOfNodes(2)
           .build();

       return getAsyncClient().createCluster(clusterRequest)
```

```
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("Created cluster ");
                } else {
                    throw new RuntimeException("Failed to create cluster: " +
exception.getMessage(), exception);
                }
            });
    }
```

- Para obtener más información sobre la API, consulta CreateClusterla Referencia AWS SDK for Java 2.x de la API.

`DeleteCluster`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteCluster`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Elimine el clúster.

```
    /**
     * Deletes a Redshift cluster asynchronously.
     *
     * @param clusterId the identifier of the Redshift cluster to be deleted
     * @return a {@link CompletableFuture} that represents the asynchronous
operation of deleting the Redshift cluster
     */
    public CompletableFuture<DeleteClusterResponse>
deleteRedshiftClusterAsync(String clusterId) {
        DeleteClusterRequest deleteClusterRequest = DeleteClusterRequest.builder()
            .clusterIdentifier(clusterId)
            .skipFinalClusterSnapshot(true)
            .build();
```

```
        return getAsyncClient().deleteCluster(deleteClusterRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    // Handle exceptions
                    if (exception.getCause() instanceof RedshiftException) {
                        logger.info("Error: {}", exception.getMessage());
                    } else {
                        logger.info("Unexpected error: {}", exception.getMessage());
                    }
                } else {
                    // Handle successful response
                    logger.info("The status is {}",
response.cluster().clusterStatus());
                }
            });
    }
```

- Para obtener más información sobre la API, consulta DeleteClusterla Referencia AWS SDK for Java 2.x de la API.

`DescribeClusters`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeClusters`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Describir el clúster.

```
    /**
     * Waits asynchronously for the specified cluster to become available.
     * @param clusterId the identifier of the cluster to wait for
     * @return a {@link CompletableFuture} that completes when the cluster is ready
     */
    public CompletableFuture<Void> waitForClusterReadyAsync(String clusterId) {
        DescribeClustersRequest clustersRequest = DescribeClustersRequest.builder()
```

```
            .clusterIdentifier(clusterId)
            .build();

        logger.info("Waiting for cluster to become available. This may take a few
minutes.");
        long startTime = System.currentTimeMillis();

        // Recursive method to poll the cluster status.
        return checkClusterStatusAsync(clustersRequest, startTime);
    }

    private CompletableFuture<Void> checkClusterStatusAsync(DescribeClustersRequest
clustersRequest, long startTime) {
        return getAsyncClient().describeClusters(clustersRequest)
            .thenCompose(clusterResponse -> {
                List<Cluster> clusterList = clusterResponse.clusters();
                boolean clusterReady = false;
                for (Cluster cluster : clusterList) {
                    if ("available".equals(cluster.clusterStatus())) {
                        clusterReady = true;
                        break;
                    }
                }

                if (clusterReady) {
                    logger.info(String.format("Cluster is available!"));
                    return CompletableFuture.completedFuture(null);
                } else {
                    long elapsedTimeMillis = System.currentTimeMillis() - startTime;
                    long elapsedSeconds = elapsedTimeMillis / 1000;
                    long minutes = elapsedSeconds / 60;
                    long seconds = elapsedSeconds % 60;
                    System.out.printf("\rElapsed Time: %02d:%02d - Waiting for
cluster...", minutes, seconds);
                    System.out.flush();

                    // Wait 1 second before the next status check
                    return CompletableFuture.runAsync(() -> {
                        try {
                            TimeUnit.SECONDS.sleep(1);
                        } catch (InterruptedException e) {
                            throw new RuntimeException("Error during sleep: " +
e.getMessage(), e);
                        }
```

```
                    }).thenCompose(ignored ->
checkClusterStatusAsync(clustersRequest, startTime));
                }
            }).exceptionally(exception -> {
                throw new RuntimeException("Failed to get cluster status: " +
exception.getMessage(), exception);
            });
    }
```

- Para obtener más información sobre la API, consulta DescribeClustersla Referencia AWS SDK for Java 2.x de la API.

`DescribeStatement`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeStatement`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Checks the status of an SQL statement asynchronously and handles the
completion of the statement.
     *
     * @param sqlId the ID of the SQL statement to check
     * @return a {@link CompletableFuture} that completes when the SQL statement's
status is either "FINISHED" or "FAILED"
     */
    public CompletableFuture<Void> checkStatementAsync(String sqlId) {
        DescribeStatementRequest statementRequest =
DescribeStatementRequest.builder()
            .id(sqlId)
            .build();

        return getAsyncDataClient().describeStatement(statementRequest)
            .thenCompose(response -> {
```

```
                String status = response.statusAsString();
                logger.info("... Status: {} ", status);

                if ("FAILED".equals(status)) {
                    throw new RuntimeException("The Query Failed. Ending program");
                } else if ("FINISHED".equals(status)) {
                    return CompletableFuture.completedFuture(null);
                } else {
                    // Sleep for 1 second and recheck status
                    return CompletableFuture.runAsync(() -> {
                        try {
                            TimeUnit.SECONDS.sleep(1);
                        } catch (InterruptedException e) {
                            throw new RuntimeException("Error during sleep: " +
e.getMessage(), e);
                        }
                    }).thenCompose(ignore -> checkStatementAsync(sqlId)); //
Recursively call until status is FINISHED or FAILED
                }
            }).whenComplete((result, exception) -> {
                if (exception != null) {
                    // Handle exceptions
                    logger.info("Error: {} ", exception.getMessage());
                } else {
                    logger.info("The statement is finished!");
                }
            });
    }
```

- Para obtener más información sobre la API, consulta DescribeStatementla Referencia AWS SDK for Java 2.x de la API.

`ExecuteStatement`

En el siguiente ejemplo de código, se muestra cómo utilizar `ExecuteStatement`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecuta una instrucción SQL para crear una tabla de base de datos.

```
   /**
    * Creates an asynchronous task to execute a SQL statement for creating a new
table.
    *
    * @param clusterId    the identifier of the Amazon Redshift cluster
    * @param databaseName the name of the database to create the table in
    * @param userName     the username to use for the database connection
    * @return a {@link CompletableFuture} that completes with the result of the SQL
statement execution
    * @throws RuntimeException if there is an error creating the table
    */
   public CompletableFuture<ExecuteStatementResponse> createTableAsync(String
clusterId, String databaseName, String userName) {
       ExecuteStatementRequest createTableRequest =
ExecuteStatementRequest.builder()
           .clusterIdentifier(clusterId)
           .dbUser(userName)
           .database(databaseName)
           .sql("CREATE TABLE Movies (" +
               "id INT PRIMARY KEY, " +
               "title VARCHAR(100), " +
               "year INT)")
           .build();

       return getAsyncDataClient().executeStatement(createTableRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   throw new RuntimeException("Error creating table: " +
exception.getMessage(), exception);
               } else {
                   logger.info("Table created: Movies");
               }
           });
```

```
    }
```

Ejecuta una instrucción SQL para insertar datos en una tabla de base de datos.

```
    /**
     * Asynchronously pops a table from a JSON file.
     *
     * @param clusterId   the ID of the cluster
     * @param databaseName the name of the database
     * @param userName    the username
     * @param fileName    the name of the JSON file
     * @param number      the number of records to process
     * @return a CompletableFuture that completes with the number of records added
to the Movies table
     */
    public CompletableFuture<Integer> popTableAsync(String clusterId, String
databaseName, String userName, String fileName, int number) {
        return CompletableFuture.supplyAsync(() -> {
                try {
                    JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                    JsonNode rootNode = new ObjectMapper().readTree(parser);
                    Iterator<JsonNode> iter = rootNode.iterator();
                    return iter;
                } catch (IOException e) {
                    throw new RuntimeException("Failed to read or parse JSON file: "
+ e.getMessage(), e);
                }
            }).thenCompose(iter -> processNodesAsync(clusterId, databaseName,
userName, iter, number))
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    logger.info("Error {} ", exception.getMessage());
                } else {
                    logger.info("{} records were added to the Movies table." ,
result);
                }
            });
    }

    private CompletableFuture<Integer> processNodesAsync(String clusterId, String
databaseName, String userName, Iterator<JsonNode> iter, int number) {
```

```
        return CompletableFuture.supplyAsync(() -> {
            int t = 0;
            try {
                while (iter.hasNext()) {
                    if (t == number)
                        break;
                    JsonNode currentNode = iter.next();
                    int year = currentNode.get("year").asInt();
                    String title = currentNode.get("title").asText();

                    // Use SqlParameter to avoid SQL injection.
                    List<SqlParameter> parameterList = new ArrayList<>();
                    String sqlStatement = "INSERT INTO Movies
VALUES( :id , :title, :year);";
                    SqlParameter idParam = SqlParameter.builder()
                        .name("id")
                        .value(String.valueOf(t))
                        .build();

                    SqlParameter titleParam = SqlParameter.builder()
                        .name("title")
                        .value(title)
                        .build();

                    SqlParameter yearParam = SqlParameter.builder()
                        .name("year")
                        .value(String.valueOf(year))
                        .build();
                    parameterList.add(idParam);
                    parameterList.add(titleParam);
                    parameterList.add(yearParam);

                    ExecuteStatementRequest insertStatementRequest =
ExecuteStatementRequest.builder()
                        .clusterIdentifier(clusterId)
                        .sql(sqlStatement)
                        .database(databaseName)
                        .dbUser(userName)
                        .parameters(parameterList)
                        .build();

                    getAsyncDataClient().executeStatement(insertStatementRequest);
                    logger.info("Inserted: " + title + " (" + year + ")");
                    t++;
```

```
                }
            } catch (RedshiftDataException e) {
                throw new RuntimeException("Error inserting data: " +
e.getMessage(), e);
            }
            return t;
        });
    }
```

Ejecuta una instrucción SQL para consultar una tabla de base de datos.

```
    /**
     * Asynchronously queries movies by a given year from a Redshift database.
     *
     * @param database    the name of the database to query
     * @param dbUser      the user to connect to the database with
     * @param year        the year to filter the movies by
     * @param clusterId   the identifier of the Redshift cluster to connect to
     * @return a {@link CompletableFuture} containing the response ID of the
executed SQL statement
     */
    public CompletableFuture<String> queryMoviesByYearAsync(String database,
                                                            String dbUser,
                                                            int year,
                                                            String clusterId)
{

        String sqlStatement = "SELECT * FROM Movies WHERE year = :year";
        SqlParameter yearParam = SqlParameter.builder()
            .name("year")
            .value(String.valueOf(year))
            .build();

        ExecuteStatementRequest statementRequest = ExecuteStatementRequest.builder()
            .clusterIdentifier(clusterId)
            .database(database)
            .dbUser(dbUser)
            .parameters(yearParam)
            .sql(sqlStatement)
            .build();

        return CompletableFuture.supplyAsync(() -> {
```

```
            try {
                ExecuteStatementResponse response =
getAsyncDataClient().executeStatement(statementRequest).join(); // Use join() to
wait for the result
                return response.id();
            } catch (RedshiftDataException e) {
                throw new RuntimeException("Error executing statement: " +
e.getMessage(), e);
            }
        }).exceptionally(exception -> {
            logger.info("Error: {}", exception.getMessage());
            return "";
        });
    }
```

- Para obtener más información sobre la API, consulta ExecuteStatementla Referencia AWS SDK for Java 2.x de la API.

`GetStatementResult`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetStatementResult`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Compruebe el resultado de la instrucción.

```
    /**
     * Asynchronously retrieves the results of a statement execution.
     *
     * @param statementId the ID of the statement for which to retrieve the results
     * @return a {@link CompletableFuture} that completes when the statement result
has been processed
     */
    public CompletableFuture<Void> getResultsAsync(String statementId) {
```

```
        GetStatementResultRequest resultRequest =
GetStatementResultRequest.builder()
            .id(statementId)
            .build();

        return getAsyncDataClient().getStatementResult(resultRequest)
            .handle((response, exception) -> {
                if (exception != null) {
                    logger.info("Error getting statement result {} ",
exception.getMessage());
                    throw new RuntimeException("Error getting statement result: " +
exception.getMessage(), exception);
                }

                // Extract and print the field values using streams if the response
is valid.
                response.records().stream()
                    .flatMap(List::stream)
                    .map(Field::stringValue)
                    .filter(value -> value != null)
                    .forEach(value -> System.out.println("The Movie title field is "
+ value));

                return response;
            }).thenAccept(response -> {
                // Optionally add more logic here if needed after handling the
response
            });
    }
```

- Para obtener más información sobre la API, consulta GetStatementResultla Referencia AWS SDK for Java 2.x de la API.

`ListDatabases`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListDatabases`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Lists all databases asynchronously for the specified cluster, database user,
and database.
    * @param clusterId the identifier of the cluster to list databases for
    * @param dbUser the database user to use for the list databases request
    * @param database the database to list databases for
    * @return a {@link CompletableFuture} that completes when the database listing
is complete, or throws a {@link RuntimeException} if there was an error
    */
   public CompletableFuture<Void> listAllDatabasesAsync(String clusterId, String
dbUser, String database) {
       ListDatabasesRequest databasesRequest = ListDatabasesRequest.builder()
           .clusterIdentifier(clusterId)
           .dbUser(dbUser)
           .database(database)
           .build();

       // Asynchronous paginator for listing databases.
       ListDatabasesPublisher databasesPaginator =
getAsyncDataClient().listDatabasesPaginator(databasesRequest);
       CompletableFuture<Void> future = databasesPaginator.subscribe(response -> {
           response.databases().forEach(db -> {
               logger.info("The database name is {} ", db);
           });
       });

       // Return the future for asynchronous handling.
       return future.exceptionally(exception -> {
           throw new RuntimeException("Failed to list databases: " +
exception.getMessage(), exception);
       });
   }
```

- Para obtener más información sobre la API, consulta ListDatabasesla Referencia AWS SDK for Java 2.x de la API.

`ModifyCluster`

En el siguiente ejemplo de código, se muestra cómo utilizar `ModifyCluster`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Modificar un clúster

```
   /**
    * Modifies an Amazon Redshift cluster asynchronously.
    *
    * @param clusterId the identifier of the cluster to be modified
    * @return a {@link CompletableFuture} that completes when the cluster
modification is complete
    */
   public CompletableFuture<ModifyClusterResponse> modifyClusterAsync(String
clusterId) {
       ModifyClusterRequest modifyClusterRequest = ModifyClusterRequest.builder()
           .clusterIdentifier(clusterId)
           .preferredMaintenanceWindow("wed:07:30-wed:08:00")
           .build();

       return getAsyncClient().modifyCluster(modifyClusterRequest)
           .whenComplete((clusterResponse, exception) -> {
               if (exception != null) {
                   if (exception.getCause() instanceof RedshiftException) {
                       logger.info("Error: {} ", exception.getMessage());
                   } else {
                       logger.info("Unexpected error: {} ",
exception.getMessage());
                   }
               } else {
```

```
                    logger.info("The modified cluster was successfully modified and
has "
                        + clusterResponse.cluster().preferredMaintenanceWindow() + "
as the maintenance window");
                }
            });
    }
```

- Para obtener más información sobre la API, consulta ModifyClusterla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Crear una aplicación web para realizar un seguimiento de los datos de Amazon Redshift

El siguiente ejemplo de código muestra cómo crear una aplicación web que realice un seguimiento de los elementos de trabajo e informe al respecto con una base de datos de Amazon Redshift.

SDK para Java 2.x

Muestra cómo crear una aplicación web que realice un seguimiento de los elementos de trabajo almacenados en una base de datos de Amazon Redshift e informe al respecto.

Para obtener el código fuente completo y las instrucciones sobre cómo configurar una API REST de Spring que consulte los datos de Amazon Redshift y para que la utilice una aplicación de React, consulte el ejemplo completo en. GitHub

Servicios utilizados en este ejemplo

- Amazon Redshift
- Amazon SES

Ejemplos de Amazon Rekognition usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes AWS SDK for Java 2.x con Amazon Rekognition.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`CompareFaces`

En el siguiente ejemplo de código, se muestra cómo utilizar `CompareFaces`.

Para obtener información, consulte Comparación de rostros en imágenes.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.*;
import software.amazon.awssdk.core.SdkBytes;

import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
```

```
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CompareFaces {
    public static void main(String[] args) {
        final String usage = """
            Usage: <bucketName> <sourceKey> <targetKey>

            Where:
                bucketName - The name of the S3 bucket where the images are stored.
                sourceKey  - The S3 key (file name) for the source image.
                targetKey  - The S3 key (file name) for the target image.
           """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String sourceKey = args[1];
        String targetKey = args[2];

        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();
        compareTwoFaces(rekClient, bucketName, sourceKey, targetKey);
    }

   /**
    * Compares two faces from images stored in an Amazon S3 bucket using AWS
 Rekognition.
    *
    * <p>This method takes two image keys from an S3 bucket and compares the faces
 within them.
    * It prints out the confidence level of matched faces and reports the number of
 unmatched faces.</p>
    *
    * @param rekClient   The {@link RekognitionClient} used to call AWS
 Rekognition.
    * @param bucketName  The name of the S3 bucket containing the images.
```

```
    * @param sourceKey   The object key (file path) for the source image in the S3
bucket.
    * @param targetKey   The object key (file path) for the target image in the S3
bucket.
    * @throws RuntimeException If the Rekognition service returns an error.
    */
   public static void compareTwoFaces(RekognitionClient rekClient, String
bucketName, String sourceKey, String targetKey) {
       try {
           Float similarityThreshold = 70F;
           S3Object s3ObjectSource = S3Object.builder()
                   .bucket(bucketName)
                   .name(sourceKey)
                   .build();

           Image sourceImage = Image.builder()
                   .s3Object(s3ObjectSource)
                   .build();

           S3Object s3ObjectTarget = S3Object.builder()
                   .bucket(bucketName)
                   .name(targetKey)
                   .build();

           Image targetImage = Image.builder()
                   .s3Object(s3ObjectTarget)
                   .build();

           CompareFacesRequest facesRequest = CompareFacesRequest.builder()
                   .sourceImage(sourceImage)
                   .targetImage(targetImage)
                   .similarityThreshold(similarityThreshold)
                   .build();

           // Compare the two images.
           CompareFacesResponse compareFacesResult =
rekClient.compareFaces(facesRequest);
           List<CompareFacesMatch> faceDetails = compareFacesResult.faceMatches();

           for (CompareFacesMatch match : faceDetails) {
               ComparedFace face = match.face();
               BoundingBox position = face.boundingBox();
               System.out.println("Face at " + position.left().toString()
                       + " " + position.top()
```

```
                        + " matches with " + face.confidence().toString()
                        + "% confidence.");
            }

            List<ComparedFace> unmatchedFaces = compareFacesResult.unmatchedFaces();
            System.out.println("There were " + unmatchedFaces.size() + " face(s)
 that did not match.");

        } catch (RekognitionException e) {
            System.err.println("Error comparing faces: " +
 e.awsErrorDetails().errorMessage());
            throw new RuntimeException(e);
        }
    }
}
```

- Para obtener más información sobre la API, consulta CompareFaceslа Referencia AWS SDK for Java 2.x de la API.

`CreateCollection`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateCollection`.

Para obtener información, consulte Creación de una colección.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.CreateCollectionResponse;
import software.amazon.awssdk.services.rekognition.model.CreateCollectionRequest;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateCollection {
    public static void main(String[] args) {
        final String usage = """

            Usage: <collectionName>\s

            Where:
                collectionName - The name of the collection.\s
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Creating collection: " + collectionId);
        createMyCollection(rekClient, collectionId);
        rekClient.close();
    }

    /**
     * Creates a new Amazon Rekognition collection.
     *
     * @param rekClient    the Amazon Rekognition client used to interact with the
 Rekognition service
     * @param collectionId the unique identifier for the collection to be created
     */
    public static void createMyCollection(RekognitionClient rekClient, String
 collectionId) {
        try {
            CreateCollectionRequest collectionRequest =
 CreateCollectionRequest.builder()
```

```
                    .collectionId(collectionId)
                    .build();

            CreateCollectionResponse collectionResponse =
 rekClient.createCollection(collectionRequest);
            System.out.println("CollectionArn: " +
 collectionResponse.collectionArn());
            System.out.println("Status code: " +
 collectionResponse.statusCode().toString());

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta CreateCollectionla Referencia AWS SDK for Java 2.x de la API.

`DeleteCollection`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteCollection`.

Para obtener información, consulte Eliminación de una colección.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.DeleteCollectionRequest;
import software.amazon.awssdk.services.rekognition.model.DeleteCollectionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;

/**
```

```
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteCollection {
    public static void main(String[] args) {
        final String usage = """
            Usage: <collectionId>\s

            Where:
                collectionId - The id of the collection to delete.\s
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Deleting collection: " + collectionId);
        deleteMyCollection(rekClient, collectionId);
        rekClient.close();
    }

    /**
     * Deletes an Amazon Rekognition collection.
     *
     * @param rekClient      An instance of the {@link RekognitionClient} class,
 which is used to interact with the Amazon Rekognition service.
     * @param collectionId   The ID of the collection to be deleted.
     */
    public static void deleteMyCollection(RekognitionClient rekClient, String
 collectionId) {
        try {
            DeleteCollectionRequest deleteCollectionRequest =
 DeleteCollectionRequest.builder()
```

```
                    .collectionId(collectionId)
                    .build();

            DeleteCollectionResponse deleteCollectionResponse =
 rekClient.deleteCollection(deleteCollectionRequest);
            System.out.println(collectionId + ": " +
 deleteCollectionResponse.statusCode().toString());

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteCollectionla Referencia AWS SDK for Java 2.x de la API.

`DeleteFaces`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteFaces`.

Para obtener información, consulte Eliminación de rostros de una colección.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.DeleteFacesRequest;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteFacesFromCollection {
    public static void main(String[] args) {
        final String usage = """
            Usage: <collectionId> <faceId>\s

            Where:
                collectionId - The id of the collection from which faces are
 deleted.\s
                faceId - The id of the face to delete.\s
           """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        String faceId = args[1];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Deleting collection: " + collectionId);
        deleteFacesCollection(rekClient, collectionId, faceId);
        rekClient.close();
    }

    /**
     * Deletes a face from the specified Amazon Rekognition collection.
     *
     * @param rekClient     an instance of the Amazon Rekognition client
     * @param collectionId  the ID of the collection from which the face should be
 deleted
     * @param faceId        the ID of the face to be deleted
     * @throws RekognitionException if an error occurs while deleting the face
     */
    public static void deleteFacesCollection(RekognitionClient rekClient,
            String collectionId,
            String faceId) {
```

```
        try {
            DeleteFacesRequest deleteFacesRequest = DeleteFacesRequest.builder()
                    .collectionId(collectionId)
                    .faceIds(faceId)
                    .build();

            rekClient.deleteFaces(deleteFacesRequest);
            System.out.println("The face was deleted from the collection.");

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteFaceslа Referencia AWS SDK for Java 2.x de la API.

`DescribeCollection`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeCollection`.

Para obtener información, consulte Descripción de una colección.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.DescribeCollectionRequest;
import software.amazon.awssdk.services.rekognition.model.DescribeCollectionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;

/**
```

```
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeCollection {
    public static void main(String[] args) {
        final String usage = """
            Usage:    <collectionName>

            Where:
                collectionName - The name of the Amazon Rekognition collection.\s
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionName = args[0];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        describeColl(rekClient, collectionName);
        rekClient.close();
    }

    /**
     * Describes an Amazon Rekognition collection.
     *
     * @param rekClient         The Amazon Rekognition client used to make the
 request.
     * @param collectionName    The name of the collection to describe.
     *
     * @throws RekognitionException If an error occurs while describing the
 collection.
     */
    public static void describeColl(RekognitionClient rekClient, String
 collectionName) {
        try {
```

```
            DescribeCollectionRequest describeCollectionRequest =
 DescribeCollectionRequest.builder()
                    .collectionId(collectionName)
                    .build();

            DescribeCollectionResponse describeCollectionResponse = rekClient
                    .describeCollection(describeCollectionRequest);
            System.out.println("Collection Arn : " +
 describeCollectionResponse.collectionARN());
            System.out.println("Created : " +
 describeCollectionResponse.creationTimestamp().toString());

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DescribeCollectionla Referencia AWS SDK for Java 2.x de la API.

`DetectFaces`

En el siguiente ejemplo de código, se muestra cómo utilizar `DetectFaces`.

Para obtener información, consulte Detección de rostros en una imagen.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.*;
```

```
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectFaces {
    public static void main(String[] args) {
        final String usage = """

            Usage:   <bucketName> <sourceImage>

            Where:
                bucketName = The name of the Amazon S3 bucket where the source image
 is stored.
                sourceImage - The name of the source image file in the Amazon S3
 bucket. (for example, pic1.png).\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String sourceImage = args[1];
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        detectFacesinImage(rekClient, bucketName, sourceImage);
        rekClient.close();
    }

    /**
     * Detects faces in an image stored in an Amazon S3 bucket using the Amazon
 Rekognition service.
     *
```

```
    * @param rekClient    The Amazon Rekognition client used to interact with the
 Rekognition service.
    * @param bucketName   The name of the Amazon S3 bucket where the source image
 is stored.
    * @param sourceImage  The name of the source image file in the Amazon S3
 bucket.
    */
   public static void detectFacesinImage(RekognitionClient rekClient, String
 bucketName, String sourceImage) {
       try {
           S3Object s3ObjectTarget = S3Object.builder()
               .bucket(bucketName)
               .name(sourceImage)
               .build();

           Image targetImage = Image.builder()
               .s3Object(s3ObjectTarget)
               .build();

           DetectFacesRequest facesRequest = DetectFacesRequest.builder()
               .attributes(Attribute.ALL)
               .image(targetImage)
               .build();

           DetectFacesResponse facesResponse = rekClient.detectFaces(facesRequest);
           List<FaceDetail> faceDetails = facesResponse.faceDetails();
           for (FaceDetail face : faceDetails) {
               AgeRange ageRange = face.ageRange();
               System.out.println("The detected face is estimated to be between "
                       + ageRange.low().toString() + " and " +
 ageRange.high().toString()
                       + " years old.");

               System.out.println("There is a smile : " +
 face.smile().value().toString());
           }

       } catch (RekognitionException e) {
           System.out.println(e.getMessage());
           System.exit(1);
       }
   }
}
```

- Para obtener más información sobre la API, consulta DetectFaceslla Referencia AWS SDK for Java 2.x de la API.

`DetectLabels`

En el siguiente ejemplo de código, se muestra cómo utilizar `DetectLabels`.

Para obtener información, consulte Detección de etiquetas en una imagen.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.*;

import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectLabels {
    public static void main(String[] args) {
        final String usage = """
            Usage: <bucketName> <sourceImage>
```

```
            Where:
                bucketName - The name of the Amazon S3 bucket where the image is
stored
                sourceImage - The name of the image file (for example, pic1.png).\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0] ;
        String sourceImage = args[1] ;
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        detectImageLabels(rekClient, bucketName, sourceImage);
        rekClient.close();
    }

    /**
     * Detects the labels in an image stored in an Amazon S3 bucket using the Amazon
Rekognition service.
     *
     * @param rekClient     the Amazon Rekognition client used to make the detection
request
     * @param bucketName    the name of the Amazon S3 bucket where the image is
stored
     * @param sourceImage   the name of the image file to be analyzed
     */
    public static void detectImageLabels(RekognitionClient rekClient, String
bucketName, String sourceImage) {
        try {
            S3Object s3ObjectTarget = S3Object.builder()
                    .bucket(bucketName)
                    .name(sourceImage)
                    .build();

            Image souImage = Image.builder()
                    .s3Object(s3ObjectTarget)
                    .build();
```

```
            DetectLabelsRequest detectLabelsRequest = DetectLabelsRequest.builder()
                    .image(souImage)
                    .maxLabels(10)
                    .build();

            DetectLabelsResponse labelsResponse =
 rekClient.detectLabels(detectLabelsRequest);
            List<Label> labels = labelsResponse.labels();
            System.out.println("Detected labels for the given photo");
            for (Label label : labels) {
                System.out.println(label.name() + ": " +
 label.confidence().toString());
            }

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DetectLabelsla Referencia AWS SDK for Java 2.x de la API.

`DetectModerationLabels`

En el siguiente ejemplo de código, se muestra cómo utilizar `DetectModerationLabels`.

Para obtener información, consulte Detección de imágenes inapropiadas.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.*;
```

```
import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectModerationLabels {

    public static void main(String[] args) {
        final String usage = """
            Usage:  <bucketName>  <sourceImage>

            Where:
                bucketName - The name of the S3 bucket where the images are stored.
                sourceImage - The name of the image (for example, pic1.png).\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String sourceImage = args[1];
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        detectModLabels(rekClient, bucketName, sourceImage);
        rekClient.close();
    }

    /**
     * Detects moderation labels in an image stored in an Amazon S3 bucket.
     *
```

```
    * @param rekClient      the Amazon Rekognition client to use for the detection
    * @param bucketName     the name of the Amazon S3 bucket where the image is
 stored
    * @param sourceImage    the name of the image file to be analyzed
    *
    * @throws RekognitionException if there is an error during the image detection
 process
    */
   public static void detectModLabels(RekognitionClient rekClient, String
 bucketName, String sourceImage) {
       try {
           S3Object s3ObjectTarget = S3Object.builder()
                   .bucket(bucketName)
                   .name(sourceImage)
                   .build();

           Image targetImage = Image.builder()
                   .s3Object(s3ObjectTarget)
                   .build();

           DetectModerationLabelsRequest moderationLabelsRequest =
 DetectModerationLabelsRequest.builder()
                   .image(targetImage)
                   .minConfidence(60F)
                   .build();

           DetectModerationLabelsResponse moderationLabelsResponse = rekClient
                   .detectModerationLabels(moderationLabelsRequest);
           List<ModerationLabel> labels =
 moderationLabelsResponse.moderationLabels();
           System.out.println("Detected labels for image");
           for (ModerationLabel label : labels) {
               System.out.println("Label: " + label.name()
                       + "\n Confidence: " + label.confidence().toString() + "%"
                       + "\n Parent:" + label.parentName());
           }

       } catch (RekognitionException e) {
           e.printStackTrace();
           System.exit(1);
       }
   }
}
```

- Para obtener más información sobre la API, consulta DetectModerationLabelsla Referencia AWS SDK for Java 2.x de la API.

`DetectText`

En el siguiente ejemplo de código, se muestra cómo utilizar `DetectText`.

Para obtener información, consulte Detección de texto en una imagen.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.*;

import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectText {
    public static void main(String[] args) {
        final String usage = "\n" +
            "Usage:   <bucketName> <sourceImage>\n" +
            "\n" +
```

```
            "Where:\n" +
            "   bucketName - The name of the S3 bucket where the image is stored\n"
+
            "   sourceImage - The path to the image that contains text (for example,
pic1.png). \n";

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String sourceImage = args[1];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        detectTextLabels(rekClient, bucketName, sourceImage);
        rekClient.close();
    }

    /**
     * Detects text labels in an image stored in an S3 bucket using Amazon
Rekognition.
     *
     * @param rekClient    an instance of the Amazon Rekognition client
     * @param bucketName   the name of the S3 bucket where the image is stored
     * @param sourceImage  the name of the image file in the S3 bucket
     * @throws RekognitionException if an error occurs while calling the Amazon
Rekognition API
     */
    public static void detectTextLabels(RekognitionClient rekClient, String
bucketName, String sourceImage) {
        try {
            S3Object s3ObjectTarget = S3Object.builder()
                    .bucket(bucketName)
                    .name(sourceImage)
                    .build();

            Image souImage = Image.builder()
                    .s3Object(s3ObjectTarget)
                    .build();
```

```
            DetectTextRequest textRequest = DetectTextRequest.builder()
                    .image(souImage)
                    .build();

            DetectTextResponse textResponse = rekClient.detectText(textRequest);
            List<TextDetection> textCollection = textResponse.textDetections();
            System.out.println("Detected lines and words");
            for (TextDetection text : textCollection) {
                System.out.println("Detected: " + text.detectedText());
                System.out.println("Confidence: " + text.confidence().toString());
                System.out.println("Id : " + text.id());
                System.out.println("Parent Id: " + text.parentId());
                System.out.println("Type: " + text.type());
                System.out.println();
            }

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DetectTextla Referencia AWS SDK for Java 2.x de la API.

`IndexFaces`

En el siguiente ejemplo de código, se muestra cómo utilizar `IndexFaces`.

Para obtener información, consulte Adición de rostros a una colección.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.*;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class AddFacesToCollection {
    public static void main(String[] args) {
        final String usage = """
            Usage: <collectionId> <sourceImage> <bucketName>

            Where:
                collectionName - The name of the collection.
                sourceImage - The name of the image (for example, pic1.png).
                bucketName - The name of the S3 bucket.
            """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        String sourceImage = args[1];
        String bucketName = args[2];;
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        addToCollection(rekClient, collectionId, bucketName, sourceImage);
        rekClient.close();
    }

    /**
     * Adds a face from an image to an Amazon Rekognition collection.
     *
     * @param rekClient     the Amazon Rekognition client
```

```
    * @param collectionId  the ID of the collection to add the face to
    * @param bucketName    the name of the Amazon S3 bucket containing the image
    * @param sourceImage   the name of the image file to add to the collection
    * @throws RekognitionException if there is an error while interacting with the
Amazon Rekognition service
    */
   public static void addToCollection(RekognitionClient rekClient, String
collectionId, String bucketName, String sourceImage) {
       try {
           S3Object s3ObjectTarget = S3Object.builder()
                   .bucket(bucketName)
                   .name(sourceImage)
                   .build();

           Image targetImage = Image.builder()
                   .s3Object(s3ObjectTarget)
                   .build();

           IndexFacesRequest facesRequest = IndexFacesRequest.builder()
                   .collectionId(collectionId)
                   .image(targetImage)
                   .maxFaces(1)
                   .qualityFilter(QualityFilter.AUTO)
                   .detectionAttributes(Attribute.DEFAULT)
                   .build();

           IndexFacesResponse facesResponse = rekClient.indexFaces(facesRequest);
           System.out.println("Results for the image");
           System.out.println("\n Faces indexed:");
           List<FaceRecord> faceRecords = facesResponse.faceRecords();
           for (FaceRecord faceRecord : faceRecords) {
               System.out.println("  Face ID: " + faceRecord.face().faceId());
               System.out.println("  Location:" +
faceRecord.faceDetail().boundingBox().toString());
           }

           List<UnindexedFace> unindexedFaces = facesResponse.unindexedFaces();
           System.out.println("Faces not indexed:");
           for (UnindexedFace unindexedFace : unindexedFaces) {
               System.out.println("  Location:" +
unindexedFace.faceDetail().boundingBox().toString());
               System.out.println("  Reasons:");
               for (Reason reason : unindexedFace.reasons()) {
                   System.out.println("Reason:  " + reason);
```

```
                }
            }

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta IndexFaceslla Referencia AWS SDK for Java 2.x de la API.

`ListCollections`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListCollections`.

Para obtener información, consulte Enumerar colecciones.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.ListCollectionsRequest;
import software.amazon.awssdk.services.rekognition.model.ListCollectionsResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class ListCollections {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Listing collections");
        listAllCollections(rekClient);
        rekClient.close();
    }

    public static void listAllCollections(RekognitionClient rekClient) {
        try {
            ListCollectionsRequest listCollectionsRequest =
 ListCollectionsRequest.builder()
                    .maxResults(10)
                    .build();

            ListCollectionsResponse response =
 rekClient.listCollections(listCollectionsRequest);
            List<String> collectionIds = response.collectionIds();
            for (String resultId : collectionIds) {
                System.out.println(resultId);
            }

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListCollectionsla Referencia AWS SDK for Java 2.x de la API.

`ListFaces`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListFaces`.

Para obtener información, consulte Enumerar rostros en una colección.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.Face;
import software.amazon.awssdk.services.rekognition.model.ListFacesRequest;
import software.amazon.awssdk.services.rekognition.model.ListFacesResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListFacesInCollection {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <collectionId>

                Where:
                   collectionId - The name of the collection.\s
                """;

        if (args.length < 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
```

```
                .region(region)
                .build();

        System.out.println("Faces in collection " + collectionId);
        listFacesCollection(rekClient, collectionId);
        rekClient.close();
    }

    public static void listFacesCollection(RekognitionClient rekClient, String
 collectionId) {
        try {
            ListFacesRequest facesRequest = ListFacesRequest.builder()
                    .collectionId(collectionId)
                    .maxResults(10)
                    .build();

            ListFacesResponse facesResponse = rekClient.listFaces(facesRequest);
            List<Face> faces = facesResponse.faces();
            for (Face face : faces) {
                System.out.println("Confidence level there is a face: " +
 face.confidence());
                System.out.println("The face Id value is " + face.faceId());
            }

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListFacesla Referencia AWS SDK for Java 2.x de la API.

`RecognizeCelebrities`

En el siguiente ejemplo de código, se muestra cómo utilizar `RecognizeCelebrities`.

Para obtener información, consulte Reconocimiento de famosos en una imagen.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.core.SdkBytes;
import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

import software.amazon.awssdk.services.rekognition.model.*;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class RecognizeCelebrities {
    public static void main(String[] args) {
        final String usage = """
                Usage:   <bucketName> <sourceImage>

                Where:
                   bucketName - The name of the S3 bucket where the images are
 stored.
                   sourceImage - The path to the image (for example, C:\\AWS\
\pic1.png).\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
       }
```

```
        String bucketName = args[0];;
        String sourceImage = args[1];
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Locating celebrities in " + sourceImage);
        recognizeAllCelebrities(rekClient, bucketName, sourceImage);
        rekClient.close();
    }

    /**
     * Recognizes all celebrities in an image stored in an Amazon S3 bucket.
     *
     * @param rekClient    the Amazon Rekognition client used to perform the
celebrity recognition operation
     * @param bucketName   the name of the Amazon S3 bucket where the source image
is stored
     * @param sourceImage  the name of the source image file stored in the Amazon S3
bucket
     */
    public static void recognizeAllCelebrities(RekognitionClient rekClient, String
bucketName, String sourceImage) {
        try {
            S3Object s3ObjectTarget = S3Object.builder()
                .bucket(bucketName)
                .name(sourceImage)
                .build();

            Image souImage = Image.builder()
                    .s3Object(s3ObjectTarget)
                    .build();

            RecognizeCelebritiesRequest request =
RecognizeCelebritiesRequest.builder()
                    .image(souImage)
                    .build();

            RecognizeCelebritiesResponse result =
rekClient.recognizeCelebrities(request);
            List<Celebrity> celebs = result.celebrityFaces();
            System.out.println(celebs.size() + " celebrity(s) were recognized.\n");
```

```
            for (Celebrity celebrity : celebs) {
                System.out.println("Celebrity recognized: " + celebrity.name());
                System.out.println("Celebrity ID: " + celebrity.id());

                System.out.println("Further information (if available):");
                for (String url : celebrity.urls()) {
                    System.out.println(url);
                }
                System.out.println();
            }
            System.out.println(result.unrecognizedFaces().size() + " face(s) were
 unrecognized.");

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta RecognizeCelebritiesla Referencia AWS SDK for Java 2.x de la API.

`SearchFaces`

En el siguiente ejemplo de código, se muestra cómo utilizar `SearchFaces`.

Para obtener información, consulte Búsqueda de un rostro (ID de rostro).

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
```

```
import software.amazon.awssdk.services.rekognition.model.SearchFacesByImageRequest;
import software.amazon.awssdk.services.rekognition.model.Image;
import software.amazon.awssdk.services.rekognition.model.SearchFacesByImageResponse;
import software.amazon.awssdk.services.rekognition.model.FaceMatch;
import java.io.File;
import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SearchFaceMatchingImageCollection {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <collectionId> <sourceImage>

                Where:
                   collectionId - The id of the collection. \s
                   sourceImage - The path to the image (for example, C:\\AWS\
\pic1.png).\s

                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        String sourceImage = args[1];
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Searching for a face in a collections");
```

```
        searchFaceInCollection(rekClient, collectionId, sourceImage);
        rekClient.close();
    }

    public static void searchFaceInCollection(RekognitionClient rekClient, String
 collectionId, String sourceImage) {
        try {
            InputStream sourceStream = new FileInputStream(new File(sourceImage));
            SdkBytes sourceBytes = SdkBytes.fromInputStream(sourceStream);
            Image souImage = Image.builder()
                    .bytes(sourceBytes)
                    .build();

            SearchFacesByImageRequest facesByImageRequest =
 SearchFacesByImageRequest.builder()
                    .image(souImage)
                    .maxFaces(10)
                    .faceMatchThreshold(70F)
                    .collectionId(collectionId)
                    .build();

            SearchFacesByImageResponse imageResponse =
 rekClient.searchFacesByImage(facesByImageRequest);
            System.out.println("Faces matching in the collection");
            List<FaceMatch> faceImageMatches = imageResponse.faceMatches();
            for (FaceMatch face : faceImageMatches) {
                System.out.println("The similarity level is  " + face.similarity());
                System.out.println();
            }

        } catch (RekognitionException | FileNotFoundException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta SearchFaceslaReferencia AWS SDK for Java 2.x de la API.

`SearchFacesByImage`

En el siguiente ejemplo de código, se muestra cómo utilizar `SearchFacesByImage`.

Para obtener información, consulte Búsqueda de un rostro (imagen).

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.SearchFacesRequest;
import software.amazon.awssdk.services.rekognition.model.SearchFacesResponse;
import software.amazon.awssdk.services.rekognition.model.FaceMatch;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SearchFaceMatchingIdCollection {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <collectionId> <sourceImage>

                Where:
                   collectionId - The id of the collection. \s
                   sourceImage - The path to the image (for example, C:\\AWS\
\pic1.png).\s
                """;

        if (args.length != 2) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        String faceId = args[1];
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Searching for a face in a collections");
        searchFacebyId(rekClient, collectionId, faceId);
        rekClient.close();
    }

    public static void searchFacebyId(RekognitionClient rekClient, String
 collectionId, String faceId) {
        try {
            SearchFacesRequest searchFacesRequest = SearchFacesRequest.builder()
                    .collectionId(collectionId)
                    .faceId(faceId)
                    .faceMatchThreshold(70F)
                    .maxFaces(2)
                    .build();

            SearchFacesResponse imageResponse =
 rekClient.searchFaces(searchFacesRequest);
            System.out.println("Faces matching in the collection");
            List<FaceMatch> faceImageMatches = imageResponse.faceMatches();
            for (FaceMatch face : faceImageMatches) {
                System.out.println("The similarity level is  " + face.similarity());
                System.out.println();
            }

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta SearchFacesByImagela Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación de una aplicación sin servidor para administrar fotos

En el siguiente ejemplo de código se muestra cómo crear una aplicación sin servidor que permita a los usuarios administrar fotos mediante etiquetas.

SDK para Java 2.x

Muestra cómo desarrollar una aplicación de administración de activos fotográficos que detecte las etiquetas de las imágenes mediante Amazon Rekognition y las almacene para su posterior recuperación.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Para profundizar en el origen de este ejemplo, consulte la publicación en Comunidad de AWS.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB
- Lambda
- Amazon Rekognition
- Amazon S3
- Amazon SNS

Detección de EPI en imágenes

El siguiente ejemplo de código muestra cómo crear una aplicación que utiliza Amazon Rekognition para detectar equipos de protección individual (EPI) en imágenes.

SDK para Java 2.x

Muestra cómo crear una AWS Lambda función que detecte imágenes con un equipo de protección individual.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- DynamoDB
- Amazon Rekognition
- Amazon S3
- Amazon SES

Detectar información en vídeos

En el siguiente ejemplo de código, se muestra cómo:

- Iniciar trabajos de Amazon Rekognition para detectar elementos como personas, objetos y texto en los videos.
- Compruebe el estado de los trabajos hasta que se terminan.
- Obtener la lista de elementos detectados por cada trabajo.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Obtenga información sobre famosos a partir de un vídeo ubicado en un bucket de Amazon S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.Video;
import
 software.amazon.awssdk.services.rekognition.model.StartCelebrityRecognitionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import software.amazon.awssdk.services.rekognition.model.CelebrityRecognitionSortBy;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
```

```
import software.amazon.awssdk.services.rekognition.model.CelebrityRecognition;
import software.amazon.awssdk.services.rekognition.model.CelebrityDetail;
import
 software.amazon.awssdk.services.rekognition.model.StartCelebrityRecognitionRequest;
import
 software.amazon.awssdk.services.rekognition.model.GetCelebrityRecognitionRequest;
import
 software.amazon.awssdk.services.rekognition.model.GetCelebrityRecognitionResponse;
import java.util.List;

/**
 * To run this code example, ensure that you perform the Prerequisites as stated
 * in the Amazon Rekognition Guide:
 * https://docs.aws.amazon.com/rekognition/latest/dg/video-analyzing-with-sqs.html
 *
 * Also, ensure that set up your development environment, including your
 * credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class VideoCelebrityDetection {
    private static String startJobId = "";

    public static void main(String[] args) {
        final String usage = """

                Usage:    <bucket> <video> <topicArn> <roleArn>

                Where:
                   bucket - The name of the bucket in which the video is located
 (for example, (for example, myBucket).\s
                   video - The name of video (for example, people.mp4).\s
                   topicArn - The ARN of the Amazon Simple Notification Service
 (Amazon SNS) topic.\s
                   roleArn - The ARN of the AWS Identity and Access Management (IAM)
 role to use.\s
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
```

```
        }

        String bucket = args[0];
        String video = args[1];
        String topicArn = args[2];
        String roleArn = args[3];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        NotificationChannel channel = NotificationChannel.builder()
                .snsTopicArn(topicArn)
                .roleArn(roleArn)
                .build();

        startCelebrityDetection(rekClient, channel, bucket, video);
        getCelebrityDetectionResults(rekClient);
        System.out.println("This example is done!");
        rekClient.close();
    }

    public static void startCelebrityDetection(RekognitionClient rekClient,
            NotificationChannel channel,
            String bucket,
            String video) {
        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
                    .build();

            StartCelebrityRecognitionRequest recognitionRequest =
StartCelebrityRecognitionRequest.builder()
                    .jobTag("Celebrities")
                    .notificationChannel(channel)
                    .video(vidOb)
                    .build();
```

```
            StartCelebrityRecognitionResponse startCelebrityRecognitionResult =
rekClient
                    .startCelebrityRecognition(recognitionRequest);
            startJobId = startCelebrityRecognitionResult.jobId();

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void getCelebrityDetectionResults(RekognitionClient rekClient) {
        try {
            String paginationToken = null;
            GetCelebrityRecognitionResponse recognitionResponse = null;
            boolean finished = false;
            String status;
            int yy = 0;

            do {
                if (recognitionResponse != null)
                    paginationToken = recognitionResponse.nextToken();

                GetCelebrityRecognitionRequest recognitionRequest =
GetCelebrityRecognitionRequest.builder()
                        .jobId(startJobId)
                        .nextToken(paginationToken)
                        .sortBy(CelebrityRecognitionSortBy.TIMESTAMP)
                        .maxResults(10)
                        .build();

                // Wait until the job succeeds
                while (!finished) {
                    recognitionResponse =
rekClient.getCelebrityRecognition(recognitionRequest);
                    status = recognitionResponse.jobStatusAsString();

                    if (status.compareTo("SUCCEEDED") == 0)
                        finished = true;
                    else {
                        System.out.println(yy + " status is: " + status);
                        Thread.sleep(1000);
                    }
                    yy++;
```

```
                }

                finished = false;

                // Proceed when the job is done - otherwise VideoMetadata is null.
                VideoMetadata videoMetaData = recognitionResponse.videoMetadata();
                System.out.println("Format: " + videoMetaData.format());
                System.out.println("Codec: " + videoMetaData.codec());
                System.out.println("Duration: " + videoMetaData.durationMillis());
                System.out.println("FrameRate: " + videoMetaData.frameRate());
                System.out.println("Job");

                List<CelebrityRecognition> celebs =
 recognitionResponse.celebrities();
                for (CelebrityRecognition celeb : celebs) {
                    long seconds = celeb.timestamp() / 1000;
                    System.out.print("Sec: " + seconds + " ");
                    CelebrityDetail details = celeb.celebrity();
                    System.out.println("Name: " + details.name());
                    System.out.println("Id: " + details.id());
                    System.out.println();
                }

            } while (recognitionResponse.nextToken() != null);

        } catch (RekognitionException | InterruptedException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

Detecte etiquetas en un vídeo mediante una operación de detección de etiquetas.

```
import com.fasterxml.jackson.core.JsonProcessingException;
import com.fasterxml.jackson.databind.JsonMappingException;
import com.fasterxml.jackson.databind.JsonNode;
import com.fasterxml.jackson.databind.ObjectMapper;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import
 software.amazon.awssdk.services.rekognition.model.StartLabelDetectionResponse;
```

```
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.Video;
import software.amazon.awssdk.services.rekognition.model.StartLabelDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.GetLabelDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.GetLabelDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import software.amazon.awssdk.services.rekognition.model.LabelDetectionSortBy;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.LabelDetection;
import software.amazon.awssdk.services.rekognition.model.Label;
import software.amazon.awssdk.services.rekognition.model.Instance;
import software.amazon.awssdk.services.rekognition.model.Parent;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageRequest;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class VideoDetect {
    private static String startJobId = "";

    public static void main(String[] args) {
        final String usage = """

                Usage:    <bucket> <video> <queueUrl> <topicArn> <roleArn>

                Where:
                   bucket - The name of the bucket in which the video is located
 (for example, (for example, myBucket).\s
                   video - The name of the video (for example, people.mp4).\s
                   queueUrl- The URL of a SQS queue.\s
                   topicArn - The ARN of the Amazon Simple Notification Service
 (Amazon SNS) topic.\s
                   roleArn - The ARN of the AWS Identity and Access Management (IAM)
 role to use.\s
```

```
                """;

        if (args.length != 5) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucket = args[0];
        String video = args[1];
        String queueUrl = args[2];
        String topicArn = args[3];
        String roleArn = args[4];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        SqsClient sqs = SqsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        NotificationChannel channel = NotificationChannel.builder()
                .snsTopicArn(topicArn)
                .roleArn(roleArn)
                .build();

        startLabels(rekClient, channel, bucket, video);
        getLabelJob(rekClient, sqs, queueUrl);
        System.out.println("This example is done!");
        sqs.close();
        rekClient.close();
    }

    public static void startLabels(RekognitionClient rekClient,
            NotificationChannel channel,
            String bucket,
            String video) {
        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
```

```
                    .s3Object(s3Obj)
                    .build();

            StartLabelDetectionRequest labelDetectionRequest =
StartLabelDetectionRequest.builder()
                    .jobTag("DetectingLabels")
                    .notificationChannel(channel)
                    .video(vidOb)
                    .minConfidence(50F)
                    .build();

            StartLabelDetectionResponse labelDetectionResponse =
rekClient.startLabelDetection(labelDetectionRequest);
            startJobId = labelDetectionResponse.jobId();

            boolean ans = true;
            String status = "";
            int yy = 0;
            while (ans) {

                GetLabelDetectionRequest detectionRequest =
GetLabelDetectionRequest.builder()
                        .jobId(startJobId)
                        .maxResults(10)
                        .build();

                GetLabelDetectionResponse result =
rekClient.getLabelDetection(detectionRequest);
                status = result.jobStatusAsString();

                if (status.compareTo("SUCCEEDED") == 0)
                    ans = false;
                else
                    System.out.println(yy + " status is: " + status);

                Thread.sleep(1000);
                yy++;
            }

            System.out.println(startJobId + " status is: " + status);

        } catch (RekognitionException | InterruptedException e) {
            e.getMessage();
            System.exit(1);
```

```
        }
    }

    public static void getLabelJob(RekognitionClient rekClient, SqsClient sqs,
String queueUrl) {
        List<Message> messages;
        ReceiveMessageRequest messageRequest = ReceiveMessageRequest.builder()
                .queueUrl(queueUrl)
                .build();

        try {
            messages = sqs.receiveMessage(messageRequest).messages();

            if (!messages.isEmpty()) {
                for (Message message : messages) {
                    String notification = message.body();

                    // Get the status and job id from the notification
                    ObjectMapper mapper = new ObjectMapper();
                    JsonNode jsonMessageTree = mapper.readTree(notification);
                    JsonNode messageBodyText = jsonMessageTree.get("Message");
                    ObjectMapper operationResultMapper = new ObjectMapper();
                    JsonNode jsonResultTree =
operationResultMapper.readTree(messageBodyText.textValue());
                    JsonNode operationJobId = jsonResultTree.get("JobId");
                    JsonNode operationStatus = jsonResultTree.get("Status");
                    System.out.println("Job found in JSON is " + operationJobId);

                    DeleteMessageRequest deleteMessageRequest =
DeleteMessageRequest.builder()
                            .queueUrl(queueUrl)
                            .build();

                    String jobId = operationJobId.textValue();
                    if (startJobId.compareTo(jobId) == 0) {
                        System.out.println("Job id: " + operationJobId);
                        System.out.println("Status : " +
operationStatus.toString());

                        if (operationStatus.asText().equals("SUCCEEDED"))
                            getResultsLabels(rekClient);
                        else
                            System.out.println("Video analysis failed");
```

```
                        sqs.deleteMessage(deleteMessageRequest);
                    } else {
                        System.out.println("Job received was not job " +
startJobId);
                        sqs.deleteMessage(deleteMessageRequest);
                    }
                }
            }

        } catch (RekognitionException e) {
            e.getMessage();
            System.exit(1);
        } catch (JsonMappingException e) {
            e.printStackTrace();
        } catch (JsonProcessingException e) {
            e.printStackTrace();
        }
    }

    // Gets the job results by calling GetLabelDetection
    private static void getResultsLabels(RekognitionClient rekClient) {

        int maxResults = 10;
        String paginationToken = null;
        GetLabelDetectionResponse labelDetectionResult = null;

        try {
            do {
                if (labelDetectionResult != null)
                    paginationToken = labelDetectionResult.nextToken();

                GetLabelDetectionRequest labelDetectionRequest =
GetLabelDetectionRequest.builder()
                        .jobId(startJobId)
                        .sortBy(LabelDetectionSortBy.TIMESTAMP)
                        .maxResults(maxResults)
                        .nextToken(paginationToken)
                        .build();

                labelDetectionResult =
rekClient.getLabelDetection(labelDetectionRequest);
                VideoMetadata videoMetaData = labelDetectionResult.videoMetadata();
                System.out.println("Format: " + videoMetaData.format());
                System.out.println("Codec: " + videoMetaData.codec());
```

```
                System.out.println("Duration: " + videoMetaData.durationMillis());
                System.out.println("FrameRate: " + videoMetaData.frameRate());

                List<LabelDetection> detectedLabels = labelDetectionResult.labels();
                for (LabelDetection detectedLabel : detectedLabels) {
                    long seconds = detectedLabel.timestamp();
                    Label label = detectedLabel.label();
                    System.out.println("Millisecond: " + seconds + " ");

                    System.out.println("   Label:" + label.name());
                    System.out.println("   Confidence:" +
detectedLabel.label().confidence().toString());

                    List<Instance> instances = label.instances();
                    System.out.println("   Instances of " + label.name());

                    if (instances.isEmpty()) {
                        System.out.println("        " + "None");
                    } else {
                        for (Instance instance : instances) {
                            System.out.println("        Confidence: " +
instance.confidence().toString());
                            System.out.println("        Bounding box: " +
instance.boundingBox().toString());
                        }
                    }
                    System.out.println("   Parent labels for " + label.name() +
":");
                    List<Parent> parents = label.parents();

                    if (parents.isEmpty()) {
                        System.out.println("        None");
                    } else {
                        for (Parent parent : parents) {
                            System.out.println("   " + parent.name());
                        }
                    }
                    System.out.println();
                }
            } while (labelDetectionResult != null &&
labelDetectionResult.nextToken() != null);

        } catch (RekognitionException e) {
            e.getMessage();
```

```
            System.exit(1);
        }
    }
}
```

Detecte rostros en un vídeo almacenado en un bucket de Amazon S3.

```
import com.fasterxml.jackson.core.JsonProcessingException;
import com.fasterxml.jackson.databind.JsonMappingException;
import com.fasterxml.jackson.databind.JsonNode;
import com.fasterxml.jackson.databind.ObjectMapper;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import
 software.amazon.awssdk.services.rekognition.model.StartLabelDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.Video;
import software.amazon.awssdk.services.rekognition.model.StartLabelDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.GetLabelDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.GetLabelDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import software.amazon.awssdk.services.rekognition.model.LabelDetectionSortBy;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.LabelDetection;
import software.amazon.awssdk.services.rekognition.model.Label;
import software.amazon.awssdk.services.rekognition.model.Instance;
import software.amazon.awssdk.services.rekognition.model.Parent;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageRequest;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
```

```
public class VideoDetect {
    private static String startJobId = "";

    public static void main(String[] args) {
        final String usage = """

                Usage:    <bucket> <video> <queueUrl> <topicArn> <roleArn>

                Where:
                   bucket - The name of the bucket in which the video is located
 (for example, (for example, myBucket).\s
                   video - The name of the video (for example, people.mp4).\s
                   queueUrl- The URL of a SQS queue.\s
                   topicArn - The ARN of the Amazon Simple Notification Service
 (Amazon SNS) topic.\s
                   roleArn - The ARN of the AWS Identity and Access Management (IAM)
 role to use.\s
                """;

        if (args.length != 5) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucket = args[0];
        String video = args[1];
        String queueUrl = args[2];
        String topicArn = args[3];
        String roleArn = args[4];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        SqsClient sqs = SqsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        NotificationChannel channel = NotificationChannel.builder()
                .snsTopicArn(topicArn)
                .roleArn(roleArn)
                .build();

        startLabels(rekClient, channel, bucket, video);
```

```
        getLabelJob(rekClient, sqs, queueUrl);
        System.out.println("This example is done!");
        sqs.close();
        rekClient.close();
    }

    public static void startLabels(RekognitionClient rekClient,
            NotificationChannel channel,
            String bucket,
            String video) {
        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
                    .build();

            StartLabelDetectionRequest labelDetectionRequest =
StartLabelDetectionRequest.builder()
                    .jobTag("DetectingLabels")
                    .notificationChannel(channel)
                    .video(vidOb)
                    .minConfidence(50F)
                    .build();

            StartLabelDetectionResponse labelDetectionResponse =
rekClient.startLabelDetection(labelDetectionRequest);
            startJobId = labelDetectionResponse.jobId();

            boolean ans = true;
            String status = "";
            int yy = 0;
            while (ans) {

                GetLabelDetectionRequest detectionRequest =
GetLabelDetectionRequest.builder()
                        .jobId(startJobId)
                        .maxResults(10)
                        .build();
```

```
                GetLabelDetectionResponse result =
rekClient.getLabelDetection(detectionRequest);
                status = result.jobStatusAsString();

                if (status.compareTo("SUCCEEDED") == 0)
                    ans = false;
                else
                    System.out.println(yy + " status is: " + status);

                Thread.sleep(1000);
                yy++;
            }

            System.out.println(startJobId + " status is: " + status);

        } catch (RekognitionException | InterruptedException e) {
            e.getMessage();
            System.exit(1);
        }
    }

    public static void getLabelJob(RekognitionClient rekClient, SqsClient sqs,
String queueUrl) {
        List<Message> messages;
        ReceiveMessageRequest messageRequest = ReceiveMessageRequest.builder()
                .queueUrl(queueUrl)
                .build();

        try {
            messages = sqs.receiveMessage(messageRequest).messages();

            if (!messages.isEmpty()) {
                for (Message message : messages) {
                    String notification = message.body();

                    // Get the status and job id from the notification
                    ObjectMapper mapper = new ObjectMapper();
                    JsonNode jsonMessageTree = mapper.readTree(notification);
                    JsonNode messageBodyText = jsonMessageTree.get("Message");
                    ObjectMapper operationResultMapper = new ObjectMapper();
                    JsonNode jsonResultTree =
operationResultMapper.readTree(messageBodyText.textValue());
                    JsonNode operationJobId = jsonResultTree.get("JobId");
                    JsonNode operationStatus = jsonResultTree.get("Status");
```

```
                    System.out.println("Job found in JSON is " + operationJobId);

                    DeleteMessageRequest deleteMessageRequest =
DeleteMessageRequest.builder()
                            .queueUrl(queueUrl)
                            .build();

                    String jobId = operationJobId.textValue();
                    if (startJobId.compareTo(jobId) == 0) {
                        System.out.println("Job id: " + operationJobId);
                        System.out.println("Status : " +
operationStatus.toString());

                        if (operationStatus.asText().equals("SUCCEEDED"))
                            getResultsLabels(rekClient);
                        else
                            System.out.println("Video analysis failed");

                        sqs.deleteMessage(deleteMessageRequest);
                    } else {
                        System.out.println("Job received was not job " +
startJobId);
                        sqs.deleteMessage(deleteMessageRequest);
                    }
                }
            }

        } catch (RekognitionException e) {
            e.getMessage();
            System.exit(1);
        } catch (JsonMappingException e) {
            e.printStackTrace();
        } catch (JsonProcessingException e) {
            e.printStackTrace();
        }
    }

    // Gets the job results by calling GetLabelDetection
    private static void getResultsLabels(RekognitionClient rekClient) {

        int maxResults = 10;
        String paginationToken = null;
        GetLabelDetectionResponse labelDetectionResult = null;
```

```
        try {
            do {
                if (labelDetectionResult != null)
                    paginationToken = labelDetectionResult.nextToken();

                GetLabelDetectionRequest labelDetectionRequest =
GetLabelDetectionRequest.builder()
                        .jobId(startJobId)
                        .sortBy(LabelDetectionSortBy.TIMESTAMP)
                        .maxResults(maxResults)
                        .nextToken(paginationToken)
                        .build();

                labelDetectionResult =
rekClient.getLabelDetection(labelDetectionRequest);
                VideoMetadata videoMetaData = labelDetectionResult.videoMetadata();
                System.out.println("Format: " + videoMetaData.format());
                System.out.println("Codec: " + videoMetaData.codec());
                System.out.println("Duration: " + videoMetaData.durationMillis());
                System.out.println("FrameRate: " + videoMetaData.frameRate());

                List<LabelDetection> detectedLabels = labelDetectionResult.labels();
                for (LabelDetection detectedLabel : detectedLabels) {
                    long seconds = detectedLabel.timestamp();
                    Label label = detectedLabel.label();
                    System.out.println("Millisecond: " + seconds + " ");

                    System.out.println("   Label:" + label.name());
                    System.out.println("   Confidence:" +
detectedLabel.label().confidence().toString());

                    List<Instance> instances = label.instances();
                    System.out.println("   Instances of " + label.name());

                    if (instances.isEmpty()) {
                        System.out.println("        " + "None");
                    } else {
                        for (Instance instance : instances) {
                            System.out.println("        Confidence: " +
instance.confidence().toString());
                            System.out.println("        Bounding box: " +
instance.boundingBox().toString());
                        }
                    }
```

```
                    System.out.println("   Parent labels for " + label.name() +
 ":");
                    List<Parent> parents = label.parents();

                    if (parents.isEmpty()) {
                        System.out.println("        None");
                    } else {
                        for (Parent parent : parents) {
                            System.out.println("   " + parent.name());
                        }
                    }
                    System.out.println();
                }
            } while (labelDetectionResult != null &&
 labelDetectionResult.nextToken() != null);

        } catch (RekognitionException e) {
            e.getMessage();
            System.exit(1);
        }
    }
}
```

Detecte contenido inapropiado u ofensivo en un vídeo almacenado en un bucket de Amazon S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.Video;
import
 software.amazon.awssdk.services.rekognition.model.StartContentModerationRequest;
import
 software.amazon.awssdk.services.rekognition.model.StartContentModerationResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import
 software.amazon.awssdk.services.rekognition.model.GetContentModerationResponse;
import
 software.amazon.awssdk.services.rekognition.model.GetContentModerationRequest;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.ContentModerationDetection;
import java.util.List;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class VideoDetectInappropriate {
    private static String startJobId = "";

    public static void main(String[] args) {

        final String usage = """

                Usage:    <bucket> <video> <topicArn> <roleArn>

                Where:
                   bucket - The name of the bucket in which the video is located
 (for example, (for example, myBucket).\s
                   video - The name of video (for example, people.mp4).\s
                   topicArn - The ARN of the Amazon Simple Notification Service
 (Amazon SNS) topic.\s
                   roleArn - The ARN of the AWS Identity and Access Management (IAM)
 role to use.\s
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucket = args[0];
        String video = args[1];
        String topicArn = args[2];
        String roleArn = args[3];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        NotificationChannel channel = NotificationChannel.builder()
                .snsTopicArn(topicArn)
```

```
                .roleArn(roleArn)
                .build();

        startModerationDetection(rekClient, channel, bucket, video);
        getModResults(rekClient);
        System.out.println("This example is done!");
        rekClient.close();
    }

    public static void startModerationDetection(RekognitionClient rekClient,
            NotificationChannel channel,
            String bucket,
            String video) {

        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
                    .build();

            StartContentModerationRequest modDetectionRequest =
StartContentModerationRequest.builder()
                    .jobTag("Moderation")
                    .notificationChannel(channel)
                    .video(vidOb)
                    .build();

            StartContentModerationResponse startModDetectionResult = rekClient
                    .startContentModeration(modDetectionRequest);
            startJobId = startModDetectionResult.jobId();

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void getModResults(RekognitionClient rekClient) {
        try {
            String paginationToken = null;
```

```
            GetContentModerationResponse modDetectionResponse = null;
            boolean finished = false;
            String status;
            int yy = 0;

            do {
                if (modDetectionResponse != null)
                    paginationToken = modDetectionResponse.nextToken();

                GetContentModerationRequest modRequest =
GetContentModerationRequest.builder()
                        .jobId(startJobId)
                        .nextToken(paginationToken)
                        .maxResults(10)
                        .build();

                // Wait until the job succeeds.
                while (!finished) {
                    modDetectionResponse =
rekClient.getContentModeration(modRequest);
                    status = modDetectionResponse.jobStatusAsString();

                    if (status.compareTo("SUCCEEDED") == 0)
                        finished = true;
                    else {
                        System.out.println(yy + " status is: " + status);
                        Thread.sleep(1000);
                    }
                    yy++;
                }

                finished = false;

                // Proceed when the job is done - otherwise VideoMetadata is null.
                VideoMetadata videoMetaData = modDetectionResponse.videoMetadata();
                System.out.println("Format: " + videoMetaData.format());
                System.out.println("Codec: " + videoMetaData.codec());
                System.out.println("Duration: " + videoMetaData.durationMillis());
                System.out.println("FrameRate: " + videoMetaData.frameRate());
                System.out.println("Job");

                List<ContentModerationDetection> mods =
modDetectionResponse.moderationLabels();
                for (ContentModerationDetection mod : mods) {
```

```
                    long seconds = mod.timestamp() / 1000;
                    System.out.print("Mod label: " + seconds + " ");
                    System.out.println(mod.moderationLabel().toString());
                    System.out.println();
                }

            } while (modDetectionResponse != null &&
 modDetectionResponse.nextToken() != null);

        } catch (RekognitionException | InterruptedException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

Detecte segmentos de señales técnicas y segmentos de detección de tomas en un vídeo almacenado en un bucket de Amazon S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.Video;
import software.amazon.awssdk.services.rekognition.model.StartShotDetectionFilter;
import
 software.amazon.awssdk.services.rekognition.model.StartTechnicalCueDetectionFilter;
import
 software.amazon.awssdk.services.rekognition.model.StartSegmentDetectionFilters;
import
 software.amazon.awssdk.services.rekognition.model.StartSegmentDetectionRequest;
import
 software.amazon.awssdk.services.rekognition.model.StartSegmentDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import
 software.amazon.awssdk.services.rekognition.model.GetSegmentDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.GetSegmentDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.SegmentDetection;
import software.amazon.awssdk.services.rekognition.model.TechnicalCueSegment;
import software.amazon.awssdk.services.rekognition.model.ShotSegment;
import software.amazon.awssdk.services.rekognition.model.SegmentType;
```

```
import software.amazon.awssdk.services.sqs.SqsClient;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class VideoDetectSegment {
    private static String startJobId = "";

    public static void main(String[] args) {
        final String usage = """

                Usage:    <bucket> <video> <topicArn> <roleArn>

                Where:
                   bucket - The name of the bucket in which the video is located
 (for example, (for example, myBucket).\s
                   video - The name of video (for example, people.mp4).\s
                   topicArn - The ARN of the Amazon Simple Notification Service
 (Amazon SNS) topic.\s
                   roleArn - The ARN of the AWS Identity and Access Management (IAM)
 role to use.\s
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucket = args[0];
        String video = args[1];
        String topicArn = args[2];
        String roleArn = args[3];

        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();
```

```
        SqsClient sqs = SqsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        NotificationChannel channel = NotificationChannel.builder()
                .snsTopicArn(topicArn)
                .roleArn(roleArn)
                .build();

        startSegmentDetection(rekClient, channel, bucket, video);
        getSegmentResults(rekClient);
        System.out.println("This example is done!");
        sqs.close();
        rekClient.close();
    }

    public static void startSegmentDetection(RekognitionClient rekClient,
            NotificationChannel channel,
            String bucket,
            String video) {
        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
                    .build();

            StartShotDetectionFilter cueDetectionFilter =
StartShotDetectionFilter.builder()
                    .minSegmentConfidence(60F)
                    .build();

            StartTechnicalCueDetectionFilter technicalCueDetectionFilter =
StartTechnicalCueDetectionFilter.builder()
                    .minSegmentConfidence(60F)
                    .build();

            StartSegmentDetectionFilters filters =
StartSegmentDetectionFilters.builder()
                    .shotFilter(cueDetectionFilter)
                    .technicalCueFilter(technicalCueDetectionFilter)
```

```
                    .build();

            StartSegmentDetectionRequest segDetectionRequest =
StartSegmentDetectionRequest.builder()
                    .jobTag("DetectingLabels")
                    .notificationChannel(channel)
                    .segmentTypes(SegmentType.TECHNICAL_CUE, SegmentType.SHOT)
                    .video(vidOb)
                    .filters(filters)
                    .build();

            StartSegmentDetectionResponse segDetectionResponse =
rekClient.startSegmentDetection(segDetectionRequest);
            startJobId = segDetectionResponse.jobId();

        } catch (RekognitionException e) {
            e.getMessage();
            System.exit(1);
        }
    }

    public static void getSegmentResults(RekognitionClient rekClient) {
        try {
            String paginationToken = null;
            GetSegmentDetectionResponse segDetectionResponse = null;
            boolean finished = false;
            String status;
            int yy = 0;

            do {
                if (segDetectionResponse != null)
                    paginationToken = segDetectionResponse.nextToken();

                GetSegmentDetectionRequest recognitionRequest =
GetSegmentDetectionRequest.builder()
                        .jobId(startJobId)
                        .nextToken(paginationToken)
                        .maxResults(10)
                        .build();

                // Wait until the job succeeds.
                while (!finished) {
                    segDetectionResponse =
rekClient.getSegmentDetection(recognitionRequest);
```

```
                    status = segDetectionResponse.jobStatusAsString();

                    if (status.compareTo("SUCCEEDED") == 0)
                        finished = true;
                    else {
                        System.out.println(yy + " status is: " + status);
                        Thread.sleep(1000);
                    }
                    yy++;
                }
                finished = false;

                // Proceed when the job is done - otherwise VideoMetadata is null.
                List<VideoMetadata> videoMetaData =
segDetectionResponse.videoMetadata();
                for (VideoMetadata metaData : videoMetaData) {
                    System.out.println("Format: " + metaData.format());
                    System.out.println("Codec: " + metaData.codec());
                    System.out.println("Duration: " + metaData.durationMillis());
                    System.out.println("FrameRate: " + metaData.frameRate());
                    System.out.println("Job");
                }

                List<SegmentDetection> detectedSegments =
segDetectionResponse.segments();
                for (SegmentDetection detectedSegment : detectedSegments) {
                    String type = detectedSegment.type().toString();
                    if (type.contains(SegmentType.TECHNICAL_CUE.toString())) {
                        System.out.println("Technical Cue");
                        TechnicalCueSegment segmentCue =
detectedSegment.technicalCueSegment();
                        System.out.println("\tType: " + segmentCue.type());
                        System.out.println("\tConfidence: " +
segmentCue.confidence().toString());
                    }

                    if (type.contains(SegmentType.SHOT.toString())) {
                        System.out.println("Shot");
                        ShotSegment segmentShot = detectedSegment.shotSegment();
                        System.out.println("\tIndex " + segmentShot.index());
                        System.out.println("\tConfidence: " +
segmentShot.confidence().toString());
                    }
```

```
                    long seconds = detectedSegment.durationMillis();
                    System.out.println("\tDuration : " + seconds + " milliseconds");
                    System.out.println("\tStart time code: " +
 detectedSegment.startTimecodeSMPTE());
                    System.out.println("\tEnd time code: " +
 detectedSegment.endTimecodeSMPTE());
                    System.out.println("\tDuration time code: " +
 detectedSegment.durationSMPTE());
                    System.out.println();
                }

            } while (segDetectionResponse != null &&
 segDetectionResponse.nextToken() != null);

        } catch (RekognitionException | InterruptedException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

Detecte texto en un vídeo almacenado en un bucket de Amazon S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.Video;
import software.amazon.awssdk.services.rekognition.model.StartTextDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.StartTextDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import software.amazon.awssdk.services.rekognition.model.GetTextDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.GetTextDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.TextDetectionResult;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class VideoDetectText {
    private static String startJobId = "";

    public static void main(String[] args) {
        final String usage = """

                Usage:    <bucket> <video> <topicArn> <roleArn>

                Where:
                   bucket - The name of the bucket in which the video is located
 (for example, (for example, myBucket).\s
                   video - The name of video (for example, people.mp4).\s
                   topicArn - The ARN of the Amazon Simple Notification Service
 (Amazon SNS) topic.\s
                   roleArn - The ARN of the AWS Identity and Access Management (IAM)
 role to use.\s
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucket = args[0];
        String video = args[1];
        String topicArn = args[2];
        String roleArn = args[3];

        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        NotificationChannel channel = NotificationChannel.builder()
                .snsTopicArn(topicArn)
                .roleArn(roleArn)
                .build();

        startTextLabels(rekClient, channel, bucket, video);
        getTextResults(rekClient);
        System.out.println("This example is done!");
```

```
        rekClient.close();
    }

    public static void startTextLabels(RekognitionClient rekClient,
            NotificationChannel channel,
            String bucket,
            String video) {
        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
                    .build();

            StartTextDetectionRequest labelDetectionRequest =
StartTextDetectionRequest.builder()
                    .jobTag("DetectingLabels")
                    .notificationChannel(channel)
                    .video(vidOb)
                    .build();

            StartTextDetectionResponse labelDetectionResponse =
rekClient.startTextDetection(labelDetectionRequest);
            startJobId = labelDetectionResponse.jobId();

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void getTextResults(RekognitionClient rekClient) {
        try {
            String paginationToken = null;
            GetTextDetectionResponse textDetectionResponse = null;
            boolean finished = false;
            String status;
            int yy = 0;

            do {
                if (textDetectionResponse != null)
```

```
                    paginationToken = textDetectionResponse.nextToken();

                GetTextDetectionRequest recognitionRequest =
GetTextDetectionRequest.builder()
                        .jobId(startJobId)
                        .nextToken(paginationToken)
                        .maxResults(10)
                        .build();

                // Wait until the job succeeds.
                while (!finished) {
                    textDetectionResponse =
rekClient.getTextDetection(recognitionRequest);
                    status = textDetectionResponse.jobStatusAsString();

                    if (status.compareTo("SUCCEEDED") == 0)
                        finished = true;
                    else {
                        System.out.println(yy + " status is: " + status);
                        Thread.sleep(1000);
                    }
                    yy++;
                }

                finished = false;

                // Proceed when the job is done - otherwise VideoMetadata is null.
                VideoMetadata videoMetaData = textDetectionResponse.videoMetadata();
                System.out.println("Format: " + videoMetaData.format());
                System.out.println("Codec: " + videoMetaData.codec());
                System.out.println("Duration: " + videoMetaData.durationMillis());
                System.out.println("FrameRate: " + videoMetaData.frameRate());
                System.out.println("Job");

                List<TextDetectionResult> labels =
textDetectionResponse.textDetections();
                for (TextDetectionResult detectedText : labels) {
                    System.out.println("Confidence: " +
detectedText.textDetection().confidence().toString());
                    System.out.println("Id : " + detectedText.textDetection().id());
                    System.out.println("Parent Id: " +
detectedText.textDetection().parentId());
                    System.out.println("Type: " +
detectedText.textDetection().type());
```

```
                    System.out.println("Text: " +
 detectedText.textDetection().detectedText());
                    System.out.println();
                }

            } while (textDetectionResponse != null &&
 textDetectionResponse.nextToken() != null);

        } catch (RekognitionException | InterruptedException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

Detecte personas en un vídeo almacenado en un bucket de Amazon S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.StartPersonTrackingRequest;
import software.amazon.awssdk.services.rekognition.model.Video;
import
 software.amazon.awssdk.services.rekognition.model.StartPersonTrackingResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import software.amazon.awssdk.services.rekognition.model.GetPersonTrackingResponse;
import software.amazon.awssdk.services.rekognition.model.GetPersonTrackingRequest;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.PersonDetection;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class VideoPersonDetection {
    private static String startJobId = "";
```

```
   public static void main(String[] args) {

       final String usage = """

               Usage:    <bucket> <video> <topicArn> <roleArn>

               Where:
                  bucket - The name of the bucket in which the video is located
(for example, (for example, myBucket).\s
                  video - The name of video (for example, people.mp4).\s
                  topicArn - The ARN of the Amazon Simple Notification Service
(Amazon SNS) topic.\s
                  roleArn - The ARN of the AWS Identity and Access Management (IAM)
role to use.\s
               """;

       if (args.length != 4) {
           System.out.println(usage);
           System.exit(1);
       }

       String bucket = args[0];
       String video = args[1];
       String topicArn = args[2];
       String roleArn = args[3];
       Region region = Region.US_EAST_1;
       RekognitionClient rekClient = RekognitionClient.builder()
               .region(region)
               .build();

       NotificationChannel channel = NotificationChannel.builder()
               .snsTopicArn(topicArn)
               .roleArn(roleArn)
               .build();

       startPersonLabels(rekClient, channel, bucket, video);
       getPersonDetectionResults(rekClient);
       System.out.println("This example is done!");
       rekClient.close();
   }

   public static void startPersonLabels(RekognitionClient rekClient,
           NotificationChannel channel,
```

```
            String bucket,
            String video) {
        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
                    .build();

            StartPersonTrackingRequest personTrackingRequest =
StartPersonTrackingRequest.builder()
                    .jobTag("DetectingLabels")
                    .video(vidOb)
                    .notificationChannel(channel)
                    .build();

            StartPersonTrackingResponse labelDetectionResponse =
rekClient.startPersonTracking(personTrackingRequest);
            startJobId = labelDetectionResponse.jobId();

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void getPersonDetectionResults(RekognitionClient rekClient) {
        try {
            String paginationToken = null;
            GetPersonTrackingResponse personTrackingResult = null;
            boolean finished = false;
            String status;
            int yy = 0;

            do {
                if (personTrackingResult != null)
                    paginationToken = personTrackingResult.nextToken();

                GetPersonTrackingRequest recognitionRequest =
GetPersonTrackingRequest.builder()
                        .jobId(startJobId)
```

```
                        .nextToken(paginationToken)
                        .maxResults(10)
                        .build();

                // Wait until the job succeeds
                while (!finished) {

                    personTrackingResult =
rekClient.getPersonTracking(recognitionRequest);
                    status = personTrackingResult.jobStatusAsString();

                    if (status.compareTo("SUCCEEDED") == 0)
                        finished = true;
                    else {
                        System.out.println(yy + " status is: " + status);
                        Thread.sleep(1000);
                    }
                    yy++;
                }

                finished = false;

                // Proceed when the job is done - otherwise VideoMetadata is null.
                VideoMetadata videoMetaData = personTrackingResult.videoMetadata();

                System.out.println("Format: " + videoMetaData.format());
                System.out.println("Codec: " + videoMetaData.codec());
                System.out.println("Duration: " + videoMetaData.durationMillis());
                System.out.println("FrameRate: " + videoMetaData.frameRate());
                System.out.println("Job");

                List<PersonDetection> detectedPersons =
personTrackingResult.persons();
                for (PersonDetection detectedPerson : detectedPersons) {
                    long seconds = detectedPerson.timestamp() / 1000;
                    System.out.print("Sec: " + seconds + " ");
                    System.out.println("Person Identifier: " +
detectedPerson.person().index());
                    System.out.println();
                }

            } while (personTrackingResult != null &&
personTrackingResult.nextToken() != null);
```

```
        } catch (RekognitionException | InterruptedException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - GetCelebrityRecognition
  - GetContentModeration
  - GetLabelDetection
  - GetPersonTracking
  - GetSegmentDetection
  - GetTextDetection
  - StartCelebrityRecognition
  - StartContentModeration
  - StartLabelDetection
  - StartPersonTracking
  - StartSegmentDetection
  - StartTextDetection

Detectar objetos en imágenes

El siguiente ejemplo de código muestra cómo crear una aplicación que utilice Amazon Rekognition para detectar objetos por categoría en imágenes.

SDK para Java 2.x

> Muestra cómo utilizar la API de Java de Amazon Rekognition para crear una aplicación que utilice Amazon Rekognition para identificar objetos por categoría en imágenes ubicadas en un bucket de Amazon Simple Storage Service (Amazon S3). La aplicación envía al administrador una notificación por correo electrónico con los resultados mediante Amazon Simple Email Service (Amazon SES).

Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Amazon Rekognition
- Amazon S3
- Amazon SES

Detección de personas y objetos en un video

El siguiente ejemplo de código muestra cómo detectar personas y objetos en un vídeo con Amazon Rekognition.

SDK para Java 2.x

Muestra cómo utilizar la API Java de Amazon Rekognition para crear una aplicación que detecte rostros y objetos en vídeos ubicados en un bucket de Amazon Simple Storage Service (Amazon S3). La aplicación envía al administrador una notificación por correo electrónico con los resultados mediante Amazon Simple Email Service (Amazon SES).

Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Amazon Rekognition
- Amazon S3
- Amazon SES
- Amazon SNS
- Amazon SQS

Ejemplos de registro de dominios de Route 53 usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes mediante el AWS SDK for Java 2.x registro de dominios de Route 53.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Registro de dominio de Introducción a Route 53

El siguiente ejemplo de código muestra cómo empezar a utilizar el registro de dominios de Route 53.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.route53domains.Route53DomainsClient;
import software.amazon.awssdk.services.route53.model.Route53Exception;
import software.amazon.awssdk.services.route53domains.model.DomainPrice;
import software.amazon.awssdk.services.route53domains.model.ListPricesRequest;
import software.amazon.awssdk.services.route53domains.model.ListPricesResponse;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
```

```
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This Java code examples performs the following operation:
 *
 * 1. Invokes ListPrices for at least one domain type, such as the “com” type
 * and displays the prices for Registration and Renewal.
 *
 */
public class HelloRoute53 {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) {
        final String usage = "\n" +
                "Usage:\n" +
                "    <hostedZoneId> \n\n" +
                "Where:\n" +
                "    hostedZoneId - The id value of an existing hosted zone. \n";

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String domainType = args[0];
        Region region = Region.US_EAST_1;
        Route53DomainsClient route53DomainsClient = Route53DomainsClient.builder()
                .region(region)
                .build();

        System.out.println(DASHES);
        System.out.println("Invokes ListPrices for at least one domain type.");
        listPrices(route53DomainsClient, domainType);
        System.out.println(DASHES);
    }

    public static void listPrices(Route53DomainsClient route53DomainsClient, String
 domainType) {
        try {
            ListPricesRequest pricesRequest = ListPricesRequest.builder()
                    .maxItems(10)
                    .tld(domainType)
```

```
                    .build();

            ListPricesResponse response =
 route53DomainsClient.listPrices(pricesRequest);
            List<DomainPrice> prices = response.prices();
            for (DomainPrice pr : prices) {
                System.out.println("Name: " + pr.name());
                System.out.println(
                        "Registration: " + pr.registrationPrice().price() + " " +
 pr.registrationPrice().currency());
                System.out.println("Renewal: " + pr.renewalPrice().price() + " " +
 pr.renewalPrice().currency());
                System.out.println("Transfer: " + pr.transferPrice().price() + " " +
 pr.transferPrice().currency());
                System.out.println("Transfer: " + pr.transferPrice().price() + " " +
 pr.transferPrice().currency());
                System.out.println("Change Ownership: " +
 pr.changeOwnershipPrice().price() + " "
                        + pr.changeOwnershipPrice().currency());
                System.out.println(
                        "Restoration: " + pr.restorationPrice().price() + " " +
 pr.restorationPrice().currency());
                System.out.println(" ");
            }

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListPricesla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Enumere los dominios actuales y las operaciones del año pasado.
- Consulte la facturación del año pasado y los precios de los tipos de dominio.
- Obtención de sugerencias de dominios.
- Compruebe la disponibilidad y la transferibilidad del dominio.
- Si lo desea, solicite el registro de un dominio.
- Obtención de información de una operación.
- Si lo desea, obtenga información del dominio.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This example uses pagination methods where applicable. For example, to list
 * domains, the
 * listDomainsPaginator method is used. For more information about pagination,
 * see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/pagination.html
 *
 * This Java code example performs the following operations:
 *
 * 1. List current domains.
 * 2. List operations in the past year.
 * 3. View billing for the account in the past year.
 * 4. View prices for domain types.
 * 5. Get domain suggestions.
 * 6. Check domain availability.
```

```
 * 7. Check domain transferability.
 * 8. Request a domain registration.
 * 9. Get operation details.
 * 10. Optionally, get domain details.
 */

public class Route53Scenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <domainType> <phoneNumber> <email> <domainSuggestion>
 <firstName> <lastName> <city>

                Where:
                    domainType - The domain type (for example, com).\s
                    phoneNumber - The phone number to use (for example,
 +91.9966564xxx)      email - The email address to use.      domainSuggestion - The
 domain suggestion (for example, findmy.accountants).\s
                    firstName - The first name to use to register a domain.\s
                    lastName -  The last name to use to register a domain.\s
                    city - the city to use to register a domain.\s
                    """;

        if (args.length != 7) {
            System.out.println(usage);
            System.exit(1);
        }

        String domainType = args[0];
        String phoneNumber = args[1];
        String email = args[2];
        String domainSuggestion = args[3];
        String firstName = args[4];
        String lastName = args[5];
        String city = args[6];
        Region region = Region.US_EAST_1;
        Route53DomainsClient route53DomainsClient = Route53DomainsClient.builder()
                .region(region)
                .build();

        System.out.println(DASHES);
```

```
        System.out.println("Welcome to the Amazon Route 53 domains example
scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. List current domains.");
        listDomains(route53DomainsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. List operations in the past year.");
        listOperations(route53DomainsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. View billing for the account in the past year.");
        listBillingRecords(route53DomainsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. View prices for domain types.");
        listPrices(route53DomainsClient, domainType);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Get domain suggestions.");
        listDomainSuggestions(route53DomainsClient, domainSuggestion);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Check domain availability.");
        checkDomainAvailability(route53DomainsClient, domainSuggestion);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Check domain transferability.");
        checkDomainTransferability(route53DomainsClient, domainSuggestion);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Request a domain registration.");
        String opId = requestDomainRegistration(route53DomainsClient,
domainSuggestion, phoneNumber, email, firstName,
                lastName, city);
```

```
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Get operation details.");
        getOperationalDetail(route53DomainsClient, opId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Get domain details.");
        System.out.println("Note: You must have a registered domain to get
details.");
        System.out.println("Otherwise, an exception is thrown that states ");
        System.out.println("Domain xxxxxxx not found in xxxxxxx account.");
        getDomainDetails(route53DomainsClient, domainSuggestion);
        System.out.println(DASHES);
    }

    public static void getDomainDetails(Route53DomainsClient route53DomainsClient,
String domainSuggestion) {
        try {
            GetDomainDetailRequest detailRequest = GetDomainDetailRequest.builder()
                    .domainName(domainSuggestion)
                    .build();

            GetDomainDetailResponse response =
route53DomainsClient.getDomainDetail(detailRequest);
            System.out.println("The contact first name is " +
response.registrantContact().firstName());
            System.out.println("The contact last name is " +
response.registrantContact().lastName());
            System.out.println("The contact org name is " +
response.registrantContact().organizationName());

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void getOperationalDetail(Route53DomainsClient
route53DomainsClient, String operationId) {
        try {
            GetOperationDetailRequest detailRequest =
GetOperationDetailRequest.builder()
```

```
                    .operationId(operationId)
                    .build();

            GetOperationDetailResponse response =
route53DomainsClient.getOperationDetail(detailRequest);
            System.out.println("Operation detail message is " + response.message());

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static String requestDomainRegistration(Route53DomainsClient
route53DomainsClient,
            String domainSuggestion,
            String phoneNumber,
            String email,
            String firstName,
            String lastName,
            String city) {

        try {
            ContactDetail contactDetail = ContactDetail.builder()
                    .contactType(ContactType.COMPANY)
                    .state("LA")
                    .countryCode(CountryCode.IN)
                    .email(email)
                    .firstName(firstName)
                    .lastName(lastName)
                    .city(city)
                    .phoneNumber(phoneNumber)
                    .organizationName("My Org")
                    .addressLine1("My Address")
                    .zipCode("123 123")
                    .build();

            RegisterDomainRequest domainRequest = RegisterDomainRequest.builder()
                    .adminContact(contactDetail)
                    .registrantContact(contactDetail)
                    .techContact(contactDetail)
                    .domainName(domainSuggestion)
                    .autoRenew(true)
                    .durationInYears(1)
```

```
                    .build();

            RegisterDomainResponse response =
route53DomainsClient.registerDomain(domainRequest);
            System.out.println("Registration requested. Operation Id: " +
response.operationId());
            return response.operationId();

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }

    public static void checkDomainTransferability(Route53DomainsClient
route53DomainsClient, String domainSuggestion) {
        try {
            CheckDomainTransferabilityRequest transferabilityRequest =
CheckDomainTransferabilityRequest.builder()
                    .domainName(domainSuggestion)
                    .build();

            CheckDomainTransferabilityResponse response = route53DomainsClient
                    .checkDomainTransferability(transferabilityRequest);
            System.out.println("Transferability: " +
response.transferability().transferable().toString());

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void checkDomainAvailability(Route53DomainsClient
route53DomainsClient, String domainSuggestion) {
        try {
            CheckDomainAvailabilityRequest availabilityRequest =
CheckDomainAvailabilityRequest.builder()
                    .domainName(domainSuggestion)
                    .build();

            CheckDomainAvailabilityResponse response = route53DomainsClient
                    .checkDomainAvailability(availabilityRequest);
```

```
            System.out.println(domainSuggestion + " is " +
response.availability().toString());

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void listDomainSuggestions(Route53DomainsClient
route53DomainsClient, String domainSuggestion) {
        try {
            GetDomainSuggestionsRequest suggestionsRequest =
GetDomainSuggestionsRequest.builder()
                    .domainName(domainSuggestion)
                    .suggestionCount(5)
                    .onlyAvailable(true)
                    .build();

            GetDomainSuggestionsResponse response =
route53DomainsClient.getDomainSuggestions(suggestionsRequest);
            List<DomainSuggestion> suggestions = response.suggestionsList();
            for (DomainSuggestion suggestion : suggestions) {
                System.out.println("Suggestion Name: " + suggestion.domainName());
                System.out.println("Availability: " + suggestion.availability());
                System.out.println(" ");
            }

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void listPrices(Route53DomainsClient route53DomainsClient, String
domainType) {
        try {
            ListPricesRequest pricesRequest = ListPricesRequest.builder()
                    .tld(domainType)
                    .build();

            ListPricesIterable listRes =
route53DomainsClient.listPricesPaginator(pricesRequest);
            listRes.stream()
```

```
                    .flatMap(r -> r.prices().stream())
                    .forEach(content -> System.out.println(" Name: " +
content.name() +
                            " Registration: " + content.registrationPrice().price()
+ " "
                            + content.registrationPrice().currency() +
                            " Renewal: " + content.renewalPrice().price() + " " +
content.renewalPrice().currency()));

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void listBillingRecords(Route53DomainsClient route53DomainsClient)
{
        try {
            Date currentDate = new Date();
            LocalDateTime localDateTime =
currentDate.toInstant().atZone(ZoneId.systemDefault()).toLocalDateTime();
            ZoneOffset zoneOffset = ZoneOffset.of("+01:00");
            LocalDateTime localDateTime2 = localDateTime.minusYears(1);
            Instant myStartTime = localDateTime2.toInstant(zoneOffset);
            Instant myEndTime = localDateTime.toInstant(zoneOffset);

            ViewBillingRequest viewBillingRequest = ViewBillingRequest.builder()
                    .start(myStartTime)
                    .end(myEndTime)
                    .build();

            ViewBillingIterable listRes =
route53DomainsClient.viewBillingPaginator(viewBillingRequest);
            listRes.stream()
                    .flatMap(r -> r.billingRecords().stream())
                    .forEach(content -> System.out.println(" Bill Date:: " +
content.billDate() +
                            " Operation: " + content.operationAsString() +
                            " Price: " + content.price()));

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
```

```
    }

    public static void listOperations(Route53DomainsClient route53DomainsClient) {
        try {
            Date currentDate = new Date();
            LocalDateTime localDateTime =
currentDate.toInstant().atZone(ZoneId.systemDefault()).toLocalDateTime();
            ZoneOffset zoneOffset = ZoneOffset.of("+01:00");
            localDateTime = localDateTime.minusYears(1);
            Instant myTime = localDateTime.toInstant(zoneOffset);

            ListOperationsRequest operationsRequest =
ListOperationsRequest.builder()
                    .submittedSince(myTime)
                    .build();

            ListOperationsIterable listRes =
route53DomainsClient.listOperationsPaginator(operationsRequest);
            listRes.stream()
                    .flatMap(r -> r.operations().stream())
                    .forEach(content -> System.out.println(" Operation Id: " +
content.operationId() +
                            " Status: " + content.statusAsString() +
                            " Date: " + content.submittedDate()));

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void listDomains(Route53DomainsClient route53DomainsClient) {
        try {
            ListDomainsIterable listRes =
route53DomainsClient.listDomainsPaginator();
            listRes.stream()
                    .flatMap(r -> r.domains().stream())
                    .forEach(content -> System.out.println("The domain name is " +
content.domainName()));

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
```

```
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CheckDomainAvailability
  - CheckDomainTransferability
  - GetDomainDetail
  - GetDomainSuggestions
  - GetOperationDetail
  - ListDomains
  - ListOperations
  - ListPrices
  - RegisterDomain
  - ViewBilling

Acciones

`CheckDomainAvailability`

En el siguiente ejemplo de código, se muestra cómo utilizar `CheckDomainAvailability`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void checkDomainAvailability(Route53DomainsClient
route53DomainsClient, String domainSuggestion) {
       try {
           CheckDomainAvailabilityRequest availabilityRequest =
CheckDomainAvailabilityRequest.builder()
                   .domainName(domainSuggestion)
```

```
                    .build();

            CheckDomainAvailabilityResponse response = route53DomainsClient
                    .checkDomainAvailability(availabilityRequest);
            System.out.println(domainSuggestion + " is " +
response.availability().toString());

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta CheckDomainAvailabilityla Referencia AWS SDK for Java 2.x de la API.

`CheckDomainTransferability`

En el siguiente ejemplo de código, se muestra cómo utilizar `CheckDomainTransferability`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void checkDomainTransferability(Route53DomainsClient
route53DomainsClient, String domainSuggestion) {
        try {
            CheckDomainTransferabilityRequest transferabilityRequest =
CheckDomainTransferabilityRequest.builder()
                    .domainName(domainSuggestion)
                    .build();

            CheckDomainTransferabilityResponse response = route53DomainsClient
                    .checkDomainTransferability(transferabilityRequest);
            System.out.println("Transferability: " +
response.transferability().transferable().toString());
```

```
        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta CheckDomainTransferabilityla Referencia AWS SDK for Java 2.x de la API.

`GetDomainDetail`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetDomainDetail`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void getDomainDetails(Route53DomainsClient route53DomainsClient,
String domainSuggestion) {
        try {
            GetDomainDetailRequest detailRequest = GetDomainDetailRequest.builder()
                    .domainName(domainSuggestion)
                    .build();

            GetDomainDetailResponse response =
route53DomainsClient.getDomainDetail(detailRequest);
            System.out.println("The contact first name is " +
response.registrantContact().firstName());
            System.out.println("The contact last name is " +
response.registrantContact().lastName());
            System.out.println("The contact org name is " +
response.registrantContact().organizationName());

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
```

```
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta GetDomainDetailla Referencia AWS SDK for Java 2.x de la API.

`GetDomainSuggestions`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetDomainSuggestions`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void listDomainSuggestions(Route53DomainsClient
route53DomainsClient, String domainSuggestion) {
       try {
           GetDomainSuggestionsRequest suggestionsRequest =
GetDomainSuggestionsRequest.builder()
                   .domainName(domainSuggestion)
                   .suggestionCount(5)
                   .onlyAvailable(true)
                   .build();

           GetDomainSuggestionsResponse response =
route53DomainsClient.getDomainSuggestions(suggestionsRequest);
           List<DomainSuggestion> suggestions = response.suggestionsList();
           for (DomainSuggestion suggestion : suggestions) {
               System.out.println("Suggestion Name: " + suggestion.domainName());
               System.out.println("Availability: " + suggestion.availability());
               System.out.println(" ");
           }

       } catch (Route53Exception e) {
           System.err.println(e.getMessage());
```

```
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta GetDomainSuggestionsla Referencia AWS SDK for Java 2.x de la API.

`GetOperationDetail`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetOperationDetail`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void getOperationalDetail(Route53DomainsClient
route53DomainsClient, String operationId) {
       try {
           GetOperationDetailRequest detailRequest =
GetOperationDetailRequest.builder()
                   .operationId(operationId)
                   .build();

           GetOperationDetailResponse response =
route53DomainsClient.getOperationDetail(detailRequest);
           System.out.println("Operation detail message is " + response.message());

       } catch (Route53Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta GetOperationDetailla Referencia AWS SDK for Java 2.x de la API.

`ListDomains`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListDomains`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void listDomains(Route53DomainsClient route53DomainsClient) {
       try {
           ListDomainsIterable listRes =
route53DomainsClient.listDomainsPaginator();
           listRes.stream()
                   .flatMap(r -> r.domains().stream())
                   .forEach(content -> System.out.println("The domain name is " +
content.domainName()));

       } catch (Route53Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta ListDomainsla Referencia AWS SDK for Java 2.x de la API.

`ListOperations`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListOperations`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void listOperations(Route53DomainsClient route53DomainsClient) {
       try {
           Date currentDate = new Date();
           LocalDateTime localDateTime =
currentDate.toInstant().atZone(ZoneId.systemDefault()).toLocalDateTime();
           ZoneOffset zoneOffset = ZoneOffset.of("+01:00");
           localDateTime = localDateTime.minusYears(1);
           Instant myTime = localDateTime.toInstant(zoneOffset);

           ListOperationsRequest operationsRequest =
ListOperationsRequest.builder()
                   .submittedSince(myTime)
                   .build();

           ListOperationsIterable listRes =
route53DomainsClient.listOperationsPaginator(operationsRequest);
           listRes.stream()
                   .flatMap(r -> r.operations().stream())
                   .forEach(content -> System.out.println(" Operation Id: " +
content.operationId() +
                           " Status: " + content.statusAsString() +
                           " Date: " + content.submittedDate()));

       } catch (Route53Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta ListOperationsla Referencia AWS SDK for Java 2.x de la API.

`ListPrices`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListPrices`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void listPrices(Route53DomainsClient route53DomainsClient, String
domainType) {
       try {
           ListPricesRequest pricesRequest = ListPricesRequest.builder()
                   .tld(domainType)
                   .build();

           ListPricesIterable listRes =
route53DomainsClient.listPricesPaginator(pricesRequest);
           listRes.stream()
                   .flatMap(r -> r.prices().stream())
                   .forEach(content -> System.out.println(" Name: " +
content.name() +
                           " Registration: " + content.registrationPrice().price()
+ " "
                           + content.registrationPrice().currency() +
                           " Renewal: " + content.renewalPrice().price() + " " +
content.renewalPrice().currency()));

       } catch (Route53Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta ListPricesla Referencia AWS SDK for Java 2.x de la API.

`RegisterDomain`

En el siguiente ejemplo de código, se muestra cómo utilizar `RegisterDomain`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String requestDomainRegistration(Route53DomainsClient
route53DomainsClient,
           String domainSuggestion,
           String phoneNumber,
           String email,
           String firstName,
           String lastName,
           String city) {

       try {
           ContactDetail contactDetail = ContactDetail.builder()
                   .contactType(ContactType.COMPANY)
                   .state("LA")
                   .countryCode(CountryCode.IN)
                   .email(email)
                   .firstName(firstName)
                   .lastName(lastName)
                   .city(city)
                   .phoneNumber(phoneNumber)
                   .organizationName("My Org")
                   .addressLine1("My Address")
                   .zipCode("123 123")
                   .build();

           RegisterDomainRequest domainRequest = RegisterDomainRequest.builder()
                   .adminContact(contactDetail)
                   .registrantContact(contactDetail)
                   .techContact(contactDetail)
                   .domainName(domainSuggestion)
                   .autoRenew(true)
                   .durationInYears(1)
```

```
                    .build();

            RegisterDomainResponse response =
route53DomainsClient.registerDomain(domainRequest);
            System.out.println("Registration requested. Operation Id: " +
response.operationId());
            return response.operationId();

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }
```

- Para obtener más información sobre la API, consulta RegisterDomainla Referencia AWS SDK for Java 2.x de la API.

`ViewBilling`

En el siguiente ejemplo de código, se muestra cómo utilizar `ViewBilling`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void listBillingRecords(Route53DomainsClient route53DomainsClient)
{
        try {
            Date currentDate = new Date();
            LocalDateTime localDateTime =
currentDate.toInstant().atZone(ZoneId.systemDefault()).toLocalDateTime();
            ZoneOffset zoneOffset = ZoneOffset.of("+01:00");
            LocalDateTime localDateTime2 = localDateTime.minusYears(1);
            Instant myStartTime = localDateTime2.toInstant(zoneOffset);
            Instant myEndTime = localDateTime.toInstant(zoneOffset);
```

```
            ViewBillingRequest viewBillingRequest = ViewBillingRequest.builder()
                    .start(myStartTime)
                    .end(myEndTime)
                    .build();

            ViewBillingIterable listRes =
route53DomainsClient.viewBillingPaginator(viewBillingRequest);
            listRes.stream()
                    .flatMap(r -> r.billingRecords().stream())
                    .forEach(content -> System.out.println(" Bill Date:: " +
content.billDate() +
                            " Operation: " + content.operationAsString() +
                            " Price: " + content.price()));

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta ViewBillingla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon S3 usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes AWS SDK for Java 2.x mediante Amazon S3.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios
- Ejemplos de tecnología sin servidor

Introducción

Introducción a Amazon S3

El siguiente ejemplo de código muestra cómo empezar a utilizar Amazon S3.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.Bucket;
import software.amazon.awssdk.services.s3.model.ListBucketsResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloS3 {
    public static void main(String[] args) {
```

```
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        listBuckets(s3);
    }

    /**
     * Lists all the S3 buckets associated with the provided AWS S3 client.
     *
     * @param s3 the S3Client instance used to interact with the AWS S3 service
     */
    public static void listBuckets(S3Client s3) {
        try {
            ListBucketsResponse response = s3.listBuckets();
            List<Bucket> bucketList = response.buckets();
            bucketList.forEach(bucket -> {
                System.out.println("Bucket Name: " + bucket.name());
            });

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListBucketsla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Creación de un bucket y cargar un archivo en el bucket.
- Descargar un objeto desde un bucket.
- Copiar un objeto en una subcarpeta de un bucket.

- Obtención de una lista de los objetos de un bucket.
- Eliminación del bucket y todos los objetos que incluye.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Un ejemplo de escenario.

```
import java.io.IOException;
import java.util.Scanner;
import java.util.UUID;
import java.util.concurrent.CompletableFuture;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This Java code example performs the following tasks:
 *
 * 1. Creates an Amazon S3 bucket.
 * 2. Uploads an object to the bucket.
 * 3. Downloads the object to another local file.
 * 4. Uploads an object using multipart upload.
 * 5. List all objects located in the Amazon S3 bucket.
 * 6. Copies the object to another Amazon S3 bucket.
 * 7. Copy the object to another Amazon S3 bucket using multi copy.
 * 8. Deletes the object from the Amazon S3 bucket.
```

```
 * 9. Deletes the Amazon S3 bucket.
 */

public class S3Scenario {

    public static Scanner scanner = new Scanner(System.in);
    static S3Actions s3Actions = new S3Actions();
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final Logger logger = LoggerFactory.getLogger(S3Scenario.class);
    public static void main(String[] args) throws IOException {
        final String usage = """
            Usage:
               <bucketName> <key> <objectPath> <savePath> <toBucket>

            Where:
                bucketName - The name of the  S3 bucket.
                key - The unique identifier for the object stored in the S3 bucket.
                objectPath - The full file path of the object within the S3 bucket
 (e.g., "documents/reports/annual_report.pdf").
                savePath - The local file path where the object will be downloaded
 and saved (e.g., "C:/Users/username/Downloads/annual_report.pdf").
                toBucket - The name of the S3 bucket to which the object will be
 copied.
            """;

        if (args.length != 5) {
            logger.info(usage);
            return;
        }

        String bucketName = args[0];
        String key = args[1];
        String objectPath = args[2];
        String savePath = args[3];
        String toBucket = args[4];

        logger.info(DASHES);
        logger.info("Welcome to the Amazon Simple Storage Service (S3) example
 scenario.");
        logger.info("""
            Amazon S3 is a highly scalable and durable object storage
            service provided by Amazon Web Services (AWS). It is designed to store
 and retrieve
            any amount of data, from anywhere on the web, at any time.
```

```
            The `S3AsyncClient` interface in the AWS SDK for Java 2.x provides a set
of methods to
            programmatically interact with the Amazon S3 (Simple Storage Service)
service. This allows
            developers to automate the management and manipulation of S3 buckets and
objects as
            part of their application deployment pipelines. With S3, teams can focus
on building
            and deploying their applications without having to worry about the
underlying storage
            infrastructure required to host and manage large amounts of data.

            This scenario walks you through how to perform key operations for this
service.
            Let's get started...
            """);
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        try {
            // Run the methods that belong to this scenario.
            runScenario(bucketName, key, objectPath, savePath, toBucket);

        } catch (Throwable rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }
    }

    private static void runScenario(String bucketName, String key, String
objectPath, String savePath, String toBucket) throws Throwable {
        logger.info(DASHES);
        logger.info("1. Create an Amazon S3 bucket.");
        try {
            CompletableFuture<Void> future =
s3Actions.createBucketAsync(bucketName);
            future.join();
            waitForInputToContinue(scanner);
```

```
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;

        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("2. Upload a local file to the Amazon S3 bucket.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<PutObjectResponse> future =
s3Actions.uploadLocalFileAsync(bucketName, key, objectPath);
            future.join();
            logger.info("File uploaded successfully to {}/{}", bucketName, key);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);


        logger.info(DASHES);
        logger.info("3. Download the object to another local file.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
s3Actions.getObjectBytesAsync(bucketName, key, savePath);
            future.join();
```

```
            logger.info("Successfully obtained bytes from S3 object and wrote to
file {}", savePath);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Perform a multipart upload.");
        waitForInputToContinue(scanner);
        String multipartKey = "multiPartKey";
        try {
            // Call the multipartUpload method
            CompletableFuture<Void> future = s3Actions.multipartUpload(bucketName,
multipartKey);
            future.join();
            logger.info("Multipart upload completed successfully for bucket '{}' and
key '{}'", bucketName, multipartKey);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. List all objects located in the Amazon S3 bucket.");
        waitForInputToContinue(scanner);
```

```
        try {
            CompletableFuture<Void> future =
s3Actions.listAllObjectsAsync(bucketName);
            future.join();
            logger.info("Object listing completed successfully.");

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("6. Copy the object to another Amazon S3 bucket.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<String> future =
s3Actions.copyBucketObjectAsync(bucketName, key, toBucket);
            String result = future.join();
            logger.info("Copy operation result: {}", result);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Copy the object to another Amazon S3 bucket using multi
copy.");
```

```
        waitForInputToContinue(scanner);

        try {
            CompletableFuture<String> future = s3Actions.performMultiCopy(toBucket,
bucketName, key);
            String result = future.join();
            logger.info("Copy operation result: {}", result);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);


        logger.info(DASHES);
        logger.info("8. Delete objects from the Amazon S3 bucket.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
s3Actions.deleteObjectFromBucketAsync(bucketName, key);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        try {
            CompletableFuture<Void> future =
s3Actions.deleteObjectFromBucketAsync(bucketName, "multiPartKey");
            future.join();
```

```
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("9. Delete the Amazon S3 bucket.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
s3Actions.deleteBucketAsync(bucketName);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("You successfully completed the Amazon S3 scenario.");
        logger.info(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();
```

```
            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Una clase contenedora que contiene las operaciones.

```
public class S3Actions {

    private static final Logger logger = LoggerFactory.getLogger(S3Actions.class);
    private static S3AsyncClient s3AsyncClient;

    public static S3AsyncClient getAsyncClient() {
        if (s3AsyncClient == null) {
            /*
            The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
 version 2,
            and it is designed to provide a high-performance, asynchronous HTTP
 client for interacting with AWS services.
             It uses the Netty framework to handle the underlying network
 communication and the Java NIO API to
             provide a non-blocking, event-driven approach to HTTP requests and
 responses.
             */

            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(50)  // Adjust as needed.
                .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
 timeout.
                .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
                .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
                .build();
```

```
            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
timeout.
                .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the
individual call attempt timeout.
                .retryStrategy(RetryMode.STANDARD)
                .build();

            s3AsyncClient = S3AsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return s3AsyncClient;
    }


    /**
     * Creates an S3 bucket asynchronously.
     *
     * @param bucketName the name of the S3 bucket to create
     * @return a {@link CompletableFuture} that completes when the bucket is created
and ready
     * @throws RuntimeException if there is a failure while creating the bucket
     */
    public CompletableFuture<Void> createBucketAsync(String bucketName) {
        CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
            .bucket(bucketName)
            .build();

        CompletableFuture<CreateBucketResponse> response =
getAsyncClient().createBucket(bucketRequest);
        return response.thenCompose(resp -> {
            S3AsyncWaiter s3Waiter = getAsyncClient().waiter();
            HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
                .bucket(bucketName)
                .build();

            CompletableFuture<WaiterResponse<HeadBucketResponse>>
waiterResponseFuture =
                s3Waiter.waitUntilBucketExists(bucketRequestWait);
            return waiterResponseFuture.thenAccept(waiterResponse -> {
```

```
                waiterResponse.matched().response().ifPresent(headBucketResponse ->
{
                    logger.info(bucketName + " is ready");
                });
            });
        }).whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to create bucket", ex);
            }
        });
    }


    /**
     * Uploads a local file to an AWS S3 bucket asynchronously.
     *
     * @param bucketName the name of the S3 bucket to upload the file to
     * @param key        the key (object name) to use for the uploaded file
     * @param objectPath the local file path of the file to be uploaded
     * @return a {@link CompletableFuture} that completes with the {@link
PutObjectResponse} when the upload is successful, or throws a {@link
RuntimeException} if the upload fails
     */
    public CompletableFuture<PutObjectResponse> uploadLocalFileAsync(String
bucketName, String key, String objectPath) {
        PutObjectRequest objectRequest = PutObjectRequest.builder()
            .bucket(bucketName)
            .key(key)
            .build();

        CompletableFuture<PutObjectResponse> response =
getAsyncClient().putObject(objectRequest,
AsyncRequestBody.fromFile(Paths.get(objectPath)));
        return response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to upload file", ex);
            }
        });
    }


    /**
     * Asynchronously retrieves the bytes of an object from an Amazon S3 bucket and
writes them to a local file.
```

```
    *
    * @param bucketName the name of the S3 bucket containing the object
    * @param keyName    the key (or name) of the S3 object to retrieve
    * @param path       the local file path where the object's bytes will be
written
    * @return a {@link CompletableFuture} that completes when the object bytes have
been written to the local file
    */
   public CompletableFuture<Void> getObjectBytesAsync(String bucketName, String
keyName, String path) {
       GetObjectRequest objectRequest = GetObjectRequest.builder()
           .key(keyName)
           .bucket(bucketName)
           .build();

       CompletableFuture<ResponseBytes<GetObjectResponse>> response =
getAsyncClient().getObject(objectRequest, AsyncResponseTransformer.toBytes());
       return response.thenAccept(objectBytes -> {
           try {
               byte[] data = objectBytes.asByteArray();
               Path filePath = Paths.get(path);
               Files.write(filePath, data);
               logger.info("Successfully obtained bytes from an S3 object");
           } catch (IOException ex) {
               throw new RuntimeException("Failed to write data to file", ex);
           }
       }).whenComplete((resp, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to get object bytes from S3",
ex);
           }
       });
   }


   /**
    * Asynchronously lists all objects in the specified S3 bucket.
    *
    * @param bucketName the name of the S3 bucket to list objects for
    * @return a {@link CompletableFuture} that completes when all objects have been
listed
    */
   public CompletableFuture<Void> listAllObjectsAsync(String bucketName) {
       ListObjectsV2Request initialRequest = ListObjectsV2Request.builder()
```

```
            .bucket(bucketName)
            .maxKeys(1)
            .build();

        ListObjectsV2Publisher paginator =
getAsyncClient().listObjectsV2Paginator(initialRequest);
        return paginator.subscribe(response -> {
            response.contents().forEach(s3Object -> {
                logger.info("Object key: " + s3Object.key());
            });
        }).thenRun(() -> {
            logger.info("Successfully listed all objects in the bucket: " +
bucketName);
        }).exceptionally(ex -> {
            throw new RuntimeException("Failed to list objects", ex);
        });
    }


    /**
     * Asynchronously copies an object from one S3 bucket to another.
     *
     * @param fromBucket the name of the source S3 bucket
     * @param objectKey  the key (name) of the object to be copied
     * @param toBucket   the name of the destination S3 bucket
     * @return a {@link CompletableFuture} that completes with the copy result as a
{@link String}
     * @throws RuntimeException if the URL could not be encoded or an S3 exception
occurred during the copy
     */
    public CompletableFuture<String> copyBucketObjectAsync(String fromBucket, String
objectKey, String toBucket) {
        CopyObjectRequest copyReq = CopyObjectRequest.builder()
            .sourceBucket(fromBucket)
            .sourceKey(objectKey)
            .destinationBucket(toBucket)
            .destinationKey(objectKey)
            .build();

        CompletableFuture<CopyObjectResponse> response =
getAsyncClient().copyObject(copyReq);
        response.whenComplete((copyRes, ex) -> {
            if (copyRes != null) {
                logger.info("The " + objectKey + " was copied to " + toBucket);
```

```
            } else {
                throw new RuntimeException("An S3 exception occurred during copy",
ex);
            }
        });

        return response.thenApply(CopyObjectResponse::copyObjectResult)
            .thenApply(Object::toString);
    }

    /**
     * Performs a multipart upload to an Amazon S3 bucket.
     *
     * @param bucketName the name of the S3 bucket to upload the file to
     * @param key        the key (name) of the file to be uploaded
     * @return a {@link CompletableFuture} that completes when the multipart upload
is successful
     */
    public CompletableFuture<Void> multipartUpload(String bucketName, String key) {
        int mB = 1024 * 1024;

        CreateMultipartUploadRequest createMultipartUploadRequest =
CreateMultipartUploadRequest.builder()
            .bucket(bucketName)
            .key(key)
            .build();

        return getAsyncClient().createMultipartUpload(createMultipartUploadRequest)
            .thenCompose(createResponse -> {
                String uploadId = createResponse.uploadId();
                System.out.println("Upload ID: " + uploadId);

                // Upload part 1.
                UploadPartRequest uploadPartRequest1 = UploadPartRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .partNumber(1)
                    .contentLength((long) (5 * mB)) // Specify the content length
                    .build();

                CompletableFuture<CompletedPart> part1Future =
getAsyncClient().uploadPart(uploadPartRequest1,
```

```
                        AsyncRequestBody.fromByteBuffer(getRandomByteBuffer(5 *
mB)))
                    .thenApply(uploadPartResponse -> CompletedPart.builder()
                        .partNumber(1)
                        .eTag(uploadPartResponse.eTag())
                        .build());

                // Upload part 2.
                UploadPartRequest uploadPartRequest2 = UploadPartRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .partNumber(2)
                    .contentLength((long) (3 * mB))
                    .build();

                CompletableFuture<CompletedPart> part2Future =
getAsyncClient().uploadPart(uploadPartRequest2,
                        AsyncRequestBody.fromByteBuffer(getRandomByteBuffer(3 *
mB)))
                    .thenApply(uploadPartResponse -> CompletedPart.builder()
                        .partNumber(2)
                        .eTag(uploadPartResponse.eTag())
                        .build());

                // Combine the results of both parts.
                return CompletableFuture.allOf(part1Future, part2Future)
                    .thenCompose(v -> {
                        CompletedPart part1 = part1Future.join();
                        CompletedPart part2 = part2Future.join();

                        CompletedMultipartUpload completedMultipartUpload =
CompletedMultipartUpload.builder()
                            .parts(part1, part2)
                            .build();

                        CompleteMultipartUploadRequest
completeMultipartUploadRequest = CompleteMultipartUploadRequest.builder()
                            .bucket(bucketName)
                            .key(key)
                            .uploadId(uploadId)
                            .multipartUpload(completedMultipartUpload)
                            .build();
```

```
                        // Complete the multipart upload
                        return
getAsyncClient().completeMultipartUpload(completeMultipartUploadRequest);
                    });
            })
            .thenAccept(response -> System.out.println("Multipart upload completed
successfully"))
            .exceptionally(ex -> {
                System.err.println("Failed to complete multipart upload: " +
ex.getMessage());
                throw new RuntimeException(ex);
            });
    }


    /**
     * Deletes an object from an S3 bucket asynchronously.
     *
     * @param bucketName the name of the S3 bucket
     * @param key        the key (file name) of the object to be deleted
     * @return a {@link CompletableFuture} that completes when the object has been
deleted
     */
    public CompletableFuture<Void> deleteObjectFromBucketAsync(String bucketName,
String key) {
        DeleteObjectRequest deleteObjectRequest = DeleteObjectRequest.builder()
            .bucket(bucketName)
            .key(key)
            .build();

        CompletableFuture<DeleteObjectResponse> response =
getAsyncClient().deleteObject(deleteObjectRequest);
        response.whenComplete((deleteRes, ex) -> {
            if (deleteRes != null) {
                logger.info(key + " was deleted");
            } else {
                throw new RuntimeException("An S3 exception occurred during delete",
ex);
            }
        });

        return response.thenApply(r -> null);
    }
```

```
   /**
    * Deletes an S3 bucket asynchronously.
    *
    * @param bucket the name of the bucket to be deleted
    * @return a {@link CompletableFuture} that completes when the bucket deletion
is successful, or throws a {@link RuntimeException}
    * if an error occurs during the deletion process
    */
   public CompletableFuture<Void> deleteBucketAsync(String bucket) {
       DeleteBucketRequest deleteBucketRequest = DeleteBucketRequest.builder()
           .bucket(bucket)
           .build();

       CompletableFuture<DeleteBucketResponse> response =
getAsyncClient().deleteBucket(deleteBucketRequest);
       response.whenComplete((deleteRes, ex) -> {
           if (deleteRes != null) {
               logger.info(bucket + " was deleted.");
           } else {
               throw new RuntimeException("An S3 exception occurred during bucket
deletion", ex);
           }
       });
       return response.thenApply(r -> null);
   }

   public CompletableFuture<String> performMultiCopy(String toBucket, String
bucketName, String key) {
       CreateMultipartUploadRequest createMultipartUploadRequest =
CreateMultipartUploadRequest.builder()
           .bucket(toBucket)
           .key(key)
           .build();

       getAsyncClient().createMultipartUpload(createMultipartUploadRequest)
           .thenApply(createMultipartUploadResponse -> {
               String uploadId = createMultipartUploadResponse.uploadId();
               System.out.println("Upload ID: " + uploadId);

               UploadPartCopyRequest uploadPartCopyRequest =
UploadPartCopyRequest.builder()
                   .sourceBucket(bucketName)
                   .destinationBucket(toBucket)
```

```
                    .sourceKey(key)
                    .destinationKey(key)
                    .uploadId(uploadId)  // Use the valid uploadId.
                    .partNumber(1)  // Ensure the part number is correct.
                    .copySourceRange("bytes=0-1023")  // Adjust range as needed
                    .build();

                return getAsyncClient().uploadPartCopy(uploadPartCopyRequest);
            })
            .thenCompose(uploadPartCopyFuture -> uploadPartCopyFuture)
            .whenComplete((uploadPartCopyResponse, exception) -> {
                if (exception != null) {
                    // Handle any exceptions.
                    logger.error("Error during upload part copy: " +
 exception.getMessage());
                } else {
                    // Successfully completed the upload part copy.
                    System.out.println("Upload Part Copy completed successfully.
 ETag: " + uploadPartCopyResponse.copyPartResult().eTag());
                }
            });
        return null;
    }

    private static ByteBuffer getRandomByteBuffer(int size) {
        ByteBuffer buffer = ByteBuffer.allocate(size);
        for (int i = 0; i < size; i++) {
            buffer.put((byte) (Math.random() * 256));
        }
        buffer.flip();
        return buffer;
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CopyObject
  - CreateBucket
  - DeleteBucket
  - DeleteObjects

- GetObject
- ListObjectsV2
- PutObject

Acciones

`AbortMultipartUpload`

En el siguiente ejemplo de código, se muestra cómo utilizar `AbortMultipartUpload`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.AbortMultipartUploadRequest;
import software.amazon.awssdk.services.s3.model.AbortMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.CompletedMultipartUpload;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.LifecycleRule;
import software.amazon.awssdk.services.s3.model.ListMultipartUploadsRequest;
import software.amazon.awssdk.services.s3.model.ListMultipartUploadsResponse;
import software.amazon.awssdk.services.s3.model.MultipartUpload;
import
 software.amazon.awssdk.services.s3.model.PutBucketLifecycleConfigurationResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.UploadPartRequest;
import software.amazon.awssdk.services.s3.model.UploadPartResponse;
import software.amazon.awssdk.services.s3.waiters.S3Waiter;
import software.amazon.awssdk.services.sts.StsClient;
```

```
import software.amazon.awssdk.utils.builder.SdkBuilder;

import java.io.IOException;
import java.io.RandomAccessFile;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.ByteBuffer;
import java.time.Duration;
import java.time.Instant;
import java.util.ArrayList;
import java.util.Collection;
import java.util.List;
import java.util.Objects;
import java.util.UUID;

import static software.amazon.awssdk.transfer.s3.SizeConstant.KB;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class AbortMultipartUploadExamples {
    static final String bucketName = "amzn-s3-demo-bucket" + UUID.randomUUID(); //
 Change bucket name.
    static final String key = UUID.randomUUID().toString();
    static final String classPathFilePath = "/multipartUploadFiles/s3-
userguide.pdf";
    static final String filePath = getFullFilePath(classPathFilePath);
    static final S3Client s3Client = S3Client.create();
    private static final Logger logger =
 LoggerFactory.getLogger(AbortMultipartUploadExamples.class);
    private static String accountId = getAccountId();

    public static void main(String[] args) {
        doAbortIncompleteMultipartUploadsFromList();
        doAbortMultipartUploadUsingUploadId();
        doAbortIncompleteMultipartUploadsOlderThan();
        doAbortMultipartUploadsUsingLifecycleConfig();
    }
```

```
   // A wrapper method that sets up the multipart upload environment for
abortIncompleteMultipartUploadsFromList().
   public static void doAbortIncompleteMultipartUploadsFromList() {
       createBucket();
       initiateAndInterruptMultiPartUpload("uploadThread");
       abortIncompleteMultipartUploadsFromList();
       deleteResources();
   }

   /**
    * Aborts all incomplete multipart uploads from the specified S3 bucket.
    * <p>
    * This method retrieves a list of all incomplete multipart uploads in the
specified S3 bucket,
    * and then aborts each of those uploads.
    */
   public static void abortIncompleteMultipartUploadsFromList() {
       ListMultipartUploadsRequest listMultipartUploadsRequest =
ListMultipartUploadsRequest.builder()
           .bucket(bucketName)
           .build();

       ListMultipartUploadsResponse response =
s3Client.listMultipartUploads(listMultipartUploadsRequest);
       List<MultipartUpload> uploads = response.uploads();

       AbortMultipartUploadRequest abortMultipartUploadRequest;
       for (MultipartUpload upload : uploads) {
           abortMultipartUploadRequest = AbortMultipartUploadRequest.builder()
               .bucket(bucketName)
               .key(upload.key())
               .expectedBucketOwner(accountId)
               .uploadId(upload.uploadId())
               .build();

           AbortMultipartUploadResponse abortMultipartUploadResponse =
s3Client.abortMultipartUpload(abortMultipartUploadRequest);
           if (abortMultipartUploadResponse.sdkHttpResponse().isSuccessful()) {
               logger.info("Upload ID [{}] to bucket [{}] successfully aborted.",
upload.uploadId(), bucketName);
           }
       }
   }
```

```
   // A wrapper method that sets up the multipart upload environment for
abortIncompleteMultipartUploadsOlderThan().
   static void doAbortIncompleteMultipartUploadsOlderThan() {
       createBucket();
       Instant secondUploadInstant = initiateAndInterruptTwoUploads();
       abortIncompleteMultipartUploadsOlderThan(secondUploadInstant);
       deleteResources();
   }

   static void abortIncompleteMultipartUploadsOlderThan(Instant pointInTime) {
       ListMultipartUploadsRequest listMultipartUploadsRequest =
ListMultipartUploadsRequest.builder()
           .bucket(bucketName)
           .build();

       ListMultipartUploadsResponse response =
s3Client.listMultipartUploads(listMultipartUploadsRequest);
       List<MultipartUpload> uploads = response.uploads();

       AbortMultipartUploadRequest abortMultipartUploadRequest;
       for (MultipartUpload upload : uploads) {
           logger.info("Found multipartUpload with upload ID [{}], initiated [{}]",
upload.uploadId(), upload.initiated());
           if (upload.initiated().isBefore(pointInTime)) {
               abortMultipartUploadRequest = AbortMultipartUploadRequest.builder()
                   .bucket(bucketName)
                   .key(upload.key())
                   .expectedBucketOwner(accountId)
                   .uploadId(upload.uploadId())
                   .build();

               AbortMultipartUploadResponse abortMultipartUploadResponse =
s3Client.abortMultipartUpload(abortMultipartUploadRequest);
               if (abortMultipartUploadResponse.sdkHttpResponse().isSuccessful()) {
                   logger.info("Upload ID [{}] to bucket [{}] successfully
aborted.", upload.uploadId(), bucketName);
               }
           }
       }
   }

   // A wrapper method that sets up the multipart upload environment for
abortMultipartUploadUsingUploadId().
```

```
    static void doAbortMultipartUploadUsingUploadId() {
        createBucket();
        try {
            abortMultipartUploadUsingUploadId();
        } catch (S3Exception e) {
            logger.error(e.getMessage());
        } finally {
            deleteResources();
        }
    }

    static void abortMultipartUploadUsingUploadId() {
        String uploadId = startUploadReturningUploadId();
        AbortMultipartUploadResponse response = s3Client.abortMultipartUpload(b -> b
            .uploadId(uploadId)
            .bucket(bucketName)
            .key(key));

        if (response.sdkHttpResponse().isSuccessful()) {
            logger.info("Upload ID [{}] to bucket [{}] successfully aborted.",
uploadId, bucketName);
        }
    }

    // A wrapper method that sets up the multipart upload environment for
abortMultipartUploadsUsingLifecycleConfig().
    static void doAbortMultipartUploadsUsingLifecycleConfig() {
        createBucket();
        try {
            abortMultipartUploadsUsingLifecycleConfig();
        } catch (S3Exception e) {
            logger.error(e.getMessage());
        } finally {
            deleteResources();
        }
    }

    static void abortMultipartUploadsUsingLifecycleConfig() {
        Collection<LifecycleRule> lifeCycleRules = List.of(LifecycleRule.builder()
            .abortIncompleteMultipartUpload(b -> b.
                daysAfterInitiation(7))
            .status("Enabled")
            .filter(SdkBuilder::build) // Filter element is required.
            .build());
```

```
        // If the action is successful, the service sends back an HTTP 200 response
with an empty HTTP body.
        PutBucketLifecycleConfigurationResponse response =
s3Client.putBucketLifecycleConfiguration(b -> b
            .bucket(bucketName)
            .lifecycleConfiguration(b1 -> b1.rules(lifeCycleRules)));

        if (response.sdkHttpResponse().isSuccessful()) {
            logger.info("Rule to abort incomplete multipart uploads added to
bucket.");
        } else {
            logger.error("Unsuccessfully applied rule. HTTP status code is [{}]",
response.sdkHttpResponse().statusCode());
        }
    }

    /************************
     Multipart upload methods
     ************************/

    static void initiateAndInterruptMultiPartUpload(String threadName) {
        Runnable upload = () -> {
            try {
                AbortMultipartUploadExamples.doMultipartUpload();
            } catch (SdkException e) {
                logger.error(e.getMessage());
            }
        };
        Thread uploadThread = new Thread(upload, threadName);
        uploadThread.start();
        try {
            Thread.sleep(Duration.ofSeconds(1).toMillis()); // Give the multipart
upload time to register.
        } catch (InterruptedException e) {
            logger.error(e.getMessage());
        }
        uploadThread.interrupt();
    }

    static Instant initiateAndInterruptTwoUploads() {
        Instant firstUploadInstant = Instant.now();
        initiateAndInterruptMultiPartUpload("uploadThread1");
        try {
```

```
            Thread.sleep(Duration.ofSeconds(5).toMillis());
        } catch (InterruptedException e) {
            logger.error(e.getMessage());
        }
        Instant secondUploadInstant = Instant.now();
        initiateAndInterruptMultiPartUpload("uploadThread2");
        return secondUploadInstant;
    }

    static void doMultipartUpload() {
        String uploadId = step1CreateMultipartUpload();
        List<CompletedPart> completedParts = step2UploadParts(uploadId);
        step3CompleteMultipartUpload(uploadId, completedParts);
    }

    static String step1CreateMultipartUpload() {
        CreateMultipartUploadResponse createMultipartUploadResponse =
s3Client.createMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key));
        return createMultipartUploadResponse.uploadId();
    }

    static List<CompletedPart> step2UploadParts(String uploadId) {
        int partNumber = 1;
        List<CompletedPart> completedParts = new ArrayList<>();
        ByteBuffer bb = ByteBuffer.allocate(Long.valueOf(1024 * KB).intValue());

        try (RandomAccessFile file = new RandomAccessFile(filePath, "r")) {
            long fileSize = file.length();
            long position = 0;
            while (position < fileSize) {
                file.seek(position);
                long read = file.getChannel().read(bb);

                bb.flip(); // Swap position and limit before reading from the
buffer.
                UploadPartRequest uploadPartRequest = UploadPartRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .partNumber(partNumber)
                    .build();
```

```
                UploadPartResponse partResponse = s3Client.uploadPart(
                    uploadPartRequest,
                    RequestBody.fromByteBuffer(bb));

                CompletedPart part = CompletedPart.builder()
                    .partNumber(partNumber)
                    .eTag(partResponse.eTag())
                    .build();
                completedParts.add(part);
                logger.info("Part {} upload", partNumber);

                bb.clear();
                position += read;
                partNumber++;
            }
        } catch (IOException | S3Exception e) {
            logger.error(e.getMessage());
            return null;
        }
        return completedParts;
    }

    static void step3CompleteMultipartUpload(String uploadId, List<CompletedPart>
completedParts) {
        s3Client.completeMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key)
            .uploadId(uploadId)

.multipartUpload(CompletedMultipartUpload.builder().parts(completedParts).build()));
    }

    static String startUploadReturningUploadId() {
        String uploadId = step1CreateMultipartUpload();
        doMultipartUploadWithUploadId(uploadId);
        return uploadId;

    }

    static void doMultipartUploadWithUploadId(String uploadId) {
        new Thread(() -> {
            try {
                List<CompletedPart> completedParts = step2UploadParts(uploadId);
                step3CompleteMultipartUpload(uploadId, completedParts);
```

```
            } catch (SdkException e) {
                logger.error(e.getMessage());
            }
        }, "upload thread").start();
        try {
            Thread.sleep(Duration.ofSeconds(2L).toMillis());
        } catch (InterruptedException e) {
            logger.error(e.getMessage());
            System.exit(1);
        }
    }

    /*************************
     Resource handling methods
     ************************/

    static void createBucket() {
        logger.info("Creating bucket: [{}]", bucketName);
        s3Client.createBucket(b -> b.bucket(bucketName));
        try (S3Waiter s3Waiter = s3Client.waiter()) {
            s3Waiter.waitUntilBucketExists(b -> b.bucket(bucketName));
        }
        logger.info("Bucket created.");
    }

    static void deleteResources() {
        logger.info("Deleting resources ...");
        s3Client.deleteObject(b -> b.bucket(bucketName).key(key));
        s3Client.deleteBucket(b -> b.bucket(bucketName));
        try (S3Waiter s3Waiter = s3Client.waiter()) {
            s3Waiter.waitUntilBucketNotExists(b -> b.bucket(bucketName));
        }
        logger.info("Resources deleted.");
    }

    private static String getAccountId() {
        try (StsClient stsClient = StsClient.create()) {
            return stsClient.getCallerIdentity().account();
        }
    }

    static String getFullFilePath(String filePath) {
        URL uploadDirectoryURL = PerformMultiPartUpload.class.getResource(filePath);
        String fullFilePath;
```

```
        try {
            fullFilePath =
 Objects.requireNonNull(uploadDirectoryURL).toURI().getPath();
        } catch (URISyntaxException e) {
            throw new RuntimeException(e);
        }
        return fullFilePath;
    }
}
```

- Para obtener más información sobre la API, consulta AbortMultipartUploadla Referencia AWS SDK for Java 2.x de la API.

`CopyObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `CopyObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Copie un objeto con un S3Client.

```
    /**
     * Asynchronously copies an object from one S3 bucket to another.
     *
     * @param fromBucket the name of the source S3 bucket
     * @param objectKey  the key (name) of the object to be copied
     * @param toBucket   the name of the destination S3 bucket
     * @return a {@link CompletableFuture} that completes with the copy result as a
 {@link String}
     * @throws RuntimeException if the URL could not be encoded or an S3 exception
 occurred during the copy
     */
    public CompletableFuture<String> copyBucketObjectAsync(String fromBucket, String
 objectKey, String toBucket) {
```

```
        CopyObjectRequest copyReq = CopyObjectRequest.builder()
            .sourceBucket(fromBucket)
            .sourceKey(objectKey)
            .destinationBucket(toBucket)
            .destinationKey(objectKey)
            .build();

        CompletableFuture<CopyObjectResponse> response =
getAsyncClient().copyObject(copyReq);
        response.whenComplete((copyRes, ex) -> {
            if (copyRes != null) {
                logger.info("The " + objectKey + " was copied to " + toBucket);
            } else {
                throw new RuntimeException("An S3 exception occurred during copy",
ex);
            }
        });

        return response.thenApply(CopyObjectResponse::copyObjectResult)
            .thenApply(Object::toString);
    }
```

Usa un S3 TransferManager para copiar un objeto de un depósito a otro. Vea el archivo completo y pruébelo.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.model.CopyObjectRequest;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedCopy;
import software.amazon.awssdk.transfer.s3.model.Copy;
import software.amazon.awssdk.transfer.s3.model.CopyRequest;

import java.util.UUID;

    public String copyObject(S3TransferManager transferManager, String bucketName,
            String key, String destinationBucket, String destinationKey) {
        CopyObjectRequest copyObjectRequest = CopyObjectRequest.builder()
                .sourceBucket(bucketName)
                .sourceKey(key)
                .destinationBucket(destinationBucket)
```

```
                .destinationKey(destinationKey)
                .build();

        CopyRequest copyRequest = CopyRequest.builder()
                .copyObjectRequest(copyObjectRequest)
                .build();

        Copy copy = transferManager.copy(copyRequest);

        CompletedCopy completedCopy = copy.completionFuture().join();
        return completedCopy.response().copyObjectResult().eTag();
    }
```

- Para obtener más información sobre la API, consulte CopyObjectla Referencia AWS SDK for Java 2.x de la API.

`CreateBucket`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateBucket`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Crear un bucket.

```
    /**
     * Creates an S3 bucket asynchronously.
     *
     * @param bucketName the name of the S3 bucket to create
     * @return a {@link CompletableFuture} that completes when the bucket is created
and ready
     * @throws RuntimeException if there is a failure while creating the bucket
     */
    public CompletableFuture<Void> createBucketAsync(String bucketName) {
        CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
```

```
            .bucket(bucketName)
            .build();

        CompletableFuture<CreateBucketResponse> response =
getAsyncClient().createBucket(bucketRequest);
        return response.thenCompose(resp -> {
            S3AsyncWaiter s3Waiter = getAsyncClient().waiter();
            HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
                .bucket(bucketName)
                .build();

            CompletableFuture<WaiterResponse<HeadBucketResponse>>
waiterResponseFuture =
                s3Waiter.waitUntilBucketExists(bucketRequestWait);
            return waiterResponseFuture.thenAccept(waiterResponse -> {
                waiterResponse.matched().response().ifPresent(headBucketResponse ->
{
                    logger.info(bucketName + " is ready");
                });
            });
        }).whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to create bucket", ex);
            }
        });
    }
```

Cree un nuevo bucket con el bloqueo de objetos habilitado.

```
    // Create a new Amazon S3 bucket with object lock options.
    public void createBucketWithLockOptions(boolean enableObjectLock, String
bucketName) {
        S3Waiter s3Waiter = getClient().waiter();
        CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
            .bucket(bucketName)
            .objectLockEnabledForBucket(enableObjectLock)
            .build();

        getClient().createBucket(bucketRequest);
        HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
            .bucket(bucketName)
            .build();
```

```
        // Wait until the bucket is created and print out the response.
        s3Waiter.waitUntilBucketExists(bucketRequestWait);
        System.out.println(bucketName + " is ready");
    }
```

- Para obtener más información sobre la API, consulta CreateBucketla Referencia AWS SDK for Java 2.x de la API.

`DeleteBucket`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteBucket`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes an S3 bucket asynchronously.
     *
     * @param bucket the name of the bucket to be deleted
     * @return a {@link CompletableFuture} that completes when the bucket deletion
is successful, or throws a {@link RuntimeException}
     * if an error occurs during the deletion process
     */
    public CompletableFuture<Void> deleteBucketAsync(String bucket) {
        DeleteBucketRequest deleteBucketRequest = DeleteBucketRequest.builder()
            .bucket(bucket)
            .build();

        CompletableFuture<DeleteBucketResponse> response =
getAsyncClient().deleteBucket(deleteBucketRequest);
        response.whenComplete((deleteRes, ex) -> {
            if (deleteRes != null) {
                logger.info(bucket + " was deleted.");
```

```
            } else {
                throw new RuntimeException("An S3 exception occurred during bucket
 deletion", ex);
            }
        });
        return response.thenApply(r -> null);
    }
```

- Para obtener más información sobre la API, consulta DeleteBucketla Referencia AWS SDK for Java 2.x de la API.

`DeleteBucketPolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteBucketPolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.DeleteBucketPolicyRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DeleteBucketPolicy {
    public static void main(String[] args) {
```

```
        final String usage = """

                Usage:
                    <bucketName>

                Where:
                    bucketName - The Amazon S3 bucket to delete the policy from (for
example, bucket1).""";

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        System.out.format("Deleting policy from bucket: \"%s\"\n\n", bucketName);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
                .region(region)
                .build();

        deleteS3BucketPolicy(s3, bucketName);
        s3.close();
    }

    /**
     * Deletes the S3 bucket policy for the specified bucket.
     *
     * @param s3 the {@link S3Client} instance to use for the operation
     * @param bucketName the name of the S3 bucket for which the policy should be
deleted
     *
     * @throws S3Exception if there is an error deleting the bucket policy
     */
    public static void deleteS3BucketPolicy(S3Client s3, String bucketName) {
        DeleteBucketPolicyRequest delReq = DeleteBucketPolicyRequest.builder()
                .bucket(bucketName)
                .build();

        try {
            s3.deleteBucketPolicy(delReq);
            System.out.println("Done!");

        } catch (S3Exception e) {
```

```
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteBucketPolicyla Referencia AWS SDK for Java 2.x de la API.

`DeleteBucketWebsite`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteBucketWebsite`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.DeleteBucketWebsiteRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DeleteWebsiteConfiguration {
    public static void main(String[] args) {
        final String usage = """
```

```
            Usage:     <bucketName>

            Where:
                bucketName - The Amazon S3 bucket to delete the website
 configuration from.
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        System.out.format("Deleting website configuration for Amazon S3 bucket: %s
\n", bucketName);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        deleteBucketWebsiteConfig(s3, bucketName);
        System.out.println("Done!");
        s3.close();
    }

    /**
     * Deletes the website configuration for an Amazon S3 bucket.
     *
     * @param s3 The {@link S3Client} instance used to interact with Amazon S3.
     * @param bucketName The name of the S3 bucket for which the website
 configuration should be deleted.
     * @throws S3Exception If an error occurs while deleting the website
 configuration.
     */
    public static void deleteBucketWebsiteConfig(S3Client s3, String bucketName) {
        DeleteBucketWebsiteRequest delReq = DeleteBucketWebsiteRequest.builder()
            .bucket(bucketName)
            .build();

        try {
            s3.deleteBucketWebsite(delReq);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.out.println("Failed to delete website configuration!");
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteBucketWebsitela Referencia AWS SDK for Java 2.x de la API.

`DeleteObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Deletes an object from an S3 bucket asynchronously.
    *
    * @param bucketName the name of the S3 bucket
    * @param key        the key (file name) of the object to be deleted
    * @return a {@link CompletableFuture} that completes when the object has been
deleted
    */
   public CompletableFuture<Void> deleteObjectFromBucketAsync(String bucketName,
String key) {
       DeleteObjectRequest deleteObjectRequest = DeleteObjectRequest.builder()
           .bucket(bucketName)
           .key(key)
           .build();

       CompletableFuture<DeleteObjectResponse> response =
getAsyncClient().deleteObject(deleteObjectRequest);
       response.whenComplete((deleteRes, ex) -> {
```

```
            if (deleteRes != null) {
                logger.info(key + " was deleted");
            } else {
                throw new RuntimeException("An S3 exception occurred during delete",
ex);
            }
        });

        return response.thenApply(r -> null);
    }
```

- Para obtener más información sobre la API, consulta DeleteObjectla Referencia AWS SDK for Java 2.x de la API.

`DeleteObjects`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteObjects`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.services.s3.model.Delete;
import software.amazon.awssdk.services.s3.model.DeleteObjectsRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.util.ArrayList;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DeleteMultiObjects {
    public static void main(String[] args) {
        final String usage = """

            Usage:    <bucketName>

            Where:
               bucketName - the Amazon S3 bucket name.
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        deleteBucketObjects(s3, bucketName);
        s3.close();
    }

    /**
     * Deletes multiple objects from an Amazon S3 bucket.
     *
     * @param s3 An Amazon S3 client object.
     * @param bucketName The name of the Amazon S3 bucket to delete objects from.
     */
    public static void deleteBucketObjects(S3Client s3, String bucketName) {
        // Upload three sample objects to the specfied Amazon S3 bucket.
        ArrayList<ObjectIdentifier> keys = new ArrayList<>();
        PutObjectRequest putOb;
        ObjectIdentifier objectId;
```

```
        for (int i = 0; i < 3; i++) {
            String keyName = "delete object example " + i;
            objectId = ObjectIdentifier.builder()
                .key(keyName)
                .build();

            putOb = PutObjectRequest.builder()
                .bucket(bucketName)
                .key(keyName)
                .build();

            s3.putObject(putOb, RequestBody.fromString(keyName));
            keys.add(objectId);
        }

        System.out.println(keys.size() + " objects successfully created.");

        // Delete multiple objects in one request.
        Delete del = Delete.builder()
            .objects(keys)
            .build();

        try {
            DeleteObjectsRequest multiObjectDeleteRequest =
 DeleteObjectsRequest.builder()
                .bucket(bucketName)
                .delete(del)
                .build();

            s3.deleteObjects(multiObjectDeleteRequest);
            System.out.println("Multiple objects are deleted!");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteObjectsla Referencia AWS SDK for Java 2.x de la API.

`GetBucketAcl`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetBucketAcl`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectAclRequest;
import software.amazon.awssdk.services.s3.model.GetObjectAclResponse;
import software.amazon.awssdk.services.s3.model.Grant;

import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class GetAcl {
    public static void main(String[] args) {
        final String usage = """

            Usage:
              <bucketName> <objectKey>

            Where:
              bucketName - The Amazon S3 bucket to get the access control list (ACL)
 for.
              objectKey - The object to get the ACL for.\s
            """;
```

```
        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String objectKey = args[1];
        System.out.println("Retrieving ACL for object: " + objectKey);
        System.out.println("in bucket: " + bucketName);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        getBucketACL(s3, objectKey, bucketName);
        s3.close();
        System.out.println("Done!");
    }

    /**
     * Retrieves the Access Control List (ACL) for an object in an Amazon S3 bucket.
     *
     * @param s3 The S3Client object used to interact with the Amazon S3 service.
     * @param objectKey The key of the object for which the ACL is to be retrieved.
     * @param bucketName The name of the bucket containing the object.
     * @return The ID of the grantee who has permission on the object, or an empty
string if an error occurs.
     */
    public static String getBucketACL(S3Client s3, String objectKey, String
bucketName) {
        try {
            GetObjectAclRequest aclReq = GetObjectAclRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .build();

            GetObjectAclResponse aclRes = s3.getObjectAcl(aclReq);
            List<Grant> grants = aclRes.grants();
            String grantee = "";
            for (Grant grant : grants) {
                System.out.format("  %s: %s\n", grant.grantee().id(),
grant.permission());
                grantee = grant.grantee().id();
```

```
            }

            return grantee;
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return "";
    }
}
```

- Para obtener más información sobre la API, consulta GetBucketAcllla Referencia AWS SDK for Java 2.x de la API.

`GetBucketPolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetBucketPolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetBucketPolicyRequest;
import software.amazon.awssdk.services.s3.model.GetBucketPolicyResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class GetBucketPolicy {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName>

            Where:
                bucketName - The Amazon S3 bucket to get the policy from.
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        System.out.format("Getting policy for bucket: \"%s\"\n\n", bucketName);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        String polText = getPolicy(s3, bucketName);
        System.out.println("Policy Text: " + polText);
        s3.close();
    }

    /**
     * Retrieves the policy for the specified Amazon S3 bucket.
     *
     * @param s3 the {@link S3Client} instance to use for making the request
     * @param bucketName the name of the S3 bucket for which to retrieve the policy
     * @return the policy text for the specified bucket, or an empty string if an
 error occurs
     */
    public static String getPolicy(S3Client s3, String bucketName) {
        String policyText;
        System.out.format("Getting policy for bucket: \"%s\"\n\n", bucketName);
        GetBucketPolicyRequest policyReq = GetBucketPolicyRequest.builder()
            .bucket(bucketName)
```

```
            .build();

        try {
            GetBucketPolicyResponse policyRes = s3.getBucketPolicy(policyReq);
            policyText = policyRes.policy();
            return policyText;

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return "";
    }
}
```

- Para obtener más información sobre la API, consulta GetBucketPolicyla Referencia AWS SDK for Java 2.x de la API.

`GetBucketReplication`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetBucketReplication`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Retrieves the replication details for the specified S3 bucket.
     *
     * @param s3Client           the S3 client used to interact with the S3 service
     * @param sourceBucketName   the name of the S3 bucket to retrieve the
 replication details for
     *
     * @throws S3Exception if there is an error retrieving the replication details
     */
```

```
   public static void getReplicationDetails(S3Client s3Client, String
sourceBucketName) {
       GetBucketReplicationRequest getRequest =
GetBucketReplicationRequest.builder()
           .bucket(sourceBucketName)
           .build();

       try {
           ReplicationConfiguration replicationConfig =
s3Client.getBucketReplication(getRequest).replicationConfiguration();
           ReplicationRule rule = replicationConfig.rules().get(0);
           System.out.println("Retrieved destination bucket: " +
rule.destination().bucket());
           System.out.println("Retrieved priority: " + rule.priority());
           System.out.println("Retrieved source-bucket replication rule status: " +
rule.status());

       } catch (S3Exception e) {
           System.err.println("Failed to retrieve replication details: " +
e.awsErrorDetails().errorMessage());
       }
   }
```

- Para obtener más información sobre la API, consulta GetBucketReplicationla Referencia AWS SDK for Java 2.x de la API.

`GetObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Lea datos como una matriz de bytes con un S3 Client.

```
   /**
    * Asynchronously retrieves the bytes of an object from an Amazon S3 bucket and
writes them to a local file.
    *
    * @param bucketName the name of the S3 bucket containing the object
    * @param keyName    the key (or name) of the S3 object to retrieve
    * @param path       the local file path where the object's bytes will be
written
    * @return a {@link CompletableFuture} that completes when the object bytes have
been written to the local file
    */
   public CompletableFuture<Void> getObjectBytesAsync(String bucketName, String
keyName, String path) {
       GetObjectRequest objectRequest = GetObjectRequest.builder()
           .key(keyName)
           .bucket(bucketName)
           .build();

       CompletableFuture<ResponseBytes<GetObjectResponse>> response =
getAsyncClient().getObject(objectRequest, AsyncResponseTransformer.toBytes());
       return response.thenAccept(objectBytes -> {
           try {
               byte[] data = objectBytes.asByteArray();
               Path filePath = Paths.get(path);
               Files.write(filePath, data);
               logger.info("Successfully obtained bytes from an S3 object");
           } catch (IOException ex) {
               throw new RuntimeException("Failed to write data to file", ex);
           }
       }).whenComplete((resp, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to get object bytes from S3",
ex);
           }
       });
   }
```

Utilice un S3 TransferManager para descargar un objeto de un bucket de S3 a un archivo local. Vea el archivo completo y pruébelo.

```
import org.slf4j.Logger;
```

```
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedFileDownload;
import software.amazon.awssdk.transfer.s3.model.DownloadFileRequest;
import software.amazon.awssdk.transfer.s3.model.FileDownload;
import software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener;

import java.io.IOException;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Files;
import java.nio.file.NoSuchFileException;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.util.UUID;

    public Long downloadFile(S3TransferManager transferManager, String bucketName,
                             String key, String downloadedFileWithPath) {
        DownloadFileRequest downloadFileRequest = DownloadFileRequest.builder()
                .getObjectRequest(b -> b.bucket(bucketName).key(key))
                .destination(Paths.get(downloadedFileWithPath))
                .build();

        FileDownload downloadFile =
 transferManager.downloadFile(downloadFileRequest);

        CompletedFileDownload downloadResult =
 downloadFile.completionFuture().join();
        logger.info("Content length [{}]",
 downloadResult.response().contentLength());
        return downloadResult.response().contentLength();
    }
```

Lea las etiquetas que pertenecen a un objeto con un S3Client.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectTaggingRequest;
import software.amazon.awssdk.services.s3.model.GetObjectTaggingResponse;
```

```
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.Tag;

import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class GetObjectTags {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <keyName>\s

            Where:
                bucketName - The Amazon S3 bucket name.\s
                keyName - A key name that represents the object.\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        listTags(s3, bucketName, keyName);
        s3.close();
    }

    /**
     * Lists the tags associated with an Amazon S3 object.
```

```
     *
     * @param s3 the S3Client object used to interact with the Amazon S3 service
     * @param bucketName the name of the S3 bucket that contains the object
     * @param keyName the key (name) of the S3 object
     */
    public static void listTags(S3Client s3, String bucketName, String keyName) {
        try {
            GetObjectTaggingRequest getTaggingRequest = GetObjectTaggingRequest
                .builder()
                .key(keyName)
                .bucket(bucketName)
                .build();

            GetObjectTaggingResponse tags = s3.getObjectTagging(getTaggingRequest);
            List<Tag> tagSet = tags.tagSet();
            for (Tag tag : tagSet) {
                System.out.println(tag.key());
                System.out.println(tag.value());
            }

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Obtenga una URL para un objeto con un S3Client.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetUrlRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.net.URL;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
```

```
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class GetObjectUrl {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <keyName>\s

            Where:
                bucketName - The Amazon S3 bucket name.
                keyName - A key name that represents the object.\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        getURL(s3, bucketName, keyName);
        s3.close();
    }

    /**
     * Retrieves the URL for a specific object in an Amazon S3 bucket.
     *
     * @param s3 the S3Client object used to interact with the Amazon S3 service
     * @param bucketName the name of the S3 bucket where the object is stored
     * @param keyName the name of the object for which the URL should be retrieved
     * @throws S3Exception if there is an error retrieving the URL for the specified
 object
     */
    public static void getURL(S3Client s3, String bucketName, String keyName) {
        try {
            GetUrlRequest request = GetUrlRequest.builder()
```

```
                .bucket(bucketName)
                .key(keyName)
                .build();

            URL url = s3.utilities().getUrl(request);
            System.out.println("The URL for  " + keyName + " is " + url);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Obtenga un objeto mediante el objeto de cliente S3Presigner con un S3Client.

```
import java.io.IOException;
import java.io.InputStream;
import java.io.OutputStream;
import java.net.HttpURLConnection;
import java.time.Duration;

import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.presigner.model.GetObjectPresignRequest;
import software.amazon.awssdk.services.s3.presigner.model.PresignedGetObjectRequest;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.utils.IoUtils;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetObjectPresignedUrl {
    public static void main(String[] args) {
        final String USAGE = """
```

```
            Usage:
                <bucketName> <keyName>\s

            Where:
                bucketName - The Amazon S3 bucket name.\s
                keyName - A key name that represents a text file.\s
            """;

        if (args.length != 2) {
            System.out.println(USAGE);
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        Region region = Region.US_EAST_1;
        S3Presigner presigner = S3Presigner.builder()
            .region(region)
            .build();

        getPresignedUrl(presigner, bucketName, keyName);
        presigner.close();
    }

    /**
     * Generates a pre-signed URL for an Amazon S3 object.
     *
     * @param presigner The {@link S3Presigner} instance to use for generating the
pre-signed URL.
     * @param bucketName The name of the Amazon S3 bucket where the object is
stored.
     * @param keyName The key name (file name) of the object in the Amazon S3
bucket.
     *
     * @throws S3Exception If there is an error interacting with the Amazon S3
service.
     * @throws IOException If there is an error opening the HTTP connection or
reading/writing the request/response.
     */
    public static void getPresignedUrl(S3Presigner presigner, String bucketName,
String keyName) {
        try {
            GetObjectRequest getObjectRequest = GetObjectRequest.builder()
```

```
                .bucket(bucketName)
                .key(keyName)
                .build();

            GetObjectPresignRequest getObjectPresignRequest =
GetObjectPresignRequest.builder()
                .signatureDuration(Duration.ofMinutes(60))
                .getObjectRequest(getObjectRequest)
                .build();

            PresignedGetObjectRequest presignedGetObjectRequest =
presigner.presignGetObject(getObjectPresignRequest);
            String theUrl = presignedGetObjectRequest.url().toString();
            System.out.println("Presigned URL: " + theUrl);
            HttpURLConnection connection = (HttpURLConnection)
presignedGetObjectRequest.url().openConnection();
            presignedGetObjectRequest.httpRequest().headers().forEach((header,
values) -> {
                values.forEach(value -> {
                    connection.addRequestProperty(header, value);
                });
            });

            // Send any request payload that the service needs (not needed when
            // isBrowserExecutable is true).
            if (presignedGetObjectRequest.signedPayload().isPresent()) {
                connection.setDoOutput(true);

                try (InputStream signedPayload =
presignedGetObjectRequest.signedPayload().get().asInputStream();
                     OutputStream httpOutputStream = connection.getOutputStream()) {
                    IoUtils.copy(signedPayload, httpOutputStream);
                }
            }

            // Download the result of executing the request.
            try (InputStream content = connection.getInputStream()) {
                System.out.println("Service returned response: ");
                IoUtils.copy(content, System.out);
            }

        } catch (S3Exception | IOException e) {
            e.printStackTrace();
        }
```

```
    }
}
```

Obtenga un objeto mediante un ResponseTransformer objeto y S3Client.

```
import software.amazon.awssdk.core.ResponseBytes;
import software.amazon.awssdk.core.sync.ResponseTransformer;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.GetObjectResponse;

import java.io.File;
import java.io.FileOutputStream;
import java.io.IOException;
import java.io.OutputStream;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class GetObjectData {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <keyName> <path>

            Where:
                bucketName - The Amazon S3 bucket name.\s
                keyName - The key name.\s
                path - The path where the file is written to.\s
            """;

        if (args.length != 3) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        String path = args[2];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        getObjectBytes(s3, bucketName, keyName, path);
        s3.close();
    }

    /**
     * Retrieves the bytes of an object stored in an Amazon S3 bucket and saves them
to a local file.
     *
     * @param s3 The S3Client instance used to interact with the Amazon S3 service.
     * @param bucketName The name of the S3 bucket where the object is stored.
     * @param keyName The key (or name) of the S3 object.
     * @param path The local file path where the object's bytes will be saved.
     * @throws IOException If an I/O error occurs while writing the bytes to the
local file.
     * @throws S3Exception If an error occurs while retrieving the object from the
S3 bucket.
     */
    public static void getObjectBytes(S3Client s3, String bucketName, String
keyName, String path) {
        try {
            GetObjectRequest objectRequest = GetObjectRequest
                .builder()
                .key(keyName)
                .bucket(bucketName)
                .build();

            ResponseBytes<GetObjectResponse> objectBytes =
s3.getObject(objectRequest, ResponseTransformer.toBytes());
            byte[] data = objectBytes.asByteArray();

            // Write the data to a local file.
            File myFile = new File(path);
```

```
            OutputStream os = new FileOutputStream(myFile);
            os.write(data);
            System.out.println("Successfully obtained bytes from an S3 object");
            os.close();

        } catch (IOException ex) {
            ex.printStackTrace();
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulte la Referencia de GetObjectla AWS SDK for Java 2.x API.

`GetObjectLegalHold`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetObjectLegalHold`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   // Get the legal hold details for an S3 object.
   public ObjectLockLegalHold getObjectLegalHold(String bucketName, String
objectKey) {
       try {
           GetObjectLegalHoldRequest legalHoldRequest =
GetObjectLegalHoldRequest.builder()
                   .bucket(bucketName)
                   .key(objectKey)
                   .build();
```

```
            GetObjectLegalHoldResponse response =
getClient().getObjectLegalHold(legalHoldRequest);
            System.out.println("Object legal hold for " + objectKey + " in " +
bucketName +
                ":\n\tStatus: " + response.legalHold().status());
            return response.legalHold();

        } catch (S3Exception ex) {
            System.out.println("\tUnable to fetch legal hold: '" + ex.getMessage() +
"'");
        }

        return null;
    }
```

- Para obtener más información sobre la API, consulta GetObjectLegalHoldla Referencia AWS SDK for Java 2.x de la API.

`GetObjectLockConfiguration`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetObjectLockConfiguration`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    // Get the object lock configuration details for an S3 bucket.
    public void getBucketObjectLockConfiguration(String bucketName) {
        GetObjectLockConfigurationRequest objectLockConfigurationRequest =
GetObjectLockConfigurationRequest.builder()
            .bucket(bucketName)
            .build();

        GetObjectLockConfigurationResponse response =
getClient().getObjectLockConfiguration(objectLockConfigurationRequest);
        System.out.println("Bucket object lock config for "+bucketName +":  ");
```

```
        System.out.println("\tEnabled:
"+response.objectLockConfiguration().objectLockEnabled());
        System.out.println("\tRule: "+
response.objectLockConfiguration().rule().defaultRetention());
    }
```

- Para obtener más información sobre la API, consulta GetObjectLockConfigurationla Referencia AWS SDK for Java 2.x de la API.

`GetObjectRetention`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetObjectRetention`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    // Get the retention period for an S3 object.
    public ObjectLockRetention getObjectRetention(String bucketName, String key){
        try {
            GetObjectRetentionRequest retentionRequest =
GetObjectRetentionRequest.builder()
                .bucket(bucketName)
                .key(key)
                .build();

            GetObjectRetentionResponse response =
getClient().getObjectRetention(retentionRequest);
            System.out.println("tObject retention for "+key +" in "+ bucketName +":
" + response.retention().mode() +" until "+ response.retention().retainUntilDate()
+".");
            return response.retention();

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return null;
```

```
        }
    }
```

- Para obtener más información sobre la API, consulta GetObjectRetentionla Referencia AWS SDK for Java 2.x de la API.

`HeadObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `HeadObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Determinar el tipo de contenido de un objeto.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.HeadObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetObjectContentType {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <keyName>
```

```
            Where:
                bucketName - The Amazon S3 bucket name.\s
                keyName - The key name.\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        getContentType(s3, bucketName, keyName);
        s3.close();
    }

    /**
     * Retrieves the content type of an object stored in an Amazon S3 bucket.
     *
     * @param s3 an instance of the {@link S3Client} class, which is used to
interact with the Amazon S3 service
     * @param bucketName the name of the S3 bucket where the object is stored
     * @param keyName the key (file name) of the object in the S3 bucket
     */
    public static void getContentType(S3Client s3, String bucketName, String
keyName) {
        try {
            HeadObjectRequest objectRequest = HeadObjectRequest.builder()
                .key(keyName)
                .bucket(bucketName)
                .build();

            HeadObjectResponse objectHead = s3.headObject(objectRequest);
            String type = objectHead.contentType();
            System.out.println("The object content type is " + type);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
    }
}
```

Obtener el estado de restauración de un objeto.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.HeadObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

public class GetObjectRestoreStatus {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <keyName>\s

            Where:
                bucketName - The Amazon S3 bucket name.\s
                keyName - A key name that represents the object.\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        checkStatus(s3, bucketName, keyName);
        s3.close();
    }
```

```
    /**
     * Checks the restoration status of an Amazon S3 object.
     *
     * @param s3         an instance of the {@link S3Client} class used to interact
 with the Amazon S3 service
     * @param bucketName the name of the Amazon S3 bucket where the object is stored
     * @param keyName    the name of the Amazon S3 object to be checked
     * @throws S3Exception if an error occurs while interacting with the Amazon S3
 service
     */
    public static void checkStatus(S3Client s3, String bucketName, String keyName) {
        try {
            HeadObjectRequest headObjectRequest = HeadObjectRequest.builder()
                .bucket(bucketName)
                .key(keyName)
                .build();

            HeadObjectResponse response = s3.headObject(headObjectRequest);
            System.out.println("The Amazon S3 object restoration status is " +
 response.restore());

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta HeadObjectla Referencia AWS SDK for Java 2.x de la API.

`ListBuckets`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListBuckets`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.paginators.ListBucketsIterable;
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListBuckets {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        listAllBuckets(s3);

    }

    /**
     * Lists all the S3 buckets available in the current AWS account.
     *
     * @param s3 The {@link S3Client} instance to use for interacting with the
 Amazon S3 service.
     */
    public static void listAllBuckets(S3Client s3) {
        ListBucketsIterable response = s3.listBucketsPaginator();
        response.buckets().forEach(bucket ->
            System.out.println("Bucket Name: " + bucket.name()));
    }
```

- Para obtener más información sobre la API, consulta ListBucketsla Referencia AWS SDK for Java 2.x de la API.

`ListMultipartUploads`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListMultipartUploads`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.ListMultipartUploadsRequest;
import software.amazon.awssdk.services.s3.model.ListMultipartUploadsResponse;
import software.amazon.awssdk.services.s3.model.MultipartUpload;
import software.amazon.awssdk.services.s3.model.S3Exception;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class ListMultipartUploads {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <bucketName>\s

                Where:
                    bucketName - The name of the Amazon S3 bucket where an in-
progress multipart upload is occurring.
```

```
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
                .region(region)
                .build();
        listUploads(s3, bucketName);
        s3.close();
    }

    /**
     * Lists the multipart uploads currently in progress in the specified Amazon S3
bucket.
     *
     * @param s3 the S3Client object used to interact with Amazon S3
     * @param bucketName the name of the Amazon S3 bucket to list the multipart
uploads for
     */
    public static void listUploads(S3Client s3, String bucketName) {
        try {
            ListMultipartUploadsRequest listMultipartUploadsRequest =
ListMultipartUploadsRequest.builder()
                    .bucket(bucketName)
                    .build();

            ListMultipartUploadsResponse response =
s3.listMultipartUploads(listMultipartUploadsRequest);
            List<MultipartUpload> uploads = response.uploads();
            for (MultipartUpload upload : uploads) {
                System.out.println("Upload in progress: Key = \"" + upload.key() +
"\", id = " + upload.uploadId());
            }

        } catch (S3Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

```
}
```

- Para obtener más información sobre la API, consulta ListMultipartUploadsla Referencia AWS SDK for Java 2.x de la API.

`ListObjectsV2`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListObjectsV2`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously lists all objects in the specified S3 bucket.
    *
    * @param bucketName the name of the S3 bucket to list objects for
    * @return a {@link CompletableFuture} that completes when all objects have been
listed
    */
   public CompletableFuture<Void> listAllObjectsAsync(String bucketName) {
       ListObjectsV2Request initialRequest = ListObjectsV2Request.builder()
           .bucket(bucketName)
           .maxKeys(1)
           .build();

       ListObjectsV2Publisher paginator =
getAsyncClient().listObjectsV2Paginator(initialRequest);
       return paginator.subscribe(response -> {
           response.contents().forEach(s3Object -> {
               logger.info("Object key: " + s3Object.key());
           });
       }).thenRun(() -> {
           logger.info("Successfully listed all objects in the bucket: " +
bucketName);
```

```
        }).exceptionally(ex -> {
            throw new RuntimeException("Failed to list objects", ex);
        });
    }
```

Muestre objetos mediante paginación.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Request;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.paginators.ListObjectsV2Iterable;

public class ListObjectsPaginated {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName>\s

            Where:
                bucketName - The Amazon S3 bucket from which objects are read.\s
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        listBucketObjects(s3, bucketName);
        s3.close();
    }

    /**
     * Lists the objects in the specified S3 bucket.
```

```
     *
     * @param s3 the S3Client instance used to interact with Amazon S3
     * @param bucketName the name of the S3 bucket to list the objects from
     */
    public static void listBucketObjects(S3Client s3, String bucketName) {
        try {
            ListObjectsV2Request listReq = ListObjectsV2Request.builder()
                .bucket(bucketName)
                .maxKeys(1)
                .build();

            ListObjectsV2Iterable listRes = s3.listObjectsV2Paginator(listReq);
            listRes.stream()
                .flatMap(r -> r.contents().stream())
                .forEach(content -> System.out.println(" Key: " + content.key() + "
 size = " + content.size()));

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta la ListObjectsversión 2 en la referencia de la AWS SDK for Java 2.x API.

`PutBucketAcl`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutBucketAcl`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.AccessControlPolicy;
import software.amazon.awssdk.services.s3.model.Grant;
import software.amazon.awssdk.services.s3.model.Permission;
import software.amazon.awssdk.services.s3.model.PutBucketAclRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.Type;

import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SetAcl {
    public static void main(String[] args) {
        final String usage = """

            Usage:
              <bucketName> <id>\s

            Where:
              bucketName - The Amazon S3 bucket to grant permissions on.\s
              id - The ID of the owner of this bucket (you can get this value from
 the AWS Management Console).
            """;

        if (args.length != 2) {
            System.out.println(usage);
            return;
        }

        String bucketName = args[0];
        String id = args[1];
        System.out.format("Setting access \n");
        System.out.println(" in bucket: " + bucketName);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
```

```
            .region(region)
            .build();

        setBucketAcl(s3, bucketName, id);
        System.out.println("Done!");
        s3.close();
    }

    /**
     * Sets the Access Control List (ACL) for an Amazon S3 bucket.
     *
     * @param s3 the S3Client instance to be used for the operation
     * @param bucketName the name of the S3 bucket to set the ACL for
     * @param id the ID of the AWS user or account that will be granted full control
of the bucket
     * @throws S3Exception if an error occurs while setting the bucket ACL
     */
    public static void setBucketAcl(S3Client s3, String bucketName, String id) {
        try {
            Grant ownerGrant = Grant.builder()
                .grantee(builder -> builder.id(id)
                    .type(Type.CANONICAL_USER))
                .permission(Permission.FULL_CONTROL)
                .build();

            List<Grant> grantList2 = new ArrayList<>();
            grantList2.add(ownerGrant);

            AccessControlPolicy acl = AccessControlPolicy.builder()
                .owner(builder -> builder.id(id))
                .grants(grantList2)
                .build();

            PutBucketAclRequest putAclReq = PutBucketAclRequest.builder()
                .bucket(bucketName)
                .accessControlPolicy(acl)
                .build();

            s3.putBucketAcl(putAclReq);

        } catch (S3Exception e) {
            e.printStackTrace();
            System.exit(1);
        }
```

```
    }
}
```

- Para obtener más información sobre la API, consulta PutBucketAcll la Referencia AWS SDK for Java 2.x de la API.

`PutBucketCors`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutBucketCors`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;

import java.util.ArrayList;
import java.util.List;

import software.amazon.awssdk.services.s3.model.GetBucketCorsRequest;
import software.amazon.awssdk.services.s3.model.GetBucketCorsResponse;
import software.amazon.awssdk.services.s3.model.DeleteBucketCorsRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.CORSRule;
import software.amazon.awssdk.services.s3.model.CORSConfiguration;
import software.amazon.awssdk.services.s3.model.PutBucketCorsRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class S3Cors {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <accountId>\s

            Where:
                bucketName - The Amazon S3 bucket to upload an object into.
                accountId - The id of the account that owns the Amazon S3 bucket.
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String accountId = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        setCorsInformation(s3, bucketName, accountId);
        getBucketCorsInformation(s3, bucketName, accountId);
        deleteBucketCorsInformation(s3, bucketName, accountId);
        s3.close();
    }

    /**
     * Deletes the CORS (Cross-Origin Resource Sharing) configuration for an Amazon
 S3 bucket.
     *
     * @param s3            the {@link S3Client} instance used to interact with the
 Amazon S3 service
     * @param bucketName    the name of the Amazon S3 bucket for which the CORS
 configuration should be deleted
     * @param accountId     the expected AWS account ID of the bucket owner
     *
     * @throws S3Exception if an error occurs while deleting the CORS configuration
 for the bucket
     */
```

```
   public static void deleteBucketCorsInformation(S3Client s3, String bucketName,
String accountId) {
       try {
           DeleteBucketCorsRequest bucketCorsRequest =
DeleteBucketCorsRequest.builder()
               .bucket(bucketName)
               .expectedBucketOwner(accountId)
               .build();

           s3.deleteBucketCors(bucketCorsRequest);

       } catch (S3Exception e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }

   /**
    * Retrieves the CORS (Cross-Origin Resource Sharing) configuration for the
specified S3 bucket.
    *
    * @param s3 the S3Client instance to use for the operation
    * @param bucketName the name of the S3 bucket to retrieve the CORS
configuration for
    * @param accountId the expected bucket owner's account ID
    *
    * @throws S3Exception if there is an error retrieving the CORS configuration
    */
   public static void getBucketCorsInformation(S3Client s3, String bucketName,
String accountId) {
       try {
           GetBucketCorsRequest bucketCorsRequest = GetBucketCorsRequest.builder()
               .bucket(bucketName)
               .expectedBucketOwner(accountId)
               .build();

           GetBucketCorsResponse corsResponse =
s3.getBucketCors(bucketCorsRequest);
           List<CORSRule> corsRules = corsResponse.corsRules();
           for (CORSRule rule : corsRules) {
               System.out.println("allowOrigins: " + rule.allowedOrigins());
               System.out.println("AllowedMethod: " + rule.allowedMethods());
           }
```

```
        } catch (S3Exception e) {

            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    /**
     * Sets the Cross-Origin Resource Sharing (CORS) rules for an Amazon S3 bucket.
     *
     * @param s3 The S3Client object used to interact with the Amazon S3 service.
     * @param bucketName The name of the S3 bucket to set the CORS rules for.
     * @param accountId The AWS account ID of the bucket owner.
     */
    public static void setCorsInformation(S3Client s3, String bucketName, String
accountId) {
        List<String> allowMethods = new ArrayList<>();
        allowMethods.add("PUT");
        allowMethods.add("POST");
        allowMethods.add("DELETE");

        List<String> allowOrigins = new ArrayList<>();
        allowOrigins.add("http://example.com");
        try {
            // Define CORS rules.
            CORSRule corsRule = CORSRule.builder()
                .allowedMethods(allowMethods)
                .allowedOrigins(allowOrigins)
                .build();

            List<CORSRule> corsRules = new ArrayList<>();
            corsRules.add(corsRule);
            CORSConfiguration configuration = CORSConfiguration.builder()
                .corsRules(corsRules)
                .build();

            PutBucketCorsRequest putBucketCorsRequest =
PutBucketCorsRequest.builder()
                .bucket(bucketName)
                .corsConfiguration(configuration)
                .expectedBucketOwner(accountId)
                .build();

            s3.putBucketCors(putBucketCorsRequest);
```

```
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta PutBucketCorsla Referencia AWS SDK for Java 2.x de la API.

`PutBucketLifecycleConfiguration`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutBucketLifecycleConfiguration`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.LifecycleRuleFilter;
import software.amazon.awssdk.services.s3.model.Transition;
import
 software.amazon.awssdk.services.s3.model.GetBucketLifecycleConfigurationRequest;
import
 software.amazon.awssdk.services.s3.model.GetBucketLifecycleConfigurationResponse;
import software.amazon.awssdk.services.s3.model.DeleteBucketLifecycleRequest;
import software.amazon.awssdk.services.s3.model.TransitionStorageClass;
import software.amazon.awssdk.services.s3.model.LifecycleRule;
import software.amazon.awssdk.services.s3.model.ExpirationStatus;
import software.amazon.awssdk.services.s3.model.BucketLifecycleConfiguration;
import
 software.amazon.awssdk.services.s3.model.PutBucketLifecycleConfigurationRequest;
```

```
import software.amazon.awssdk.services.s3.model.S3Exception;
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class LifecycleConfiguration {
    public static void main(String[] args) {
        final String usage = """

            Usage:
              <bucketName> <accountId>\s

            Where:
              bucketName - The Amazon Simple Storage Service (Amazon S3) bucket to
 upload an object into.
              accountId - The id of the account that owns the Amazon S3 bucket.
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String accountId = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        setLifecycleConfig(s3, bucketName, accountId);
        getLifecycleConfig(s3, bucketName, accountId);
        deleteLifecycleConfig(s3, bucketName, accountId);
        System.out.println("You have successfully created, updated, and deleted a
 Lifecycle configuration");
        s3.close();
```

```
    }

    /**
     * Sets the lifecycle configuration for an Amazon S3 bucket.
     *
     * @param s3           The Amazon S3 client to use for the operation.
     * @param bucketName   The name of the Amazon S3 bucket.
     * @param accountId    The expected owner of the Amazon S3 bucket.
     *
     * @throws S3Exception if there is an error setting the lifecycle configuration.
     */
    public static void setLifecycleConfig(S3Client s3, String bucketName, String
accountId) {
        try {
            // Create a rule to archive objects with the "glacierobjects/" prefix to
the
            // S3 Glacier Flexible Retrieval storage class immediately.
            LifecycleRuleFilter ruleFilter = LifecycleRuleFilter.builder()
                .prefix("glacierobjects/")
                .build();

            Transition transition = Transition.builder()
                .storageClass(TransitionStorageClass.GLACIER)
                .days(0)
                .build();

            LifecycleRule rule1 = LifecycleRule.builder()
                .id("Archive immediately rule")
                .filter(ruleFilter)
                .transitions(transition)
                .status(ExpirationStatus.ENABLED)
                .build();

            // Create a second rule.
            Transition transition2 = Transition.builder()
                .storageClass(TransitionStorageClass.GLACIER)
                .days(0)
                .build();

            List<Transition> transitionList = new ArrayList<>();
            transitionList.add(transition2);

            LifecycleRuleFilter ruleFilter2 = LifecycleRuleFilter.builder()
                .prefix("glacierobjects/")
```

```
                .build();

            LifecycleRule rule2 = LifecycleRule.builder()
                .id("Archive and then delete rule")
                .filter(ruleFilter2)
                .transitions(transitionList)
                .status(ExpirationStatus.ENABLED)
                .build();

            // Add the LifecycleRule objects to an ArrayList.
            ArrayList<LifecycleRule> ruleList = new ArrayList<>();
            ruleList.add(rule1);
            ruleList.add(rule2);

            BucketLifecycleConfiguration lifecycleConfiguration =
BucketLifecycleConfiguration.builder()
                .rules(ruleList)
                .build();

            PutBucketLifecycleConfigurationRequest
putBucketLifecycleConfigurationRequest = PutBucketLifecycleConfigurationRequest
                .builder()
                .bucket(bucketName)
                .lifecycleConfiguration(lifecycleConfiguration)
                .expectedBucketOwner(accountId)
                .build();


s3.putBucketLifecycleConfiguration(putBucketLifecycleConfigurationRequest);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    /**
     * Retrieves the lifecycle configuration for an Amazon S3 bucket and adds a new
lifecycle rule to it.
     *
     * @param s3 the S3Client instance used to interact with Amazon S3
     * @param bucketName the name of the Amazon S3 bucket
     * @param accountId the expected owner of the Amazon S3 bucket
     */
```

```
   public static void getLifecycleConfig(S3Client s3, String bucketName, String
accountId) {
       try {
           GetBucketLifecycleConfigurationRequest
getBucketLifecycleConfigurationRequest = GetBucketLifecycleConfigurationRequest
               .builder()
               .bucket(bucketName)
               .expectedBucketOwner(accountId)
               .build();

           GetBucketLifecycleConfigurationResponse response = s3

.getBucketLifecycleConfiguration(getBucketLifecycleConfigurationRequest);
           List<LifecycleRule> newList = new ArrayList<>();
           List<LifecycleRule> rules = response.rules();
           for (LifecycleRule rule : rules) {
               newList.add(rule);
           }

           // Add a new rule with both a prefix predicate and a tag predicate.
           LifecycleRuleFilter ruleFilter = LifecycleRuleFilter.builder()
               .prefix("YearlyDocuments/")
               .build();

           Transition transition = Transition.builder()
               .storageClass(TransitionStorageClass.GLACIER)
               .days(3650)
               .build();

           LifecycleRule rule1 = LifecycleRule.builder()
               .id("NewRule")
               .filter(ruleFilter)
               .transitions(transition)
               .status(ExpirationStatus.ENABLED)
               .build();

           // Add the new rule to the list.
           newList.add(rule1);
           BucketLifecycleConfiguration lifecycleConfiguration =
BucketLifecycleConfiguration.builder()
               .rules(newList)
               .build();
```

```
            PutBucketLifecycleConfigurationRequest
putBucketLifecycleConfigurationRequest = PutBucketLifecycleConfigurationRequest
                .builder()
                .bucket(bucketName)
                .lifecycleConfiguration(lifecycleConfiguration)
                .expectedBucketOwner(accountId)
                .build();


s3.putBucketLifecycleConfiguration(putBucketLifecycleConfigurationRequest);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    /**
     * Deletes the lifecycle configuration for an Amazon S3 bucket.
     *
     * @param s3 the {@link S3Client} to use for the operation
     * @param bucketName the name of the S3 bucket
     * @param accountId the expected account owner of the S3 bucket
     *
     * @throws S3Exception if an error occurs while deleting the lifecycle
configuration
     */
    public static void deleteLifecycleConfig(S3Client s3, String bucketName, String
accountId) {
        try {
            DeleteBucketLifecycleRequest deleteBucketLifecycleRequest =
DeleteBucketLifecycleRequest
                .builder()
                .bucket(bucketName)
                .expectedBucketOwner(accountId)
                .build();

            s3.deleteBucketLifecycle(deleteBucketLifecycleRequest);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

```
}
```

- Para obtener más información sobre la API, consulta PutBucketLifecycleConfigurationla Referencia AWS SDK for Java 2.x de la API.

`PutBucketPolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutBucketPolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutBucketPolicyRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.regions.Region;

import java.io.IOException;
import java.nio.charset.StandardCharsets;
import java.nio.file.Files;
import java.nio.file.Paths;
import java.util.List;

import com.fasterxml.jackson.core.JsonParser;
import com.fasterxml.jackson.databind.ObjectMapper;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
```

```
public class SetBucketPolicy {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <polFile>

            Where:
                bucketName - The Amazon S3 bucket to set the policy on.
                polFile - A JSON file containing the policy (see the Amazon S3
 Readme for an example).\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String polFile = args[1];
        String policyText = getBucketPolicyFromFile(polFile);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        setPolicy(s3, bucketName, policyText);
        s3.close();
    }

    /**
     * Sets the policy for an Amazon S3 bucket.
     *
     * @param s3         the {@link S3Client} object used to interact with the
 Amazon S3 service
     * @param bucketName the name of the Amazon S3 bucket
     * @param policyText the text of the policy to be set on the bucket
     * @throws S3Exception if there is an error setting the bucket policy
     */
    public static void setPolicy(S3Client s3, String bucketName, String policyText)
 {
        System.out.println("Setting policy:");
        System.out.println("----");
        System.out.println(policyText);
```

```
        System.out.println("----");
        System.out.format("On Amazon S3 bucket: \"%s\"\n", bucketName);

        try {
            PutBucketPolicyRequest policyReq = PutBucketPolicyRequest.builder()
                .bucket(bucketName)
                .policy(policyText)
                .build();

            s3.putBucketPolicy(policyReq);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        System.out.println("Done!");
    }

    /**
     * Retrieves the bucket policy from a specified file.
     *
     * @param policyFile the path to the file containing the bucket policy
     * @return the content of the bucket policy file as a string
     */
    public static String getBucketPolicyFromFile(String policyFile) {
        StringBuilder fileText = new StringBuilder();
        try {
            List<String> lines = Files.readAllLines(Paths.get(policyFile),
StandardCharsets.UTF_8);
            for (String line : lines) {
                fileText.append(line);
            }

        } catch (IOException e) {
            System.out.format("Problem reading file: \"%s\"", policyFile);
            System.out.println(e.getMessage());
        }

        try {
            final JsonParser parser = new
ObjectMapper().getFactory().createParser(fileText.toString());
            while (parser.nextToken() != null) {
            }
```

```
        } catch (IOException jpe) {
            jpe.printStackTrace();
        }
        return fileText.toString();
    }
}
```

- Para obtener más información sobre la API, consulta PutBucketPolicyla Referencia AWS SDK for Java 2.x de la API.

`PutBucketReplication`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutBucketReplication`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Sets the replication configuration for an Amazon S3 bucket.
     *
     * @param s3Client             the S3Client instance to use for the operation
     * @param sourceBucketName     the name of the source bucket
     * @param destBucketName       the name of the destination bucket
     * @param destinationBucketARN the Amazon Resource Name (ARN) of the destination
bucket
     * @param roleARN              the ARN of the IAM role to use for the
replication configuration
     */
    public static void setReplication(S3Client s3Client, String sourceBucketName,
String destBucketName, String destinationBucketARN, String roleARN) {
        try {
            Destination destination = Destination.builder()
                .bucket(destinationBucketARN)
                .storageClass(StorageClass.STANDARD)
```

```
                .build();

            // Define a prefix filter for replication.
            ReplicationRuleFilter ruleFilter = ReplicationRuleFilter.builder()
                .prefix("documents/")
                .build();

            // Define delete marker replication setting.
            DeleteMarkerReplication deleteMarkerReplication =
DeleteMarkerReplication.builder()
                .status(DeleteMarkerReplicationStatus.DISABLED)
                .build();

            // Create the replication rule.
            ReplicationRule replicationRule = ReplicationRule.builder()
                .priority(1)
                .filter(ruleFilter)
                .status(ReplicationRuleStatus.ENABLED)
                .deleteMarkerReplication(deleteMarkerReplication)
                .destination(destination)
                .build();

            List<ReplicationRule> replicationRuleList = new ArrayList<>();
            replicationRuleList.add(replicationRule);

            // Define the replication configuration with IAM role.
            ReplicationConfiguration configuration =
ReplicationConfiguration.builder()
                .role(roleARN)
                .rules(replicationRuleList)
                .build();

            // Apply the replication configuration to the source bucket.
            PutBucketReplicationRequest replicationRequest =
PutBucketReplicationRequest.builder()
                .bucket(sourceBucketName)
                .replicationConfiguration(configuration)
                .build();

            s3Client.putBucketReplication(replicationRequest);
            System.out.println("Replication configuration set successfully.");

        } catch (IllegalArgumentException e) {
            System.err.println("Configuration error: " + e.getMessage());
```

```
        } catch (S3Exception e) {
            System.err.println("S3 Exception: " +
e.awsErrorDetails().errorMessage());
            System.err.println("Status Code: " + e.statusCode());
            System.err.println("Error Code: " + e.awsErrorDetails().errorCode());


        } catch (SdkException e) {
            System.err.println("SDK Exception: " + e.getMessage());
        }
    }
```

- Para obtener más información sobre la API, consulta PutBucketReplicationla Referencia AWS SDK for Java 2.x de la API.

`PutBucketVersioning`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutBucketVersioning`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Enables bucket versioning for the specified S3 bucket.
     *
     * @param s3Client the S3 client to use for the operation
     * @param bucketName the name of the S3 bucket to enable versioning for
     */
    public static void enableBucketVersioning(S3Client s3Client, String bucketName){
        VersioningConfiguration versioningConfiguration =
VersioningConfiguration.builder()
            .status(BucketVersioningStatus.ENABLED)
            .build();
```

```
        PutBucketVersioningRequest versioningRequest =
PutBucketVersioningRequest.builder()
            .bucket(bucketName)
            .versioningConfiguration(versioningConfiguration)
            .build();

        s3Client.putBucketVersioning(versioningRequest);
        System.out.println("Bucket versioning has been enabled for "+bucketName);
    }
```

- Para obtener más información sobre la API, consulta PutBucketVersioningla Referencia AWS SDK for Java 2.x de la API.

`PutBucketWebsite`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutBucketWebsite`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.IndexDocument;
import software.amazon.awssdk.services.s3.model.PutBucketWebsiteRequest;
import software.amazon.awssdk.services.s3.model.WebsiteConfiguration;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.regions.Region;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */

public class SetWebsiteConfiguration {
    public static void main(String[] args) {
        final String usage = """

            Usage:    <bucketName> [indexdoc]\s

            Where:
               bucketName   - The Amazon S3 bucket to set the website configuration
 on.\s
               indexdoc - The index document, ex. 'index.html'
                          If not specified, 'index.html' will be set.
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String indexDoc = "index.html";
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        setWebsiteConfig(s3, bucketName, indexDoc);
        s3.close();
    }

    /**
     * Sets the website configuration for an Amazon S3 bucket.
     *
     * @param s3 The {@link S3Client} instance to use for the AWS SDK operations.
     * @param bucketName The name of the S3 bucket to configure.
     * @param indexDoc The name of the index document to use for the website
 configuration.
     */
    public static void setWebsiteConfig(S3Client s3, String bucketName, String
 indexDoc) {
        try {
            WebsiteConfiguration websiteConfig = WebsiteConfiguration.builder()
                .indexDocument(IndexDocument.builder().suffix(indexDoc).build())
```

```
                .build();

            PutBucketWebsiteRequest pubWebsiteReq =
 PutBucketWebsiteRequest.builder()
                .bucket(bucketName)
                .websiteConfiguration(websiteConfig)
                .build();

            s3.putBucketWebsite(pubWebsiteReq);
            System.out.println("The call was successful");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta PutBucketWebsitela Referencia AWS SDK for Java 2.x de la API.

`PutObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Cargue un archivo en un bucket con un S3Client.

```
    /**
     * Uploads a local file to an AWS S3 bucket asynchronously.
     *
     * @param bucketName the name of the S3 bucket to upload the file to
     * @param key        the key (object name) to use for the uploaded file
```

```
     * @param objectPath the local file path of the file to be uploaded
     * @return a {@link CompletableFuture} that completes with the {@link
PutObjectResponse} when the upload is successful, or throws a {@link
RuntimeException} if the upload fails
     */
    public CompletableFuture<PutObjectResponse> uploadLocalFileAsync(String
bucketName, String key, String objectPath) {
        PutObjectRequest objectRequest = PutObjectRequest.builder()
            .bucket(bucketName)
            .key(key)
            .build();

        CompletableFuture<PutObjectResponse> response =
getAsyncClient().putObject(objectRequest,
AsyncRequestBody.fromFile(Paths.get(objectPath)));
        return response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to upload file", ex);
            }
        });
    }
```

Usa un S3 TransferManager para subir un archivo a un bucket. Vea el archivo completo y pruébelo.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedFileUpload;
import software.amazon.awssdk.transfer.s3.model.FileUpload;
import software.amazon.awssdk.transfer.s3.model.UploadFileRequest;
import software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener;
import java.net.URI;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Paths;
import java.util.UUID;

    public String uploadFile(S3TransferManager transferManager, String bucketName,
                             String key, URI filePathURI) {
        UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
            .putObjectRequest(b -> b.bucket(bucketName).key(key))
```

```
            .source(Paths.get(filePathURI))
            .build();

        FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);

        CompletedFileUpload uploadResult = fileUpload.completionFuture().join();
        return uploadResult.response().eTag();
    }
```

Cargue un objeto en un bucket y configure las etiquetas con un S3Client.

```
    /**
     * Puts tags on an Amazon S3 object.
     *
     * @param s3 An {@link S3Client} object that represents the Amazon S3 client.
     * @param bucketName The name of the Amazon S3 bucket.
     * @param objectKey The key of the Amazon S3 object.
     * @param objectPath The file path of the object to be uploaded.
     */
    public static void putS3ObjectTags(S3Client s3, String bucketName, String
objectKey, String objectPath) {
        try {
            Tag tag1 = Tag.builder()
                .key("Tag 1")
                .value("This is tag 1")
                .build();

            Tag tag2 = Tag.builder()
                .key("Tag 2")
                .value("This is tag 2")
                .build();

            List<Tag> tags = new ArrayList<>();
            tags.add(tag1);
            tags.add(tag2);

            Tagging allTags = Tagging.builder()
                .tagSet(tags)
                .build();

            PutObjectRequest putOb = PutObjectRequest.builder()
                .bucket(bucketName)
```

```
                .key(objectKey)
                .tagging(allTags)
                .build();

            s3.putObject(putOb, RequestBody.fromBytes(getObjectFile(objectPath)));

        } catch (S3Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    /**
     * Updates the tags associated with an object in an Amazon S3 bucket.
     *
     * @param s3 an instance of the S3Client class, which is used to interact with
the Amazon S3 service
     * @param bucketName the name of the S3 bucket containing the object
     * @param objectKey the key (or name) of the object in the S3 bucket
     * @throws S3Exception if there is an error updating the object's tags
     */
    public static void updateObjectTags(S3Client s3, String bucketName, String
objectKey) {
        try {
            GetObjectTaggingRequest taggingRequest =
GetObjectTaggingRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .build();

            GetObjectTaggingResponse getTaggingRes =
s3.getObjectTagging(taggingRequest);
            List<Tag> obTags = getTaggingRes.tagSet();
            for (Tag sinTag : obTags) {
                System.out.println("The tag key is: " + sinTag.key());
                System.out.println("The tag value is: " + sinTag.value());
            }

            // Replace the object's tags with two new tags.
            Tag tag3 = Tag.builder()
                .key("Tag 3")
                .value("This is tag 3")
                .build();
```

```
            Tag tag4 = Tag.builder()
                .key("Tag 4")
                .value("This is tag 4")
                .build();

            List<Tag> tags = new ArrayList<>();
            tags.add(tag3);
            tags.add(tag4);

            Tagging updatedTags = Tagging.builder()
                .tagSet(tags)
                .build();

            PutObjectTaggingRequest taggingRequest1 =
PutObjectTaggingRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .tagging(updatedTags)
                .build();

            s3.putObjectTagging(taggingRequest1);
            GetObjectTaggingResponse getTaggingRes2 =
s3.getObjectTagging(taggingRequest);
            List<Tag> modTags = getTaggingRes2.tagSet();
            for (Tag sinTag : modTags) {
                System.out.println("The tag key is: " + sinTag.key());
                System.out.println("The tag value is: " + sinTag.value());
            }

        } catch (S3Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    /**
     * Retrieves the contents of a file as a byte array.
     *
     * @param filePath the path of the file to be read
     * @return a byte array containing the contents of the file, or null if an error
occurs
     */
    private static byte[] getObjectFile(String filePath) {
        FileInputStream fileInputStream = null;
```

```
        byte[] bytesArray = null;

        try {
            File file = new File(filePath);
            bytesArray = new byte[(int) file.length()];
            fileInputStream = new FileInputStream(file);
            fileInputStream.read(bytesArray);

        } catch (IOException e) {
            e.printStackTrace();
        } finally {
            if (fileInputStream != null) {
                try {
                    fileInputStream.close();
                } catch (IOException e) {
                    e.printStackTrace();
                }
            }
        }

        return bytesArray;
    }
}
```

Cargue un objeto en un bucket y configure los metadatos con un S3Client.

```
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.io.File;
import java.util.HashMap;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
```

```
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PutObjectMetadata {
    public static void main(String[] args) {
        final String USAGE = """

            Usage:
              <bucketName> <objectKey> <objectPath>\s

            Where:
              bucketName - The Amazon S3 bucket to upload an object into.
              objectKey - The object to upload (for example, book.pdf).
              objectPath - The path where the file is located (for example, C:/AWS/
book2.pdf).\s
            """;

        if (args.length != 3) {
            System.out.println(USAGE);
            System.exit(1);
        }

        String bucketName = args[0];
        String objectKey = args[1];
        String objectPath = args[2];
        System.out.println("Putting object " + objectKey + " into bucket " +
 bucketName);
        System.out.println("  in bucket: " + bucketName);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        putS3Object(s3, bucketName, objectKey, objectPath);
        s3.close();
    }

    /**
     * Uploads an object to an Amazon S3 bucket with metadata.
     *
     * @param s3 the S3Client object used to interact with the Amazon S3 service
     * @param bucketName the name of the S3 bucket to upload the object to
     * @param objectKey the name of the object to be uploaded
     * @param objectPath the local file path of the object to be uploaded
```

```
     */
    public static void putS3Object(S3Client s3, String bucketName, String objectKey,
 String objectPath) {
        try {
            Map<String, String> metadata = new HashMap<>();
            metadata.put("author", "Mary Doe");
            metadata.put("version", "1.0.0.0");

            PutObjectRequest putOb = PutObjectRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .metadata(metadata)
                .build();

            s3.putObject(putOb, RequestBody.fromFile(new File(objectPath)));
            System.out.println("Successfully placed " + objectKey + " into bucket "
 + bucketName);

        } catch (S3Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

Cargue un objeto en un bucket y configure un valor de retención de objetos con un S3Client.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRetentionRequest;
import software.amazon.awssdk.services.s3.model.ObjectLockRetention;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.time.Instant;
import java.time.LocalDate;
import java.time.LocalDateTime;
import java.time.ZoneOffset;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
```

```
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class PutObjectRetention {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <key> <bucketName>\s

            Where:
                key - The name of the object (for example, book.pdf).\s
                bucketName - The Amazon S3 bucket name that contains the object (for
 example, bucket1).\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String key = args[0];
        String bucketName = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        setRentionPeriod(s3, key, bucketName);
        s3.close();
    }

    /**
     * Sets the retention period for an object in an Amazon S3 bucket.
     *
     * @param s3     the S3Client object used to interact with the Amazon S3 service
     * @param key    the key (name) of the object in the S3 bucket
     * @param bucket the name of the S3 bucket where the object is stored
     *
     * @throws S3Exception if an error occurs while setting the object retention
 period
```

```
     */
    public static void setRentionPeriod(S3Client s3, String key, String bucket) {
        try {
            LocalDate localDate = LocalDate.parse("2020-07-17");
            LocalDateTime localDateTime = localDate.atStartOfDay();
            Instant instant = localDateTime.toInstant(ZoneOffset.UTC);

            ObjectLockRetention lockRetention = ObjectLockRetention.builder()
                .mode("COMPLIANCE")
                .retainUntilDate(instant)
                .build();

            PutObjectRetentionRequest retentionRequest =
 PutObjectRetentionRequest.builder()
                .bucket(bucket)
                .key(key)
                .bypassGovernanceRetention(true)
                .retention(lockRetention)
                .build();

            // To set Retention on an object, the Amazon S3 bucket must support
 object
            // locking, otherwise an exception is thrown.
            s3.putObjectRetention(retentionRequest);
            System.out.print("An object retention configuration was successfully
 placed on the object");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulte PutObjectla Referencia AWS SDK for Java 2.x de la API.

`PutObjectLegalHold`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutObjectLegalHold`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   // Set or modify a legal hold on an object in an S3 bucket.
   public void modifyObjectLegalHold(String bucketName, String objectKey, boolean
legalHoldOn) {
       ObjectLockLegalHold legalHold ;
       if (legalHoldOn) {
           legalHold = ObjectLockLegalHold.builder()
               .status(ObjectLockLegalHoldStatus.ON)
               .build();
       } else {
           legalHold = ObjectLockLegalHold.builder()
               .status(ObjectLockLegalHoldStatus.OFF)
               .build();
       }

       PutObjectLegalHoldRequest legalHoldRequest =
PutObjectLegalHoldRequest.builder()
           .bucket(bucketName)
           .key(objectKey)
           .legalHold(legalHold)
           .build();

       getClient().putObjectLegalHold(legalHoldRequest) ;
       System.out.println("Modified legal hold for "+ objectKey +" in "+bucketName
+".");
   }
```

- Para obtener más información sobre la API, consulta PutObjectLegalHoldla Referencia AWS SDK for Java 2.x de la API.

`PutObjectLockConfiguration`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutObjectLockConfiguration`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Establecimiento de la configuración de bloqueo de objetos de un bucket

```
   // Enable object lock on an existing bucket.
   public void enableObjectLockOnBucket(String bucketName) {
       try {
           VersioningConfiguration versioningConfiguration =
VersioningConfiguration.builder()
                   .status(BucketVersioningStatus.ENABLED)
                   .build();

           PutBucketVersioningRequest putBucketVersioningRequest =
PutBucketVersioningRequest.builder()
                   .bucket(bucketName)
                   .versioningConfiguration(versioningConfiguration)
                   .build();

           // Enable versioning on the bucket.
           getClient().putBucketVersioning(putBucketVersioningRequest);
           PutObjectLockConfigurationRequest request =
PutObjectLockConfigurationRequest.builder()
                   .bucket(bucketName)
                   .objectLockConfiguration(ObjectLockConfiguration.builder()
                       .objectLockEnabled(ObjectLockEnabled.ENABLED)
                       .build())
                   .build();

           getClient().putObjectLockConfiguration(request);
           System.out.println("Successfully enabled object lock on "+bucketName);

       } catch (S3Exception ex) {
           System.out.println("Error modifying object lock: '" + ex.getMessage() +
"'");
       }
   }
```

Establecimiento del período de retención predeterminado de un bucket

```
   // Set or modify a retention period on an S3 bucket.
   public void modifyBucketDefaultRetention(String bucketName) {
       VersioningConfiguration versioningConfiguration =
VersioningConfiguration.builder()
           .mfaDelete(MFADelete.DISABLED)
           .status(BucketVersioningStatus.ENABLED)
           .build();

       PutBucketVersioningRequest versioningRequest =
PutBucketVersioningRequest.builder()
           .bucket(bucketName)
           .versioningConfiguration(versioningConfiguration)
           .build();

       getClient().putBucketVersioning(versioningRequest);
       DefaultRetention rention = DefaultRetention.builder()
           .days(1)
           .mode(ObjectLockRetentionMode.GOVERNANCE)
           .build();

       ObjectLockRule lockRule = ObjectLockRule.builder()
           .defaultRetention(rention)
           .build();

       ObjectLockConfiguration objectLockConfiguration =
ObjectLockConfiguration.builder()
           .objectLockEnabled(ObjectLockEnabled.ENABLED)
           .rule(lockRule)
           .build();

       PutObjectLockConfigurationRequest putObjectLockConfigurationRequest =
PutObjectLockConfigurationRequest.builder()
           .bucket(bucketName)
           .objectLockConfiguration(objectLockConfiguration)
           .build();

       getClient().putObjectLockConfiguration(putObjectLockConfigurationRequest) ;
       System.out.println("Added a default retention to bucket "+bucketName +".");
   }
```

- Para obtener más información sobre la API, consulta PutObjectLockConfigurationla Referencia AWS SDK for Java 2.x de la API.

`PutObjectRetention`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutObjectRetention`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    // Set or modify a retention period on an object in an S3 bucket.
    public void modifyObjectRetentionPeriod(String bucketName, String objectKey) {
        // Calculate the instant one day from now.
        Instant futureInstant = Instant.now().plus(1, ChronoUnit.DAYS);

        // Convert the Instant to a ZonedDateTime object with a specific time zone.
        ZonedDateTime zonedDateTime = futureInstant.atZone(ZoneId.systemDefault());

        // Define a formatter for human-readable output.
        DateTimeFormatter formatter = DateTimeFormatter.ofPattern("yyyy-MM-dd
HH:mm:ss");

        // Format the ZonedDateTime object to a human-readable date string.
        String humanReadableDate = formatter.format(zonedDateTime);

        // Print the formatted date string.
        System.out.println("Formatted Date: " + humanReadableDate);
        ObjectLockRetention retention = ObjectLockRetention.builder()
            .mode(ObjectLockRetentionMode.GOVERNANCE)
            .retainUntilDate(futureInstant)
            .build();

        PutObjectRetentionRequest retentionRequest =
PutObjectRetentionRequest.builder()
```

```
            .bucket(bucketName)
            .key(objectKey)
            .retention(retention)
            .build();

        getClient().putObjectRetention(retentionRequest);
        System.out.println("Set retention for "+objectKey +" in " +bucketName +"
until "+ humanReadableDate +".");
    }
```

- Para obtener más información sobre la API, consulta PutObjectRetentionla Referencia AWS SDK for Java 2.x de la API.

`RestoreObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `RestoreObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.RestoreRequest;
import software.amazon.awssdk.services.s3.model.GlacierJobParameters;
import software.amazon.awssdk.services.s3.model.RestoreObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.Tier;

/*
 *  For more information about restoring an object, see "Restoring an archived
 object" at
 *  https://docs.aws.amazon.com/AmazonS3/latest/userguide/restoring-objects.html
 *
```

```
 *  Before running this Java V2 code example, set up your development environment,
 including your credentials.
 *
 *  For more information, see the following documentation topic:
 *
 *  https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class RestoreObject {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <keyName> <expectedBucketOwner>

            Where:
                bucketName - The Amazon S3 bucket name.\s
                keyName - The key name of an object with a Storage class value of
 Glacier.\s
                expectedBucketOwner - The account that owns the bucket (you can
 obtain this value from the AWS Management Console).\s
            """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        String expectedBucketOwner = args[2];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        restoreS3Object(s3, bucketName, keyName, expectedBucketOwner);
        s3.close();
    }

    /**
     * Restores an S3 object from the Glacier storage class.
     *
     * @param s3                   an instance of the {@link S3Client} to be used
 for interacting with Amazon S3
```

```
     * @param bucketName           the name of the S3 bucket where the object is
 stored
     * @param keyName              the key (object name) of the S3 object to be
 restored
     * @param expectedBucketOwner  the AWS account ID of the expected bucket owner
     */
    public static void restoreS3Object(S3Client s3, String bucketName, String
 keyName, String expectedBucketOwner) {
        try {
            RestoreRequest restoreRequest = RestoreRequest.builder()
                .days(10)

 .glacierJobParameters(GlacierJobParameters.builder().tier(Tier.STANDARD).build())
                .build();

            RestoreObjectRequest objectRequest = RestoreObjectRequest.builder()
                .expectedBucketOwner(expectedBucketOwner)
                .bucket(bucketName)
                .key(keyName)
                .restoreRequest(restoreRequest)
                .build();

            s3.restoreObject(objectRequest);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta RestoreObjectla Referencia AWS SDK for Java 2.x de la API.

`SelectObjectContent`

En el siguiente ejemplo de código, se muestra cómo utilizar `SelectObjectContent`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

En el siguiente ejemplo, se muestra una consulta utilizando un objeto JSON. En el ejemplo completo, también se muestra el uso de un objeto CSV.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.async.AsyncRequestBody;
import software.amazon.awssdk.core.async.BlockingInputStreamAsyncRequestBody;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.model.CSVInput;
import software.amazon.awssdk.services.s3.model.CSVOutput;
import software.amazon.awssdk.services.s3.model.CompressionType;
import software.amazon.awssdk.services.s3.model.ExpressionType;
import software.amazon.awssdk.services.s3.model.FileHeaderInfo;
import software.amazon.awssdk.services.s3.model.InputSerialization;
import software.amazon.awssdk.services.s3.model.JSONInput;
import software.amazon.awssdk.services.s3.model.JSONOutput;
import software.amazon.awssdk.services.s3.model.JSONType;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.services.s3.model.OutputSerialization;
import software.amazon.awssdk.services.s3.model.Progress;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;
import software.amazon.awssdk.services.s3.model.SelectObjectContentRequest;
import software.amazon.awssdk.services.s3.model.SelectObjectContentResponseHandler;
import software.amazon.awssdk.services.s3.model.Stats;

import java.io.IOException;
import java.net.URL;
import java.util.ArrayList;
import java.util.List;
import java.util.UUID;
import java.util.concurrent.CompletableFuture;
```

```
public class SelectObjectContentExample {
    static final Logger logger =
 LoggerFactory.getLogger(SelectObjectContentExample.class);
    static final String BUCKET_NAME = "amzn-s3-demo-bucket-" + UUID.randomUUID();
    static final S3AsyncClient s3AsyncClient = S3AsyncClient.create();
    static String FILE_CSV = "csv";
    static String FILE_JSON = "json";
    static String URL_CSV = "https://raw.githubusercontent.com/mledoze/countries/
master/dist/countries.csv";
    static String URL_JSON = "https://raw.githubusercontent.com/mledoze/countries/
master/dist/countries.json";

    public static void main(String[] args) {
        SelectObjectContentExample selectObjectContentExample = new
 SelectObjectContentExample();
        try {
            SelectObjectContentExample.setUp();
            selectObjectContentExample.runSelectObjectContentMethodForJSON();
            selectObjectContentExample.runSelectObjectContentMethodForCSV();
        } catch (SdkException e) {
            logger.error(e.getMessage(), e);
            System.exit(1);
        } finally {
            SelectObjectContentExample.tearDown();
        }
    }

    EventStreamInfo runSelectObjectContentMethodForJSON() {
        // Set up request parameters.
        final String queryExpression = "select * from s3object[*][*] c where c.area
 < 350000";
        final String fileType = FILE_JSON;

        InputSerialization inputSerialization = InputSerialization.builder()
                .json(JSONInput.builder().type(JSONType.DOCUMENT).build())
                .compressionType(CompressionType.NONE)
                .build();

        OutputSerialization outputSerialization = OutputSerialization.builder()
                .json(JSONOutput.builder().recordDelimiter(null).build())
                .build();

        // Build the SelectObjectContentRequest.
        SelectObjectContentRequest select = SelectObjectContentRequest.builder()
```

```
                .bucket(BUCKET_NAME)
                .key(FILE_JSON)
                .expression(queryExpression)
                .expressionType(ExpressionType.SQL)
                .inputSerialization(inputSerialization)
                .outputSerialization(outputSerialization)
                .build();

        EventStreamInfo eventStreamInfo = new EventStreamInfo();
        // Call the selectObjectContent method with the request and a response
handler.
        // Supply an EventStreamInfo object to the response handler to gather
records and information from the response.
        s3AsyncClient.selectObjectContent(select,
buildResponseHandler(eventStreamInfo)).join();

        // Log out information gathered while processing the response stream.
        long recordCount = eventStreamInfo.getRecords().stream().mapToInt(record ->
                record.split("\n").length
        ).sum();
        logger.info("Total records {}: {}", fileType, recordCount);
        logger.info("Visitor onRecords for fileType {} called {} times", fileType,
eventStreamInfo.getCountOnRecordsCalled());
        logger.info("Visitor onStats for fileType {}, {}", fileType,
eventStreamInfo.getStats());
        logger.info("Visitor onContinuations for fileType {}, {}", fileType,
eventStreamInfo.getCountContinuationEvents());
        return eventStreamInfo;
    }

    static SelectObjectContentResponseHandler buildResponseHandler(EventStreamInfo
eventStreamInfo) {
        // Use a Visitor to process the response stream. This visitor logs
information and gathers details while processing.
        final SelectObjectContentResponseHandler.Visitor visitor =
SelectObjectContentResponseHandler.Visitor.builder()
                .onRecords(r -> {
                    logger.info("Record event received.");
                    eventStreamInfo.addRecord(r.payload().asUtf8String());
                    eventStreamInfo.incrementOnRecordsCalled();
                })
                .onCont(ce -> {
                    logger.info("Continuation event received.");
                    eventStreamInfo.incrementContinuationEvents();
```

```
                })
                .onProgress(pe -> {
                    Progress progress = pe.details();
                    logger.info("Progress event received:\n bytesScanned:
{}\nbytesProcessed: {}\nbytesReturned:{}",
                            progress.bytesScanned(),
                            progress.bytesProcessed(),
                            progress.bytesReturned());
                })
                .onEnd(ee -> logger.info("End event received."))
                .onStats(se -> {
                    logger.info("Stats event received.");
                    eventStreamInfo.addStats(se.details());
                })
                .build();

        // Build the SelectObjectContentResponseHandler with the visitor that
 processes the stream.
        return SelectObjectContentResponseHandler.builder()
                .subscriber(visitor).build();
    }

    // The EventStreamInfo class is used to store information gathered while
 processing the response stream.
    static class EventStreamInfo {
        private final List<String> records = new ArrayList<>();
        private Integer countOnRecordsCalled = 0;
        private Integer countContinuationEvents = 0;
        private Stats stats;

        void incrementOnRecordsCalled() {
            countOnRecordsCalled++;
        }

        void incrementContinuationEvents() {
            countContinuationEvents++;
        }

        void addRecord(String record) {
            records.add(record);
        }

        void addStats(Stats stats) {
            this.stats = stats;
```

```
        }

        public List<String> getRecords() {
            return records;
        }

        public Integer getCountOnRecordsCalled() {
            return countOnRecordsCalled;
        }

        public Integer getCountContinuationEvents() {
            return countContinuationEvents;
        }

        public Stats getStats() {
            return stats;
        }
    }
```

- Para obtener más información sobre la API, consulta SelectObjectContentla Referencia AWS SDK for Java 2.x de la API.

`UploadPartCopy`

En el siguiente ejemplo de código, se muestra cómo utilizar `UploadPartCopy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public CompletableFuture<String> performMultiCopy(String toBucket, String
bucketName, String key) {
        CreateMultipartUploadRequest createMultipartUploadRequest =
CreateMultipartUploadRequest.builder()
            .bucket(toBucket)
            .key(key)
```

```
            .build();

        getAsyncClient().createMultipartUpload(createMultipartUploadRequest)
            .thenApply(createMultipartUploadResponse -> {
                String uploadId = createMultipartUploadResponse.uploadId();
                System.out.println("Upload ID: " + uploadId);

                UploadPartCopyRequest uploadPartCopyRequest =
UploadPartCopyRequest.builder()
                    .sourceBucket(bucketName)
                    .destinationBucket(toBucket)
                    .sourceKey(key)
                    .destinationKey(key)
                    .uploadId(uploadId)  // Use the valid uploadId.
                    .partNumber(1)  // Ensure the part number is correct.
                    .copySourceRange("bytes=0-1023")  // Adjust range as needed
                    .build();

                return getAsyncClient().uploadPartCopy(uploadPartCopyRequest);
            })
            .thenCompose(uploadPartCopyFuture -> uploadPartCopyFuture)
            .whenComplete((uploadPartCopyResponse, exception) -> {
                if (exception != null) {
                    // Handle any exceptions.
                    logger.error("Error during upload part copy: " +
exception.getMessage());
                } else {
                    // Successfully completed the upload part copy.
                    System.out.println("Upload Part Copy completed successfully.
ETag: " + uploadPartCopyResponse.copyPartResult().eTag());
                }
            });
        return null;
    }
```

- Para obtener más información sobre la API, consulta UploadPartCopyla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Comprobación de la existencia de un bucket

El siguiente ejemplo de código muestra cómo comprobar si existe un bucket.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Puede usar el siguiente `doesBucketExists` método como reemplazo del método SDK for Java V1 AmazonS3Client# doesBucketExist V2 (String).

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.awscore.exception.AwsServiceException;
import software.amazon.awssdk.http.HttpStatusCode;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.utils.Validate;

public class DoesBucketExist {
    private static final Logger logger =
 LoggerFactory.getLogger(DoesBucketExist.class);

    public static void main(String[] args) {
        DoesBucketExist doesBucketExist = new DoesBucketExist();

        final S3Client s3SyncClient = S3Client.builder().build();
        final String bucketName = "amzn-s3-demo-bucket"; // Change to the bucket
 name that you want to check.

        boolean exists = doesBucketExist.doesBucketExist(bucketName, s3SyncClient);
        logger.info("Bucket exists: {}", exists);
    }

    /**
```

```
     * Checks if the specified bucket exists. Amazon S3 buckets are named in a
 global namespace; use this method to
     * determine if a specified bucket name already exists, and therefore can't be
 used to create a new bucket.
     * <p>
     * Internally this method uses the <a
     * href="https://sdk.amazonaws.com/java/api/latest/software/amazon/awssdk/
services/s3/
S3Client.html#getBucketAcl(java.util.function.Consumer)">S3Client.getBucketAcl(String)</
a>
     * operation to determine whether the bucket exists.
     * <p>
     * This method is equivalent to the AWS SDK for Java V1's <a
     * href="https://docs.aws.amazon.com/AWSJavaSDK/latest/javadoc/
com/amazonaws/services/s3/AmazonS3Client.html#doesBucketExistV2-
java.lang.String-">AmazonS3Client#doesBucketExistV2(String)</a>.
     *
     * @param bucketName   The name of the bucket to check.
     * @param s3SyncClient An <code>S3Client</code> instance. The method checks for
 the bucket in the AWS Region
     *                     configured on the instance.
     * @return The value true if the specified bucket exists in Amazon S3; the value
 false if there is no bucket in
     *         Amazon S3 with that name.
     */
    public boolean doesBucketExist(String bucketName, S3Client s3SyncClient) {
        try {
            Validate.notEmpty(bucketName, "The bucket name must not be null or an
 empty string.", "");
            s3SyncClient.getBucketAcl(r -> r.bucket(bucketName));
            return true;
        } catch (AwsServiceException ase) {
            // A redirect error or an AccessDenied exception means the bucket exists
 but it's not in this region
            // or we don't have permissions to it.
            if ((ase.statusCode() == HttpStatusCode.MOVED_PERMANENTLY) ||
 "AccessDenied".equals(ase.awsErrorDetails().errorCode())) {
                return true;
            }
            if (ase.statusCode() == HttpStatusCode.NOT_FOUND) {
                return false;
            }
            throw ase;
        }
```

```
    }
}
```

- Para obtener más información sobre la API, consulte GetBucketAcllla referencia de la API.AWS SDK for Java 2.x

Crear una URL prefirmada

En el siguiente ejemplo de código se muestra cómo crear una URL prefirmada para Amazon S3 y cargar un objeto.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

A continuación, se muestran tres ejemplos de cómo crear bibliotecas de clientes HTTP prefirmadas URLs y utilizarlas URLs con ellas:

- Una solicitud HTTP GET que usa la URL con tres bibliotecas cliente HTTP
- Una solicitud HTTP PUT con metadatos en los encabezados que usa la URL con tres bibliotecas cliente HTTP
- Una solicitud HTTP PUT con parámetros de consulta que usa la URL con una biblioteca cliente HTTP

Genere una URL prefirmada para un objeto y, a continuación, descárguela (solicitud GET).

Importaciones.

```
import com.example.s3.util.PresignUrlUtils;
import org.slf4j.Logger;
import software.amazon.awssdk.http.HttpExecuteRequest;
import software.amazon.awssdk.http.HttpExecuteResponse;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.SdkHttpMethod;
import software.amazon.awssdk.http.SdkHttpRequest;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
```

```
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.services.s3.presigner.model.GetObjectPresignRequest;
import software.amazon.awssdk.services.s3.presigner.model.PresignedGetObjectRequest;
import software.amazon.awssdk.utils.IoUtils;

import java.io.ByteArrayOutputStream;
import java.io.File;
import java.io.IOException;
import java.io.InputStream;
import java.net.HttpURLConnection;
import java.net.URISyntaxException;
import java.net.URL;
import java.net.http.HttpClient;
import java.net.http.HttpRequest;
import java.net.http.HttpResponse;
import java.nio.file.Paths;
import java.time.Duration;
import java.util.UUID;
```

Genere la URL.

```
    /* Create a pre-signed URL to download an object in a subsequent GET request. */
    public String createPresignedGetUrl(String bucketName, String keyName) {
        try (S3Presigner presigner = S3Presigner.create()) {

            GetObjectRequest objectRequest = GetObjectRequest.builder()
                    .bucket(bucketName)
                    .key(keyName)
                    .build();

            GetObjectPresignRequest presignRequest =
 GetObjectPresignRequest.builder()
                    .signatureDuration(Duration.ofMinutes(10))  // The URL will
 expire in 10 minutes.
                    .getObjectRequest(objectRequest)
                    .build();

            PresignedGetObjectRequest presignedRequest =
 presigner.presignGetObject(presignRequest);
```

```
            logger.info("Presigned URL: [{}]", presignedRequest.url().toString());
            logger.info("HTTP method: [{}]",
presignedRequest.httpRequest().method());

            return presignedRequest.url().toExternalForm();
        }
    }
```

Descargue el objeto mediante uno de los tres enfoques siguientes.

Utilice la clase JDK `HttpURLConnection` (desde la versión 1.1) para realizar la descarga.

```
    /* Use the JDK HttpURLConnection (since v1.1) class to do the download. */
    public byte[] useHttpUrlConnectionToGet(String presignedUrlString) {
        ByteArrayOutputStream byteArrayOutputStream = new
ByteArrayOutputStream(); // Capture the response body to a byte array.

        try {
            URL presignedUrl = new URL(presignedUrlString);
            HttpURLConnection connection = (HttpURLConnection)
presignedUrl.openConnection();
            connection.setRequestMethod("GET");
            // Download the result of executing the request.
            try (InputStream content = connection.getInputStream()) {
                IoUtils.copy(content, byteArrayOutputStream);
            }
            logger.info("HTTP response code is " + connection.getResponseCode());

        } catch (S3Exception | IOException e) {
            logger.error(e.getMessage(), e);
        }
        return byteArrayOutputStream.toByteArray();
    }
```

Utilice la clase JDK `HttpClient` (desde la versión 11) para realizar la descarga.

```
    /* Use the JDK HttpClient (since v11) class to do the download. */
    public byte[] useHttpClientToGet(String presignedUrlString) {
        ByteArrayOutputStream byteArrayOutputStream = new
ByteArrayOutputStream(); // Capture the response body to a byte array.
```

```
        HttpRequest.Builder requestBuilder = HttpRequest.newBuilder();
        HttpClient httpClient = HttpClient.newHttpClient();
        try {
            URL presignedUrl = new URL(presignedUrlString);
            HttpResponse<InputStream> response = httpClient.send(requestBuilder
                            .uri(presignedUrl.toURI())
                            .GET()
                            .build(),
                    HttpResponse.BodyHandlers.ofInputStream());

            IoUtils.copy(response.body(), byteArrayOutputStream);

            logger.info("HTTP response code is " + response.statusCode());

        } catch (URISyntaxException | InterruptedException | IOException e) {
            logger.error(e.getMessage(), e);
        }
        return byteArrayOutputStream.toByteArray();
    }
```

Usa la `SdkHttpClient` clase AWS SDK for Java para realizar la descarga.

```
    /* Use the AWS SDK for Java SdkHttpClient class to do the download. */
    public byte[] useSdkHttpClientToGet(String presignedUrlString) {

        ByteArrayOutputStream byteArrayOutputStream = new
ByteArrayOutputStream(); // Capture the response body to a byte array.
        try {
            URL presignedUrl = new URL(presignedUrlString);
            SdkHttpRequest request = SdkHttpRequest.builder()
                    .method(SdkHttpMethod.GET)
                    .uri(presignedUrl.toURI())
                    .build();

            HttpExecuteRequest executeRequest = HttpExecuteRequest.builder()
                    .request(request)
                    .build();

            try (SdkHttpClient sdkHttpClient = ApacheHttpClient.create()) {
                HttpExecuteResponse response =
sdkHttpClient.prepareRequest(executeRequest).call();
                response.responseBody().ifPresentOrElse(
```

```
                        abortableInputStream -> {
                            try {
                                IoUtils.copy(abortableInputStream,
 byteArrayOutputStream);
                            } catch (IOException e) {
                                throw new RuntimeException(e);
                            }
                        },
                        () -> logger.error("No response body."));

                logger.info("HTTP Response code is {}",
 response.httpResponse().statusCode());
            }
        } catch (URISyntaxException | IOException e) {
            logger.error(e.getMessage(), e);
        }
        return byteArrayOutputStream.toByteArray();
    }
```

Generar una URL previamente firmada con metadatos en los encabezados para una carga y, a continuación, cargar un archivo (solicitud PUT).

Importaciones.

```
import com.example.s3.util.PresignUrlUtils;
import org.slf4j.Logger;
import software.amazon.awssdk.core.internal.sync.FileContentStreamProvider;
import software.amazon.awssdk.http.HttpExecuteRequest;
import software.amazon.awssdk.http.HttpExecuteResponse;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.SdkHttpMethod;
import software.amazon.awssdk.http.SdkHttpRequest;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.services.s3.presigner.model.PresignedPutObjectRequest;
import software.amazon.awssdk.services.s3.presigner.model.PutObjectPresignRequest;

import java.io.File;
import java.io.IOException;
```

```
import java.io.OutputStream;
import java.io.RandomAccessFile;
import java.net.HttpURLConnection;
import java.net.URISyntaxException;
import java.net.URL;
import java.net.http.HttpClient;
import java.net.http.HttpRequest;
import java.net.http.HttpResponse;
import java.nio.ByteBuffer;
import java.nio.channels.FileChannel;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.time.Duration;
import java.util.Map;
import java.util.UUID;
```

Genere la URL.

```
   /* Create a presigned URL to use in a subsequent PUT request */
   public String createPresignedUrl(String bucketName, String keyName, Map<String,
String> metadata) {
       try (S3Presigner presigner = S3Presigner.create()) {

           PutObjectRequest objectRequest = PutObjectRequest.builder()
                   .bucket(bucketName)
                   .key(keyName)
                   .metadata(metadata)
                   .build();

           PutObjectPresignRequest presignRequest =
PutObjectPresignRequest.builder()
                   .signatureDuration(Duration.ofMinutes(10))  // The URL expires
in 10 minutes.
                   .putObjectRequest(objectRequest)
                   .build();


           PresignedPutObjectRequest presignedRequest =
presigner.presignPutObject(presignRequest);
           String myURL = presignedRequest.url().toString();
           logger.info("Presigned URL to upload a file to: [{}]", myURL);
```

```
            logger.info("HTTP method: [{}]",
presignedRequest.httpRequest().method());

            return presignedRequest.url().toExternalForm();
        }
    }
```

Cargue un objeto de archivo mediante uno de los tres enfoques siguientes.

Utilice la clase JDK `HttpURLConnection` (desde la versión 1.1) para realizar la carga.

```
    /* Use the JDK HttpURLConnection (since v1.1) class to do the upload. */
    public void useHttpUrlConnectionToPut(String presignedUrlString, File fileToPut,
Map<String, String> metadata) {
        logger.info("Begin [{}] upload", fileToPut.toString());
        try {
            URL presignedUrl = new URL(presignedUrlString);
            HttpURLConnection connection = (HttpURLConnection)
presignedUrl.openConnection();
            connection.setDoOutput(true);
            metadata.forEach((k, v) -> connection.setRequestProperty("x-amz-meta-" +
k, v));
            connection.setRequestMethod("PUT");
            OutputStream out = connection.getOutputStream();

            try (RandomAccessFile file = new RandomAccessFile(fileToPut, "r");
                 FileChannel inChannel = file.getChannel()) {
                ByteBuffer buffer = ByteBuffer.allocate(8192); //Buffer size is 8k

                while (inChannel.read(buffer) > 0) {
                    buffer.flip();
                    for (int i = 0; i < buffer.limit(); i++) {
                        out.write(buffer.get());
                    }
                    buffer.clear();
                }
            } catch (IOException e) {
                logger.error(e.getMessage(), e);
            }

            out.close();
            connection.getResponseCode();
            logger.info("HTTP response code is " + connection.getResponseCode());
```

```
        } catch (S3Exception | IOException e) {
            logger.error(e.getMessage(), e);
        }
    }
```

Utilice la clase JDK `HttpClient` (desde la versión 11) para realizar la carga.

```
    /* Use the JDK HttpClient (since v11) class to do the upload. */
    public void useHttpClientToPut(String presignedUrlString, File fileToPut,
Map<String, String> metadata) {
        logger.info("Begin [{}] upload", fileToPut.toString());

        HttpRequest.Builder requestBuilder = HttpRequest.newBuilder();
        metadata.forEach((k, v) -> requestBuilder.header("x-amz-meta-" + k, v));

        HttpClient httpClient = HttpClient.newHttpClient();
        try {
            final HttpResponse<Void> response = httpClient.send(requestBuilder
                            .uri(new URL(presignedUrlString).toURI())

.PUT(HttpRequest.BodyPublishers.ofFile(Path.of(fileToPut.toURI())))
                            .build(),
                    HttpResponse.BodyHandlers.discarding());

            logger.info("HTTP response code is " + response.statusCode());

        } catch (URISyntaxException | InterruptedException | IOException e) {
            logger.error(e.getMessage(), e);
        }
    }
```

Usa la `SdkHttpClient` clase AWS for Java V2 para realizar la carga.

```
    /* Use the AWS SDK for Java V2 SdkHttpClient class to do the upload. */
    public void useSdkHttpClientToPut(String presignedUrlString, File fileToPut,
Map<String, String> metadata) {
        logger.info("Begin [{}] upload", fileToPut.toString());

        try {
            URL presignedUrl = new URL(presignedUrlString);
```

```
            SdkHttpRequest.Builder requestBuilder = SdkHttpRequest.builder()
                    .method(SdkHttpMethod.PUT)
                    .uri(presignedUrl.toURI());
            // Add headers
            metadata.forEach((k, v) -> requestBuilder.putHeader("x-amz-meta-" + k,
v));
            // Finish building the request.
            SdkHttpRequest request = requestBuilder.build();

            HttpExecuteRequest executeRequest = HttpExecuteRequest.builder()
                    .request(request)
                    .contentStreamProvider(new
FileContentStreamProvider(fileToPut.toPath()))
                    .build();

            try (SdkHttpClient sdkHttpClient = ApacheHttpClient.create()) {
                HttpExecuteResponse response =
sdkHttpClient.prepareRequest(executeRequest).call();
                logger.info("Response code: {}",
response.httpResponse().statusCode());
            }
        } catch (URISyntaxException | IOException e) {
            logger.error(e.getMessage(), e);
        }
    }
```

Generar una URL previamente firmada con parámetros de consulta para una carga y, a continuación, cargar un archivo (solicitud PUT).

Importaciones.

```
import com.example.s3.util.PresignUrlUtils;
import org.slf4j.Logger;
import software.amazon.awssdk.awscore.AwsRequestOverrideConfiguration;
import software.amazon.awssdk.core.internal.sync.FileContentStreamProvider;
import software.amazon.awssdk.http.HttpExecuteRequest;
import software.amazon.awssdk.http.HttpExecuteResponse;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.SdkHttpMethod;
import software.amazon.awssdk.http.SdkHttpRequest;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
```

```
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.services.s3.presigner.model.PresignedPutObjectRequest;
import software.amazon.awssdk.services.s3.presigner.model.PutObjectPresignRequest;

import java.io.File;
import java.io.IOException;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Paths;
import java.time.Duration;
import java.util.Map;
import java.util.UUID;
```

Genere la URL.

```
   /**
    *  Creates a presigned URL to use in a subsequent HTTP PUT request. The code
adds query parameters
    *  to the request instead of using headers. By using query parameters, you do
not need to add the
    *  the parameters as headers when the PUT request is eventually sent.
    *
    * @param bucketName Bucket name where the object will be uploaded.
    * @param keyName Key name of the object that will be uploaded.
    * @param queryParams Query string parameters to be added to the presigned URL.
    * @return
    */
   public String createPresignedUrl(String bucketName, String keyName, Map<String,
String> queryParams) {
       try (S3Presigner presigner = S3Presigner.create()) {
           // Create an override configuration to store the query parameters.
           AwsRequestOverrideConfiguration.Builder overrideConfigurationBuilder =
AwsRequestOverrideConfiguration.builder();

           queryParams.forEach(overrideConfigurationBuilder::putRawQueryParameter);

           PutObjectRequest objectRequest = PutObjectRequest.builder()
                   .bucket(bucketName)
                   .key(keyName)
```

```
                    .overrideConfiguration(overrideConfigurationBuilder.build()) //
Add the override configuration.
                    .build();

            PutObjectPresignRequest presignRequest =
PutObjectPresignRequest.builder()
                    .signatureDuration(Duration.ofMinutes(10))  // The URL expires
in 10 minutes.
                    .putObjectRequest(objectRequest)
                    .build();


            PresignedPutObjectRequest presignedRequest =
presigner.presignPutObject(presignRequest);
            String myURL = presignedRequest.url().toString();
            logger.info("Presigned URL to upload a file to: [{}]", myURL);
            logger.info("HTTP method: [{}]",
presignedRequest.httpRequest().method());

            return presignedRequest.url().toExternalForm();
        }
    }
```

Utilice la `SdkHttpClient` clase AWS for Java V2 para realizar la carga.

```
    /**
     * Use the AWS SDK for Java V2 SdkHttpClient class to execute the PUT request.
Since the
     * URL contains the query parameters, no headers are needed for metadata, SSE
settings, or ACL settings.
     *
     * @param presignedUrlString The URL for the PUT request.
     * @param fileToPut File to uplaod
     */
    public void useSdkHttpClientToPut(String presignedUrlString, File fileToPut) {
        logger.info("Begin [{}] upload", fileToPut.toString());

        try {
            URL presignedUrl = new URL(presignedUrlString);

            SdkHttpRequest.Builder requestBuilder = SdkHttpRequest.builder()
                    .method(SdkHttpMethod.PUT)
```

```
                    .uri(presignedUrl.toURI());

            SdkHttpRequest request = requestBuilder.build();

            HttpExecuteRequest executeRequest = HttpExecuteRequest.builder()
                    .request(request)
                    .contentStreamProvider(new
FileContentStreamProvider(fileToPut.toPath()))
                    .build();

            try (SdkHttpClient sdkHttpClient = ApacheHttpClient.create()) {
                HttpExecuteResponse response =
sdkHttpClient.prepareRequest(executeRequest).call();
                logger.info("Response code: {}",
response.httpResponse().statusCode());
            }
        } catch (URISyntaxException | IOException e) {
            logger.error(e.getMessage(), e);
        }
    }
```

Creación de una aplicación sin servidor para administrar fotos

En el siguiente ejemplo de código se muestra cómo crear una aplicación sin servidor que permita a los usuarios administrar fotos mediante etiquetas.

SDK para Java 2.x

Muestra cómo desarrollar una aplicación de administración de activos fotográficos que detecte las etiquetas de las imágenes mediante Amazon Rekognition y las almacene para su posterior recuperación.

Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Para profundizar en el origen de este ejemplo, consulte la publicación en Comunidad de AWS.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB

- Lambda
- Amazon Rekognition
- Amazon S3
- Amazon SNS

Eliminación de cargas multiparte incompletas

En el siguiente ejemplo de código, se muestra cómo eliminar o detener cargas multiparte incompletas de Amazon S3.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Para detener las cargas multiparte que estén en curso o incompletas por cualquier motivo, puede obtener una lista de las cargas y, a continuación, eliminarlas, tal y como se muestra en el siguiente ejemplo.

```
   /**
    * Aborts all incomplete multipart uploads from the specified S3 bucket.
    * <p>
    * This method retrieves a list of all incomplete multipart uploads in the
specified S3 bucket,
    * and then aborts each of those uploads.
    */
   public static void abortIncompleteMultipartUploadsFromList() {
       ListMultipartUploadsRequest listMultipartUploadsRequest =
ListMultipartUploadsRequest.builder()
           .bucket(bucketName)
           .build();

       ListMultipartUploadsResponse response =
s3Client.listMultipartUploads(listMultipartUploadsRequest);
       List<MultipartUpload> uploads = response.uploads();

       AbortMultipartUploadRequest abortMultipartUploadRequest;
```

```
        for (MultipartUpload upload : uploads) {
            abortMultipartUploadRequest = AbortMultipartUploadRequest.builder()
                .bucket(bucketName)
                .key(upload.key())
                .expectedBucketOwner(accountId)
                .uploadId(upload.uploadId())
                .build();

            AbortMultipartUploadResponse abortMultipartUploadResponse =
s3Client.abortMultipartUpload(abortMultipartUploadRequest);
            if (abortMultipartUploadResponse.sdkHttpResponse().isSuccessful()) {
                logger.info("Upload ID [{}] to bucket [{}] successfully aborted.",
upload.uploadId(), bucketName);
            }
        }
    }
```

Para eliminar las cargas multiparte incompletas que se hayan iniciado antes o después de una fecha, puede eliminar de forma selectiva las cargas multiparte en función de un momento dado, como se muestra en el siguiente ejemplo.

```
    static void abortIncompleteMultipartUploadsOlderThan(Instant pointInTime) {
        ListMultipartUploadsRequest listMultipartUploadsRequest =
ListMultipartUploadsRequest.builder()
            .bucket(bucketName)
            .build();

        ListMultipartUploadsResponse response =
s3Client.listMultipartUploads(listMultipartUploadsRequest);
        List<MultipartUpload> uploads = response.uploads();

        AbortMultipartUploadRequest abortMultipartUploadRequest;
        for (MultipartUpload upload : uploads) {
            logger.info("Found multipartUpload with upload ID [{}], initiated [{}]",
upload.uploadId(), upload.initiated());
            if (upload.initiated().isBefore(pointInTime)) {
                abortMultipartUploadRequest = AbortMultipartUploadRequest.builder()
                    .bucket(bucketName)
                    .key(upload.key())
                    .expectedBucketOwner(accountId)
                    .uploadId(upload.uploadId())
                    .build();
```

```
                AbortMultipartUploadResponse abortMultipartUploadResponse =
s3Client.abortMultipartUpload(abortMultipartUploadRequest);
                if (abortMultipartUploadResponse.sdkHttpResponse().isSuccessful()) {
                    logger.info("Upload ID [{}] to bucket [{}] successfully
aborted.", upload.uploadId(), bucketName);
                }
            }
        }
    }
```

Si tiene acceso al ID de carga después de iniciar una carga multiparte, puede eliminar la carga en curso utilizando ese ID.

```
    static void abortMultipartUploadUsingUploadId() {
        String uploadId = startUploadReturningUploadId();
        AbortMultipartUploadResponse response = s3Client.abortMultipartUpload(b -> b
            .uploadId(uploadId)
            .bucket(bucketName)
            .key(key));

        if (response.sdkHttpResponse().isSuccessful()) {
            logger.info("Upload ID [{}] to bucket [{}] successfully aborted.",
uploadId, bucketName);
        }
    }
```

Para eliminar de forma sistemática las cargas multiparte incompletas que tengan más de un número determinado de días, establezca una configuración de ciclo de vida de bucket para el bucket. En el siguiente ejemplo, se muestra cómo crear una regla para eliminar cargas incompletas que tienen más de 7 días.

```
    static void abortMultipartUploadsUsingLifecycleConfig() {
        Collection<LifecycleRule> lifeCycleRules = List.of(LifecycleRule.builder()
            .abortIncompleteMultipartUpload(b -> b.
                daysAfterInitiation(7))
            .status("Enabled")
            .filter(SdkBuilder::build) // Filter element is required.
            .build());
```

```
        // If the action is successful, the service sends back an HTTP 200 response
with an empty HTTP body.
        PutBucketLifecycleConfigurationResponse response =
s3Client.putBucketLifecycleConfiguration(b -> b
            .bucket(bucketName)
            .lifecycleConfiguration(b1 -> b1.rules(lifeCycleRules)));

        if (response.sdkHttpResponse().isSuccessful()) {
            logger.info("Rule to abort incomplete multipart uploads added to
bucket.");
        } else {
            logger.error("Unsuccessfully applied rule. HTTP status code is [{}]",
response.sdkHttpResponse().statusCode());
        }
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - AbortMultipartUpload
  - ListMultipartUploads
  - PutBucketLifecycleConfiguration

Detección de EPI en imágenes

El siguiente ejemplo de código muestra cómo crear una aplicación que utiliza Amazon Rekognition para detectar equipos de protección individual (EPI) en imágenes.

SDK para Java 2.x

Muestra cómo crear una AWS Lambda función que detecte imágenes con un equipo de protección individual.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- DynamoDB
- Amazon Rekognition

- Amazon S3
- Amazon SES

Detectar objetos en imágenes

El siguiente ejemplo de código muestra cómo crear una aplicación que utilice Amazon Rekognition para detectar objetos por categoría en imágenes.

SDK para Java 2.x

> Muestra cómo utilizar la API de Java de Amazon Rekognition para crear una aplicación que utilice Amazon Rekognition para identificar objetos por categoría en imágenes ubicadas en un bucket de Amazon Simple Storage Service (Amazon S3). La aplicación envía al administrador una notificación por correo electrónico con los resultados mediante Amazon Simple Email Service (Amazon SES).
>
> Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.
>
> Servicios utilizados en este ejemplo
>
> - Amazon Rekognition
> - Amazon S3
> - Amazon SES

Detección de personas y objetos en un video

El siguiente ejemplo de código muestra cómo detectar personas y objetos en un vídeo con Amazon Rekognition.

SDK para Java 2.x

> Muestra cómo utilizar la API Java de Amazon Rekognition para crear una aplicación que detecte rostros y objetos en vídeos ubicados en un bucket de Amazon Simple Storage Service (Amazon S3). La aplicación envía al administrador una notificación por correo electrónico con los resultados mediante Amazon Simple Email Service (Amazon SES).
>
> Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Amazon Rekognition
- Amazon S3
- Amazon SES
- Amazon SNS
- Amazon SQS

Descargue los “directorios” de S3

En el siguiente ejemplo de código, se muestra cómo descargar y filtrar el contenido de los “directorios” del bucket de Amazon S3.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

En este ejemplo, se muestra cómo utilizar TransferManager el S3 AWS SDK for Java 2.x para descargar «directorios» de un bucket de Amazon S3. También muestra cómo utilizarlos DownloadFilterspara en la solicitud.

```
    /**
     * For standard buckets, S3 provides the illusion of a directory structure
through the use of keys. When you upload
     * an object to an S3 bucket, you specify a key, which is essentially the "path"
to the object. The key can contain
     * forward slashes ("/") to make it appear as if the object is stored in a
directory structure, but this is just a
     * logical representation, not an actual directory.
     * <p><pre>
     * In this example, our S3 bucket contains the following objects:
     *
     * folder1/file1.txt
     * folder1/file2.txt
     * folder1/file3.txt
     * folder2/file1.txt
```

```
    * folder2/file2.txt
    * folder2/file3.txt
    * folder3/file1.txt
    * folder3/file2.txt
    * folder3/file3.txt
    *
    * When method `downloadS3Directories` is invoked with
    * `destinationPathURI` set to `/test`, the downloaded
    * directory looks like:
    *
    * |- test
    *    |- folder1
    *       |- file1.txt
    *       |- file2.txt
    *       |- file3.txt
    *    |- folder3
    *       |- file1.txt
    *       |- file2.txt
    *       |- file3.txt
    * </pre>
    *
    * @param transferManager    An S3TransferManager instance.
    * @param destinationPathURI local directory to hold the downloaded S3
'directories' and files.
    * @param bucketName         The S3 bucket that contains the 'directories' to
download.
    * @return The number of objects (files, in this case) that were downloaded.
    */
   public Integer downloadS3Directories(S3TransferManager transferManager,
                                        URI destinationPathURI, String bucketName)
{

       // Define the filters for which 'directories' we want to download.
       DownloadFilter folder1Filter = (S3Object s3Object) ->
s3Object.key().startsWith("folder1/");
       DownloadFilter folder3Filter = (S3Object s3Object) ->
s3Object.key().startsWith("folder3/");
       DownloadFilter folderFilter = s3Object ->
folder1Filter.or(folder3Filter).test(s3Object);

       DirectoryDownload directoryDownload =
transferManager.downloadDirectory(DownloadDirectoryRequest.builder()
               .destination(Paths.get(destinationPathURI))
               .bucket(bucketName)
```

```
                .filter(folderFilter)
                .build());
        CompletedDirectoryDownload completedDirectoryDownload =
 directoryDownload.completionFuture().join();

        Integer numFilesInFolder1 =
 Paths.get(destinationPathURI).resolve("folder1").toFile().list().length;
        Integer numFilesInFolder3 =
 Paths.get(destinationPathURI).resolve("folder3").toFile().list().length;

        try {
            assert numFilesInFolder1 == 3;
            assert numFilesInFolder3 == 3;
            assert !
Paths.get(destinationPathURI).resolve("folder2").toFile().exists(); // `folder2` was
 not downloaded.
        } catch (AssertionError e) {
            logger.error("An assertion failed.");
        }

        completedDirectoryDownload.failedTransfers()
                .forEach(fail -> logger.warn("Object failed to transfer  [{}]",
 fail.exception().getMessage()));
        return numFilesInFolder1 + numFilesInFolder3;
    }
```

Descargar objetos en un directorio local

El siguiente ejemplo de código muestra cómo descargar todos los objetos de un bucket de Amazon Simple Storage Service (Amazon S3) en un directorio local.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Utilice un S3 TransferManager para descargar todos los objetos de S3 en el mismo depósito de S3. Vea el archivo completo y pruébelo.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedDirectoryDownload;
import software.amazon.awssdk.transfer.s3.model.DirectoryDownload;
import software.amazon.awssdk.transfer.s3.model.DownloadDirectoryRequest;
import java.io.IOException;
import java.net.URI;
import java.net.URISyntaxException;
import java.nio.file.Files;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.util.HashSet;
import java.util.Set;
import java.util.UUID;
import java.util.stream.Collectors;

    public Integer downloadObjectsToDirectory(S3TransferManager transferManager,
            URI destinationPathURI, String bucketName) {
        DirectoryDownload directoryDownload =
 transferManager.downloadDirectory(DownloadDirectoryRequest.builder()
                .destination(Paths.get(destinationPathURI))
                .bucket(bucketName)
                .build());
        CompletedDirectoryDownload completedDirectoryDownload =
 directoryDownload.completionFuture().join();

        completedDirectoryDownload.failedTransfers()
                .forEach(fail -> logger.warn("Object [{}] failed to transfer",
 fail.toString()));
        return completedDirectoryDownload.failedTransfers().size();
    }
```

- Para obtener más información sobre la API, consulte DownloadDirectoryla Referencia AWS SDK for Java 2.x de la API.

Bloqueo de objetos de Amazon S3

En el siguiente ejemplo de código, se muestra cómo trabajar con características de bloqueo de objetos de S3.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute un escenario interactivo en el que se demuestren las características de bloqueo de objetos de Amazon S3.

```
import software.amazon.awssdk.services.s3.model.ObjectLockLegalHold;
import software.amazon.awssdk.services.s3.model.ObjectLockRetention;
import java.io.BufferedWriter;
import java.io.IOException;
import java.util.ArrayList;
import java.util.List;
import java.util.Scanner;
import java.util.stream.Collectors;

/*
 Before running this Java V2 code example, set up your development
 environment, including your credentials.

 For more information, see the following documentation topic:
 https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/setup.html

 This Java example performs the following tasks:
    1. Create test Amazon Simple Storage Service (S3) buckets with different lock
 policies.
    2. Upload sample objects to each bucket.
    3. Set some Legal Hold and Retention Periods on objects and buckets.
    4. Investigate lock policies by viewing settings or attempting to delete or
 overwrite objects.
    5. Clean up objects and buckets.
 */
public class S3ObjectLockWorkflow {
```

```
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    static String bucketName;
    static S3LockActions s3LockActions;
    private static final List<String> bucketNames = new ArrayList<>();
    private static final List<String> fileNames = new ArrayList<>();

    public static void main(String[] args) {
        final String usage = """
            Usage:
                <bucketName> \s

            Where:
                bucketName - The Amazon S3 bucket name.
           """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }
        s3LockActions = new S3LockActions();
        bucketName = args[0];
        Scanner scanner = new Scanner(System.in);

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon Simple Storage Service (S3) Object
Locking Feature Scenario.");
        System.out.println("Press Enter to continue...");
        scanner.nextLine();
        configurationSetup();
        System.out.println(DASHES);

        System.out.println(DASHES);
        setup();
        System.out.println("Setup is complete. Press Enter to continue...");
        scanner.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Lets present the user with choices.");
        System.out.println("Press Enter to continue...");
        scanner.nextLine();
        demoActionChoices() ;
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("Would you like to clean up the resources? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            cleanup();
            System.out.println("Clean up is complete.");
        }

        System.out.println("Press Enter to continue...");
        scanner.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Amazon S3 Object Locking Workflow is complete.");
        System.out.println(DASHES);
    }

    // Present the user with the demo action choices.
    public static void demoActionChoices() {
        String[] choices = {
            "List all files in buckets.",
            "Attempt to delete a file.",
            "Attempt to delete a file with retention period bypass.",
            "Attempt to overwrite a file.",
            "View the object and bucket retention settings for a file.",
            "View the legal hold settings for a file.",
            "Finish the workflow."
        };

        int choice = 0;
        while (true) {
            System.out.println(DASHES);
            choice = getChoiceResponse("Explore the S3 locking features by selecting
one of the following choices:", choices);
            System.out.println(DASHES);
            System.out.println("You selected "+choices[choice]);
            switch (choice) {
                case 0 -> {
                    s3LockActions.listBucketsAndObjects(bucketNames, true);
                }

                case 1 -> {
                    System.out.println("Enter the number of the object to delete:");
```

```
                    List<S3InfoObject> allFiles =
s3LockActions.listBucketsAndObjects(bucketNames, true);
                    List<String> fileKeys = allFiles.stream().map(f ->
f.getKeyName()).collect(Collectors.toList());
                    String[] fileKeysArray = fileKeys.toArray(new String[0]);
                    int fileChoice = getChoiceResponse(null, fileKeysArray);
                    String objectKey = fileKeys.get(fileChoice);
                    String bucketName = allFiles.get(fileChoice).getBucketName();
                    String version = allFiles.get(fileChoice).getVersion();
                    s3LockActions.deleteObjectFromBucket(bucketName, objectKey,
false, version);
                }

                case 2 -> {
                    System.out.println("Enter the number of the object to delete:");
                    List<S3InfoObject> allFiles =
s3LockActions.listBucketsAndObjects(bucketNames, true);
                    List<String> fileKeys = allFiles.stream().map(f ->
f.getKeyName()).collect(Collectors.toList());
                    String[] fileKeysArray = fileKeys.toArray(new String[0]);
                    int fileChoice = getChoiceResponse(null, fileKeysArray);
                    String objectKey = fileKeys.get(fileChoice);
                    String bucketName = allFiles.get(fileChoice).getBucketName();
                    String version = allFiles.get(fileChoice).getVersion();
                    s3LockActions.deleteObjectFromBucket(bucketName, objectKey,
true, version);
                }

                case 3 -> {
                    System.out.println("Enter the number of the object to
overwrite:");
                    List<S3InfoObject> allFiles =
s3LockActions.listBucketsAndObjects(bucketNames, true);
                    List<String> fileKeys = allFiles.stream().map(f ->
f.getKeyName()).collect(Collectors.toList());
                    String[] fileKeysArray = fileKeys.toArray(new String[0]);
                    int fileChoice = getChoiceResponse(null, fileKeysArray);
                    String objectKey = fileKeys.get(fileChoice);
                    String bucketName = allFiles.get(fileChoice).getBucketName();

                    // Attempt to overwrite the file.
                    try (BufferedWriter writer = new BufferedWriter(new
java.io.FileWriter(objectKey))) {
                        writer.write("This is a modified text.");
```

```
                    } catch (IOException e) {
                        e.printStackTrace();
                    }
                    s3LockActions.uploadFile(bucketName, objectKey, objectKey);
                }

                case 4 -> {
                    System.out.println("Enter the number of the object to
overwrite:");
                    List<S3InfoObject> allFiles =
s3LockActions.listBucketsAndObjects(bucketNames, true);
                    List<String> fileKeys = allFiles.stream().map(f ->
f.getKeyName()).collect(Collectors.toList());
                    String[] fileKeysArray = fileKeys.toArray(new String[0]);
                    int fileChoice = getChoiceResponse(null, fileKeysArray);
                    String objectKey = fileKeys.get(fileChoice);
                    String bucketName = allFiles.get(fileChoice).getBucketName();
                    s3LockActions.getObjectRetention(bucketName, objectKey);
                }

                case 5 -> {
                    System.out.println("Enter the number of the object to view:");
                    List<S3InfoObject> allFiles =
s3LockActions.listBucketsAndObjects(bucketNames, true);
                    List<String> fileKeys = allFiles.stream().map(f ->
f.getKeyName()).collect(Collectors.toList());
                    String[] fileKeysArray = fileKeys.toArray(new String[0]);
                    int fileChoice = getChoiceResponse(null, fileKeysArray);
                    String objectKey = fileKeys.get(fileChoice);
                    String bucketName = allFiles.get(fileChoice).getBucketName();
                    s3LockActions.getObjectLegalHold(bucketName, objectKey);
                    s3LockActions.getBucketObjectLockConfiguration(bucketName);
                }

                case 6 -> {
                    System.out.println("Exiting the workflow...");
                    return;
                }

                default -> {
                    System.out.println("Invalid choice. Please select again.");
                }
            }
```

```
        }
    }

    // Clean up the resources from the scenario.
    private static void cleanup() {
        List<S3InfoObject> allFiles =
s3LockActions.listBucketsAndObjects(bucketNames, false);
        for (S3InfoObject fileInfo : allFiles) {
            String bucketName = fileInfo.getBucketName();
            String key = fileInfo.getKeyName();
            String version = fileInfo.getVersion();
            if (bucketName.contains("lock-enabled") ||
(bucketName.contains("retention-after-creation"))) {
                ObjectLockLegalHold legalHold =
s3LockActions.getObjectLegalHold(bucketName, key);
                if (legalHold != null) {
                    String holdStatus = legalHold.status().name();
                    System.out.println(holdStatus);
                    if (holdStatus.compareTo("ON") == 0) {
                        s3LockActions.modifyObjectLegalHold(bucketName, key, false);
                    }
                }
                // Check for a retention period.
                ObjectLockRetention retention =
s3LockActions.getObjectRetention(bucketName, key);
                boolean hasRetentionPeriod ;
                hasRetentionPeriod = retention != null;
                s3LockActions.deleteObjectFromBucket(bucketName,
key,hasRetentionPeriod, version);

            } else {
                System.out.println(bucketName +" objects do not have a legal lock");
                s3LockActions.deleteObjectFromBucket(bucketName, key,false,
version);
            }
        }

        // Delete the buckets.
        System.out.println("Delete "+bucketName);
        for (String bucket : bucketNames){
            s3LockActions.deleteBucketByName(bucket);
        }
    }
```

```
   private static void setup() {
       Scanner scanner = new Scanner(System.in);
       System.out.println("""
               For this workflow, we will use the AWS SDK for Java to create
several S3
               buckets and files to demonstrate working with S3 locking features.
               """);

       System.out.println("S3 buckets can be created either with or without object
lock enabled.");
       System.out.println("Press Enter to continue...");
       scanner.nextLine();

       // Create three S3 buckets.
       s3LockActions.createBucketWithLockOptions(false, bucketNames.get(0));
       s3LockActions.createBucketWithLockOptions(true, bucketNames.get(1));
       s3LockActions.createBucketWithLockOptions(false, bucketNames.get(2));
       System.out.println("Press Enter to continue.");
       scanner.nextLine();

       System.out.println("Bucket "+bucketNames.get(2) +" will be configured to use
object locking with a default retention period.");
       s3LockActions.modifyBucketDefaultRetention(bucketNames.get(2));
       System.out.println("Press Enter to continue.");
       scanner.nextLine();

       System.out.println("Object lock policies can also be added to existing
buckets. For this example, we will use "+bucketNames.get(1));
       s3LockActions.enableObjectLockOnBucket(bucketNames.get(1));
       System.out.println("Press Enter to continue.");
       scanner.nextLine();

       // Upload some files to the buckets.
       System.out.println("Now let's add some test files:");
       String fileName = "exampleFile.txt";
       int fileCount = 2;
       try (BufferedWriter writer = new BufferedWriter(new
java.io.FileWriter(fileName))) {
           writer.write("This is a sample file for uploading to a bucket.");

       } catch (IOException e) {
           e.printStackTrace();
       }
```

```
        for (String bucketName : bucketNames){
            for (int i = 0; i < fileCount; i++) {
                // Get the file name without extension.
                String fileNameWithoutExtension =
java.nio.file.Paths.get(fileName).getFileName().toString();
                int extensionIndex = fileNameWithoutExtension.lastIndexOf('.');
                if (extensionIndex > 0) {
                    fileNameWithoutExtension = fileNameWithoutExtension.substring(0,
extensionIndex);
                }

                // Create the numbered file names.
                String numberedFileName = fileNameWithoutExtension + i +
getFileExtension(fileName);
                fileNames.add(numberedFileName);
                s3LockActions.uploadFile(bucketName, numberedFileName, fileName);
            }
        }

        String question = null;
        System.out.print("Press Enter to continue...");
        scanner.nextLine();
        System.out.println("Now we can set some object lock policies on individual
files:");
        for (String bucketName : bucketNames) {
            for (int i = 0; i < fileNames.size(); i++){

                // No modifications to the objects in the first bucket.
                if (!bucketName.equals(bucketNames.get(0))) {
                    String exampleFileName = fileNames.get(i);
                    switch (i) {
                        case 0 -> {
                            question = "Would you like to add a legal hold to " +
exampleFileName + " in " + bucketName + " (y/n)?";
                            System.out.println(question);
                            String ans = scanner.nextLine().trim();
                            if (ans.equalsIgnoreCase("y")) {
                                System.out.println("**** You have selected to put a
legal hold " + exampleFileName);

                                // Set a legal hold.
                                s3LockActions.modifyObjectLegalHold(bucketName,
exampleFileName, true);
                            }
```

```
                        }
                        case 1 -> {
                            """
                                Would you like to add a 1 day Governance retention
 period to %s in %s (y/n)?
                                Reminder: Only a user with the
 s3:BypassGovernanceRetention permission will be able to delete this file or its
 bucket until the retention period has expired.
                                """.formatted(exampleFileName, bucketName);
                            System.out.println(question);
                            String ans2 = scanner.nextLine().trim();
                            if (ans2.equalsIgnoreCase("y")) {

 s3LockActions.modifyObjectRetentionPeriod(bucketName, exampleFileName);
                            }
                        }
                    }
                }
            }
        }
    }

    // Get file extension.
    private static String getFileExtension(String fileName) {
        int dotIndex = fileName.lastIndexOf('.');
        if (dotIndex > 0) {
            return fileName.substring(dotIndex);
        }
        return "";
    }

    public static void configurationSetup() {
        String noLockBucketName = bucketName + "-no-lock";
        String lockEnabledBucketName = bucketName + "-lock-enabled";
        String retentionAfterCreationBucketName = bucketName + "-retention-after-
creation";
        bucketNames.add(noLockBucketName);
        bucketNames.add(lockEnabledBucketName);
        bucketNames.add(retentionAfterCreationBucketName);
    }

    public static int getChoiceResponse(String question, String[] choices) {
        Scanner scanner = new Scanner(System.in);
        if (question != null) {
```

```
            System.out.println(question);
            for (int i = 0; i < choices.length; i++) {
                System.out.println("\t" + (i + 1) + ". " + choices[i]);
            }
        }

        int choiceNumber = 0;
        while (choiceNumber < 1 || choiceNumber > choices.length) {
            String choice = scanner.nextLine();
            try {
                choiceNumber = Integer.parseInt(choice);
            } catch (NumberFormatException e) {
                System.out.println("Invalid choice. Please enter a valid number.");
            }
        }

        return choiceNumber - 1;
    }
}
```

Una clase contenedora para funciones de S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.BucketVersioningStatus;
import software.amazon.awssdk.services.s3.model.ChecksumAlgorithm;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.DefaultRetention;
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteObjectRequest;
import software.amazon.awssdk.services.s3.model.GetObjectLegalHoldRequest;
import software.amazon.awssdk.services.s3.model.GetObjectLegalHoldResponse;
import software.amazon.awssdk.services.s3.model.GetObjectLockConfigurationRequest;
import software.amazon.awssdk.services.s3.model.GetObjectLockConfigurationResponse;
import software.amazon.awssdk.services.s3.model.GetObjectRetentionRequest;
import software.amazon.awssdk.services.s3.model.GetObjectRetentionResponse;
import software.amazon.awssdk.services.s3.model.HeadBucketRequest;
import software.amazon.awssdk.services.s3.model.ListObjectVersionsRequest;
import software.amazon.awssdk.services.s3.model.ListObjectVersionsResponse;
import software.amazon.awssdk.services.s3.model.MFADelete;
import software.amazon.awssdk.services.s3.model.ObjectLockConfiguration;
import software.amazon.awssdk.services.s3.model.ObjectLockEnabled;
```

```
import software.amazon.awssdk.services.s3.model.ObjectLockLegalHold;
import software.amazon.awssdk.services.s3.model.ObjectLockLegalHoldStatus;
import software.amazon.awssdk.services.s3.model.ObjectLockRetention;
import software.amazon.awssdk.services.s3.model.ObjectLockRetentionMode;
import software.amazon.awssdk.services.s3.model.ObjectLockRule;
import software.amazon.awssdk.services.s3.model.PutBucketVersioningRequest;
import software.amazon.awssdk.services.s3.model.PutObjectLegalHoldRequest;
import software.amazon.awssdk.services.s3.model.PutObjectLockConfigurationRequest;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;
import software.amazon.awssdk.services.s3.model.PutObjectRetentionRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.VersioningConfiguration;
import software.amazon.awssdk.services.s3.waiters.S3Waiter;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.time.Instant;
import java.time.ZoneId;
import java.time.ZonedDateTime;
import java.time.format.DateTimeFormatter;
import java.time.temporal.ChronoUnit;
import java.util.List;
import java.util.concurrent.atomic.AtomicInteger;
import java.util.stream.Collectors;

// Contains application logic for the Amazon S3 operations used in this workflow.
public class S3LockActions {

    private static S3Client getClient() {
        return S3Client.builder()
            .region(Region.US_EAST_1)
            .build();
    }

    // Set or modify a retention period on an object in an S3 bucket.
    public void modifyObjectRetentionPeriod(String bucketName, String objectKey) {
        // Calculate the instant one day from now.
        Instant futureInstant = Instant.now().plus(1, ChronoUnit.DAYS);

        // Convert the Instant to a ZonedDateTime object with a specific time zone.
        ZonedDateTime zonedDateTime = futureInstant.atZone(ZoneId.systemDefault());

        // Define a formatter for human-readable output.
```

```
        DateTimeFormatter formatter = DateTimeFormatter.ofPattern("yyyy-MM-dd
HH:mm:ss");

        // Format the ZonedDateTime object to a human-readable date string.
        String humanReadableDate = formatter.format(zonedDateTime);

        // Print the formatted date string.
        System.out.println("Formatted Date: " + humanReadableDate);
        ObjectLockRetention retention = ObjectLockRetention.builder()
            .mode(ObjectLockRetentionMode.GOVERNANCE)
            .retainUntilDate(futureInstant)
            .build();

        PutObjectRetentionRequest retentionRequest =
PutObjectRetentionRequest.builder()
            .bucket(bucketName)
            .key(objectKey)
            .retention(retention)
            .build();

        getClient().putObjectRetention(retentionRequest);
        System.out.println("Set retention for "+objectKey +" in " +bucketName +"
until "+ humanReadableDate +".");
    }

    // Get the legal hold details for an S3 object.
    public ObjectLockLegalHold getObjectLegalHold(String bucketName, String
objectKey) {
        try {
            GetObjectLegalHoldRequest legalHoldRequest =
GetObjectLegalHoldRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .build();

            GetObjectLegalHoldResponse response =
getClient().getObjectLegalHold(legalHoldRequest);
            System.out.println("Object legal hold for " + objectKey + " in " +
bucketName +
                ":\n\tStatus: " + response.legalHold().status());
            return response.legalHold();

        } catch (S3Exception ex) {
```

```
            System.out.println("\tUnable to fetch legal hold: '" + ex.getMessage() +
"'");
        }

        return null;
    }

    // Create a new Amazon S3 bucket with object lock options.
    public void createBucketWithLockOptions(boolean enableObjectLock, String
bucketName) {
        S3Waiter s3Waiter = getClient().waiter();
        CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
            .bucket(bucketName)
            .objectLockEnabledForBucket(enableObjectLock)
            .build();

        getClient().createBucket(bucketRequest);
        HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
            .bucket(bucketName)
            .build();

        // Wait until the bucket is created and print out the response.
        s3Waiter.waitUntilBucketExists(bucketRequestWait);
        System.out.println(bucketName + " is ready");
    }

    public List<S3InfoObject> listBucketsAndObjects(List<String> bucketNames,
Boolean interactive) {
        AtomicInteger counter = new AtomicInteger(0); // Initialize counter.
        return bucketNames.stream()
            .flatMap(bucketName ->
listBucketObjectsAndVersions(bucketName).versions().stream()
                .map(version -> {
                    S3InfoObject s3InfoObject = new S3InfoObject();
                    s3InfoObject.setBucketName(bucketName);
                    s3InfoObject.setVersion(version.versionId());
                    s3InfoObject.setKeyName(version.key());
                    return s3InfoObject;
                }))
            .peek(s3InfoObject -> {
                int i = counter.incrementAndGet(); // Increment and get the updated
value.
                if (interactive) {
                    System.out.println(i + ": "+ s3InfoObject.getKeyName());
```

```
                    System.out.printf("%5s Bucket name: %s\n", "",
s3InfoObject.getBucketName());
                    System.out.printf("%5s Version: %s\n", "",
s3InfoObject.getVersion());
                }
            })
            .collect(Collectors.toList());
    }

    public ListObjectVersionsResponse listBucketObjectsAndVersions(String
bucketName) {
        ListObjectVersionsRequest versionsRequest =
ListObjectVersionsRequest.builder()
            .bucket(bucketName)
            .build();

        return getClient().listObjectVersions(versionsRequest);
    }

    // Set or modify a retention period on an S3 bucket.
    public void modifyBucketDefaultRetention(String bucketName) {
        VersioningConfiguration versioningConfiguration =
VersioningConfiguration.builder()
            .mfaDelete(MFADelete.DISABLED)
            .status(BucketVersioningStatus.ENABLED)
            .build();

        PutBucketVersioningRequest versioningRequest =
PutBucketVersioningRequest.builder()
            .bucket(bucketName)
            .versioningConfiguration(versioningConfiguration)
            .build();

        getClient().putBucketVersioning(versioningRequest);
        DefaultRetention rention = DefaultRetention.builder()
            .days(1)
            .mode(ObjectLockRetentionMode.GOVERNANCE)
            .build();

        ObjectLockRule lockRule = ObjectLockRule.builder()
            .defaultRetention(rention)
            .build();
```

```
        ObjectLockConfiguration objectLockConfiguration =
ObjectLockConfiguration.builder()
            .objectLockEnabled(ObjectLockEnabled.ENABLED)
            .rule(lockRule)
            .build();

        PutObjectLockConfigurationRequest putObjectLockConfigurationRequest =
PutObjectLockConfigurationRequest.builder()
            .bucket(bucketName)
            .objectLockConfiguration(objectLockConfiguration)
            .build();

        getClient().putObjectLockConfiguration(putObjectLockConfigurationRequest) ;
        System.out.println("Added a default retention to bucket "+bucketName +".");
    }

    // Enable object lock on an existing bucket.
    public void enableObjectLockOnBucket(String bucketName) {
        try {
            VersioningConfiguration versioningConfiguration =
VersioningConfiguration.builder()
                .status(BucketVersioningStatus.ENABLED)
                .build();

            PutBucketVersioningRequest putBucketVersioningRequest =
PutBucketVersioningRequest.builder()
                .bucket(bucketName)
                .versioningConfiguration(versioningConfiguration)
                .build();

            // Enable versioning on the bucket.
            getClient().putBucketVersioning(putBucketVersioningRequest);
            PutObjectLockConfigurationRequest request =
PutObjectLockConfigurationRequest.builder()
                .bucket(bucketName)
                .objectLockConfiguration(ObjectLockConfiguration.builder()
                    .objectLockEnabled(ObjectLockEnabled.ENABLED)
                    .build())
                .build();

            getClient().putObjectLockConfiguration(request);
            System.out.println("Successfully enabled object lock on "+bucketName);

        } catch (S3Exception ex) {
```

```
            System.out.println("Error modifying object lock: '" + ex.getMessage() +
"'");
        }
    }

    public void uploadFile(String bucketName, String objectName, String filePath) {
        Path file = Paths.get(filePath);
        PutObjectRequest request = PutObjectRequest.builder()
            .bucket(bucketName)
            .key(objectName)
            .checksumAlgorithm(ChecksumAlgorithm.SHA256)
            .build();

        PutObjectResponse response = getClient().putObject(request, file);
        if (response != null) {
            System.out.println("\tSuccessfully uploaded " + objectName + " to " +
bucketName + ".");
        } else {
            System.out.println("\tCould not upload " + objectName + " to " +
bucketName + ".");
        }
    }

    // Set or modify a legal hold on an object in an S3 bucket.
    public void modifyObjectLegalHold(String bucketName, String objectKey, boolean
legalHoldOn) {
        ObjectLockLegalHold legalHold ;
        if (legalHoldOn) {
            legalHold = ObjectLockLegalHold.builder()
                .status(ObjectLockLegalHoldStatus.ON)
                .build();
        } else {
            legalHold = ObjectLockLegalHold.builder()
                .status(ObjectLockLegalHoldStatus.OFF)
                .build();
        }

        PutObjectLegalHoldRequest legalHoldRequest =
PutObjectLegalHoldRequest.builder()
            .bucket(bucketName)
            .key(objectKey)
            .legalHold(legalHold)
            .build();
```

```
        getClient().putObjectLegalHold(legalHoldRequest) ;
        System.out.println("Modified legal hold for "+ objectKey +" in "+bucketName
+".");
    }

    // Delete an object from a specific bucket.
    public void deleteObjectFromBucket(String bucketName, String objectKey, boolean
hasRetention, String versionId) {
        try {
            DeleteObjectRequest objectRequest;
            if (hasRetention) {
                objectRequest = DeleteObjectRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .versionId(versionId)
                    .bypassGovernanceRetention(true)
                    .build();
            } else {
                objectRequest = DeleteObjectRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .versionId(versionId)
                    .build();
            }

            getClient().deleteObject(objectRequest) ;
            System.out.println("The object was successfully deleted");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
    }

    // Get the retention period for an S3 object.
    public ObjectLockRetention getObjectRetention(String bucketName, String key){
        try {
            GetObjectRetentionRequest retentionRequest =
GetObjectRetentionRequest.builder()
                .bucket(bucketName)
                .key(key)
                .build();

            GetObjectRetentionResponse response =
getClient().getObjectRetention(retentionRequest);
```

```
            System.out.println("tObject retention for "+key +" in "+ bucketName +":
 " + response.retention().mode() +" until "+ response.retention().retainUntilDate()
 +".");
            return response.retention();

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return null;
        }
    }

    public void deleteBucketByName(String bucketName) {
        try {
            DeleteBucketRequest request = DeleteBucketRequest.builder()
                .bucket(bucketName)
                .build();

            getClient().deleteBucket(request);
            System.out.println(bucketName +" was deleted.");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
    }

    // Get the object lock configuration details for an S3 bucket.
    public void getBucketObjectLockConfiguration(String bucketName) {
        GetObjectLockConfigurationRequest objectLockConfigurationRequest =
 GetObjectLockConfigurationRequest.builder()
            .bucket(bucketName)
            .build();

        GetObjectLockConfigurationResponse response =
 getClient().getObjectLockConfiguration(objectLockConfigurationRequest);
        System.out.println("Bucket object lock config for "+bucketName +":  ");
        System.out.println("\tEnabled:
 "+response.objectLockConfiguration().objectLockEnabled());
        System.out.println("\tRule: "+
 response.objectLockConfiguration().rule().defaultRetention());
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - GetObjectLegalHold
  - GetObjectLockConfiguration
  - GetObjectRetention
  - PutObjectLegalHold
  - PutObjectLockConfiguration
  - PutObjectRetention

Administración de mensajes grandes mediante S3

En el siguiente ejemplo de código, se muestra cómo utilizar la biblioteca de clientes ampliada de Amazon SQS para trabajar con mensajes grandes de Amazon SQS.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import com.amazon.sqs.javamessaging.AmazonSQSExtendedClient;
import com.amazon.sqs.javamessaging.ExtendedClientConfiguration;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import org.joda.time.DateTime;
import org.joda.time.format.DateTimeFormat;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.BucketLifecycleConfiguration;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteObjectRequest;
import software.amazon.awssdk.services.s3.model.ExpirationStatus;
import software.amazon.awssdk.services.s3.model.LifecycleExpiration;
import software.amazon.awssdk.services.s3.model.LifecycleRule;
import software.amazon.awssdk.services.s3.model.LifecycleRuleFilter;
import software.amazon.awssdk.services.s3.model.ListObjectVersionsRequest;
import software.amazon.awssdk.services.s3.model.ListObjectVersionsResponse;
```

```
import software.amazon.awssdk.services.s3.model.ListObjectsV2Request;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Response;
import
 software.amazon.awssdk.services.s3.model.PutBucketLifecycleConfigurationRequest;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.CreateQueueResponse;
import software.amazon.awssdk.services.sqs.model.DeleteMessageRequest;
import software.amazon.awssdk.services.sqs.model.DeleteQueueRequest;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageResponse;
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;

import java.util.Arrays;
import java.util.List;
import java.util.UUID;

/**
 * Example of using Amazon SQS Extended Client Library for Java 2.x.
 */
public class SqsExtendedClientExample {
    private static final Logger logger =
 LoggerFactory.getLogger(SqsExtendedClientExample.class);

    private String s3BucketName;
    private String queueUrl;
    private final String queueName;
    private final S3Client s3Client;
    private final SqsClient sqsExtendedClient;
    private final int messageSize;

    /**
     * Constructor with default clients and message size.
     */
    public SqsExtendedClientExample() {
        this(S3Client.create(), 300000);
    }

    /**
     * Constructor with custom S3 client and message size.
     *
     * @param s3Client The S3 client to use
     * @param messageSize The size of the test message to create
```

```
     */
    public SqsExtendedClientExample(S3Client s3Client, int messageSize) {
        this.s3Client = s3Client;
        this.messageSize = messageSize;

        // Generate a unique bucket name.
        this.s3BucketName = UUID.randomUUID() + "-" +
                DateTimeFormat.forPattern("yyMMdd-hhmmss").print(new DateTime());

        // Generate a unique queue name.
        this.queueName = "MyQueue-" + UUID.randomUUID();

        // Configure the SQS extended client.
        final ExtendedClientConfiguration extendedClientConfig = new
ExtendedClientConfiguration()
                .withPayloadSupportEnabled(s3Client, s3BucketName);

        this.sqsExtendedClient = new
AmazonSQSExtendedClient(SqsClient.builder().build(), extendedClientConfig);
    }

    public static void main(String[] args) {
        SqsExtendedClientExample example = new SqsExtendedClientExample();
        try {
            example.setup();
            example.sendAndReceiveMessage();
        } finally {
            example.cleanup();
        }
    }

    /**
     * Send a large message and receive it back.
     *
     * @return The received message
     */
    public Message sendAndReceiveMessage() {
        try {
            // Create a large message.
            char[] chars = new char[messageSize];
            Arrays.fill(chars, 'x');
            String largeMessage = new String(chars);

            // Send the message.
```

```
            final SendMessageRequest sendMessageRequest =
SendMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .messageBody(largeMessage)
                    .build();

            sqsExtendedClient.sendMessage(sendMessageRequest);
            logger.info("Sent message of size: {}", largeMessage.length());

            // Receive and return the message.
            final ReceiveMessageResponse receiveMessageResponse =
sqsExtendedClient.receiveMessage(
                    ReceiveMessageRequest.builder().queueUrl(queueUrl).build());

            List<Message> messages = receiveMessageResponse.messages();
            if (messages.isEmpty()) {
                throw new RuntimeException("No messages received");
            }

            Message message = messages.getFirst();
            logger.info("\nMessage received.");
            logger.info("  ID: {}", message.messageId());
            logger.info("  Receipt handle: {}", message.receiptHandle());
            logger.info("  Message body size: {}", message.body().length());
            logger.info("  Message body (first 5 characters): {}",
message.body().substring(0, 5));

            return message;
        } catch (RuntimeException e) {
            logger.error("Error during message processing: {}", e.getMessage(), e);
            throw e;
        }
    }
```

- Para obtener más información, consulte la Guía para desarrolladores de AWS SDK for Java 2.x.
- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateBucket
  - PutBucketLifecycleConfiguration

- ReceiveMessage
- SendMessage

Parse URIs

El siguiente ejemplo de código muestra cómo analizar Amazon S3 URIs para extraer componentes importantes, como el nombre del bucket y la clave del objeto.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Analice un URI de Amazon S3 mediante la clase S3Uri.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.S3Uri;
import software.amazon.awssdk.services.s3.S3Utilities;

import java.net.URI;
import java.util.List;
import java.util.Map;

    /**
     *
     * @param s3Client    - An S3Client through which you acquire an S3Uri instance.
     * @param s3ObjectUrl - A complex URL (String) that is used to demonstrate S3Uri
     *                    capabilities.
     */
    public static void parseS3UriExample(S3Client s3Client, String s3ObjectUrl) {
        logger.info(s3ObjectUrl);
        // Console output:
        // 'https://s3.us-west-1.amazonaws.com/myBucket/resources/doc.txt?
versionId=abc123&partNumber=77&partNumber=88'.
```

```
        // Create an S3Utilities object using the configuration of the s3Client.
        S3Utilities s3Utilities = s3Client.utilities();

        // From a String URL create a URI object to pass to the parseUri() method.
        URI uri = URI.create(s3ObjectUrl);
        S3Uri s3Uri = s3Utilities.parseUri(uri);

        // If the URI contains no value for the Region, bucket or key, the SDK
returns
        // an empty Optional.
        // The SDK returns decoded URI values.

        Region region = s3Uri.region().orElse(null);
        log("region", region);
        // Console output: 'region: us-west-1'.

        String bucket = s3Uri.bucket().orElse(null);
        log("bucket", bucket);
        // Console output: 'bucket: myBucket'.

        String key = s3Uri.key().orElse(null);
        log("key", key);
        // Console output: 'key: resources/doc.txt'.

        Boolean isPathStyle = s3Uri.isPathStyle();
        log("isPathStyle", isPathStyle);
        // Console output: 'isPathStyle: true'.

        // If the URI contains no query parameters, the SDK returns an empty map.
        Map<String, List<String>> queryParams = s3Uri.rawQueryParameters();
        log("rawQueryParameters", queryParams);
        // Console output: 'rawQueryParameters: {versionId=[abc123], partNumber=[77,
        // 88]}'.

        // Retrieve the first or all values for a query parameter as shown in the
        // following code.
        String versionId =
s3Uri.firstMatchingRawQueryParameter("versionId").orElse(null);
        log("firstMatchingRawQueryParameter-versionId", versionId);
        // Console output: 'firstMatchingRawQueryParameter-versionId: abc123'.

        String partNumber =
s3Uri.firstMatchingRawQueryParameter("partNumber").orElse(null);
        log("firstMatchingRawQueryParameter-partNumber", partNumber);
```

```
        // Console output: 'firstMatchingRawQueryParameter-partNumber: 77'.

        List<String> partNumbers =
 s3Uri.firstMatchingRawQueryParameters("partNumber");
        log("firstMatchingRawQueryParameter", partNumbers);
        // Console output: 'firstMatchingRawQueryParameter: [77, 88]'.

        /*
         * Object keys and query parameters with reserved or unsafe characters, must
 be
         * URL-encoded.
         * For example replace whitespace " " with "%20".
         * Valid:
         * "https://s3.us-west-1.amazonaws.com/myBucket/object%20key?query=
%5Bbrackets%5D"
         * Invalid:
         * "https://s3.us-west-1.amazonaws.com/myBucket/object key?query=[brackets]"
         *
         * Virtual-hosted-style URIs with bucket names that contain a dot, ".", the
 dot
         * must not be URL-encoded.
         * Valid: "https://my.Bucket.s3.us-west-1.amazonaws.com/key"
         * Invalid: "https://my%2EBucket.s3.us-west-1.amazonaws.com/key"
         */
    }

    private static void log(String s3UriElement, Object element) {
        if (element == null) {
            logger.info("{}: {}", s3UriElement, "null");
        } else {
            logger.info("{}: {}", s3UriElement, element);
        }
    }
```

Procese notificaciones de eventos de S3

El siguiente ejemplo de código muestra cómo trabajar con notificaciones de eventos de S3 de una forma orientada a objetos.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Este ejemplo muestra cómo procesar un evento de notificación de S3 utilizando Amazon SQS.

```
    /**
     * This method receives S3 event notifications by using an SqsAsyncClient.
     * After the client receives the messages it deserializes the JSON payload and
 logs them. It uses
     * the S3EventNotification class (part of the S3 event notification API for
 Java) to deserialize
     * the JSON payload and access the messages in an object-oriented way.
     *
     * @param queueUrl The URL of the AWS SQS queue that receives the S3 event
 notifications.
     * @see <a href="https://sdk.amazonaws.com/java/api/latest/software/amazon/
awssdk/eventnotifications/s3/model/package-summary.html">S3EventNotification API</
a>.
     * <p>
     * To use S3 event notification serialization/deserialization to objects, add
 the following
     * dependency to your Maven pom.xml file.
     * <dependency>
     * <groupId>software.amazon.awssdk</groupId>
     * <artifactId>s3-event-notifications</artifactId>
     * <version><LATEST></version>
     * </dependency>
     * <p>
     * The S3 event notification API became available with version 2.25.11 of the
 Java SDK.
     * <p>
     * This example shows the use of the API with AWS SQS, but it can be used to
 process S3 event notifications
     * in AWS SNS or AWS Lambda as well.
     * <p>
     * Note: The S3EventNotification class does not work with messages routed
 through AWS EventBridge.
     */
```

```
   static void processS3Events(String bucketName, String queueUrl, String queueArn)
{
       try {
           // Configure the bucket to send Object Created and Object Tagging
notifications to an existing SQS queue.
           s3Client.putBucketNotificationConfiguration(b -> b
                   .notificationConfiguration(ncb -> ncb
                           .queueConfigurations(qcb -> qcb
                                   .events(Event.S3_OBJECT_CREATED,
Event.S3_OBJECT_TAGGING)
                                   .queueArn(queueArn)))
                           .bucket(bucketName)
           ).join();

           triggerS3EventNotifications(bucketName);
           // Wait for event notifications to propagate.
           Thread.sleep(Duration.ofSeconds(5).toMillis());

           boolean didReceiveMessages = true;
           while (didReceiveMessages) {
               // Display the number of messages that are available in the queue.
               sqsClient.getQueueAttributes(b -> b
                               .queueUrl(queueUrl)

.attributeNames(QueueAttributeName.APPROXIMATE_NUMBER_OF_MESSAGES)
                       ).thenAccept(attributeResponse ->
                               logger.info("Approximate number of messages in the
queue: {}",

attributeResponse.attributes().get(QueueAttributeName.APPROXIMATE_NUMBER_OF_MESSAGES)))
                       .join();

               // Receive the messages.
               ReceiveMessageResponse response = sqsClient.receiveMessage(b -> b
                       .queueUrl(queueUrl)
               ).get();
               logger.info("Count of received messages: {}",
response.messages().size());
               didReceiveMessages = !response.messages().isEmpty();

               // Create a collection to hold the received message for deletion
               // after we log the messages.
               HashSet<DeleteMessageBatchRequestEntry> messagesToDelete = new
HashSet<>();
```

```
                // Process each message.
                response.messages().forEach(message -> {
                    logger.info("Message id: {}", message.messageId());
                    // Deserialize JSON message body to a S3EventNotification object
                    // to access messages in an object-oriented way.
                    S3EventNotification event =
S3EventNotification.fromJson(message.body());

                    // Log the S3 event notification record details.
                    if (event.getRecords() != null) {
                        event.getRecords().forEach(record -> {
                            String eventName = record.getEventName();
                            String key = record.getS3().getObject().getKey();
                            logger.info(record.toString());
                            logger.info("Event name is {} and key is {}", eventName,
key);
                        });
                    }
                    // Add logged messages to collection for batch deletion.
                    messagesToDelete.add(DeleteMessageBatchRequestEntry.builder()
                            .id(message.messageId())
                            .receiptHandle(message.receiptHandle())
                            .build());
                });
                // Delete messages.
                if (!messagesToDelete.isEmpty()) {
                    sqsClient.deleteMessageBatch(DeleteMessageBatchRequest.builder()
                            .queueUrl(queueUrl)
                            .entries(messagesToDelete)
                            .build()
                    ).join();
                }
            } // End of while block.
        } catch (InterruptedException | ExecutionException e) {
            throw new RuntimeException(e);
        }
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - DeleteMessageBatch

- GetQueueAttributes
- PutBucketNotificationConfiguration
- ReceiveMessage

Envía notificaciones de eventos a EventBridge

El siguiente ejemplo de código muestra cómo habilitar un bucket para enviar notificaciones de eventos de S3 EventBridge y enrutar las notificaciones a un tema de Amazon SNS y a una cola de Amazon SQS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /** This method configures a bucket to send events to AWS EventBridge and
creates a rule
    * to route the S3 object created events to a topic and a queue.
    *
    * @param bucketName Name of existing bucket
    * @param topicArn ARN of existing topic to receive S3 event notifications
    * @param queueArn ARN of existing queue to receive S3 event notifications
    *
    *  An AWS CloudFormation stack sets up the bucket, queue, topic before the
method runs.
    */
   public static String setBucketNotificationToEventBridge(String bucketName,
String topicArn, String queueArn) {
       try {
           // Enable bucket to emit S3 Event notifications to EventBridge.
           s3Client.putBucketNotificationConfiguration(b -> b
                   .bucket(bucketName)
                   .notificationConfiguration(b1 -> b1
                           .eventBridgeConfiguration(
                                   SdkBuilder::build)
                   ).build()).join();
```

```
            // Create an EventBridge rule to route Object Created notifications.
            PutRuleRequest putRuleRequest = PutRuleRequest.builder()
                    .name(RULE_NAME)
                    .eventPattern("""
                            {
                              "source": ["aws.s3"],
                              "detail-type": ["Object Created"],
                              "detail": {
                                "bucket": {
                                  "name": ["%s"]
                                }
                              }
                            }
                            """.formatted(bucketName))
                    .build();

            // Add the rule to the default event bus.
            PutRuleResponse putRuleResponse =
eventBridgeClient.putRule(putRuleRequest)
                    .whenComplete((r, t) -> {
                        if (t != null) {
                            logger.error("Error creating event bus rule: " +
t.getMessage(), t);
                            throw new RuntimeException(t.getCause().getMessage(),
t);
                        }
                        logger.info("Event bus rule creation request sent
successfully. ARN is: {}", r.ruleArn());
                    }).join();

            // Add the existing SNS topic and SQS queue as targets to the rule.
            eventBridgeClient.putTargets(b -> b
                    .eventBusName("default")
                    .rule(RULE_NAME)
                    .targets(List.of (
                            Target.builder()
                                    .arn(queueArn)
                                    .id("Queue")
                                    .build(),
                            Target.builder()
                                    .arn(topicArn)
                                    .id("Topic")
                                    .build())
                            )
```

```
                    ).join();
            return putRuleResponse.ruleArn();
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - PutBucketNotificationConfiguration
  - PutRule
  - PutTargets

Realización de un seguimiento de cargas y descargas

En el siguiente ejemplo de código se muestra cómo realizar un seguimiento de cargas o descargas de objetos de Amazon S3.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Realice el seguimiento del progreso de una carga de archivos.

```
    public void trackUploadFile(S3TransferManager transferManager, String
bucketName,
                                String key, URI filePathURI) {
        UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
                .putObjectRequest(b -> b.bucket(bucketName).key(key))
                .addTransferListener(LoggingTransferListener.create())  // Add
listener.
                .source(Paths.get(filePathURI))
                .build();
```

```
        FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);

        fileUpload.completionFuture().join();
        /*
            The SDK provides a LoggingTransferListener implementation of the
TransferListener interface.
            You can also implement the interface to provide your own logic.

            Configure log4J2 with settings such as the following.
                <Configuration status="WARN">
                    <Appenders>
                        <Console name="AlignedConsoleAppender" target="SYSTEM_OUT">
                            <PatternLayout pattern="%m%n"/>
                        </Console>
                    </Appenders>

                    <Loggers>
                        <logger
name="software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener"
level="INFO" additivity="false">
                            <AppenderRef ref="AlignedConsoleAppender"/>
                        </logger>
                    </Loggers>
                </Configuration>

            Log4J2 logs the progress. The following is example output for a 21.3 MB
file upload.
                Transfer initiated...
                |                    | 0.0%
                |====                | 21.1%
                |============        | 60.5%
                |====================| 100.0%
                Transfer complete!
        */
    }
```

Realice el seguimiento del progreso de una descarga de archivos.

```
    public void trackDownloadFile(S3TransferManager transferManager, String
bucketName,
                                  String key, String downloadedFileWithPath) {
```

```
        DownloadFileRequest downloadFileRequest = DownloadFileRequest.builder()
                .getObjectRequest(b -> b.bucket(bucketName).key(key))
                .addTransferListener(LoggingTransferListener.create())  // Add
listener.
                .destination(Paths.get(downloadedFileWithPath))
                .build();

        FileDownload downloadFile =
transferManager.downloadFile(downloadFileRequest);

        CompletedFileDownload downloadResult =
downloadFile.completionFuture().join();
        /*
            The SDK provides a LoggingTransferListener implementation of the
TransferListener interface.
            You can also implement the interface to provide your own logic.

            Configure log4J2 with settings such as the following.
                <Configuration status="WARN">
                    <Appenders>
                        <Console name="AlignedConsoleAppender" target="SYSTEM_OUT">
                            <PatternLayout pattern="%m%n"/>
                        </Console>
                    </Appenders>

                    <Loggers>
                        <logger
name="software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener"
level="INFO" additivity="false">
                            <AppenderRef ref="AlignedConsoleAppender"/>
                        </logger>
                    </Loggers>
                </Configuration>

            Log4J2 logs the progress. The following is example output for a 21.3 MB
file download.
                Transfer initiated...
                |=======             | 39.4%
                |===============     | 78.8%
                |====================| 100.0%
                Transfer complete!
        */
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - GetObject
  - PutObject

Cargar directorio en un bucket

El siguiente ejemplo de código muestra cómo cargar de forma recursiva un directorio local en un bucket de Amazon Simple Storage Service (Amazon S3).

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Usa un S3 TransferManager para cargar un directorio local. Vea el archivo completo y pruébelo.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedDirectoryUpload;
import software.amazon.awssdk.transfer.s3.model.DirectoryUpload;
import software.amazon.awssdk.transfer.s3.model.UploadDirectoryRequest;

import java.net.URI;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Paths;
import java.util.UUID;

    public Integer uploadDirectory(S3TransferManager transferManager,
            URI sourceDirectory, String bucketName) {
        DirectoryUpload directoryUpload =
 transferManager.uploadDirectory(UploadDirectoryRequest.builder()
```

```
                .source(Paths.get(sourceDirectory))
                .bucket(bucketName)
                .build());

        CompletedDirectoryUpload completedDirectoryUpload =
directoryUpload.completionFuture().join();
        completedDirectoryUpload.failedTransfers()
                .forEach(fail -> logger.warn("Object [{}] failed to transfer",
fail.toString()));
        return completedDirectoryUpload.failedTransfers().size();
    }
```

- Para obtener más información sobre la API, consulte UploadDirectoryla Referencia AWS SDK for Java 2.x de la API.

Cargar o descargar archivos grandes

En el siguiente ejemplo de código se muestra cómo cargar o descargar archivos grandes en y desde Amazon S3.

Para obtener información, consulte Carga de un objeto con carga multiparte.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Llama a funciones que transfieren archivos desde y hacia un bucket de S3 mediante el S3TransferManager.

```
    public Integer downloadObjectsToDirectory(S3TransferManager transferManager,
            URI destinationPathURI, String bucketName) {
        DirectoryDownload directoryDownload =
transferManager.downloadDirectory(DownloadDirectoryRequest.builder()
                .destination(Paths.get(destinationPathURI))
                .bucket(bucketName)
                .build());
```

```
        CompletedDirectoryDownload completedDirectoryDownload =
directoryDownload.completionFuture().join();

        completedDirectoryDownload.failedTransfers()
                .forEach(fail -> logger.warn("Object [{}] failed to transfer",
fail.toString()));
        return completedDirectoryDownload.failedTransfers().size();
    }
```

Cargar un directorio local completo.

```
    public Integer uploadDirectory(S3TransferManager transferManager,
            URI sourceDirectory, String bucketName) {
        DirectoryUpload directoryUpload =
transferManager.uploadDirectory(UploadDirectoryRequest.builder()
                .source(Paths.get(sourceDirectory))
                .bucket(bucketName)
                .build());

        CompletedDirectoryUpload completedDirectoryUpload =
directoryUpload.completionFuture().join();
        completedDirectoryUpload.failedTransfers()
                .forEach(fail -> logger.warn("Object [{}] failed to transfer",
fail.toString()));
        return completedDirectoryUpload.failedTransfers().size();
    }
```

Cargar un solo archivo.

```
    public String uploadFile(S3TransferManager transferManager, String bucketName,
                             String key, URI filePathURI) {
        UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
            .putObjectRequest(b -> b.bucket(bucketName).key(key))
            .source(Paths.get(filePathURI))
            .build();

        FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);

        CompletedFileUpload uploadResult = fileUpload.completionFuture().join();
        return uploadResult.response().eTag();
    }
```

En los ejemplos de código se utilizan las siguientes importaciones.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CompletedMultipartUpload;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;
import software.amazon.awssdk.services.s3.model.UploadPartRequest;
import software.amazon.awssdk.services.s3.model.UploadPartResponse;
import software.amazon.awssdk.services.s3.waiters.S3Waiter;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.FileUpload;
import software.amazon.awssdk.transfer.s3.model.UploadFileRequest;

import java.io.IOException;
import java.io.RandomAccessFile;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.ByteBuffer;
import java.nio.file.Paths;
import java.util.ArrayList;
import java.util.List;
import java.util.Objects;
import java.util.UUID;
import java.util.concurrent.CompletableFuture;
```

Utilice el Gestor de transferencias de Amazon S3 situado sobre el cliente S3 basado en CRT de AWS para realizar de forma transparente una carga multiparte cuando el tamaño del contenido supere un umbral. El umbral de tamaño predeterminado es 8 MB.

```
    /**
     * Uploads a file to an Amazon S3 bucket using the S3TransferManager.
     *
```

```
     * @param filePath the file path of the file to be uploaded
     */
    public void multipartUploadWithTransferManager(String filePath) {
        S3TransferManager transferManager = S3TransferManager.create();
        UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
            .putObjectRequest(b -> b
                .bucket(bucketName)
                .key(key))
            .source(Paths.get(filePath))
            .build();
        FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);
        fileUpload.completionFuture().join();
        transferManager.close();
    }
```

Utilice la API S3Client para realizar una carga multiparte.

```
    /**
     * Performs a multipart upload to Amazon S3 using the provided S3 client.
     *
     * @param filePath the path to the file to be uploaded
     */
    public void multipartUploadWithS3Client(String filePath) {

        // Initiate the multipart upload.
        CreateMultipartUploadResponse createMultipartUploadResponse =
s3Client.createMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key));
        String uploadId = createMultipartUploadResponse.uploadId();

        // Upload the parts of the file.
        int partNumber = 1;
        List<CompletedPart> completedParts = new ArrayList<>();
        ByteBuffer bb = ByteBuffer.allocate(1024 * 1024 * 5); // 5 MB byte buffer

        try (RandomAccessFile file = new RandomAccessFile(filePath, "r")) {
            long fileSize = file.length();
            long position = 0;
            while (position < fileSize) {
                file.seek(position);
                long read = file.getChannel().read(bb);
```

```
                bb.flip(); // Swap position and limit before reading from the
buffer.
                UploadPartRequest uploadPartRequest = UploadPartRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .partNumber(partNumber)
                    .build();

                UploadPartResponse partResponse = s3Client.uploadPart(
                    uploadPartRequest,
                    RequestBody.fromByteBuffer(bb));

                CompletedPart part = CompletedPart.builder()
                    .partNumber(partNumber)
                    .eTag(partResponse.eTag())
                    .build();
                completedParts.add(part);

                bb.clear();
                position += read;
                partNumber++;
            }
        } catch (IOException e) {
            logger.error(e.getMessage());
        }

        // Complete the multipart upload.
        s3Client.completeMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key)
            .uploadId(uploadId)

.multipartUpload(CompletedMultipartUpload.builder().parts(completedParts).build()));
    }
```

Utilice la AsyncClient API de S3 con soporte multiparte habilitado para realizar una carga multiparte.

```
    /**
```

```
     * Uploads a file to an S3 bucket using the S3AsyncClient and enabling multipart
support.
     *
     * @param filePath the local file path of the file to be uploaded
     */
    public void multipartUploadWithS3AsyncClient(String filePath) {
        // Enable multipart support.
        S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
            .multipartEnabled(true)
            .build();

        CompletableFuture<PutObjectResponse> response = s3AsyncClient.putObject(b ->
b
                .bucket(bucketName)
                .key(key),
            Paths.get(filePath));

        response.join();
        logger.info("File uploaded in multiple 8 MiB parts using S3AsyncClient.");
    }
```

Carga de un flujo de tamaño desconocido

En los siguientes ejemplos de código, se muestra cómo cargar un flujo de tamaño desconocido en un objeto de Amazon S3.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Utilice el Cliente S3 basado en CRT de AWS.

```
import com.example.s3.util.AsyncExampleUtils;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.async.AsyncRequestBody;
```

```
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;

import java.io.ByteArrayInputStream;
import java.io.InputStream;
import java.util.UUID;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutorService;
import java.util.concurrent.Executors;

public class PutObjectFromStreamAsync {
    private static final Logger logger =
 LoggerFactory.getLogger(PutObjectFromStreamAsync.class);

    public static void main(String[] args) {
        String bucketName = "amzn-s3-demo-bucket-" + UUID.randomUUID(); // Change
 bucket name.
        String key = UUID.randomUUID().toString();

        AsyncExampleUtils.createBucket(bucketName);
        try {
            PutObjectFromStreamAsync example = new PutObjectFromStreamAsync();
            S3AsyncClient s3AsyncClientCrt = S3AsyncClient.crtCreate();
            PutObjectResponse putObjectResponse =
 example.putObjectFromStreamCrt(s3AsyncClientCrt, bucketName, key);
            logger.info("Object {} etag: {}", key, putObjectResponse.eTag());
            logger.info("Object {} uploaded to bucket {}.", key, bucketName);
        } catch (SdkException e) {
            logger.error(e.getMessage(), e);
        } finally {
            AsyncExampleUtils.deleteObject(bucketName, key);
            AsyncExampleUtils.deleteBucket(bucketName);
        }
    }

    /**
     * @param s33CrtAsyncClient - To upload content from a stream of unknown size,
 use can the AWS CRT-based S3 client.
     * @param bucketName - The name of the bucket.
     * @param key - The name of the object.
     * @return software.amazon.awssdk.services.s3.model.PutObjectResponse - Returns
 metadata pertaining to the put object operation.
     */
```

```
    public PutObjectResponse putObjectFromStreamCrt(S3AsyncClient s33CrtAsyncClient,
 String bucketName, String key) {

        // AsyncExampleUtils.randomString() returns a random string up to 100
 characters.
        String randomString = AsyncExampleUtils.randomString();
        logger.info("random string to upload: {}: length={}", randomString,
 randomString.length());
        InputStream inputStream = new ByteArrayInputStream(randomString.getBytes());

        // Executor required to handle reading from the InputStream on a separate
 thread so the main upload is not blocked.
        ExecutorService executor = Executors.newSingleThreadExecutor();
        // Specify `null` for the content length when you don't know the content
 length.
        AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
 executor);

        CompletableFuture<PutObjectResponse> responseFuture =
                s33CrtAsyncClient.putObject(r -> r.bucket(bucketName).key(key),
 body);

        PutObjectResponse response = responseFuture.join(); // Wait for the
 response.
        logger.info("Object {} uploaded to bucket {}.", key, bucketName);
        executor.shutdown();
        return response;
    }
}
```

Utilice el cliente de S3 asincrónico estándar con carga multiparte habilitada.

```
import com.example.s3.util.AsyncExampleUtils;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.async.AsyncRequestBody;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;

import java.io.ByteArrayInputStream;
```

```
import java.io.InputStream;
import java.util.UUID;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutorService;
import java.util.concurrent.Executors;

public class PutObjectFromStreamAsyncMp {
    private static final Logger logger =
 LoggerFactory.getLogger(PutObjectFromStreamAsyncMp.class);

    public static void main(String[] args) {
        String bucketName = "amzn-s3-demo-bucket-" + UUID.randomUUID(); // Change
 bucket name.
        String key = UUID.randomUUID().toString();

        AsyncExampleUtils.createBucket(bucketName);
        try {
            PutObjectFromStreamAsyncMp example = new PutObjectFromStreamAsyncMp();
            S3AsyncClient s3AsyncClientMp =
 S3AsyncClient.builder().multipartEnabled(true).build();
            PutObjectResponse putObjectResponse =
 example.putObjectFromStreamMp(s3AsyncClientMp, bucketName, key);
            logger.info("Object {} etag: {}", key, putObjectResponse.eTag());
            logger.info("Object {} uploaded to bucket {}.", key, bucketName);
        } catch (SdkException e) {
            logger.error(e.getMessage(), e);
        } finally {
            AsyncExampleUtils.deleteObject(bucketName, key);
            AsyncExampleUtils.deleteBucket(bucketName);
        }
    }

    /**
     * @param s3AsyncClientMp - To upload content from a stream of unknown size, use
 can the S3 asynchronous client with multipart enabled.
     * @param bucketName - The name of the bucket.
     * @param key - The name of the object.
     * @return software.amazon.awssdk.services.s3.model.PutObjectResponse - Returns
 metadata pertaining to the put object operation.
     */
    public PutObjectResponse putObjectFromStreamMp(S3AsyncClient s3AsyncClientMp,
 String bucketName, String key) {
```

```
        // AsyncExampleUtils.randomString() returns a random string up to 100
 characters.
        String randomString = AsyncExampleUtils.randomString();
        logger.info("random string to upload: {}: length={}", randomString,
 randomString.length());
        InputStream inputStream = new ByteArrayInputStream(randomString.getBytes());

        // Executor required to handle reading from the InputStream on a separate
 thread so the main upload is not blocked.
        ExecutorService executor = Executors.newSingleThreadExecutor();
        // Specify `null` for the content length when you don't know the content
 length.
        AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
 executor);

        CompletableFuture<PutObjectResponse> responseFuture =
                s3AsyncClientMp.putObject(r -> r.bucket(bucketName).key(key), body);

        PutObjectResponse response = responseFuture.join(); // Wait for the
 response.
        logger.info("Object {} uploaded to bucket {}.", key, bucketName);
        executor.shutdown();
        return response;
    }
}
```

Utilice el Gestor de transferencias de Amazon S3.

```
import com.example.s3.util.AsyncExampleUtils;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.async.AsyncRequestBody;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedUpload;
import software.amazon.awssdk.transfer.s3.model.Upload;

import java.io.ByteArrayInputStream;
import java.io.InputStream;
import java.util.UUID;
import java.util.concurrent.ExecutorService;
```

```
import java.util.concurrent.Executors;

public class UploadStream {
    private static final Logger logger =
 LoggerFactory.getLogger(UploadStream.class);

    public static void main(String[] args) {
        String bucketName = "amzn-s3-demo-bucket" + UUID.randomUUID();
        String key = UUID.randomUUID().toString();

        AsyncExampleUtils.createBucket(bucketName);
        try {
            UploadStream example = new UploadStream();
            CompletedUpload completedUpload =
 example.uploadStream(S3TransferManager.create(), bucketName, key);
            logger.info("Object {} etag: {}", key,
 completedUpload.response().eTag());
            logger.info("Object {} uploaded to bucket {}.", key, bucketName);
        } catch (SdkException e) {
            logger.error(e.getMessage(), e);
        } finally {
            AsyncExampleUtils.deleteObject(bucketName, key);
            AsyncExampleUtils.deleteBucket(bucketName);
        }
    }

    /**
     * @param transferManager - To upload content from a stream of unknown size, you
 can use the S3TransferManager based on the AWS CRT-based S3 client.
     * @param bucketName - The name of the bucket.
     * @param key - The name of the object.
     * @return - software.amazon.awssdk.transfer.s3.model.CompletedUpload - The
 result of the completed upload.
     */
    public CompletedUpload uploadStream(S3TransferManager transferManager, String
 bucketName, String key) {

        // AsyncExampleUtils.randomString() returns a random string up to 100
 characters.
        String randomString = AsyncExampleUtils.randomString();
        logger.info("random string to upload: {}: length={}", randomString,
 randomString.length());
        InputStream inputStream = new ByteArrayInputStream(randomString.getBytes());
```

```
        // Executor required to handle reading from the InputStream on a separate
 thread so the main upload is not blocked.
        ExecutorService executor = Executors.newSingleThreadExecutor();
        // Specify `null` for the content length when you don't know the content
 length.
        AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
 executor);

        Upload upload = transferManager.upload(builder -> builder
                .requestBody(body)
                .putObjectRequest(req -> req.bucket(bucketName).key(key))
                .build());

        CompletedUpload completedUpload = upload.completionFuture().join();
        executor.shutdown();
        return completedUpload;
    }
}
```

Usar sumas de comprobación

En el siguiente ejemplo de código, se muestra cómo utilizar sumas de comprobación para trabajar con un objeto de Amazon S3.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

En los ejemplos de código se utiliza un subconjunto de las siguientes importaciones.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.S3Client;
```

```
import software.amazon.awssdk.services.s3.model.ChecksumAlgorithm;
import software.amazon.awssdk.services.s3.model.ChecksumMode;
import software.amazon.awssdk.services.s3.model.CompletedMultipartUpload;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.GetObjectResponse;
import software.amazon.awssdk.services.s3.model.UploadPartRequest;
import software.amazon.awssdk.services.s3.model.UploadPartResponse;
import software.amazon.awssdk.services.s3.waiters.S3Waiter;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.FileUpload;
import software.amazon.awssdk.transfer.s3.model.UploadFileRequest;

import java.io.FileInputStream;
import java.io.IOException;
import java.io.RandomAccessFile;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.ByteBuffer;
import java.nio.file.Paths;
import java.security.DigestInputStream;
import java.security.MessageDigest;
import java.security.NoSuchAlgorithmException;
import java.util.ArrayList;
import java.util.Base64;
import java.util.List;
import java.util.Objects;
import java.util.UUID;
```

Especifique un algoritmo de suma de comprobación para el método `putObject` al crear la `PutObjectRequest`.

```
    public void putObjectWithChecksum() {
        s3Client.putObject(b -> b
                .bucket(bucketName)
                .key(key)
                .checksumAlgorithm(ChecksumAlgorithm.CRC32),
            RequestBody.fromString("This is a test"));
    }
```

Compruebe la suma de comprobación del `getObject` método cuando cree el GetObjectRequest.

```
public GetObjectResponse getObjectWithChecksum() {
    return s3Client.getObject(b -> b
            .bucket(bucketName)
            .key(key)
            .checksumMode(ChecksumMode.ENABLED))
        .response();
}
```

Calcule previamente una suma de comprobación para el método `putObject` cuando cree la `PutObjectRequest`.

```
public void putObjectWithPrecalculatedChecksum(String filePath) {
    String checksum = calculateChecksum(filePath, "SHA-256");

    s3Client.putObject((b -> b
            .bucket(bucketName)
            .key(key)
            .checksumSHA256(checksum)),
        RequestBody.fromFile(Paths.get(filePath)));
}
```

Utilice el Gestor de transferencias de Amazon S3 situado sobre el cliente S3 basado en CRT de AWS para realizar de forma transparente una carga multiparte cuando el tamaño del contenido supere un umbral. El umbral de tamaño predeterminado es 8 MB.

Puede especificar un algoritmo de suma de comprobación para que lo utilice el SDK. De forma predeterminada, el SDK usa el CRC32 algoritmo.

```
public void multipartUploadWithChecksumTm(String filePath) {
    S3TransferManager transferManager = S3TransferManager.create();
    UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
        .putObjectRequest(b -> b
            .bucket(bucketName)
            .key(key)
            .checksumAlgorithm(ChecksumAlgorithm.SHA1))
        .source(Paths.get(filePath))
        .build();
    FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);
    fileUpload.completionFuture().join();
    transferManager.close();
```

```
    }
```

Utilice la API S3Client o (AsyncClient API S3) para realizar una carga multiparte. Si especifica una suma de comprobación adicional, debe especificar el algoritmo que se utilizará al iniciar la carga. También debe especificar el algoritmo para cada solicitud de parte y proporcionar la suma de comprobación calculada para cada parte una vez cargada.

```
    public void multipartUploadWithChecksumS3Client(String filePath) {
        ChecksumAlgorithm algorithm = ChecksumAlgorithm.CRC32;

        // Initiate the multipart upload.
        CreateMultipartUploadResponse createMultipartUploadResponse =
s3Client.createMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key)
            .checksumAlgorithm(algorithm)); // Checksum specified on initiation.
        String uploadId = createMultipartUploadResponse.uploadId();

        // Upload the parts of the file.
        int partNumber = 1;
        List<CompletedPart> completedParts = new ArrayList<>();
        ByteBuffer bb = ByteBuffer.allocate(1024 * 1024 * 5); // 5 MB byte buffer

        try (RandomAccessFile file = new RandomAccessFile(filePath, "r")) {
            long fileSize = file.length();
            long position = 0;
            while (position < fileSize) {
                file.seek(position);
                long read = file.getChannel().read(bb);

                bb.flip(); // Swap position and limit before reading from the
buffer.
                UploadPartRequest uploadPartRequest = UploadPartRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .checksumAlgorithm(algorithm) // Checksum specified on each
part.
                    .partNumber(partNumber)
                    .build();

                UploadPartResponse partResponse = s3Client.uploadPart(
```

```
                    uploadPartRequest,
                    RequestBody.fromByteBuffer(bb));

                CompletedPart part = CompletedPart.builder()
                    .partNumber(partNumber)
                    .checksumCRC32(partResponse.checksumCRC32()) // Provide the
calculated checksum.
                    .eTag(partResponse.eTag())
                    .build();
                completedParts.add(part);

                bb.clear();
                position += read;
                partNumber++;
            }
        } catch (IOException e) {
            System.err.println(e.getMessage());
        }

        // Complete the multipart upload.
        s3Client.completeMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key)
            .uploadId(uploadId)

.multipartUpload(CompletedMultipartUpload.builder().parts(completedParts).build()));
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CompleteMultipartUpload
  - CreateMultipartUpload
  - UploadPart

Ejemplos de tecnología sin servidor

Invocación de una función de Lambda desde un desencadenador de Amazon S3

En el siguiente ejemplo de código se muestra cómo implementar una función de Lambda que recibe un evento activado al cargar un objeto en un bucket de S3. La función recupera el nombre del bucket

de S3 y la clave del objeto del parámetro de evento y llama a la API de Amazon S3 para recuperar y registrar el tipo de contenido del objeto.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos sin servidor.

Uso de un evento de S3 con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package example;

import software.amazon.awssdk.services.s3.model.HeadObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadObjectResponse;
import software.amazon.awssdk.services.s3.S3Client;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.S3Event;
import
 com.amazonaws.services.lambda.runtime.events.models.s3.S3EventNotification.S3EventNotificat

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

public class Handler implements RequestHandler<S3Event, String> {
    private static final Logger logger = LoggerFactory.getLogger(Handler.class);
    @Override
    public String handleRequest(S3Event s3event, Context context) {
        try {
          S3EventNotificationRecord record = s3event.getRecords().get(0);
          String srcBucket = record.getS3().getBucket().getName();
          String srcKey = record.getS3().getObject().getUrlDecodedKey();

          S3Client s3Client = S3Client.builder().build();
          HeadObjectResponse headObject = getHeadObject(s3Client, srcBucket,
 srcKey);
```

```
          logger.info("Successfully retrieved " + srcBucket + "/" + srcKey + " of
 type " + headObject.contentType());

          return "Ok";
        } catch (Exception e) {
          throw new RuntimeException(e);
        }
    }

    private HeadObjectResponse getHeadObject(S3Client s3Client, String bucket,
 String key) {
        HeadObjectRequest headObjectRequest = HeadObjectRequest.builder()
                .bucket(bucket)
                .key(key)
                .build();
        return s3Client.headObject(headObjectRequest);
    }
}
```

Ejemplos de Amazon S3 Control con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes mediante el uso AWS SDK for Java 2.x de Amazon S3 Control.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hello Amazon S3 Control

El siguiente ejemplo de código muestra cómo empezar a utilizar Amazon S3 Control.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.core.retry.RetryMode;
import software.amazon.awssdk.core.retry.RetryPolicy;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3control.S3ControlAsyncClient;
import software.amazon.awssdk.services.s3control.model.JobListDescriptor;
import software.amazon.awssdk.services.s3control.model.JobStatus;
import software.amazon.awssdk.services.s3control.model.ListJobsRequest;
import software.amazon.awssdk.services.s3control.paginators.ListJobsPublisher;
import java.time.Duration;
import java.util.List;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;

/**
 * Before running this example:
 * <p/>
 * The SDK must be able to authenticate AWS requests on your behalf. If you have not
 configured
 * authentication for SDKs and tools,see https://docs.aws.amazon.com/sdkref/latest/
guide/access.html in the AWS SDKs and Tools Reference Guide.
 * <p/>
 * You must have a runtime environment configured with the Java SDK.
```

```
 * See https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/setup.html in
 the Developer Guide if this is not set up.
 */
public class HelloS3Batch {
    private static S3ControlAsyncClient asyncClient;

    public static void main(String[] args) {
        S3BatchActions actions = new S3BatchActions();
        String accountId = actions.getAccountId();
        try {
            listBatchJobsAsync(accountId)
                .exceptionally(ex -> {
                    System.err.println("List batch jobs failed: " +
 ex.getMessage());
                    return null;
                })
                .join();

        } catch (CompletionException ex) {
            System.err.println("Failed to list batch jobs: " + ex.getMessage());
        }
    }

    /**
     * Retrieves the asynchronous S3 Control client instance.
     * <p>
     * This method creates and returns a singleton instance of the {@link
 S3ControlAsyncClient}. If the instance
     * has not been created yet, it will be initialized with the following
 configuration:
     * <ul>
     *   <li>Maximum concurrency: 100</li>
     *   <li>Connection timeout: 60 seconds</li>
     *   <li>Read timeout: 60 seconds</li>
     *   <li>Write timeout: 60 seconds</li>
     *   <li>API call timeout: 2 minutes</li>
     *   <li>API call attempt timeout: 90 seconds</li>
     *   <li>Retry policy: 3 retries</li>
     *   <li>Region: US_EAST_1</li>
     *   <li>Credentials provider: {@link EnvironmentVariableCredentialsProvider}</
li>
     * </ul>
     *
     * @return the asynchronous S3 Control client instance
```

```
     */
    private static S3ControlAsyncClient getAsyncClient() {
        if (asyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            asyncClient = S3ControlAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return asyncClient;
    }

    /**
     * Asynchronously lists batch jobs that have completed for the specified
account.
     *
     * @param accountId the ID of the account to list jobs for
     * @return a CompletableFuture that completes when the job listing operation is
finished
     */
    public static CompletableFuture<Void> listBatchJobsAsync(String accountId) {
        ListJobsRequest jobsRequest = ListJobsRequest.builder()
            .jobStatuses(JobStatus.COMPLETE)
            .accountId(accountId)
            .maxResults(10)
            .build();

        ListJobsPublisher publisher =
getAsyncClient().listJobsPaginator(jobsRequest);
        return publisher.subscribe(response -> {
```

```
            List<JobListDescriptor> jobs = response.jobs();
            for (JobListDescriptor job : jobs) {
                System.out.println("The job id is " + job.jobId());
                System.out.println("The job priority is " + job.priority());
            }
        }).thenAccept(response -> {
            System.out.println("Listing batch jobs completed");
        }).exceptionally(ex -> {
            System.err.println("Failed to list batch jobs: " + ex.getMessage());
            throw new RuntimeException(ex);
        });
    }
```

- Para obtener más información sobre la API, consulta ListJobsla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

El siguiente ejemplo de código muestra cómo aprender a usar las operaciones principales de Amazon S3 Control.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Conocer las operaciones principales.

```
package com.example.s3.batch;

import software.amazon.awssdk.services.s3.model.S3Exception;
import java.io.IOException;
import java.util.Map;
import java.util.Scanner;
import java.util.UUID;
```

```
import java.util.concurrent.CompletionException;

public class S3BatchScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final String STACK_NAME = "MyS3Stack";
    public static void main(String[] args) throws IOException {
        S3BatchActions actions = new S3BatchActions();
        String accountId = actions.getAccountId();
        String uuid = java.util.UUID.randomUUID().toString();
        Scanner scanner = new Scanner(System.in);

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon S3 Batch basics scenario.");
        System.out.println("""
            S3 Batch operations enables efficient and cost-effective processing of
 large-scale
            data stored in Amazon S3. It automatically scales resources to handle
 varying workloads
            without the need for manual intervention.

            One of the key features of S3 Batch is its ability to perform tagging
 operations on objects stored in
            S3 buckets. Users can leverage S3 Batch to apply, update, or remove tags
 on thousands or millions of
            objects in a single operation, streamlining the management and
 organization of their data.

            This can be particularly useful for tasks such as cost allocation,
 lifecycle management, or
            metadata-driven workflows, where consistent and accurate tagging is
 essential.
            S3 Batch's scalability and serverless nature make it an ideal solution
 for organizations with
            growing data volumes and complex data management requirements.

            This Java program walks you through Amazon S3 Batch operations.

            Let's get started...

            """);
        waitForInputToContinue(scanner);
        // Use CloudFormation to stand up the resource required for this scenario.
```

```
        System.out.println("Use CloudFormation to stand up the resource required for
 this scenario.");
        CloudFormationHelper.deployCloudFormationStack(STACK_NAME);

        Map<String, String> stackOutputs =
 CloudFormationHelper.getStackOutputs(STACK_NAME);
        String iamRoleArn = stackOutputs.get("S3BatchRoleArn");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Setup the required bucket for this scenario.");
        waitForInputToContinue(scanner);
        String bucketName = "amzn-s3-demo-bucket-" + UUID.randomUUID(); // Change
 bucket name.
        actions.createBucket(bucketName);
        String reportBucketName = "arn:aws:s3:::"+bucketName;
        String manifestLocation = "arn:aws:s3:::"+bucketName+"/job-manifest.csv";
        System.out.println("Populate the bucket with the required files.");
        String[] fileNames = {"job-manifest.csv", "object-key-1.txt", "object-
key-2.txt", "object-key-3.txt", "object-key-4.txt"};
        actions.uploadFilesToBucket(bucketName, fileNames, actions);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Create a S3 Batch Job");
        System.out.println("This job tags all objects listed in the manifest file
 with tags");
        waitForInputToContinue(scanner);
        String jobId ;
        try {
            jobId = actions.createS3JobAsync(accountId, iamRoleArn,
 manifestLocation, reportBucketName, uuid).join();
            System.out.println("The Job id is " + jobId);

        } catch (S3Exception e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }

        waitForInputToContinue(scanner);
```

```
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Update an existing S3 Batch Operations job's
priority");
        System.out.println("""
             In this step, we modify the job priority value. The higher the number,
the higher the priority.
             So, a job with a priority of `30` would have a higher priority than a
job with
             a priority of `20`. This is a common way to represent the priority of a
task
             or job, with higher numbers indicating a higher priority.

             Ensure that the job status allows for priority updates. Jobs in
certain
             states (e.g., Cancelled, Failed, or Completed) cannot have their
priorities
             updated. Only jobs in the Active or Suspended state typically allow
priority
             updates.
             """);

        try {
            actions.updateJobPriorityAsync(jobId, accountId)
                .exceptionally(ex -> {
                    System.err.println("Update job priority failed: " +
ex.getMessage());
                    return null;
                })
                .join();
        } catch (CompletionException ex) {
            System.err.println("Failed to update job priority: " + ex.getMessage());
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Cancel the S3 Batch job");
        System.out.print("Do you want to cancel the Batch job? (y/n): ");
        String cancelAns = scanner.nextLine();
        if (cancelAns != null && cancelAns.trim().equalsIgnoreCase("y")) {
            try {
                actions.cancelJobAsync(jobId, accountId)
```

```
                .exceptionally(ex -> {
                    System.err.println("Cancel job failed: " + ex.getMessage());
                    return null;
                })
                .join();
        } catch (CompletionException ex) {
            System.err.println("Failed to cancel job: " + ex.getMessage());
        }
    } else {
        System.out.println("Job " +jobId +" was not canceled.");
    }
    System.out.println(DASHES);

    System.out.println(DASHES);
    System.out.println("4. Describe the job that was just created");
    waitForInputToContinue(scanner);
    try {
        actions.describeJobAsync(jobId, accountId)
            .exceptionally(ex -> {
                System.err.println("Describe job failed: " + ex.getMessage());
                return null;
            })
            .join();
    } catch (CompletionException ex) {
        System.err.println("Failed to describe job: " + ex.getMessage());
    }
    System.out.println(DASHES);

    System.out.println(DASHES);
    System.out.println("5. Describe the tags associated with the job");
    waitForInputToContinue(scanner);
    try {
        actions.getJobTagsAsync(jobId, accountId)
            .exceptionally(ex -> {
                System.err.println("Get job tags failed: " + ex.getMessage());
                return null;
            })
            .join();
    } catch (CompletionException ex) {
        System.err.println("Failed to get job tags: " + ex.getMessage());
    }
    System.out.println(DASHES);

    System.out.println(DASHES);
```

```
        System.out.println("6. Update Batch Job Tags");
        waitForInputToContinue(scanner);
        try {
            actions.putJobTaggingAsync(jobId, accountId)
                .exceptionally(ex -> {
                    System.err.println("Put job tagging failed: " +
ex.getMessage());
                    return null;
                })
                .join();
        } catch (CompletionException ex) {
            System.err.println("Failed to put job tagging: " + ex.getMessage());
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Delete the Amazon S3 Batch job tagging.");
        System.out.print("Do you want to delete Batch job tagging? (y/n)");
        String delAns = scanner.nextLine();
        if (delAns != null && delAns.trim().equalsIgnoreCase("y")) {
            try {
                actions.deleteBatchJobTagsAsync(jobId, accountId)
                    .exceptionally(ex -> {
                        System.err.println("Delete batch job tags failed: " +
ex.getMessage());
                        return null;
                    })
                    .join();
            } catch (CompletionException ex) {
                System.err.println("Failed to delete batch job tags: " +
ex.getMessage());
            }
        } else {
            System.out.println("Tagging was not deleted.");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.print("Do you want to delete the AWS resources used in this
scenario? (y/n)");
        String delResAns = scanner.nextLine();
        if (delResAns != null && delResAns.trim().equalsIgnoreCase("y")) {
            actions.deleteFilesFromBucket(bucketName, fileNames, actions);
            actions.deleteBucketFolderAsync(bucketName);
```

```
            actions.deleteBucket(bucketName)
                .thenRun(() -> System.out.println("Bucket deletion completed"))
                .exceptionally(ex -> {
                    System.err.println("Error occurred: " + ex.getMessage());
                    return null;
                });
            CloudFormationHelper.destroyCloudFormationStack(STACK_NAME);
        } else {
            System.out.println("The AWS resources were not deleted.");
        }
        System.out.println("The Amazon S3 Batch scenario has successfully
 completed.");
        System.out.println(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println();
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println();
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }


}
```

Crear una clase de acción que contenga operaciones.

```
public class S3BatchActions {

    private static S3ControlAsyncClient asyncClient;

    private static S3AsyncClient s3AsyncClient ;
```

```
    /**
     * Retrieves the asynchronous S3 Control client instance.
     * <p>
     * This method creates and returns a singleton instance of the {@link
 S3ControlAsyncClient}. If the instance
     * has not been created yet, it will be initialized with the following
 configuration:
     * <ul>
     *   <li>Maximum concurrency: 100</li>
     *   <li>Connection timeout: 60 seconds</li>
     *   <li>Read timeout: 60 seconds</li>
     *   <li>Write timeout: 60 seconds</li>
     *   <li>API call timeout: 2 minutes</li>
     *   <li>API call attempt timeout: 90 seconds</li>
     *   <li>Retry policy: 3 retries</li>
     *   <li>Region: US_EAST_1</li>
     *   <li>Credentials provider: {@link EnvironmentVariableCredentialsProvider}</
li>
     * </ul>
     *
     * @return the asynchronous S3 Control client instance
     */
    private static S3ControlAsyncClient getAsyncClient() {
        if (asyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryPolicy(RetryPolicy.builder()
                    .numRetries(3)
                    .build())
                .build();

            asyncClient = S3ControlAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
```

```
                .build();
        }
        return asyncClient;
    }

    private static S3AsyncClient getS3AsyncClient() {
        if (asyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            s3AsyncClient = S3AsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return s3AsyncClient;
    }


    /**
     * Cancels a job asynchronously.
     *
     * @param jobId The ID of the job to be canceled.
     * @param accountId The ID of the account associated with the job.
     * @return A {@link CompletableFuture} that completes when the job status has
been updated to "CANCELLED".
     *         If an error occurs during the update, the returned future will
complete exceptionally.
     */
    public CompletableFuture<Void> cancelJobAsync(String jobId, String accountId) {
        UpdateJobStatusRequest updateJobStatusRequest =
UpdateJobStatusRequest.builder()
```

```
            .accountId(accountId)
            .jobId(jobId)
            .requestedJobStatus(String.valueOf(JobStatus.CANCELLED))
            .build();

        return asyncClient.updateJobStatus(updateJobStatusRequest)
            .thenAccept(updateJobStatusResponse -> {
                System.out.println("Job status updated to: " +
updateJobStatusResponse.status());
            })
            .exceptionally(ex -> {
                System.err.println("Failed to cancel job: " + ex.getMessage());
                throw new RuntimeException(ex); // Propagate the exception
            });
    }

    /**
     * Updates the priority of a job asynchronously.
     *
     * @param jobId     the ID of the job to update
     * @param accountId the ID of the account associated with the job
     * @return a {@link CompletableFuture} that represents the asynchronous
operation, which completes when the job priority has been updated or an error has
occurred
     */
    public CompletableFuture<Void> updateJobPriorityAsync(String jobId, String
accountId) {
        UpdateJobPriorityRequest priorityRequest =
UpdateJobPriorityRequest.builder()
            .accountId(accountId)
            .jobId(jobId)
            .priority(60)
            .build();

        CompletableFuture<Void> future = new CompletableFuture<>();
        getAsyncClient().updateJobPriority(priorityRequest)
            .thenAccept(response -> {
                System.out.println("The job priority was updated");
                future.complete(null); // Complete the CompletableFuture on
successful execution
            })
            .exceptionally(ex -> {
                System.err.println("Failed to update job priority: " +
ex.getMessage());
```

```
                future.completeExceptionally(ex); // Complete the CompletableFuture
exceptionally on error
                return null; // Return null to handle the exception
            });

        return future;
    }

    /**
     * Asynchronously retrieves the tags associated with a specific job in an AWS
account.
     *
     * @param jobId     the ID of the job for which to retrieve the tags
     * @param accountId the ID of the AWS account associated with the job
     * @return a {@link CompletableFuture} that completes when the job tags have
been retrieved, or with an exception if the operation fails
     * @throws RuntimeException if an error occurs while retrieving the job tags
     */
    public CompletableFuture<Void> getJobTagsAsync(String jobId, String accountId) {
        GetJobTaggingRequest request = GetJobTaggingRequest.builder()
            .jobId(jobId)
            .accountId(accountId)
            .build();

        return asyncClient.getJobTagging(request)
            .thenAccept(response -> {
                List<S3Tag> tags = response.tags();
                if (tags.isEmpty()) {
                    System.out.println("No tags found for job ID: " + jobId);
                } else {
                    for (S3Tag tag : tags) {
                        System.out.println("Tag key is: " + tag.key());
                        System.out.println("Tag value is: " + tag.value());
                    }
                }
            })
            .exceptionally(ex -> {
                System.err.println("Failed to get job tags: " + ex.getMessage());
                throw new RuntimeException(ex); // Propagate the exception
            });
    }

    /**
     * Asynchronously deletes the tags associated with a specific batch job.
```

```
    *
    * @param jobId     The ID of the batch job whose tags should be deleted.
    * @param accountId The ID of the account associated with the batch job.
    * @return A CompletableFuture that completes when the job tags have been
successfully deleted, or an exception is thrown if the deletion fails.
    */
   public CompletableFuture<Void> deleteBatchJobTagsAsync(String jobId, String
accountId) {
       DeleteJobTaggingRequest jobTaggingRequest =
DeleteJobTaggingRequest.builder()
           .accountId(accountId)
           .jobId(jobId)
           .build();

       return asyncClient.deleteJobTagging(jobTaggingRequest)
           .thenAccept(response -> {
               System.out.println("You have successfully deleted " + jobId + "
tagging.");
           })
           .exceptionally(ex -> {
               System.err.println("Failed to delete job tags: " + ex.getMessage());
               throw new RuntimeException(ex);
           });
   }

   /**
    * Asynchronously describes the specified job.
    *
    * @param jobId     the ID of the job to describe
    * @param accountId the ID of the AWS account associated with the job
    * @return a {@link CompletableFuture} that completes when the job description
is available
    * @throws RuntimeException if an error occurs while describing the job
    */
   public CompletableFuture<Void> describeJobAsync(String jobId, String accountId)
{
       DescribeJobRequest jobRequest = DescribeJobRequest.builder()
           .jobId(jobId)
           .accountId(accountId)
           .build();

       return getAsyncClient().describeJob(jobRequest)
           .thenAccept(response -> {
               System.out.println("Job ID: " + response.job().jobId());
```

```
                System.out.println("Description: " + response.job().description());
                System.out.println("Status: " + response.job().statusAsString());
                System.out.println("Role ARN: " + response.job().roleArn());
                System.out.println("Priority: " + response.job().priority());
                System.out.println("Progress Summary: " +
response.job().progressSummary());

                // Print out details about the job manifest.
                JobManifest manifest = response.job().manifest();
                System.out.println("Manifest Location: " +
manifest.location().objectArn());
                System.out.println("Manifest ETag: " + manifest.location().eTag());

                // Print out details about the job operation.
                JobOperation operation = response.job().operation();
                if (operation.s3PutObjectTagging() != null) {
                    System.out.println("Operation: S3 Put Object Tagging");
                    System.out.println("Tag Set: " +
operation.s3PutObjectTagging().tagSet());
                }

                // Print out details about the job report.
                JobReport report = response.job().report();
                System.out.println("Report Bucket: " + report.bucket());
                System.out.println("Report Prefix: " + report.prefix());
                System.out.println("Report Format: " + report.format());
                System.out.println("Report Enabled: " + report.enabled());
                System.out.println("Report Scope: " + report.reportScopeAsString());
            })
            .exceptionally(ex -> {
                System.err.println("Failed to describe job: " + ex.getMessage());
                throw new RuntimeException(ex);
            });
    }

    /**
     * Creates an asynchronous S3 job using the AWS Java SDK.
     *
     * @param accountId         the AWS account ID associated with the job
     * @param iamRoleArn        the ARN of the IAM role to be used for the job
     * @param manifestLocation  the location of the job manifest file in S3
     * @param reportBucketName  the name of the S3 bucket to store the job report
     * @param uuid              a unique identifier for the job
```

```
    * @return a CompletableFuture that represents the asynchronous creation of the
 S3 job.
    *         The CompletableFuture will return the job ID if the job is created
 successfully,
    *         or throw an exception if there is an error.
    */
   public CompletableFuture<String> createS3JobAsync(String accountId, String
 iamRoleArn,
                                                      String manifestLocation,
 String reportBucketName, String uuid) {

        String[] bucketName = new String[]{""};
        String[] parts = reportBucketName.split(":::");
        if (parts.length > 1) {
            bucketName[0] = parts[1];
        } else {
            System.out.println("The input string does not contain the expected
 format.");
        }

        return CompletableFuture.supplyAsync(() -> getETag(bucketName[0], "job-
manifest.csv"))
            .thenCompose(eTag -> {
                  ArrayList<S3Tag> tagSet = new ArrayList<>();
                S3Tag s3Tag = S3Tag.builder()
                    .key("keyOne")
                    .value("ValueOne")
                    .build();
                S3Tag s3Tag2 = S3Tag.builder()
                    .key("keyTwo")
                    .value("ValueTwo")
                    .build();
                tagSet.add(s3Tag);
                tagSet.add(s3Tag2);

                S3SetObjectTaggingOperation objectTaggingOperation =
 S3SetObjectTaggingOperation.builder()
                    .tagSet(tagSet)
                    .build();

                JobOperation jobOperation = JobOperation.builder()
                    .s3PutObjectTagging(objectTaggingOperation)
                    .build();
```

```
                JobManifestLocation jobManifestLocation =
JobManifestLocation.builder()
                    .objectArn(manifestLocation)
                    .eTag(eTag)
                    .build();

                JobManifestSpec manifestSpec = JobManifestSpec.builder()
                    .fieldsWithStrings("Bucket", "Key")
                    .format("S3BatchOperations_CSV_20180820")
                    .build();

                JobManifest jobManifest = JobManifest.builder()
                    .spec(manifestSpec)
                    .location(jobManifestLocation)
                    .build();

                JobReport jobReport = JobReport.builder()
                    .bucket(reportBucketName)
                    .prefix("reports")
                    .format("Report_CSV_20180820")
                    .enabled(true)
                    .reportScope("AllTasks")
                    .build();

                CreateJobRequest jobRequest = CreateJobRequest.builder()
                    .accountId(accountId)
                    .description("Job created using the AWS Java SDK")
                    .manifest(jobManifest)
                    .operation(jobOperation)
                    .report(jobReport)
                    .priority(42)
                    .roleArn(iamRoleArn)
                    .clientRequestToken(uuid)
                    .confirmationRequired(false)
                    .build();

                // Create the job asynchronously.
                 return getAsyncClient().createJob(jobRequest)
                    .thenApply(CreateJobResponse::jobId);
                 })
                 .handle((jobId, ex) -> {
                    if (ex != null) {
                    Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
```

```
                    if (cause instanceof S3ControlException) {
                        throw new CompletionException(cause);
                    } else {
                        throw new RuntimeException(cause);
                    }
                }
                return jobId;
            });
    }

    /**
     * Retrieves the ETag (Entity Tag) for an object stored in an Amazon S3 bucket.
     *
     * @param bucketName the name of the Amazon S3 bucket where the object is stored
     * @param key the key (file name) of the object in the Amazon S3 bucket
     * @return the ETag of the object
     */
    public String getETag(String bucketName, String key) {
        S3Client s3Client = S3Client.builder()
            .region(Region.US_EAST_1)
            .build();

        HeadObjectRequest headObjectRequest = HeadObjectRequest.builder()
            .bucket(bucketName)
            .key(key)
            .build();

        HeadObjectResponse headObjectResponse =
s3Client.headObject(headObjectRequest);
        return headObjectResponse.eTag();
    }

    /**
     * Asynchronously adds tags to a job in the system.
     *
     * @param jobId     the ID of the job to add tags to
     * @param accountId the account ID associated with the job
     * @return a CompletableFuture that completes when the tagging operation is
finished
     */
    public CompletableFuture<Void> putJobTaggingAsync(String jobId, String
accountId) {
        S3Tag departmentTag = S3Tag.builder()
            .key("department")
```

```
            .value("Marketing")
            .build();

        S3Tag fiscalYearTag = S3Tag.builder()
            .key("FiscalYear")
            .value("2020")
            .build();

        PutJobTaggingRequest putJobTaggingRequest = PutJobTaggingRequest.builder()
            .jobId(jobId)
            .accountId(accountId)
            .tags(departmentTag, fiscalYearTag)
            .build();

        return asyncClient.putJobTagging(putJobTaggingRequest)
            .thenRun(() -> {
                System.out.println("Additional Tags were added to job " + jobId);
            })
            .exceptionally(ex -> {
                System.err.println("Failed to add tags to job: " + ex.getMessage());
                throw new RuntimeException(ex); // Propagate the exception
            });
    }

    // Setup the S3 bucket required for this scenario.
    /**
     * Creates an Amazon S3 bucket with the specified name.
     *
     * @param bucketName the name of the S3 bucket to create
     * @throws S3Exception if there is an error creating the bucket
     */
    public void createBucket(String bucketName) {
        try {
            S3Client s3Client = S3Client.builder()
                .region(Region.US_EAST_1)
                .build();


            S3Waiter s3Waiter = s3Client.waiter();
            CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
                .bucket(bucketName)
                .build();

            s3Client.createBucket(bucketRequest);
```

```
            HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
                .bucket(bucketName)
                .build();

            // Wait until the bucket is created and print out the response.
            WaiterResponse<HeadBucketResponse> waiterResponse =
s3Waiter.waitUntilBucketExists(bucketRequestWait);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println(bucketName + " is ready");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    /**
     * Uploads a file to an Amazon S3 bucket asynchronously.
     *
     * @param bucketName the name of the S3 bucket to upload the file to
     * @param fileName the name of the file to be uploaded
     * @throws RuntimeException if an error occurs during the file upload
     */
    public void populateBucket(String bucketName, String fileName) {
        // Define the path to the directory.
        Path filePath = Paths.get("src/main/resources/batch/",
fileName).toAbsolutePath();
        PutObjectRequest putOb = PutObjectRequest.builder()
            .bucket(bucketName)
            .key(fileName)
            .build();

        CompletableFuture<PutObjectResponse> future =
getS3AsyncClient().putObject(putOb, AsyncRequestBody.fromFile(filePath));
        future.whenComplete((result, ex) -> {
            if (ex != null) {
                System.err.println("Error uploading file: " + ex.getMessage());
            } else {
                System.out.println("Successfully placed " + fileName + " into bucket
" + bucketName);
            }
        }).join();
    }
```

```
    // Update the bucketName in CSV.
    public void updateCSV(String newValue) {
        Path csvFilePath = Paths.get("src/main/resources/batch/job-
manifest.csv").toAbsolutePath();
        try {
            // Read all lines from the CSV file.
            List<String> lines = Files.readAllLines(csvFilePath);

            // Update the first value in each line.
            List<String> updatedLines = lines.stream()
                .map(line -> {
                    String[] parts = line.split(",");
                    parts[0] = newValue;
                    return String.join(",", parts);
                })
                .collect(Collectors.toList());

            // Write the updated lines back to the CSV file
            Files.write(csvFilePath, updatedLines);
            System.out.println("CSV file updated successfully.");
        } catch (Exception e) {
            e.printStackTrace();
        }
    }

    /**
     * Deletes an object from an Amazon S3 bucket asynchronously.
     *
     * @param bucketName The name of the S3 bucket where the object is stored.
     * @param objectName The name of the object to be deleted.
     * @return A {@link CompletableFuture} that completes when the object has been
 deleted,
     *         or throws a {@link RuntimeException} if an error occurs during the
 deletion.
     */
    public CompletableFuture<Void> deleteBucketObjects(String bucketName, String
 objectName) {
        ArrayList<ObjectIdentifier> toDelete = new ArrayList<>();
        toDelete.add(ObjectIdentifier.builder()
            .key(objectName)
            .build());

        DeleteObjectsRequest dor = DeleteObjectsRequest.builder()
```

```
            .bucket(bucketName)
            .delete(Delete.builder()
                .objects(toDelete).build())
            .build();

        return getS3AsyncClient().deleteObjects(dor)
            .thenAccept(result -> {
                System.out.println("The object was deleted!");
            })
            .exceptionally(ex -> {
                throw new RuntimeException("Error deleting object: " +
ex.getMessage(), ex);
            });
    }

    /**
     * Deletes a folder and all its contents asynchronously from an Amazon S3
bucket.
     *
     * @param bucketName the name of the S3 bucket containing the folder to be
deleted
     * @return a {@link CompletableFuture} that completes when the folder and its
contents have been deleted
     * @throws RuntimeException if any error occurs during the deletion process
     */
    public void deleteBucketFolderAsync(String bucketName) {
        String folderName = "reports/";
        ListObjectsV2Request request = ListObjectsV2Request.builder()
            .bucket(bucketName)
            .prefix(folderName)
            .build();

        CompletableFuture<ListObjectsV2Response> listObjectsFuture =
getS3AsyncClient().listObjectsV2(request);
        listObjectsFuture.thenCompose(response -> {
            List<CompletableFuture<DeleteObjectResponse>> deleteFutures =
response.contents().stream()
                .map(obj -> {
                    DeleteObjectRequest deleteRequest =
DeleteObjectRequest.builder()
                        .bucket(bucketName)
                        .key(obj.key())
                        .build();
                    return getS3AsyncClient().deleteObject(deleteRequest)
```

```
                        .thenApply(deleteResponse -> {
                            System.out.println("Deleted object: " + obj.key());
                            return deleteResponse;
                        });
                })
                .collect(Collectors.toList());

            return CompletableFuture.allOf(deleteFutures.toArray(new
CompletableFuture[0]))
                .thenCompose(v -> {
                    // Delete the folder.
                    DeleteObjectRequest deleteRequest =
DeleteObjectRequest.builder()
                        .bucket(bucketName)
                        .key(folderName)
                        .build();
                    return getS3AsyncClient().deleteObject(deleteRequest)
                        .thenApply(deleteResponse -> {
                            System.out.println("Deleted folder: " + folderName);
                            return deleteResponse;
                        });
                });
        }).join();
    }

    /**
     * Deletes an Amazon S3 bucket.
     *
     * @param bucketName the name of the bucket to delete
     * @return a {@link CompletableFuture} that completes when the bucket has been
deleted, or exceptionally if there is an error
     * @throws RuntimeException if there is an error deleting the bucket
     */
    public CompletableFuture<Void> deleteBucket(String bucketName) {
        S3AsyncClient s3Client = getS3AsyncClient();
        return s3Client.deleteBucket(DeleteBucketRequest.builder()
                .bucket(bucketName)
                .build())
            .thenAccept(deleteBucketResponse -> {
                System.out.println(bucketName + " was deleted");
            })
            .exceptionally(ex -> {
                // Handle the exception or rethrow it.
```

```
                throw new RuntimeException("Failed to delete bucket: " + bucketName,
ex);
            });
    }

    /**
     * Uploads a set of files to an Amazon S3 bucket.
     *
     * @param bucketName the name of the S3 bucket to upload the files to
     * @param fileNames an array of file names to be uploaded
     * @param actions an instance of {@link S3BatchActions} that provides the
implementation for the necessary S3 operations
     * @throws IOException if there's an error creating the text files or uploading
the files to the S3 bucket
     */
    public static void uploadFilesToBucket(String bucketName, String[] fileNames,
S3BatchActions actions) throws IOException {
        actions.updateCSV(bucketName);
        createTextFiles(fileNames);
        for (String fileName : fileNames) {
            actions.populateBucket(bucketName, fileName);
        }
        System.out.println("All files are placed in the S3 bucket " + bucketName);
    }

    /**
     * Deletes the specified files from the given S3 bucket.
     *
     * @param bucketName the name of the S3 bucket
     * @param fileNames an array of file names to be deleted from the bucket
     * @param actions the S3BatchActions instance to be used for the file deletion
     * @throws IOException if an I/O error occurs during the file deletion
     */
    public void deleteFilesFromBucket(String bucketName, String[] fileNames,
S3BatchActions actions) throws IOException {
        for (String fileName : fileNames) {
                    actions.deleteBucketObjects(bucketName, fileName)
                   .thenRun(() -> System.out.println("Object deletion completed"))
                   .exceptionally(ex -> {
                       System.err.println("Error occurred: " + ex.getMessage());
                       return null;
                   });
        }
```

```
        System.out.println("All files have been deleted from the bucket " +
bucketName);
    }

    public static void createTextFiles(String[] fileNames) {
        String currentDirectory = System.getProperty("user.dir");
        String directoryPath = currentDirectory + "\\src\\main\\resources\\batch";
        Path path = Paths.get(directoryPath);

        try {
            // Create the directory if it doesn't exist.
            if (Files.notExists(path)) {
                Files.createDirectories(path);
                System.out.println("Created directory: " + path.toString());
            } else {
                System.out.println("Directory already exists: " + path.toString());
            }

            for (String fileName : fileNames) {
                // Check if the file is a .txt file.
                if (fileName.endsWith(".txt")) {
                    // Define the path for the new file.
                    Path filePath = path.resolve(fileName);
                    System.out.println("Attempting to create file: " +
filePath.toString());

                    // Create and write content to the new file.
                    Files.write(filePath, "This is a test".getBytes());

                    // Verify the file was created.
                    if (Files.exists(filePath)) {
                        System.out.println("Successfully created file: " +
filePath.toString());
                    } else {
                        System.out.println("Failed to create file: " +
filePath.toString());
                    }
                }
            }

        } catch (IOException e) {
            System.err.println("An error occurred: " + e.getMessage());
            e.printStackTrace();
        }
```

```
    }

    public String getAccountId() {
        StsClient stsClient = StsClient.builder()
            .region(Region.US_EAST_1)
            .build();

        GetCallerIdentityResponse callerIdentityResponse =
 stsClient.getCallerIdentity();
        return callerIdentityResponse.account();
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateJob
  - DeleteJobTagging
  - DescribeJob
  - GetJobTagging
  - ListJobs
  - PutJobTagging
  - UpdateJobPriority
  - UpdateJobStatus

Acciones

`CreateJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Cree un trabajo de S3 asincrónico.

```
    /**
     * Creates an asynchronous S3 job using the AWS Java SDK.
     *
     * @param accountId         the AWS account ID associated with the job
     * @param iamRoleArn        the ARN of the IAM role to be used for the job
     * @param manifestLocation  the location of the job manifest file in S3
     * @param reportBucketName  the name of the S3 bucket to store the job report
     * @param uuid              a unique identifier for the job
     * @return a CompletableFuture that represents the asynchronous creation of the
 S3 job.
     *         The CompletableFuture will return the job ID if the job is created
 successfully,
     *         or throw an exception if there is an error.
     */
    public CompletableFuture<String> createS3JobAsync(String accountId, String
 iamRoleArn,
                                                       String manifestLocation,
 String reportBucketName, String uuid) {

        String[] bucketName = new String[]{""};
        String[] parts = reportBucketName.split(":::");
        if (parts.length > 1) {
            bucketName[0] = parts[1];
        } else {
            System.out.println("The input string does not contain the expected
 format.");
        }

        return CompletableFuture.supplyAsync(() -> getETag(bucketName[0], "job-
manifest.csv"))
            .thenCompose(eTag -> {
                  ArrayList<S3Tag> tagSet = new ArrayList<>();
                S3Tag s3Tag = S3Tag.builder()
                    .key("keyOne")
                    .value("ValueOne")
                    .build();
                S3Tag s3Tag2 = S3Tag.builder()
                    .key("keyTwo")
                    .value("ValueTwo")
                    .build();
                tagSet.add(s3Tag);
                tagSet.add(s3Tag2);
```

```
                S3SetObjectTaggingOperation objectTaggingOperation =
S3SetObjectTaggingOperation.builder()
                    .tagSet(tagSet)
                    .build();

                JobOperation jobOperation = JobOperation.builder()
                    .s3PutObjectTagging(objectTaggingOperation)
                    .build();

                JobManifestLocation jobManifestLocation =
JobManifestLocation.builder()
                    .objectArn(manifestLocation)
                    .eTag(eTag)
                    .build();

                JobManifestSpec manifestSpec = JobManifestSpec.builder()
                    .fieldsWithStrings("Bucket", "Key")
                    .format("S3BatchOperations_CSV_20180820")
                    .build();

                JobManifest jobManifest = JobManifest.builder()
                    .spec(manifestSpec)
                    .location(jobManifestLocation)
                    .build();

                JobReport jobReport = JobReport.builder()
                    .bucket(reportBucketName)
                    .prefix("reports")
                    .format("Report_CSV_20180820")
                    .enabled(true)
                    .reportScope("AllTasks")
                    .build();

                CreateJobRequest jobRequest = CreateJobRequest.builder()
                    .accountId(accountId)
                    .description("Job created using the AWS Java SDK")
                    .manifest(jobManifest)
                    .operation(jobOperation)
                    .report(jobReport)
                    .priority(42)
                    .roleArn(iamRoleArn)
                    .clientRequestToken(uuid)
                    .confirmationRequired(false)
```

```
                    .build();

                // Create the job asynchronously.
                 return getAsyncClient().createJob(jobRequest)
                    .thenApply(CreateJobResponse::jobId);
                 })
                 .handle((jobId, ex) -> {
                    if (ex != null) {
                    Throwable cause = (ex instanceof CompletionException) ?
 ex.getCause() : ex;
                    if (cause instanceof S3ControlException) {
                        throw new CompletionException(cause);
                    } else {
                        throw new RuntimeException(cause);
                    }
                }
                return jobId;
            });
    }
```

Crear un trabajo de retención de conformidad.

```
    /**
     * Creates a compliance retention job in Amazon S3 Control.
     * <p>
     * A compliance retention job in Amazon S3 Control is a feature that allows you
 to
     * set a retention period for objects stored in an S3 bucket.
     * This feature is particularly useful for organizations that need to comply
 with
     * regulatory requirements or internal policies that mandate the retention of
 data for
     * a specific duration.
     *
     * @param s3ControlClient The S3ControlClient instance to use for the API call.
     * @return The job ID of the created compliance retention job.
     */
    public static String createComplianceRetentionJob(final S3ControlClient
 s3ControlClient, String roleArn, String bucketName, String accountId) {
        final String manifestObjectArn = "arn:aws:s3:::amzn-s3-demo-manifest-bucket/
compliance-objects-manifest.csv";
```

```
        final String manifestObjectVersionId = "your-object-version-Id";

        Instant jan2025 = Instant.parse("2025-01-01T00:00:00Z");
        JobOperation jobOperation = JobOperation.builder()
            .s3PutObjectRetention(S3SetObjectRetentionOperation.builder()
                .retention(S3Retention.builder()
                    .mode(S3ObjectLockRetentionMode.COMPLIANCE)
                    .retainUntilDate(jan2025)
                    .build())
                .build())
            .build();

        JobManifestLocation manifestLocation = JobManifestLocation.builder()
            .objectArn(manifestObjectArn)
            .eTag(manifestObjectVersionId)
            .build();

        JobManifestSpec manifestSpec = JobManifestSpec.builder()
            .fieldsWithStrings("Bucket", "Key")
            .format("S3BatchOperations_CSV_20180820")
            .build();

        JobManifest manifestToPublicApi = JobManifest.builder()
            .location(manifestLocation)
            .spec(manifestSpec)
            .build();

        // Report details.
        final String jobReportBucketArn = "arn:aws:s3:::" + bucketName;
        final String jobReportPrefix = "reports/compliance-objects-bops";

        JobReport jobReport = JobReport.builder()
            .enabled(true)
            .reportScope(JobReportScope.ALL_TASKS)
            .bucket(jobReportBucketArn)
            .prefix(jobReportPrefix)
            .format(JobReportFormat.REPORT_CSV_20180820)
            .build();

        final Boolean requiresConfirmation = true;
        final int priority = 10;
        CreateJobRequest request = CreateJobRequest.builder()
            .accountId(accountId)
            .description("Set compliance retain-until to 1 Jan 2025")
```

```
            .manifest(manifestToPublicApi)
            .operation(jobOperation)
            .priority(priority)
            .roleArn(roleArn)
            .report(jobReport)
            .confirmationRequired(requiresConfirmation)
            .build();

        // Create the job and get the result.
        CreateJobResponse result = s3ControlClient.createJob(request);
        return result.jobId();
    }
```

Crear un trabajo para quitar la retención legal.

```
    /**
     * Creates a compliance retention job in Amazon S3 Control.
     * <p>
     * A compliance retention job in Amazon S3 Control is a feature that allows you
 to
     * set a retention period for objects stored in an S3 bucket.
     * This feature is particularly useful for organizations that need to comply
 with
     * regulatory requirements or internal policies that mandate the retention of
 data for
     * a specific duration.
     *
     * @param s3ControlClient The S3ControlClient instance to use for the API call.
     * @return The job ID of the created compliance retention job.
     */
    public static String createComplianceRetentionJob(final S3ControlClient
 s3ControlClient, String roleArn, String bucketName, String accountId) {
        final String manifestObjectArn = "arn:aws:s3:::amzn-s3-demo-manifest-bucket/
compliance-objects-manifest.csv";
        final String manifestObjectVersionId = "your-object-version-Id";

        Instant jan2025 = Instant.parse("2025-01-01T00:00:00Z");
        JobOperation jobOperation = JobOperation.builder()
            .s3PutObjectRetention(S3SetObjectRetentionOperation.builder()
                .retention(S3Retention.builder()
                    .mode(S3ObjectLockRetentionMode.COMPLIANCE)
```

```
                .retainUntilDate(jan2025)
                .build())
            .build())
        .build();

JobManifestLocation manifestLocation = JobManifestLocation.builder()
    .objectArn(manifestObjectArn)
    .eTag(manifestObjectVersionId)
    .build();

JobManifestSpec manifestSpec = JobManifestSpec.builder()
    .fieldsWithStrings("Bucket", "Key")
    .format("S3BatchOperations_CSV_20180820")
    .build();

JobManifest manifestToPublicApi = JobManifest.builder()
    .location(manifestLocation)
    .spec(manifestSpec)
    .build();

// Report details.
final String jobReportBucketArn = "arn:aws:s3:::" + bucketName;
final String jobReportPrefix = "reports/compliance-objects-bops";

JobReport jobReport = JobReport.builder()
    .enabled(true)
    .reportScope(JobReportScope.ALL_TASKS)
    .bucket(jobReportBucketArn)
    .prefix(jobReportPrefix)
    .format(JobReportFormat.REPORT_CSV_20180820)
    .build();

final Boolean requiresConfirmation = true;
final int priority = 10;
CreateJobRequest request = CreateJobRequest.builder()
    .accountId(accountId)
    .description("Set compliance retain-until to 1 Jan 2025")
    .manifest(manifestToPublicApi)
    .operation(jobOperation)
    .priority(priority)
    .roleArn(roleArn)
    .report(jobReport)
    .confirmationRequired(requiresConfirmation)
    .build();
```

```
        // Create the job and get the result.
        CreateJobResponse result = s3ControlClient.createJob(request);
        return result.jobId();
    }
```

Crear un nuevo trabajo de retención de gobernanza.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateGovernanceRetentionJob {

    public static void main(String[]args) throws ParseException {
        final String usage = """

            Usage:
                <manifestObjectArn> <jobReportBucketArn> <roleArn> <accountId>
 <manifestObjectVersionId>

            Where:
                manifestObjectArn - The Amazon Resource Name (ARN) of the S3 object
 that contains the manifest file for the governance objects.\s
                bucketName - The ARN of the S3 bucket where the job report will be
 stored.
                roleArn - The ARN of the IAM role that will be used to perform the
 governance retention operation.
                accountId - Your AWS account Id.
                manifestObjectVersionId =  A unique value that is used as the `eTag`
 property of the `JobManifestLocation` object.
            """;

        if (args.length != 4) {
            System.out.println(usage);
            return;
        }
```

```
        String manifestObjectArn = args[0];
        String jobReportBucketArn = args[1];
        String roleArn = args[2];
        String accountId = args[3];
        String manifestObjectVersionId = args[4];

        S3ControlClient s3ControlClient = S3ControlClient.create();
        createGovernanceRetentionJob(s3ControlClient, manifestObjectArn,
jobReportBucketArn, roleArn, accountId, manifestObjectVersionId);
    }

    public static String createGovernanceRetentionJob(final S3ControlClient
s3ControlClient, String manifestObjectArn, String jobReportBucketArn, String
roleArn, String accountId, String manifestObjectVersionId) throws ParseException {
        final JobManifestLocation manifestLocation = JobManifestLocation.builder()
            .objectArn(manifestObjectArn)
            .eTag(manifestObjectVersionId)
            .build();

        final JobManifestSpec manifestSpec = JobManifestSpec.builder()
            .format(JobManifestFormat.S3_BATCH_OPERATIONS_CSV_20180820)
            .fields(Arrays.asList(JobManifestFieldName.BUCKET,
JobManifestFieldName.KEY))
            .build();

        final JobManifest manifestToPublicApi = JobManifest.builder()
            .location(manifestLocation)
            .spec(manifestSpec)
            .build();

        final String jobReportPrefix = "reports/governance-objects";
        final JobReport jobReport = JobReport.builder()
            .enabled(true)
            .reportScope(JobReportScope.ALL_TASKS)
            .bucket(jobReportBucketArn)
            .prefix(jobReportPrefix)
            .format(JobReportFormat.REPORT_CSV_20180820)
            .build();

        final SimpleDateFormat format = new SimpleDateFormat("dd/MM/yyyy");
        final Date jan30th = format.parse("30/01/2025");

        final S3SetObjectRetentionOperation s3SetObjectRetentionOperation =
S3SetObjectRetentionOperation.builder()
```

```
            .retention(S3Retention.builder()
                .mode(S3ObjectLockRetentionMode.GOVERNANCE)
                .retainUntilDate(jan30th.toInstant())
                .build())
            .build();

        final JobOperation jobOperation = JobOperation.builder()
            .s3PutObjectRetention(s3SetObjectRetentionOperation)
            .build();

        final Boolean requiresConfirmation = true;
        final int priority = 10;

        final CreateJobRequest request = CreateJobRequest.builder()
            .accountId(accountId)
            .description("Put governance retention")
            .manifest(manifestToPublicApi)
            .operation(jobOperation)
            .priority(priority)
            .roleArn(roleArn)
            .report(jobReport)
            .confirmationRequired(requiresConfirmation)
            .build();

        final CreateJobResponse result = s3ControlClient.createJob(request);
        return result.jobId();
    }
}
```

- Para obtener más información sobre la API, consulta CreateJobla Referencia AWS SDK for Java 2.x de la API.

`DeleteJobTagging`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteJobTagging`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously deletes the tags associated with a specific batch job.
    *
    * @param jobId     The ID of the batch job whose tags should be deleted.
    * @param accountId The ID of the account associated with the batch job.
    * @return A CompletableFuture that completes when the job tags have been
successfully deleted, or an exception is thrown if the deletion fails.
    */
   public CompletableFuture<Void> deleteBatchJobTagsAsync(String jobId, String
accountId) {
       DeleteJobTaggingRequest jobTaggingRequest =
DeleteJobTaggingRequest.builder()
           .accountId(accountId)
           .jobId(jobId)
           .build();

       return asyncClient.deleteJobTagging(jobTaggingRequest)
           .thenAccept(response -> {
               System.out.println("You have successfully deleted " + jobId + "
tagging.");
           })
           .exceptionally(ex -> {
               System.err.println("Failed to delete job tags: " + ex.getMessage());
               throw new RuntimeException(ex);
           });
   }
```

- Para obtener más información sobre la API, consulta DeleteJobTaggingla Referencia AWS SDK for Java 2.x de la API.

`DescribeJob`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeJob`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Asynchronously describes the specified job.
     *
     * @param jobId     the ID of the job to describe
     * @param accountId the ID of the AWS account associated with the job
     * @return a {@link CompletableFuture} that completes when the job description
is available
     * @throws RuntimeException if an error occurs while describing the job
     */
    public CompletableFuture<Void> describeJobAsync(String jobId, String accountId)
{
        DescribeJobRequest jobRequest = DescribeJobRequest.builder()
            .jobId(jobId)
            .accountId(accountId)
            .build();

        return getAsyncClient().describeJob(jobRequest)
            .thenAccept(response -> {
                System.out.println("Job ID: " + response.job().jobId());
                System.out.println("Description: " + response.job().description());
                System.out.println("Status: " + response.job().statusAsString());
                System.out.println("Role ARN: " + response.job().roleArn());
                System.out.println("Priority: " + response.job().priority());
                System.out.println("Progress Summary: " +
response.job().progressSummary());

                // Print out details about the job manifest.
                JobManifest manifest = response.job().manifest();
                System.out.println("Manifest Location: " +
manifest.location().objectArn());
                System.out.println("Manifest ETag: " + manifest.location().eTag());
```

```
                // Print out details about the job operation.
                JobOperation operation = response.job().operation();
                if (operation.s3PutObjectTagging() != null) {
                    System.out.println("Operation: S3 Put Object Tagging");
                    System.out.println("Tag Set: " +
operation.s3PutObjectTagging().tagSet());
                }

                // Print out details about the job report.
                JobReport report = response.job().report();
                System.out.println("Report Bucket: " + report.bucket());
                System.out.println("Report Prefix: " + report.prefix());
                System.out.println("Report Format: " + report.format());
                System.out.println("Report Enabled: " + report.enabled());
                System.out.println("Report Scope: " + report.reportScopeAsString());
            })
            .exceptionally(ex -> {
                System.err.println("Failed to describe job: " + ex.getMessage());
                throw new RuntimeException(ex);
            });
    }
```

- Para obtener más información sobre la API, consulta DescribeJobla Referencia AWS SDK for Java 2.x de la API.

`GetJobTagging`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetJobTagging`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
```

```
    * Asynchronously retrieves the tags associated with a specific job in an AWS
account.
    *
    * @param jobId     the ID of the job for which to retrieve the tags
    * @param accountId the ID of the AWS account associated with the job
    * @return a {@link CompletableFuture} that completes when the job tags have
been retrieved, or with an exception if the operation fails
    * @throws RuntimeException if an error occurs while retrieving the job tags
    */
   public CompletableFuture<Void> getJobTagsAsync(String jobId, String accountId) {
       GetJobTaggingRequest request = GetJobTaggingRequest.builder()
           .jobId(jobId)
           .accountId(accountId)
           .build();

       return asyncClient.getJobTagging(request)
           .thenAccept(response -> {
               List<S3Tag> tags = response.tags();
               if (tags.isEmpty()) {
                   System.out.println("No tags found for job ID: " + jobId);
               } else {
                   for (S3Tag tag : tags) {
                       System.out.println("Tag key is: " + tag.key());
                       System.out.println("Tag value is: " + tag.value());
                   }
               }
           })
           .exceptionally(ex -> {
               System.err.println("Failed to get job tags: " + ex.getMessage());
               throw new RuntimeException(ex); // Propagate the exception
           });
   }
```

- Para obtener más información sobre la API, consulta GetJobTaggingla Referencia AWS SDK for Java 2.x de la API.

`PutJobTagging`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutJobTagging`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Asynchronously adds tags to a job in the system.
    *
    * @param jobId     the ID of the job to add tags to
    * @param accountId the account ID associated with the job
    * @return a CompletableFuture that completes when the tagging operation is
finished
    */
   public CompletableFuture<Void> putJobTaggingAsync(String jobId, String
accountId) {
       S3Tag departmentTag = S3Tag.builder()
           .key("department")
           .value("Marketing")
           .build();

       S3Tag fiscalYearTag = S3Tag.builder()
           .key("FiscalYear")
           .value("2020")
           .build();

       PutJobTaggingRequest putJobTaggingRequest = PutJobTaggingRequest.builder()
           .jobId(jobId)
           .accountId(accountId)
           .tags(departmentTag, fiscalYearTag)
           .build();

       return asyncClient.putJobTagging(putJobTaggingRequest)
           .thenRun(() -> {
               System.out.println("Additional Tags were added to job " + jobId);
           })
           .exceptionally(ex -> {
               System.err.println("Failed to add tags to job: " + ex.getMessage());
               throw new RuntimeException(ex); // Propagate the exception
           });
```

```
    }
```

- Para obtener más información sobre la API, consulta PutJobTaggingla Referencia AWS SDK for Java 2.x de la API.

`UpdateJobPriority`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateJobPriority`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Updates the priority of a job asynchronously.
    *
    * @param jobId     the ID of the job to update
    * @param accountId the ID of the account associated with the job
    * @return a {@link CompletableFuture} that represents the asynchronous
operation, which completes when the job priority has been updated or an error has
occurred
    */
   public CompletableFuture<Void> updateJobPriorityAsync(String jobId, String
accountId) {
       UpdateJobPriorityRequest priorityRequest =
UpdateJobPriorityRequest.builder()
           .accountId(accountId)
           .jobId(jobId)
           .priority(60)
           .build();

       CompletableFuture<Void> future = new CompletableFuture<>();
       getAsyncClient().updateJobPriority(priorityRequest)
           .thenAccept(response -> {
               System.out.println("The job priority was updated");
```

```
                future.complete(null); // Complete the CompletableFuture on
successful execution
            })
            .exceptionally(ex -> {
                System.err.println("Failed to update job priority: " +
ex.getMessage());
                future.completeExceptionally(ex); // Complete the CompletableFuture
exceptionally on error
                return null; // Return null to handle the exception
            });

        return future;
    }
```

- Para obtener más información sobre la API, consulta UpdateJobPriorityla Referencia AWS SDK for Java 2.x de la API.

`UpdateJobStatus`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateJobStatus`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Cancels a job asynchronously.
     *
     * @param jobId The ID of the job to be canceled.
     * @param accountId The ID of the account associated with the job.
     * @return A {@link CompletableFuture} that completes when the job status has
been updated to "CANCELLED".
     *         If an error occurs during the update, the returned future will
complete exceptionally.
     */
    public CompletableFuture<Void> cancelJobAsync(String jobId, String accountId) {
```

```
        UpdateJobStatusRequest updateJobStatusRequest =
UpdateJobStatusRequest.builder()
            .accountId(accountId)
            .jobId(jobId)
            .requestedJobStatus(String.valueOf(JobStatus.CANCELLED))
            .build();

        return asyncClient.updateJobStatus(updateJobStatusRequest)
            .thenAccept(updateJobStatusResponse -> {
                System.out.println("Job status updated to: " +
updateJobStatusResponse.status());
            })
            .exceptionally(ex -> {
                System.err.println("Failed to cancel job: " + ex.getMessage());
                throw new RuntimeException(ex); // Propagate the exception
            });
    }
```

- Para obtener más información sobre la API, consulta UpdateJobStatusla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de S3 Directory Buckets con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar situaciones comunes mediante el uso de buckets AWS SDK for Java 2.x de directorio de S3.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios

Introducción

Hello Amazon S3 directory buckets

El siguiente ejemplo de código muestra cómo empezar a utilizar Amazon S3 Directory Buckets.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
package com.example.s3.directorybucket;


import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.Bucket;
import software.amazon.awssdk.services.s3.model.BucketInfo;
import software.amazon.awssdk.services.s3.model.BucketType;
import software.amazon.awssdk.services.s3.model.CreateBucketConfiguration;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.CreateBucketResponse;
import software.amazon.awssdk.services.s3.model.DataRedundancy;
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.ListDirectoryBucketsRequest;
import software.amazon.awssdk.services.s3.model.ListDirectoryBucketsResponse;
import software.amazon.awssdk.services.s3.model.LocationInfo;
import software.amazon.awssdk.services.s3.model.LocationType;
import software.amazon.awssdk.services.s3.model.S3Exception;
```

```
import java.util.List;
import java.util.stream.Collectors;

import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;

/**
 * Before running this example:
 * <p>
 * The SDK must be able to authenticate AWS requests on your behalf. If you have
 * not configured
 * authentication for SDKs and tools, see
 * https://docs.aws.amazon.com/sdkref/latest/guide/access.html in the AWS SDKs
 * and Tools Reference Guide.
 * <p>
 * You must have a runtime environment configured with the Java SDK.
 * See
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/setup.html in
 * the Developer Guide if this is not set up.
 * <p>
 * To use S3 directory buckets, configure a gateway VPC endpoint. This is the
 * recommended method to enable directory bucket traffic without
 * requiring an internet gateway or NAT device. For more information on
 * configuring VPC gateway endpoints, visit
 * https://docs.aws.amazon.com/AmazonS3/latest/userguide/s3-express-
networking.html#s3-express-networking-vpc-gateway.
 * <p>
 * Directory buckets are available in specific AWS Regions and Zones. For
 * details on Regions and Zones supporting directory buckets, see
 * https://docs.aws.amazon.com/AmazonS3/latest/userguide/s3-express-
networking.html#s3-express-endpoints.
 */

public class HelloS3DirectoryBuckets {
    private static final Logger logger =
 LoggerFactory.getLogger(HelloS3DirectoryBuckets.class);

    public static void main(String[] args) {
        String bucketName = "test-bucket-" + System.currentTimeMillis() + "--usw2-
az1--x-s3";
        Region region = Region.US_WEST_2;
        String zone = "usw2-az1";
        S3Client s3Client = createS3Client(region);
```

```
        try {
            // Create the directory bucket
            createDirectoryBucket(s3Client, bucketName, zone);
            logger.info("Created bucket: {}", bucketName);

            // List all directory buckets
            List<String> bucketNames = listDirectoryBuckets(s3Client);
            bucketNames.forEach(name -> logger.info("Bucket Name: {}", name));
        } catch (S3Exception e) {
            logger.error("An error occurred during S3 operations: {} - Error code:
{}",
                    e.awsErrorDetails().errorMessage(),
e.awsErrorDetails().errorCode(), e);
        } finally {
            try {
                // Delete the created bucket
                deleteDirectoryBucket(s3Client, bucketName);
                logger.info("Deleted bucket: {}", bucketName);
            } catch (S3Exception e) {
                logger.error("Failed to delete the bucket due to S3 error: {} -
Error code: {}",
                        e.awsErrorDetails().errorMessage(),
e.awsErrorDetails().errorCode(), e);
            } catch (RuntimeException e) {
                logger.error("Failed to delete the bucket due to unexpected error:
{}", e.getMessage(), e);
            } finally {
                s3Client.close();
            }
        }
    }

    /**
     * Creates a new S3 directory bucket in a specified Zone (For example, a
     * specified Availability Zone in this code example).
     *
     * @param s3Client   The S3 client used to create the bucket
     * @param bucketName The name of the bucket to be created
     * @param zone       The region where the bucket will be created
     * @throws S3Exception if there's an error creating the bucket
     */
    public static void createDirectoryBucket(S3Client s3Client, String bucketName,
String zone) throws S3Exception {
        logger.info("Creating bucket: {}", bucketName);
```

```
        CreateBucketConfiguration bucketConfiguration =
CreateBucketConfiguration.builder()
                .location(LocationInfo.builder()
                        .type(LocationType.AVAILABILITY_ZONE)
                        .name(zone).build())
                .bucket(BucketInfo.builder()
                        .type(BucketType.DIRECTORY)
                        .dataRedundancy(DataRedundancy.SINGLE_AVAILABILITY_ZONE)
                        .build())
                .build();
        try {
            CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
                    .bucket(bucketName)
                    .createBucketConfiguration(bucketConfiguration).build();
            CreateBucketResponse response = s3Client.createBucket(bucketRequest);
            logger.info("Bucket created successfully with location: {}",
response.location());
        } catch (S3Exception e) {
            logger.error("Error creating bucket: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }

    /**
     * Lists all S3 directory buckets.
     *
     * @param s3Client The S3 client used to interact with S3
     * @return A list of bucket names
     */
    public static List<String> listDirectoryBuckets(S3Client s3Client) {
        logger.info("Listing all directory buckets");

        try {
            // Create a ListBucketsRequest
            ListDirectoryBucketsRequest listBucketsRequest =
ListDirectoryBucketsRequest.builder().build();

            // Retrieve the list of buckets
            ListDirectoryBucketsResponse response =
s3Client.listDirectoryBuckets(listBucketsRequest);
```

```
            // Extract bucket names
            List<String> bucketNames = response.buckets().stream()
                    .map(Bucket::name)
                    .collect(Collectors.toList());

            return bucketNames;
        } catch (S3Exception e) {
            logger.error("Failed to list buckets: {} - Error code: {}",
 e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }

    /**
     * Deletes the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the bucket to delete
     */
    public static void deleteDirectoryBucket(S3Client s3Client, String bucketName) {
        try {
            DeleteBucketRequest deleteBucketRequest = DeleteBucketRequest.builder()
                    .bucket(bucketName)
                    .build();
            s3Client.deleteBucket(deleteBucketRequest);
        } catch (S3Exception e) {
            logger.error("Failed to delete bucket: " + bucketName + " - Error code:
 " + e.awsErrorDetails().errorCode(),
                    e);
            throw e;
        }
    }

}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateBucket
  - ListDirectoryBuckets

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Configurar una VPC y un punto de conexión de VPC.
- Configurar las políticas, los roles y el usuario que va a trabajar con S3 Directory Buckets y la clase de almacenamiento S3 Express One Zone.
- Crear dos clientes de S3.
- Cree dos buckets.
- Crear un objeto y copiarlo.
- Mostrar la diferencia de rendimiento.
- Rellenar los buckets para mostrar la diferencia lexicográfica.
- Indicar al usuario si desea limpiar los recursos.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecutar un escenario interactivo en el que se muestran las características de Amazon S3.

```
public class S3DirectoriesScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    private static final Logger logger =
 LoggerFactory.getLogger(S3DirectoriesScenario.class);
    static Scanner scanner = new Scanner(System.in);

    private static S3AsyncClient mS3RegularClient;
    private static S3AsyncClient mS3ExpressClient;

    private static String mdirectoryBucketName;
    private static String mregularBucketName;
```

```
   private static String stackName = "cfn-stack-s3-express-basics--" +
UUID.randomUUID();

   private static String regularUser = "";
   private static String vpcId = "";
   private static String expressUser = "";

   private static String vpcEndpointId = "";

   private static final S3DirectoriesActions s3DirectoriesActions = new
S3DirectoriesActions();

   public static void main(String[] args) {
       try {
           s3ExpressScenario();
       } catch (RuntimeException e) {
           logger.info(e.getMessage());
       }
   }

   // Runs the scenario.
   private static void s3ExpressScenario() {
       logger.info(DASHES);
       logger.info("Welcome to the Amazon S3 Express Basics demo using AWS SDK for
Java V2.");
       logger.info("""
           Let's get started! First, please note that S3 Express One Zone works
best when working within the AWS infrastructure,
           specifically when working in the same Availability Zone (AZ). To see the
best results in this example and when you implement
           directory buckets into your infrastructure, it is best to put your
compute resources in the same AZ as your directory
           bucket.
           """);
       waitForInputToContinue(scanner);
       logger.info(DASHES);

       // Create an optional VPC and create 2 IAM users.
       UserNames userNames = createVpcUsers();
       String expressUserName = userNames.getExpressUserName();
       String regularUserName = userNames.getRegularUserName();

       //  Set up two S3 clients, one regular and one express,
```

```
        //  and two buckets, one regular and one directory.
        setupClientsAndBuckets(expressUserName, regularUserName);

        // Create an S3 session for the express S3 client and add objects to the
buckets.
        logger.info("Now let's add some objects to our buckets and demonstrate how
to work with S3 Sessions.");
        waitForInputToContinue(scanner);
        String bucketObject = createSessionAddObjects();

        // Demonstrate performance differences between regular and directory
buckets.
        demonstratePerformance(bucketObject);

        // Populate the buckets to show the lexicographical difference between
        // regular and express buckets.
        showLexicographicalDifferences(bucketObject);

        logger.info(DASHES);
        logger.info("That's it for our tour of the basic operations for S3 Express
One Zone.");
        logger.info("Would you like to cleanUp the AWS resources? (y/n): ");
        String response = scanner.next().trim().toLowerCase();
        if (response.equals("y")) {
            cleanUp(stackName);
        }
    }

    /*
      Delete resources created by this scenario.
    */
    public static void cleanUp(String stackName) {
        try {
            if (mdirectoryBucketName != null) {
                s3DirectoriesActions.deleteBucketAndObjectsAsync(mS3ExpressClient,
mdirectoryBucketName).join();
            }
            logger.info("Deleted directory bucket " + mdirectoryBucketName);
            mdirectoryBucketName = null;
            if (mregularBucketName != null) {
                s3DirectoriesActions.deleteBucketAndObjectsAsync(mS3RegularClient,
mregularBucketName).join();
            }
        } catch (CompletionException ce) {
```

```
            Throwable cause = ce.getCause();
            if (cause instanceof S3Exception) {
                logger.error("S3Exception occurred: {}", cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
        }

        logger.info("Deleted regular bucket " + mregularBucketName);
        mregularBucketName = null;
        CloudFormationHelper.destroyCloudFormationStack(stackName);
    }

    private static void showLexicographicalDifferences(String bucketObject) {
        logger.info(DASHES);
        logger.info("""
            7. Populate the buckets to show the lexicographical (alphabetical)
difference
            when object names are listed. Now let's explore how directory buckets
store
            objects in a different manner to regular buckets. The key is in the
name
            "Directory". Where regular buckets store their key/value pairs in a
            flat manner, directory buckets use actual directories/folders.
            This allows for more rapid indexing, traversing, and therefore
            retrieval times!

            The more segmented your bucket is, with lots of
            directories, sub-directories, and objects, the more efficient it
becomes.
            This structural difference also causes `ListObject` operations to
behave
            differently, which can cause unexpected results. Let's add a few more
            objects in sub-directories to see how the output of
            ListObjects changes.
            """);

        waitForInputToContinue(scanner);

        //  Populate a few more files in each bucket so that we can use
        //  ListObjects and show the difference.
        String otherObject = "other/" + bucketObject;
        String altObject = "alt/" + bucketObject;
```

```
        String otherAltObject = "other/alt/" + bucketObject;

        try {
            s3DirectoriesActions.putObjectAsync(mS3RegularClient,
mregularBucketName, otherObject, "").join();
            s3DirectoriesActions.putObjectAsync(mS3ExpressClient,
mdirectoryBucketName, otherObject, "").join();
            s3DirectoriesActions.putObjectAsync(mS3RegularClient,
mregularBucketName, altObject, "").join();
            s3DirectoriesActions.putObjectAsync(mS3ExpressClient,
mdirectoryBucketName, altObject, "").join();
            s3DirectoriesActions.putObjectAsync(mS3RegularClient,
mregularBucketName, otherAltObject, "").join();
            s3DirectoriesActions.putObjectAsync(mS3ExpressClient,
mdirectoryBucketName, otherAltObject, "").join();

        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof NoSuchBucketException) {
                logger.error("S3Exception occurred: {}", cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
            return;
        }

        try {
            // List objects in both S3 buckets.
            List<String> dirBucketObjects =
s3DirectoriesActions.listObjectsAsync(mS3ExpressClient,
mdirectoryBucketName).join();
            List<String> regBucketObjects =
s3DirectoriesActions.listObjectsAsync(mS3RegularClient, mregularBucketName).join();

            logger.info("Directory bucket content");
            for (String obj : dirBucketObjects) {
                logger.info(obj);
            }

            logger.info("Regular bucket content");
            for (String obj : regBucketObjects) {
                logger.info(obj);
            }
```

```
        } catch (CompletionException e) {
            logger.error("Async operation failed: {} ", e.getCause().getMessage());
            return;
        }

        logger.info("""
            Notice how the regular bucket lists objects in lexicographical order,
while the directory bucket does not. This is
            because the regular bucket considers the whole "key" to be the object
identifier, while the directory bucket actually
            creates directories and uses the object "key" as a path to the object.
            """);
        waitForInputToContinue(scanner);
    }

    /**
     * Demonstrates the performance difference between downloading an object from a
directory bucket and a regular bucket.
     *
     * <p>This method:
     * <ul>
     *     <li>Prompts the user to choose the number of downloads (default is
1,000).</li>
     *     <li>Downloads the specified object from the directory bucket and measures
the total time.</li>
     *     <li>Downloads the same object from the regular bucket and measures the
total time.</li>
     *     <li>Compares the time differences and prints the results.</li>
     * </ul>
     *
     * <p>Note: The performance difference will be more pronounced if this example
is run on an EC2 instance
     * in the same Availability Zone as the buckets.
     *
     * @param bucketObject the name of the object to download
     */
    private static void demonstratePerformance(String bucketObject) {
        logger.info(DASHES);
        logger.info("6. Demonstrate the performance difference.");
        logger.info("""
            Now, let's do a performance test. We'll download the same object from
each
            bucket repeatedly and compare the total time needed.
```

```
            Note: the performance difference will be much more pronounced if this
            example is run in an EC2 instance in the same Availability Zone as
            the bucket.
            """);
        waitForInputToContinue(scanner);

        int downloads = 1000; // Default value.
        logger.info("The default number of downloads of the same object for this
example is set at " + downloads + ".");

        // Ask if the user wants to download a different number.
        logger.info("Would you like to download the file a different number of
times? (y/n): ");
        String response = scanner.next().trim().toLowerCase();
        if (response.equals("y")) {
            int maxDownloads = 1_000_000;

            // Ask for a valid number of downloads.
            while (true) {
                logger.info("Enter a number between 1 and " + maxDownloads + " for
the number of downloads: ");
                if (scanner.hasNextInt()) {
                    downloads = scanner.nextInt();
                    if (downloads >= 1 && downloads <= maxDownloads) {
                        break;
                    } else {
                        logger.info("Please enter a number between 1 and " +
maxDownloads + ".");
                    }
                } else {
                    logger.info("Invalid input. Please enter a valid integer.");
                    scanner.next();
                }
            }

            logger.info("You have chosen to download {}  items.", downloads);
        } else {
            logger.info("No changes made. Using default downloads: {}", downloads);
        }
        // Simulating the download process for the directory bucket.
        logger.info("Downloading from the directory bucket.");
        long directoryTimeStart = System.nanoTime();
        for (int index = 0; index < downloads; index++) {
            if (index % 50 == 0) {
```

```
                logger.info("Download " + index + " of " + downloads);
            }

            try {
                // Get the object from the directory bucket.
                s3DirectoriesActions.getObjectAsync(mS3ExpressClient,
mdirectoryBucketName, bucketObject).join();
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof NoSuchKeyException) {
                    logger.error("S3Exception occurred: {}", cause.getMessage(),
ce);
                } else {
                    logger.error("An unexpected error occurred: {}",
cause.getMessage(), ce);
                }
                return;
            }
        }
        long directoryTimeDifference = System.nanoTime() - directoryTimeStart;

        // Download from the regular bucket.
        logger.info("Downloading from the regular bucket.");
        long normalTimeStart = System.nanoTime();
        for (int index = 0; index < downloads; index++) {
            if (index % 50 == 0) {
                logger.info("Download " + index + " of " + downloads);
            }

            try {
                s3DirectoriesActions.getObjectAsync(mS3RegularClient,
mregularBucketName, bucketObject).join();
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof NoSuchKeyException) {
                    logger.error("S3Exception occurred: {}", cause.getMessage(),
ce);
                } else {
                    logger.error("An unexpected error occurred: {}",
cause.getMessage(), ce);
                }
                return;
            }
        }
```

```
        long normalTimeDifference = System.nanoTime() - normalTimeStart;
        logger.info("The directory bucket took " + directoryTimeDifference
+ " nanoseconds, while the regular bucket took " + normalTimeDifference + "
nanoseconds.");
        long difference = normalTimeDifference - directoryTimeDifference;
        logger.info("That's a difference of " + difference + " nanoseconds, or");
        logger.info(difference / 1_000_000_000.0 + " seconds.");

        if (difference < 0) {
            logger.info("The directory buckets were slower. This can happen if you
are not running on the cloud within a VPC.");
        }
        waitForInputToContinue(scanner);
    }

    private static String createSessionAddObjects() {
        logger.info(DASHES);
        logger.info("""
            5. Create an object and copy it.
            We'll create an object consisting of some text and upload it to the
            regular bucket.
            """);
        waitForInputToContinue(scanner);

        String bucketObject = "basic-text-object.txt";
        try {
            s3DirectoriesActions.putObjectAsync(mS3RegularClient,
mregularBucketName, bucketObject, "Look Ma, I'm a bucket!").join();
            s3DirectoriesActions.createSessionAsync(mS3ExpressClient,
mdirectoryBucketName).join();

            // Copy the object to the destination S3 bucket.
            s3DirectoriesActions.copyObjectAsync(mS3ExpressClient,
mregularBucketName, bucketObject, mdirectoryBucketName, bucketObject).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof S3Exception) {
                logger.error("S3Exception occurred: {}", cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
        }
```

```
        logger.info("""
            It worked! This is because the S3Client that performed the copy
operation
            is the expressClient using the credentials for the user with permission
to
            work with directory buckets.

            It's important to remember the user permissions when interacting with
            directory buckets. Instead of validating permissions on every call as
            regular buckets do, directory buckets utilize the user credentials and
session
            token to validate. This allows for much faster connection speeds on
every call.
            For single calls, this is low, but for many concurrent calls
            this adds up to a lot of time saved.
            """);
        waitForInputToContinue(scanner);
        return bucketObject;
    }

    /**
     * Creates VPC users for the S3 Express One Zone scenario.
     * <p>
     * This method performs the following steps:
     * <ol>
     *     <li>Optionally creates a new VPC and VPC Endpoint if the application
is running in an EC2 instance in the same Availability Zone as the directory
buckets.</li>
     *     <li>Creates two IAM users: one with S3 Express One Zone permissions and
one without.</li>
     * </ol>
     *
     * @return a {@link UserNames} object containing the names of the created IAM
users
     */
    public static UserNames createVpcUsers() {
        /*
        Optionally create a VPC.
        Create two IAM users, one with S3 Express One Zone permissions and one
without.
        */
        logger.info(DASHES);
        logger.info("""
```

```
            1. First, we'll set up a new VPC and VPC Endpoint if this program is
running in an EC2 instance in the same AZ as your\s
            directory buckets will be. Are you running this in an EC2 instance
located in the same AZ as your intended directory buckets?
            """);

        logger.info("Do you want to setup a VPC Endpoint? (y/n)");
        String endpointAns = scanner.nextLine().trim();
        if (endpointAns.equalsIgnoreCase("y")) {
            logger.info("""
                Great! Let's set up a VPC, retrieve the Route Table from it, and
create a VPC Endpoint to connect the S3 Client to.
                """);
            try {
                s3DirectoriesActions.setupVPCAsync().join();
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof Ec2Exception) {
                    logger.error("IamException occurred: {}", cause.getMessage(),
ce);
                } else {
                    logger.error("An unexpected error occurred: {}",
cause.getMessage(), ce);
                }
            }
            waitForInputToContinue(scanner);
        } else {
            logger.info("Skipping the VPC setup. Don't forget to use this in
production!");
        }
        logger.info(DASHES);
        logger.info("""
            2. Create a RegularUser and ExpressUser by using the AWS CDK.
            One IAM User, named RegularUser, will have permissions to work only
            with regular buckets and one IAM user, named ExpressUser, will have
            permissions to work only with directory buckets.
            """);
        waitForInputToContinue(scanner);

        // Create two users required for this scenario.
        Map<String, String> stackOutputs = createUsersUsingCDK(stackName);
        regularUser = stackOutputs.get("RegularUser");
        expressUser = stackOutputs.get("ExpressUser");
```

```
        UserNames names = new UserNames();
        names.setRegularUserName(regularUser);
        names.setExpressUserName(expressUser);
        return names;
    }

    /**
     * Creates users using AWS CloudFormation.
     *
     * @return a {@link Map} of String keys and String values representing the stack
outputs,
     * which may include user-related information such as user names and IDs.
     */
    public static Map<String, String> createUsersUsingCDK(String stackName) {
        logger.info("We'll use an AWS CloudFormation template to create the IAM
users and policies.");
        CloudFormationHelper.deployCloudFormationStack(stackName);
        return CloudFormationHelper.getStackOutputsAsync(stackName).join();
    }

    /**
     * Sets up the necessary clients and buckets for the S3 Express service.
     *
     * @param expressUserName the username for the user with S3 Express permissions
     * @param regularUserName the username for the user with regular S3 permissions
     */
    public static void setupClientsAndBuckets(String expressUserName, String
regularUserName) {
        Scanner locscanner = new Scanner(System.in);
        String accessKeyIdforRegUser;
        String secretAccessforRegUser;
        try {
            CreateAccessKeyResponse keyResponse =
s3DirectoriesActions.createAccessKeyAsync(regularUserName).join();
            accessKeyIdforRegUser = keyResponse.accessKey().accessKeyId();
            secretAccessforRegUser = keyResponse.accessKey().secretAccessKey();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof IamException) {
                logger.error("IamException occurred: {}", cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
```

```
            return;
        }

        String accessKeyIdforExpressUser;
        String secretAccessforExpressUser;
        try {
            CreateAccessKeyResponse keyResponseExpress =
s3DirectoriesActions.createAccessKeyAsync(expressUserName).join();
            accessKeyIdforExpressUser =
keyResponseExpress.accessKey().accessKeyId();
            secretAccessforExpressUser =
keyResponseExpress.accessKey().secretAccessKey();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof IamException) {
                logger.error("IamException occurred: {}", cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
            return;
        }

        logger.info(DASHES);
        logger.info("""
            3. Create two S3Clients; one uses the ExpressUser's credentials and one
uses the RegularUser's credentials.
            The 2 S3Clients will use different credentials.
            """);
        waitForInputToContinue(locscanner);
        try {
            mS3RegularClient =
createS3ClientWithAccessKeyAsync(accessKeyIdforRegUser,
secretAccessforRegUser).join();
            mS3ExpressClient =
createS3ClientWithAccessKeyAsync(accessKeyIdforExpressUser,
secretAccessforExpressUser).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof IllegalArgumentException) {
                logger.error("An invalid argument exception occurred: {}",
cause.getMessage(), ce);
            } else {
```

```
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
            return;
        }

        logger.info("""
            We can now use the ExpressUser client to make calls to S3 Express
operations.
            """);
        waitForInputToContinue(locscanner);
        logger.info(DASHES);
        logger.info("""
            4. Create two buckets.
            Now we will create a directory bucket which is the linchpin of the S3
Express One Zone service. Directory buckets
            behave differently from regular S3 buckets which we will explore here.
We'll also create a regular bucket, put
            an object into the regular bucket, and copy it to the directory bucket.
            """);

        logger.info("""
            Now, let's choose an availability zone (AZ) for the directory bucket.
            We'll choose one that is supported.
            """);
        String zoneId;
        String regularBucketName;
        try {
            zoneId = s3DirectoriesActions.selectAvailabilityZoneIdAsync().join();
            regularBucketName = "reg-bucket-" + System.currentTimeMillis();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof Ec2Exception) {
                logger.error("EC2Exception occurred: {}", cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
            return;
        }
        logger.info("""
            Now, let's create the actual directory bucket, as well as a regular
bucket."
             """);
```

```
        String directoryBucketName = "test-bucket-" + System.currentTimeMillis() +
"--" + zoneId + "--x-s3";
        try {
            s3DirectoriesActions.createDirectoryBucketAsync(mS3ExpressClient,
directoryBucketName, zoneId).join();
            logger.info("Created directory bucket {}", directoryBucketName);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof BucketAlreadyExistsException) {
                logger.error("The bucket already exists. Moving on: {}",
cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
                return;
            }
        }

        // Assign to the data member.
        mdirectoryBucketName = directoryBucketName;
        try {
            s3DirectoriesActions.createBucketAsync(mS3RegularClient,
regularBucketName).join();
            logger.info("Created regular bucket {} ", regularBucketName);
            mregularBucketName = regularBucketName;
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof BucketAlreadyExistsException) {
                logger.error("The bucket already exists. Moving on: {}",
cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
                return;
            }
        }
        logger.info("Great! Both buckets were created.");
        waitForInputToContinue(locscanner);
    }

    /**
     * Creates an asynchronous S3 client with the specified access key and secret
access key.
```

```
     *
     * @param accessKeyId     the AWS access key ID
     * @param secretAccessKey the AWS secret access key
     * @return a {@link CompletableFuture} that asynchronously creates the S3 client
     * @throws IllegalArgumentException if the access key ID or secret access key is
 null
     */
    public static CompletableFuture<S3AsyncClient>
 createS3ClientWithAccessKeyAsync(String accessKeyId, String secretAccessKey) {
        return CompletableFuture.supplyAsync(() -> {
            // Validate input parameters
            if (accessKeyId == null || accessKeyId.isBlank() || secretAccessKey ==
 null || secretAccessKey.isBlank()) {
                throw new IllegalArgumentException("Access Key ID and Secret Access
 Key must not be null or empty");
            }

            AwsBasicCredentials awsCredentials =
 AwsBasicCredentials.create(accessKeyId, secretAccessKey);
            return S3AsyncClient.builder()

 .credentialsProvider(StaticCredentialsProvider.create(awsCredentials))
                .region(Region.US_WEST_2)
                .build();
        });
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Una clase contenedora para métodos del SDK de Amazon S3.

```
public class S3DirectoriesActions {

    private static IamAsyncClient iamAsyncClient;

    private static Ec2AsyncClient ec2AsyncClient;
    private static final Logger logger =
 LoggerFactory.getLogger(S3DirectoriesActions.class);

    private static IamAsyncClient getIAMAsyncClient() {
        if (iamAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            iamAsyncClient = IamAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return iamAsyncClient;
    }

    private static Ec2AsyncClient getEc2AsyncClient() {
        if (ec2AsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
```

```
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            ec2AsyncClient = Ec2AsyncClient.builder()
                .httpClient(httpClient)
                .region(Region.US_WEST_2)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return ec2AsyncClient;
    }

    /**
     * Deletes the specified S3 bucket and all the objects within it asynchronously.
     *
     * @param s3AsyncClient the S3 asynchronous client to use for the operations
     * @param bucketName the name of the S3 bucket to be deleted
     * @return a {@link CompletableFuture} that completes with a {@link
WaiterResponse} containing the
     *         {@link HeadBucketResponse} when the bucket has been successfully
deleted
     * @throws CompletionException if there was an error deleting the bucket or its
objects
     */
    public CompletableFuture<WaiterResponse<HeadBucketResponse>>
deleteBucketAndObjectsAsync(S3AsyncClient s3AsyncClient, String bucketName) {
        ListObjectsV2Request listRequest = ListObjectsV2Request.builder()
            .bucket(bucketName)
            .build();

        return s3AsyncClient.listObjectsV2(listRequest)
            .thenCompose(listResponse -> {
                if (!listResponse.contents().isEmpty()) {
                    List<ObjectIdentifier> objectIdentifiers =
listResponse.contents().stream()
                        .map(s3Object ->
ObjectIdentifier.builder().key(s3Object.key()).build())
                        .collect(Collectors.toList());
```

```
                    DeleteObjectsRequest deleteRequest =
DeleteObjectsRequest.builder()
                        .bucket(bucketName)
                        .delete(Delete.builder().objects(objectIdentifiers).build())
                        .build();

                    return s3AsyncClient.deleteObjects(deleteRequest)
                        .thenAccept(deleteResponse -> {
                            if (!deleteResponse.errors().isEmpty()) {
                                deleteResponse.errors().forEach(error ->
                                    logger.error("Couldn't delete object " +
error.key() + ". Reason: " + error.message()));
                            }
                        });
                }
                return CompletableFuture.completedFuture(null);
            })
            .thenCompose(ignored -> {
                DeleteBucketRequest deleteBucketRequest =
DeleteBucketRequest.builder()
                    .bucket(bucketName)
                    .build();
                return s3AsyncClient.deleteBucket(deleteBucketRequest);
            })
            .thenCompose(ignored -> {
                S3AsyncWaiter waiter = s3AsyncClient.waiter();
                HeadBucketRequest headBucketRequest =
HeadBucketRequest.builder().bucket(bucketName).build();
                return waiter.waitUntilBucketNotExists(headBucketRequest);
            })
            .whenComplete((ignored, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof S3Exception) {
                        throw new CompletionException("Error deleting bucket: " +
bucketName, cause);
                    }
                    throw new CompletionException("Failed to delete bucket and
objects: " + bucketName, exception);
                }
                logger.info("Bucket deleted successfully: " + bucketName);
            });
    }
```

```
   /**
    *  Lists the objects in an S3 bucket asynchronously.
    *
    * @param s3Client the S3 async client to use for the operation
    * @param bucketName the name of the S3 bucket containing the objects to list
    * @return a {@link CompletableFuture} that contains the list of object keys in
the specified bucket
    */
   public CompletableFuture<List<String>> listObjectsAsync(S3AsyncClient s3Client,
String bucketName) {
       ListObjectsV2Request request = ListObjectsV2Request.builder()
           .bucket(bucketName)
           .build();

       return s3Client.listObjectsV2(request)
           .thenApply(response -> response.contents().stream()
               .map(S3Object::key)
               .toList())
           .whenComplete((result, exception) -> {
               if (exception != null) {
                   throw new CompletionException("Couldn't list objects in bucket:
" + bucketName, exception);
               }
           });
   }

   /**
    * Retrieves an object from an Amazon S3 bucket asynchronously.
    *
    * @param s3Client   the S3 async client to use for the operation
    * @param bucketName the name of the S3 bucket containing the object
    * @param keyName    the unique identifier (key) of the object to retrieve
    * @return a {@link CompletableFuture} that, when completed, contains the
object's content as a {@link ResponseBytes} of {@link GetObjectResponse}
    */
   public CompletableFuture<ResponseBytes<GetObjectResponse>>
getObjectAsync(S3AsyncClient s3Client, String bucketName, String keyName) {
       GetObjectRequest objectRequest = GetObjectRequest.builder()
           .key(keyName)
           .bucket(bucketName)
           .build();

       // Get the object asynchronously and transform it into a byte array
```

```
        return s3Client.getObject(objectRequest, AsyncResponseTransformer.toBytes())
            .exceptionally(exception -> {
                Throwable cause = exception.getCause();
                if (cause instanceof NoSuchKeyException) {
                    throw new CompletionException("Failed to get the object. Reason:
" + ((S3Exception) cause).awsErrorDetails().errorMessage(), cause);
                }
                throw new CompletionException("Failed to get the object",
exception);
            });
    }

    /**
     * Asynchronously copies an object from one S3 bucket to another.
     *
     * @param s3Client           the S3 async client to use for the copy operation
     * @param sourceBucket       the name of the source bucket
     * @param sourceKey          the key of the object to be copied in the source
bucket
     * @param destinationBucket  the name of the destination bucket
     * @param destinationKey     the key of the copied object in the destination
bucket
     * @return a {@link CompletableFuture} that completes when the copy operation is
finished
     */
    public CompletableFuture<Void> copyObjectAsync(S3AsyncClient s3Client, String
sourceBucket, String sourceKey, String destinationBucket, String destinationKey) {
        CopyObjectRequest copyRequest = CopyObjectRequest.builder()
            .sourceBucket(sourceBucket)
            .sourceKey(sourceKey)
            .destinationBucket(destinationBucket)
            .destinationKey(destinationKey)
            .build();

        return s3Client.copyObject(copyRequest)
            .thenRun(() -> logger.info("Copied object '" + sourceKey + "' from
bucket '" + sourceBucket + "' to bucket '" + destinationBucket + "'"))
            .whenComplete((ignored, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof S3Exception) {
                        throw new CompletionException("Couldn't copy object '" +
sourceKey + "' from bucket '" + sourceBucket + "' to bucket '" + destinationBucket
+ "'. Reason: " + ((S3Exception) cause).awsErrorDetails().errorMessage(), cause);
```

```
                    }
                    throw new CompletionException("Failed to copy object",
exception);
                }
            });
    }

    /**
     * Asynchronously creates a session for the specified S3 bucket.
     *
     * @param s3Client   the S3 asynchronous client to use for creating the session
     * @param bucketName the name of the S3 bucket for which to create the session
     * @return a {@link CompletableFuture} that completes when the session is
created, or throws a {@link CompletionException} if an error occurs
     */
    public CompletableFuture<CreateSessionResponse> createSessionAsync(S3AsyncClient
s3Client, String bucketName) {
        CreateSessionRequest request = CreateSessionRequest.builder()
            .bucket(bucketName)
            .build();

        return s3Client.createSession(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof S3Exception) {
                        throw new CompletionException("Couldn't create the session.
Reason: " + ((S3Exception) cause).awsErrorDetails().errorMessage(), cause);
                    }
                    throw new CompletionException("Unexpected error occurred while
creating session", exception);
                }
                logger.info("Created session for bucket: " + bucketName);
            });

    }

    /**
     * Creates a new S3 directory bucket in a specified Zone (For example, a
     * specified Availability Zone in this code example).
     *
     * @param s3Client   The asynchronous S3 client used to create the bucket
     * @param bucketName The name of the bucket to be created
     * @param zone       The Availability Zone where the bucket will be created
```

```
     * @throws CompletionException if there's an error creating the bucket
     */
    public CompletableFuture<CreateBucketResponse>
createDirectoryBucketAsync(S3AsyncClient s3Client, String bucketName, String zone)
{
        logger.info("Creating bucket: " + bucketName);

        CreateBucketConfiguration bucketConfiguration =
CreateBucketConfiguration.builder()
            .location(LocationInfo.builder()
                .type(LocationType.AVAILABILITY_ZONE)
                .name(zone)
                .build())
            .bucket(BucketInfo.builder()
                .type(BucketType.DIRECTORY)
                .dataRedundancy(DataRedundancy.SINGLE_AVAILABILITY_ZONE)
                .build())
            .build();

        CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
            .bucket(bucketName)
            .createBucketConfiguration(bucketConfiguration)
            .build();

        return s3Client.createBucket(bucketRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof BucketAlreadyExistsException) {
                        throw new CompletionException("The bucket already exists: "
+ ((S3Exception) cause).awsErrorDetails().errorMessage(), cause);
                    }
                    throw new CompletionException("Unexpected error occurred while
creating bucket", exception);
                }
                logger.info("Bucket created successfully with location: " +
response.location());
            });
    }

    /**
     * Creates an S3 bucket asynchronously.
     *
     * @param s3Client    the S3 async client to use for the bucket creation
```

```
    * @param bucketName  the name of the S3 bucket to create
    * @return a {@link CompletableFuture} that completes with the {@link
WaiterResponse} containing the {@link HeadBucketResponse}
    *         when the bucket is successfully created
    * @throws CompletionException if there's an error creating the bucket
    */
   public CompletableFuture<WaiterResponse<HeadBucketResponse>>
createBucketAsync(S3AsyncClient s3Client, String bucketName) {
       CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
           .bucket(bucketName)
           .build();

       return s3Client.createBucket(bucketRequest)
           .thenCompose(response -> {
               S3AsyncWaiter s3Waiter = s3Client.waiter();
               HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
                   .bucket(bucketName)
                   .build();
               return s3Waiter.waitUntilBucketExists(bucketRequestWait);
           })
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof BucketAlreadyExistsException) {
                       throw new CompletionException("The S3 bucket exists: " +
cause.getMessage(), cause);
                   } else {
                       throw new CompletionException("Failed to create access key:
" + exception.getMessage(), exception);
                   }
               }
               logger.info(bucketName + " is ready");
           });
   }

   /**
    * Uploads an object to an Amazon S3 bucket asynchronously.
    *
    * @param s3Client     the S3 async client to use for the upload
    * @param bucketName   the destination S3 bucket name
    * @param bucketObject the name of the object to be uploaded
    * @param text         the content to be uploaded as the object
    */
```

```
   public CompletableFuture<PutObjectResponse> putObjectAsync(S3AsyncClient
s3Client, String bucketName, String bucketObject, String text) {
       PutObjectRequest objectRequest = PutObjectRequest.builder()
           .bucket(bucketName)
           .key(bucketObject)
           .build();

       return s3Client.putObject(objectRequest, AsyncRequestBody.fromString(text))
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof NoSuchBucketException) {
                       throw new CompletionException("The S3 bucket does not exist:
" + cause.getMessage(), cause);
                   } else {
                       throw new CompletionException("Failed to create access key:
" + exception.getMessage(), exception);
                   }
               }
           });
   }

   /**
    * Creates an AWS IAM access key asynchronously for the specified user name.
    *
    * @param userName the name of the IAM user for whom to create the access key
    * @return a {@link CompletableFuture} that completes with the {@link
CreateAccessKeyResponse} containing the created access key
    */
   public CompletableFuture<CreateAccessKeyResponse> createAccessKeyAsync(String
userName) {
       CreateAccessKeyRequest request = CreateAccessKeyRequest.builder()
           .userName(userName)
           .build();

       return getIAMAsyncClient().createAccessKey(request)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   logger.info("Access Key Created.");
               } else {
                   if (exception == null) {
                       Throwable cause = exception.getCause();
                       if (cause instanceof IamException) {
```

```
                            throw new CompletionException("IAM error while creating
 access key: " + cause.getMessage(), cause);
                        } else {
                            throw new CompletionException("Failed to create access
 key: " + exception.getMessage(), exception);
                        }
                    }
                }
            });
    }

    /**
     * Asynchronously selects an Availability Zone ID from the available EC2 zones.
     *
     * @return A {@link CompletableFuture} that resolves to the selected
 Availability Zone ID.
     * @throws CompletionException if an error occurs during the request or
 processing.
     */
    public CompletableFuture<String> selectAvailabilityZoneIdAsync() {
        DescribeAvailabilityZonesRequest zonesRequest =
 DescribeAvailabilityZonesRequest.builder()
            .build();

        return getEc2AsyncClient().describeAvailabilityZones(zonesRequest)
            .thenCompose(response -> {
                List<AvailabilityZone> zonesList = response.availabilityZones();
                if (zonesList.isEmpty()) {
                    logger.info("No availability zones found.");
                    return CompletableFuture.completedFuture(null); // Return null
 if no zones are found
                }

                List<String> zoneIds = zonesList.stream()
                    .map(AvailabilityZone::zoneId) // Get the zoneId (e.g., "usw2-
az1")
                    .toList();

                return CompletableFuture.supplyAsync(() ->
 promptUserForZoneSelection(zonesList, zoneIds))
                    .thenApply(selectedZone -> {
                        // Return only the selected Zone ID (e.g., "usw2-az1").
                        return selectedZone.zoneId();
                    });
```

```
            })
            .whenComplete((result, exception) -> {
                if (exception == null) {
                    if (result != null) {
                        logger.info("Selected Availability Zone ID: " + result);
                    } else {
                        logger.info("No availability zone selected.");
                    }
                } else {
                    Throwable cause = exception.getCause();
                    if (cause instanceof Ec2Exception) {
                        throw new CompletionException("EC2 error while selecting
availability zone: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Failed to select availability
zone: " + exception.getMessage(), exception);
                }
            });
    }

    /**
     * Prompts the user to select an Availability Zone from the given list.
     *
     * @param zonesList the list of Availability Zones
     * @param zoneIds the list of zone IDs
     * @return the selected Availability Zone
     */
    private static AvailabilityZone
promptUserForZoneSelection(List<AvailabilityZone> zonesList, List<String> zoneIds)
{
        Scanner scanner = new Scanner(System.in);
        int index = -1;

        while (index < 0 || index >= zoneIds.size()) {
            logger.info("Select an availability zone:");
            IntStream.range(0, zoneIds.size()).forEach(i ->
                logger.info(i + ": " + zoneIds.get(i))
            );

            logger.info("Enter the number corresponding to your choice: ");
            if (scanner.hasNextInt()) {
                index = scanner.nextInt();
            } else {
                scanner.next();
```

```
            }
        }

        AvailabilityZone selectedZone = zonesList.get(index);
        logger.info("You selected: " + selectedZone.zoneId());
        return selectedZone;
    }

    /**
     * Asynchronously sets up a new VPC, including creating the VPC, finding the
associated route table, and
     * creating a VPC endpoint for the S3 service.
     *
     * @return a {@link CompletableFuture} that, when completed, contains a
AbstractMap with the
     *         VPC ID and VPC endpoint ID.
     */
    public CompletableFuture<AbstractMap.SimpleEntry<String, String>>
setupVPCAsync() {
        String cidr = "10.0.0.0/16";
        CreateVpcRequest vpcRequest = CreateVpcRequest.builder()
            .cidrBlock(cidr)
            .build();

        return getEc2AsyncClient().createVpc(vpcRequest)
            .thenCompose(vpcResponse -> {
                String vpcId = vpcResponse.vpc().vpcId();
                logger.info("VPC Created: {}", vpcId);

                Ec2AsyncWaiter waiter = getEc2AsyncClient().waiter();
                DescribeVpcsRequest request = DescribeVpcsRequest.builder()
                    .vpcIds(vpcId)
                    .build();

                return waiter.waitUntilVpcAvailable(request)
                    .thenApply(waiterResponse -> vpcId);
            })
            .thenCompose(vpcId -> {
                Filter filter = Filter.builder()
                    .name("vpc-id")
                    .values(vpcId)
                    .build();
```

```
                DescribeRouteTablesRequest describeRouteTablesRequest =
DescribeRouteTablesRequest.builder()
                    .filters(filter)
                    .build();

                return
getEc2AsyncClient().describeRouteTables(describeRouteTablesRequest)
                    .thenApply(routeTablesResponse -> {
                        if (routeTablesResponse.routeTables().isEmpty()) {
                            throw new CompletionException("No route tables found for
VPC: " + vpcId, null);
                        }
                        String routeTableId =
routeTablesResponse.routeTables().get(0).routeTableId();
                        logger.info("Route table found: {}", routeTableId);
                        return new AbstractMap.SimpleEntry<>(vpcId, routeTableId);
                    });
            })
            .thenCompose(vpcAndRouteTable -> {
                String vpcId = vpcAndRouteTable.getKey();
                String routeTableId = vpcAndRouteTable.getValue();
                Region region =
getEc2AsyncClient().serviceClientConfiguration().region();
                String serviceName = String.format("com.amazonaws.%s.s3express",
region.id());

                CreateVpcEndpointRequest endpointRequest =
CreateVpcEndpointRequest.builder()
                    .vpcId(vpcId)
                    .routeTableIds(routeTableId)
                    .serviceName(serviceName)
                    .build();

                return getEc2AsyncClient().createVpcEndpoint(endpointRequest)
                    .thenApply(vpcEndpointResponse -> {
                        String vpcEndpointId =
vpcEndpointResponse.vpcEndpoint().vpcEndpointId();
                        logger.info("VPC Endpoint created: {}", vpcEndpointId);
                        return new AbstractMap.SimpleEntry<>(vpcId, vpcEndpointId);
                    });
            })
            .exceptionally(exception -> {
                Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
```

```
                if (cause instanceof Ec2Exception) {
                    logger.error("EC2 error during VPC setup: {}",
 cause.getMessage(), cause);
                    throw new CompletionException("EC2 error during VPC setup: " +
 cause.getMessage(), cause);
                }

                logger.error("VPC setup failed: {}", cause.getMessage(), cause);
                throw new CompletionException("VPC setup failed: " +
 cause.getMessage(), cause);
            });
    }

}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CopyObject
  - CreateBucket
  - DeleteBucket
  - DeleteObject
  - GetObject
  - ListObjects
  - PutObject

Acciones

`AbortMultipartUpload`

En el siguiente ejemplo de código, se muestra cómo utilizar `AbortMultipartUpload`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Cancelar la carga multiparte de un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.AbortMultipartUploadRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static
 com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;



    /**
     * Aborts a specific multipart upload for the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to be uploaded
     * @param uploadId   The upload ID of the multipart upload to abort
     * @return True if the multipart upload is successfully aborted, false otherwise
     */
    public static boolean abortDirectoryBucketMultipartUpload(S3Client s3Client,
 String bucketName,
            String objectKey, String uploadId) {
        logger.info("Aborting multipart upload: {} for bucket: {}", uploadId,
 bucketName);
        try {
            // Abort the multipart upload
            AbortMultipartUploadRequest abortMultipartUploadRequest =
 AbortMultipartUploadRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .uploadId(uploadId)
                    .build();

            s3Client.abortMultipartUpload(abortMultipartUploadRequest);
            logger.info("Aborted multipart upload: {} for object: {}", uploadId,
 objectKey);
            return true;
        } catch (S3Exception e) {
```

```
            logger.error("Failed to abort multipart upload: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            return false;
        }
    }
```

- Para obtener más información sobre la API, consulta AbortMultipartUploadla Referencia AWS SDK for Java 2.x de la API.

`CompleteMultipartUpload`

En el siguiente ejemplo de código, se muestra cómo utilizar `CompleteMultipartUpload`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Completar una carga multiparte de un bucket de directorio.

```
import com.example.s3.util.S3DirectoryBucketUtils;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CompleteMultipartUploadRequest;
import software.amazon.awssdk.services.s3.model.CompleteMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.CompletedMultipartUpload;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.io.IOException;
import java.nio.file.Path;
import java.util.List;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
```

```
import static
 com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static
 com.example.s3.util.S3DirectoryBucketUtils.multipartUploadForDirectoryBucket;


   /**
    * This method completes the multipart upload request by collating all the
    * upload parts.
    *
    * @param s3Client    The S3 client used to interact with S3
    * @param bucketName  The name of the directory bucket
    * @param objectKey   The key (name) of the object to be uploaded
    * @param uploadId    The upload ID used to track the multipart upload
    * @param uploadParts The list of completed parts
    * @return True if the multipart upload is successfully completed, false
    *         otherwise
    */
   public static boolean completeDirectoryBucketMultipartUpload(S3Client s3Client,
 String bucketName, String objectKey,
           String uploadId, List<CompletedPart> uploadParts) {
       try {
           CompletedMultipartUpload completedMultipartUpload =
 CompletedMultipartUpload.builder()
                   .parts(uploadParts)
                   .build();
           CompleteMultipartUploadRequest completeMultipartUploadRequest =
 CompleteMultipartUploadRequest.builder()
                   .bucket(bucketName)
                   .key(objectKey)
                   .uploadId(uploadId)
                   .multipartUpload(completedMultipartUpload)
                   .build();

           CompleteMultipartUploadResponse response =
 s3Client.completeMultipartUpload(completeMultipartUploadRequest);
           logger.info("Multipart upload completed. ETag: {}", response.eTag());
           return true;
       } catch (S3Exception e) {
```

```
            logger.error("Failed to complete multipart upload: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            return false;
        }
    }
```

- Para obtener más información sobre la API, consulta CompleteMultipartUploadla Referencia AWS SDK for Java 2.x de la API.

`CopyObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `CopyObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Copiar un objeto de un bucket de directorio a otro bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CopyObjectRequest;
import software.amazon.awssdk.services.s3.model.CopyObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.nio.file.Path;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
```

```
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;

   /**
    * Copies an object from one S3 general purpose bucket to one S3 directory
    * bucket.
    *
    * @param s3Client     The S3 client used to interact with S3
    * @param sourceBucket The name of the source bucket
    * @param objectKey    The key (name) of the object to be copied
    * @param targetBucket The name of the target bucket
    */
   public static void copyDirectoryBucketObject(S3Client s3Client, String
sourceBucket, String objectKey,
           String targetBucket) {
       logger.info("Copying object: {} from bucket: {} to bucket: {}", objectKey,
sourceBucket, targetBucket);

       try {
           // Create a CopyObjectRequest
           CopyObjectRequest copyReq = CopyObjectRequest.builder()
                   .sourceBucket(sourceBucket)
                   .sourceKey(objectKey)
                   .destinationBucket(targetBucket)
                   .destinationKey(objectKey)
                   .build();

           // Copy the object
           CopyObjectResponse copyRes = s3Client.copyObject(copyReq);
           logger.info("Successfully copied {} from bucket {} into bucket {}.
CopyObjectResponse: {}",
                   objectKey, sourceBucket, targetBucket,
copyRes.copyObjectResult().toString());

       } catch (S3Exception e) {
           logger.error("Failed to copy object: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                   e.awsErrorDetails().errorCode(), e);
           throw e;
       }
   }
```

- Para obtener más información sobre la API, consulta CopyObjectla Referencia AWS SDK for Java 2.x de la API.

`CreateBucket`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateBucket`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Crear un bucket de directorio de S3.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.BucketInfo;
import software.amazon.awssdk.services.s3.model.BucketType;
import software.amazon.awssdk.services.s3.model.CreateBucketConfiguration;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.CreateBucketResponse;
import software.amazon.awssdk.services.s3.model.DataRedundancy;
import software.amazon.awssdk.services.s3.model.LocationInfo;
import software.amazon.awssdk.services.s3.model.LocationType;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;

    /**
     * Creates a new S3 directory bucket in a specified Zone (For example, a
     * specified Availability Zone in this code example).
     *
     * @param s3Client   The S3 client used to create the bucket
     * @param bucketName The name of the bucket to be created
     * @param zone       The region where the bucket will be created
```

```
     * @throws S3Exception if there's an error creating the bucket
     */
    public static void createDirectoryBucket(S3Client s3Client, String bucketName,
String zone) throws S3Exception {
        logger.info("Creating bucket: {}", bucketName);

        CreateBucketConfiguration bucketConfiguration =
CreateBucketConfiguration.builder()
                .location(LocationInfo.builder()
                        .type(LocationType.AVAILABILITY_ZONE)
                        .name(zone).build())
                .bucket(BucketInfo.builder()
                        .type(BucketType.DIRECTORY)
                        .dataRedundancy(DataRedundancy.SINGLE_AVAILABILITY_ZONE)
                        .build())
                .build();
        try {
            CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
                    .bucket(bucketName)
                    .createBucketConfiguration(bucketConfiguration).build();
            CreateBucketResponse response = s3Client.createBucket(bucketRequest);
            logger.info("Bucket created successfully with location: {}",
response.location());
        } catch (S3Exception e) {
            logger.error("Error creating bucket: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta CreateBucketla Referencia AWS SDK for Java 2.x de la API.

`CreateMultipartUpload`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateMultipartUpload`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Crear una carga multiparte de un bucket de directorio.

```
import com.example.s3.util.S3DirectoryBucketUtils;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadRequest;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;

    /**
     * This method creates a multipart upload request that generates a unique upload
     * ID used to track
     * all the upload parts.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to be uploaded
     * @return The upload ID used to track the multipart upload
     */
    public static String createDirectoryBucketMultipartUpload(S3Client s3Client,
 String bucketName, String objectKey) {
        logger.info("Creating multipart upload for object: {} in bucket: {}",
 objectKey, bucketName);

        try {
            // Create a CreateMultipartUploadRequest
            CreateMultipartUploadRequest createMultipartUploadRequest =
 CreateMultipartUploadRequest.builder()
                    .bucket(bucketName)
```

```
                    .key(objectKey)
                    .build();

            // Initiate the multipart upload
            CreateMultipartUploadResponse response =
s3Client.createMultipartUpload(createMultipartUploadRequest);
            String uploadId = response.uploadId();
            logger.info("Multipart upload initiated. Upload ID: {}", uploadId);
            return uploadId;

        } catch (S3Exception e) {
            logger.error("Failed to create multipart upload: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta CreateMultipartUploadla Referencia AWS SDK for Java 2.x de la API.

`DeleteBucket`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteBucket`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Eliminar un bucket de directorio de S3.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
```

```
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;

    /**
     * Deletes the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket to delete
     */
    public static void deleteDirectoryBucket(S3Client s3Client, String bucketName) {
        logger.info("Deleting bucket: {}", bucketName);

        try {
            // Create a DeleteBucketRequest
            DeleteBucketRequest deleteBucketRequest = DeleteBucketRequest.builder()
                    .bucket(bucketName)
                    .build();

            // Delete the bucket
            s3Client.deleteBucket(deleteBucketRequest);
            logger.info("Successfully deleted bucket: {}", bucketName);

        } catch (S3Exception e) {
            logger.error("Failed to delete bucket: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteBucketla Referencia AWS SDK for Java 2.x de la API.

`DeleteBucketEncryption`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteBucketEncryption`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Eliminar la configuración de cifrado de un bucket de directorio.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.DeleteBucketEncryptionRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;

    /**
     * Deletes the encryption configuration from an S3 bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     */
    public static void deleteDirectoryBucketEncryption(S3Client s3Client, String
 bucketName) {
        DeleteBucketEncryptionRequest deleteRequest =
 DeleteBucketEncryptionRequest.builder()
                .bucket(bucketName)
                .build();

        try {
            s3Client.deleteBucketEncryption(deleteRequest);
            logger.info("Bucket encryption deleted for bucket: {}", bucketName);
        } catch (S3Exception e) {
            logger.error("Failed to delete bucket encryption: {} - Error code: {}",
 e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
```

```
    }
```

- Para obtener más información sobre la API, consulta DeleteBucketEncryptionla Referencia AWS SDK for Java 2.x de la API.

`DeleteBucketPolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteBucketPolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Eliminar una política de bucket para un bucket de directorio.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.DeleteBucketPolicyRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getAwsAccountId;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketPolicy;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;


    /**
     * Deletes the bucket policy for the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     */
```

```
    public static void deleteDirectoryBucketPolicy(S3Client s3Client, String
bucketName) {
        logger.info("Deleting policy for bucket: {}", bucketName);

        try {
            // Create a DeleteBucketPolicyRequest
            DeleteBucketPolicyRequest deletePolicyReq =
DeleteBucketPolicyRequest.builder()
                    .bucket(bucketName)
                    .build();

            // Delete the bucket policy
            s3Client.deleteBucketPolicy(deletePolicyReq);
            logger.info("Successfully deleted bucket policy");

        } catch (S3Exception e) {
            logger.error("Failed to delete bucket policy: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteBucketPolicyla Referencia AWS SDK for Java 2.x de la API.

`DeleteObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Eliminar un objeto en un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.DeleteObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.nio.file.Path;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;




   /**
    * Deletes an object from the specified S3 directory bucket.
    *
    * @param s3Client   The S3 client used to interact with S3
    * @param bucketName The name of the directory bucket
    * @param objectKey  The key (name) of the object to be deleted
    */
   public static void deleteDirectoryBucketObject(S3Client s3Client, String
 bucketName, String objectKey) {
       logger.info("Deleting object: {} from bucket: {}", objectKey, bucketName);

       try {
           // Create a DeleteObjectRequest
           DeleteObjectRequest deleteObjectRequest = DeleteObjectRequest.builder()
                   .bucket(bucketName)
                   .key(objectKey)
                   .build();

           // Delete the object
           s3Client.deleteObject(deleteObjectRequest);
           logger.info("Object {} has been deleted", objectKey);

       } catch (S3Exception e) {
           logger.error("Failed to delete object: {} - Error code: {}",
 e.awsErrorDetails().errorMessage(),
                   e.awsErrorDetails().errorCode(), e);
```

```
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteObjectla Referencia AWS SDK for Java 2.x de la API.

`DeleteObjects`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteObjects`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Eliminar varios objetos en un bucket de directorio.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.Delete;
import software.amazon.awssdk.services.s3.model.DeleteObjectsRequest;
import software.amazon.awssdk.services.s3.model.DeleteObjectsResponse;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.net.URISyntaxException;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.util.List;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
```

```
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;


   /**
    * Deletes multiple objects from the specified S3 directory bucket.
    *
    * @param s3Client   The S3 client used to interact with S3
    * @param bucketName The name of the directory bucket
    * @param objectKeys The list of keys (names) of the objects to be deleted
    */
   public static void deleteDirectoryBucketObjects(S3Client s3Client, String
bucketName, List<String> objectKeys) {
       logger.info("Deleting objects from bucket: {}", bucketName);

       try {
           // Create a list of ObjectIdentifier.
           List<ObjectIdentifier> identifiers = objectKeys.stream()
                   .map(key -> ObjectIdentifier.builder().key(key).build())
                   .toList();

           Delete delete = Delete.builder()
                   .objects(identifiers)
                   .build();

           DeleteObjectsRequest deleteObjectsRequest =
DeleteObjectsRequest.builder()
                   .bucket(bucketName)
                   .delete(delete)
                   .build();

           DeleteObjectsResponse deleteObjectsResponse =
s3Client.deleteObjects(deleteObjectsRequest);
           deleteObjectsResponse.deleted().forEach(deleted -> logger.info("Deleted
object: {}", deleted.key()));

       } catch (S3Exception e) {
           logger.error("Failed to delete objects: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                   e.awsErrorDetails().errorCode(), e);
           throw e;
       }
   }
```

- Para obtener más información sobre la API, consulta DeleteObjectsla Referencia AWS SDK for Java 2.x de la API.

`GetBucketEncryption`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetBucketEncryption`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Obtener la configuración de cifrado de un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetBucketEncryptionRequest;
import software.amazon.awssdk.services.s3.model.GetBucketEncryptionResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.ServerSideEncryptionRule;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;

    /**
     * Retrieves the encryption configuration for an S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @return The type of server-side encryption applied to the bucket (e.g.,
     *         AES256, aws:kms)
     */
```

```
   public static String getDirectoryBucketEncryption(S3Client s3Client, String
bucketName) {
       try {
           // Create a GetBucketEncryptionRequest
           GetBucketEncryptionRequest getRequest =
GetBucketEncryptionRequest.builder()
                   .bucket(bucketName)
                   .build();

           // Retrieve the bucket encryption configuration
           GetBucketEncryptionResponse response =
s3Client.getBucketEncryption(getRequest);
           ServerSideEncryptionRule rule =
response.serverSideEncryptionConfiguration().rules().get(0);

           String encryptionType =
rule.applyServerSideEncryptionByDefault().sseAlgorithmAsString();
           logger.info("Bucket encryption algorithm: {}", encryptionType);
           logger.info("KMS Customer Managed Key ID: {}",
rule.applyServerSideEncryptionByDefault().kmsMasterKeyID());
           logger.info("Bucket Key Enabled: {}", rule.bucketKeyEnabled());

           return encryptionType;
       } catch (S3Exception e) {
           logger.error("Failed to get bucket encryption: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                   e.awsErrorDetails().errorCode(), e);
           throw e;
       }
   }
```

- Para obtener más información sobre la API, consulta GetBucketEncryptionla Referencia AWS SDK for Java 2.x de la API.

`GetBucketPolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetBucketPolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Obtener la política de un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetBucketPolicyRequest;
import software.amazon.awssdk.services.s3.model.GetBucketPolicyResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getAwsAccountId;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketPolicy;

    /**
     * Retrieves the bucket policy for the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @return The bucket policy text
     */
    public static String getDirectoryBucketPolicy(S3Client s3Client, String
 bucketName) {
        logger.info("Getting policy for bucket: {}", bucketName);

        try {
            // Create a GetBucketPolicyRequest
            GetBucketPolicyRequest policyReq = GetBucketPolicyRequest.builder()
                    .bucket(bucketName)
                    .build();

            // Retrieve the bucket policy
```

```
            GetBucketPolicyResponse response = s3Client.getBucketPolicy(policyReq);

            // Print and return the policy text
            String policyText = response.policy();
            logger.info("Bucket policy: {}", policyText);
            return policyText;

        } catch (S3Exception e) {
            logger.error("Failed to get bucket policy: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta GetBucketPolicyla Referencia AWS SDK for Java 2.x de la API.

`GetObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Obtener un objeto de un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.ResponseBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.GetObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;
```

```
import java.nio.charset.StandardCharsets;
import java.nio.file.Path;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;

    /**
     * Retrieves an object from the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to be retrieved
     * @return The retrieved object as a ResponseInputStream
     */
    public static boolean getDirectoryBucketObject(S3Client s3Client, String
 bucketName, String objectKey) {
        logger.info("Retrieving object: {} from bucket: {}", objectKey, bucketName);

        try {
            // Create a GetObjectRequest
            GetObjectRequest objectRequest = GetObjectRequest.builder()
                    .key(objectKey)
                    .bucket(bucketName)
                    .build();

            // Retrieve the object as bytes
            ResponseBytes<GetObjectResponse> objectBytes =
 s3Client.getObjectAsBytes(objectRequest);
            byte[] data = objectBytes.asByteArray();

            // Print object contents to console
            String objectContent = new String(data, StandardCharsets.UTF_8);
            logger.info("Object contents: \n{}", objectContent);

            return true;

        } catch (S3Exception e) {
```

```
            logger.error("Failed to retrieve object: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            return false;
        }
    }
```

- Para obtener más información sobre la API, consulta GetObjectla Referencia AWS SDK for Java 2.x de la API.

`GetObjectAttributes`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetObjectAttributes`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Obtener los atributos de un objeto de un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectAttributesRequest;
import software.amazon.awssdk.services.s3.model.GetObjectAttributesResponse;
import software.amazon.awssdk.services.s3.model.ObjectAttributes;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.nio.file.Path;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
```

```
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;

    /**
     * Retrieves attributes for an object in the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to retrieve attributes for
     * @return True if the object attributes are successfully retrieved, false
     *         otherwise
     */
    public static boolean getDirectoryBucketObjectAttributes(S3Client s3Client,
 String bucketName, String objectKey) {
        logger.info("Retrieving attributes for object: {} from bucket: {}",
 objectKey, bucketName);

        try {
            // Create a GetObjectAttributesRequest
            GetObjectAttributesRequest getObjectAttributesRequest =
 GetObjectAttributesRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .objectAttributes(ObjectAttributes.E_TAG,
 ObjectAttributes.STORAGE_CLASS,
                            ObjectAttributes.OBJECT_SIZE)
                    .build();

            // Retrieve the object attributes
            GetObjectAttributesResponse response =
 s3Client.getObjectAttributes(getObjectAttributesRequest);
            logger.info("Attributes for object {}:", objectKey);
            logger.info("ETag: {}", response.eTag());
            logger.info("Storage Class: {}", response.storageClass());
            logger.info("Object Size: {}", response.objectSize());
            return true;

        } catch (S3Exception e) {
            logger.error("Failed to retrieve object attributes: {} - Error code:
 {}",
                    e.awsErrorDetails().errorMessage(),
 e.awsErrorDetails().errorCode(), e);
            return false;
        }
```

```
    }
```

- Para obtener más información sobre la API, consulta GetObjectAttributesla Referencia AWS SDK for Java 2.x de la API.

`HeadBucket`

En el siguiente ejemplo de código, se muestra cómo utilizar `HeadBucket`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Comprobar si el bucket de directorio de S3 especificado existe y es accesible.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.HeadBucketRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;

    /**
     * Checks if the specified S3 directory bucket exists and is accessible.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket to check
     * @return True if the bucket exists and is accessible, false otherwise
     */
    public static boolean headDirectoryBucket(S3Client s3Client, String bucketName)
 {
        logger.info("Checking if bucket exists: {}", bucketName);
```

```
        try {
            // Create a HeadBucketRequest
            HeadBucketRequest headBucketRequest = HeadBucketRequest.builder()
                    .bucket(bucketName)
                    .build();
            // If the bucket doesn't exist, the following statement throws
NoSuchBucketException,
            // which is a subclass of S3Exception.
            s3Client.headBucket(headBucketRequest);
            logger.info("Amazon S3 directory bucket: \"{}\" found.", bucketName);
            return true;

        } catch (S3Exception e) {
            logger.error("Failed to access bucket: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta HeadBucketla Referencia AWS SDK for Java 2.x de la API.

`HeadObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `HeadObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Obtener los metadatos de un objeto en un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
```

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.HeadObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.nio.file.Path;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;

    /**
     * Retrieves metadata for an object in the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to retrieve metadata for
     * @return True if the object exists, false otherwise
     */
    public static boolean headDirectoryBucketObject(S3Client s3Client, String
 bucketName, String objectKey) {
        logger.info("Retrieving metadata for object: {} from bucket: {}", objectKey,
 bucketName);

        try {
            // Create a HeadObjectRequest
            HeadObjectRequest headObjectRequest = HeadObjectRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .build();

            // Retrieve the object metadata
            HeadObjectResponse response = s3Client.headObject(headObjectRequest);
            logger.info("Amazon S3 object: \"{}\" found in bucket: \"{}\" with ETag:
 \"{}\"", objectKey, bucketName,
                    response.eTag());
            logger.info("Content-Type: {}", response.contentType());
            logger.info("Content-Length: {}", response.contentLength());
            logger.info("Last Modified: {}", response.lastModified());
```

```
            return true;

        } catch (S3Exception e) {
            logger.error("Failed to retrieve object metadata: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            return false;
        }
    }
```

- Para obtener más información sobre la API, consulta HeadObjectla Referencia AWS SDK for Java 2.x de la API.

`ListDirectoryBuckets`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListDirectoryBuckets`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Mostrar todos los buckets de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.Bucket;
import software.amazon.awssdk.services.s3.model.ListDirectoryBucketsRequest;
import software.amazon.awssdk.services.s3.model.ListDirectoryBucketsResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.util.List;
import java.util.UUID;
import java.util.stream.Collectors;
```

```
import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;

    /**
     * Lists all S3 directory buckets and no general purpose buckets.
     *
     * @param s3Client The S3 client used to interact with S3
     * @return A list of bucket names
     */
    public static List<String> listDirectoryBuckets(S3Client s3Client) {
        logger.info("Listing all directory buckets");

        try {
            // Create a ListBucketsRequest
            ListDirectoryBucketsRequest listDirectoryBucketsRequest =
 ListDirectoryBucketsRequest.builder().build();

            // Retrieve the list of buckets
            ListDirectoryBucketsResponse response =
 s3Client.listDirectoryBuckets(listDirectoryBucketsRequest);

            // Extract bucket names
            List<String> bucketNames = response.buckets().stream()
                    .map(Bucket::name)
                    .collect(Collectors.toList());

            return bucketNames;
        } catch (S3Exception e) {
            logger.error("Failed to list buckets: {} - Error code: {}",
 e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode());
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta ListDirectoryBucketsla Referencia AWS SDK for Java 2.x de la API.

`ListMultipartUploads`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListMultipartUploads`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Mostrar las cargas multiparte de un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.ListMultipartUploadsRequest;
import software.amazon.awssdk.services.s3.model.ListMultipartUploadsResponse;
import software.amazon.awssdk.services.s3.model.MultipartUpload;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.io.IOException;
import java.nio.file.Path;
import java.util.List;

import static
 com.example.s3.util.S3DirectoryBucketUtils.abortDirectoryBucketMultipartUploads;
import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static
 com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static
 com.example.s3.util.S3DirectoryBucketUtils.multipartUploadForDirectoryBucket;


    /**
     * Lists multipart uploads for the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @return A list of MultipartUpload objects representing the multipart uploads
     */
```

```
   public static List<MultipartUpload> listDirectoryBucketMultipartUploads(S3Client
s3Client, String bucketName) {
       logger.info("Listing in-progress multipart uploads for bucket: {}",
bucketName);

       try {
           // Create a ListMultipartUploadsRequest
           ListMultipartUploadsRequest listMultipartUploadsRequest =
ListMultipartUploadsRequest.builder()
                   .bucket(bucketName)
                   .build();

           // List the multipart uploads
           ListMultipartUploadsResponse response =
s3Client.listMultipartUploads(listMultipartUploadsRequest);
           List<MultipartUpload> uploads = response.uploads();
           for (MultipartUpload upload : uploads) {
               logger.info("In-progress multipart upload: Upload ID: {}, Key: {},
Initiated: {}", upload.uploadId(),
                       upload.key(), upload.initiated());
           }
           return uploads;

       } catch (S3Exception e) {
           logger.error("Failed to list multipart uploads: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                   e.awsErrorDetails().errorCode());
           return List.of(); // Return an empty list if an exception is thrown
       }
   }
```

- Para obtener más información sobre la API, consulta ListMultipartUploadsla Referencia AWS SDK for Java 2.x de la API.

`ListObjectsV2`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListObjectsV2`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Mostrar los objetos de un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Request;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Response;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.S3Object;

import java.nio.file.Path;
import java.util.List;
import java.util.stream.Collectors;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;

    /**
     * Lists objects in the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @return A list of object keys in the bucket
     */
    public static List<String> listDirectoryBucketObjectsV2(S3Client s3Client,
 String bucketName) {
        logger.info("Listing objects in bucket: {}", bucketName);
```

```
        try {
            // Create a ListObjectsV2Request
            ListObjectsV2Request listObjectsV2Request =
ListObjectsV2Request.builder()
                    .bucket(bucketName)
                    .build();

            // Retrieve the list of objects
            ListObjectsV2Response response =
s3Client.listObjectsV2(listObjectsV2Request);

            // Extract and return the object keys
            return response.contents().stream()
                    .map(S3Object::key)
                    .collect(Collectors.toList());

        } catch (S3Exception e) {
            logger.error("Failed to list objects: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode());
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta la ListObjectsversión 2 en la referencia de la AWS SDK for Java 2.x API.

`ListParts`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListParts`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Mostrar las partes de una carga multiparte de un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.ListPartsRequest;
import software.amazon.awssdk.services.s3.model.ListPartsResponse;
import software.amazon.awssdk.services.s3.model.Part;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.io.IOException;
import java.nio.file.Path;
import java.util.List;

import static
 com.example.s3.util.S3DirectoryBucketUtils.abortDirectoryBucketMultipartUploads;
import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static
 com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static
 com.example.s3.util.S3DirectoryBucketUtils.multipartUploadForDirectoryBucket;

    /**
     * Lists the parts of a multipart upload for the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object being uploaded
     * @param uploadId   The upload ID used to track the multipart upload
     * @return A list of Part representing the parts of the multipart upload
     */
    public static List<Part> listDirectoryBucketMultipartUploadParts(S3Client
 s3Client, String bucketName,
            String objectKey, String uploadId) {
        logger.info("Listing parts for object: {} in bucket: {}", objectKey,
 bucketName);

        try {
            // Create a ListPartsRequest
            ListPartsRequest listPartsRequest = ListPartsRequest.builder()
```

```
                    .bucket(bucketName)
                    .uploadId(uploadId)
                    .key(objectKey)
                    .build();

            // List the parts of the multipart upload
            ListPartsResponse response = s3Client.listParts(listPartsRequest);
            List<Part> parts = response.parts();
            for (Part part : parts) {
                logger.info("Uploaded part: Part number = \"{}\", etag = {}",
part.partNumber(), part.eTag());
            }
            return parts;

        } catch (S3Exception e) {
            logger.error("Failed to list parts: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode());
            return List.of(); // Return an empty list if an exception is thrown
        }
    }
```

- Para obtener más información sobre la API, consulta ListPartsla Referencia AWS SDK for Java 2.x de la API.

`PutBucketEncryption`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutBucketEncryption`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Establecer el cifrado de bucket en un bucket de directorio.

```
import org.slf4j.Logger;
```

```
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kms.KmsClient;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutBucketEncryptionRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.ServerSideEncryption;
import software.amazon.awssdk.services.s3.model.ServerSideEncryptionByDefault;
import software.amazon.awssdk.services.s3.model.ServerSideEncryptionConfiguration;
import software.amazon.awssdk.services.s3.model.ServerSideEncryptionRule;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createKmsClient;
import static com.example.s3.util.S3DirectoryBucketUtils.createKmsKey;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.scheduleKeyDeletion;

    /**
     * Sets the default encryption configuration for an S3 bucket as SSE-KMS.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param kmsKeyId   The ID of the customer-managed KMS key
     */
    public static void putDirectoryBucketEncryption(S3Client s3Client, String
 bucketName, String kmsKeyId) {
        // Define the default encryption configuration to use SSE-KMS. For directory
        // buckets, AWS managed KMS keys aren't supported. Only customer-managed
 keys
        // are supported.
        ServerSideEncryptionByDefault encryptionByDefault =
 ServerSideEncryptionByDefault.builder()
                .sseAlgorithm(ServerSideEncryption.AWS_KMS)
                .kmsMasterKeyID(kmsKeyId)
                .build();

        // Create a server-side encryption rule to apply the default encryption
        // configuration. For directory buckets, the bucketKeyEnabled field is
 enforced
        // to be true.
        ServerSideEncryptionRule rule = ServerSideEncryptionRule.builder()
                .bucketKeyEnabled(true)
                .applyServerSideEncryptionByDefault(encryptionByDefault)
                .build();
```

```
        // Create the server-side encryption configuration for the bucket
        ServerSideEncryptionConfiguration encryptionConfiguration =
ServerSideEncryptionConfiguration.builder()
                .rules(rule)
                .build();

        // Create the PutBucketEncryption request
        PutBucketEncryptionRequest putRequest = PutBucketEncryptionRequest.builder()
                .bucket(bucketName)
                .serverSideEncryptionConfiguration(encryptionConfiguration)
                .build();

        // Set the bucket encryption
        try {
            s3Client.putBucketEncryption(putRequest);
            logger.info("SSE-KMS Bucket encryption configuration set for the
directory bucket: {}", bucketName);
        } catch (S3Exception e) {
            logger.error("Failed to set bucket encryption: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode());
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta PutBucketEncryptionla Referencia AWS SDK for Java 2.x de la API.

`PutBucketPolicy`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutBucketPolicy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Aplicar una política de bucket a un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutBucketPolicyRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getAwsAccountId;

    /**
     * Sets the following bucket policy for the specified S3 directory bucket.
     *<pre>
     * {
     *     "Version":"2012-10-17",
     *     "Statement": [
     *         {
     *             "Sid": "AdminPolicy",
     *             "Effect": "Allow",
     *             "Principal": {
     *                 "AWS": "arn:aws:iam::<ACCOUNT_ID>:root"
     *             },
     *             "Action": "s3express:*",
     *             "Resource": "arn:aws:s3express:us-west-2:<ACCOUNT_ID>:bucket/
<DIR_BUCKET_NAME>
     *         }
     *     ]
     * }
     * </pre>
     * This policy grants all S3 directory bucket actions to identities in the same
 account as the bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param policyText The policy text to be applied
     */
    public static void putDirectoryBucketPolicy(S3Client s3Client, String
 bucketName, String policyText) {
        logger.info("Setting policy on bucket: {}", bucketName);
```

```
        logger.info("Policy: {}", policyText);

        try {
            PutBucketPolicyRequest policyReq = PutBucketPolicyRequest.builder()
                    .bucket(bucketName)
                    .policy(policyText)
                    .build();

            s3Client.putBucketPolicy(policyReq);
            logger.info("Bucket policy set successfully!");

        } catch (S3Exception e) {
            logger.error("Failed to set bucket policy: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta PutBucketPolicyla Referencia AWS SDK for Java 2.x de la API.

`PutObject`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutObject`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Colocar un objeto en un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.awscore.exception.AwsErrorDetails;
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.io.UncheckedIOException;
import java.nio.file.Path;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;

    /**
     * Puts an object into the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to be placed in the bucket
     * @param filePath   The path of the file to be uploaded
     */
    public static void putDirectoryBucketObject(S3Client s3Client, String
 bucketName, String objectKey, Path filePath) {
        logger.info("Putting object: {} into bucket: {}", objectKey, bucketName);

        try {
            // Create a PutObjectRequest
            PutObjectRequest putObj = PutObjectRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .build();

            // Upload the object
            s3Client.putObject(putObj, filePath);
            logger.info("Successfully placed {} into bucket {}", objectKey,
 bucketName);

        } catch (UncheckedIOException e) {
            throw S3Exception.builder().message("Failed to read the file: " +
 e.getMessage()).cause(e)
                    .awsErrorDetails(AwsErrorDetails.builder()
                            .errorCode("ClientSideException:FailedToReadFile")
                            .errorMessage(e.getMessage())
```

```
                            .build())
                    .build();
        } catch (S3Exception e) {
            logger.error("Failed to put object: {}", e.getMessage(), e);
            throw e;
        }
    }
```

- Para obtener más información sobre la API, consulta PutObjectla Referencia AWS SDK for Java 2.x de la API.

`UploadPart`

En el siguiente ejemplo de código, se muestra cómo utilizar `UploadPart`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Cargar parte de una carga multiparte de un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.UploadPartRequest;
import software.amazon.awssdk.services.s3.model.UploadPartResponse;

import java.io.IOException;
import java.io.RandomAccessFile;
import java.nio.ByteBuffer;
import java.nio.file.Path;
import java.util.ArrayList;
```

```
import java.util.List;

import static
 com.example.s3.util.S3DirectoryBucketUtils.abortDirectoryBucketMultipartUploads;
import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static
 com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;

    /**
     * This method creates part requests and uploads individual parts to S3.
     * While it uses the UploadPart API to upload a single part, it does so
     * sequentially to handle multiple parts of a file, returning all the completed
     * parts.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to be uploaded
     * @param uploadId   The upload ID used to track the multipart upload
     * @param filePath   The path to the file to be uploaded
     * @return A list of uploaded parts
     * @throws IOException if an I/O error occurs
     */
    public static List<CompletedPart> multipartUploadForDirectoryBucket(S3Client
 s3Client, String bucketName,
            String objectKey, String uploadId, Path filePath) throws IOException {
        logger.info("Uploading parts for object: {} in bucket: {}", objectKey,
 bucketName);

        int partNumber = 1;
        List<CompletedPart> uploadedParts = new ArrayList<>();
        ByteBuffer bb = ByteBuffer.allocate(1024 * 1024 * 5); // 5 MB byte buffer

        // Read the local file, break down into chunks and process
        try (RandomAccessFile file = new RandomAccessFile(filePath.toFile(), "r")) {
            long fileSize = file.length();
            int position = 0;

            // Sequentially upload parts of the file
            while (position < fileSize) {
```

```
                file.seek(position);
                int read = file.getChannel().read(bb);

                bb.flip(); // Swap position and limit before reading from the buffer
                UploadPartRequest uploadPartRequest = UploadPartRequest.builder()
                        .bucket(bucketName)
                        .key(objectKey)
                        .uploadId(uploadId)
                        .partNumber(partNumber)
                        .build();

                UploadPartResponse partResponse = s3Client.uploadPart(
                        uploadPartRequest,
                        RequestBody.fromByteBuffer(bb));

                // Build the uploaded part
                CompletedPart uploadedPart = CompletedPart.builder()
                        .partNumber(partNumber)
                        .eTag(partResponse.eTag())
                        .build();

                // Add the uploaded part to the list
                uploadedParts.add(uploadedPart);

                // Log to indicate the part upload is done
                logger.info("Uploaded part number: {} with ETag: {}", partNumber,
partResponse.eTag());

                bb.clear();
                position += read;
                partNumber++;
            }
        } catch (S3Exception e) {
            logger.error("Failed to list parts: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode());
            throw e;
        }
        return uploadedParts;
    }
```

- Para obtener más información sobre la API, consulta UploadPartla Referencia AWS SDK for Java 2.x de la API.

`UploadPartCopy`

En el siguiente ejemplo de código, se muestra cómo utilizar `UploadPartCopy`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Crear partes de copia en función del tamaño del objeto de origen y copiar las partes individuales en un bucket de directorio.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.HeadObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.UploadPartCopyRequest;
import software.amazon.awssdk.services.s3.model.UploadPartCopyResponse;

import java.io.IOException;
import java.nio.file.Path;
import java.util.ArrayList;
import java.util.List;

import static
 com.example.s3.util.S3DirectoryBucketUtils.abortDirectoryBucketMultipartUploads;
import static
 com.example.s3.util.S3DirectoryBucketUtils.completeDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static
 com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucketMultipartUpload;
```

```
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static
 com.example.s3.util.S3DirectoryBucketUtils.multipartUploadForDirectoryBucket;

    /**
     * Creates copy parts based on source object size and copies over individual
     * parts.
     *
     * @param s3Client          The S3 client used to interact with S3
     * @param sourceBucket      The name of the source bucket
     * @param sourceKey         The key (name) of the source object
     * @param destinationBucket The name of the destination bucket
     * @param destinationKey    The key (name) of the destination object
     * @param uploadId          The upload ID used to track the multipart upload
     * @return A list of completed parts
     */
    public static List<CompletedPart> multipartUploadCopyForDirectoryBucket(S3Client
 s3Client, String sourceBucket,
            String sourceKey, String destinationBucket, String destinationKey,
 String uploadId) {
        // Get the object size to track the end of the copy operation
        HeadObjectRequest headObjectRequest = HeadObjectRequest.builder()
                .bucket(sourceBucket)
                .key(sourceKey)
                .build();
        HeadObjectResponse headObjectResponse =
 s3Client.headObject(headObjectRequest);
        long objectSize = headObjectResponse.contentLength();

        logger.info("Source Object size: {}", objectSize);

        // Copy the object using 20 MB parts
        long partSize = 20 * 1024 * 1024; // 20 MB
        long bytePosition = 0;
        int partNum = 1;
        List<CompletedPart> uploadedParts = new ArrayList<>();

        while (bytePosition < objectSize) {
            long lastByte = Math.min(bytePosition + partSize - 1, objectSize - 1);
```

```
            logger.info("Part Number: {}, Byte Position: {}, Last Byte: {}",
partNum, bytePosition, lastByte);

            try {
                UploadPartCopyRequest uploadPartCopyRequest =
UploadPartCopyRequest.builder()
                        .sourceBucket(sourceBucket)
                        .sourceKey(sourceKey)
                        .destinationBucket(destinationBucket)
                        .destinationKey(destinationKey)
                        .uploadId(uploadId)
                        .copySourceRange("bytes=" + bytePosition + "-" + lastByte)
                        .partNumber(partNum)
                        .build();
                UploadPartCopyResponse uploadPartCopyResponse =
s3Client.uploadPartCopy(uploadPartCopyRequest);

                CompletedPart part = CompletedPart.builder()
                        .partNumber(partNum)
                        .eTag(uploadPartCopyResponse.copyPartResult().eTag())
                        .build();
                uploadedParts.add(part);

                bytePosition += partSize;
                partNum++;
            } catch (S3Exception e) {
                logger.error("Failed to copy part number {}: {} - Error code: {}",
partNum,
                        e.awsErrorDetails().errorMessage(),
e.awsErrorDetails().errorCode());
                throw e;
            }
        }

        return uploadedParts;
    }
```

- Para obtener más información sobre la API, consulta UploadPartCopyla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación de una URL previamente firmada para obtener un objeto

El siguiente ejemplo de código muestra cómo crear una URL previamente firmada de S3 Directory Buckets y obtener un objeto.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Generar una URL GET previamente firmada para acceder a un objeto de un bucket de directorio de S3.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.services.s3.presigner.model.GetObjectPresignRequest;
import software.amazon.awssdk.services.s3.presigner.model.PresignedGetObjectRequest;

import java.nio.file.Path;
import java.time.Duration;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Presigner;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;
```

```
   /**
    * Generates a presigned URL for accessing an object in the specified S3
    * directory bucket.
    *
    * @param s3Presigner The S3 presigner client used to generate the presigned URL
    * @param bucketName  The name of the directory bucket
    * @param objectKey   The key (name) of the object to access
    * @return A presigned URL for accessing the specified object
    */
   public static String generatePresignedGetURLForDirectoryBucket(S3Presigner
s3Presigner, String bucketName,
           String objectKey) {
       logger.info("Generating presigned URL for object: {} in bucket: {}",
objectKey, bucketName);

       try {
           // Create a GetObjectRequest
           GetObjectRequest getObjectRequest = GetObjectRequest.builder()
                   .bucket(bucketName)
                   .key(objectKey)
                   .build();

           // Create a GetObjectPresignRequest
           GetObjectPresignRequest getObjectPresignRequest =
GetObjectPresignRequest.builder()
                   .signatureDuration(Duration.ofMinutes(10)) // Presigned URL
valid for 10 minutes
                   .getObjectRequest(getObjectRequest)
                   .build();

           // Generate the presigned URL
           PresignedGetObjectRequest presignedGetObjectRequest =
s3Presigner.presignGetObject(getObjectPresignRequest);

           // Get the presigned URL
           String presignedURL = presignedGetObjectRequest.url().toString();
           logger.info("Presigned URL: {}", presignedURL);
           return presignedURL;

       } catch (S3Exception e) {
           logger.error("Failed to generate presigned URL: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                   e.awsErrorDetails().errorCode(), e);
           throw e;
```

```
        }
    }
```

- Para obtener más información sobre la API, consulta GetObjectla Referencia AWS SDK for Java 2.x de la API.

SageMaker Ejemplos de IA con SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso de AWS SDK for Java 2.x la SageMaker IA.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Acciones
- Escenarios

Introducción

Hola, SageMaker AI

El siguiente ejemplo de código muestra cómo empezar a utilizar la SageMaker IA.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloSageMaker {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        SageMakerClient sageMakerClient = SageMakerClient.builder()
                .region(region)
                .build();

        listBooks(sageMakerClient);
        sageMakerClient.close();
    }

    public static void listBooks(SageMakerClient sageMakerClient) {
        try {
            ListNotebookInstancesResponse notebookInstancesResponse =
 sageMakerClient.listNotebookInstances();
            List<NotebookInstanceSummary> items =
 notebookInstancesResponse.notebookInstances();
            for (NotebookInstanceSummary item : items) {
                System.out.println("The notebook name is: " +
 item.notebookInstanceName());
            }

        } catch (SageMakerException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }
}
```

- Para obtener más información sobre la API, consulta ListNotebookInstancesla Referencia AWS SDK for Java 2.x de la API.

Acciones

`CreatePipeline`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreatePipeline`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   // Create a pipeline from the example pipeline JSON.
   public static void setupPipeline(SageMakerClient sageMakerClient, String
filePath, String roleArn,
           String functionArn, String pipelineName) {
       System.out.println("Setting up the pipeline.");
       JSONParser parser = new JSONParser();

       // Read JSON and get pipeline definition.
       try (FileReader reader = new FileReader(filePath)) {
           Object obj = parser.parse(reader);
           JSONObject jsonObject = (JSONObject) obj;
           JSONArray stepsArray = (JSONArray) jsonObject.get("Steps");
           for (Object stepObj : stepsArray) {
               JSONObject step = (JSONObject) stepObj;
               if (step.containsKey("FunctionArn")) {
                   step.put("FunctionArn", functionArn);
               }
           }
           System.out.println(jsonObject);
```

```
            // Create the pipeline.
            CreatePipelineRequest pipelineRequest = CreatePipelineRequest.builder()
                    .pipelineDescription("Java SDK example pipeline")
                    .roleArn(roleArn)
                    .pipelineName(pipelineName)
                    .pipelineDefinition(jsonObject.toString())
                    .build();

            sageMakerClient.createPipeline(pipelineRequest);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        } catch (IOException | ParseException e) {
            throw new RuntimeException(e);
        }
    }
```

- Para obtener más información sobre la API, consulta CreatePipelinela Referencia AWS SDK for Java 2.x de la API.

`DeletePipeline`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeletePipeline`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    // Delete a SageMaker pipeline by name.
    public static void deletePipeline(SageMakerClient sageMakerClient, String
pipelineName) {
        DeletePipelineRequest pipelineRequest = DeletePipelineRequest.builder()
                .pipelineName(pipelineName)
                .build();
```

```
        sageMakerClient.deletePipeline(pipelineRequest);
        System.out.println("*** Successfully deleted " + pipelineName);
    }
```

- Para obtener más información sobre la API, consulta DeletePipelinela Referencia AWS SDK for Java 2.x de la API.

`DescribePipelineExecution`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribePipelineExecution`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   // Check the status of a pipeline execution.
   public static void waitForPipelineExecution(SageMakerClient sageMakerClient,
String executionArn)
           throws InterruptedException {
       String status;
       int index = 0;
       do {
           DescribePipelineExecutionRequest pipelineExecutionRequest =
DescribePipelineExecutionRequest.builder()
                   .pipelineExecutionArn(executionArn)
                   .build();

           DescribePipelineExecutionResponse response = sageMakerClient
                   .describePipelineExecution(pipelineExecutionRequest);
           status = response.pipelineExecutionStatusAsString();
           System.out.println(index + ". The Status of the pipeline is " + status);
           TimeUnit.SECONDS.sleep(4);
           index++;
       } while ("Executing".equals(status));
       System.out.println("Pipeline finished with status " + status);
   }
```

- Para obtener más información sobre la API, consulta DescribePipelineExecutionla Referencia AWS SDK for Java 2.x de la API.

`StartPipelineExecution`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartPipelineExecution`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    // Start a pipeline run with job configurations.
    public static String executePipeline(SageMakerClient sageMakerClient, String
 bucketName, String queueUrl,
            String roleArn, String pipelineName) {
        System.out.println("Starting pipeline execution.");
        String inputBucketLocation = "s3://" + bucketName + "/samplefiles/
latlongtest.csv";
        String output = "s3://" + bucketName + "/outputfiles/";
        Gson gson = new GsonBuilder()
                .setFieldNamingPolicy(FieldNamingPolicy.UPPER_CAMEL_CASE)
                .setPrettyPrinting().create();

        // Set up all parameters required to start the pipeline.
        List<Parameter> parameters = new ArrayList<>();
        Parameter para1 = Parameter.builder()
                .name("parameter_execution_role")
                .value(roleArn)
                .build();

        Parameter para2 = Parameter.builder()
                .name("parameter_queue_url")
                .value(queueUrl)
                .build();
```

```
        String inputJSON = "{\n" +
                "  \"DataSourceConfig\": {\n" +
                "    \"S3Data\": {\n" +
                "      \"S3Uri\": \"s3://" + bucketName + "/samplefiles/
latlongtest.csv\"\n" +
                "    },\n" +
                "    \"Type\": \"S3_DATA\"\n" +
                "  },\n" +
                "  \"DocumentType\": \"CSV\"\n" +
                "}";

        System.out.println(inputJSON);

        Parameter para3 = Parameter.builder()
                .name("parameter_vej_input_config")
                .value(inputJSON)
                .build();

        // Create an ExportVectorEnrichmentJobOutputConfig object.
        VectorEnrichmentJobS3Data jobS3Data = VectorEnrichmentJobS3Data.builder()
                .s3Uri(output)
                .build();

        ExportVectorEnrichmentJobOutputConfig outputConfig =
 ExportVectorEnrichmentJobOutputConfig.builder()
                .s3Data(jobS3Data)
                .build();

        String gson4 = gson.toJson(outputConfig);
        Parameter para4 = Parameter.builder()
                .name("parameter_vej_export_config")
                .value(gson4)
                .build();
        System.out.println("parameter_vej_export_config:" +
 gson.toJson(outputConfig));

        // Create a VectorEnrichmentJobConfig object.
        ReverseGeocodingConfig reverseGeocodingConfig =
 ReverseGeocodingConfig.builder()
                .xAttributeName("Longitude")
                .yAttributeName("Latitude")
                .build();

        VectorEnrichmentJobConfig jobConfig = VectorEnrichmentJobConfig.builder()
```

```
                .reverseGeocodingConfig(reverseGeocodingConfig)
                .build();

        String para5JSON = "{\"MapMatchingConfig\":null,\"ReverseGeocodingConfig\":
{\"XAttributeName\":\"Longitude\",\"YAttributeName\":\"Latitude\"}}";
        Parameter para5 = Parameter.builder()
                .name("parameter_step_1_vej_config")
                .value(para5JSON)
                .build();

        System.out.println("parameter_step_1_vej_config:" + gson.toJson(jobConfig));
        parameters.add(para1);
        parameters.add(para2);
        parameters.add(para3);
        parameters.add(para4);
        parameters.add(para5);

        StartPipelineExecutionRequest pipelineExecutionRequest =
 StartPipelineExecutionRequest.builder()
                .pipelineExecutionDescription("Created using Java SDK")
                .pipelineExecutionDisplayName(pipelineName + "-example-execution")
                .pipelineParameters(parameters)
                .pipelineName(pipelineName)
                .build();

        StartPipelineExecutionResponse response =
 sageMakerClient.startPipelineExecution(pipelineExecutionRequest);
        return response.pipelineExecutionArn();
    }
```

- Para obtener más información sobre la API, consulta StartPipelineExecutionla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Introducción a las tareas y las canalizaciones geoespaciales

En el siguiente ejemplo de código, se muestra cómo:

- Configurar los recursos de una canalización
- Configurar una canalización que ejecuta un trabajo geoespacial

- Iniciar la ejecución de una canalización.
- Supervisar el estado de la ejecución.
- Ver el resultado de la canalización.
- Limpiar recursos.

Para obtener más información, consulte Crear y ejecutar SageMaker canalizaciones con AWS SDKs Community.aws.

SDK para Java 2.x

> **Note**
>
> Hay más información sobre. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public class SagemakerWorkflow {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static String eventSourceMapping = "";

    public static void main(String[] args) throws InterruptedException {
        final String usage = "\n" +
                "Usage:\n" +
                "    <sageMakerRoleName> <lambdaRoleName> <functionFileLocation>
 <functionName> <queueName> <bucketName> <lnglatData> <spatialPipelinePath>
 <pipelineName>\n\n"
                +
                "Where:\n" +
                "    sageMakerRoleName - The name of the Amazon SageMaker role.\n\n"
 +
                "    lambdaRoleName - The name of the AWS Lambda role.\n\n" +
                "    functionFileLocation - The file location where the JAR file
 that represents the AWS Lambda function is located.\n\n"
                +
                "    functionName - The name of the AWS Lambda function (for
 example,SageMakerExampleFunction).\n\n" +
                "    queueName - The name of the Amazon Simple Queue Service (Amazon
 SQS) queue.\n\n" +
                "    bucketName - The name of the Amazon Simple Storage Service
 (Amazon S3) bucket.\n\n" +
```

```
                "    lnglatData - The file location of the latlongtest.csv file
required for this use case.\n\n" +
                "    spatialPipelinePath - The file location of the
GeoSpatialPipeline.json file required for this use case.\n\n"
                +
                "    pipelineName - The name of the pipeline to create (for example,
sagemaker-sdk-example-pipeline).\n\n";

        if (args.length != 9) {
            System.out.println(usage);
            System.exit(1);
        }

        String sageMakerRoleName = args[0];
        String lambdaRoleName = args[1];
        String functionFileLocation = args[2];
        String functionName = args[3];
        String queueName = args[4];
        String bucketName = args[5];
        String lnglatData = args[6];
        String spatialPipelinePath = args[7];
        String pipelineName = args[8];
        String handlerName = "org.example.SageMakerLambdaFunction::handleRequest";

        Region region = Region.US_WEST_2;
        SageMakerClient sageMakerClient = SageMakerClient.builder()
                .region(region)
                .build();

        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        LambdaClient lambdaClient = LambdaClient.builder()
                .region(region)
                .build();

        SqsClient sqsClient = SqsClient.builder()
                .region(region)
                .build();

        S3Client s3Client = S3Client.builder()
                .region(region)
                .build();
```

```
        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon SageMaker pipeline example
scenario.");
        System.out.println(
                "\nThis example workflow will guide you through setting up and
running an" +
                        "\nAmazon SageMaker pipeline. The pipeline uses an AWS
Lambda function and an" +
                        "\nAmazon SQS Queue. It runs a vector enrichment reverse
geocode job to" +
                        "\nreverse geocode addresses in an input file and store the
results in an export file.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("First, we will set up the roles, functions, and queue
needed by the SageMaker pipeline.");
        String lambdaRoleArn = checkLambdaRole(iam, lambdaRoleName);
        String sageMakerRoleArn = checkSageMakerRole(iam, sageMakerRoleName);

        String functionArn = checkFunction(lambdaClient, functionName,
functionFileLocation, lambdaRoleArn,
                handlerName);
        String queueUrl = checkQueue(sqsClient, lambdaClient, queueName,
functionName);
        System.out.println("The queue URL is " + queueUrl);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Setting up bucket " + bucketName);
        if (!checkBucket(s3Client, bucketName)) {
            setupBucket(s3Client, bucketName);
            System.out.println("Put " + lnglatData + " into " + bucketName);
            putS3Object(s3Client, bucketName, "latlongtest.csv", lnglatData);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Now we can create and run our pipeline.");
        setupPipeline(sageMakerClient, spatialPipelinePath, sageMakerRoleArn,
functionArn, pipelineName);
        String pipelineExecutionARN = executePipeline(sageMakerClient, bucketName,
queueUrl, sageMakerRoleArn,
```

```
                pipelineName);
        System.out.println("The pipeline execution ARN value is " +
 pipelineExecutionARN);
        waitForPipelineExecution(sageMakerClient, pipelineExecutionARN);
        System.out.println("Getting output results " + bucketName);
        getOutputResults(s3Client, bucketName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The pipeline has completed. To view the pipeline and
 runs " +
                "in SageMaker Studio, follow these instructions:" +
                "\nhttps://docs.aws.amazon.com/sagemaker/latest/dg/pipelines-
studio.html");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Do you want to delete the AWS resources used in this
 Workflow? (y/n)");
        Scanner in = new Scanner(System.in);
        String delResources = in.nextLine();
        if (delResources.compareTo("y") == 0) {
            System.out.println("Lets clean up the AWS resources. Wait 30 seconds");
            TimeUnit.SECONDS.sleep(30);
            deleteEventSourceMapping(lambdaClient);
            deleteSQSQueue(sqsClient, queueName);
            listBucketObjects(s3Client, bucketName);
            deleteBucket(s3Client, bucketName);
            deleteLambdaFunction(lambdaClient, functionName);
            deleteLambdaRole(iam, lambdaRoleName);
            deleteSagemakerRole(iam, sageMakerRoleName);
            deletePipeline(sageMakerClient, pipelineName);
        } else {
            System.out.println("The AWS Resources were not deleted!");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("SageMaker pipeline scenario is complete.");
        System.out.println(DASHES);
    }

    private static void readObject(S3Client s3Client, String bucketName, String key)
 {
```

```
        System.out.println("Output file contents: \n");
        GetObjectRequest objectRequest = GetObjectRequest.builder()
                .bucket(bucketName)
                .key(key)
                .build();

        ResponseBytes<GetObjectResponse> objectBytes =
s3Client.getObjectAsBytes(objectRequest);
        byte[] byteArray = objectBytes.asByteArray();
        String text = new String(byteArray, StandardCharsets.UTF_8);
        System.out.println("Text output: " + text);
    }

    // Display some results from the output directory.
    public static void getOutputResults(S3Client s3Client, String bucketName) {
        System.out.println("Getting output results {bucketName}.");
        ListObjectsRequest listObjectsRequest = ListObjectsRequest.builder()
                .bucket(bucketName)
                .prefix("outputfiles/")
                .build();

        ListObjectsResponse response = s3Client.listObjects(listObjectsRequest);
        List<S3Object> s3Objects = response.contents();
        for (S3Object object : s3Objects) {
            readObject(s3Client, bucketName, object.key());
        }
    }

    // Check the status of a pipeline execution.
    public static void waitForPipelineExecution(SageMakerClient sageMakerClient,
String executionArn)
            throws InterruptedException {
        String status;
        int index = 0;
        do {
            DescribePipelineExecutionRequest pipelineExecutionRequest =
DescribePipelineExecutionRequest.builder()
                    .pipelineExecutionArn(executionArn)
                    .build();

            DescribePipelineExecutionResponse response = sageMakerClient
                    .describePipelineExecution(pipelineExecutionRequest);
            status = response.pipelineExecutionStatusAsString();
            System.out.println(index + ". The Status of the pipeline is " + status);
```

```
            TimeUnit.SECONDS.sleep(4);
            index++;
        } while ("Executing".equals(status));
        System.out.println("Pipeline finished with status " + status);
    }

    // Delete a SageMaker pipeline by name.
    public static void deletePipeline(SageMakerClient sageMakerClient, String
pipelineName) {
        DeletePipelineRequest pipelineRequest = DeletePipelineRequest.builder()
                .pipelineName(pipelineName)
                .build();

        sageMakerClient.deletePipeline(pipelineRequest);
        System.out.println("*** Successfully deleted " + pipelineName);
    }

    // Create a pipeline from the example pipeline JSON.
    public static void setupPipeline(SageMakerClient sageMakerClient, String
filePath, String roleArn,
            String functionArn, String pipelineName) {
        System.out.println("Setting up the pipeline.");
        JSONParser parser = new JSONParser();

        // Read JSON and get pipeline definition.
        try (FileReader reader = new FileReader(filePath)) {
            Object obj = parser.parse(reader);
            JSONObject jsonObject = (JSONObject) obj;
            JSONArray stepsArray = (JSONArray) jsonObject.get("Steps");
            for (Object stepObj : stepsArray) {
                JSONObject step = (JSONObject) stepObj;
                if (step.containsKey("FunctionArn")) {
                    step.put("FunctionArn", functionArn);
                }
            }
            System.out.println(jsonObject);

            // Create the pipeline.
            CreatePipelineRequest pipelineRequest = CreatePipelineRequest.builder()
                    .pipelineDescription("Java SDK example pipeline")
                    .roleArn(roleArn)
                    .pipelineName(pipelineName)
                    .pipelineDefinition(jsonObject.toString())
                    .build();
```

```
            sageMakerClient.createPipeline(pipelineRequest);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        } catch (IOException | ParseException e) {
            throw new RuntimeException(e);
        }
    }

    // Start a pipeline run with job configurations.
    public static String executePipeline(SageMakerClient sageMakerClient, String
 bucketName, String queueUrl,
            String roleArn, String pipelineName) {
        System.out.println("Starting pipeline execution.");
        String inputBucketLocation = "s3://" + bucketName + "/samplefiles/
latlongtest.csv";
        String output = "s3://" + bucketName + "/outputfiles/";
        Gson gson = new GsonBuilder()
                .setFieldNamingPolicy(FieldNamingPolicy.UPPER_CAMEL_CASE)
                .setPrettyPrinting().create();

        // Set up all parameters required to start the pipeline.
        List<Parameter> parameters = new ArrayList<>();
        Parameter para1 = Parameter.builder()
                .name("parameter_execution_role")
                .value(roleArn)
                .build();

        Parameter para2 = Parameter.builder()
                .name("parameter_queue_url")
                .value(queueUrl)
                .build();

        String inputJSON = "{\n" +
                "  \"DataSourceConfig\": {\n" +
                "    \"S3Data\": {\n" +
                "      \"S3Uri\": \"s3://" + bucketName + "/samplefiles/
latlongtest.csv\"\n" +
                "    },\n" +
                "    \"Type\": \"S3_DATA\"\n" +
                "  },\n" +
                "  \"DocumentType\": \"CSV\"\n" +
```

```
                "}";

        System.out.println(inputJSON);

        Parameter para3 = Parameter.builder()
                .name("parameter_vej_input_config")
                .value(inputJSON)
                .build();

        // Create an ExportVectorEnrichmentJobOutputConfig object.
        VectorEnrichmentJobS3Data jobS3Data = VectorEnrichmentJobS3Data.builder()
                .s3Uri(output)
                .build();

        ExportVectorEnrichmentJobOutputConfig outputConfig =
 ExportVectorEnrichmentJobOutputConfig.builder()
                .s3Data(jobS3Data)
                .build();

        String gson4 = gson.toJson(outputConfig);
        Parameter para4 = Parameter.builder()
                .name("parameter_vej_export_config")
                .value(gson4)
                .build();
        System.out.println("parameter_vej_export_config:" +
 gson.toJson(outputConfig));

        // Create a VectorEnrichmentJobConfig object.
        ReverseGeocodingConfig reverseGeocodingConfig =
 ReverseGeocodingConfig.builder()
                .xAttributeName("Longitude")
                .yAttributeName("Latitude")
                .build();

        VectorEnrichmentJobConfig jobConfig = VectorEnrichmentJobConfig.builder()
                .reverseGeocodingConfig(reverseGeocodingConfig)
                .build();

        String para5JSON = "{\"MapMatchingConfig\":null,\"ReverseGeocodingConfig\":
{\"XAttributeName\":\"Longitude\",\"YAttributeName\":\"Latitude\"}}";
        Parameter para5 = Parameter.builder()
                .name("parameter_step_1_vej_config")
                .value(para5JSON)
                .build();
```

```
        System.out.println("parameter_step_1_vej_config:" + gson.toJson(jobConfig));
        parameters.add(para1);
        parameters.add(para2);
        parameters.add(para3);
        parameters.add(para4);
        parameters.add(para5);

        StartPipelineExecutionRequest pipelineExecutionRequest =
StartPipelineExecutionRequest.builder()
                .pipelineExecutionDescription("Created using Java SDK")
                .pipelineExecutionDisplayName(pipelineName + "-example-execution")
                .pipelineParameters(parameters)
                .pipelineName(pipelineName)
                .build();

        StartPipelineExecutionResponse response =
sageMakerClient.startPipelineExecution(pipelineExecutionRequest);
        return response.pipelineExecutionArn();
    }

    public static void deleteEventSourceMapping(LambdaClient lambdaClient) {
        DeleteEventSourceMappingRequest eventSourceMappingRequest =
DeleteEventSourceMappingRequest.builder()
                .uuid(eventSourceMapping)
                .build();

        lambdaClient.deleteEventSourceMapping(eventSourceMappingRequest);
    }

    public static void deleteSagemakerRole(IamClient iam, String roleName) {
        String[] sageMakerRolePolicies = getSageMakerRolePolicies();
        try {
            for (String policy : sageMakerRolePolicies) {
                // First the policy needs to be detached.
                DetachRolePolicyRequest rolePolicyRequest =
DetachRolePolicyRequest.builder()
                        .policyArn(policy)
                        .roleName(roleName)
                        .build();

                iam.detachRolePolicy(rolePolicyRequest);
            }
```

```
            // Delete the role.
            DeleteRoleRequest roleRequest = DeleteRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            iam.deleteRole(roleRequest);
            System.out.println("*** Successfully deleted " + roleName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteLambdaRole(IamClient iam, String roleName) {
        String[] lambdaRolePolicies = getLambdaRolePolicies();
        try {
            for (String policy : lambdaRolePolicies) {
                // First the policy needs to be detached.
                DetachRolePolicyRequest rolePolicyRequest =
DetachRolePolicyRequest.builder()
                        .policyArn(policy)
                        .roleName(roleName)
                        .build();

                iam.detachRolePolicy(rolePolicyRequest);
            }

            // Delete the role.
            DeleteRoleRequest roleRequest = DeleteRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            iam.deleteRole(roleRequest);
            System.out.println("*** Successfully deleted " + roleName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Delete the specific AWS Lambda function.
```

```
    public static void deleteLambdaFunction(LambdaClient awsLambda, String
functionName) {
        try {
            DeleteFunctionRequest request = DeleteFunctionRequest.builder()
                    .functionName(functionName)
                    .build();

            awsLambda.deleteFunction(request);
            System.out.println("*** " + functionName + " was deleted");

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    // Delete the specific S3 bucket.
    public static void deleteBucket(S3Client s3Client, String bucketName) {
        DeleteBucketRequest deleteBucketRequest = DeleteBucketRequest.builder()
                .bucket(bucketName)
                .build();
        s3Client.deleteBucket(deleteBucketRequest);
        System.out.println("*** " + bucketName + " was deleted.");
    }

    public static void listBucketObjects(S3Client s3, String bucketName) {
        try {
            ListObjectsRequest listObjects = ListObjectsRequest
                    .builder()
                    .bucket(bucketName)
                    .build();

            ListObjectsResponse res = s3.listObjects(listObjects);
            List<S3Object> objects = res.contents();
            for (S3Object myValue : objects) {
                System.out.print("\n The name of the key is " + myValue.key());
                deleteBucketObjects(s3, bucketName, myValue.key());
            }

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

```
   public static void deleteBucketObjects(S3Client s3, String bucketName, String
objectName) {
       ArrayList<ObjectIdentifier> toDelete = new ArrayList<>();
       toDelete.add(ObjectIdentifier.builder()
               .key(objectName)
               .build());
       try {
           DeleteObjectsRequest dor = DeleteObjectsRequest.builder()
                   .bucket(bucketName)
                   .delete(Delete.builder()
                           .objects(toDelete).build())
                   .build();

           s3.deleteObjects(dor);
           System.out.println("*** " + bucketName + " objects were deleted.");

       } catch (S3Exception e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }

   // Delete the specific Amazon SQS queue.
   public static void deleteSQSQueue(SqsClient sqsClient, String queueName) {
       try {
           GetQueueUrlRequest getQueueRequest = GetQueueUrlRequest.builder()
                   .queueName(queueName)
                   .build();

           String queueUrl = sqsClient.getQueueUrl(getQueueRequest).queueUrl();
           DeleteQueueRequest deleteQueueRequest = DeleteQueueRequest.builder()
                   .queueUrl(queueUrl)
                   .build();

           sqsClient.deleteQueue(deleteQueueRequest);

       } catch (SqsException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

```
   public static void putS3Object(S3Client s3, String bucketName, String objectKey,
String objectPath) {
       try {
           Map<String, String> metadata = new HashMap<>();
           metadata.put("x-amz-meta-myVal", "test");
           PutObjectRequest putOb = PutObjectRequest.builder()
                   .bucket(bucketName)
                   .key("samplefiles/" + objectKey)
                   .metadata(metadata)
                   .build();

           s3.putObject(putOb, RequestBody.fromFile(new File(objectPath)));
           System.out.println("Successfully placed " + objectKey + " into bucket "
+ bucketName);

       } catch (S3Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }

   public static void setupBucket(S3Client s3Client, String bucketName) {
       try {
           S3Waiter s3Waiter = s3Client.waiter();
           CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
                   .bucket(bucketName)
                   .build();

           s3Client.createBucket(bucketRequest);
           HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
                   .bucket(bucketName)
                   .build();

           // Wait until the bucket is created and print out the response.
           WaiterResponse<HeadBucketResponse> waiterResponse =
s3Waiter.waitUntilBucketExists(bucketRequestWait);
           waiterResponse.matched().response().ifPresent(System.out::println);
           System.out.println(bucketName + " is ready");

       } catch (S3Exception e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

```
   // Set up the SQS queue to use with the pipeline.
   public static String setupQueue(SqsClient sqsClient, LambdaClient lambdaClient,
String queueName,
           String lambdaName) {
       System.out.println("Setting up queue named " + queueName);
       try {
           Map<QueueAttributeName, String> queueAtt = new HashMap<>();
           queueAtt.put(QueueAttributeName.DELAY_SECONDS, "5");
           queueAtt.put(QueueAttributeName.RECEIVE_MESSAGE_WAIT_TIME_SECONDS, "5");
           queueAtt.put(QueueAttributeName.VISIBILITY_TIMEOUT, "300");
           CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                   .queueName(queueName)
                   .attributes(queueAtt)
                   .build();

           sqsClient.createQueue(createQueueRequest);
           System.out.println("\nGet queue url");
           GetQueueUrlResponse getQueueUrlResponse = sqsClient

.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
           TimeUnit.SECONDS.sleep(15);

           connectLambda(sqsClient, lambdaClient, getQueueUrlResponse.queueUrl(),
lambdaName);
           System.out.println("Queue ready with Url " +
getQueueUrlResponse.queueUrl());
           return getQueueUrlResponse.queueUrl();

       } catch (SqsException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       } catch (InterruptedException e) {
           throw new RuntimeException(e);
       }
       return "";
   }

   // Connect the queue to the Lambda function as an event source.
   public static void connectLambda(SqsClient sqsClient, LambdaClient lambdaClient,
String queueUrl,
           String lambdaName) {
       System.out.println("Connecting the Lambda function and queue for the
pipeline.");
```

```
        String queueArn = "";

        // Specify the attributes to retrieve.
        List<QueueAttributeName> atts = new ArrayList<>();
        atts.add(QueueAttributeName.QUEUE_ARN);
        GetQueueAttributesRequest attributesRequest =
GetQueueAttributesRequest.builder()
                .queueUrl(queueUrl)
                .attributeNames(atts)
                .build();

        GetQueueAttributesResponse response =
sqsClient.getQueueAttributes(attributesRequest);
        Map<String, String> queueAtts = response.attributesAsStrings();
        for (Map.Entry<String, String> queueAtt : queueAtts.entrySet()) {
            System.out.println("Key = " + queueAtt.getKey() + ", Value = " +
queueAtt.getValue());
            queueArn = queueAtt.getValue();
        }

        CreateEventSourceMappingRequest eventSourceMappingRequest =
CreateEventSourceMappingRequest.builder()
                .eventSourceArn(queueArn)
                .functionName(lambdaName)
                .build();

        CreateEventSourceMappingResponse response1 =
lambdaClient.createEventSourceMapping(eventSourceMappingRequest);
        eventSourceMapping = response1.uuid();
        System.out.println("The mapping between the event source and Lambda function
was successful");
    }

    // Create an AWS Lambda function.
    public static String createLambdaFunction(LambdaClient awsLambda, String
functionName, String filePath, String role,
            String handler) {
        try {
            LambdaWaiter waiter = awsLambda.waiter();
            InputStream is = new FileInputStream(filePath);
            SdkBytes fileToUpload = SdkBytes.fromInputStream(is);
            FunctionCode code = FunctionCode.builder()
                    .zipFile(fileToUpload)
                    .build();
```

```
            CreateFunctionRequest functionRequest = CreateFunctionRequest.builder()
                    .functionName(functionName)
                    .description("SageMaker example function.")
                    .code(code)
                    .handler(handler)
                    .runtime(Runtime.JAVA11)
                    .timeout(200)
                    .memorySize(1024)
                    .role(role)
                    .build();

            // Create a Lambda function using a waiter.
            CreateFunctionResponse functionResponse =
awsLambda.createFunction(functionRequest);
            GetFunctionRequest getFunctionRequest = GetFunctionRequest.builder()
                    .functionName(functionName)
                    .build();
            WaiterResponse<GetFunctionResponse> waiterResponse =
waiter.waitUntilFunctionExists(getFunctionRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("The function ARN is " +
functionResponse.functionArn());
            return functionResponse.functionArn();

        } catch (LambdaException | FileNotFoundException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createSageMakerRole(IamClient iam, String roleName) {
        String[] sageMakerRolePolicies = getSageMakerRolePolicies();
        System.out.println("Creating a role to use with SageMaker.");
        String assumeRolePolicy = "{" +
                "\"Version\": \"2012-10-17\"," +
                "\"Statement\": [{" +
                "\"Effect\": \"Allow\"," +
                "\"Principal\": {" +
                "\"Service\": [" +
                "\"sagemaker.amazonaws.com\"," +
                "\"sagemaker-geospatial.amazonaws.com\"," +
                "\"lambda.amazonaws.com\"," +
```

```
                "\"s3.amazonaws.com\"" +
                "]" +
                "}," +
                "\"Action\": \"sts:AssumeRole\"" +
                "}]" +
                "}";

        try {
            CreateRoleRequest request = CreateRoleRequest.builder()
                    .roleName(roleName)
                    .assumeRolePolicyDocument(assumeRolePolicy)
                    .description("Created using the AWS SDK for Java")
                    .build();

            CreateRoleResponse roleResult = iam.createRole(request);

            // Attach the policies to the role.
            for (String policy : sageMakerRolePolicies) {
                AttachRolePolicyRequest attachRequest =
AttachRolePolicyRequest.builder()
                        .roleName(roleName)
                        .policyArn(policy)
                        .build();

                iam.attachRolePolicy(attachRequest);
            }

            // Allow time for the role to be ready.
            TimeUnit.SECONDS.sleep(15);
            System.out.println("Role ready with ARN " + roleResult.role().arn());
            return roleResult.role().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        } catch (InterruptedException e) {
            throw new RuntimeException(e);
        }
        return "";
    }

    private static String createLambdaRole(IamClient iam, String roleName) {
        String[] lambdaRolePolicies = getLambdaRolePolicies();
        String assumeRolePolicy = "{" +
```

```
                "\"Version\": \"2012-10-17\"," +
                "\"Statement\": [{" +
                "\"Effect\": \"Allow\"," +
                "\"Principal\": {" +
                "\"Service\": [" +
                "\"sagemaker.amazonaws.com\"," +
                "\"sagemaker-geospatial.amazonaws.com\"," +
                "\"lambda.amazonaws.com\"," +
                "\"s3.amazonaws.com\"" +
                "]" +
                "}," +
                "\"Action\": \"sts:AssumeRole\"" +
                "}]" +
                "}";

        try {
            CreateRoleRequest request = CreateRoleRequest.builder()
                    .roleName(roleName)
                    .assumeRolePolicyDocument(assumeRolePolicy)
                    .description("Created using the AWS SDK for Java")
                    .build();

            CreateRoleResponse roleResult = iam.createRole(request);

            // Attach the policies to the role.
            for (String policy : lambdaRolePolicies) {
                AttachRolePolicyRequest attachRequest =
AttachRolePolicyRequest.builder()
                        .roleName(roleName)
                        .policyArn(policy)
                        .build();

                iam.attachRolePolicy(attachRequest);
            }

            // Allow time for the role to be ready.
            TimeUnit.SECONDS.sleep(15);
            System.out.println("Role ready with ARN " + roleResult.role().arn());
            return roleResult.role().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());

        } catch (InterruptedException e) {
```

```
            throw new RuntimeException(e);
        }
        return "";
    }

    public static String checkFunction(LambdaClient lambdaClient, String
functionName, String filePath, String role,
            String handler) {
        System.out.println("Create an AWS Lambda function used in this workflow.");
        String functionArn;
        try {
            // Does this function already exist.
            GetFunctionRequest functionRequest = GetFunctionRequest.builder()
                    .functionName(functionName)
                    .build();

            GetFunctionResponse response =
lambdaClient.getFunction(functionRequest);
            functionArn = response.configuration().functionArn();

        } catch (LambdaException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            functionArn = createLambdaFunction(lambdaClient, functionName, filePath,
role, handler);
        }
        return functionArn;
    }

    // Check to see if the specific S3 bucket exists. If the S3 bucket exists, this
    // method returns true.
    public static boolean checkBucket(S3Client s3, String bucketName) {
        try {
            HeadBucketRequest headBucketRequest = HeadBucketRequest.builder()
                    .bucket(bucketName)
                    .build();

            s3.headBucket(headBucketRequest);
            System.out.println(bucketName + " exists");
            return true;

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        return false;
```

```
    }

    // Checks to see if the Amazon SQS queue exists. If not, this method creates a
    // new queue
    // and returns the ARN value.
    public static String checkQueue(SqsClient sqsClient, LambdaClient lambdaClient,
String queueName,
            String lambdaName) {
        System.out.println("Creating a queue for this use case.");
        String queueUrl;
        try {
            GetQueueUrlRequest request = GetQueueUrlRequest.builder()
                    .queueName(queueName)
                    .build();

            GetQueueUrlResponse response = sqsClient.getQueueUrl(request);
            queueUrl = response.queueUrl();
            System.out.println(queueUrl);

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            queueUrl = setupQueue(sqsClient, lambdaClient, queueName, lambdaName);
        }
        return queueUrl;
    }

    // Checks to see if the Lambda role exists. If not, this method creates it.
    public static String checkLambdaRole(IamClient iam, String roleName) {
        System.out.println("Creating a role to for AWS Lambda to use.");
        String roleArn;
        try {
            GetRoleRequest roleRequest = GetRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            GetRoleResponse response = iam.getRole(roleRequest);
            roleArn = response.role().arn();
            System.out.println(roleArn);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            roleArn = createLambdaRole(iam, roleName);
        }
        return roleArn;
```

```
    }

    // Checks to see if the SageMaker role exists. If not, this method creates it.
    public static String checkSageMakerRole(IamClient iam, String roleName) {
        System.out.println("Creating a role to for AWS SageMaker to use.");
        String roleArn;
        try {
            GetRoleRequest roleRequest = GetRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            GetRoleResponse response = iam.getRole(roleRequest);
            roleArn = response.role().arn();
            System.out.println(roleArn);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            roleArn = createSageMakerRole(iam, roleName);
        }
        return roleArn;
    }

    private static String[] getSageMakerRolePolicies() {
        String[] sageMakerRolePolicies = new String[3];
        sageMakerRolePolicies[0] = "arn:aws:iam::aws:policy/
AmazonSageMakerFullAccess";
        sageMakerRolePolicies[1] = "arn:aws:iam::aws:policy/" +
 "AmazonSageMakerGeospatialFullAccess";
        sageMakerRolePolicies[2] = "arn:aws:iam::aws:policy/AmazonSQSFullAccess";
        return sageMakerRolePolicies;
    }

    private static String[] getLambdaRolePolicies() {
        String[] lambdaRolePolicies = new String[5];
        lambdaRolePolicies[0] = "arn:aws:iam::aws:policy/AmazonSageMakerFullAccess";
        lambdaRolePolicies[1] = "arn:aws:iam::aws:policy/AmazonSQSFullAccess";
        lambdaRolePolicies[2] = "arn:aws:iam::aws:policy/service-role/" +
 "AmazonSageMakerGeospatialFullAccess";
        lambdaRolePolicies[3] = "arn:aws:iam::aws:policy/service-role/"
                + "AmazonSageMakerServiceCatalogProductsLambdaServiceRolePolicy";
        lambdaRolePolicies[4] = "arn:aws:iam::aws:policy/service-role/" +
 "AWSLambdaSQSQueueExecutionRole";
        return lambdaRolePolicies;
    }
```

```
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreatePipeline
  - DeletePipeline
  - DescribePipelineExecution
  - StartPipelineExecution
  - UpdatePipeline

Ejemplos de Secrets Manager usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Secrets Manager.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`GetSecretValue`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetSecretValue`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.secretsmanager.SecretsManagerClient;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueRequest;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueResponse;
import software.amazon.awssdk.services.secretsmanager.model.SecretsManagerException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * We recommend that you cache your secret values by using client-side caching.
 *
 * Caching secrets improves speed and reduces your costs. For more information,
 * see the following documentation topic:
 *
 * https://docs.aws.amazon.com/secretsmanager/latest/userguide/retrieving-
secrets.html
 */
public class GetSecretValue {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <secretName>\s

                Where:
                    secretName - The name of the secret (for example, tutorials/
MyFirstSecret).\s
                """;
```

```
        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String secretName = args[0];
        Region region = Region.US_EAST_1;
        SecretsManagerClient secretsClient = SecretsManagerClient.builder()
                .region(region)
                .build();

        getValue(secretsClient, secretName);
        secretsClient.close();
    }

    public static void getValue(SecretsManagerClient secretsClient, String
 secretName) {
        try {
            GetSecretValueRequest valueRequest = GetSecretValueRequest.builder()
                    .secretId(secretName)
                    .build();

            GetSecretValueResponse valueResponse =
 secretsClient.getSecretValue(valueRequest);
            String secret = valueResponse.secretString();
            System.out.println(secret);

        } catch (SecretsManagerException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta GetSecretValuela Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon SES usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x con Amazon SES.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`ListIdentities`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListIdentities`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ses.SesClient;
import software.amazon.awssdk.services.ses.model.ListIdentitiesResponse;
import software.amazon.awssdk.services.ses.model.SesException;
import java.io.IOException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListIdentities {

    public static void main(String[] args) throws IOException {
        Region region = Region.US_WEST_2;
        SesClient client = SesClient.builder()
                .region(region)
                .build();

        listSESIdentities(client);
    }

    public static void listSESIdentities(SesClient client) {
        try {
            ListIdentitiesResponse identitiesResponse = client.listIdentities();
            List<String> identities = identitiesResponse.identities();
            for (String identity : identities) {
                System.out.println("The identity is " + identity);
            }

        } catch (SesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListIdentitiesla Referencia AWS SDK for Java 2.x de la API.

`ListTemplates`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListTemplates`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sesv2.SesV2Client;
import software.amazon.awssdk.services.sesv2.model.ListEmailTemplatesRequest;
import software.amazon.awssdk.services.sesv2.model.ListEmailTemplatesResponse;
import software.amazon.awssdk.services.sesv2.model.SesV2Exception;

public class ListTemplates {

    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        SesV2Client sesv2Client = SesV2Client.builder()
                .region(region)
                .build();

        listAllTemplates(sesv2Client);
    }

    public static void listAllTemplates(SesV2Client sesv2Client) {
        try {
            ListEmailTemplatesRequest templatesRequest =
 ListEmailTemplatesRequest.builder()
                    .pageSize(1)
                    .build();

            ListEmailTemplatesResponse response =
 sesv2Client.listEmailTemplates(templatesRequest);
            response.templatesMetadata()
                    .forEach(template -> System.out.println("Template name: " +
 template.templateName()));

        } catch (SesV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }
}
```

- Para obtener más información sobre la API, consulta ListTemplatesla Referencia AWS SDK for Java 2.x de la API.

`SendEmail`

En el siguiente ejemplo de código, se muestra cómo utilizar `SendEmail`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ses.SesClient;
import software.amazon.awssdk.services.ses.model.Content;
import software.amazon.awssdk.services.ses.model.Destination;
import software.amazon.awssdk.services.ses.model.Message;
import software.amazon.awssdk.services.ses.model.Body;
import software.amazon.awssdk.services.ses.model.SendEmailRequest;
import software.amazon.awssdk.services.ses.model.SesException;

import javax.mail.MessagingException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendMessageEmailRequest {
    public static void main(String[] args) {
        final String usage = """
```

```
            Usage:
                <sender> <recipient> <subject>\s

            Where:
                sender - An email address that represents the sender.\s
                recipient -  An email address that represents the recipient.\s
                subject - The  subject line.\s
            """;

    if (args.length != 3) {
        System.out.println(usage);
        System.exit(1);
    }

    String sender = args[0];
    String recipient = args[1];
    String subject = args[2];

    Region region = Region.US_EAST_1;
    SesClient client = SesClient.builder()
            .region(region)
            .build();

    // The HTML body of the email.
    String bodyHTML = "<html>" + "<head></head>" + "<body>" + "<h1>Hello!</h1>"
            + "<p> See the list of customers.</p>" + "</body>" + "</html>";

    try {
        send(client, sender, recipient, subject, bodyHTML);
        client.close();
        System.out.println("Done");

    } catch (MessagingException e) {
        e.printStackTrace();
    }
}

public static void send(SesClient client,
        String sender,
        String recipient,
        String subject,
        String bodyHTML) throws MessagingException {
```

```
        Destination destination = Destination.builder()
                .toAddresses(recipient)
                .build();

        Content content = Content.builder()
                .data(bodyHTML)
                .build();

        Content sub = Content.builder()
                .data(subject)
                .build();

        Body body = Body.builder()
                .html(content)
                .build();

        Message msg = Message.builder()
                .subject(sub)
                .body(body)
                .build();

        SendEmailRequest emailRequest = SendEmailRequest.builder()
                .destination(destination)
                .message(msg)
                .source(sender)
                .build();

        try {
            System.out.println("Attempting to send an email through Amazon SES " +
 "using the AWS SDK for Java...");
            client.sendEmail(emailRequest);

        } catch (SesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}

import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ses.SesClient;
import javax.activation.DataHandler;
import javax.activation.DataSource;
import javax.mail.Message;
```

```
import javax.mail.MessagingException;
import javax.mail.Session;
import javax.mail.internet.AddressException;
import javax.mail.internet.InternetAddress;
import javax.mail.internet.MimeMessage;
import javax.mail.internet.MimeMultipart;
import javax.mail.internet.MimeBodyPart;
import javax.mail.util.ByteArrayDataSource;
import java.io.ByteArrayOutputStream;
import java.io.IOException;
import java.nio.ByteBuffer;
import java.nio.file.Files;
import java.util.Properties;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.services.ses.model.SendRawEmailRequest;
import software.amazon.awssdk.services.ses.model.RawMessage;
import software.amazon.awssdk.services.ses.model.SesException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class SendMessageAttachment {
    public static void main(String[] args) throws IOException {
        final String usage = """

                Usage:
                    <sender> <recipient> <subject> <fileLocation>\s

                Where:
                    sender - An email address that represents the sender.\s
                    recipient -  An email address that represents the recipient.\s
                    subject - The  subject line.\s
                    fileLocation - The location of a Microsoft Excel file to use as
 an attachment (C:/AWS/customers.xls).\s
                """;

        if (args.length != 4) {
            System.out.println(usage);
```

```
            System.exit(1);
        }

        String sender = args[0];
        String recipient = args[1];
        String subject = args[2];
        String fileLocation = args[3];

        // The email body for recipients with non-HTML email clients.
        String bodyText = "Hello,\r\n" + "Please see the attached file for a list "
                + "of customers to contact.";

        // The HTML body of the email.
        String bodyHTML = "<html>" + "<head></head>" + "<body>" + "<h1>Hello!</h1>"
                + "<p>Please see the attached file for a " + "list of customers to
contact.</p>" + "</body>"
                + "</html>";

        Region region = Region.US_WEST_2;
        SesClient client = SesClient.builder()
                .region(region)
                .build();

        try {
            sendemailAttachment(client, sender, recipient, subject, bodyText,
bodyHTML, fileLocation);
            client.close();
            System.out.println("Done");

        } catch (IOException | MessagingException e) {
            e.printStackTrace();
        }
    }

    public static void sendemailAttachment(SesClient client,
            String sender,
            String recipient,
            String subject,
            String bodyText,
            String bodyHTML,
            String fileLocation) throws AddressException, MessagingException,
IOException {

        java.io.File theFile = new java.io.File(fileLocation);
```

```
        byte[] fileContent = Files.readAllBytes(theFile.toPath());

        Session session = Session.getDefaultInstance(new Properties());

        // Create a new MimeMessage object.
        MimeMessage message = new MimeMessage(session);

        // Add subject, from and to lines.
        message.setSubject(subject, "UTF-8");
        message.setFrom(new InternetAddress(sender));
        message.setRecipients(Message.RecipientType.TO,
InternetAddress.parse(recipient));

        // Create a multipart/alternative child container.
        MimeMultipart msgBody = new MimeMultipart("alternative");

        // Create a wrapper for the HTML and text parts.
        MimeBodyPart wrap = new MimeBodyPart();

        // Define the text part.
        MimeBodyPart textPart = new MimeBodyPart();
        textPart.setContent(bodyText, "text/plain; charset=UTF-8");

        // Define the HTML part.
        MimeBodyPart htmlPart = new MimeBodyPart();
        htmlPart.setContent(bodyHTML, "text/html; charset=UTF-8");

        // Add the text and HTML parts to the child container.
        msgBody.addBodyPart(textPart);
        msgBody.addBodyPart(htmlPart);

        // Add the child container to the wrapper object.
        wrap.setContent(msgBody);

        // Create a multipart/mixed parent container.
        MimeMultipart msg = new MimeMultipart("mixed");

        // Add the parent container to the message.
        message.setContent(msg);
        msg.addBodyPart(wrap);

        // Define the attachment.
        MimeBodyPart att = new MimeBodyPart();
        DataSource fds = new ByteArrayDataSource(fileContent,
```

```
                "application/vnd.openxmlformats-
officedocument.spreadsheetml.sheet");
        att.setDataHandler(new DataHandler(fds));

        String reportName = "WorkReport.xls";
        att.setFileName(reportName);

        // Add the attachment to the message.
        msg.addBodyPart(att);

        try {
            System.out.println("Attempting to send an email through Amazon SES " +
 "using the AWS SDK for Java...");

            ByteArrayOutputStream outputStream = new ByteArrayOutputStream();
            message.writeTo(outputStream);

            ByteBuffer buf = ByteBuffer.wrap(outputStream.toByteArray());

            byte[] arr = new byte[buf.remaining()];
            buf.get(arr);

            SdkBytes data = SdkBytes.fromByteArray(arr);
            RawMessage rawMessage = RawMessage.builder()
                    .data(data)
                    .build();

            SendRawEmailRequest rawEmailRequest = SendRawEmailRequest.builder()
                    .rawMessage(rawMessage)
                    .build();

            client.sendRawEmail(rawEmailRequest);

        } catch (SesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Email sent using SesClient with attachment");
    }
}
```

- Para obtener más información sobre la API, consulta SendEmaillla Referencia AWS SDK for Java 2.x de la API.

`SendTemplatedEmail`

En el siguiente ejemplo de código, se muestra cómo utilizar `SendTemplatedEmail`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sesv2.model.Destination;
import software.amazon.awssdk.services.sesv2.model.EmailContent;
import software.amazon.awssdk.services.sesv2.model.SendEmailRequest;
import software.amazon.awssdk.services.sesv2.model.SesV2Exception;
import software.amazon.awssdk.services.sesv2.SesV2Client;
import software.amazon.awssdk.services.sesv2.model.Template;

/**
 * Before running this AWS SDK for Java (v2) example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * Also, make sure that you create a template. See the following documentation
 * topic:
 *
 * https://docs.aws.amazon.com/ses/latest/dg/send-personalized-email-api.html
 */

public class SendEmailTemplate {
    public static void main(String[] args) {
        final String usage = """

                Usage:
```

```
                    <template> <sender> <recipient>\s

                Where:
                    template - The name of the email template.
                    sender - An email address that represents the sender.\s
                    recipient - An email address that represents the recipient.\s
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String templateName = args[0];
        String sender = args[1];
        String recipient = args[2];
        Region region = Region.US_EAST_1;
        SesV2Client sesv2Client = SesV2Client.builder()
                .region(region)
                .build();

        send(sesv2Client, sender, recipient, templateName);
    }

    public static void send(SesV2Client client, String sender, String recipient,
String templateName) {
        Destination destination = Destination.builder()
                .toAddresses(recipient)
                .build();

        /*
         * Specify both name and favorite animal (favoriteanimal) in your code when
         * defining the Template object.
         * If you don't specify all the variables in the template, Amazon SES
doesn't
         * send the email.
         */
        Template myTemplate = Template.builder()
                .templateName(templateName)
                .templateData("{\n" +
                        "  \"name\": \"Jason\"\n," +
                        "  \"favoriteanimal\": \"Cat\"\n" +
                        "}")
                .build();
```

```
        EmailContent emailContent = EmailContent.builder()
                .template(myTemplate)
                .build();

        SendEmailRequest emailRequest = SendEmailRequest.builder()
                .destination(destination)
                .content(emailContent)
                .fromEmailAddress(sender)
                .build();

        try {
            System.out.println("Attempting to send an email based on a template
 using the AWS SDK for Java (v2)...");
            client.sendEmail(emailRequest);
            System.out.println("email based on a template was sent");

        } catch (SesV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta SendTemplatedEmailla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación de una aplicación web para hacer un seguimiento de los datos de DynamoDB

El siguiente ejemplo de código muestra cómo crear una aplicación web que realice un seguimiento de los elementos de trabajo de una tabla de Amazon DynamoDB y use Amazon Simple Email Service (Amazon SES) para enviar informes.

SDK para Java 2.x

> Muestra cómo utilizar la API de Amazon DynamoDB para crear una aplicación web dinámica que haga un seguimiento de los datos de trabajo de DynamoDB.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- DynamoDB
- Amazon SES

Crear una aplicación web para realizar un seguimiento de los datos de Amazon Redshift

El siguiente ejemplo de código muestra cómo crear una aplicación web que realice un seguimiento de los elementos de trabajo e informe al respecto con una base de datos de Amazon Redshift.

SDK para Java 2.x

Muestra cómo crear una aplicación web que realice un seguimiento de los elementos de trabajo almacenados en una base de datos de Amazon Redshift e informe al respecto.

Para obtener el código fuente completo y las instrucciones sobre cómo configurar una API REST de Spring que consulte los datos de Amazon Redshift y para que la utilice una aplicación de React, consulte el ejemplo completo en. GitHub

Servicios utilizados en este ejemplo

- Amazon Redshift
- Amazon SES

Crear un rastreador de elementos de trabajo de Aurora Serverless

El siguiente ejemplos de código muestra cómo crear una aplicación web que realice un seguimiento de los elementos de trabajo de una base de datos de Amazon Aurora sin servidor y use Amazon Simple Email Service (Amazon SES) para enviar informes.

SDK para Java 2.x

Muestra cómo crear una aplicación web que haga un seguimiento de los elementos de trabajo almacenados en una base de datos de Amazon RDS e informe al respecto.

Para obtener el código fuente completo y las instrucciones sobre cómo configurar una API REST de Spring que consulte los datos de Amazon Aurora Serverless y para que la utilice una aplicación React, consulte el ejemplo completo en GitHub.

Para obtener el código fuente completo y las instrucciones sobre cómo configurar y ejecutar un ejemplo que utilice la API JDBC, consulte el ejemplo completo en. GitHub

Servicios utilizados en este ejemplo

- Aurora
- Amazon RDS
- Servicio de datos de Amazon RDS
- Amazon SES

Detección de EPI en imágenes

El siguiente ejemplo de código muestra cómo crear una aplicación que utiliza Amazon Rekognition para detectar equipos de protección individual (EPI) en imágenes.

SDK para Java 2.x

Muestra cómo crear una AWS Lambda función que detecte imágenes con un equipo de protección individual.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- DynamoDB
- Amazon Rekognition
- Amazon S3
- Amazon SES

Detectar objetos en imágenes

El siguiente ejemplo de código muestra cómo crear una aplicación que utilice Amazon Rekognition para detectar objetos por categoría en imágenes.

SDK para Java 2.x

Muestra cómo utilizar la API de Java de Amazon Rekognition para crear una aplicación que utilice Amazon Rekognition para identificar objetos por categoría en imágenes ubicadas en un bucket de Amazon Simple Storage Service (Amazon S3). La aplicación envía al administrador

una notificación por correo electrónico con los resultados mediante Amazon Simple Email Service (Amazon SES).

Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Amazon Rekognition
- Amazon S3
- Amazon SES

Detección de personas y objetos en un video

El siguiente ejemplo de código muestra cómo detectar personas y objetos en un vídeo con Amazon Rekognition.

SDK para Java 2.x

Muestra cómo utilizar la API Java de Amazon Rekognition para crear una aplicación que detecte rostros y objetos en vídeos ubicados en un bucket de Amazon Simple Storage Service (Amazon S3). La aplicación envía al administrador una notificación por correo electrónico con los resultados mediante Amazon Simple Email Service (Amazon SES).

Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Amazon Rekognition
- Amazon S3
- Amazon SES
- Amazon SNS
- Amazon SQS

Uso de Step Functions para invocar funciones de Lambda

El siguiente ejemplo de código muestra cómo crear una máquina de AWS Step Functions estados que invoque AWS Lambda funciones de forma secuencial.

SDK para Java 2.x

Muestra cómo crear un flujo de trabajo AWS sin servidor mediante AWS Step Functions y el. AWS SDK for Java 2.x Cada paso del flujo de trabajo se implementa mediante una AWS Lambda función.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- DynamoDB
- Lambda
- Amazon SES
- Step Functions

Ejemplos de SES API v2 usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso de la AWS SDK for Java 2.x API v2 de Amazon SES.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`CreateContact`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateContact`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
      try {
        // Create a new contact with the provided email address in the
        CreateContactRequest contactRequest = CreateContactRequest.builder()
            .contactListName(CONTACT_LIST_NAME)
            .emailAddress(emailAddress)
            .build();

        sesClient.createContact(contactRequest);
        contacts.add(emailAddress);

        System.out.println("Contact created: " + emailAddress);

        // Send a welcome email to the new contact
        String welcomeHtml = Files.readString(Paths.get("resources/
coupon_newsletter/welcome.html"));
        String welcomeText = Files.readString(Paths.get("resources/
coupon_newsletter/welcome.txt"));

        SendEmailRequest welcomeEmailRequest = SendEmailRequest.builder()
            .fromEmailAddress(this.verifiedEmail)
            .destination(Destination.builder().toAddresses(emailAddress).build())
            .content(EmailContent.builder()
                .simple(
                    Message.builder()
                        .subject(Content.builder().data("Welcome to the Weekly
 Coupons Newsletter").build())
                        .body(Body.builder()
                            .text(Content.builder().data(welcomeText).build())
```

```
                            .html(Content.builder().data(welcomeHtml).build())
                            .build())
                        .build())
                .build())
            .build();
        SendEmailResponse welcomeEmailResponse =
sesClient.sendEmail(welcomeEmailRequest);
        System.out.println("Welcome email sent: " +
welcomeEmailResponse.messageId());
      } catch (AlreadyExistsException e) {
        // If the contact already exists, skip this step for that contact and
proceed
        // with the next contact
        System.out.println("Contact already exists, skipping creation...");
      } catch (Exception e) {
        System.err.println("Error occurred while processing email address " +
emailAddress + ": " + e.getMessage());
        throw e;
      }
    }
```

- Para obtener más información sobre la API, consulta CreateContactla Referencia AWS SDK for Java 2.x de la API.

`CreateContactList`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateContactList`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    try {
      // 2. Create a contact list
      String contactListName = CONTACT_LIST_NAME;
```

```
      CreateContactListRequest createContactListRequest =
 CreateContactListRequest.builder()
          .contactListName(contactListName)
          .build();
      sesClient.createContactList(createContactListRequest);
      System.out.println("Contact list created: " + contactListName);
    } catch (AlreadyExistsException e) {
      System.out.println("Contact list already exists, skipping creation: weekly-
coupons-newsletter");
    } catch (LimitExceededException e) {
      System.err.println("Limit for contact lists has been exceeded.");
      throw e;
    } catch (SesV2Exception e) {
      System.err.println("Error creating contact list: " + e.getMessage());
      throw e;
    }
```

- Para obtener más información sobre la API, consulta CreateContactListla Referencia AWS SDK for Java 2.x de la API.

`CreateEmailIdentity`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateEmailIdentity`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    try {
      CreateEmailIdentityRequest createEmailIdentityRequest =
 CreateEmailIdentityRequest.builder()
          .emailIdentity(verifiedEmail)
          .build();
      sesClient.createEmailIdentity(createEmailIdentityRequest);
      System.out.println("Email identity created: " + verifiedEmail);
    } catch (AlreadyExistsException e) {
```

```
      System.out.println("Email identity already exists, skipping creation: " +
 verifiedEmail);
    } catch (NotFoundException e) {
      System.err.println("The provided email address is not verified: " +
 verifiedEmail);
      throw e;
    } catch (LimitExceededException e) {
      System.err
          .println("You have reached the limit for email identities. Please remove
 some identities and try again.");
      throw e;
    } catch (SesV2Exception e) {
      System.err.println("Error creating email identity: " + e.getMessage());
      throw e;
    }
```

- Para obtener más información sobre la API, consulta CreateEmailIdentityla Referencia AWS SDK for Java 2.x de la API.

`CreateEmailTemplate`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateEmailTemplate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    try {
      // Create an email template named "weekly-coupons"
      String newsletterHtml = loadFile("resources/coupon_newsletter/coupon-
newsletter.html");
      String newsletterText = loadFile("resources/coupon_newsletter/coupon-
newsletter.txt");

      CreateEmailTemplateRequest templateRequest =
 CreateEmailTemplateRequest.builder()
```

```
            .templateName(TEMPLATE_NAME)
            .templateContent(EmailTemplateContent.builder()
                .subject("Weekly Coupons Newsletter")
                .html(newsletterHtml)
                .text(newsletterText)
                .build())
            .build();

        sesClient.createEmailTemplate(templateRequest);

        System.out.println("Email template created: " + TEMPLATE_NAME);
    } catch (AlreadyExistsException e) {
        // If the template already exists, skip this step and proceed with the next
        // operation
        System.out.println("Email template already exists, skipping creation...");
    } catch (LimitExceededException e) {
        // If the limit for email templates is exceeded, fail the workflow and inform
        // the user
        System.err.println("You have reached the limit for email templates. Please
remove some templates and try again.");
        throw e;
    } catch (Exception e) {
        System.err.println("Error occurred while creating email template: " +
e.getMessage());
        throw e;
    }
```

- Para obtener más información sobre la API, consulta CreateEmailTemplatela Referencia AWS SDK for Java 2.x de la API.

`DeleteContactList`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteContactList`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   try {
     // Delete the contact list
     DeleteContactListRequest deleteContactListRequest =
DeleteContactListRequest.builder()
         .contactListName(CONTACT_LIST_NAME)
         .build();

     sesClient.deleteContactList(deleteContactListRequest);

     System.out.println("Contact list deleted: " + CONTACT_LIST_NAME);
   } catch (NotFoundException e) {
     // If the contact list does not exist, log the error and proceed
     System.out.println("Contact list not found. Skipping deletion...");
   } catch (Exception e) {
     System.err.println("Error occurred while deleting the contact list: " +
e.getMessage());
     e.printStackTrace();
   }
```

- Para obtener más información sobre la API, consulta DeleteContactListla Referencia AWS SDK for Java 2.x de la API.

`DeleteEmailIdentity`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteEmailIdentity`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
     try {
       // Delete the email identity
       DeleteEmailIdentityRequest deleteIdentityRequest =
DeleteEmailIdentityRequest.builder()
           .emailIdentity(this.verifiedEmail)
           .build();
```

```
            sesClient.deleteEmailIdentity(deleteIdentityRequest);

            System.out.println("Email identity deleted: " + this.verifiedEmail);
        } catch (NotFoundException e) {
            // If the email identity does not exist, log the error and proceed
            System.out.println("Email identity not found. Skipping deletion...");
        } catch (Exception e) {
            System.err.println("Error occurred while deleting the email identity: " +
e.getMessage());
            e.printStackTrace();
        }
    } else {
        System.out.println("Skipping email identity deletion.");
    }
```

- Para obtener más información sobre la API, consulta DeleteEmailIdentityla Referencia AWS SDK for Java 2.x de la API.

`DeleteEmailTemplate`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteEmailTemplate`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    try {
        // Delete the template
        DeleteEmailTemplateRequest deleteTemplateRequest =
DeleteEmailTemplateRequest.builder()
                .templateName(TEMPLATE_NAME)
                .build();

        sesClient.deleteEmailTemplate(deleteTemplateRequest);
```

```
      System.out.println("Email template deleted: " + TEMPLATE_NAME);
    } catch (NotFoundException e) {
      // If the email template does not exist, log the error and proceed
      System.out.println("Email template not found. Skipping deletion...");
    } catch (Exception e) {
      System.err.println("Error occurred while deleting the email template: " +
e.getMessage());
      e.printStackTrace();
    }
```

- Para obtener más información sobre la API, consulta DeleteEmailTemplatela Referencia AWS SDK for Java 2.x de la API.

`ListContacts`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListContacts`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
      ListContactsRequest contactListRequest = ListContactsRequest.builder()
          .contactListName(CONTACT_LIST_NAME)
          .build();

      List<String> contactEmails;
      try {
        ListContactsResponse contactListResponse =
sesClient.listContacts(contactListRequest);

        contactEmails = contactListResponse.contacts().stream()
            .map(Contact::emailAddress)
            .toList();
      } catch (Exception e) {
        // TODO: Remove when listContacts's GET body issue is resolved.
        contactEmails = this.contacts;
```

```
    }
```

- Para obtener más información sobre la API, consulta ListContactsla Referencia AWS SDK for Java 2.x de la API.

`SendEmail`

En el siguiente ejemplo de código, se muestra cómo utilizar `SendEmail`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Envía un mensaje.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sesv2.model.Body;
import software.amazon.awssdk.services.sesv2.model.Content;
import software.amazon.awssdk.services.sesv2.model.Destination;
import software.amazon.awssdk.services.sesv2.model.EmailContent;
import software.amazon.awssdk.services.sesv2.model.Message;
import software.amazon.awssdk.services.sesv2.model.SendEmailRequest;
import software.amazon.awssdk.services.sesv2.model.SesV2Exception;
import software.amazon.awssdk.services.sesv2.SesV2Client;

/**
 * Before running this AWS SDK for Java (v2) example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class SendEmail {
```

```
    public static void main(String[] args) {
        final String usage = """

                                Usage:
                                    <sender> <recipient> <subject>\s

                                Where:
                                    sender - An email address that represents the
sender.\s
                                    recipient - An email address that represents the
recipient.\s
                                    subject - The subject line.\s
                                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String sender = args[0];
        String recipient = args[1];
        String subject = args[2];

        Region region = Region.US_EAST_1;
        SesV2Client sesv2Client = SesV2Client.builder()
                .region(region)
                .build();

        // The HTML body of the email.
        String bodyHTML = "<html>" + "<head></head>" + "<body>" + "<h1>Hello!</h1>"
                + "<p> See the list of customers.</p>" + "</body>" + "</html>";

        send(sesv2Client, sender, recipient, subject, bodyHTML);
    }

    public static void send(SesV2Client client,
                            String sender,
                            String recipient,
                            String subject,
                            String bodyHTML) {

        Destination destination = Destination.builder()
                .toAddresses(recipient)
                .build();
```

```
        Content content = Content.builder()
                .data(bodyHTML)
                .build();

        Content sub = Content.builder()
                .data(subject)
                .build();

        Body body = Body.builder()
                .html(content)
                .build();

        Message msg = Message.builder()
                .subject(sub)
                .body(body)
                .build();

        EmailContent emailContent = EmailContent.builder()
                .simple(msg)
                .build();

        SendEmailRequest emailRequest = SendEmailRequest.builder()
                .destination(destination)
                .content(emailContent)
                .fromEmailAddress(sender)
                .build();

        try {
            System.out.println("Attempting to send an email through Amazon SES "
                    + "using the AWS SDK for Java...");
            client.sendEmail(emailRequest);
            System.out.println("email was sent");

        } catch (SesV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Envía un mensaje mediante una plantilla.

```
      String coupons = Files.readString(Paths.get("resources/coupon_newsletter/
sample_coupons.json"));
      for (String emailAddress : contactEmails) {
        SendEmailRequest newsletterRequest = SendEmailRequest.builder()
            .destination(Destination.builder().toAddresses(emailAddress).build())
            .content(EmailContent.builder()
                .template(Template.builder()
                    .templateName(TEMPLATE_NAME)
                    .templateData(coupons)
                    .build())
                .build())
            .fromEmailAddress(this.verifiedEmail)
            .listManagementOptions(ListManagementOptions.builder()
                .contactListName(CONTACT_LIST_NAME)
                .build())
            .build();
        SendEmailResponse newsletterResponse =
 sesClient.sendEmail(newsletterRequest);
        System.out.println("Newsletter sent to " + emailAddress + ": " +
 newsletterResponse.messageId());
      }
```

Enviar un mensaje con la información del encabezado.

```
public class SendwithHeader {

    public static void main(String[] args) {
        final String usage = """

            Usage:
                <sender> <recipient> <subject>\s

            Where:
                sender - An email address that represents the sender.\s
                recipient - An email address that represents the recipient.\s
                subject - The subject line.\s
            """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }
```

```
        String sender = args[0];
        String recipient = args[1];
        String subject = args[2];
        Region region = Region.US_EAST_1;
        SesV2Client sesv2Client = SesV2Client.builder()
                .region(region)
                .build();

        String bodyHTML = """
                <html>
                    <head></head>
                    <body>
                        <h1>Hello!</h1>
                        <p>See the list of customers.</p>
                    </body>
                </html>
                """;

        sendWithHeader(sesv2Client, sender, recipient, subject, bodyHTML);
        sesv2Client.close();
    }

    /**
     * Sends an email using the AWS SES V2 client.
     *
     * @param sesv2Client the SES V2 client to use for sending the email
     * @param sender the email address of the sender
     * @param recipient the email address of the recipient
     * @param subject the subject of the email
     * @param bodyHTML the HTML content of the email body
     */
    public static void sendWithHeader(SesV2Client sesv2Client,
                                      String sender,
                                      String recipient,
                                      String subject,
                                      String bodyHTML) {
        EmailContent emailContent = EmailContent.builder()
                .simple(Message.builder()
                        .body(b -> b.html(c ->
c.charset(UTF_8.name()).data(bodyHTML))
                                .text(c -> c.charset(UTF_8.name()).data(bodyHTML)))
                        .subject(c -> c.charset(UTF_8.name()).data(subject))
                        .headers(List.of(
```

```
                                MessageHeader.builder()
                                        .name("List-Unsubscribe")
                                        .value("<https://nutrition.co/?
address=x&topic=x>, <mailto:unsubscribe@nutrition.co?subject=TopicUnsubscribe>")
                                        .build(),
                                MessageHeader.builder()
                                        .name("List-Unsubscribe-Post")
                                        .value("List-Unsubscribe=One-Click")
                                        .build()))
                        .build())
                .build();

        SendEmailRequest request = SendEmailRequest.builder()
                .fromEmailAddress(sender)
                .destination(d -> d.toAddresses(recipient))
                .content(emailContent)
                .build();

        try {
            SendEmailResponse response = sesv2Client.sendEmail(request);
            System.out.println("Email sent! Message ID: " + response.messageId());
        } catch (SesV2Exception e) {
            System.err.println("Failed to send email: " +
 e.awsErrorDetails().errorMessage());
            throw new RuntimeException(e);
        }
    }
}
```

- Para obtener más información sobre la API, consulta SendEmailla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Escenario de Newsletter

El siguiente ejemplo de código muestra cómo ejecutar el escenario de Amazon SES API v2 Newsletter.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    try {
      // 2. Create a contact list
      String contactListName = CONTACT_LIST_NAME;
      CreateContactListRequest createContactListRequest =
 CreateContactListRequest.builder()
          .contactListName(contactListName)
          .build();
      sesClient.createContactList(createContactListRequest);
      System.out.println("Contact list created: " + contactListName);
    } catch (AlreadyExistsException e) {
      System.out.println("Contact list already exists, skipping creation: weekly-
coupons-newsletter");
    } catch (LimitExceededException e) {
      System.err.println("Limit for contact lists has been exceeded.");
      throw e;
    } catch (SesV2Exception e) {
      System.err.println("Error creating contact list: " + e.getMessage());
      throw e;
    }

      try {
        // Create a new contact with the provided email address in the
        CreateContactRequest contactRequest = CreateContactRequest.builder()
            .contactListName(CONTACT_LIST_NAME)
            .emailAddress(emailAddress)
            .build();

        sesClient.createContact(contactRequest);
        contacts.add(emailAddress);

        System.out.println("Contact created: " + emailAddress);

        // Send a welcome email to the new contact
```

```
        String welcomeHtml = Files.readString(Paths.get("resources/
coupon_newsletter/welcome.html"));
        String welcomeText = Files.readString(Paths.get("resources/
coupon_newsletter/welcome.txt"));

        SendEmailRequest welcomeEmailRequest = SendEmailRequest.builder()
            .fromEmailAddress(this.verifiedEmail)
            .destination(Destination.builder().toAddresses(emailAddress).build())
            .content(EmailContent.builder()
                .simple(
                    Message.builder()
                        .subject(Content.builder().data("Welcome to the Weekly
 Coupons Newsletter").build())
                        .body(Body.builder()
                            .text(Content.builder().data(welcomeText).build())
                            .html(Content.builder().data(welcomeHtml).build())
                            .build())
                        .build())
                .build())
            .build();
        SendEmailResponse welcomeEmailResponse =
 sesClient.sendEmail(welcomeEmailRequest);
        System.out.println("Welcome email sent: " +
 welcomeEmailResponse.messageId());
      } catch (AlreadyExistsException e) {
        // If the contact already exists, skip this step for that contact and
 proceed
        // with the next contact
        System.out.println("Contact already exists, skipping creation...");
      } catch (Exception e) {
        System.err.println("Error occurred while processing email address " +
 emailAddress + ": " + e.getMessage());
        throw e;
      }
    }

      ListContactsRequest contactListRequest = ListContactsRequest.builder()
          .contactListName(CONTACT_LIST_NAME)
          .build();

      List<String> contactEmails;
      try {
        ListContactsResponse contactListResponse =
 sesClient.listContacts(contactListRequest);
```

```
        contactEmails = contactListResponse.contacts().stream()
            .map(Contact::emailAddress)
            .toList();
      } catch (Exception e) {
        // TODO: Remove when listContacts's GET body issue is resolved.
        contactEmails = this.contacts;
      }


      String coupons = Files.readString(Paths.get("resources/coupon_newsletter/
sample_coupons.json"));
      for (String emailAddress : contactEmails) {
        SendEmailRequest newsletterRequest = SendEmailRequest.builder()
            .destination(Destination.builder().toAddresses(emailAddress).build())
            .content(EmailContent.builder()
                .template(Template.builder()
                    .templateName(TEMPLATE_NAME)
                    .templateData(coupons)
                    .build())
                .build())
            .fromEmailAddress(this.verifiedEmail)
            .listManagementOptions(ListManagementOptions.builder()
                .contactListName(CONTACT_LIST_NAME)
                .build())
            .build();
        SendEmailResponse newsletterResponse =
 sesClient.sendEmail(newsletterRequest);
        System.out.println("Newsletter sent to " + emailAddress + ": " +
 newsletterResponse.messageId());
      }

    try {
      CreateEmailIdentityRequest createEmailIdentityRequest =
 CreateEmailIdentityRequest.builder()
          .emailIdentity(verifiedEmail)
          .build();
      sesClient.createEmailIdentity(createEmailIdentityRequest);
      System.out.println("Email identity created: " + verifiedEmail);
    } catch (AlreadyExistsException e) {
      System.out.println("Email identity already exists, skipping creation: " +
 verifiedEmail);
    } catch (NotFoundException e) {
```

```
      System.err.println("The provided email address is not verified: " +
 verifiedEmail);
      throw e;
    } catch (LimitExceededException e) {
      System.err
          .println("You have reached the limit for email identities. Please remove
 some identities and try again.");
      throw e;
    } catch (SesV2Exception e) {
      System.err.println("Error creating email identity: " + e.getMessage());
      throw e;
    }

    try {
      // Create an email template named "weekly-coupons"
      String newsletterHtml = loadFile("resources/coupon_newsletter/coupon-
newsletter.html");
      String newsletterText = loadFile("resources/coupon_newsletter/coupon-
newsletter.txt");

      CreateEmailTemplateRequest templateRequest =
 CreateEmailTemplateRequest.builder()
          .templateName(TEMPLATE_NAME)
          .templateContent(EmailTemplateContent.builder()
              .subject("Weekly Coupons Newsletter")
              .html(newsletterHtml)
              .text(newsletterText)
              .build())
          .build();

      sesClient.createEmailTemplate(templateRequest);

      System.out.println("Email template created: " + TEMPLATE_NAME);
    } catch (AlreadyExistsException e) {
      // If the template already exists, skip this step and proceed with the next
      // operation
      System.out.println("Email template already exists, skipping creation...");
    } catch (LimitExceededException e) {
      // If the limit for email templates is exceeded, fail the workflow and inform
      // the user
      System.err.println("You have reached the limit for email templates. Please
 remove some templates and try again.");
      throw e;
    } catch (Exception e) {
```

```
      System.err.println("Error occurred while creating email template: " +
e.getMessage());
      throw e;
    }

    try {
      // Delete the contact list
      DeleteContactListRequest deleteContactListRequest =
DeleteContactListRequest.builder()
          .contactListName(CONTACT_LIST_NAME)
          .build();

      sesClient.deleteContactList(deleteContactListRequest);

      System.out.println("Contact list deleted: " + CONTACT_LIST_NAME);
    } catch (NotFoundException e) {
      // If the contact list does not exist, log the error and proceed
      System.out.println("Contact list not found. Skipping deletion...");
    } catch (Exception e) {
      System.err.println("Error occurred while deleting the contact list: " +
e.getMessage());
      e.printStackTrace();
    }

      try {
        // Delete the email identity
        DeleteEmailIdentityRequest deleteIdentityRequest =
DeleteEmailIdentityRequest.builder()
            .emailIdentity(this.verifiedEmail)
            .build();

        sesClient.deleteEmailIdentity(deleteIdentityRequest);

        System.out.println("Email identity deleted: " + this.verifiedEmail);
      } catch (NotFoundException e) {
        // If the email identity does not exist, log the error and proceed
        System.out.println("Email identity not found. Skipping deletion...");
      } catch (Exception e) {
        System.err.println("Error occurred while deleting the email identity: " +
e.getMessage());
        e.printStackTrace();
      }
    } else {
      System.out.println("Skipping email identity deletion.");
```

```
    }

    try {
      // Delete the template
      DeleteEmailTemplateRequest deleteTemplateRequest =
DeleteEmailTemplateRequest.builder()
          .templateName(TEMPLATE_NAME)
          .build();

      sesClient.deleteEmailTemplate(deleteTemplateRequest);

      System.out.println("Email template deleted: " + TEMPLATE_NAME);
    } catch (NotFoundException e) {
      // If the email template does not exist, log the error and proceed
      System.out.println("Email template not found. Skipping deletion...");
    } catch (Exception e) {
      System.err.println("Error occurred while deleting the email template: " +
e.getMessage());
      e.printStackTrace();
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateContact
  - CreateContactList
  - CreateEmailIdentity
  - CreateEmailTemplate
  - DeleteContactList
  - DeleteEmailIdentity
  - DeleteEmailTemplate
  - ListContacts
  - SendEmail.simple
  - SendEmail.plantilla

Ejemplos de Amazon SNS usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Amazon SNS.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Acciones
- Escenarios
- Ejemplos de tecnología sin servidor

Introducción

Hola Amazon SNS

El siguiente ejemplo de código muestra cómo empezar a utilizar Amazon SNS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
package com.example.sns;
```

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.paginators.ListTopicsIterable;

public class HelloSNS {
    public static void main(String[] args) {
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listSNSTopics(snsClient);
        snsClient.close();
    }

    public static void listSNSTopics(SnsClient snsClient) {
        try {
            ListTopicsIterable listTopics = snsClient.listTopicsPaginator();
            listTopics.stream()
                    .flatMap(r -> r.topics().stream())
                    .forEach(content -> System.out.println(" Topic ARN: " +
 content.topicArn()));

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListTopicsla Referencia AWS SDK for Java 2.x de la API.

Acciones

`CheckIfPhoneNumberIsOptedOut`

En el siguiente ejemplo de código, se muestra cómo utilizar `CheckIfPhoneNumberIsOptedOut`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import
 software.amazon.awssdk.services.sns.model.CheckIfPhoneNumberIsOptedOutRequest;
import
 software.amazon.awssdk.services.sns.model.CheckIfPhoneNumberIsOptedOutResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CheckOptOut {
    public static void main(String[] args) {

        final String usage = """

                Usage:    <phoneNumber>

                Where:
                   phoneNumber - The mobile phone number to look up (for example,
 +1XXX5550100).

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }
```

```
        String phoneNumber = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        checkPhone(snsClient, phoneNumber);
        snsClient.close();
    }

    public static void checkPhone(SnsClient snsClient, String phoneNumber) {
        try {
            CheckIfPhoneNumberIsOptedOutRequest request =
 CheckIfPhoneNumberIsOptedOutRequest.builder()
                    .phoneNumber(phoneNumber)
                    .build();

            CheckIfPhoneNumberIsOptedOutResponse result =
 snsClient.checkIfPhoneNumberIsOptedOut(request);
            System.out.println(
                    result.isOptedOut() + "Phone Number " + phoneNumber + " has
 Opted Out of receiving sns messages." +
                            "\n\nStatus was " +
 result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta CheckIfPhoneNumberIsOptedOutla Referencia AWS SDK for Java 2.x de la API.

`ConfirmSubscription`

En el siguiente ejemplo de código, se muestra cómo utilizar `ConfirmSubscription`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.ConfirmSubscriptionRequest;
import software.amazon.awssdk.services.sns.model.ConfirmSubscriptionResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ConfirmSubscription {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <subscriptionToken> <topicArn>

                Where:
                   subscriptionToken - A short-lived token sent to an endpoint
 during the Subscribe action.
                   topicArn - The ARN of the topic.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String subscriptionToken = args[0];
        String topicArn = args[1];
        SnsClient snsClient = SnsClient.builder()
```

```
                .region(Region.US_EAST_1)
                .build();

        confirmSub(snsClient, subscriptionToken, topicArn);
        snsClient.close();
    }

    public static void confirmSub(SnsClient snsClient, String subscriptionToken,
 String topicArn) {
        try {
            ConfirmSubscriptionRequest request =
 ConfirmSubscriptionRequest.builder()
                    .token(subscriptionToken)
                    .topicArn(topicArn)
                    .build();

            ConfirmSubscriptionResponse result =
 snsClient.confirmSubscription(request);
            System.out.println("\n\nStatus was " +
 result.sdkHttpResponse().statusCode() + "\n\nSubscription Arn: \n\n"
                    + result.subscriptionArn());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ConfirmSubscriptionla Referencia AWS SDK for Java 2.x de la API.

`CreateTopic`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateTopic`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.CreateTopicRequest;
import software.amazon.awssdk.services.sns.model.CreateTopicResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateTopic {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicName>

                Where:
                   topicName - The name of the topic to create (for example,
 mytopic).

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicName = args[0];
        System.out.println("Creating a topic with name: " + topicName);
        SnsClient snsClient = SnsClient.builder()
```

```
                .region(Region.US_EAST_1)
                .build();

        String arnVal = createSNSTopic(snsClient, topicName);
        System.out.println("The topic ARN is" + arnVal);
        snsClient.close();
    }

    public static String createSNSTopic(SnsClient snsClient, String topicName) {
        CreateTopicResponse result;
        try {
            CreateTopicRequest request = CreateTopicRequest.builder()
                    .name(topicName)
                    .build();

            result = snsClient.createTopic(request);
            return result.topicArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulta CreateTopicla Referencia AWS SDK for Java 2.x de la API.

`DeleteTopic`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteTopic`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.DeleteTopicRequest;
import software.amazon.awssdk.services.sns.model.DeleteTopicResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteTopic {
    public static void main(String[] args) {
        final String usage = """

                Usage:     <topicArn>

                Where:
                   topicArn - The ARN of the topic to delete.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        System.out.println("Deleting a topic with name: " + topicArn);
        deleteSNSTopic(snsClient, topicArn);
        snsClient.close();
    }

    public static void deleteSNSTopic(SnsClient snsClient, String topicArn) {
        try {
            DeleteTopicRequest request = DeleteTopicRequest.builder()
                    .topicArn(topicArn)
```

```
                    .build();

            DeleteTopicResponse result = snsClient.deleteTopic(request);
            System.out.println("\n\nStatus was " +
 result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteTopicla Referencia AWS SDK for Java 2.x de la API.

`GetSMSAttributes`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetSMSAttributes`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.GetSubscriptionAttributesRequest;
import software.amazon.awssdk.services.sns.model.GetSubscriptionAttributesResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
import java.util.Iterator;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetSMSAtrributes {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicArn>

                Where:
                   topicArn - The ARN of the topic from which to retrieve
 attributes.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        getSNSAttrutes(snsClient, topicArn);
        snsClient.close();
    }

    public static void getSNSAttrutes(SnsClient snsClient, String topicArn) {
        try {
            GetSubscriptionAttributesRequest request =
 GetSubscriptionAttributesRequest.builder()
                    .subscriptionArn(topicArn)
                    .build();

            // Get the Subscription attributes
            GetSubscriptionAttributesResponse res =
 snsClient.getSubscriptionAttributes(request);
            Map<String, String> map = res.attributes();

            // Iterate through the map
            Iterator iter = map.entrySet().iterator();
            while (iter.hasNext()) {
```

```
                Map.Entry entry = (Map.Entry) iter.next();
                System.out.println("[Key] : " + entry.getKey() + " [Value] : " +
 entry.getValue());
            }

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        System.out.println("\n\nStatus was good");
    }
}
```

- Para obtener información sobre la API, consulta la referencia Get SMSAttributes in AWS SDK for Java 2.x API.

`GetTopicAttributes`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetTopicAttributes`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.GetTopicAttributesRequest;
import software.amazon.awssdk.services.sns.model.GetTopicAttributesResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetTopicAttributes {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicArn>

                Where:
                   topicArn - The ARN of the topic to look up.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        System.out.println("Getting attributes for a topic with name: " + topicArn);
        getSNSTopicAttributes(snsClient, topicArn);
        snsClient.close();
    }

    public static void getSNSTopicAttributes(SnsClient snsClient, String topicArn) {
        try {
            GetTopicAttributesRequest request = GetTopicAttributesRequest.builder()
                    .topicArn(topicArn)
                    .build();

            GetTopicAttributesResponse result =
 snsClient.getTopicAttributes(request);
            System.out.println("\n\nStatus is " +
 result.sdkHttpResponse().statusCode() + "\n\nAttributes: \n\n"
                    + result.attributes());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }
}
```

- Para obtener más información sobre la API, consulta GetTopicAttributesla Referencia AWS SDK for Java 2.x de la API.

`ListPhoneNumbersOptedOut`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListPhoneNumbersOptedOut`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.ListPhoneNumbersOptedOutRequest;
import software.amazon.awssdk.services.sns.model.ListPhoneNumbersOptedOutResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListOptOut {
    public static void main(String[] args) {
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listOpts(snsClient);
        snsClient.close();
```

```
    }

    public static void listOpts(SnsClient snsClient) {
        try {
            ListPhoneNumbersOptedOutRequest request =
 ListPhoneNumbersOptedOutRequest.builder().build();
            ListPhoneNumbersOptedOutResponse result =
 snsClient.listPhoneNumbersOptedOut(request);
            System.out.println("Status is " + result.sdkHttpResponse().statusCode()
 + "\n\nPhone Numbers: \n\n"
                    + result.phoneNumbers());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListPhoneNumbersOptedOutla Referencia AWS SDK for Java 2.x de la API.

`ListSubscriptions`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListSubscriptions`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.ListSubscriptionsRequest;
import software.amazon.awssdk.services.sns.model.ListSubscriptionsResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListSubscriptions {
    public static void main(String[] args) {
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listSNSSubscriptions(snsClient);
        snsClient.close();
    }

    public static void listSNSSubscriptions(SnsClient snsClient) {
        try {
            ListSubscriptionsRequest request = ListSubscriptionsRequest.builder()
                    .build();

            ListSubscriptionsResponse result = snsClient.listSubscriptions(request);
            System.out.println(result.subscriptions());

        } catch (SnsException e) {

            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListSubscriptionsla Referencia AWS SDK for Java 2.x de la API.

`ListTopics`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListTopics`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.ListTopicsRequest;
import software.amazon.awssdk.services.sns.model.ListTopicsResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListTopics {
    public static void main(String[] args) {
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listSNSTopics(snsClient);
        snsClient.close();
    }

    public static void listSNSTopics(SnsClient snsClient) {
        try {
            ListTopicsRequest request = ListTopicsRequest.builder()
                    .build();

            ListTopicsResponse result = snsClient.listTopics(request);
            System.out.println(
                    "Status was " + result.sdkHttpResponse().statusCode() + "\n
\nTopics\n\n" + result.topics());
```

```
        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListTopicsla Referencia AWS SDK for Java 2.x de la API.

`Publish`

En el siguiente ejemplo de código, se muestra cómo utilizar `Publish`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.PublishRequest;
import software.amazon.awssdk.services.sns.model.PublishResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PublishTopic {
    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:    <message> <topicArn>

                Where:
                   message - The message text to send.
                   topicArn - The ARN of the topic to publish.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String message = args[0];
        String topicArn = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();
        pubTopic(snsClient, message, topicArn);
        snsClient.close();
    }

    public static void pubTopic(SnsClient snsClient, String message, String
 topicArn) {
        try {
            PublishRequest request = PublishRequest.builder()
                    .message(message)
                    .topicArn(topicArn)
                    .build();

            PublishResponse result = snsClient.publish(request);
            System.out
                    .println(result.messageId() + " Message sent. Status is " +
 result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte Publish en la Referencia de la API de AWS SDK for Java 2.x .

`SetSMSAttributes`

En el siguiente ejemplo de código, se muestra cómo utilizar `SetSMSAttributes`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SetSmsAttributesRequest;
import software.amazon.awssdk.services.sns.model.SetSmsAttributesResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
import java.util.HashMap;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SetSMSAttributes {
    public static void main(String[] args) {
        HashMap<String, String> attributes = new HashMap<>(1);
        attributes.put("DefaultSMSType", "Transactional");
        attributes.put("UsageReportS3Bucket", "janbucket");

        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();
        setSNSAttributes(snsClient, attributes);
        snsClient.close();
    }
```

```
    public static void setSNSAttributes(SnsClient snsClient, HashMap<String, String>
 attributes) {
        try {
            SetSmsAttributesRequest request = SetSmsAttributesRequest.builder()
                    .attributes(attributes)
                    .build();

            SetSmsAttributesResponse result = snsClient.setSMSAttributes(request);
            System.out.println("Set default Attributes to " + attributes + ". Status
 was "
                    + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta Establecer SMSAttributes en la referencia AWS SDK for Java 2.x de la API.

`SetSubscriptionAttributes`

En el siguiente ejemplo de código, se muestra cómo utilizar `SetSubscriptionAttributes`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import java.util.ArrayList;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class UseMessageFilterPolicy {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <subscriptionArn>

                Where:
                   subscriptionArn - The ARN of a subscription.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String subscriptionArn = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        usePolicy(snsClient, subscriptionArn);
        snsClient.close();
    }

    public static void usePolicy(SnsClient snsClient, String subscriptionArn) {
        try {
            SNSMessageFilterPolicy fp = new SNSMessageFilterPolicy();
            // Add a filter policy attribute with a single value
            fp.addAttribute("store", "example_corp");
            fp.addAttribute("event", "order_placed");

            // Add a prefix attribute
            fp.addAttributePrefix("customer_interests", "bas");

            // Add an anything-but attribute
```

```
            fp.addAttributeAnythingBut("customer_interests", "baseball");

            // Add a filter policy attribute with a list of values
            ArrayList<String> attributeValues = new ArrayList<>();
            attributeValues.add("rugby");
            attributeValues.add("soccer");
            attributeValues.add("hockey");
            fp.addAttribute("customer_interests", attributeValues);

            // Add a numeric attribute
            fp.addAttribute("price_usd", "=", 0);

            // Add a numeric attribute with a range
            fp.addAttributeRange("price_usd", ">", 0, "<=", 100);

            // Apply the filter policy attributes to an Amazon SNS subscription
            fp.apply(snsClient, subscriptionArn);

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta SetSubscriptionAttributesla Referencia AWS SDK for Java 2.x de la API.

`SetTopicAttributes`

En el siguiente ejemplo de código, se muestra cómo utilizar `SetTopicAttributes`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SetTopicAttributesRequest;
import software.amazon.awssdk.services.sns.model.SetTopicAttributesResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SetTopicAttributes {

    public static void main(String[] args) {
        final String usage = """

                Usage:    <attribute> <topicArn> <value>

                Where:
                   attribute - The attribute action to use. Valid parameters are:
 Policy | DisplayName | DeliveryPolicy .
                   topicArn - The ARN of the topic.\s
                   value - The value for the attribute.
                """;

        if (args.length < 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String attribute = args[0];
        String topicArn = args[1];
        String value = args[2];

        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        setTopAttr(snsClient, attribute, topicArn, value);
        snsClient.close();
```

```
    }

    public static void setTopAttr(SnsClient snsClient, String attribute, String
 topicArn, String value) {
        try {
            SetTopicAttributesRequest request = SetTopicAttributesRequest.builder()
                    .attributeName(attribute)
                    .attributeValue(value)
                    .topicArn(topicArn)
                    .build();

            SetTopicAttributesResponse result =
 snsClient.setTopicAttributes(request);
            System.out.println(
                    "\n\nStatus was " + result.sdkHttpResponse().statusCode() + "\n
\nTopic " + request.topicArn()
                            + " updated " + request.attributeName() + " to " +
 request.attributeValue());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta SetTopicAttributesla Referencia AWS SDK for Java 2.x de la API.

`Subscribe`

En el siguiente ejemplo de código, se muestra cómo utilizar `Subscribe`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Suscriba una dirección de correo electrónico a un tema.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SubscribeEmail {
    public static void main(String[] args) {
        final String usage = """
                Usage:     <topicArn> <email>

                Where:
                   topicArn - The ARN of the topic to subscribe.
                   email - The email address to use.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        String email = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        subEmail(snsClient, topicArn, email);
        snsClient.close();
    }

    public static void subEmail(SnsClient snsClient, String topicArn, String email)
 {
        try {
```

```
            SubscribeRequest request = SubscribeRequest.builder()
                    .protocol("email")
                    .endpoint(email)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

            SubscribeResponse result = snsClient.subscribe(request);
            System.out.println("Subscription ARN: " + result.subscriptionArn() + "\n
\n Status is "
                    + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Suscriba un punto de conexión HTTP a un tema.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SubscribeHTTPS {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicArn> <url>

                Where:
```

```
                    topicArn - The ARN of the topic to subscribe.
                    url - The HTTPS endpoint that you want to receive notifications.
                """";

        if (args.length < 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        String url = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        subHTTPS(snsClient, topicArn, url);
        snsClient.close();
    }

    public static void subHTTPS(SnsClient snsClient, String topicArn, String url) {
        try {
            SubscribeRequest request = SubscribeRequest.builder()
                    .protocol("https")
                    .endpoint(url)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

            SubscribeResponse result = snsClient.subscribe(request);
            System.out.println("Subscription ARN is " + result.subscriptionArn() +
 "\n\n Status is "
                    + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Suscriba una función de Lambda a un tema.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SubscribeLambda {

    public static void main(String[] args) {

        final String usage = """

                Usage:    <topicArn> <lambdaArn>

                Where:
                   topicArn - The ARN of the topic to subscribe.
                   lambdaArn - The ARN of an AWS Lambda function.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        String lambdaArn = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String arnValue = subLambda(snsClient, topicArn, lambdaArn);
        System.out.println("Subscription ARN: " + arnValue);
        snsClient.close();
    }
```

```
    public static String subLambda(SnsClient snsClient, String topicArn, String
 lambdaArn) {
        try {
            SubscribeRequest request = SubscribeRequest.builder()
                    .protocol("lambda")
                    .endpoint(lambdaArn)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

            SubscribeResponse result = snsClient.subscribe(request);
            return result.subscriptionArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener detalles sobre la API, consulte Subscribe en la Referencia de la API de AWS SDK for Java 2.x .

`TagResource`

En el siguiente ejemplo de código, se muestra cómo utilizar `TagResource`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.Tag;
```

```
import software.amazon.awssdk.services.sns.model.TagResourceRequest;
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class AddTags {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicArn>

                Where:
                   topicArn - The ARN of the topic to which tags are added.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        addTopicTags(snsClient, topicArn);
        snsClient.close();
    }

    public static void addTopicTags(SnsClient snsClient, String topicArn) {
        try {
            Tag tag = Tag.builder()
                    .key("Team")
                    .value("Development")
                    .build();
```

```
            Tag tag2 = Tag.builder()
                    .key("Environment")
                    .value("Gamma")
                    .build();

            List<Tag> tagList = new ArrayList<>();
            tagList.add(tag);
            tagList.add(tag2);

            TagResourceRequest tagResourceRequest = TagResourceRequest.builder()
                    .resourceArn(topicArn)
                    .tags(tagList)
                    .build();

            snsClient.tagResource(tagResourceRequest);
            System.out.println("Tags have been added to " + topicArn);

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta TagResourcela Referencia AWS SDK for Java 2.x de la API.

`Unsubscribe`

En el siguiente ejemplo de código, se muestra cómo utilizar `Unsubscribe`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.UnsubscribeRequest;
import software.amazon.awssdk.services.sns.model.UnsubscribeResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class Unsubscribe {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <subscriptionArn>

                Where:
                   subscriptionArn - The ARN of the subscription to delete.
                """;

        if (args.length < 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String subscriptionArn = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        unSub(snsClient, subscriptionArn);
        snsClient.close();
    }

    public static void unSub(SnsClient snsClient, String subscriptionArn) {
        try {
            UnsubscribeRequest request = UnsubscribeRequest.builder()
                    .subscriptionArn(subscriptionArn)
                    .build();

            UnsubscribeResponse result = snsClient.unsubscribe(request);
```

```
            System.out.println("\n\nStatus was " +
 result.sdkHttpResponse().statusCode()
                    + "\n\nSubscription was removed for " +
 request.subscriptionArn());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte Unsubscribe en la Referencia de la API de AWS SDK for Java 2.x .

Escenarios

Creación de una aplicación para enviar datos a una tabla de DynamoDB

El siguiente ejemplo de código muestra cómo crear una aplicación que envíe datos a una tabla de Amazon DynamoDB y que le notifique cuando un usuario actualice la tabla.

SDK para Java 2.x

Indica cómo crear una aplicación web dinámica que envíe datos mediante la API Java de Amazon DynamoDB y un mensaje de texto mediante la API Java de Amazon Simple Notification Service.

Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- DynamoDB
- Amazon SNS

Creación de una aplicación de Amazon SNS

El siguiente ejemplo de código muestra cómo crear una aplicación que cuente con la funcionalidad de suscripción y publicación y traduzca mensajes.

SDK para Java 2.x

Indica cómo utilizar la API de Java de Amazon Simple Notification Service para crear una aplicación web con la funcionalidad de suscripción y publicación. Además, esta aplicación de ejemplo también traduce los mensajes.

Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Para obtener el código fuente completo y las instrucciones sobre cómo configurar y ejecutar el ejemplo que usa la API Java Async, consulta el ejemplo completo en. GitHub

Servicios utilizados en este ejemplo

- Amazon SNS
- Amazon Translate

Creación de un punto de conexión de la plataforma para notificaciones push

El siguiente ejemplo de código indica cómo crear un punto de enlace de la plataforma para las notificaciones push de Amazon SNS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.CreatePlatformEndpointRequest;
import software.amazon.awssdk.services.sns.model.CreatePlatformEndpointResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * In addition, create a platform application using the AWS Management Console.
 * See this doc topic:
 *
 * https://docs.aws.amazon.com/sns/latest/dg/mobile-push-send-register.html
 *
 * Without the values created by following the previous link, this code examples
 * does not work.
 */

public class RegistrationExample {
    public static void main(String[] args) {
        final String usage = """

            Usage:     <token> <platformApplicationArn>

            Where:
               token - The device token or registration ID of the mobile device.
 This is a unique
               identifier provided by the device platform (e.g., Apple Push
 Notification Service (APNS) for iOS devices, Firebase Cloud Messaging (FCM)
               for Android devices) when the mobile app is registered to receive
 push notifications.

               platformApplicationArn - The ARN value of platform application. You
 can get this value from the AWS Management Console.\s

            """;

        if (args.length != 2) {
            System.out.println(usage);
            return;
        }

        String token = args[0];
        String platformApplicationArn = args[1];
        SnsClient snsClient = SnsClient.builder()
            .region(Region.US_EAST_1)
            .build();

        createEndpoint(snsClient, token, platformApplicationArn);
    }
```

```
    public static void createEndpoint(SnsClient snsClient, String token, String
 platformApplicationArn) {
        System.out.println("Creating platform endpoint with token " + token);
        try {
            CreatePlatformEndpointRequest endpointRequest =
 CreatePlatformEndpointRequest.builder()
                .token(token)
                .platformApplicationArn(platformApplicationArn)
                .build();

            CreatePlatformEndpointResponse response =
 snsClient.createPlatformEndpoint(endpointRequest);
            System.out.println("The ARN of the endpoint is " +
 response.endpointArn());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
    }
}
```

Creación de una aplicación sin servidor para administrar fotos

En el siguiente ejemplo de código se muestra cómo crear una aplicación sin servidor que permita a los usuarios administrar fotos mediante etiquetas.

SDK para Java 2.x

Muestra cómo desarrollar una aplicación de administración de activos fotográficos que detecte las etiquetas de las imágenes mediante Amazon Rekognition y las almacene para su posterior recuperación.

Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Para profundizar en el origen de este ejemplo, consulte la publicación en Comunidad de AWS.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB

- Lambda
- Amazon Rekognition
- Amazon S3
- Amazon SNS

Creación y publicación en un tema FIFO

El siguiente ejemplo de código indica cómo crear y publicar en un tema FIFO de Amazon SNS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Este ejemplo

- crea un tema FIFO de Amazon SNS, dos colas FIFO de Amazon SQS y una cola estándar.
- suscribe las colas al tema y publica un mensaje en el tema.

La prueba verifica la recepción del mensaje en cada cola. El ejemplo completo también muestra la incorporación de políticas de acceso y, al final, elimina los recursos.

```
public class PriceUpdateExample {
    public final static SnsClient snsClient = SnsClient.create();
    public final static SqsClient sqsClient = SqsClient.create();

    public static void main(String[] args) {

        final String usage = "\n" +
            "Usage: " +
            "    <topicName> <wholesaleQueueFifoName> <retailQueueFifoName>
 <analyticsQueueName>\n\n" +
            "Where:\n" +
            "   fifoTopicName - The name of the FIFO topic that you want to create.
 \n\n" +
            "   wholesaleQueueARN - The name of a SQS FIFO queue that will be
 created for the wholesale consumer. \n\n"
            +
```

```
            "   retailQueueARN - The name of a SQS FIFO queue that will created for
the retail consumer. \n\n" +
            "   analyticsQueueARN - The name of a SQS standard queue that will be
created for the analytics consumer. \n\n";
        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        final String fifoTopicName = args[0];
        final String wholeSaleQueueName = args[1];
        final String retailQueueName = args[2];
        final String analyticsQueueName = args[3];

        // For convenience, the QueueData class holds metadata about a queue: ARN,
URL,
        // name and type.
        List<QueueData> queues = List.of(
            new QueueData(wholeSaleQueueName, QueueType.FIFO),
            new QueueData(retailQueueName, QueueType.FIFO),
            new QueueData(analyticsQueueName, QueueType.Standard));

        // Create queues.
        createQueues(queues);

        // Create a topic.
        String topicARN = createFIFOTopic(fifoTopicName);

        // Subscribe each queue to the topic.
        subscribeQueues(queues, topicARN);

        // Allow the newly created topic to send messages to the queues.
        addAccessPolicyToQueuesFINAL(queues, topicARN);

        // Publish a sample price update message with payload.
        publishPriceUpdate(topicARN, "{\"product\": 214, \"price\": 79.99}",
"Consumables");

        // Clean up resources.
        deleteSubscriptions(queues);
        deleteQueues(queues);
        deleteTopic(topicARN);
    }
```

```
    public static String createFIFOTopic(String topicName) {
        try {
            // Create a FIFO topic by using the SNS service client.
            Map<String, String> topicAttributes = Map.of(
                "FifoTopic", "true",
                "ContentBasedDeduplication", "false",
                "FifoThroughputScope", "MessageGroup");

            CreateTopicRequest topicRequest = CreateTopicRequest.builder()
                .name(topicName)
                .attributes(topicAttributes)
                .build();

            CreateTopicResponse response = snsClient.createTopic(topicRequest);
            String topicArn = response.topicArn();
            System.out.println("The topic ARN is" + topicArn);

            return topicArn;

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static void subscribeQueues(List<QueueData> queues, String topicARN) {
        queues.forEach(queue -> {
            SubscribeRequest subscribeRequest = SubscribeRequest.builder()
                .topicArn(topicARN)
                .endpoint(queue.queueARN)
                .protocol("sqs")
                .build();

            // Subscribe to the endpoint by using the SNS service client.
            // Only Amazon SQS queues can receive notifications from an Amazon SNS
FIFO
            // topic.
            SubscribeResponse subscribeResponse =
snsClient.subscribe(subscribeRequest);
            System.out.println("The queue [" + queue.queueARN + "] subscribed to the
topic [" + topicARN + "]");
            queue.subscriptionARN = subscribeResponse.subscriptionArn();
        });
```

```
    }

    public static void publishPriceUpdate(String topicArn, String payload, String
groupId) {

        try {
            // Create and publish a message that updates the wholesale price.
            String subject = "Price Update";
            String dedupId = UUID.randomUUID().toString();
            String attributeName = "business";
            String attributeValue = "wholesale";

            MessageAttributeValue msgAttValue = MessageAttributeValue.builder()
                .dataType("String")
                .stringValue(attributeValue)
                .build();

            Map<String, MessageAttributeValue> attributes = new HashMap<>();
            attributes.put(attributeName, msgAttValue);
            PublishRequest pubRequest = PublishRequest.builder()
                .topicArn(topicArn)
                .subject(subject)
                .message(payload)
                .messageGroupId(groupId)
                .messageDeduplicationId(dedupId)
                .messageAttributes(attributes)
                .build();

            final PublishResponse response = snsClient.publish(pubRequest);
            System.out.println(response.messageId());
            System.out.println(response.sequenceNumber());
            System.out.println("Message was published to " + topicArn);

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateTopic

- Publish
- Subscribe

Detección de personas y objetos en un video

El siguiente ejemplo de código muestra cómo detectar personas y objetos en un vídeo con Amazon Rekognition.

SDK para Java 2.x

Muestra cómo utilizar la API Java de Amazon Rekognition para crear una aplicación que detecte rostros y objetos en vídeos ubicados en un bucket de Amazon Simple Storage Service (Amazon S3). La aplicación envía al administrador una notificación por correo electrónico con los resultados mediante Amazon Simple Email Service (Amazon SES).

Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Amazon Rekognition
- Amazon S3
- Amazon SES
- Amazon SNS
- Amazon SQS

Publicación de mensajes SMS en un tema

En el siguiente ejemplo de código, se muestra cómo:

- Crear un tema de Amazon SNS
- Suscribir números de teléfono al tema
- Publique mensajes SMS en el tema para que todos los números de teléfono suscritos reciban el mensaje a la vez.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Cree un tema y devuelva su ARN.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.CreateTopicRequest;
import software.amazon.awssdk.services.sns.model.CreateTopicResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateTopic {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicName>

                Where:
                   topicName - The name of the topic to create (for example,
 mytopic).

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicName = args[0];
        System.out.println("Creating a topic with name: " + topicName);
```

```
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String arnVal = createSNSTopic(snsClient, topicName);
        System.out.println("The topic ARN is" + arnVal);
        snsClient.close();
    }

    public static String createSNSTopic(SnsClient snsClient, String topicName) {
        CreateTopicResponse result;
        try {
            CreateTopicRequest request = CreateTopicRequest.builder()
                    .name(topicName)
                    .build();

            result = snsClient.createTopic(request);
            return result.topicArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

Suscriba un punto de enlace a un tema.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class SubscribeTextSMS {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicArn> <phoneNumber>

                Where:
                   topicArn - The ARN of the topic to subscribe.
                   phoneNumber - A mobile phone number that receives notifications
 (for example, +1XXX5550100).
                """;

        if (args.length < 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        String phoneNumber = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        subTextSNS(snsClient, topicArn, phoneNumber);
        snsClient.close();
    }

    public static void subTextSNS(SnsClient snsClient, String topicArn, String
 phoneNumber) {
        try {
            SubscribeRequest request = SubscribeRequest.builder()
                    .protocol("sms")
                    .endpoint(phoneNumber)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

            SubscribeResponse result = snsClient.subscribe(request);
            System.out.println("Subscription ARN: " + result.subscriptionArn() + "\n
\n Status is "
                    + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
```

```
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Establezca atributos en el mensaje, como el ID del remitente, el precio máximo y su tipo. Los atributos de mensaje son opcionales.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SetSmsAttributesRequest;
import software.amazon.awssdk.services.sns.model.SetSmsAttributesResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
import java.util.HashMap;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SetSMSAttributes {
    public static void main(String[] args) {
        HashMap<String, String> attributes = new HashMap<>(1);
        attributes.put("DefaultSMSType", "Transactional");
        attributes.put("UsageReportS3Bucket", "janbucket");

        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();
        setSNSAttributes(snsClient, attributes);
        snsClient.close();
    }

    public static void setSNSAttributes(SnsClient snsClient, HashMap<String, String>
 attributes) {
        try {
            SetSmsAttributesRequest request = SetSmsAttributesRequest.builder()
                    .attributes(attributes)
```

```
                    .build();

            SetSmsAttributesResponse result = snsClient.setSMSAttributes(request);
            System.out.println("Set default Attributes to " + attributes + ". Status
 was "
                    + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Publique un mensaje en un tema. El mensaje se envía a cada suscriptor.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.PublishRequest;
import software.amazon.awssdk.services.sns.model.PublishResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PublishTextSMS {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <message> <phoneNumber>

                Where:
                   message - The message text to send.
                   phoneNumber - The mobile phone number to which a message is sent
 (for example, +1XXX5550100).\s
                """;
```

```
        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String message = args[0];
        String phoneNumber = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();
        pubTextSMS(snsClient, message, phoneNumber);
        snsClient.close();
    }

    public static void pubTextSMS(SnsClient snsClient, String message, String
 phoneNumber) {
        try {
            PublishRequest request = PublishRequest.builder()
                    .message(message)
                    .phoneNumber(phoneNumber)
                    .build();

            PublishResponse result = snsClient.publish(request);
            System.out
                    .println(result.messageId() + " Message sent. Status was " +
 result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Publicación de un mensaje SMS

En el siguiente ejemplo de código se muestra cómo publicar mensajes SMS mediante Amazon SNS.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.PublishRequest;
import software.amazon.awssdk.services.sns.model.PublishResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PublishTextSMS {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <message> <phoneNumber>

                Where:
                   message - The message text to send.
                   phoneNumber - The mobile phone number to which a message is sent
 (for example, +1XXX5550100).\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String message = args[0];
        String phoneNumber = args[1];
        SnsClient snsClient = SnsClient.builder()
```

```
                .region(Region.US_EAST_1)
                .build();
        pubTextSMS(snsClient, message, phoneNumber);
        snsClient.close();
    }

    public static void pubTextSMS(SnsClient snsClient, String message, String
 phoneNumber) {
        try {
            PublishRequest request = PublishRequest.builder()
                    .message(message)
                    .phoneNumber(phoneNumber)
                    .build();

            PublishResponse result = snsClient.publish(request);
            System.out
                    .println(result.messageId() + " Message sent. Status was " +
 result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte Publish en la Referencia de la API de AWS SDK for Java 2.x .

Publicación de mensajes en colas

En el siguiente ejemplo de código, se muestra cómo:

- Crear un tema (FIFO o no FIFO)
- Suscribir varias colas al tema con la opción de aplicar un filtro
- Publicar mensajes en el tema
- Sondear las colas en busca de los mensajes recibidos

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
package com.example.sns;

import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.CreateTopicRequest;
import software.amazon.awssdk.services.sns.model.CreateTopicResponse;
import software.amazon.awssdk.services.sns.model.DeleteTopicRequest;
import software.amazon.awssdk.services.sns.model.DeleteTopicResponse;
import software.amazon.awssdk.services.sns.model.MessageAttributeValue;
import software.amazon.awssdk.services.sns.model.PublishRequest;
import software.amazon.awssdk.services.sns.model.PublishResponse;
import software.amazon.awssdk.services.sns.model.SetSubscriptionAttributesRequest;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;
import software.amazon.awssdk.services.sns.model.UnsubscribeRequest;
import software.amazon.awssdk.services.sns.model.UnsubscribeResponse;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchRequestEntry;
import software.amazon.awssdk.services.sqs.model.DeleteQueueRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueAttributesRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueAttributesResponse;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlResponse;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.QueueAttributeName;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.SetQueueAttributesRequest;
import software.amazon.awssdk.services.sqs.model.SqsException;
```

```
import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;
import java.util.Scanner;

import com.google.gson.Gson;
import com.google.gson.JsonArray;
import com.google.gson.JsonObject;
import com.google.gson.JsonPrimitive;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 * <p>
 * This Java example performs these tasks:
 * <p>
 * 1. Gives the user three options to choose from.
 * 2. Creates an Amazon Simple Notification Service (Amazon SNS) topic.
 * 3. Creates an Amazon Simple Queue Service (Amazon SQS) queue.
 * 4. Gets the SQS queue Amazon Resource Name (ARN) attribute.
 * 5. Attaches an AWS Identity and Access Management (IAM) policy to the queue.
 * 6. Subscribes to the SQS queue.
 * 7. Publishes a message to the topic.
 * 8. Displays the messages.
 * 9. Deletes the received message.
 * 10. Unsubscribes from the topic.
 * 11. Deletes the SNS topic.
 */
public class SNSWorkflow {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) {
        final String usage = "\n" +
            "Usage:\n" +
            "    <fifoQueueARN>\n\n" +
            "Where:\n" +
            "    accountId - Your AWS account Id value.";

        if (args.length != 1) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        SnsClient snsClient = SnsClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
            .build();

        SqsClient sqsClient = SqsClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
            .build();

        Scanner in = new Scanner(System.in);
        String accountId = args[0];
        String useFIFO;
        String duplication = "n";
        String topicName;
        String deduplicationID = null;
        String groupId = null;

        String topicArn;
        String sqsQueueName;
        String sqsQueueUrl;
        String sqsQueueArn;
        String subscriptionArn;
        boolean selectFIFO = false;

        String message;
        List<Message> messageList;
        List<String> filterList = new ArrayList<>();
        String msgAttValue = "";

        System.out.println(DASHES);
        System.out.println("Welcome to messaging with topics and queues.");
        System.out.println("In this scenario, you will create an SNS topic and
subscribe an SQS queue to the topic.\n" +
            "You can select from several options for configuring the topic and the
subscriptions for the queue.\n" +
            "You can then post to the topic and see the results in the queue.");
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("SNS topics can be configured as FIFO (First-In-First-
Out).\n" +
            "FIFO topics deliver messages in order and support deduplication and
 message filtering.\n" +
            "Would you like to work with FIFO topics? (y/n)");
        useFIFO = in.nextLine();
        if (useFIFO.compareTo("y") == 0) {
            selectFIFO = true;
            System.out.println("You have selected FIFO");
            System.out.println(" Because you have chosen a FIFO topic, deduplication
 is supported.\n" +
                "        Deduplication IDs are either set in the message or
 automatically generated from content using a hash function.\n"
                +
                "        If a message is successfully published to an SNS FIFO
 topic, any message published and determined to have the same deduplication ID,\n"
                +
                "        within the five-minute deduplication interval, is accepted
 but not delivered.\n" +
                "        For more information about deduplication, see https://
docs.aws.amazon.com/sns/latest/dg/fifo-message-dedup.html.");

            System.out.println(
                "Would you like to use content-based deduplication instead of
 entering a deduplication ID? (y/n)");
            duplication = in.nextLine();
            if (duplication.compareTo("y") == 0) {
                System.out.println("Please enter a group id value");
                groupId = in.nextLine();
            } else {
                System.out.println("Please enter deduplication Id value");
                deduplicationID = in.nextLine();
                System.out.println("Please enter a group id value");
                groupId = in.nextLine();
            }
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create a topic.");
        System.out.println("Enter a name for your SNS topic.");
        topicName = in.nextLine();
        if (selectFIFO) {
```

```
            System.out.println("Because you have selected a FIFO topic, '.fifo' must
be appended to the topic name.");
            topicName = topicName + ".fifo";
            System.out.println("The name of the topic is " + topicName);
            topicArn = createFIFO(snsClient, topicName, duplication);
            System.out.println("The ARN of the FIFO topic is " + topicArn);

        } else {
            System.out.println("The name of the topic is " + topicName);
            topicArn = createSNSTopic(snsClient, topicName);
            System.out.println("The ARN of the non-FIFO topic is " + topicArn);

        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Create an SQS queue.");
        System.out.println("Enter a name for your SQS queue.");
        sqsQueueName = in.nextLine();
        if (selectFIFO) {
            sqsQueueName = sqsQueueName + ".fifo";
        }
        sqsQueueUrl = createQueue(sqsClient, sqsQueueName, selectFIFO);
        System.out.println("The queue URL is " + sqsQueueUrl);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Get the SQS queue ARN attribute.");
        sqsQueueArn = getSQSQueueAttrs(sqsClient, sqsQueueUrl);
        System.out.println("The ARN of the new queue is " + sqsQueueArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Attach an IAM policy to the queue.");

        // Define the policy to use. Make sure that you change the REGION if you are
        // running this code
        // in a different region.
        String policy = """
        {
             "Statement": [
             {
                 "Effect": "Allow",
                         "Principal": {
```

```
                    "Service": "sns.amazonaws.com"
                },
                "Action": "sqs:SendMessage",
                        "Resource": "arn:aws:sqs:us-east-1:%s:%s",
                        "Condition": {
                    "ArnEquals": {
                        "aws:SourceArn": "arn:aws:sns:us-east-1:%s:%s"
                    }
                }
            }
            ]
        }
        """.formatted(accountId, sqsQueueName, accountId, topicName);

        setQueueAttr(sqsClient, sqsQueueUrl, policy);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Subscribe to the SQS queue.");
        if (selectFIFO) {
            System.out.println(
                "If you add a filter to this subscription, then only the filtered
 messages will be received in the queue.\n"
                    +
                    "For information about message filtering, see https://
docs.aws.amazon.com/sns/latest/dg/sns-message-filtering.html\n"
                    +
                    "For this example, you can filter messages by a \"tone\"
 attribute.");
            System.out.println("Would you like to filter messages for " +
 sqsQueueName + "'s subscription to the topic "
                + topicName + "?  (y/n)");
            String filterAns = in.nextLine();
            if (filterAns.compareTo("y") == 0) {
                boolean moreAns = false;
                System.out.println("You can filter messages by one or more of the
 following \"tone\" attributes.");
                System.out.println("1. cheerful");
                System.out.println("2. funny");
                System.out.println("3. serious");
                System.out.println("4. sincere");
                while (!moreAns) {
                    System.out.println("Select a number or choose 0 to end.");
                    String ans = in.nextLine();
```

```
                    switch (ans) {
                        case "1":
                            filterList.add("cheerful");
                            break;
                        case "2":
                            filterList.add("funny");
                            break;
                        case "3":
                            filterList.add("serious");
                            break;
                        case "4":
                            filterList.add("sincere");
                            break;
                        default:
                            moreAns = true;
                            break;
                    }
                }
            }
        }
        subscriptionArn = subQueue(snsClient, topicArn, sqsQueueArn, filterList);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Publish a message to the topic.");
        if (selectFIFO) {
            System.out.println("Would you like to add an attribute to this message?
(y/n)");
            String msgAns = in.nextLine();
            if (msgAns.compareTo("y") == 0) {
                System.out.println("You can filter messages by one or more of the
following \"tone\" attributes.");
                System.out.println("1. cheerful");
                System.out.println("2. funny");
                System.out.println("3. serious");
                System.out.println("4. sincere");
                System.out.println("Select a number or choose 0 to end.");
                String ans = in.nextLine();
                switch (ans) {
                    case "1":
                        msgAttValue = "cheerful";
                        break;
                    case "2":
                        msgAttValue = "funny";
```

```
                        break;
                    case "3":
                        msgAttValue = "serious";
                        break;
                    default:
                        msgAttValue = "sincere";
                        break;
                }

                System.out.println("Selected value is " + msgAttValue);
            }
            System.out.println("Enter a message.");
            message = in.nextLine();
            pubMessageFIFO(snsClient, message, topicArn, msgAttValue, duplication,
groupId, deduplicationID);

        } else {
            System.out.println("Enter a message.");
            message = in.nextLine();
            pubMessage(snsClient, message, topicArn);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Display the message. Press any key to continue.");
        in.nextLine();
        messageList = receiveMessages(sqsClient, sqsQueueUrl, msgAttValue);
        for (Message mes : messageList) {
            System.out.println("Message Id: " + mes.messageId());
            System.out.println("Full Message: " + mes.body());
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Delete the received message. Press any key to
continue.");
        in.nextLine();
        deleteMessages(sqsClient, sqsQueueUrl, messageList);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Unsubscribe from the topic and delete the queue.
Press any key to continue.");
        in.nextLine();
```

```
        unSub(snsClient, subscriptionArn);
        deleteSQSQueue(sqsClient, sqsQueueName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Delete the topic. Press any key to continue.");
        in.nextLine();
        deleteSNSTopic(snsClient, topicArn);

        System.out.println(DASHES);
        System.out.println("The SNS/SQS workflow has completed successfully.");
        System.out.println(DASHES);
    }

    public static void deleteSNSTopic(SnsClient snsClient, String topicArn) {
        try {
            DeleteTopicRequest request = DeleteTopicRequest.builder()
                .topicArn(topicArn)
                .build();

            DeleteTopicResponse result = snsClient.deleteTopic(request);
            System.out.println("Status was " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteSQSQueue(SqsClient sqsClient, String queueName) {
        try {
            GetQueueUrlRequest getQueueRequest = GetQueueUrlRequest.builder()
                .queueName(queueName)
                .build();

            String queueUrl = sqsClient.getQueueUrl(getQueueRequest).queueUrl();
            DeleteQueueRequest deleteQueueRequest = DeleteQueueRequest.builder()
                .queueUrl(queueUrl)
                .build();

            sqsClient.deleteQueue(deleteQueueRequest);
            System.out.println(queueName + " was successfully deleted.");
```

```
        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void unSub(SnsClient snsClient, String subscriptionArn) {
        try {
            UnsubscribeRequest request = UnsubscribeRequest.builder()
                .subscriptionArn(subscriptionArn)
                .build();

            UnsubscribeResponse result = snsClient.unsubscribe(request);
            System.out.println("Status was " + result.sdkHttpResponse().statusCode()
                + "\nSubscription was removed for " + request.subscriptionArn());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteMessages(SqsClient sqsClient, String queueUrl,
List<Message> messages) {
        try {
            List<DeleteMessageBatchRequestEntry> entries = new ArrayList<>();
            for (Message msg : messages) {
                DeleteMessageBatchRequestEntry entry =
DeleteMessageBatchRequestEntry.builder()
                    .id(msg.messageId())
                    .build();

                entries.add(entry);
            }

            DeleteMessageBatchRequest deleteMessageBatchRequest =
DeleteMessageBatchRequest.builder()
                .queueUrl(queueUrl)
                .entries(entries)
                .build();

            sqsClient.deleteMessageBatch(deleteMessageBatchRequest);
            System.out.println("The batch delete of messages was successful");
```

```
        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static List<Message> receiveMessages(SqsClient sqsClient, String
queueUrl, String msgAttValue) {
        try {
            if (msgAttValue.isEmpty()) {
                ReceiveMessageRequest receiveMessageRequest =
ReceiveMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .maxNumberOfMessages(5)
                    .build();
                return sqsClient.receiveMessage(receiveMessageRequest).messages();
            } else {
                // We know there are filters on the message.
                ReceiveMessageRequest receiveRequest =
ReceiveMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .messageAttributeNames(msgAttValue) // Include other message
attributes if needed.
                    .maxNumberOfMessages(5)
                    .build();

                return sqsClient.receiveMessage(receiveRequest).messages();
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    public static void pubMessage(SnsClient snsClient, String message, String
topicArn) {
        try {
            PublishRequest request = PublishRequest.builder()
                .message(message)
                .topicArn(topicArn)
                .build();
```

```
            PublishResponse result = snsClient.publish(request);
            System.out
                .println(result.messageId() + " Message sent. Status is " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void pubMessageFIFO(SnsClient snsClient,
                                      String message,
                                      String topicArn,
                                      String msgAttValue,
                                      String duplication,
                                      String groupId,
                                      String deduplicationID) {

        try {
            PublishRequest request;
            // Means the user did not choose to use a message attribute.
            if (msgAttValue.isEmpty()) {
                if (duplication.compareTo("y") == 0) {
                    request = PublishRequest.builder()
                        .message(message)
                        .messageGroupId(groupId)
                        .topicArn(topicArn)
                        .build();
                } else {
                    request = PublishRequest.builder()
                        .message(message)
                        .messageDeduplicationId(deduplicationID)
                        .messageGroupId(groupId)
                        .topicArn(topicArn)
                        .build();
                }

            } else {
                Map<String, MessageAttributeValue> messageAttributes = new
HashMap<>();
                messageAttributes.put(msgAttValue, MessageAttributeValue.builder()
                    .dataType("String")
                    .stringValue("true")
```

```
                    .build());

                if (duplication.compareTo("y") == 0) {
                    request = PublishRequest.builder()
                        .message(message)
                        .messageGroupId(groupId)
                        .topicArn(topicArn)
                        .build();
                } else {
                    // Create a publish request with the message and attributes.
                    request = PublishRequest.builder()
                        .topicArn(topicArn)
                        .message(message)
                        .messageDeduplicationId(deduplicationID)
                        .messageGroupId(groupId)
                        .messageAttributes(messageAttributes)
                        .build();
                }
            }

            // Publish the message to the topic.
            PublishResponse result = snsClient.publish(request);
            System.out
                .println(result.messageId() + " Message sent. Status was " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Subscribe to the SQS queue.
    public static String subQueue(SnsClient snsClient, String topicArn, String
queueArn, List<String> filterList) {
        try {
            SubscribeRequest request;
            if (filterList.isEmpty()) {
                // No filter subscription is added.
                request = SubscribeRequest.builder()
                    .protocol("sqs")
                    .endpoint(queueArn)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
```

```
                    .build();

                SubscribeResponse result = snsClient.subscribe(request);
                System.out.println("The queue " + queueArn + " has been subscribed
to the topic " + topicArn + "\n" +
                    "with the subscription ARN " + result.subscriptionArn());
                return result.subscriptionArn();
            } else {
                request = SubscribeRequest.builder()
                    .protocol("sqs")
                    .endpoint(queueArn)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

                SubscribeResponse result = snsClient.subscribe(request);
                System.out.println("The queue " + queueArn + " has been subscribed
to the topic " + topicArn + "\n" +
                    "with the subscription ARN " + result.subscriptionArn());

                String attributeName = "FilterPolicy";
                Gson gson = new Gson();
                String jsonString = "{\"tone\": []}";
                JsonObject jsonObject = gson.fromJson(jsonString, JsonObject.class);
                JsonArray toneArray = jsonObject.getAsJsonArray("tone");
                for (String value : filterList) {
                    toneArray.add(new JsonPrimitive(value));
                }

                String updatedJsonString = gson.toJson(jsonObject);
                System.out.println(updatedJsonString);
                SetSubscriptionAttributesRequest attRequest =
SetSubscriptionAttributesRequest.builder()
                    .subscriptionArn(result.subscriptionArn())
                    .attributeName(attributeName)
                    .attributeValue(updatedJsonString)
                    .build();

                snsClient.setSubscriptionAttributes(attRequest);
                return result.subscriptionArn();
            }

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
        return "";
    }

    // Attach a policy to the queue.
    public static void setQueueAttr(SqsClient sqsClient, String queueUrl, String
policy) {
        try {
            Map<software.amazon.awssdk.services.sqs.model.QueueAttributeName,
String> attrMap = new HashMap<>();
            attrMap.put(QueueAttributeName.POLICY, policy);

            SetQueueAttributesRequest attributesRequest =
SetQueueAttributesRequest.builder()
                .queueUrl(queueUrl)
                .attributes(attrMap)
                .build();

            sqsClient.setQueueAttributes(attributesRequest);
            System.out.println("The policy has been successfully attached.");

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static String getSQSQueueAttrs(SqsClient sqsClient, String queueUrl) {
        // Specify the attributes to retrieve.
        List<QueueAttributeName> atts = new ArrayList<>();
        atts.add(QueueAttributeName.QUEUE_ARN);

        GetQueueAttributesRequest attributesRequest =
GetQueueAttributesRequest.builder()
            .queueUrl(queueUrl)
            .attributeNames(atts)
            .build();

        GetQueueAttributesResponse response =
sqsClient.getQueueAttributes(attributesRequest);
        Map<String, String> queueAtts = response.attributesAsStrings();
        for (Map.Entry<String, String> queueAtt : queueAtts.entrySet())
            return queueAtt.getValue();
```

```
        return "";
    }

    public static String createQueue(SqsClient sqsClient, String queueName, Boolean
selectFIFO) {
        try {
            System.out.println("\nCreate Queue");
            if (selectFIFO) {
                Map<QueueAttributeName, String> attrs = new HashMap<>();
                attrs.put(QueueAttributeName.FIFO_QUEUE, "true");
                CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .attributes(attrs)
                    .build();

                sqsClient.createQueue(createQueueRequest);
                System.out.println("\nGet queue url");
                GetQueueUrlResponse getQueueUrlResponse = sqsClient

.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
                return getQueueUrlResponse.queueUrl();
            } else {
                CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .build();

                sqsClient.createQueue(createQueueRequest);
                System.out.println("\nGet queue url");
                GetQueueUrlResponse getQueueUrlResponse = sqsClient

.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
                return getQueueUrlResponse.queueUrl();
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createSNSTopic(SnsClient snsClient, String topicName) {
        CreateTopicResponse result;
```

```
        try {
            CreateTopicRequest request = CreateTopicRequest.builder()
                .name(topicName)
                .build();

            result = snsClient.createTopic(request);
            return result.topicArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createFIFO(SnsClient snsClient, String topicName, String
 duplication) {
        try {
            // Create a FIFO topic by using the SNS service client.
            Map<String, String> topicAttributes = new HashMap<>();
            if (duplication.compareTo("n") == 0) {
                topicAttributes.put("FifoTopic", "true");
                topicAttributes.put("ContentBasedDeduplication", "false");
            } else {
                topicAttributes.put("FifoTopic", "true");
                topicAttributes.put("ContentBasedDeduplication", "true");
            }

            CreateTopicRequest topicRequest = CreateTopicRequest.builder()
                .name(topicName)
                .attributes(topicAttributes)
                .build();

            CreateTopicResponse response = snsClient.createTopic(topicRequest);
            return response.topicArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateQueue
  - CreateTopic
  - DeleteMessageBatch
  - DeleteQueue
  - DeleteTopic
  - GetQueueAttributes
  - Publish
  - ReceiveMessage
  - SetQueueAttributes
  - Subscribe
  - Unsubscribe

Uso de API Gateway para invocar una función de Lambda

El siguiente ejemplo de código muestra cómo crear una AWS Lambda función invocada por Amazon API Gateway.

SDK para Java 2.x

Muestra cómo crear una AWS Lambda función mediante la API de tiempo de ejecución Lambda Java. En este ejemplo, se invocan diferentes AWS servicios para realizar un caso de uso específico. En este ejemplo se indica cómo crear una función de Lambda invocada por Amazon API Gateway que escanea una tabla de Amazon DynamoDB en busca de aniversarios laborales y utiliza Amazon Simple Notification Service (Amazon SNS) para enviar un mensaje de texto a sus empleados que les felicite en la fecha de su primer aniversario.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- API Gateway
- DynamoDB

- Lambda
- Amazon SNS

Uso de eventos programados para invocar una función de Lambda

El siguiente ejemplo de código muestra cómo crear una AWS Lambda función invocada por un evento EventBridge programado de Amazon.

SDK para Java 2.x

> Muestra cómo crear un evento EventBridge programado de Amazon que invoque una AWS Lambda función. Configure EventBridge para usar una expresión cron para programar cuándo se invoca la función Lambda. En este ejemplo, creará una función de Lambda utilizando la API de tiempo de ejecución de Java de Lambda. En este ejemplo, se invocan diferentes AWS servicios para realizar un caso de uso específico. Este ejemplo indica cómo crear una aplicación que envíe un mensaje de texto a sus empleados para felicitarles por su primer aniversario.
>
> Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.
>
> Servicios utilizados en este ejemplo
>
> - CloudWatch Registros
> - DynamoDB
> - EventBridge
> - Lambda
> - Amazon SNS

Ejemplos de tecnología sin servidor

Invocación de una función de Lambda desde un desencadenador de Amazon SNS

En el siguiente ejemplo de código se muestra cómo implementar una función de Lambda que recibe un evento activado al recibir mensajes de un tema de SNS. La función recupera los mensajes del parámetro de eventos y registra el contenido de cada mensaje.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Uso de un evento de SNS con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package example;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.LambdaLogger;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.SNSEvent;
import com.amazonaws.services.lambda.runtime.events.SNSEvent.SNSRecord;


import java.util.Iterator;
import java.util.List;

public class SNSEventHandler implements RequestHandler<SNSEvent, Boolean> {
    LambdaLogger logger;

    @Override
    public Boolean handleRequest(SNSEvent event, Context context) {
        logger = context.getLogger();
        List<SNSRecord> records = event.getRecords();
        if (!records.isEmpty()) {
            Iterator<SNSRecord> recordsIter = records.iterator();
            while (recordsIter.hasNext()) {
                processRecord(recordsIter.next());
            }
        }
        return Boolean.TRUE;
    }

    public void processRecord(SNSRecord record) {
        try {
            String message = record.getSNS().getMessage();
```

```
            logger.log("message: " + message);
        } catch (Exception e) {
            throw new RuntimeException(e);
        }
    }

}
```

Ejemplos de Amazon SQS usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Amazon SQS.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Acciones
- Escenarios
- Ejemplos de tecnología sin servidor

Introducción

Introducción a Amazon SQS

El siguiente ejemplo de código muestra cómo empezar a utilizar Amazon SQS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.SqsException;
import software.amazon.awssdk.services.sqs.paginators.ListQueuesIterable;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloSQS {
    public static void main(String[] args) {
        SqsClient sqsClient = SqsClient.builder()
                .region(Region.US_WEST_2)
                .build();

        listQueues(sqsClient);
        sqsClient.close();
    }

    public static void listQueues(SqsClient sqsClient) {
        try {
            ListQueuesIterable listQueues = sqsClient.listQueuesPaginator();
            listQueues.stream()
                    .flatMap(r -> r.queueUrls().stream())
                    .forEach(content -> System.out.println(" Queue URL: " +
 content.toLowerCase()));

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListQueuesla Referencia AWS SDK for Java 2.x de la API.

Acciones

`CreateQueue`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateQueue`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.ChangeMessageVisibilityRequest;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlResponse;
import software.amazon.awssdk.services.sqs.model.ListQueuesRequest;
import software.amazon.awssdk.services.sqs.model.ListQueuesResponse;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.SendMessageBatchRequest;
import software.amazon.awssdk.services.sqs.model.SendMessageBatchRequestEntry;
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;
import software.amazon.awssdk.services.sqs.model.SqsException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SQSExample {
    public static void main(String[] args) {
        String queueName = "queue" + System.currentTimeMillis();
        SqsClient sqsClient = SqsClient.builder()
                .region(Region.US_WEST_2)
                .build();

        // Perform various tasks on the Amazon SQS queue.
        String queueUrl = createQueue(sqsClient, queueName);
        listQueues(sqsClient);
        listQueuesFilter(sqsClient, queueUrl);
        List<Message> messages = receiveMessages(sqsClient, queueUrl);
        sendBatchMessages(sqsClient, queueUrl);
        changeMessages(sqsClient, queueUrl, messages);
        deleteMessages(sqsClient, queueUrl, messages);
        sqsClient.close();
    }

    public static String createQueue(SqsClient sqsClient, String queueName) {
        try {
            System.out.println("\nCreate Queue");

            CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .build();

            sqsClient.createQueue(createQueueRequest);

            System.out.println("\nGet queue url");

            GetQueueUrlResponse getQueueUrlResponse = sqsClient

 .getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
            return getQueueUrlResponse.queueUrl();

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
        return "";
    }

    public static void listQueues(SqsClient sqsClient) {

        System.out.println("\nList Queues");
        String prefix = "que";

        try {
            ListQueuesRequest listQueuesRequest =
ListQueuesRequest.builder().queueNamePrefix(prefix).build();
            ListQueuesResponse listQueuesResponse =
sqsClient.listQueues(listQueuesRequest);
            for (String url : listQueuesResponse.queueUrls()) {
                System.out.println(url);
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void listQueuesFilter(SqsClient sqsClient, String queueUrl) {
        // List queues with filters
        String namePrefix = "queue";
        ListQueuesRequest filterListRequest = ListQueuesRequest.builder()
                .queueNamePrefix(namePrefix)
                .build();

        ListQueuesResponse listQueuesFilteredResponse =
sqsClient.listQueues(filterListRequest);
        System.out.println("Queue URLs with prefix: " + namePrefix);
        for (String url : listQueuesFilteredResponse.queueUrls()) {
            System.out.println(url);
        }

        System.out.println("\nSend message");
        try {
            sqsClient.sendMessage(SendMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .messageBody("Hello world!")
                    .delaySeconds(10)
```

```
                    .build());

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void sendBatchMessages(SqsClient sqsClient, String queueUrl) {

        System.out.println("\nSend multiple messages");
        try {
            SendMessageBatchRequest sendMessageBatchRequest =
SendMessageBatchRequest.builder()
                    .queueUrl(queueUrl)

.entries(SendMessageBatchRequestEntry.builder().id("id1").messageBody("Hello from
msg 1").build(),

SendMessageBatchRequestEntry.builder().id("id2").messageBody("msg
2").delaySeconds(10)
                                    .build())
                    .build();
            sqsClient.sendMessageBatch(sendMessageBatchRequest);

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static List<Message> receiveMessages(SqsClient sqsClient, String
queueUrl) {

        System.out.println("\nReceive messages");
        try {
            ReceiveMessageRequest receiveMessageRequest =
ReceiveMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .maxNumberOfMessages(5)
                    .build();
            return sqsClient.receiveMessage(receiveMessageRequest).messages();

        } catch (SqsException e) {
```

```
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    public static void changeMessages(SqsClient sqsClient, String queueUrl,
List<Message> messages) {

        System.out.println("\nChange Message Visibility");
        try {

            for (Message message : messages) {
                ChangeMessageVisibilityRequest req =
ChangeMessageVisibilityRequest.builder()
                        .queueUrl(queueUrl)
                        .receiptHandle(message.receiptHandle())
                        .visibilityTimeout(100)
                        .build();
                sqsClient.changeMessageVisibility(req);
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteMessages(SqsClient sqsClient, String queueUrl,
List<Message> messages) {
        System.out.println("\nDelete Messages");

        try {
            for (Message message : messages) {
                DeleteMessageRequest deleteMessageRequest =
DeleteMessageRequest.builder()
                        .queueUrl(queueUrl)
                        .receiptHandle(message.receiptHandle())
                        .build();
                sqsClient.deleteMessage(deleteMessageRequest);
            }
        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
    }
}
```

- Para obtener más información sobre la API, consulta CreateQueuela Referencia AWS SDK for Java 2.x de la API.

`DeleteMessage`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteMessage`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
        try {
            for (Message message : messages) {
                DeleteMessageRequest deleteMessageRequest =
DeleteMessageRequest.builder()
                        .queueUrl(queueUrl)
                        .receiptHandle(message.receiptHandle())
                        .build();
                sqsClient.deleteMessage(deleteMessageRequest);
            }
        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

- Para obtener más información sobre la API, consulta DeleteMessagela Referencia AWS SDK for Java 2.x de la API.

`DeleteQueue`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteQueue`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlRequest;
import software.amazon.awssdk.services.sqs.model.DeleteQueueRequest;
import software.amazon.awssdk.services.sqs.model.SqsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteQueue {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <queueName>

                Where:
                   queueName - The name of the Amazon SQS queue to delete.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String queueName = args[0];
```

```
        SqsClient sqs = SqsClient.builder()
                .region(Region.US_WEST_2)
                .build();

        deleteSQSQueue(sqs, queueName);
        sqs.close();
    }

    public static void deleteSQSQueue(SqsClient sqsClient, String queueName) {
        try {
            GetQueueUrlRequest getQueueRequest = GetQueueUrlRequest.builder()
                    .queueName(queueName)
                    .build();

            String queueUrl = sqsClient.getQueueUrl(getQueueRequest).queueUrl();
            DeleteQueueRequest deleteQueueRequest = DeleteQueueRequest.builder()
                    .queueUrl(queueUrl)
                    .build();

            sqsClient.deleteQueue(deleteQueueRequest);

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DeleteQueuela Referencia AWS SDK for Java 2.x de la API.

`GetQueueUrl`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetQueueUrl`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
            GetQueueUrlResponse getQueueUrlResponse = sqsClient

.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
            return getQueueUrlResponse.queueUrl();
```

- Para obtener más información sobre la API, consulta GetQueueUrlla Referencia AWS SDK for Java 2.x de la API.

`ListQueues`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListQueues`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
        String prefix = "que";

        try {
            ListQueuesRequest listQueuesRequest =
ListQueuesRequest.builder().queueNamePrefix(prefix).build();
            ListQueuesResponse listQueuesResponse =
sqsClient.listQueues(listQueuesRequest);
            for (String url : listQueuesResponse.queueUrls()) {
                System.out.println(url);
            }
```

```
        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

- Para obtener más información sobre la API, consulta ListQueuesla Referencia AWS SDK for Java 2.x de la API.

`ReceiveMessage`

En el siguiente ejemplo de código, se muestra cómo utilizar `ReceiveMessage`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
        try {
            ReceiveMessageRequest receiveMessageRequest =
ReceiveMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .maxNumberOfMessages(5)
                    .build();
            return sqsClient.receiveMessage(receiveMessageRequest).messages();

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
```

- Para obtener más información sobre la API, consulta ReceiveMessagela Referencia AWS SDK for Java 2.x de la API.

`SendMessage`

En el siguiente ejemplo de código, se muestra cómo utilizar `SendMessage`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

A continuación, se muestran dos ejemplos de la operación `SendMessage`:

- Envío de un mensaje con un cuerpo y un retraso
- Envío de un mensaje con un cuerpo y atributos de mensaje

Envíe un mensaje con un cuerpo y un retraso.

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlRequest;
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;
import software.amazon.awssdk.services.sqs.model.SqsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendMessages {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <queueName> <message>

                Where:
                   queueName - The name of the queue.
```

```
                    message - The message to send.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String queueName = args[0];
        String message = args[1];
        SqsClient sqsClient = SqsClient.builder()
                .region(Region.US_WEST_2)
                .build();
        sendMessage(sqsClient, queueName, message);
        sqsClient.close();
    }

    public static void sendMessage(SqsClient sqsClient, String queueName, String
 message) {
        try {
            CreateQueueRequest request = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .build();
            sqsClient.createQueue(request);

            GetQueueUrlRequest getQueueRequest = GetQueueUrlRequest.builder()
                    .queueName(queueName)
                    .build();

            String queueUrl = sqsClient.getQueueUrl(getQueueRequest).queueUrl();
            SendMessageRequest sendMsgRequest = SendMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .messageBody(message)
                    .delaySeconds(5)
                    .build();

            sqsClient.sendMessage(sendMsgRequest);

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Envíe un mensaje con un cuerpo y atributos de mensaje.

```
    /**
     * <p>This method demonstrates how to add message attributes to a message.
     * Each attribute must specify a name, value, and data type. You use a Java Map
 to supply the attributes. The map's
     * key is the attribute name, and you specify the map's entry value using a
 builder that includes the attribute
     * value and data type.</p>
     *
     * <p>The data type must start with one of "String", "Number" or "Binary". You
 can optionally
     * define a custom extension by using a "." and your extension.</p>
     *
     * <p>The SQS Developer Guide provides more information on @see <a
     * href="https://docs.aws.amazon.com/AWSSimpleQueueService/latest/
SQSDeveloperGuide/sqs-message-metadata.html#sqs-message-attributes">message
     * attributes</a>.</p>
     *
     * @param thumbailPath Filesystem path of the image.
     * @param queueUrl     URL of the SQS queue.
     */
    static void sendMessageWithAttributes(Path thumbailPath, String queueUrl) {
        Map<String, MessageAttributeValue> messageAttributeMap;
        try {
            messageAttributeMap = Map.of(
                    "Name", MessageAttributeValue.builder()
                            .stringValue("Jane Doe")
                            .dataType("String").build(),
                    "Age", MessageAttributeValue.builder()
                            .stringValue("42")
                            .dataType("Number.int").build(),
                    "Image", MessageAttributeValue.builder()

 .binaryValue(SdkBytes.fromByteArray(Files.readAllBytes(thumbailPath)))
                            .dataType("Binary.jpg").build()
            );
        } catch (IOException e) {
            LOGGER.error("An I/O exception occurred reading thumbnail image: {}",
 e.getMessage(), e);
            throw new RuntimeException(e);
```

```
        }

        SendMessageRequest request = SendMessageRequest.builder()
                .queueUrl(queueUrl)
                .messageBody("Hello SQS")
                .messageAttributes(messageAttributeMap)
                .build();
        try {
            SendMessageResponse sendMessageResponse =
SQS_CLIENT.sendMessage(request);
            LOGGER.info("Message ID: {}", sendMessageResponse.messageId());
        } catch (SqsException e) {
            LOGGER.error("Exception occurred sending message: {}", e.getMessage(),
e);
            throw new RuntimeException(e);
        }
    }
```

- Para obtener más información sobre la API, consulta SendMessagela Referencia AWS SDK for Java 2.x de la API.

`SendMessageBatch`

En el siguiente ejemplo de código, se muestra cómo utilizar `SendMessageBatch`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
            SendMessageBatchRequest sendMessageBatchRequest =
SendMessageBatchRequest.builder()
                    .queueUrl(queueUrl)

.entries(SendMessageBatchRequestEntry.builder().id("id1").messageBody("Hello from
msg 1").build(),
```

```
SendMessageBatchRequestEntry.builder().id("id2").messageBody("msg
2").delaySeconds(10)
                                    .build())
                    .build();
            sqsClient.sendMessageBatch(sendMessageBatchRequest);
```

- Para obtener más información sobre la API, consulta SendMessageBatchla Referencia AWS SDK for Java 2.x de la API.

`SetQueueAttributes`

En el siguiente ejemplo de código, se muestra cómo utilizar `SetQueueAttributes`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Configure Amazon SQS para utilizar el cifrado del servidor (SSE) mediante una clave de KMS personalizada.

```
    public static void addEncryption(String queueName, String kmsMasterKeyAlias) {
        SqsClient sqsClient = SqsClient.create();

        GetQueueUrlRequest urlRequest = GetQueueUrlRequest.builder()
                .queueName(queueName)
                .build();

        GetQueueUrlResponse getQueueUrlResponse;
        try {
            getQueueUrlResponse = sqsClient.getQueueUrl(urlRequest);
        } catch (QueueDoesNotExistException e) {
            LOGGER.error(e.getMessage(), e);
            throw new RuntimeException(e);
        }
        String queueUrl = getQueueUrlResponse.queueUrl();
```

```
        Map<QueueAttributeName, String> attributes = Map.of(
                QueueAttributeName.KMS_MASTER_KEY_ID, kmsMasterKeyAlias,
                QueueAttributeName.KMS_DATA_KEY_REUSE_PERIOD_SECONDS, "140" // Set
the data key reuse period to 140 seconds.
        );                                                                  // This
is how long SQS can reuse the data key before requesting a new one from KMS.

        SetQueueAttributesRequest attRequest = SetQueueAttributesRequest.builder()
                .queueUrl(queueUrl)
                .attributes(attributes)
                .build();
        try {
            sqsClient.setQueueAttributes(attRequest);
            LOGGER.info("The attributes have been applied to {}", queueName);
        } catch (InvalidAttributeNameException | InvalidAttributeValueException e) {
            LOGGER.error(e.getMessage(), e);
            throw new RuntimeException(e);
        } finally {
            sqsClient.close();
        }
    }
```

- Para obtener más información sobre la API, consulta SetQueueAttributesla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Crear una aplicación de mensajería

El siguiente ejemplo de código muestra cómo crear una aplicación de mensajería con Amazon SQS.

SDK para Java 2.x

> Muestra cómo usar la API de Amazon SQS para desarrollar una API de REST de Spring que envíe y recupere mensajes.
>
> Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Amazon Comprehend
- Amazon SQS

Creación y publicación en un tema FIFO

El siguiente ejemplo de código indica cómo crear y publicar en un tema FIFO de Amazon SNS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Este ejemplo

- crea un tema FIFO de Amazon SNS, dos colas FIFO de Amazon SQS y una cola estándar.
- suscribe las colas al tema y publica un mensaje en el tema.

La prueba verifica la recepción del mensaje en cada cola. El ejemplo completo también muestra la incorporación de políticas de acceso y, al final, elimina los recursos.

```
public class PriceUpdateExample {
    public final static SnsClient snsClient = SnsClient.create();
    public final static SqsClient sqsClient = SqsClient.create();

    public static void main(String[] args) {

        final String usage = "\n" +
            "Usage: " +
            "    <topicName> <wholesaleQueueFifoName> <retailQueueFifoName>
 <analyticsQueueName>\n\n" +
            "Where:\n" +
            "   fifoTopicName - The name of the FIFO topic that you want to create.
 \n\n" +
            "   wholesaleQueueARN - The name of a SQS FIFO queue that will be
 created for the wholesale consumer. \n\n"
            +
```

```
            "   retailQueueARN - The name of a SQS FIFO queue that will created for
the retail consumer. \n\n" +
            "   analyticsQueueARN - The name of a SQS standard queue that will be
created for the analytics consumer. \n\n";
        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        final String fifoTopicName = args[0];
        final String wholeSaleQueueName = args[1];
        final String retailQueueName = args[2];
        final String analyticsQueueName = args[3];

        // For convenience, the QueueData class holds metadata about a queue: ARN,
URL,
        // name and type.
        List<QueueData> queues = List.of(
            new QueueData(wholeSaleQueueName, QueueType.FIFO),
            new QueueData(retailQueueName, QueueType.FIFO),
            new QueueData(analyticsQueueName, QueueType.Standard));

        // Create queues.
        createQueues(queues);

        // Create a topic.
        String topicARN = createFIFOTopic(fifoTopicName);

        // Subscribe each queue to the topic.
        subscribeQueues(queues, topicARN);

        // Allow the newly created topic to send messages to the queues.
        addAccessPolicyToQueuesFINAL(queues, topicARN);

        // Publish a sample price update message with payload.
        publishPriceUpdate(topicARN, "{\"product\": 214, \"price\": 79.99}",
"Consumables");

        // Clean up resources.
        deleteSubscriptions(queues);
        deleteQueues(queues);
        deleteTopic(topicARN);
    }
```

```
    public static String createFIFOTopic(String topicName) {
        try {
            // Create a FIFO topic by using the SNS service client.
            Map<String, String> topicAttributes = Map.of(
                "FifoTopic", "true",
                "ContentBasedDeduplication", "false",
                "FifoThroughputScope", "MessageGroup");

            CreateTopicRequest topicRequest = CreateTopicRequest.builder()
                .name(topicName)
                .attributes(topicAttributes)
                .build();

            CreateTopicResponse response = snsClient.createTopic(topicRequest);
            String topicArn = response.topicArn();
            System.out.println("The topic ARN is" + topicArn);

            return topicArn;

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static void subscribeQueues(List<QueueData> queues, String topicARN) {
        queues.forEach(queue -> {
            SubscribeRequest subscribeRequest = SubscribeRequest.builder()
                .topicArn(topicARN)
                .endpoint(queue.queueARN)
                .protocol("sqs")
                .build();

            // Subscribe to the endpoint by using the SNS service client.
            // Only Amazon SQS queues can receive notifications from an Amazon SNS
FIFO
            // topic.
            SubscribeResponse subscribeResponse =
snsClient.subscribe(subscribeRequest);
            System.out.println("The queue [" + queue.queueARN + "] subscribed to the
topic [" + topicARN + "]");
            queue.subscriptionARN = subscribeResponse.subscriptionArn();
        });
```

```
    }

    public static void publishPriceUpdate(String topicArn, String payload, String
groupId) {

        try {
            // Create and publish a message that updates the wholesale price.
            String subject = "Price Update";
            String dedupId = UUID.randomUUID().toString();
            String attributeName = "business";
            String attributeValue = "wholesale";

            MessageAttributeValue msgAttValue = MessageAttributeValue.builder()
                .dataType("String")
                .stringValue(attributeValue)
                .build();

            Map<String, MessageAttributeValue> attributes = new HashMap<>();
            attributes.put(attributeName, msgAttValue);
            PublishRequest pubRequest = PublishRequest.builder()
                .topicArn(topicArn)
                .subject(subject)
                .message(payload)
                .messageGroupId(groupId)
                .messageDeduplicationId(dedupId)
                .messageAttributes(attributes)
                .build();

            final PublishResponse response = snsClient.publish(pubRequest);
            System.out.println(response.messageId());
            System.out.println(response.sequenceNumber());
            System.out.println("Message was published to " + topicArn);

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateTopic

- Publish
- Subscribe

Detección de personas y objetos en un video

El siguiente ejemplo de código muestra cómo detectar personas y objetos en un vídeo con Amazon Rekognition.

SDK para Java 2.x

Muestra cómo utilizar la API Java de Amazon Rekognition para crear una aplicación que detecte rostros y objetos en vídeos ubicados en un bucket de Amazon Simple Storage Service (Amazon S3). La aplicación envía al administrador una notificación por correo electrónico con los resultados mediante Amazon Simple Email Service (Amazon SES).

Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Amazon Rekognition
- Amazon S3
- Amazon SES
- Amazon SNS
- Amazon SQS

Administración de mensajes grandes mediante S3

En el siguiente ejemplo de código, se muestra cómo utilizar la biblioteca de clientes ampliada de Amazon SQS para trabajar con mensajes grandes de Amazon SQS.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import com.amazon.sqs.javamessaging.AmazonSQSExtendedClient;
import com.amazon.sqs.javamessaging.ExtendedClientConfiguration;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import org.joda.time.DateTime;
import org.joda.time.format.DateTimeFormat;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.BucketLifecycleConfiguration;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteObjectRequest;
import software.amazon.awssdk.services.s3.model.ExpirationStatus;
import software.amazon.awssdk.services.s3.model.LifecycleExpiration;
import software.amazon.awssdk.services.s3.model.LifecycleRule;
import software.amazon.awssdk.services.s3.model.LifecycleRuleFilter;
import software.amazon.awssdk.services.s3.model.ListObjectVersionsRequest;
import software.amazon.awssdk.services.s3.model.ListObjectVersionsResponse;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Request;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Response;
import
 software.amazon.awssdk.services.s3.model.PutBucketLifecycleConfigurationRequest;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.CreateQueueResponse;
import software.amazon.awssdk.services.sqs.model.DeleteMessageRequest;
import software.amazon.awssdk.services.sqs.model.DeleteQueueRequest;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageResponse;
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;

import java.util.Arrays;
import java.util.List;
import java.util.UUID;

/**
 * Example of using Amazon SQS Extended Client Library for Java 2.x.
 */
public class SqsExtendedClientExample {
    private static final Logger logger =
 LoggerFactory.getLogger(SqsExtendedClientExample.class);

    private String s3BucketName;
```

```
    private String queueUrl;
    private final String queueName;
    private final S3Client s3Client;
    private final SqsClient sqsExtendedClient;
    private final int messageSize;

    /**
     * Constructor with default clients and message size.
     */
    public SqsExtendedClientExample() {
        this(S3Client.create(), 300000);
    }

    /**
     * Constructor with custom S3 client and message size.
     *
     * @param s3Client The S3 client to use
     * @param messageSize The size of the test message to create
     */
    public SqsExtendedClientExample(S3Client s3Client, int messageSize) {
        this.s3Client = s3Client;
        this.messageSize = messageSize;

        // Generate a unique bucket name.
        this.s3BucketName = UUID.randomUUID() + "-" +
                DateTimeFormat.forPattern("yyMMdd-hhmmss").print(new DateTime());

        // Generate a unique queue name.
        this.queueName = "MyQueue-" + UUID.randomUUID();

        // Configure the SQS extended client.
        final ExtendedClientConfiguration extendedClientConfig = new
ExtendedClientConfiguration()
                .withPayloadSupportEnabled(s3Client, s3BucketName);

        this.sqsExtendedClient = new
AmazonSQSExtendedClient(SqsClient.builder().build(), extendedClientConfig);
    }

    public static void main(String[] args) {
        SqsExtendedClientExample example = new SqsExtendedClientExample();
        try {
            example.setup();
            example.sendAndReceiveMessage();
```

```
        } finally {
            example.cleanup();
        }
    }

    /**
     * Send a large message and receive it back.
     *
     * @return The received message
     */
    public Message sendAndReceiveMessage() {
        try {
            // Create a large message.
            char[] chars = new char[messageSize];
            Arrays.fill(chars, 'x');
            String largeMessage = new String(chars);

            // Send the message.
            final SendMessageRequest sendMessageRequest =
SendMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .messageBody(largeMessage)
                    .build();

            sqsExtendedClient.sendMessage(sendMessageRequest);
            logger.info("Sent message of size: {}", largeMessage.length());

            // Receive and return the message.
            final ReceiveMessageResponse receiveMessageResponse =
sqsExtendedClient.receiveMessage(
                    ReceiveMessageRequest.builder().queueUrl(queueUrl).build());

            List<Message> messages = receiveMessageResponse.messages();
            if (messages.isEmpty()) {
                throw new RuntimeException("No messages received");
            }

            Message message = messages.getFirst();
            logger.info("\nMessage received.");
            logger.info("  ID: {}", message.messageId());
            logger.info("  Receipt handle: {}", message.receiptHandle());
            logger.info("  Message body size: {}", message.body().length());
            logger.info("  Message body (first 5 characters): {}",
message.body().substring(0, 5));
```

```
            return message;
        } catch (RuntimeException e) {
            logger.error("Error during message processing: {}", e.getMessage(), e);
            throw e;
        }
    }
```

- Para obtener más información, consulte la Guía para desarrolladores de AWS SDK for Java 2.x.
- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateBucket
  - PutBucketLifecycleConfiguration
  - ReceiveMessage
  - SendMessage

Procese notificaciones de eventos de S3

El siguiente ejemplo de código muestra cómo trabajar con notificaciones de eventos de S3 de una forma orientada a objetos.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Este ejemplo muestra cómo procesar un evento de notificación de S3 utilizando Amazon SQS.

```
    /**
     * This method receives S3 event notifications by using an SqsAsyncClient.
     * After the client receives the messages it deserializes the JSON payload and
logs them. It uses
     * the S3EventNotification class (part of the S3 event notification API for
Java) to deserialize
```

```
     * the JSON payload and access the messages in an object-oriented way.
     *
     * @param queueUrl The URL of the AWS SQS queue that receives the S3 event
 notifications.
     * @see <a href="https://sdk.amazonaws.com/java/api/latest/software/amazon/
awssdk/eventnotifications/s3/model/package-summary.html">S3EventNotification API</
a>.
     * <p>
     * To use S3 event notification serialization/deserialization to objects, add
 the following
     * dependency to your Maven pom.xml file.
     * <dependency>
     * <groupId>software.amazon.awssdk</groupId>
     * <artifactId>s3-event-notifications</artifactId>
     * <version><LATEST></version>
     * </dependency>
     * <p>
     * The S3 event notification API became available with version 2.25.11 of the
 Java SDK.
     * <p>
     * This example shows the use of the API with AWS SQS, but it can be used to
 process S3 event notifications
     * in AWS SNS or AWS Lambda as well.
     * <p>
     * Note: The S3EventNotification class does not work with messages routed
 through AWS EventBridge.
     */
    static void processS3Events(String bucketName, String queueUrl, String queueArn)
 {
        try {
            // Configure the bucket to send Object Created and Object Tagging
 notifications to an existing SQS queue.
            s3Client.putBucketNotificationConfiguration(b -> b
                    .notificationConfiguration(ncb -> ncb
                            .queueConfigurations(qcb -> qcb
                                    .events(Event.S3_OBJECT_CREATED,
 Event.S3_OBJECT_TAGGING)
                                    .queueArn(queueArn)))
                            .bucket(bucketName)
            ).join();

            triggerS3EventNotifications(bucketName);
            // Wait for event notifications to propagate.
            Thread.sleep(Duration.ofSeconds(5).toMillis());
```

```
            boolean didReceiveMessages = true;
            while (didReceiveMessages) {
                // Display the number of messages that are available in the queue.
                sqsClient.getQueueAttributes(b -> b
                                .queueUrl(queueUrl)

.attributeNames(QueueAttributeName.APPROXIMATE_NUMBER_OF_MESSAGES)
                        ).thenAccept(attributeResponse ->
                                logger.info("Approximate number of messages in the
queue: {}",

attributeResponse.attributes().get(QueueAttributeName.APPROXIMATE_NUMBER_OF_MESSAGES)))
                        .join();

                // Receive the messages.
                ReceiveMessageResponse response = sqsClient.receiveMessage(b -> b
                        .queueUrl(queueUrl)
                ).get();
                logger.info("Count of received messages: {}",
response.messages().size());
                didReceiveMessages = !response.messages().isEmpty();

                // Create a collection to hold the received message for deletion
                // after we log the messages.
                HashSet<DeleteMessageBatchRequestEntry> messagesToDelete = new
HashSet<>();
                // Process each message.
                response.messages().forEach(message -> {
                    logger.info("Message id: {}", message.messageId());
                    // Deserialize JSON message body to a S3EventNotification object
                    // to access messages in an object-oriented way.
                    S3EventNotification event =
S3EventNotification.fromJson(message.body());

                    // Log the S3 event notification record details.
                    if (event.getRecords() != null) {
                        event.getRecords().forEach(record -> {
                            String eventName = record.getEventName();
                            String key = record.getS3().getObject().getKey();
                            logger.info(record.toString());
                            logger.info("Event name is {} and key is {}", eventName,
key);
                        });
```

```
                    }
                    // Add logged messages to collection for batch deletion.
                    messagesToDelete.add(DeleteMessageBatchRequestEntry.builder()
                            .id(message.messageId())
                            .receiptHandle(message.receiptHandle())
                            .build());
                });
                // Delete messages.
                if (!messagesToDelete.isEmpty()) {
                    sqsClient.deleteMessageBatch(DeleteMessageBatchRequest.builder()
                            .queueUrl(queueUrl)
                            .entries(messagesToDelete)
                            .build()
                    ).join();
                }
            } // End of while block.
        } catch (InterruptedException | ExecutionException e) {
            throw new RuntimeException(e);
        }
    }
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - DeleteMessageBatch
  - GetQueueAttributes
  - PutBucketNotificationConfiguration
  - ReceiveMessage

Publicación de mensajes en colas

En el siguiente ejemplo de código, se muestra cómo:

- Crear un tema (FIFO o no FIFO)
- Suscribir varias colas al tema con la opción de aplicar un filtro
- Publicar mensajes en el tema
- Sondear las colas en busca de los mensajes recibidos

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
package com.example.sns;

import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.CreateTopicRequest;
import software.amazon.awssdk.services.sns.model.CreateTopicResponse;
import software.amazon.awssdk.services.sns.model.DeleteTopicRequest;
import software.amazon.awssdk.services.sns.model.DeleteTopicResponse;
import software.amazon.awssdk.services.sns.model.MessageAttributeValue;
import software.amazon.awssdk.services.sns.model.PublishRequest;
import software.amazon.awssdk.services.sns.model.PublishResponse;
import software.amazon.awssdk.services.sns.model.SetSubscriptionAttributesRequest;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;
import software.amazon.awssdk.services.sns.model.UnsubscribeRequest;
import software.amazon.awssdk.services.sns.model.UnsubscribeResponse;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchRequestEntry;
import software.amazon.awssdk.services.sqs.model.DeleteQueueRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueAttributesRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueAttributesResponse;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlResponse;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.QueueAttributeName;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.SetQueueAttributesRequest;
import software.amazon.awssdk.services.sqs.model.SqsException;
```

```
import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;
import java.util.Scanner;

import com.google.gson.Gson;
import com.google.gson.JsonArray;
import com.google.gson.JsonObject;
import com.google.gson.JsonPrimitive;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 * <p>
 * This Java example performs these tasks:
 * <p>
 * 1. Gives the user three options to choose from.
 * 2. Creates an Amazon Simple Notification Service (Amazon SNS) topic.
 * 3. Creates an Amazon Simple Queue Service (Amazon SQS) queue.
 * 4. Gets the SQS queue Amazon Resource Name (ARN) attribute.
 * 5. Attaches an AWS Identity and Access Management (IAM) policy to the queue.
 * 6. Subscribes to the SQS queue.
 * 7. Publishes a message to the topic.
 * 8. Displays the messages.
 * 9. Deletes the received message.
 * 10. Unsubscribes from the topic.
 * 11. Deletes the SNS topic.
 */
public class SNSWorkflow {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) {
        final String usage = "\n" +
            "Usage:\n" +
            "    <fifoQueueARN>\n\n" +
            "Where:\n" +
            "    accountId - Your AWS account Id value.";

        if (args.length != 1) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        SnsClient snsClient = SnsClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
            .build();

        SqsClient sqsClient = SqsClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
            .build();

        Scanner in = new Scanner(System.in);
        String accountId = args[0];
        String useFIFO;
        String duplication = "n";
        String topicName;
        String deduplicationID = null;
        String groupId = null;

        String topicArn;
        String sqsQueueName;
        String sqsQueueUrl;
        String sqsQueueArn;
        String subscriptionArn;
        boolean selectFIFO = false;

        String message;
        List<Message> messageList;
        List<String> filterList = new ArrayList<>();
        String msgAttValue = "";

        System.out.println(DASHES);
        System.out.println("Welcome to messaging with topics and queues.");
        System.out.println("In this scenario, you will create an SNS topic and
subscribe an SQS queue to the topic.\n" +
            "You can select from several options for configuring the topic and the
subscriptions for the queue.\n" +
            "You can then post to the topic and see the results in the queue.");
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("SNS topics can be configured as FIFO (First-In-First-
Out).\n" +
            "FIFO topics deliver messages in order and support deduplication and
 message filtering.\n" +
            "Would you like to work with FIFO topics? (y/n)");
        useFIFO = in.nextLine();
        if (useFIFO.compareTo("y") == 0) {
            selectFIFO = true;
            System.out.println("You have selected FIFO");
            System.out.println(" Because you have chosen a FIFO topic, deduplication
 is supported.\n" +
                "        Deduplication IDs are either set in the message or
 automatically generated from content using a hash function.\n"
                +
                "        If a message is successfully published to an SNS FIFO
 topic, any message published and determined to have the same deduplication ID,\n"
                +
                "        within the five-minute deduplication interval, is accepted
 but not delivered.\n" +
                "        For more information about deduplication, see https://
docs.aws.amazon.com/sns/latest/dg/fifo-message-dedup.html.");

            System.out.println(
                "Would you like to use content-based deduplication instead of
 entering a deduplication ID? (y/n)");
            duplication = in.nextLine();
            if (duplication.compareTo("y") == 0) {
                System.out.println("Please enter a group id value");
                groupId = in.nextLine();
            } else {
                System.out.println("Please enter deduplication Id value");
                deduplicationID = in.nextLine();
                System.out.println("Please enter a group id value");
                groupId = in.nextLine();
            }
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create a topic.");
        System.out.println("Enter a name for your SNS topic.");
        topicName = in.nextLine();
        if (selectFIFO) {
```

```
            System.out.println("Because you have selected a FIFO topic, '.fifo' must
be appended to the topic name.");
            topicName = topicName + ".fifo";
            System.out.println("The name of the topic is " + topicName);
            topicArn = createFIFO(snsClient, topicName, duplication);
            System.out.println("The ARN of the FIFO topic is " + topicArn);

        } else {
            System.out.println("The name of the topic is " + topicName);
            topicArn = createSNSTopic(snsClient, topicName);
            System.out.println("The ARN of the non-FIFO topic is " + topicArn);

        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Create an SQS queue.");
        System.out.println("Enter a name for your SQS queue.");
        sqsQueueName = in.nextLine();
        if (selectFIFO) {
            sqsQueueName = sqsQueueName + ".fifo";
        }
        sqsQueueUrl = createQueue(sqsClient, sqsQueueName, selectFIFO);
        System.out.println("The queue URL is " + sqsQueueUrl);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Get the SQS queue ARN attribute.");
        sqsQueueArn = getSQSQueueAttrs(sqsClient, sqsQueueUrl);
        System.out.println("The ARN of the new queue is " + sqsQueueArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Attach an IAM policy to the queue.");

        // Define the policy to use. Make sure that you change the REGION if you are
        // running this code
        // in a different region.
        String policy = """
        {
             "Statement": [
             {
                 "Effect": "Allow",
                         "Principal": {
```

```
                    "Service": "sns.amazonaws.com"
                },
                "Action": "sqs:SendMessage",
                        "Resource": "arn:aws:sqs:us-east-1:%s:%s",
                        "Condition": {
                    "ArnEquals": {
                        "aws:SourceArn": "arn:aws:sns:us-east-1:%s:%s"
                    }
                }
            }
            ]
        }
        """.formatted(accountId, sqsQueueName, accountId, topicName);

        setQueueAttr(sqsClient, sqsQueueUrl, policy);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Subscribe to the SQS queue.");
        if (selectFIFO) {
            System.out.println(
                "If you add a filter to this subscription, then only the filtered
 messages will be received in the queue.\n"
                    +
                    "For information about message filtering, see https://
docs.aws.amazon.com/sns/latest/dg/sns-message-filtering.html\n"
                    +
                    "For this example, you can filter messages by a \"tone\"
 attribute.");
            System.out.println("Would you like to filter messages for " +
 sqsQueueName + "'s subscription to the topic "
                + topicName + "?  (y/n)");
            String filterAns = in.nextLine();
            if (filterAns.compareTo("y") == 0) {
                boolean moreAns = false;
                System.out.println("You can filter messages by one or more of the
 following \"tone\" attributes.");
                System.out.println("1. cheerful");
                System.out.println("2. funny");
                System.out.println("3. serious");
                System.out.println("4. sincere");
                while (!moreAns) {
                    System.out.println("Select a number or choose 0 to end.");
                    String ans = in.nextLine();
```

```
                    switch (ans) {
                        case "1":
                            filterList.add("cheerful");
                            break;
                        case "2":
                            filterList.add("funny");
                            break;
                        case "3":
                            filterList.add("serious");
                            break;
                        case "4":
                            filterList.add("sincere");
                            break;
                        default:
                            moreAns = true;
                            break;
                    }
                }
            }
        }
        subscriptionArn = subQueue(snsClient, topicArn, sqsQueueArn, filterList);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Publish a message to the topic.");
        if (selectFIFO) {
            System.out.println("Would you like to add an attribute to this message?
(y/n)");
            String msgAns = in.nextLine();
            if (msgAns.compareTo("y") == 0) {
                System.out.println("You can filter messages by one or more of the
following \"tone\" attributes.");
                System.out.println("1. cheerful");
                System.out.println("2. funny");
                System.out.println("3. serious");
                System.out.println("4. sincere");
                System.out.println("Select a number or choose 0 to end.");
                String ans = in.nextLine();
                switch (ans) {
                    case "1":
                        msgAttValue = "cheerful";
                        break;
                    case "2":
                        msgAttValue = "funny";
```

```
                        break;
                    case "3":
                        msgAttValue = "serious";
                        break;
                    default:
                        msgAttValue = "sincere";
                        break;
                }

                System.out.println("Selected value is " + msgAttValue);
            }
            System.out.println("Enter a message.");
            message = in.nextLine();
            pubMessageFIFO(snsClient, message, topicArn, msgAttValue, duplication,
groupId, deduplicationID);

        } else {
            System.out.println("Enter a message.");
            message = in.nextLine();
            pubMessage(snsClient, message, topicArn);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Display the message. Press any key to continue.");
        in.nextLine();
        messageList = receiveMessages(sqsClient, sqsQueueUrl, msgAttValue);
        for (Message mes : messageList) {
            System.out.println("Message Id: " + mes.messageId());
            System.out.println("Full Message: " + mes.body());
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Delete the received message. Press any key to
continue.");
        in.nextLine();
        deleteMessages(sqsClient, sqsQueueUrl, messageList);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Unsubscribe from the topic and delete the queue.
Press any key to continue.");
        in.nextLine();
```

```
        unSub(snsClient, subscriptionArn);
        deleteSQSQueue(sqsClient, sqsQueueName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Delete the topic. Press any key to continue.");
        in.nextLine();
        deleteSNSTopic(snsClient, topicArn);

        System.out.println(DASHES);
        System.out.println("The SNS/SQS workflow has completed successfully.");
        System.out.println(DASHES);
    }

    public static void deleteSNSTopic(SnsClient snsClient, String topicArn) {
        try {
            DeleteTopicRequest request = DeleteTopicRequest.builder()
                .topicArn(topicArn)
                .build();

            DeleteTopicResponse result = snsClient.deleteTopic(request);
            System.out.println("Status was " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteSQSQueue(SqsClient sqsClient, String queueName) {
        try {
            GetQueueUrlRequest getQueueRequest = GetQueueUrlRequest.builder()
                .queueName(queueName)
                .build();

            String queueUrl = sqsClient.getQueueUrl(getQueueRequest).queueUrl();
            DeleteQueueRequest deleteQueueRequest = DeleteQueueRequest.builder()
                .queueUrl(queueUrl)
                .build();

            sqsClient.deleteQueue(deleteQueueRequest);
            System.out.println(queueName + " was successfully deleted.");
```

```
        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void unSub(SnsClient snsClient, String subscriptionArn) {
        try {
            UnsubscribeRequest request = UnsubscribeRequest.builder()
                .subscriptionArn(subscriptionArn)
                .build();

            UnsubscribeResponse result = snsClient.unsubscribe(request);
            System.out.println("Status was " + result.sdkHttpResponse().statusCode()
                + "\nSubscription was removed for " + request.subscriptionArn());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteMessages(SqsClient sqsClient, String queueUrl,
List<Message> messages) {
        try {
            List<DeleteMessageBatchRequestEntry> entries = new ArrayList<>();
            for (Message msg : messages) {
                DeleteMessageBatchRequestEntry entry =
DeleteMessageBatchRequestEntry.builder()
                    .id(msg.messageId())
                    .build();

                entries.add(entry);
            }

            DeleteMessageBatchRequest deleteMessageBatchRequest =
DeleteMessageBatchRequest.builder()
                .queueUrl(queueUrl)
                .entries(entries)
                .build();

            sqsClient.deleteMessageBatch(deleteMessageBatchRequest);
            System.out.println("The batch delete of messages was successful");
```

```
        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static List<Message> receiveMessages(SqsClient sqsClient, String
queueUrl, String msgAttValue) {
        try {
            if (msgAttValue.isEmpty()) {
                ReceiveMessageRequest receiveMessageRequest =
ReceiveMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .maxNumberOfMessages(5)
                    .build();
                return sqsClient.receiveMessage(receiveMessageRequest).messages();
            } else {
                // We know there are filters on the message.
                ReceiveMessageRequest receiveRequest =
ReceiveMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .messageAttributeNames(msgAttValue) // Include other message
attributes if needed.
                    .maxNumberOfMessages(5)
                    .build();

                return sqsClient.receiveMessage(receiveRequest).messages();
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    public static void pubMessage(SnsClient snsClient, String message, String
topicArn) {
        try {
            PublishRequest request = PublishRequest.builder()
                .message(message)
                .topicArn(topicArn)
                .build();
```

```
            PublishResponse result = snsClient.publish(request);
            System.out
                .println(result.messageId() + " Message sent. Status is " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void pubMessageFIFO(SnsClient snsClient,
                                      String message,
                                      String topicArn,
                                      String msgAttValue,
                                      String duplication,
                                      String groupId,
                                      String deduplicationID) {

        try {
            PublishRequest request;
            // Means the user did not choose to use a message attribute.
            if (msgAttValue.isEmpty()) {
                if (duplication.compareTo("y") == 0) {
                    request = PublishRequest.builder()
                        .message(message)
                        .messageGroupId(groupId)
                        .topicArn(topicArn)
                        .build();
                } else {
                    request = PublishRequest.builder()
                        .message(message)
                        .messageDeduplicationId(deduplicationID)
                        .messageGroupId(groupId)
                        .topicArn(topicArn)
                        .build();
                }

            } else {
                Map<String, MessageAttributeValue> messageAttributes = new
HashMap<>();
                messageAttributes.put(msgAttValue, MessageAttributeValue.builder()
                    .dataType("String")
                    .stringValue("true")
```

```
                    .build());

                if (duplication.compareTo("y") == 0) {
                    request = PublishRequest.builder()
                        .message(message)
                        .messageGroupId(groupId)
                        .topicArn(topicArn)
                        .build();
                } else {
                    // Create a publish request with the message and attributes.
                    request = PublishRequest.builder()
                        .topicArn(topicArn)
                        .message(message)
                        .messageDeduplicationId(deduplicationID)
                        .messageGroupId(groupId)
                        .messageAttributes(messageAttributes)
                        .build();
                }
            }

            // Publish the message to the topic.
            PublishResponse result = snsClient.publish(request);
            System.out
                .println(result.messageId() + " Message sent. Status was " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Subscribe to the SQS queue.
    public static String subQueue(SnsClient snsClient, String topicArn, String
queueArn, List<String> filterList) {
        try {
            SubscribeRequest request;
            if (filterList.isEmpty()) {
                // No filter subscription is added.
                request = SubscribeRequest.builder()
                    .protocol("sqs")
                    .endpoint(queueArn)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
```

```
                    .build();

                SubscribeResponse result = snsClient.subscribe(request);
                System.out.println("The queue " + queueArn + " has been subscribed
to the topic " + topicArn + "\n" +
                    "with the subscription ARN " + result.subscriptionArn());
                return result.subscriptionArn();
            } else {
                request = SubscribeRequest.builder()
                    .protocol("sqs")
                    .endpoint(queueArn)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

                SubscribeResponse result = snsClient.subscribe(request);
                System.out.println("The queue " + queueArn + " has been subscribed
to the topic " + topicArn + "\n" +
                    "with the subscription ARN " + result.subscriptionArn());

                String attributeName = "FilterPolicy";
                Gson gson = new Gson();
                String jsonString = "{\"tone\": []}";
                JsonObject jsonObject = gson.fromJson(jsonString, JsonObject.class);
                JsonArray toneArray = jsonObject.getAsJsonArray("tone");
                for (String value : filterList) {
                    toneArray.add(new JsonPrimitive(value));
                }

                String updatedJsonString = gson.toJson(jsonObject);
                System.out.println(updatedJsonString);
                SetSubscriptionAttributesRequest attRequest =
SetSubscriptionAttributesRequest.builder()
                    .subscriptionArn(result.subscriptionArn())
                    .attributeName(attributeName)
                    .attributeValue(updatedJsonString)
                    .build();

                snsClient.setSubscriptionAttributes(attRequest);
                return result.subscriptionArn();
            }

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
        return "";
    }

    // Attach a policy to the queue.
    public static void setQueueAttr(SqsClient sqsClient, String queueUrl, String
policy) {
        try {
            Map<software.amazon.awssdk.services.sqs.model.QueueAttributeName,
String> attrMap = new HashMap<>();
            attrMap.put(QueueAttributeName.POLICY, policy);

            SetQueueAttributesRequest attributesRequest =
SetQueueAttributesRequest.builder()
                .queueUrl(queueUrl)
                .attributes(attrMap)
                .build();

            sqsClient.setQueueAttributes(attributesRequest);
            System.out.println("The policy has been successfully attached.");

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static String getSQSQueueAttrs(SqsClient sqsClient, String queueUrl) {
        // Specify the attributes to retrieve.
        List<QueueAttributeName> atts = new ArrayList<>();
        atts.add(QueueAttributeName.QUEUE_ARN);

        GetQueueAttributesRequest attributesRequest =
GetQueueAttributesRequest.builder()
            .queueUrl(queueUrl)
            .attributeNames(atts)
            .build();

        GetQueueAttributesResponse response =
sqsClient.getQueueAttributes(attributesRequest);
        Map<String, String> queueAtts = response.attributesAsStrings();
        for (Map.Entry<String, String> queueAtt : queueAtts.entrySet())
            return queueAtt.getValue();
```

```
        return "";
    }

    public static String createQueue(SqsClient sqsClient, String queueName, Boolean
selectFIFO) {
        try {
            System.out.println("\nCreate Queue");
            if (selectFIFO) {
                Map<QueueAttributeName, String> attrs = new HashMap<>();
                attrs.put(QueueAttributeName.FIFO_QUEUE, "true");
                CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .attributes(attrs)
                    .build();

                sqsClient.createQueue(createQueueRequest);
                System.out.println("\nGet queue url");
                GetQueueUrlResponse getQueueUrlResponse = sqsClient

.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
                return getQueueUrlResponse.queueUrl();
            } else {
                CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .build();

                sqsClient.createQueue(createQueueRequest);
                System.out.println("\nGet queue url");
                GetQueueUrlResponse getQueueUrlResponse = sqsClient

.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
                return getQueueUrlResponse.queueUrl();
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createSNSTopic(SnsClient snsClient, String topicName) {
        CreateTopicResponse result;
```

```
        try {
            CreateTopicRequest request = CreateTopicRequest.builder()
                .name(topicName)
                .build();

            result = snsClient.createTopic(request);
            return result.topicArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createFIFO(SnsClient snsClient, String topicName, String
 duplication) {
        try {
            // Create a FIFO topic by using the SNS service client.
            Map<String, String> topicAttributes = new HashMap<>();
            if (duplication.compareTo("n") == 0) {
                topicAttributes.put("FifoTopic", "true");
                topicAttributes.put("ContentBasedDeduplication", "false");
            } else {
                topicAttributes.put("FifoTopic", "true");
                topicAttributes.put("ContentBasedDeduplication", "true");
            }

            CreateTopicRequest topicRequest = CreateTopicRequest.builder()
                .name(topicName)
                .attributes(topicAttributes)
                .build();

            CreateTopicResponse response = snsClient.createTopic(topicRequest);
            return response.topicArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateQueue
  - CreateTopic
  - DeleteMessageBatch
  - DeleteQueue
  - DeleteTopic
  - GetQueueAttributes
  - Publish
  - ReceiveMessage
  - SetQueueAttributes
  - Subscribe
  - Unsubscribe

Enviar y recibir lotes de mensajes

En el siguiente ejemplo de código, se muestra cómo:

- Crear una cola de Amazon SQS.
- Enviar lotes de mensajes a la cola.
- Recibir lotes de mensajes de la cola.
- Eliminar lotes de mensajes de una cola.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Como se muestra en los siguientes ejemplos, puede administrar operaciones de mensajes por lotes con Amazon SQS mediante dos métodos diferentes con el AWS SDK for Java 2.x:

SendRecvBatch.java usa operaciones por lotes explícitas. Los lotes de mensajes se crean manualmente y se llaman directamente a `sendMessageBatch()` y `deleteMessageBatch()`. También se gestionan las respuestas por lotes, incluidos los mensajes con errores. Este método ofrece un control total sobre el tamaño de los lotes y la gestión de errores. Sin embargo, requiere más código para administrar la lógica de procesamiento por lotes.

SimpleProducerConsumer.java usa la `SqsAsyncBatchManager` biblioteca de alto nivel para el procesamiento automático de solicitudes por lotes. Las llamadas individuales a `sendMessage()` y `deleteMessage()` se realizan con las mismas firmas de método que el cliente estándar. El SDK almacena automáticamente estas llamadas en búfer y las envía como operaciones por lotes. Este método requiere cambios mínimos en el código y, al mismo tiempo, ofrece ventajas en el rendimiento del procesamiento por lotes.

Utilice el procesamiento por lotes explícito cuando necesite un control detallado sobre la composición de los lotes y la gestión de errores. Utilice el procesamiento por lotes automático cuando desee optimizar el rendimiento con cambios mínimos en el código.

SendRecvBatch.java: utiliza operaciones por lotes explícitas con los mensajes.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.BatchResultErrorEntry;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchRequestEntry;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchResponse;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchResultEntry;
import software.amazon.awssdk.services.sqs.model.DeleteQueueRequest;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.MessageAttributeValue;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.SendMessageBatchRequest;
import software.amazon.awssdk.services.sqs.model.SendMessageBatchRequestEntry;
import software.amazon.awssdk.services.sqs.model.SendMessageBatchResponse;
import software.amazon.awssdk.services.sqs.model.SendMessageBatchResultEntry;
import software.amazon.awssdk.services.sqs.model.SqsException;

import java.io.BufferedReader;
import java.io.IOException;
import java.io.InputStream;
import java.io.InputStreamReader;
```

```
import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;


/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

/**
 * This code demonstrates basic message operations in Amazon Simple Queue Service
 (Amazon SQS).
 */

public class SendRecvBatch {
    private static final Logger LOGGER =
 LoggerFactory.getLogger(SendRecvBatch.class);
    private static final SqsClient sqsClient = SqsClient.create();


    public static void main(String[] args) {
        usageDemo();
    }
    /**
     * Send a batch of messages in a single request to an SQS queue.
     * This request may return overall success even when some messages were not
 sent.
     * The caller must inspect the Successful and Failed lists in the response and
     * resend any failed messages.
     *
     * @param queueUrl  The URL of the queue to receive the messages.
     * @param messages  The messages to send to the queue. Each message contains a
 body and attributes.
     * @return The response from SQS that contains the list of successful and failed
 messages.
     */
    public static SendMessageBatchResponse sendMessages(
            String queueUrl, List<MessageEntry> messages) {
```

```
        try {
            List<SendMessageBatchRequestEntry> entries = new ArrayList<>();

            for (int i = 0; i < messages.size(); i++) {
                MessageEntry message = messages.get(i);
                entries.add(SendMessageBatchRequestEntry.builder()
                        .id(String.valueOf(i))
                        .messageBody(message.getBody())
                        .messageAttributes(message.getAttributes())
                        .build());
            }

            SendMessageBatchRequest sendBatchRequest =
SendMessageBatchRequest.builder()
                    .queueUrl(queueUrl)
                    .entries(entries)
                    .build();

            SendMessageBatchResponse response =
sqsClient.sendMessageBatch(sendBatchRequest);

            if (!response.successful().isEmpty()) {
                for (SendMessageBatchResultEntry resultEntry :
response.successful()) {
                    LOGGER.info("Message sent: {}: {}", resultEntry.messageId(),

messages.get(Integer.parseInt(resultEntry.id())).getBody());
                }
            }

            if (!response.failed().isEmpty()) {
                for (BatchResultErrorEntry errorEntry : response.failed()) {
                    LOGGER.warn("Failed to send: {}: {}", errorEntry.id(),

messages.get(Integer.parseInt(errorEntry.id())).getBody());
                }
            }

            return response;

        } catch (SqsException e) {
            LOGGER.error("Send messages failed to queue: {}", queueUrl, e);
            throw e;
```

```
        }
    }

    /**
     * Receive a batch of messages in a single request from an SQS queue.
     *
     * @param queueUrl   The URL of the queue from which to receive messages.
     * @param maxNumber  The maximum number of messages to receive (capped at 10 by
SQS).
     *                   The actual number of messages received might be less.
     * @param waitTime   The maximum time to wait (in seconds) before returning.
When
     *                   this number is greater than zero, long polling is used.
This
     *                   can result in reduced costs and fewer false empty
responses.
     * @return The list of Message objects received. These each contain the body
     *         of the message and metadata and custom attributes.
     */
    public static List<Message> receiveMessages(String queueUrl, int maxNumber, int
waitTime) {
        try {
            ReceiveMessageRequest receiveRequest = ReceiveMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .maxNumberOfMessages(maxNumber)
                    .waitTimeSeconds(waitTime)
                    .messageAttributeNames("All")
                    .build();

            List<Message> messages =
sqsClient.receiveMessage(receiveRequest).messages();

            for (Message message : messages) {
                LOGGER.info("Received message: {}: {}", message.messageId(),
message.body());
            }

            return messages;

        } catch (SqsException e) {
            LOGGER.error("Couldn't receive messages from queue: {}", queueUrl, e);
            throw e;
        }
    }
```

```
   /**
    * Delete a batch of messages from a queue in a single request.
    *
    * @param queueUrl  The URL of the queue from which to delete the messages.
    * @param messages  The list of messages to delete.
    * @return The response from SQS that contains the list of successful and failed
    *         message deletions.
    */
   public static DeleteMessageBatchResponse deleteMessages(String queueUrl,
List<Message> messages) {
       try {
           List<DeleteMessageBatchRequestEntry> entries = new ArrayList<>();

           for (int i = 0; i < messages.size(); i++) {
               entries.add(DeleteMessageBatchRequestEntry.builder()
                       .id(String.valueOf(i))
                       .receiptHandle(messages.get(i).receiptHandle())
                       .build());
           }

           DeleteMessageBatchRequest deleteRequest =
DeleteMessageBatchRequest.builder()
                   .queueUrl(queueUrl)
                   .entries(entries)
                   .build();

           DeleteMessageBatchResponse response =
sqsClient.deleteMessageBatch(deleteRequest);

           if (!response.successful().isEmpty()) {
               for (DeleteMessageBatchResultEntry resultEntry :
response.successful()) {
                   LOGGER.info("Deleted {}",
messages.get(Integer.parseInt(resultEntry.id())).receiptHandle());
               }
           }

           if (!response.failed().isEmpty()) {
               for (BatchResultErrorEntry errorEntry : response.failed()) {
                   LOGGER.warn("Could not delete {}",
messages.get(Integer.parseInt(errorEntry.id())).receiptHandle());
               }
           }
```

```
            return response;

        } catch (SqsException e) {
            LOGGER.error("Couldn't delete messages from queue {}", queueUrl, e);
            throw e;
        }
    }

    /**
     * Helper class to represent a message with body and attributes.
     */
    public static class MessageEntry {
        private final String body;
        private final Map<String, MessageAttributeValue> attributes;

        public MessageEntry(String body, Map<String, MessageAttributeValue>
attributes) {
            this.body = body;
            this.attributes = attributes != null ? attributes : new HashMap<>();
        }

        public String getBody() {
            return body;
        }

        public Map<String, MessageAttributeValue> getAttributes() {
            return attributes;
        }
    }

    /**
     * Shows how to:
     * * Read the lines from a file and send the lines in
     *   batches of 10 as messages to a queue.
     * * Receive the messages in batches until the queue is empty.
     * * Reassemble the lines of the file and verify they match the original file.
     */
    public static void usageDemo() {
        LOGGER.info("-".repeat(88));
        LOGGER.info("Welcome to the Amazon Simple Queue Service (Amazon SQS)
demo!");
        LOGGER.info("-".repeat(88));
```

```
        String queueUrl = null;
        try {
            // Create a queue for the demo.
            String queueName = "sqs-usage-demo-message-wrapper-" +
System.currentTimeMillis();
            CreateQueueRequest createRequest = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .build();
            queueUrl = sqsClient.createQueue(createRequest).queueUrl();
            LOGGER.info("Created queue: {}", queueUrl);

            try (InputStream inputStream =
SendRecvBatch.class.getResourceAsStream("/log4j2.xml");
                 BufferedReader reader = new BufferedReader(new
InputStreamReader(inputStream))) {

                List<String> lines = reader.lines().toList();

                // Send file lines in batches.
                int batchSize = 10;
                LOGGER.info("Sending file lines in batches of {} as messages.",
batchSize);

                for (int i = 0; i < lines.size(); i += batchSize) {
                    List<MessageEntry> messageBatch = new ArrayList<>();

                    for (int j = i; j < Math.min(i + batchSize, lines.size()); j++)
{
                        String line = lines.get(j);
                        if (line == null || line.trim().isEmpty()) {
                            continue; // Skip empty lines.
                        }

                        Map<String, MessageAttributeValue> attributes = new
HashMap<>();
                        attributes.put("line", MessageAttributeValue.builder()
                                .dataType("String")
                                .stringValue(String.valueOf(j))
                                .build());

                        messageBatch.add(new MessageEntry(lines.get(j),
attributes));
                    }
```

```
                    sendMessages(queueUrl, messageBatch);
                    System.out.print(".");
                    System.out.flush();
                }

                LOGGER.info("\nDone. Sent {} messages.", lines.size());

                // Receive and process messages.
                LOGGER.info("Receiving, handling, and deleting messages in batches
of {}.", batchSize);
                String[] receivedLines = new String[lines.size()];
                boolean moreMessages = true;

                while (moreMessages) {
                    List<Message> receivedMessages = receiveMessages(queueUrl,
batchSize, 5);

                    for (Message message : receivedMessages) {
                        int lineNumber =
Integer.parseInt(message.messageAttributes().get("line").stringValue());
                        receivedLines[lineNumber] = message.body();
                    }

                    if (!receivedMessages.isEmpty()) {
                        deleteMessages(queueUrl, receivedMessages);
                    } else {
                        moreMessages = false;
                    }
                }

                LOGGER.info("\nDone.");

                // Verify that all lines were received correctly.
                boolean allLinesMatch = true;
                for (int i = 0; i < lines.size(); i++) {
                    String originalLine = lines.get(i);
                    String receivedLine = receivedLines[i] == null ? "" :
receivedLines[i];

                    if (!originalLine.equals(receivedLine)) {
                        allLinesMatch = false;
                        break;
                    }
                }
```

```
                if (allLinesMatch) {
                    LOGGER.info("Successfully reassembled all file lines!");
                } else {
                    LOGGER.info("Uh oh, some lines were missed!");
                }
            }
        } catch (SqsException e) {
            LOGGER.error("SQS operation failed", e);
        } catch (RuntimeException | IOException e) {
            LOGGER.error("Unexpected runtime error during demo", e);
        } finally {
            // Clean up by deleting the queue if it was created.
            if (queueUrl != null) {
                try {
                    DeleteQueueRequest deleteQueueRequest =
 DeleteQueueRequest.builder()
                            .queueUrl(queueUrl)
                            .build();
                    sqsClient.deleteQueue(deleteQueueRequest);
                    LOGGER.info("Deleted queue: {}", queueUrl);
                } catch (SqsException e) {
                    LOGGER.error("Failed to delete queue: {}", queueUrl, e);
                }
            }
        }

        LOGGER.info("Thanks for watching!");
        LOGGER.info("-".repeat(88));
    }
 }
```

SimpleProducerConsumer.java: utiliza el procesamiento automático de mensajes por lotes.

```
package com.example.sqs;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.sqs.SqsAsyncClient;
import software.amazon.awssdk.services.sqs.batchmanager.SqsAsyncBatchManager;
import software.amazon.awssdk.services.sqs.model.DeleteMessageRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageResponse;
```

```
import software.amazon.awssdk.services.sqs.model.GetQueueUrlRequest;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageResponse;
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;
import software.amazon.awssdk.services.sqs.model.SendMessageResponse;
import software.amazon.awssdk.core.exception.SdkException;

import java.math.BigInteger;
import java.util.List;
import java.util.Random;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.TimeUnit;
import java.util.concurrent.atomic.AtomicBoolean;
import java.util.concurrent.atomic.AtomicInteger;

/**
 * Demonstrates the AWS SDK for Java 2.x Automatic Request Batching API for Amazon
 SQS.
 *
 * This example showcases the high-level SqsAsyncBatchManager library that provides
 * efficient batching and buffering for SQS operations. The batch manager offers
 * methods that directly mirror SqsAsyncClient methods—sendMessage,
 changeMessageVisibility,
 * deleteMessage, and receiveMessage—making it a drop-in replacement with minimal
 code changes.
 *
 * Key features of the SqsAsyncBatchManager:
 * - Automatic batching: The SDK automatically buffers individual requests and sends
 them
 *   as batches when maxBatchSize (default: 10) or sendRequestFrequency (default:
 200ms)
 *   thresholds are reached
 * - Familiar API: Method signatures match SqsAsyncClient exactly, requiring no
 learning curve
 * - Background optimization: The batch manager maintains internal buffers and
 handles
 *   batching logic transparently
 * - Asynchronous operations: All methods return CompletableFuture for non-blocking
 execution
 *
 * Performance benefits demonstrated:
```

```
 * - Reduced API calls: Multiple individual requests are consolidated into single
 batch operations
 * - Lower costs: Fewer API calls result in reduced SQS charges
 * - Higher throughput: Batch operations process more messages per second
 * - Efficient resource utilization: Fewer network round trips and better connection
 reuse
 *
 * This example compares:
 * 1. Single-message operations using SqsAsyncClient directly
 * 2. Batch operations using SqsAsyncBatchManager with identical method calls
 *
 * Usage patterns:
 * - Set batch size to 1 to use SqsAsyncClient for baseline performance measurement
 * - Set batch size > 1 to use SqsAsyncBatchManager for optimized batch processing
 * - Monitor real-time throughput metrics to observe performance improvements
 *
 * Prerequisites:
 * - AWS SDK for Java 2.x version 2.28.0 or later
 * - An existing SQS queue
 * - Valid AWS credentials configured
 *
 * The program displays real-time metrics showing the dramatic performance
 difference
 * between individual operations and automatic batching.
 */
public class SimpleProducerConsumer {

    // The maximum runtime of the program.
    private final static int MAX_RUNTIME_MINUTES = 60;
    private final static Logger log =
 LoggerFactory.getLogger(SimpleProducerConsumer.class);

    /**
     * Runs the SQS batching demonstration with user-configured parameters.
     *
     * Prompts for queue name, thread counts, batch size, message size, and runtime.
     * Creates producer and consumer threads to demonstrate batching performance.
     *
     * @param args command line arguments (not used)
     * @throws InterruptedException if thread operations are interrupted
     */
    public static void main(String[] args) throws InterruptedException {

        final Scanner input = new Scanner(System.in);
```

```
        System.out.print("Enter the queue name: ");
        final String queueName = input.nextLine();

        System.out.print("Enter the number of producers: ");
        final int producerCount = input.nextInt();

        System.out.print("Enter the number of consumers: ");
        final int consumerCount = input.nextInt();

        System.out.print("Enter the number of messages per batch: ");
        final int batchSize = input.nextInt();

        System.out.print("Enter the message size in bytes: ");
        final int messageSizeByte = input.nextInt();

        System.out.print("Enter the run time in minutes: ");
        final int runTimeMinutes = input.nextInt();

        // Create SQS async client and batch manager for all operations.
        // The SqsAsyncBatchManager is created from the SqsAsyncClient using the
        // batchManager() factory method, which provides default batching
configuration.
        // This high-level library automatically handles request buffering and
batching
        // while maintaining the same method signatures as SqsAsyncClient.
        final SqsAsyncClient sqsAsyncClient = SqsAsyncClient.create();
        final SqsAsyncBatchManager batchManager = sqsAsyncClient.batchManager();

        final String queueUrl =
sqsAsyncClient.getQueueUrl(GetQueueUrlRequest.builder()
                .queueName(queueName)
                .build()).join().queueUrl();

        // The flag used to stop producer, consumer, and monitor threads.
        final AtomicBoolean stop = new AtomicBoolean(false);

        // Start the producers.
        final AtomicInteger producedCount = new AtomicInteger();
        final Thread[] producers = new Thread[producerCount];
        for (int i = 0; i < producerCount; i++) {
            if (batchSize == 1) {
                producers[i] = new Producer(sqsAsyncClient, queueUrl,
messageSizeByte,
```

```
                        producedCount, stop);
            } else {
                producers[i] = new BatchProducer(batchManager, queueUrl, batchSize,
                        messageSizeByte, producedCount, stop);
            }
            producers[i].start();
        }

        // Start the consumers.
        final AtomicInteger consumedCount = new AtomicInteger();
        final Thread[] consumers = new Thread[consumerCount];
        for (int i = 0; i < consumerCount; i++) {
            if (batchSize == 1) {
                consumers[i] = new Consumer(sqsAsyncClient, queueUrl, consumedCount,
stop);
            } else {
                consumers[i] = new BatchConsumer(batchManager, queueUrl, batchSize,
                        consumedCount, stop);
            }
            consumers[i].start();
        }

        // Start the monitor thread.
        final Thread monitor = new Monitor(producedCount, consumedCount, stop);
        monitor.start();

        // Wait for the specified amount of time then stop.
        Thread.sleep(TimeUnit.MINUTES.toMillis(Math.min(runTimeMinutes,
                MAX_RUNTIME_MINUTES)));
        stop.set(true);

        // Join all threads.
        for (int i = 0; i < producerCount; i++) {
            producers[i].join();
        }

        for (int i = 0; i < consumerCount; i++) {
            consumers[i].join();
        }

        monitor.interrupt();
        monitor.join();

        // Close resources
```

```
        batchManager.close();
        sqsAsyncClient.close();
    }

    /**
     * Creates a random string of approximately the specified size in bytes.
     *
     * @param sizeByte the target size in bytes for the generated string
     * @return a random string encoded in base-32
     */
    private static String makeRandomString(int sizeByte) {
        final byte[] bs = new byte[(int) Math.ceil(sizeByte * 5 / 8)];
        new Random().nextBytes(bs);
        bs[0] = (byte) ((bs[0] | 64) & 127);
        return new BigInteger(bs).toString(32);
    }

    /**
     * Sends messages individually using SqsAsyncClient for baseline performance
measurement.
     *
     * This producer demonstrates traditional single-message operations without
batching.
     * Each sendMessage() call results in a separate API request to SQS, providing
     * a performance baseline for comparison with the batch operations.
     *
     * The sendMessage() method signature is identical to
SqsAsyncBatchManager.sendMessage(),
     * showing how the high-level batching library maintains API compatibility while
     * adding automatic optimization behind the scenes.
     */
    private static class Producer extends Thread {
        final SqsAsyncClient sqsAsyncClient;
        final String queueUrl;
        final AtomicInteger producedCount;
        final AtomicBoolean stop;
        final String theMessage;

        /**
         * Creates a producer thread for single-message operations.
         *
         * @param sqsAsyncClient the SQS client for sending messages
         * @param queueUrl the URL of the target queue
         * @param messageSizeByte the size of messages to generate
```

```
         * @param producedCount shared counter for tracking sent messages
         * @param stop shared flag to signal thread termination
         */
        Producer(SqsAsyncClient sqsAsyncClient, String queueUrl, int
messageSizeByte,
                 AtomicInteger producedCount, AtomicBoolean stop) {
            this.sqsAsyncClient = sqsAsyncClient;
            this.queueUrl = queueUrl;
            this.producedCount = producedCount;
            this.stop = stop;
            this.theMessage = makeRandomString(messageSizeByte);
        }

        /**
         * Continuously sends messages until the stop flag is set.
         *
         * Uses SqsAsyncClient.sendMessage() directly, resulting in one API call per
message.
         * This approach provides baseline performance metrics for comparison with
batching.
         * Each call blocks until the individual message is sent, demonstrating
traditional
         * one-request-per-operation behavior.
         */
        public void run() {
            try {
                while (!stop.get()) {
                    sqsAsyncClient.sendMessage(SendMessageRequest.builder()
                            .queueUrl(queueUrl)
                            .messageBody(theMessage)
                            .build()).join();
                    producedCount.incrementAndGet();
                }
            } catch (SdkException | java.util.concurrent.CompletionException e) {
                // Handle both SdkException and CompletionException from async
operations.
                // If this unlikely condition occurs, stop.
                log.error("Producer: " + e.getMessage());
                System.exit(1);
            }
        }
    }

    /**
```

```
    * Sends messages using SqsAsyncBatchManager for automatic request batching and
optimization.
    *
    * This producer demonstrates the AWS SDK for Java 2.x high-level batching
library.
    * The SqsAsyncBatchManager automatically buffers individual sendMessage() calls
and
    * sends them as batches when thresholds are reached:
    * - maxBatchSize: Maximum 10 messages per batch (default)
    * - sendRequestFrequency: 200ms timeout before sending partial batches
(default)
    *
    * Key advantages of the batching approach:
    * - Identical API: batchManager.sendMessage() has the same signature as
sqsAsyncClient.sendMessage()
    * - Automatic optimization: No code changes needed to benefit from batching
    * - Transparent buffering: The SDK handles batching logic internally
    * - Reduced API calls: Multiple messages sent in single batch requests
    * - Lower costs: Fewer API calls result in reduced SQS charges
    * - Higher throughput: Batch operations process significantly more messages per
second
    */
   private static class BatchProducer extends Thread {
       final SqsAsyncBatchManager batchManager;
       final String queueUrl;
       final int batchSize;
       final AtomicInteger producedCount;
       final AtomicBoolean stop;
       final String theMessage;

       /**
        * Creates a producer thread for batch operations.
        *
        * @param batchManager the batch manager for efficient message sending
        * @param queueUrl the URL of the target queue
        * @param batchSize the number of messages to send per batch
        * @param messageSizeByte the size of messages to generate
        * @param producedCount shared counter for tracking sent messages
        * @param stop shared flag to signal thread termination
        */
       BatchProducer(SqsAsyncBatchManager batchManager, String queueUrl, int
batchSize,
                     int messageSizeByte, AtomicInteger producedCount,
                     AtomicBoolean stop) {
```

```
            this.batchManager = batchManager;
            this.queueUrl = queueUrl;
            this.batchSize = batchSize;
            this.producedCount = producedCount;
            this.stop = stop;
            this.theMessage = makeRandomString(messageSizeByte);
        }

        /**
         * Continuously sends batches of messages using the high-level batching
library.
         *
         * Notice how batchManager.sendMessage() uses the exact same method
signature
         * and request builder pattern as SqsAsyncClient.sendMessage(). This
demonstrates
         * the drop-in replacement capability of the SqsAsyncBatchManager.
         *
         * The SDK automatically:
         * - Buffers individual sendMessage() calls internally
         * - Groups them into batch requests when thresholds are met
         * - Sends SendMessageBatchRequest operations to SQS
         * - Returns individual CompletableFuture responses for each message
         *
         * This transparent batching provides significant performance improvements
         * without requiring changes to application logic or error handling
patterns.
         */
        public void run() {
            try {
                while (!stop.get()) {
                    // Send multiple messages using the high-level batch manager.
                    // Each batchManager.sendMessage() call uses identical syntax to
                    // sqsAsyncClient.sendMessage(), demonstrating API
compatibility.
                    // The SDK automatically buffers these calls and sends them as
                    // batch operations when maxBatchSize (10) or
sendRequestFrequency (200ms)
                    // thresholds are reached, significantly improving throughput.
                    for (int i = 0; i < batchSize; i++) {
                        CompletableFuture<SendMessageResponse> future =
batchManager.sendMessage(
                                SendMessageRequest.builder()
                                        .queueUrl(queueUrl)
```

```
                                        .messageBody(theMessage)
                                        .build());

                        // Handle the response asynchronously
                        future.whenComplete((response, throwable) -> {
                            if (throwable == null) {
                                producedCount.incrementAndGet();
                            } else if (!(throwable instanceof
java.util.concurrent.CancellationException) &&
                                       !(throwable.getMessage() != null &&
throwable.getMessage().contains("executor not accepting a task"))) {
                                log.error("BatchProducer: Failed to send message",
throwable);
                            }
                            // Ignore CancellationException and executor shutdown
errors - expected during shutdown
                        });
                    }

                    // Small delay to allow batching to occur
                    Thread.sleep(10);
                }
            } catch (InterruptedException e) {
                Thread.currentThread().interrupt();
                log.error("BatchProducer interrupted: " + e.getMessage());
            } catch (SdkException | java.util.concurrent.CompletionException e) {
                log.error("BatchProducer: " + e.getMessage());
                System.exit(1);
            }
        }
    }

    /**
     * Receives and deletes messages individually using SqsAsyncClient for baseline
measurement.
     *
     * This consumer demonstrates traditional single-message operations without
batching.
     * Each receiveMessage() and deleteMessage() call results in separate API
requests,
     * providing a performance baseline for comparison with batch operations.
     *
     * The method signatures are identical to SqsAsyncBatchManager methods:
     * - receiveMessage() matches batchManager.receiveMessage()
```

```
     * - deleteMessage() matches batchManager.deleteMessage()
     *
     * This API consistency allows easy migration to the high-level batching
 library.
     */
    private static class Consumer extends Thread {
        final SqsAsyncClient sqsAsyncClient;
        final String queueUrl;
        final AtomicInteger consumedCount;
        final AtomicBoolean stop;

        /**
         * Creates a consumer thread for single-message operations.
         *
         * @param sqsAsyncClient the SQS client for receiving messages
         * @param queueUrl the URL of the source queue
         * @param consumedCount shared counter for tracking processed messages
         * @param stop shared flag to signal thread termination
         */
        Consumer(SqsAsyncClient sqsAsyncClient, String queueUrl, AtomicInteger
 consumedCount,
                 AtomicBoolean stop) {
            this.sqsAsyncClient = sqsAsyncClient;
            this.queueUrl = queueUrl;
            this.consumedCount = consumedCount;
            this.stop = stop;
        }

        /**
         * Continuously receives and deletes messages using traditional single-
request operations.
         *
         * Uses SqsAsyncClient methods directly:
         * - receiveMessage(): One API call per receive operation
         * - deleteMessage(): One API call per delete operation
         *
         * This approach demonstrates the baseline performance without batching
 optimization.
         * Compare these method calls with the identical signatures used in
 BatchConsumer
         * to see how the high-level batching library maintains API compatibility.
         */
        public void run() {
            try {
```

```
                while (!stop.get()) {
                    try {
                        final ReceiveMessageResponse result =
sqsAsyncClient.receiveMessage(
                                ReceiveMessageRequest.builder()
                                        .queueUrl(queueUrl)
                                        .build()).join();

                        if (!result.messages().isEmpty()) {
                            final Message m = result.messages().get(0);
                            // Note: deleteMessage() signature identical to
batchManager.deleteMessage()

sqsAsyncClient.deleteMessage(DeleteMessageRequest.builder()
                                        .queueUrl(queueUrl)
                                        .receiptHandle(m.receiptHandle())
                                        .build()).join();
                            consumedCount.incrementAndGet();
                        }
                    } catch (SdkException | java.util.concurrent.CompletionException
e) {
                        log.error(e.getMessage());
                    }
                }
            } catch (SdkException | java.util.concurrent.CompletionException e) {
                // Handle both SdkException and CompletionException from async
operations.
                // If this unlikely condition occurs, stop.
                log.error("Consumer: " + e.getMessage());
                System.exit(1);
            }
        }
    }

    /**
     * Receives and deletes messages using SqsAsyncBatchManager for automatic
optimization.
     *
     * This consumer demonstrates the AWS SDK for Java 2.x high-level batching
library
     * for message consumption. The SqsAsyncBatchManager provides two key
optimizations:
     *
```

```
    * 1. Receive optimization: Maintains an internal buffer of messages fetched in
the
    *    background, so receiveMessage() calls return immediately from the buffer
    * 2. Delete batching: Automatically buffers deleteMessage() calls and sends
them
    *    as DeleteMessageBatchRequest operations when thresholds are reached
    *
    * Key features:
    * - Identical API: receiveMessage() and deleteMessage() have the same
signatures
    *   as SqsAsyncClient methods, making this a true drop-in replacement
    * - Background fetching: The batch manager continuously fetches messages to
keep
    *   the internal buffer populated, reducing receive latency
    * - Automatic delete batching: Individual deleteMessage() calls are buffered
and
    *   sent as batch operations (up to 10 per batch, 200ms frequency)
    * - Transparent optimization: No application logic changes needed to benefit
    *
    * Performance benefits:
    * - Reduced API calls through automatic batching of delete operations
    * - Lower latency for receives due to background message buffering
    * - Higher overall throughput with fewer network round trips
    */
   private static class BatchConsumer extends Thread {
       final SqsAsyncBatchManager batchManager;
       final String queueUrl;
       final int batchSize;
       final AtomicInteger consumedCount;
       final AtomicBoolean stop;

       /**
        * Creates a consumer thread for batch operations.
        *
        * @param batchManager the batch manager for efficient message processing
        * @param queueUrl the URL of the source queue
        * @param batchSize the maximum number of messages to receive per batch
        * @param consumedCount shared counter for tracking processed messages
        * @param stop shared flag to signal thread termination
        */
       BatchConsumer(SqsAsyncBatchManager batchManager, String queueUrl, int
batchSize,
                     AtomicInteger consumedCount, AtomicBoolean stop) {
           this.batchManager = batchManager;
```

```
            this.queueUrl = queueUrl;
            this.batchSize = batchSize;
            this.consumedCount = consumedCount;
            this.stop = stop;
        }

        /**
         * Continuously receives and deletes messages using the high-level batching
library.
         *
         * Demonstrates the key advantage of SqsAsyncBatchManager: identical method
signatures
         * with automatic optimization. Notice how:
         *
         * - batchManager.receiveMessage() uses the same syntax as
sqsAsyncClient.receiveMessage()
         * - batchManager.deleteMessage() uses the same syntax as
sqsAsyncClient.deleteMessage()
         *
         * Behind the scenes, the batch manager:
         * 1. Maintains an internal message buffer populated by background fetching
         * 2. Returns messages immediately from the buffer (reduced latency)
         * 3. Automatically batches deleteMessage() calls into
DeleteMessageBatchRequest operations
         * 4. Sends batch deletes when maxBatchSize (10) or sendRequestFrequency
(200ms) is reached
         *
         * This provides significant performance improvements with zero code changes
         * compared to traditional SqsAsyncClient usage patterns.
         */
        public void run() {
            try {
                while (!stop.get()) {
                    // Receive messages using the high-level batch manager.
                    // This call uses identical syntax to
sqsAsyncClient.receiveMessage()
                    // but benefits from internal message buffering for improved
performance.
                    final ReceiveMessageResponse result =
batchManager.receiveMessage(
                            ReceiveMessageRequest.builder()
                                    .queueUrl(queueUrl)
                                    .maxNumberOfMessages(Math.min(batchSize, 10))
                                    .build()).join();
```

```
                    if (!result.messages().isEmpty()) {
                        final List<Message> messages = result.messages();

                        // Delete messages using the batch manager.
                        // Each deleteMessage() call uses identical syntax to
SqsAsyncClient
                        // but the SDK automatically buffers these calls and sends
them
                        // as DeleteMessageBatchRequest operations for optimal
performance.
                        for (Message message : messages) {
                            CompletableFuture<DeleteMessageResponse> future =
batchManager.deleteMessage(
                                    DeleteMessageRequest.builder()
                                            .queueUrl(queueUrl)
                                            .receiptHandle(message.receiptHandle())
                                            .build());

                            future.whenComplete((response, throwable) -> {
                                if (throwable == null) {
                                    consumedCount.incrementAndGet();
                                } else if (!(throwable instanceof
java.util.concurrent.CancellationException) &&
                                        !(throwable.getMessage() != null &&
throwable.getMessage().contains("executor not accepting a task"))) {
                                    log.error("BatchConsumer: Failed to delete
message", throwable);
                                }
                                // Ignore CancellationException and executor
shutdown errors - expected during shutdown
                            });
                        }
                    }

                    // Small delay to prevent tight polling
                    Thread.sleep(10);
                }
            } catch (InterruptedException e) {
                Thread.currentThread().interrupt();
                log.error("BatchConsumer interrupted: " + e.getMessage());
            } catch (SdkException | java.util.concurrent.CompletionException e) {
                // Handle both SdkException and CompletionException from async
operations.
```

```
                // If this unlikely condition occurs, stop.
                log.error("BatchConsumer: " + e.getMessage());
                System.exit(1);
            }
        }
    }

    /**
     * Displays real-time throughput statistics every second.
     *
     * This thread logs the current count of produced and consumed messages
     * to help you monitor the performance comparison.
     */
    private static class Monitor extends Thread {
        private final AtomicInteger producedCount;
        private final AtomicInteger consumedCount;
        private final AtomicBoolean stop;

        /**
         * Creates a monitoring thread that displays throughput statistics.
         *
         * @param producedCount shared counter for messages sent
         * @param consumedCount shared counter for messages processed
         * @param stop shared flag to signal thread termination
         */
        Monitor(AtomicInteger producedCount, AtomicInteger consumedCount,
                AtomicBoolean stop) {
            this.producedCount = producedCount;
            this.consumedCount = consumedCount;
            this.stop = stop;
        }

        /**
         * Logs throughput statistics every second until stopped.
         *
         * Displays the current count of produced and consumed messages
         * to help monitor the performance comparison between batching strategies.
         */
        public void run() {
            try {
                while (!stop.get()) {
                    Thread.sleep(1000);
                    log.info("produced messages = " + producedCount.get()
                            + ", consumed messages = " + consumedCount.get());
```

```
                }
            } catch (InterruptedException e) {
                // Allow the thread to exit.
            }
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateQueue
  - DeleteMessage
  - DeleteMessageBatch
  - DeleteQueue
  - ReceiveMessage
  - SendMessage
  - SendMessageBatch

Uso de la Biblioteca de mensajes Java de Amazon SQS para trabajar con la interfaz de JMS

En el siguiente ejemplo de código, se muestra cómo utilizar la Biblioteca de mensajes Java de Amazon SQS para trabajar con la interfaz de JMS.

SDK para Java 2.x

> **Note**
>
> Hay más información. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Los siguientes ejemplos funcionan con colas estándar de Amazon SQS e incluyen:

- Envío de un mensaje de texto.
- Recepción de mensajes de forma sincrónica
- Recepción de mensajes de forma asincrónica
- Recepción de mensajes mediante el modo CLIENT_ACNOWLEDGE.

- Recepción de mensajes mediante el modo UNORDERED_ACNOWLEDGE.
- Uso de Spring para inyectar dependencias.
- Una clase de utilidad que proporciona métodos comunes utilizados en los demás ejemplos.

Para obtener más información sobre el uso de JMS con Amazon SQS, consulte la Guía para desarrolladores de Amazon SQS.

Envío de un mensaje de texto.

```
   /**
    * This method establishes a connection to a standard Amazon SQS queue using the
Amazon SQS
    * Java Messaging Library and sends text messages to it. It uses JMS (Java
Message Service) API
    * with automatic acknowledgment mode to ensure reliable message delivery, and
automatically
    * manages all messaging resources.
    *
    * @throws JMSException If there is a problem connecting to or sending messages
to the queue
    */
   public static void doSendTextMessage() throws JMSException {
       // Create a connection factory.
       SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
               new ProviderConfiguration(),
               SqsClient.create()
       );

       // Create the connection in a try-with-resources statement so that it's
closed automatically.
       try (SQSConnection connection = connectionFactory.createConnection()) {

           // Create the queue if needed.
           SqsJmsExampleUtils.ensureQueueExists(connection, QUEUE_NAME,
SqsJmsExampleUtils.QUEUE_VISIBILITY_TIMEOUT);

           // Create a session that uses the JMS auto-acknowledge mode.
           Session session = connection.createSession(false,
Session.AUTO_ACKNOWLEDGE);
           MessageProducer producer =
session.createProducer(session.createQueue(QUEUE_NAME));

           createAndSendMessages(session, producer);
```

```
        } // The connection closes automatically. This also closes the session.
        LOGGER.info("Connection closed");
    }

    /**
     * This method reads text input from the keyboard and sends each line as a
separate message
     * to a standard Amazon SQS queue using the Amazon SQS Java Messaging Library.
It continues
     * to accept input until the user enters an empty line, using JMS (Java Message
Service) API to
     * handle the message delivery.
     *
     * @param session The JMS session used to create messages
     * @param producer The JMS message producer used to send messages to the queue
     */
    private static void createAndSendMessages(Session session, MessageProducer
producer) {
        BufferedReader inputReader = new BufferedReader(
                new InputStreamReader(System.in, Charset.defaultCharset()));

        try {
            String input;
            while (true) {
                LOGGER.info("Enter message to send (leave empty to exit): ");
                input = inputReader.readLine();
                if (input == null || input.isEmpty()) break;

                TextMessage message = session.createTextMessage(input);
                producer.send(message);
                LOGGER.info("Send message {}", message.getJMSMessageID());
            }
        } catch (EOFException e) {
            // Just return on EOF
        } catch (IOException e) {
            LOGGER.error("Failed reading input: {}", e.getMessage(), e);
        } catch (JMSException e) {
            LOGGER.error("Failed sending message: {}", e.getMessage(), e);
        }
    }
```

Recepción de mensajes de forma sincrónica

```
   /**
    * This method receives messages from a standard Amazon SQS queue using the
Amazon SQS Java
    * Messaging Library. It creates a connection to the queue using JMS (Java
Message Service),
    * waits for messages to arrive, and processes them one at a time. The method
handles all
    * necessary setup and cleanup of messaging resources.
    *
    * @throws JMSException If there is a problem connecting to or receiving
messages from the queue
    */
   public static void doReceiveMessageSync() throws JMSException {
       // Create a connection factory.
       SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
               new ProviderConfiguration(),
               SqsClient.create()
       );

       // Create a connection.
       try (SQSConnection connection = connectionFactory.createConnection() ) {

           // Create the queue if needed.
           SqsJmsExampleUtils.ensureQueueExists(connection, QUEUE_NAME,
SqsJmsExampleUtils.QUEUE_VISIBILITY_TIMEOUT);

           // Create a session.
           Session session = connection.createSession(false,
Session.CLIENT_ACKNOWLEDGE);
           MessageConsumer consumer =
session.createConsumer(session.createQueue(QUEUE_NAME));

           connection.start();

           receiveMessages(consumer);
       }  // The connection closes automatically. This also closes the session.
       LOGGER.info("Connection closed");
   }

   /**
    * This method continuously checks for new messages from a standard Amazon SQS
queue using
```

```
    * the Amazon SQS Java Messaging Library. It waits up to 20 seconds for each
message, processes
    * it using JMS (Java Message Service), and confirms receipt. The method stops
checking for
    * messages after 20 seconds of no activity.
    *
    * @param consumer The JMS message consumer that receives messages from the
queue
    */
   private static void receiveMessages(MessageConsumer consumer) {
       try {
           while (true) {
               LOGGER.info("Waiting for messages...");
               // Wait 1 minute for a message
               Message message =
consumer.receive(Duration.ofSeconds(20).toMillis());
               if (message == null) {
                   LOGGER.info("Shutting down after 20 seconds of silence.");
                   break;
               }
               SqsJmsExampleUtils.handleMessage(message);
               message.acknowledge();
               LOGGER.info("Acknowledged message {}", message.getJMSMessageID());
           }
       } catch (JMSException e) {
           LOGGER.error("Error receiving from SQS: {}", e.getMessage(), e);
       }
   }
```

Recepción de mensajes de forma asincrónica

```
   /**
    * This method sets up automatic message handling for a standard Amazon SQS
queue using the
    * Amazon SQS Java Messaging Library. It creates a listener that processes
messages as soon
    * as they arrive using JMS (Java Message Service), runs for 5 seconds, then
cleans up all
    * messaging resources.
    *
    * @throws JMSException If there is a problem connecting to or receiving
messages from the queue
```

```
     */
    public static void doReceiveMessageAsync() throws JMSException {
        // Create a connection factory.
        SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
                new ProviderConfiguration(),
                SqsClient.create()
        );

        // Create a connection.
        try (SQSConnection connection = connectionFactory.createConnection() ) {

            // Create the queue if needed.
            SqsJmsExampleUtils.ensureQueueExists(connection, QUEUE_NAME,
SqsJmsExampleUtils.QUEUE_VISIBILITY_TIMEOUT);

            // Create a session.
            Session session = connection.createSession(false,
Session.CLIENT_ACKNOWLEDGE);

            try {
                // Create a consumer for the queue.
                MessageConsumer consumer =
session.createConsumer(session.createQueue(QUEUE_NAME));
                // Provide an implementation of the MessageListener interface, which
has a single 'onMessage' method.
                // We use a lambda expression for the implementation.
                consumer.setMessageListener(message -> {
                    try {
                        SqsJmsExampleUtils.handleMessage(message);
                        message.acknowledge();
                    } catch (JMSException e) {
                        LOGGER.error("Error processing message: {}",
e.getMessage());
                    }
                });
                // Start receiving incoming messages.
                connection.start();
                LOGGER.info("Waiting for messages...");
            } catch (JMSException e) {
                throw new RuntimeException(e);
            }
            try {
                Thread.sleep(5000);
            } catch (InterruptedException e) {
```

```
                throw new RuntimeException(e);
            }
        }  // The connection closes automatically. This also closes the session.
        LOGGER.info( "Connection closed" );
    }
```

Recepción de mensajes mediante el modo CLIENT_ACNOWLEDGE.

```
    /**
     * This method demonstrates how message acknowledgment affects message
processing in a standard
     * Amazon SQS queue using the Amazon SQS Java Messaging Library. It sends
messages to the queue,
     * then shows how JMS (Java Message Service) client acknowledgment mode handles
both explicit
     * and implicit message confirmations, including how acknowledging one message
can automatically
     * acknowledge previous messages.
     *
     * @throws JMSException If there is a problem with the messaging operations
     */
    public static void doReceiveMessagesSyncClientAcknowledge() throws JMSException
{
        // Create a connection factory.
        SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
                new ProviderConfiguration(),
                SqsClient.create()
        );

        // Create the connection in a try-with-resources statement so that it's
closed automatically.
        try (SQSConnection connection = connectionFactory.createConnection() ) {

            // Create the queue if needed.
            SqsJmsExampleUtils.ensureQueueExists(connection, QUEUE_NAME,
TIME_OUT_SECONDS);

            // Create a session with client acknowledge mode.
            Session session = connection.createSession(false,
Session.CLIENT_ACKNOWLEDGE);

            // Create a producer and consumer.
```

```
            MessageProducer producer =
session.createProducer(session.createQueue(QUEUE_NAME));
            MessageConsumer consumer =
session.createConsumer(session.createQueue(QUEUE_NAME));

            // Open the connection.
            connection.start();

            // Send two text messages.
            sendMessage(producer, session, "Message 1");
            sendMessage(producer, session, "Message 2");

            // Receive a message and don't acknowledge it.
            receiveMessage(consumer, false);

            // Receive another message and acknowledge it.
            receiveMessage(consumer, true);

            // Wait for the visibility time out, so that unacknowledged messages
reappear in the queue,
            LOGGER.info("Waiting for visibility timeout...");
            try {
                Thread.sleep(TIME_OUT_MILLIS);
            } catch (InterruptedException e) {
                LOGGER.error("Interrupted while waiting for visibility timeout", e);
                Thread.currentThread().interrupt();
                throw new RuntimeException("Processing interrupted", e);
            }

            /*  We will attempt to receive another message, but none will be
available. This is because in
                CLIENT_ACKNOWLEDGE mode, when we acknowledged the second message,
all previous messages were
                automatically acknowledged as well. Therefore, although we never
directly acknowledged the first
                message, it was implicitly acknowledged when we confirmed the second
one. */
            receiveMessage(consumer, true);
        } // The connection closes automatically. This also closes the session.
        LOGGER.info("Connection closed.");

    }
```

```
   /**
    * Sends a text message using the specified JMS MessageProducer and Session.
    *
    * @param producer    The JMS MessageProducer used to send the message
    * @param session     The JMS Session used to create the text message
    * @param messageText The text content to be sent in the message
    * @throws JMSException If there is an error creating or sending the message
    */
   private static void sendMessage(MessageProducer producer, Session session,
String messageText) throws JMSException {
       // Create a text message and send it.
       producer.send(session.createTextMessage(messageText));
   }

   /**
    * Receives and processes a message from a JMS queue using the specified
consumer.
    * The method waits for a message until the configured timeout period is
reached.
    * If a message is received, it is logged and optionally acknowledged based on
the
    * acknowledge parameter.
    *
    * @param consumer    The JMS MessageConsumer used to receive messages from the
queue
    * @param acknowledge Boolean flag indicating whether to acknowledge the
message.
    *                    If true, the message will be acknowledged after processing
    * @throws JMSException If there is an error receiving, processing, or
acknowledging the message
    */
   private static void receiveMessage(MessageConsumer consumer, boolean
acknowledge) throws JMSException {
       // Receive a message.
       Message message = consumer.receive(TIME_OUT_MILLIS);

       if (message == null) {
           LOGGER.info("Queue is empty!");
       } else {
           // Since this queue has only text messages, cast the message object and
print the text.
           LOGGER.info("Received: {}    Acknowledged: {}", ((TextMessage)
message).getText(), acknowledge);
```

```
            // Acknowledge the message if asked.
            if (acknowledge) message.acknowledge();
        }
    }
```

Recepción de mensajes mediante el modo UNORDERED_ACNOWLEDGE.

```
    /**
     * Demonstrates message acknowledgment behavior in UNORDERED_ACKNOWLEDGE mode
with Amazon SQS JMS.
     * In this mode, each message must be explicitly acknowledged regardless of
receive order.
     * Unacknowledged messages return to the queue after the visibility timeout
expires,
     * unlike CLIENT_ACKNOWLEDGE mode where acknowledging one message acknowledges
all previous messages.
     *
     * @throws JMSException         If a JMS-related error occurs during message
operations
     */
    public static void doReceiveMessagesUnorderedAcknowledge() throws JMSException {
        // Create a connection factory.
        SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
                new ProviderConfiguration(),
                SqsClient.create()
        );

        // Create the connection in a try-with-resources statement so that it's
closed automatically.
        try( SQSConnection connection = connectionFactory.createConnection() ) {

            // Create the queue if needed.
            SqsJmsExampleUtils.ensureQueueExists(connection, QUEUE_NAME,
TIME_OUT_SECONDS);

            // Create a session with unordered acknowledge mode.
            Session session = connection.createSession(false,
SQSSession.UNORDERED_ACKNOWLEDGE);

            // Create the producer and consumer.
            MessageProducer producer =
session.createProducer(session.createQueue(QUEUE_NAME));
```

```
            MessageConsumer consumer =
session.createConsumer(session.createQueue(QUEUE_NAME));

            // Open a connection.
            connection.start();

            // Send two text messages.
            sendMessage(producer, session, "Message 1");
            sendMessage(producer, session, "Message 2");

            // Receive a message and don't acknowledge it.
            receiveMessage(consumer, false);

            // Receive another message and acknowledge it.
            receiveMessage(consumer, true);

            // Wait for the visibility time out, so that unacknowledged messages
reappear in the queue.
            LOGGER.info("Waiting for visibility timeout...");
            try {
                Thread.sleep(TIME_OUT_MILLIS);
            } catch (InterruptedException e) {
                LOGGER.error("Interrupted while waiting for visibility timeout", e);
                Thread.currentThread().interrupt();
                throw new RuntimeException("Processing interrupted", e);
            }

            /*  We will attempt to receive another message, and we'll get the first
message again. This occurs
                because in UNORDERED_ACKNOWLEDGE mode, each message requires its own
separate acknowledgment.
                Since we only acknowledged the second message, the first message
remains in the queue for
                redelivery. */
            receiveMessage(consumer, true);

            LOGGER.info("Connection closed.");
        } // The connection closes automatically. This also closes the session.
    }

    /**
     * Sends a text message to an Amazon SQS queue using JMS.
     *
     * @param producer    The JMS MessageProducer for the queue
```

```
     * @param session     The JMS Session for message creation
     * @param messageText The message content
     * @throws JMSException If message creation or sending fails
     */
    private static void sendMessage(MessageProducer producer, Session session,
String messageText) throws JMSException {
        // Create a text message and send it.
        producer.send(session.createTextMessage(messageText));
    }
    /**
     * Synchronously receives a message from an Amazon SQS queue using the JMS API
     * with an acknowledgment parameter.
     *
     * @param consumer    The JMS MessageConsumer for the queue
     * @param acknowledge If true, acknowledges the message after receipt
     * @throws JMSException If message reception or acknowledgment fails
     */
    private static void receiveMessage(MessageConsumer consumer, boolean
acknowledge) throws JMSException {
        // Receive a message.
        Message message = consumer.receive(TIME_OUT_MILLIS);

        if (message == null) {
            LOGGER.info("Queue is empty!");
        } else {
            // Since this queue has only text messages, cast the message object and
print the text.
            LOGGER.info("Received: {}    Acknowledged: {}", ((TextMessage)
message).getText(), acknowledge);

            // Acknowledge the message if asked.
            if (acknowledge) message.acknowledge();
        }
    }
```

Uso de Spring para inyectar dependencias.

```
package com.example.sqs.jms.spring;

import com.amazon.sqs.javamessaging.SQSConnection;
import com.example.sqs.jms.SqsJmsExampleUtils;
import jakarta.jms.*;
```

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import org.springframework.beans.factory.NoSuchBeanDefinitionException;
import org.springframework.context.support.FileSystemXmlApplicationContext;

import java.io.File;
import java.net.URL;
import java.util.concurrent.TimeUnit;

/**
 * Demonstrates how to send and receive messages using the Amazon SQS Java Messaging
 Library
 * with Spring Framework integration. This example connects to a standard Amazon SQS
 message
 * queue using Spring's dependency injection to configure the connection and
 messaging components.
 * The application uses the JMS (Java Message Service) API to handle message
 operations.
 */
public class SpringExample {
    private static final Integer POLLING_SECONDS = 15;
    private static final String SPRING_XML_CONFIG_FILE =
 "SpringExampleConfiguration.xml.txt";
    private static final Logger LOGGER =
 LoggerFactory.getLogger(SpringExample.class);

    /**
     * Demonstrates sending and receiving messages through a standard Amazon SQS
 message queue
     * using Spring Framework configuration. This method loads connection settings
 from an XML file,
     * establishes a messaging session using the Amazon SQS Java Messaging Library,
 and processes
     * messages using JMS (Java Message Service) operations. If the queue doesn't
 exist, it will
     * be created automatically.
     *
     * @param args Command line arguments (not used)
     */
    public static void main(String[] args) {

        URL resource =
 SpringExample.class.getClassLoader().getResource(SPRING_XML_CONFIG_FILE);
        File springFile = new File(resource.getFile());
```

```
        if (!springFile.exists() || !springFile.canRead()) {
            LOGGER.error("File " + SPRING_XML_CONFIG_FILE + " doesn't exist or isn't
readable.");
            System.exit(1);
        }

        try (FileSystemXmlApplicationContext context =
                     new FileSystemXmlApplicationContext("file://" +
springFile.getAbsolutePath())) {

            Connection connection;
            try {
                connection = context.getBean(Connection.class);
            } catch (NoSuchBeanDefinitionException e) {
                LOGGER.error("Can't find the JMS connection to use: " +
e.getMessage(), e);
                System.exit(2);
                return;
            }

            String queueName;
            try {
                queueName = context.getBean("queueName", String.class);
            } catch (NoSuchBeanDefinitionException e) {
                LOGGER.error("Can't find the name of the queue to use: " +
e.getMessage(), e);
                System.exit(3);
                return;
            }
            try {
                if (connection instanceof SQSConnection) {
                    SqsJmsExampleUtils.ensureQueueExists((SQSConnection) connection,
queueName, SqsJmsExampleUtils.QUEUE_VISIBILITY_TIMEOUT);
                }
                // Create the JMS session.
                Session session = connection.createSession(false,
Session.CLIENT_ACKNOWLEDGE);

                SqsJmsExampleUtils.sendTextMessage(session, queueName);
                MessageConsumer consumer =
session.createConsumer(session.createQueue(queueName));

                receiveMessages(consumer);
            } catch (JMSException e) {
```

```
                LOGGER.error(e.getMessage(), e);
                throw new RuntimeException(e);
            }
        }   // Spring context autocloses. Managed Spring beans that implement
 AutoClosable, such as the
        // 'connection' bean, are also closed.
        LOGGER.info("Context closed");
    }

    /**
     * Continuously checks for and processes messages from a standard Amazon SQS
 message queue
     * using the Amazon SQS Java Messaging Library underlying the JMS API. This
 method waits for incoming messages,
     * processes them when they arrive, and acknowledges their receipt using JMS
 (Java Message
     * Service) operations. The method will stop checking for messages after 15
 seconds of
     * inactivity.
     *
     * @param consumer The JMS message consumer used to receive messages from the
 queue
     */
    private static void receiveMessages(MessageConsumer consumer) {
        try {
            while (true) {
                LOGGER.info("Waiting for messages...");
                // Wait 15 seconds for a message.
                Message message =
 consumer.receive(TimeUnit.SECONDS.toMillis(POLLING_SECONDS));
                if (message == null) {
                    LOGGER.info("Shutting down after {} seconds of silence.",
 POLLING_SECONDS);
                    break;
                }
                SqsJmsExampleUtils.handleMessage(message);
                message.acknowledge();
                LOGGER.info("Message acknowledged.");
            }
        } catch (JMSException e) {
            LOGGER.error("Error receiving from SQS.", e);
        }
    }
}
```

Definiciones de Spring Bean.

```
<?xml version="1.0" encoding="UTF-8"?>
<beans
        xmlns="http://www.springframework.org/schema/beans"
        xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xsi:schemaLocation="
http://www.springframework.org/schema/beans http://www.springframework.org/schema/
beans/spring-beans-3.0.xsd
        ">
    <!-- Define the AWS Region -->
    <bean id="region" class="software.amazon.awssdk.regions.Region" factory-
method="of">
        <constructor-arg value="us-east-1"/>
    </bean>

    <bean id="credentialsProviderBean"
 class="software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider"
          factory-method="create"/>

    <bean id="clientBuilder" class="software.amazon.awssdk.services.sqs.SqsClient"
 factory-method="builder"/>

    <bean id="regionSetClientBuilder" factory-bean="clientBuilder" factory-
method="region">
        <constructor-arg ref="region"/>
    </bean>

    <!-- Configure the Builder with Credentials Provider -->
    <bean id="sqsClient" factory-bean="regionSetClientBuilder" factory-
method="credentialsProvider">
        <constructor-arg ref="credentialsProviderBean"/>
    </bean>

    <bean id="providerConfiguration"
 class="com.amazon.sqs.javamessaging.ProviderConfiguration">
        <property name="numberOfMessagesToPrefetch" value="5"/>
    </bean>

    <bean id="connectionFactory"
 class="com.amazon.sqs.javamessaging.SQSConnectionFactory">
```

```
        <constructor-arg ref="providerConfiguration"/>
        <constructor-arg ref="clientBuilder"/>
    </bean>

    <bean id="connection"
          factory-bean="connectionFactory"
          factory-method="createConnection"
          init-method="start"
          destroy-method="close"/>

    <bean id="queueName" class="java.lang.String">
        <constructor-arg value="SQSJMSClientExampleQueue"/>
    </bean>
</beans>
```

Una clase de utilidad que proporciona métodos comunes utilizados en los demás ejemplos.

```
package com.example.sqs.jms;

import com.amazon.sqs.javamessaging.AmazonSQSMessagingClientWrapper;
import com.amazon.sqs.javamessaging.ProviderConfiguration;
import com.amazon.sqs.javamessaging.SQSConnection;
import com.amazon.sqs.javamessaging.SQSConnectionFactory;
import jakarta.jms.*;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.QueueAttributeName;

import java.time.Duration;
import java.util.Base64;
import java.util.Map;

/**
 * This utility class provides helper methods for working with Amazon Simple Queue
 Service (Amazon SQS)
 * through the Java Message Service (JMS) interface. It contains common operations
 for managing message
 * queues and handling message delivery.
```

```
 */
public class SqsJmsExampleUtils {
    private static final Logger LOGGER =
 LoggerFactory.getLogger(SqsJmsExampleUtils.class);
    public static final Long QUEUE_VISIBILITY_TIMEOUT = 5L;

    /**
     * This method verifies that a message queue exists and creates it if necessary.
 The method checks for
     * an existing queue first to optimize performance.
     *
     * @param connection The active connection to the messaging service
     * @param queueName The name of the queue to verify or create
     * @param visibilityTimeout The duration in seconds that messages will be hidden
 after being received
     * @throws JMSException If there is an error accessing or creating the queue
     */
    public static void ensureQueueExists(SQSConnection connection, String queueName,
 Long visibilityTimeout) throws JMSException {
        AmazonSQSMessagingClientWrapper client =
 connection.getWrappedAmazonSQSClient();

      /* In most cases, you can do this with just a 'createQueue' call, but
 'getQueueUrl'
      (called by 'queueExists') is a faster operation for the common case where the
 queue
      already exists. Also, many users and roles have permission to call
 'getQueueUrl'
      but don't have permission to call 'createQueue'.
      */
       if( !client.queueExists(queueName) ) {
           CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                   .queueName(queueName)
                   .attributes(Map.of(QueueAttributeName.VISIBILITY_TIMEOUT,
 String.valueOf(visibilityTimeout)))
                   .build();
           client.createQueue( createQueueRequest );
       }
   }

   /**
    * This method sends a simple text message to a specified message queue. It
 handles all necessary
    * setup for the message delivery process.
```

```
     *
     * @param session The active messaging session used to create and send the
message
     * @param queueName The name of the queue where the message will be sent
     */
    public static void sendTextMessage(Session session, String queueName) {
        // Rest of implementation...

        try {
            MessageProducer producer =
session.createProducer( session.createQueue( queueName) );
            Message message = session.createTextMessage("Hello world!");
            producer.send(message);
        } catch (JMSException e) {
            LOGGER.error( "Error receiving from SQS", e );
        }
    }

    /**
     * This method processes incoming messages and logs their content based on the
message type.
     * It supports text messages, binary data, and Java objects.
     *
     * @param message The message to be processed and logged
     * @throws JMSException If there is an error reading the message content
     */
    public static void handleMessage(Message message) throws JMSException {
        // Rest of implementation...
        LOGGER.info( "Got message {}", message.getJMSMessageID() );
        LOGGER.info( "Content: ");
        if(message instanceof TextMessage txtMessage) {
            LOGGER.info( "\t{}", txtMessage.getText() );
        } else if(message instanceof BytesMessage byteMessage){
            // Assume the length fits in an int - SQS only supports sizes up to 256k
so that
            // should be true
            byte[] bytes = new byte[(int)byteMessage.getBodyLength()];
            byteMessage.readBytes(bytes);
            LOGGER.info( "\t{}", Base64.getEncoder().encodeToString( bytes ) );
        } else if( message instanceof ObjectMessage) {
            ObjectMessage objMessage = (ObjectMessage) message;
            LOGGER.info( "\t{}", objMessage.getObject() );
        }
    }
```

```
   /**
    * This method sets up automatic message processing for a specified queue. It
creates a listener
    * that will receive and handle incoming messages without blocking the main
program.
    *
    * @param session The active messaging session
    * @param queueName The name of the queue to monitor
    * @param connection The active connection to the messaging service
    */
   public static void receiveMessagesAsync(Session session, String queueName,
Connection connection) {
       // Rest of implementation...
       try {
           // Create a consumer for the queue.
           MessageConsumer consumer =
session.createConsumer(session.createQueue(queueName));
           // Provide an implementation of the MessageListener interface, which has
a single 'onMessage' method.
           // We use a lambda expression for the implementation.
           consumer.setMessageListener(message -> {
               try {
                   SqsJmsExampleUtils.handleMessage(message);
                   message.acknowledge();
               } catch (JMSException e) {
                   LOGGER.error("Error processing message: {}", e.getMessage());
               }
           });
           // Start receiving incoming messages.
           connection.start();
       } catch (JMSException e) {
           throw new RuntimeException(e);
       }
       try {
           Thread.sleep(2000);
       } catch (InterruptedException e) {
           throw new RuntimeException(e);
       }
   }


   /**
```

```
    * This method performs cleanup operations after message processing is complete.
It receives
    * any messages in the specified queue, removes the message queue and closes all
    * active connections to prevent resource leaks.
    *
    * @param queueName The name of the queue to be removed
    * @param visibilityTimeout The duration in seconds that messages are hidden
after being received
    * @throws JMSException If there is an error during the cleanup process
    */
   public static void cleanUpExample(String queueName, Long visibilityTimeout)
throws JMSException {
       LOGGER.info("Performing cleanup.");

       SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
               new ProviderConfiguration(),
               SqsClient.create()
       );

       try (SQSConnection connection = connectionFactory.createConnection() ) {
           ensureQueueExists(connection, queueName, visibilityTimeout);
           Session session = connection.createSession(false,
Session.AUTO_ACKNOWLEDGE);

           receiveMessagesAsync(session, queueName, connection);

           SqsClient sqsClient =
connection.getWrappedAmazonSQSClient().getAmazonSQSClient();
           try {
               String queueUrl = sqsClient.getQueueUrl(b ->
b.queueName(queueName)).queueUrl();
               sqsClient.deleteQueue(b -> b.queueUrl(queueUrl));
               LOGGER.info("Queue deleted: {}", queueUrl);
           } catch (SdkException e) {
               LOGGER.error("Error during SQS operations: ", e);
           }
       }
       LOGGER.info("Clean up: Connection closed");
   }

   /**
    * This method creates a background task that sends multiple messages to a
specified queue
```

```
     * after waiting for a set time period. The task operates independently to
 ensure efficient
     * message processing without interrupting other operations.
     *
     * @param queueName The name of the queue where messages will be sent
     * @param secondsToWait The number of seconds to wait before sending messages
     * @param numMessages The number of messages to send
     * @param visibilityTimeout The duration in seconds that messages remain hidden
 after being received
     * @return A task that can be executed to send the messages
     */
    public static Runnable sendAMessageAsync(String queueName, Long secondsToWait,
 Integer numMessages, Long visibilityTimeout) {
        return () -> {
            try {
                Thread.sleep(Duration.ofSeconds(secondsToWait).toMillis());
            } catch (InterruptedException e) {
                Thread.currentThread().interrupt();
                throw new RuntimeException(e);
            }
            try {
                SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
                        new ProviderConfiguration(),
                        SqsClient.create()
                );
                try (SQSConnection connection =
 connectionFactory.createConnection()) {
                    ensureQueueExists(connection, queueName, visibilityTimeout);
                    Session session = connection.createSession(false,
 Session.CLIENT_ACKNOWLEDGE);
                    for (int i = 1; i <= numMessages; i++) {
                        MessageProducer producer =
 session.createProducer(session.createQueue(queueName));
                        producer.send(session.createTextMessage("Hello World " + i +
 "!"));
                    }
                }
            } catch (JMSException e) {
                LOGGER.error(e.getMessage(), e);
                throw new RuntimeException(e);
            }
        };
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateQueue
  - DeleteQueue

Trabajo con etiquetas de cola

En el siguiente ejemplo de código, se muestra cómo realizar una operación de etiquetado con Amazon SQS.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

En el siguiente ejemplo, se crean etiquetas para una cola, se enumeran las etiquetas y se elimina una etiqueta.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.ListQueueTagsResponse;
import software.amazon.awssdk.services.sqs.model.QueueDoesNotExistException;
import software.amazon.awssdk.services.sqs.model.SqsException;

import java.util.Map;
import java.util.UUID;

/**
 * Before running this Java V2 code example, set up your development environment,
 including your credentials. For more
 * information, see the <a href="https://docs.aws.amazon.com/sdk-for-java/latest/
developer-guide/get-started.html">AWS
```

```
 * SDK for Java Developer Guide</a>.
 */
public class TagExamples {
    static final SqsClient sqsClient = SqsClient.create();
    static final String queueName = "TagExamples-queue-" +
 UUID.randomUUID().toString().replace("-", "").substring(0, 20);
    private static final Logger LOGGER = LoggerFactory.getLogger(TagExamples.class);

    public static void main(String[] args) {
        final String queueUrl;
        try {
            queueUrl = sqsClient.createQueue(b ->
 b.queueName(queueName)).queueUrl();
            LOGGER.info("Queue created. The URL is: {}", queueUrl);
        } catch (RuntimeException e) {
            LOGGER.error("Program ending because queue was not created.");
            throw new RuntimeException(e);
        }
        try {
            addTags(queueUrl);
            listTags(queueUrl);
            removeTags(queueUrl);
        } catch (RuntimeException e) {
            LOGGER.error("Program ending because of an error in a method.");
        } finally {
            try {
                sqsClient.deleteQueue(b -> b.queueUrl(queueUrl));
                LOGGER.info("Queue successfully deleted. Program ending.");
                sqsClient.close();
            } catch (RuntimeException e) {
                LOGGER.error("Program ending.");
            } finally {
                sqsClient.close();
            }
        }
    }

    /** This method demonstrates how to use a Java Map to a tag a aueue.
     * @param queueUrl The URL of the queue to tag.
     */
    public static void addTags(String queueUrl) {
        // Build a map of the tags.
        final Map<String, String> tagsToAdd = Map.of(
                "Team", "Development",
```

```
                "Priority", "Beta",
                "Accounting ID", "456def");

        try {
            // Add tags to the queue using a Consumer<TagQueueRequest.Builder>
parameter.
            sqsClient.tagQueue(b -> b
                    .queueUrl(queueUrl)
                    .tags(tagsToAdd)
            );
        } catch (QueueDoesNotExistException e) {
            LOGGER.error("Queue does not exist: {}", e.getMessage(), e);
            throw new RuntimeException(e);
        }
    }

    /** This method demonstrates how to view the tags for a queue.
     * @param queueUrl The URL of the queue whose tags you want to list.
     */
    public static void listTags(String queueUrl) {
        ListQueueTagsResponse response;
        try {
            // Call the listQueueTags method with a
Consumer<ListQueueTagsRequest.Builder> parameter that creates a
ListQueueTagsRequest.
            response = sqsClient.listQueueTags(b -> b
                    .queueUrl(queueUrl));
        } catch (SqsException e) {
            LOGGER.error("Exception thrown: {}", e.getMessage(), e);
            throw new RuntimeException(e);
        }

        // Log the tags.
        response.tags()
                .forEach((k, v) ->
                        LOGGER.info("Key: {} -> Value: {}", k, v));
    }

    /**
     * This method demonstrates how to remove tags from a queue.
     * @param queueUrl The URL of the queue whose tags you want to remove.
     */
    public static void removeTags(String queueUrl) {
        try {
```

```
            // Call the untagQueue method with a Consumer<UntagQueueRequest.Builder>
 parameter.
            sqsClient.untagQueue(b -> b
                    .queueUrl(queueUrl)
                    .tagKeys("Accounting ID") // Remove a single tag.
            );
        } catch (SqsException e) {
            LOGGER.error("Exception thrown: {}", e.getMessage(), e);
            throw new RuntimeException(e);
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - ListQueueTags
  - TagQueue
  - UntagQueue

Ejemplos de tecnología sin servidor

Invocar una función de Lambda desde un desencadenador de Amazon SQS

En el siguiente ejemplo de código se muestra cómo implementar una función de Lambda que recibe un evento activado al recibir mensajes de una cola de SQS. La función recupera los mensajes del parámetro de eventos y registra el contenido de cada mensaje.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Uso de un evento de SQS con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
```

```
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.SQSEvent;
import com.amazonaws.services.lambda.runtime.events.SQSEvent.SQSMessage;

public class Function implements RequestHandler<SQSEvent, Void> {
    @Override
    public Void handleRequest(SQSEvent sqsEvent, Context context) {
        for (SQSMessage msg : sqsEvent.getRecords()) {
            processMessage(msg, context);
        }
        context.getLogger().log("done");
        return null;
    }

    private void processMessage(SQSMessage msg, Context context) {
        try {
            context.getLogger().log("Processed message " + msg.getBody());

            // TODO: Do interesting work based on the new message

        } catch (Exception e) {
            context.getLogger().log("An error occurred");
            throw e;
        }

    }
}
```

Notificación de los errores de los elementos del lote de las funciones de Lambda mediante un desencadenador de Amazon SQS.

En el siguiente ejemplo de código se muestra cómo implementar una respuesta por lotes parcial para funciones de Lambda que reciben eventos de una cola de SQS. La función informa los errores de los elementos del lote en la respuesta y le indica a Lambda que vuelva a intentar esos mensajes más adelante.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el repositorio de ejemplos de tecnología sin servidor.

Notificación de los errores de los elementos del lote de SQS con Lambda mediante Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.SQSEvent;
import com.amazonaws.services.lambda.runtime.events.SQSBatchResponse;

import java.util.ArrayList;
import java.util.List;

public class ProcessSQSMessageBatch implements RequestHandler<SQSEvent,
 SQSBatchResponse> {
    @Override
    public SQSBatchResponse handleRequest(SQSEvent sqsEvent, Context context) {
         List<SQSBatchResponse.BatchItemFailure> batchItemFailures = new
 ArrayList<SQSBatchResponse.BatchItemFailure>();

         for (SQSEvent.SQSMessage message : sqsEvent.getRecords()) {
             try {
                 //process your message
             } catch (Exception e) {
                 //Add failed message identifier to the batchItemFailures list
                 batchItemFailures.add(new
 SQSBatchResponse.BatchItemFailure(message.getMessageId()));
             }
         }
         return new SQSBatchResponse(batchItemFailures);
     }
}
```

Ejemplos de funciones de pasos usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso de AWS SDK for Java 2.x with Step Functions.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones
- Escenarios

Introducción

Introducción a Step Functions

El siguiente ejemplo de código muestra cómo empezar a utilizar Step Functions.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Versión Java de Introducción.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sfn.SfnClient;
import software.amazon.awssdk.services.sfn.model.ListStateMachinesResponse;
import software.amazon.awssdk.services.sfn.model.SfnException;
import software.amazon.awssdk.services.sfn.model.StateMachineListItem;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListStateMachines {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        SfnClient sfnClient = SfnClient.builder()
                .region(region)
                .build();

        listMachines(sfnClient);
        sfnClient.close();
    }

    public static void listMachines(SfnClient sfnClient) {
        try {
            ListStateMachinesResponse response = sfnClient.listStateMachines();
            List<StateMachineListItem> machines = response.stateMachines();
            for (StateMachineListItem machine : machines) {
                System.out.println("The name of the state machine is: " +
 machine.name());
                System.out.println("The ARN value is : " +
 machine.stateMachineArn());
            }

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListStateMachinesla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crear una actividad
- Crear una máquina de estado a partir de una definición de Amazon States Language que contenga la actividad creada anteriormente como un paso
- Ejecutar la máquina de estados y responder a la actividad con entradas de usuario
- Obtener el resultado y el estado final una vez completada la ejecución y, luego, limpiar los recursos.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * You can obtain the JSON file to create a state machine in the following
 * GitHub location.
 * <p>
 * https://github.com/awsdocs/aws-doc-sdk-examples/tree/main/resources/sample_files
 * <p>
 * To run this code example, place the chat_sfn_state_machine.json file into
 * your project's resources folder.
 * <p>
 * Also, set up your development environment, including your credentials.
 * <p>
 * For information, see this documentation topic:
```

```
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 * <p>
 * This Java code example performs the following tasks:
 * <p>
 * 1. Creates an activity.
 * 2. Creates a state machine.
 * 3. Describes the state machine.
 * 4. Starts execution of the state machine and interacts with it.
 * 5. Describes the execution.
 * 6. Delete the activity.
 * 7. Deletes the state machine.
 */
public class StepFunctionsScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws Exception {
        final String usage = """

            Usage:
                <roleARN> <activityName> <stateMachineName>

            Where:
                roleName - The name of the IAM role to create for this state
 machine.
                activityName - The name of an activity to create.
                stateMachineName - The name of the state machine to create.
                jsonFile - The location of the chat_sfn_state_machine.json file. You
 can located it in resources/sample_files.
            """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String roleName = args[0];
        String activityName = args[1];
        String stateMachineName = args[2];
        String jsonFile = args[3];
        String polJSON = """
            {
                "Version":"2012-10-17",
                "Statement": [
```

```
                {
                    "Sid": "",
                    "Effect": "Allow",
                    "Principal": {
                        "Service": "states.amazonaws.com"
                    },
                    "Action": "sts:AssumeRole"
                }
            ]
        }
        """;


        Scanner sc = new Scanner(System.in);
        boolean action = false;

        Region region = Region.US_EAST_1;
        SfnClient sfnClient = SfnClient.builder()
            .region(region)
            .build();

        Region regionGl = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
            .region(regionGl)
            .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the AWS Step Functions example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Create an activity.");
        String activityArn = createActivity(sfnClient, activityName);
        System.out.println("The ARN of the activity is " + activityArn);
        System.out.println(DASHES);

        // Read the file using FileInputStream
        FileInputStream inputStream = new FileInputStream(jsonFile);
        ObjectMapper mapper = new ObjectMapper();
        JsonNode jsonNode = mapper.readValue(inputStream, JsonNode.class);
        String jsonString = mapper.writeValueAsString(jsonNode);

        // Modify the Resource node.
        ObjectMapper objectMapper = new ObjectMapper();
```

```
        JsonNode root = objectMapper.readTree(jsonString);
        ((ObjectNode) root.path("States").path("GetInput")).put("Resource",
activityArn);

        // Convert the modified Java object back to a JSON string.
        String stateDefinition = objectMapper.writeValueAsString(root);
        System.out.println(stateDefinition);

        System.out.println(DASHES);
        System.out.println("2. Create a state machine.");
        String roleARN = createIAMRole(iam, roleName, polJSON);
        String stateMachineArn = createMachine(sfnClient, roleARN, stateMachineName,
stateDefinition);
        System.out.println("The ARN of the state machine is " + stateMachineArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Describe the state machine.");
        describeStateMachine(sfnClient, stateMachineArn);
        System.out.println("What should ChatSFN call you?");
        String userName = sc.nextLine();
        System.out.println("Hello " + userName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        // The JSON to pass to the StartExecution call.
        String executionJson = "{ \"name\" : \"" + userName + "\" }";
        System.out.println(executionJson);
        System.out.println("4. Start execution of the state machine and interact
with it.");
        String runArn = startWorkflow(sfnClient, stateMachineArn, executionJson);
        System.out.println("The ARN of the state machine execution is " + runArn);
        List<String> myList;
        while (!action) {
            myList = getActivityTask(sfnClient, activityArn);
            System.out.println("ChatSFN: " + myList.get(1));
            System.out.println(userName + " please specify a value.");
            String myAction = sc.nextLine();
            if (myAction.compareTo("done") == 0)
                action = true;

            System.out.println("You have selected " + myAction);
            String taskJson = "{ \"action\" : \"" + myAction + "\" }";
            System.out.println(taskJson);
```

```
            sendTaskSuccess(sfnClient, myList.get(0), taskJson);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Describe the execution.");
        describeExe(sfnClient, runArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Delete the activity.");
        deleteActivity(sfnClient, activityArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Delete the state machines.");
        deleteMachine(sfnClient, stateMachineArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The AWS Step Functions example scenario is complete.");
        System.out.println(DASHES);
    }

    public static String createIAMRole(IamClient iam, String rolename, String
polJSON) {
        try {
            CreateRoleRequest request = CreateRoleRequest.builder()
                .roleName(rolename)
                .assumeRolePolicyDocument(polJSON)
                .description("Created using the AWS SDK for Java")
                .build();

            CreateRoleResponse response = iam.createRole(request);
            return response.role().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static void describeExe(SfnClient sfnClient, String executionArn) {
```

```
        try {
            DescribeExecutionRequest executionRequest =
DescribeExecutionRequest.builder()
                .executionArn(executionArn)
                .build();

            String status = "";
            boolean hasSucceeded = false;
            while (!hasSucceeded) {
                DescribeExecutionResponse response =
sfnClient.describeExecution(executionRequest);
                status = response.statusAsString();
                if (status.compareTo("RUNNING") == 0) {
                    System.out.println("The state machine is still running, let's
wait for it to finish.");
                    Thread.sleep(2000);
                } else if (status.compareTo("SUCCEEDED") == 0) {
                    System.out.println("The Step Function workflow has succeeded");
                    hasSucceeded = true;
                } else {
                    System.out.println("The Status is neither running or
succeeded");
                }
            }
            System.out.println("The Status is " + status);

        } catch (SfnException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void sendTaskSuccess(SfnClient sfnClient, String token, String
json) {
        try {
            SendTaskSuccessRequest successRequest = SendTaskSuccessRequest.builder()
                .taskToken(token)
                .output(json)
                .build();

            sfnClient.sendTaskSuccess(successRequest);

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
    }

    public static List<String> getActivityTask(SfnClient sfnClient, String actArn) {
        List<String> myList = new ArrayList<>();
        GetActivityTaskRequest getActivityTaskRequest =
GetActivityTaskRequest.builder()
            .activityArn(actArn)
            .build();

        GetActivityTaskResponse response =
sfnClient.getActivityTask(getActivityTaskRequest);
        myList.add(response.taskToken());
        myList.add(response.input());
        return myList;
    }

    public static void deleteActivity(SfnClient sfnClient, String actArn) {
        try {
            DeleteActivityRequest activityRequest = DeleteActivityRequest.builder()
                .activityArn(actArn)
                .build();

            sfnClient.deleteActivity(activityRequest);
            System.out.println("You have deleted " + actArn);

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void describeStateMachine(SfnClient sfnClient, String
stateMachineArn) {
        try {
            DescribeStateMachineRequest stateMachineRequest =
DescribeStateMachineRequest.builder()
                .stateMachineArn(stateMachineArn)
                .build();

            DescribeStateMachineResponse response =
sfnClient.describeStateMachine(stateMachineRequest);
```

```
            System.out.println("The name of the State machine is " +
response.name());
            System.out.println("The status of the State machine is " +
response.status());
            System.out.println("The ARN value of the State machine is " +
response.stateMachineArn());
            System.out.println("The role ARN value is " + response.roleArn());

        } catch (SfnException e) {
            System.err.println(e.getMessage());
        }
    }

    public static void deleteMachine(SfnClient sfnClient, String stateMachineArn) {
        try {
            DeleteStateMachineRequest deleteStateMachineRequest =
DeleteStateMachineRequest.builder()
                .stateMachineArn(stateMachineArn)
                .build();

            sfnClient.deleteStateMachine(deleteStateMachineRequest);
            DescribeStateMachineRequest describeStateMachine =
DescribeStateMachineRequest.builder()
                .stateMachineArn(stateMachineArn)
                .build();

            while (true) {
                DescribeStateMachineResponse response =
sfnClient.describeStateMachine(describeStateMachine);
                System.out.println("The state machine is not deleted yet. The status
is " + response.status());
                Thread.sleep(3000);
            }

        } catch (SfnException | InterruptedException e) {
            System.err.println(e.getMessage());
        }
        System.out.println(stateMachineArn + " was successfully deleted.");
    }

    public static String startWorkflow(SfnClient sfnClient, String stateMachineArn,
String jsonEx) {
        UUID uuid = UUID.randomUUID();
        String uuidValue = uuid.toString();
```

```
        try {
            StartExecutionRequest executionRequest = StartExecutionRequest.builder()
                .input(jsonEx)
                .stateMachineArn(stateMachineArn)
                .name(uuidValue)
                .build();

            StartExecutionResponse response =
sfnClient.startExecution(executionRequest);
            return response.executionArn();

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createMachine(SfnClient sfnClient, String roleARN, String
stateMachineName, String json) {
        try {
            CreateStateMachineRequest machineRequest =
CreateStateMachineRequest.builder()
                .definition(json)
                .name(stateMachineName)
                .roleArn(roleARN)
                .type(StateMachineType.STANDARD)
                .build();

            CreateStateMachineResponse response =
sfnClient.createStateMachine(machineRequest);
            return response.stateMachineArn();

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createActivity(SfnClient sfnClient, String activityName) {
        try {
            CreateActivityRequest activityRequest = CreateActivityRequest.builder()
                .name(activityName)
```

```
                .build();

            CreateActivityResponse response =
 sfnClient.createActivity(activityRequest);
            return response.activityArn();

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateActivity
  - CreateStateMachine
  - DeleteActivity
  - DeleteStateMachine
  - DescribeExecution
  - DescribeStateMachine
  - GetActivityTask
  - ListActivities
  - ListStateMachines
  - SendTaskSuccess
  - StartExecution
  - StopExecution

Acciones

`CreateActivity`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateActivity`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static String createActivity(SfnClient sfnClient, String activityName) {
        try {
            CreateActivityRequest activityRequest = CreateActivityRequest.builder()
                .name(activityName)
                .build();

            CreateActivityResponse response =
sfnClient.createActivity(activityRequest);
            return response.activityArn();

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

- Para obtener más información sobre la API, consulta CreateActivityla Referencia AWS SDK for Java 2.x de la API.

`CreateStateMachine`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateStateMachine`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createMachine(SfnClient sfnClient, String roleARN, String
stateMachineName, String json) {
       try {
           CreateStateMachineRequest machineRequest =
CreateStateMachineRequest.builder()
                   .definition(json)
                   .name(stateMachineName)
                   .roleArn(roleARN)
                   .type(StateMachineType.STANDARD)
                   .build();

           CreateStateMachineResponse response =
sfnClient.createStateMachine(machineRequest);
           return response.stateMachineArn();

       } catch (SfnException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
       return "";
   }
```

- Para obtener más información sobre la API, consulta CreateStateMachinela Referencia AWS SDK for Java 2.x de la API.

`DeleteActivity`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteActivity`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void deleteActivity(SfnClient sfnClient, String actArn) {
       try {
           DeleteActivityRequest activityRequest = DeleteActivityRequest.builder()
```

```
                .activityArn(actArn)
                .build();

            sfnClient.deleteActivity(activityRequest);
            System.out.println("You have deleted " + actArn);

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteActivityla Referencia AWS SDK for Java 2.x de la API.

`DeleteStateMachine`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteStateMachine`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void deleteMachine(SfnClient sfnClient, String stateMachineArn) {
        try {
            DeleteStateMachineRequest deleteStateMachineRequest =
DeleteStateMachineRequest.builder()
                .stateMachineArn(stateMachineArn)
                .build();

            sfnClient.deleteStateMachine(deleteStateMachineRequest);
            DescribeStateMachineRequest describeStateMachine =
DescribeStateMachineRequest.builder()
                .stateMachineArn(stateMachineArn)
                .build();
```

```
            while (true) {
                DescribeStateMachineResponse response =
sfnClient.describeStateMachine(describeStateMachine);
                System.out.println("The state machine is not deleted yet. The status
is " + response.status());
                Thread.sleep(3000);
            }

        } catch (SfnException | InterruptedException e) {
            System.err.println(e.getMessage());
        }
        System.out.println(stateMachineArn + " was successfully deleted.");
    }
```

- Para obtener más información sobre la API, consulta DeleteStateMachinela Referencia AWS SDK for Java 2.x de la API.

`DescribeExecution`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeExecution`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void describeExe(SfnClient sfnClient, String executionArn) {
        try {
            DescribeExecutionRequest executionRequest =
DescribeExecutionRequest.builder()
                .executionArn(executionArn)
                .build();

            String status = "";
            boolean hasSucceeded = false;
            while (!hasSucceeded) {
```

```
                DescribeExecutionResponse response =
sfnClient.describeExecution(executionRequest);
                status = response.statusAsString();
                if (status.compareTo("RUNNING") == 0) {
                    System.out.println("The state machine is still running, let's
wait for it to finish.");
                    Thread.sleep(2000);
                } else if (status.compareTo("SUCCEEDED") == 0) {
                    System.out.println("The Step Function workflow has succeeded");
                    hasSucceeded = true;
                } else {
                    System.out.println("The Status is neither running or
succeeded");
                }
            }
            System.out.println("The Status is " + status);

        } catch (SfnException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta DescribeExecutionla Referencia AWS SDK for Java 2.x de la API.

`DescribeStateMachine`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeStateMachine`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void describeStateMachine(SfnClient sfnClient, String
stateMachineArn) {
```

```
        try {
            DescribeStateMachineRequest stateMachineRequest =
DescribeStateMachineRequest.builder()
                .stateMachineArn(stateMachineArn)
                .build();

            DescribeStateMachineResponse response =
sfnClient.describeStateMachine(stateMachineRequest);
            System.out.println("The name of the State machine is " +
response.name());
            System.out.println("The status of the State machine is " +
response.status());
            System.out.println("The ARN value of the State machine is " +
response.stateMachineArn());
            System.out.println("The role ARN value is " + response.roleArn());

        } catch (SfnException e) {
            System.err.println(e.getMessage());
        }
    }
```

- Para obtener más información sobre la API, consulta DescribeStateMachinela Referencia AWS SDK for Java 2.x de la API.

`GetActivityTask`

En el siguiente ejemplo de código, se muestra cómo utilizar `GetActivityTask`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static List<String> getActivityTask(SfnClient sfnClient, String actArn) {
        List<String> myList = new ArrayList<>();
        GetActivityTaskRequest getActivityTaskRequest =
GetActivityTaskRequest.builder()
```

```
            .activityArn(actArn)
            .build();

        GetActivityTaskResponse response =
 sfnClient.getActivityTask(getActivityTaskRequest);
        myList.add(response.taskToken());
        myList.add(response.input());
        return myList;
    }
```

- Para obtener más información sobre la API, consulta GetActivityTaskla Referencia AWS SDK for Java 2.x de la API.

`ListActivities`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListActivities`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sfn.SfnClient;
import software.amazon.awssdk.services.sfn.model.ListActivitiesRequest;
import software.amazon.awssdk.services.sfn.model.ListActivitiesResponse;
import software.amazon.awssdk.services.sfn.model.SfnException;
import software.amazon.awssdk.services.sfn.model.ActivityListItem;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */
public class ListActivities {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        SfnClient sfnClient = SfnClient.builder()
                .region(region)
                .build();

        listAllActivites(sfnClient);
        sfnClient.close();
    }

    public static void listAllActivites(SfnClient sfnClient) {
        try {
            ListActivitiesRequest activitiesRequest =
 ListActivitiesRequest.builder()
                    .maxResults(10)
                    .build();

            ListActivitiesResponse response =
 sfnClient.listActivities(activitiesRequest);
            List<ActivityListItem> items = response.activities();
            for (ActivityListItem item : items) {
                System.out.println("The activity ARN is " + item.activityArn());
                System.out.println("The activity name is " + item.name());
            }

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListActivitiesla Referencia AWS SDK for Java 2.x de la API.

`ListExecutions`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListExecutions`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static void getExeHistory(SfnClient sfnClient, String exeARN) {
        try {
            GetExecutionHistoryRequest historyRequest =
GetExecutionHistoryRequest.builder()
                    .executionArn(exeARN)
                    .maxResults(10)
                    .build();

            GetExecutionHistoryResponse historyResponse =
sfnClient.getExecutionHistory(historyRequest);
            List<HistoryEvent> events = historyResponse.events();
            for (HistoryEvent event : events) {
                System.out.println("The event type is " + event.type().toString());
            }

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Para obtener más información sobre la API, consulta ListExecutionsla Referencia AWS SDK for Java 2.x de la API.

`ListStateMachines`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListStateMachines`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sfn.SfnClient;
import software.amazon.awssdk.services.sfn.model.ListStateMachinesResponse;
import software.amazon.awssdk.services.sfn.model.SfnException;
import software.amazon.awssdk.services.sfn.model.StateMachineListItem;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListStateMachines {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        SfnClient sfnClient = SfnClient.builder()
                .region(region)
                .build();

        listMachines(sfnClient);
        sfnClient.close();
    }

    public static void listMachines(SfnClient sfnClient) {
        try {
            ListStateMachinesResponse response = sfnClient.listStateMachines();
            List<StateMachineListItem> machines = response.stateMachines();
            for (StateMachineListItem machine : machines) {
                System.out.println("The name of the state machine is: " +
 machine.name());
```

```
                System.out.println("The ARN value is : " +
 machine.stateMachineArn());
            }

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta ListStateMachinesla Referencia AWS SDK for Java 2.x de la API.

`SendTaskSuccess`

En el siguiente ejemplo de código, se muestra cómo utilizar `SendTaskSuccess`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void sendTaskSuccess(SfnClient sfnClient, String token, String
 json) {
        try {
            SendTaskSuccessRequest successRequest = SendTaskSuccessRequest.builder()
                .taskToken(token)
                .output(json)
                .build();

            sfnClient.sendTaskSuccess(successRequest);

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }
```

- Para obtener más información sobre la API, consulta SendTaskSuccessla Referencia AWS SDK for Java 2.x de la API.

`StartExecution`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartExecution`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String startWorkflow(SfnClient sfnClient, String stateMachineArn,
String jsonEx) {
       UUID uuid = UUID.randomUUID();
       String uuidValue = uuid.toString();
       try {
           StartExecutionRequest executionRequest = StartExecutionRequest.builder()
               .input(jsonEx)
               .stateMachineArn(stateMachineArn)
               .name(uuidValue)
               .build();

           StartExecutionResponse response =
sfnClient.startExecution(executionRequest);
           return response.executionArn();

       } catch (SfnException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
       return "";
   }
```

- Para obtener más información sobre la API, consulta StartExecutionla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Uso de Step Functions para invocar funciones de Lambda

El siguiente ejemplo de código muestra cómo crear una máquina de AWS Step Functions estados que invoque AWS Lambda funciones de forma secuencial.

SDK para Java 2.x

Muestra cómo crear un flujo de trabajo AWS sin servidor mediante AWS Step Functions y el. AWS SDK for Java 2.x Cada paso del flujo de trabajo se implementa mediante una AWS Lambda función.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- DynamoDB
- Lambda
- Amazon SES
- Step Functions

AWS STS ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with AWS STS.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones

Acciones

`AssumeRole`

En el siguiente ejemplo de código, se muestra cómo utilizar `AssumeRole`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sts.StsClient;
import software.amazon.awssdk.services.sts.model.AssumeRoleRequest;
import software.amazon.awssdk.services.sts.model.StsException;
import software.amazon.awssdk.services.sts.model.AssumeRoleResponse;
import software.amazon.awssdk.services.sts.model.Credentials;
import java.time.Instant;
import java.time.ZoneId;
import java.time.format.DateTimeFormatter;
import java.time.format.FormatStyle;
import java.util.Locale;

/**
 * To make this code example work, create a Role that you want to assume.
 * Then define a Trust Relationship in the AWS Console. You can use this as an
 * example:
 *
 * {
 * "Version":"2012-10-17",
 * "Statement": [
 * {
 * "Effect": "Allow",
 * "Principal": {
 * "AWS": "<Specify the ARN of your IAM user you are using in this code example>"
 * },
 * "Action": "sts:AssumeRole"
```

```
 * }
 * ]
 * }
 *
 * For more information, see "Editing the Trust Relationship for an Existing
 * Role" in the AWS Directory Service guide.
 *
 * Also, set up your development environment, including your credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class AssumeRole {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <roleArn> <roleSessionName>\s

                Where:
                    roleArn - The Amazon Resource Name (ARN) of the role to assume
 (for example, arn:aws:iam::000008047983:role/s3role).\s
                    roleSessionName - An identifier for the assumed role session
 (for example, mysession).\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String roleArn = args[0];
        String roleSessionName = args[1];
        Region region = Region.US_EAST_1;
        StsClient stsClient = StsClient.builder()
                .region(region)
                .build();

        assumeGivenRole(stsClient, roleArn, roleSessionName);
        stsClient.close();
    }
```

```
    public static void assumeGivenRole(StsClient stsClient, String roleArn, String
 roleSessionName) {
        try {
            AssumeRoleRequest roleRequest = AssumeRoleRequest.builder()
                    .roleArn(roleArn)
                    .roleSessionName(roleSessionName)
                    .build();

            AssumeRoleResponse roleResponse = stsClient.assumeRole(roleRequest);
            Credentials myCreds = roleResponse.credentials();

            // Display the time when the temp creds expire.
            Instant exTime = myCreds.expiration();
            String tokenInfo = myCreds.sessionToken();

            // Convert the Instant to readable date.
            DateTimeFormatter formatter =
 DateTimeFormatter.ofLocalizedDateTime(FormatStyle.SHORT)
                    .withLocale(Locale.US)
                    .withZone(ZoneId.systemDefault());

            formatter.format(exTime);
            System.out.println("The token " + tokenInfo + "  expires on " + exTime);

        } catch (StsException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta AssumeRolela Referencia AWS SDK for Java 2.x de la API.

Soporte ejemplos de uso de SDK for Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante el uso del AWS SDK for Java 2.x with Soporte.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hola Soporte

En el siguiente ejemplo de código se muestra cómo empezar a utilizar Soporte.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.support.SupportClient;
import software.amazon.awssdk.services.support.model.Category;
import software.amazon.awssdk.services.support.model.DescribeServicesRequest;
import software.amazon.awssdk.services.support.model.DescribeServicesResponse;
import software.amazon.awssdk.services.support.model.Service;
import software.amazon.awssdk.services.support.model.SupportException;
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * In addition, you must have the AWS Business Support Plan to use the AWS
 * Support Java API. For more information, see:
 *
 * https://aws.amazon.com/premiumsupport/plans/
 *
 * This Java example performs the following task:
 *
 * 1. Gets and displays available services.
 *
 *
 * NOTE: To see multiple operations, see SupportScenario.
 */

public class HelloSupport {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        SupportClient supportClient = SupportClient.builder()
                .region(region)
                .build();

        System.out.println("***** Step 1. Get and display available services.");
        displayServices(supportClient);
    }

    // Return a List that contains a Service name and Category name.
    public static void displayServices(SupportClient supportClient) {
        try {
            DescribeServicesRequest servicesRequest =
 DescribeServicesRequest.builder()
                    .language("en")
                    .build();

            DescribeServicesResponse response =
 supportClient.describeServices(servicesRequest);
            List<Service> services = response.services();

            System.out.println("Get the first 10 services");
            int index = 1;
            for (Service service : services) {
                if (index == 11)
```

```
                    break;

                System.out.println("The Service name is: " + service.name());

                // Display the Categories for this service.
                List<Category> categories = service.categories();
                for (Category cat : categories) {
                    System.out.println("The category name is: " + cat.name());
                }
                index++;
            }

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DescribeServicesla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Obtenga y muestre los servicios disponibles y los niveles de gravedad de los casos.
- Cree un caso de asistencia mediante un servicio, una categoría y un nivel de gravedad seleccionados.
- Obtenga y muestre una lista de casos abiertos para el día actual.
- Añada una serie de archivos adjuntos y una comunicación al nuevo caso.
- Describa el nuevo archivo adjunto y la comunicación del caso.
- Resuelva el caso.
- Obtenga y muestre una lista de casos resueltos para el día actual.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Ejecute varias Soporte operaciones.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.support.SupportClient;
import software.amazon.awssdk.services.support.model.AddAttachmentsToSetResponse;
import software.amazon.awssdk.services.support.model.AddCommunicationToCaseRequest;
import software.amazon.awssdk.services.support.model.AddCommunicationToCaseResponse;
import software.amazon.awssdk.services.support.model.Attachment;
import software.amazon.awssdk.services.support.model.AttachmentDetails;
import software.amazon.awssdk.services.support.model.CaseDetails;
import software.amazon.awssdk.services.support.model.Category;
import software.amazon.awssdk.services.support.model.Communication;
import software.amazon.awssdk.services.support.model.CreateCaseRequest;
import software.amazon.awssdk.services.support.model.CreateCaseResponse;
import software.amazon.awssdk.services.support.model.DescribeAttachmentRequest;
import software.amazon.awssdk.services.support.model.DescribeAttachmentResponse;
import software.amazon.awssdk.services.support.model.DescribeCasesRequest;
import software.amazon.awssdk.services.support.model.DescribeCasesResponse;
import software.amazon.awssdk.services.support.model.DescribeCommunicationsRequest;
import software.amazon.awssdk.services.support.model.DescribeCommunicationsResponse;
import software.amazon.awssdk.services.support.model.DescribeServicesRequest;
import software.amazon.awssdk.services.support.model.DescribeServicesResponse;
import software.amazon.awssdk.services.support.model.DescribeSeverityLevelsRequest;
import software.amazon.awssdk.services.support.model.DescribeSeverityLevelsResponse;
import software.amazon.awssdk.services.support.model.ResolveCaseRequest;
import software.amazon.awssdk.services.support.model.ResolveCaseResponse;
import software.amazon.awssdk.services.support.model.Service;
import software.amazon.awssdk.services.support.model.SeverityLevel;
import software.amazon.awssdk.services.support.model.SupportException;
import software.amazon.awssdk.services.support.model.AddAttachmentsToSetRequest;
import java.io.File;
import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
```

```
import java.time.Instant;
import java.time.temporal.ChronoUnit;
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * In addition, you must have the AWS Business Support Plan to use the AWS
 * Support Java API. For more information, see:
 *
 * https://aws.amazon.com/premiumsupport/plans/
 *
 * This Java example performs the following tasks:
 *
 * 1. Gets and displays available services.
 * 2. Gets and displays severity levels.
 * 3. Creates a support case by using the selected service, category, and
 * severity level.
 * 4. Gets a list of open cases for the current day.
 * 5. Creates an attachment set with a generated file.
 * 6. Adds a communication with the attachment to the support case.
 * 7. Lists the communications of the support case.
 * 8. Describes the attachment set included with the communication.
 * 9. Resolves the support case.
 * 10. Gets a list of resolved cases for the current day.
 */
public class SupportScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <fileAttachment>Where:
                    fileAttachment - The file can be a simple saved .txt file to use
 as an email attachment.\s
                """;
```

```
     //  if (args.length != 1) {
     //      System.out.println(usage);
     //      System.exit(1);
     //  }

       String fileAttachment = "C:\\AWS\\test.txt" ; //args[0];
       Region region = Region.US_WEST_2;
       SupportClient supportClient = SupportClient.builder()
               .region(region)
               .build();

       System.out.println(DASHES);
       System.out.println("***** Welcome to the AWS Support case example
scenario.");
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("1. Get and display available services.");
       List<String> sevCatList = displayServices(supportClient);
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("2. Get and display Support severity levels.");
       String sevLevel = displaySevLevels(supportClient);
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("3. Create a support case using the selected service,
category, and severity level.");
       String caseId = createSupportCase(supportClient, sevCatList, sevLevel);
       if (caseId.compareTo("") == 0) {
           System.out.println("A support case was not successfully created!");
           System.exit(1);
       } else
           System.out.println("Support case " + caseId + " was successfully
created!");
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("4. Get open support cases.");
       getOpenCase(supportClient);
       System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("5. Create an attachment set with a generated file to add
to the case.");
        String attachmentSetId = addAttachment(supportClient, fileAttachment);
        System.out.println("The Attachment Set id value is" + attachmentSetId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Add communication with the attachment to the support
case.");
        addAttachSupportCase(supportClient, caseId, attachmentSetId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. List the communications of the support case.");
        String attachId = listCommunications(supportClient, caseId);
        System.out.println("The Attachment id value is" + attachId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Describe the attachment set included with the
communication.");
        describeAttachment(supportClient, attachId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Resolve the support case.");
        resolveSupportCase(supportClient, caseId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Get a list of resolved cases for the current day.");
        getResolvedCase(supportClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("***** This Scenario has successfully completed");
        System.out.println(DASHES);
    }

    public static void getResolvedCase(SupportClient supportClient) {
        try {
            // Specify the start and end time.
            Instant now = Instant.now();
```

```
            java.time.LocalDate.now();
            Instant yesterday = now.minus(1, ChronoUnit.DAYS);

            DescribeCasesRequest describeCasesRequest =
DescribeCasesRequest.builder()
                    .maxResults(30)
                    .afterTime(yesterday.toString())
                    .beforeTime(now.toString())
                    .includeResolvedCases(true)
                    .build();

            DescribeCasesResponse response =
supportClient.describeCases(describeCasesRequest);
            List<CaseDetails> cases = response.cases();
            for (CaseDetails sinCase : cases) {
                if (sinCase.status().compareTo("resolved") == 0)
                    System.out.println("The case status is " + sinCase.status());
            }

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void resolveSupportCase(SupportClient supportClient, String
caseId) {
        try {
            ResolveCaseRequest caseRequest = ResolveCaseRequest.builder()
                    .caseId(caseId)
                    .build();

            ResolveCaseResponse response = supportClient.resolveCase(caseRequest);
            System.out.println("The status of case " + caseId + " is " +
response.finalCaseStatus());

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void describeAttachment(SupportClient supportClient, String
attachId) {
```

```
       try {
           DescribeAttachmentRequest attachmentRequest =
DescribeAttachmentRequest.builder()
                   .attachmentId(attachId)
                   .build();

           DescribeAttachmentResponse response =
supportClient.describeAttachment(attachmentRequest);
           System.out.println("The name of the file is " +
response.attachment().fileName());

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }

   public static String listCommunications(SupportClient supportClient, String
caseId) {
       try {
           String attachId = null;
           DescribeCommunicationsRequest communicationsRequest =
DescribeCommunicationsRequest.builder()
                   .caseId(caseId)
                   .maxResults(10)
                   .build();

           DescribeCommunicationsResponse response =
supportClient.describeCommunications(communicationsRequest);
           List<Communication> communications = response.communications();
           for (Communication comm : communications) {
               System.out.println("the body is: " + comm.body());

               // Get the attachment id value.
               List<AttachmentDetails> attachments = comm.attachmentSet();
               for (AttachmentDetails detail : attachments) {
                   attachId = detail.attachmentId();
               }
           }
           return attachId;

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
```

```
        }
        return "";
    }

    public static void addAttachSupportCase(SupportClient supportClient, String
caseId, String attachmentSetId) {
        try {
            AddCommunicationToCaseRequest caseRequest =
AddCommunicationToCaseRequest.builder()
                    .caseId(caseId)
                    .attachmentSetId(attachmentSetId)
                    .communicationBody("Please refer to attachment for details.")
                    .build();

            AddCommunicationToCaseResponse response =
supportClient.addCommunicationToCase(caseRequest);
            if (response.result())
                System.out.println("You have successfully added a communication to
an AWS Support case");
            else
                System.out.println("There was an error adding the communication to
an AWS Support case");

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static String addAttachment(SupportClient supportClient, String
fileAttachment) {
        try {
            File myFile = new File(fileAttachment);
            InputStream sourceStream = new FileInputStream(myFile);
            SdkBytes sourceBytes = SdkBytes.fromInputStream(sourceStream);

            Attachment attachment = Attachment.builder()
                    .fileName(myFile.getName())
                    .data(sourceBytes)
                    .build();

            AddAttachmentsToSetRequest setRequest =
AddAttachmentsToSetRequest.builder()
                    .attachments(attachment)
```

```
                    .build();

            AddAttachmentsToSetResponse response =
supportClient.addAttachmentsToSet(setRequest);
            return response.attachmentSetId();

        } catch (SupportException | FileNotFoundException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
    }

    public static void getOpenCase(SupportClient supportClient) {
        try {
            // Specify the start and end time.
            Instant now = Instant.now();
            java.time.LocalDate.now();
            Instant yesterday = now.minus(1, ChronoUnit.DAYS);

            DescribeCasesRequest describeCasesRequest =
DescribeCasesRequest.builder()
                    .maxResults(20)
                    .afterTime(yesterday.toString())
                    .beforeTime(now.toString())
                    .build();

            DescribeCasesResponse response =
supportClient.describeCases(describeCasesRequest);
            List<CaseDetails> cases = response.cases();
            for (CaseDetails sinCase : cases) {
                System.out.println("The case status is " + sinCase.status());
                System.out.println("The case Id is " + sinCase.caseId());
                System.out.println("The case subject is " + sinCase.subject());
            }

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static String createSupportCase(SupportClient supportClient, List<String>
sevCatList, String sevLevel) {
```

```
        try {
            String serviceCode = sevCatList.get(0);
            String caseCat = sevCatList.get(1);
            CreateCaseRequest caseRequest = CreateCaseRequest.builder()
                    .categoryCode(caseCat.toLowerCase())
                    .serviceCode(serviceCode.toLowerCase())
                    .severityCode(sevLevel.toLowerCase())
                    .communicationBody("Test issue with " +
serviceCode.toLowerCase())
                    .subject("Test case, please ignore")
                    .language("en")
                    .issueType("technical")
                    .build();

            CreateCaseResponse response = supportClient.createCase(caseRequest);
            return response.caseId();

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
    }

    public static String displaySevLevels(SupportClient supportClient) {
        try {
            DescribeSeverityLevelsRequest severityLevelsRequest =
DescribeSeverityLevelsRequest.builder()
                    .language("en")
                    .build();

            DescribeSeverityLevelsResponse response =
supportClient.describeSeverityLevels(severityLevelsRequest);
            List<SeverityLevel> severityLevels = response.severityLevels();
            String levelName = null;
            for (SeverityLevel sevLevel : severityLevels) {
                System.out.println("The severity level name is: " +
sevLevel.name());
                if (sevLevel.name().compareTo("High") == 0)
                    levelName = sevLevel.name();
            }
            return levelName;

        } catch (SupportException e) {
```

```
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
    }

    // Return a List that contains a Service name and Category name.
    public static List<String> displayServices(SupportClient supportClient) {
        try {
            DescribeServicesRequest servicesRequest =
DescribeServicesRequest.builder()
                    .language("en")
                    .build();

            DescribeServicesResponse response =
supportClient.describeServices(servicesRequest);
            String serviceCode = null;
            String catName = null;
            List<String> sevCatList = new ArrayList<>();
            List<Service> services = response.services();

            System.out.println("Get the first 10 services");
            int index = 1;
            for (Service service : services) {
                if (index == 11)
                    break;

                System.out.println("The Service name is: " + service.name());
                if (service.name().compareTo("Account") == 0)
                    serviceCode = service.code();

                // Get the Categories for this service.
                List<Category> categories = service.categories();
                for (Category cat : categories) {
                    System.out.println("The category name is: " + cat.name());
                    if (cat.name().compareTo("Security") == 0)
                        catName = cat.name();
                }
                index++;
            }

            // Push the two values to the list.
            sevCatList.add(serviceCode);
            sevCatList.add(catName);
```

```
            return sevCatList;

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return null;
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - AddAttachmentsToSet
  - AddCommunicationToCase
  - CreateCase
  - DescribeAttachment
  - DescribeCases
  - DescribeCommunications
  - DescribeServices
  - DescribeSeverityLevels
  - ResolveCase

Acciones

`AddAttachmentsToSet`

En el siguiente ejemplo de código, se muestra cómo utilizar `AddAttachmentsToSet`.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String addAttachment(SupportClient supportClient, String
fileAttachment) {
       try {
           File myFile = new File(fileAttachment);
           InputStream sourceStream = new FileInputStream(myFile);
           SdkBytes sourceBytes = SdkBytes.fromInputStream(sourceStream);

           Attachment attachment = Attachment.builder()
                   .fileName(myFile.getName())
                   .data(sourceBytes)
                   .build();

           AddAttachmentsToSetRequest setRequest =
AddAttachmentsToSetRequest.builder()
                   .attachments(attachment)
                   .build();

           AddAttachmentsToSetResponse response =
supportClient.addAttachmentsToSet(setRequest);
           return response.attachmentSetId();

       } catch (SupportException | FileNotFoundException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
       return "";
   }
```

- Para obtener más información sobre la API, consulta AddAttachmentsToSetla Referencia AWS SDK for Java 2.x de la API.

`AddCommunicationToCase`

En el siguiente ejemplo de código, se muestra cómo utilizar `AddCommunicationToCase`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void addAttachSupportCase(SupportClient supportClient, String
caseId, String attachmentSetId) {
       try {
           AddCommunicationToCaseRequest caseRequest =
AddCommunicationToCaseRequest.builder()
                   .caseId(caseId)
                   .attachmentSetId(attachmentSetId)
                   .communicationBody("Please refer to attachment for details.")
                   .build();

           AddCommunicationToCaseResponse response =
supportClient.addCommunicationToCase(caseRequest);
           if (response.result())
               System.out.println("You have successfully added a communication to
an AWS Support case");
           else
               System.out.println("There was an error adding the communication to
an AWS Support case");

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta AddCommunicationToCasela Referencia AWS SDK for Java 2.x de la API.

`CreateCase`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateCase`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String createSupportCase(SupportClient supportClient, List<String>
sevCatList, String sevLevel) {
       try {
           String serviceCode = sevCatList.get(0);
           String caseCat = sevCatList.get(1);
           CreateCaseRequest caseRequest = CreateCaseRequest.builder()
                   .categoryCode(caseCat.toLowerCase())
                   .serviceCode(serviceCode.toLowerCase())
                   .severityCode(sevLevel.toLowerCase())
                   .communicationBody("Test issue with " +
serviceCode.toLowerCase())
                   .subject("Test case, please ignore")
                   .language("en")
                   .issueType("technical")
                   .build();

           CreateCaseResponse response = supportClient.createCase(caseRequest);
           return response.caseId();

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
       return "";
   }
```

- Para obtener más información sobre la API, consulta CreateCasela Referencia AWS SDK for Java 2.x de la API.

`DescribeAttachment`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeAttachment`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void describeAttachment(SupportClient supportClient, String
attachId) {
       try {
           DescribeAttachmentRequest attachmentRequest =
DescribeAttachmentRequest.builder()
                   .attachmentId(attachId)
                   .build();

           DescribeAttachmentResponse response =
supportClient.describeAttachment(attachmentRequest);
           System.out.println("The name of the file is " +
response.attachment().fileName());

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta DescribeAttachmentla Referencia AWS SDK for Java 2.x de la API.

`DescribeCases`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeCases`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void getOpenCase(SupportClient supportClient) {
       try {
           // Specify the start and end time.
           Instant now = Instant.now();
           java.time.LocalDate.now();
           Instant yesterday = now.minus(1, ChronoUnit.DAYS);

           DescribeCasesRequest describeCasesRequest =
DescribeCasesRequest.builder()
                   .maxResults(20)
                   .afterTime(yesterday.toString())
                   .beforeTime(now.toString())
                   .build();

           DescribeCasesResponse response =
supportClient.describeCases(describeCasesRequest);
           List<CaseDetails> cases = response.cases();
           for (CaseDetails sinCase : cases) {
               System.out.println("The case status is " + sinCase.status());
               System.out.println("The case Id is " + sinCase.caseId());
               System.out.println("The case subject is " + sinCase.subject());
           }

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta DescribeCasesla Referencia AWS SDK for Java 2.x de la API.

`DescribeCommunications`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeCommunications`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static String listCommunications(SupportClient supportClient, String
caseId) {
       try {
           String attachId = null;
           DescribeCommunicationsRequest communicationsRequest =
DescribeCommunicationsRequest.builder()
                   .caseId(caseId)
                   .maxResults(10)
                   .build();

           DescribeCommunicationsResponse response =
supportClient.describeCommunications(communicationsRequest);
           List<Communication> communications = response.communications();
           for (Communication comm : communications) {
               System.out.println("the body is: " + comm.body());

               // Get the attachment id value.
               List<AttachmentDetails> attachments = comm.attachmentSet();
               for (AttachmentDetails detail : attachments) {
                   attachId = detail.attachmentId();
               }
           }
           return attachId;

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
       return "";
   }
```

- Para obtener más información sobre la API, consulta DescribeCommunicationsla Referencia AWS SDK for Java 2.x de la API.

`DescribeServices`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeServices`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   // Return a List that contains a Service name and Category name.
   public static List<String> displayServices(SupportClient supportClient) {
       try {
           DescribeServicesRequest servicesRequest =
DescribeServicesRequest.builder()
                   .language("en")
                   .build();

           DescribeServicesResponse response =
supportClient.describeServices(servicesRequest);
           String serviceCode = null;
           String catName = null;
           List<String> sevCatList = new ArrayList<>();
           List<Service> services = response.services();

           System.out.println("Get the first 10 services");
           int index = 1;
           for (Service service : services) {
               if (index == 11)
                   break;

               System.out.println("The Service name is: " + service.name());
               if (service.name().compareTo("Account") == 0)
                   serviceCode = service.code();
```

```
                // Get the Categories for this service.
                List<Category> categories = service.categories();
                for (Category cat : categories) {
                    System.out.println("The category name is: " + cat.name());
                    if (cat.name().compareTo("Security") == 0)
                        catName = cat.name();
                }
                index++;
            }

            // Push the two values to the list.
            sevCatList.add(serviceCode);
            sevCatList.add(catName);
            return sevCatList;

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return null;
    }
```

- Para obtener más información sobre la API, consulta DescribeServicesla Referencia AWS SDK for Java 2.x de la API.

`DescribeSeverityLevels`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeSeverityLevels`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    public static String displaySevLevels(SupportClient supportClient) {
        try {
```

```
            DescribeSeverityLevelsRequest severityLevelsRequest =
DescribeSeverityLevelsRequest.builder()
                    .language("en")
                    .build();

            DescribeSeverityLevelsResponse response =
supportClient.describeSeverityLevels(severityLevelsRequest);
            List<SeverityLevel> severityLevels = response.severityLevels();
            String levelName = null;
            for (SeverityLevel sevLevel : severityLevels) {
                System.out.println("The severity level name is: " +
sevLevel.name());
                if (sevLevel.name().compareTo("High") == 0)
                    levelName = sevLevel.name();
            }
            return levelName;

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
    }
```

- Para obtener más información sobre la API, consulta DescribeSeverityLevelsla Referencia AWS SDK for Java 2.x de la API.

`ResolveCase`

En el siguiente ejemplo de código, se muestra cómo utilizar `ResolveCase`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   public static void resolveSupportCase(SupportClient supportClient, String
caseId) {
       try {
           ResolveCaseRequest caseRequest = ResolveCaseRequest.builder()
                   .caseId(caseId)
                   .build();

           ResolveCaseResponse response = supportClient.resolveCase(caseRequest);
           System.out.println("The status of case " + caseId + " is " +
response.finalCaseStatus());

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Para obtener más información sobre la API, consulta ResolveCasela Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Systems Manager usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Systems Manager.

Los conceptos básicos son ejemplos de código que muestran cómo realizar las operaciones esenciales dentro de un servicio.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Introducción
- Conceptos básicos
- Acciones

Introducción

Hola, Systems Manager

En el siguiente ejemplo de código, se muestra cómo empezar a utilizar Systems Manager.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ssm.SsmClient;
import software.amazon.awssdk.services.ssm.model.DocumentFilter;
import software.amazon.awssdk.services.ssm.model.ListDocumentsRequest;
import software.amazon.awssdk.services.ssm.model.ListDocumentsResponse;

public class HelloSSM {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <awsAccount>

                Where:
                    awsAccount - Your AWS Account number.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String awsAccount = args[0] ;
        Region region = Region.US_EAST_1;
        SsmClient ssmClient = SsmClient.builder()
            .region(region)
            .build();
```

```
        listDocuments(ssmClient, awsAccount);
    }

    /*
    This code automatically fetches the next set of results using the `nextToken`
 and
    stops once the desired maxResults (20 in this case) have been reached.
    */
    public static void listDocuments(SsmClient ssmClient, String awsAccount) {
        String nextToken = null;
        int totalDocumentsReturned = 0;
        int maxResults = 20;
        do {
            ListDocumentsRequest request = ListDocumentsRequest.builder()
                .documentFilterList(
                    DocumentFilter.builder()
                        .key("Owner")
                        .value(awsAccount)
                        .build()
                    )
                .maxResults(maxResults)
                .nextToken(nextToken)
                .build();

            ListDocumentsResponse response = ssmClient.listDocuments(request);
            response.documentIdentifiers().forEach(identifier ->
 System.out.println("Document Name: " + identifier.name()));
            nextToken = response.nextToken();
            totalDocumentsReturned += response.documentIdentifiers().size();
        } while (nextToken != null && totalDocumentsReturned < maxResults);
    }
}
```

- Para obtener más información sobre la API, consulta ListDocumentsla Referencia AWS SDK for Java 2.x de la API.

Conceptos básicos

Conceptos básicos

En el siguiente ejemplo de código, se muestra cómo:

- Crear un período de mantenimiento.
- Modificar la programación del período de mantenimiento.
- Cree un documento.
- Enviar un comando a una instancia de EC2 especificada.
- Crea un OpsItem.
- Actualice y resuelva el OpsItem.
- Elimine la ventana de mantenimiento OpsItem y el documento.

SDK para Java 2.x

> **Note**
>
> Hay más en marcha GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.services.ssm.model.DocumentAlreadyExistsException;
import software.amazon.awssdk.services.ssm.model.SsmException;

import java.util.Map;
import java.util.Scanner;
public class SSMScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final String ROLES_STACK = "SsmStack3`1";

    public static void main(String[] args) {
        String usage = """
            Usage:
              <title> <source> <category> <severity>

            Where:
                title - The title of the parameter (default is Disk Space Alert).
                source - The source of the parameter (default is EC2).
```

```
                category - The category of the parameter. Valid values are
'Availability', 'Cost', 'Performance', 'Recovery', 'Security' (default is
Performance).
                severity - The severity of the parameter. Severity should be a
number from 1 to 4 (default is 2).
        """;

        Scanner scanner = new Scanner(System.in);
        SSMActions actions = new SSMActions();
        String documentName;
        String windowName;

        System.out.println("Use AWS CloudFormation to create the EC2 instance that
is required for this scenario.");
        CloudFormationHelper.deployCloudFormationStack(ROLES_STACK);
        Map<String, String> stackOutputs =
CloudFormationHelper.getStackOutputsAsync(ROLES_STACK).join();
        String instanceId = stackOutputs.get("InstanceId");
        System.out.println("The Instance ID: " + instanceId +" was created.");
        String title = "Disk Space Alert" ;
        String source = "EC2" ;
        String category = "Availability" ;
        String severity = "2" ;

        System.out.println(DASHES);
        System.out.println("""
                Welcome to the AWS Systems Manager SDK Basics scenario.
                This Java program demonstrates how to interact with AWS Systems
Manager using the AWS SDK for Java (v2).
                AWS Systems Manager is the operations hub for your AWS applications
and resources and a secure end-to-end management solution.
                The program's primary functionalities include creating a maintenance
window, creating a document, sending a command to a document,
                listing documents, listing commands, creating an OpsItem, modifying
an OpsItem, and deleting AWS SSM resources.
                Upon completion of the program, all AWS resources are cleaned up.
                Let's get started...

                """);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println("1. Create an SSM maintenance window.");
```

```
        System.out.println("Please enter the maintenance window name (default is
ssm-maintenance-window):");
        String win = scanner.nextLine();
        windowName = win.isEmpty() ? "ssm-maintenance-window" : win;
        String winId = null;
        try {
            winId = actions.createMaintenanceWindow(windowName);
            waitForInputToContinue(scanner);
            System.out.println("The maintenance window ID is: " + winId);
        } catch (DocumentAlreadyExistsException e) {
            System.err.println("The SSM maintenance window already exists.
Retrieving existing window ID...");
            String existingWinId = actions.createMaintenanceWindow(windowName);
            System.out.println("Existing window ID: " + existingWinId);
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println("2. Modify the maintenance window by changing the
schedule");
        waitForInputToContinue(scanner);
        try {
            actions.updateSSMMaintenanceWindow(winId, windowName);
            waitForInputToContinue(scanner);
            System.out.println("The SSM maintenance window was successfully
updated");
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println("3. Create an SSM document that defines the actions that
Systems Manager performs on your managed nodes.");
```

```
        System.out.println("Please enter the document name (default is
ssmdocument):");
        String doc = scanner.nextLine();
        documentName = doc.isEmpty() ? "ssmdocument" : doc;
        try {
            actions.createSSMDoc(documentName);
            waitForInputToContinue(scanner);
            System.out.println("The SSM document was successfully created");
        } catch (DocumentAlreadyExistsException e) {
            System.err.println("The SSM document already exists. Moving on");
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println("4. Now we are going to run a command on an EC2
instance");
        waitForInputToContinue(scanner);
        String commandId="";
        try {
            commandId = actions.sendSSMCommand(documentName, instanceId);
            waitForInputToContinue(scanner);
            System.out.println("The command was successfully sent. Command ID: " +
commandId);
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
        } catch (InterruptedException e) {
            System.err.println("Thread was interrupted: " + e.getMessage());
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println("5. Lets get the time when the specific command was sent
to the specific managed node");
        waitForInputToContinue(scanner);
        try {
            actions.displayCommands(commandId);
```

```
            System.out.println("The command invocations were successfully
displayed.");
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
             6. Now we will create an SSM OpsItem.
             A SSM OpsItem is a feature provided by Amazon's Systems Manager (SSM)
service.
             It is a type of operational data item that allows you to manage and
track various operational issues,
             events, or tasks within your AWS environment.

             You can create OpsItems to track and manage operational issues as they
arise.
             For example, you could create an OpsItem whenever your application
detects a critical error
             or an anomaly in your infrastructure.
            """);

        waitForInputToContinue(scanner);
        String opsItemId;
        try {
            opsItemId = actions.createSSMOpsItem(title, source, category, severity);
            System.out.println(opsItemId + " was created");
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("7. Now we will update the SSM OpsItem "+opsItemId);
        waitForInputToContinue(scanner);
        String description = "An update to "+opsItemId ;
        try {
            actions.updateOpsItem(opsItemId, title, description);
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }

        System.out.println(DASHES);
        System.out.println("8. Now we will get the status of the SSM OpsItem
"+opsItemId);
        waitForInputToContinue(scanner);
        try {
            actions.describeOpsItems(opsItemId);
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }

        System.out.println(DASHES);
        System.out.println("9. Now we will resolve the SSM OpsItem "+opsItemId);
        waitForInputToContinue(scanner);
        try {
            actions.resolveOpsItem(opsItemId);
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }

        System.out.println(DASHES);
        System.out.println("10. Would you like to delete the AWS Systems Manager
resources? (y/n)");
        String delAns = scanner.nextLine().trim();
```

```
        if (delAns.equalsIgnoreCase("y")) {
            System.out.println("You selected to delete the resources.");
            waitForInputToContinue(scanner);
            try {
                actions.deleteMaintenanceWindow(winId);
                actions.deleteDoc(documentName);
            } catch (SsmException e) {
                System.err.println("SSM error: " + e.getMessage());
                return;
            } catch (RuntimeException e) {
                System.err.println("Unexpected error: " + e.getMessage());
                return;
            }
        } else {
            System.out.println("The AWS Systems Manager resources will not be
 deleted");
        }
        System.out.println(DASHES);
        CloudFormationHelper.destroyCloudFormationStack(ROLES_STACK);
        System.out.println("This concludes the AWS Systems Manager SDK Basics
 scenario.");
        System.out.println(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println("");
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }
}
```

Una clase contenedora para métodos del SDK de Systems Manager.

```
public class SSMActions {

    private static SsmAsyncClient ssmAsyncClient;

    private static SsmAsyncClient getAsyncClient() {
        if (ssmAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                    .maxConcurrency(100)
                    .connectionTimeout(Duration.ofSeconds(60))
                    .readTimeout(Duration.ofSeconds(60))
                    .writeTimeout(Duration.ofSeconds(60))
                    .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                    .apiCallTimeout(Duration.ofMinutes(2))
                    .apiCallAttemptTimeout(Duration.ofSeconds(90))
                    .retryPolicy(RetryPolicy.builder()
                            .numRetries(3)
                            .build())
                    .build();

            ssmAsyncClient = SsmAsyncClient.builder()
                    .region(Region.US_WEST_2)
                    .httpClient(httpClient)
                    .overrideConfiguration(overrideConfig)
                    .build();
        }
        return ssmAsyncClient;
    }

    /**
     * Deletes an AWS SSM document asynchronously.
     *
     * @param documentName The name of the document to delete.
     * <p>
     * This method initiates an asynchronous request to delete an SSM document.
     * If an exception occurs, it handles the error appropriately.
     */
    public void deleteDoc(String documentName) {
        DeleteDocumentRequest documentRequest = DeleteDocumentRequest.builder()
                .name(documentName)
```

```
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().deleteDocument(documentRequest)
                    .thenAccept(response -> {
                        System.out.println("The SSM document was successfully
deleted.");
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }

    /**
     * Deletes an AWS SSM Maintenance Window asynchronously.
     *
     * @param winId The ID of the Maintenance Window to delete.
     * <p>
     * This method initiates an asynchronous request to delete an SSM Maintenance
Window.
     * If an exception occurs, it handles the error appropriately.
     */
    public void deleteMaintenanceWindow(String winId) {
        DeleteMaintenanceWindowRequest windowRequest =
DeleteMaintenanceWindowRequest.builder()
                .windowId(winId)
```

```
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().deleteMaintenanceWindow(windowRequest)
                    .thenAccept(response -> {
                        System.out.println("The maintenance window was successfully
deleted.");
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }

    /**
     * Resolves an AWS SSM OpsItem asynchronously.
     *
     * @param opsID The ID of the OpsItem to resolve.
     * <p>
     * This method initiates an asynchronous request to resolve an SSM OpsItem.
     * If an exception occurs, it handles the error appropriately.
     */
    public void resolveOpsItem(String opsID) {
        UpdateOpsItemRequest opsItemRequest = UpdateOpsItemRequest.builder()
                .opsItemId(opsID)
                .status(OpsItemStatus.RESOLVED)
                .build();
```

```
        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().updateOpsItem(opsItemRequest)
                    .thenAccept(response -> {
                        System.out.println("OpsItem resolved successfully.");
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }

    /**
     * Describes AWS SSM OpsItems asynchronously.
     *
     * @param key The key to filter OpsItems by (e.g., OPS_ITEM_ID).
     *
     * This method initiates an asynchronous request to describe SSM OpsItems.
     * If the request is successful, it prints the title and status of each OpsItem.
     * If an exception occurs, it handles the error appropriately.
     */
    public void describeOpsItems(String key) {
        OpsItemFilter filter = OpsItemFilter.builder()
                .key(OpsItemFilterKey.OPS_ITEM_ID)
                .values(key)
                .operator(OpsItemFilterOperator.EQUAL)
                .build();
```

```
        DescribeOpsItemsRequest itemsRequest = DescribeOpsItemsRequest.builder()
                .maxResults(10)
                .opsItemFilters(filter)
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().describeOpsItems(itemsRequest)
                    .thenAccept(itemsResponse -> {
                        List<OpsItemSummary> items =
itemsResponse.opsItemSummaries();
                        for (OpsItemSummary item : items) {
                            System.out.println("The item title is " + item.title() +
" and the status is " + item.status().toString());
                        }
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }

    /**
     * Updates the AWS SSM OpsItem asynchronously.
     *
     * @param opsItemId The ID of the OpsItem to update.
     * @param title The new title of the OpsItem.
```

```
     * @param description The new description of the OpsItem.
     * <p>
     * This method initiates an asynchronous request to update an SSM OpsItem.
     * If the request is successful, it completes without returning a value.
     * If an exception occurs, it handles the error appropriately.
     */
    public void updateOpsItem(String opsItemId, String title, String description) {
        Map<String, OpsItemDataValue> operationalData = new HashMap<>();
        operationalData.put("key1",
 OpsItemDataValue.builder().value("value1").build());
        operationalData.put("key2",
 OpsItemDataValue.builder().value("value2").build());

        CompletableFuture<Void> future = getOpsItem(opsItemId).thenCompose(opsItem -
> {
            UpdateOpsItemRequest request = UpdateOpsItemRequest.builder()
                    .opsItemId(opsItemId)
                    .title(title)
                    .operationalData(operationalData)
                    .status(opsItem.statusAsString())
                    .description(description)
                    .build();

            return getAsyncClient().updateOpsItem(request).thenAccept(response -> {
                System.out.println(opsItemId + " updated successfully.");
            }).exceptionally(ex -> {
                throw new CompletionException(ex);
            });
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
 ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
 cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
 cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
```

```
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }


    private static CompletableFuture<OpsItem> getOpsItem(String opsItemId) {
        GetOpsItemRequest request =
GetOpsItemRequest.builder().opsItemId(opsItemId).build();
        return
getAsyncClient().getOpsItem(request).thenApply(GetOpsItemResponse::opsItem);
    }

    /**
     * Creates an SSM OpsItem asynchronously.
     *
     * @param title The title of the OpsItem.
     * @param source The source of the OpsItem.
     * @param category The category of the OpsItem.
     * @param severity The severity of the OpsItem.
     * @return The ID of the created OpsItem.
     * <p>
     * This method initiates an asynchronous request to create an SSM OpsItem.
     * If the request is successful, it returns the OpsItem ID.
     * If an exception occurs, it handles the error appropriately.
     */
    public String createSSMOpsItem(String title, String source, String category,
String severity) {
        CreateOpsItemRequest opsItemRequest = CreateOpsItemRequest.builder()
                .description("Created by the SSM Java API")
                .title(title)
                .source(source)
                .category(category)
                .severity(severity)
                .build();

        CompletableFuture<CreateOpsItemResponse> future =
getAsyncClient().createOpsItem(opsItemRequest);

        try {
            CreateOpsItemResponse response = future.join();
            return response.opsItemId();
        } catch (CompletionException e) {
            Throwable cause = e.getCause();
```

```
            if (cause instanceof SsmException) {
                throw (SsmException) cause;
            } else {
                throw new RuntimeException(cause);
            }
        }
    }

    /**
     * Displays the date and time when the specific command was invoked.
     *
     * @param commandId The ID of the command to describe.
     * <p>
     * This method initiates an asynchronous request to list command invocations and
prints the date and time of each command invocation.
     * If an exception occurs, it handles the error appropriately.
     */
    public void displayCommands(String commandId) {
        ListCommandInvocationsRequest commandInvocationsRequest =
ListCommandInvocationsRequest.builder()
                .commandId(commandId)
                .build();

        CompletableFuture<ListCommandInvocationsResponse> future =
getAsyncClient().listCommandInvocations(commandInvocationsRequest);
        future.thenAccept(response -> {
            List<CommandInvocation> commandList = response.commandInvocations();
            DateTimeFormatter formatter = DateTimeFormatter.ofPattern("yyyy-MM-dd
HH:mm:ss").withZone(ZoneId.systemDefault());
            for (CommandInvocation invocation : commandList) {
                System.out.println("The time of the command invocation is " +
formatter.format(invocation.requestedDateTime()));
            }
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw (SsmException) cause;
            } else {
                throw new RuntimeException(cause);
            }
        }).join();
    }
```

```
   /**
    * Sends a SSM command to a managed node asynchronously.
    *
    * @param documentName The name of the document to use.
    * @param instanceId The ID of the instance to send the command to.
    * @return The command ID.
    * <p>
    * This method initiates asynchronous requests to send a SSM command to a
managed node.
    * It waits until the document is active, sends the command, and checks the
command execution status.
    */
   public String sendSSMCommand(String documentName, String instanceId) throws
InterruptedException, SsmException {
       // Before we use Document to send a command - make sure it is active.
       CompletableFuture<Void> documentActiveFuture = CompletableFuture.runAsync(()
-> {
           boolean isDocumentActive = false;
           DescribeDocumentRequest request = DescribeDocumentRequest.builder()
                   .name(documentName)
                   .build();

           while (!isDocumentActive) {
               CompletableFuture<DescribeDocumentResponse> response =
getAsyncClient().describeDocument(request);
               String documentStatus = response.join().document().statusAsString();
               if (documentStatus.equals("Active")) {
                   System.out.println("The SSM document is active and ready to
use.");
                   isDocumentActive = true;
               } else {
                   System.out.println("The SSM document is not active. Status: " +
documentStatus);
                   try {
                       Thread.sleep(5000);
                   } catch (InterruptedException e) {
                       throw new RuntimeException(e);
                   }
               }
           }
       });

       documentActiveFuture.join();
```

```
        // Create the SendCommandRequest.
        SendCommandRequest commandRequest = SendCommandRequest.builder()
                .documentName(documentName)
                .instanceIds(instanceId)
                .build();

        // Send the command.
        CompletableFuture<SendCommandResponse> commandFuture =
getAsyncClient().sendCommand(commandRequest);
        final String[] commandId = {null};

        commandFuture.whenComplete((commandResponse, ex) -> {
            if (commandResponse != null) {
                commandId[0] = commandResponse.command().commandId();
                System.out.println("Command ID: " + commandId[0]);

                // Wait for the command execution to complete.
                GetCommandInvocationRequest invocationRequest =
GetCommandInvocationRequest.builder()
                        .commandId(commandId[0])
                        .instanceId(instanceId)
                        .build();

                try {
                    System.out.println("Wait 5 secs");
                    TimeUnit.SECONDS.sleep(5);

                    // Retrieve the command execution details.
                    CompletableFuture<GetCommandInvocationResponse> invocationFuture
= getAsyncClient().getCommandInvocation(invocationRequest);
                    invocationFuture.whenComplete((commandInvocationResponse,
invocationEx) -> {
                        if (commandInvocationResponse != null) {
                            // Check the status of the command execution.
                            CommandInvocationStatus status =
commandInvocationResponse.status();
                            if (status == CommandInvocationStatus.SUCCESS) {
                                System.out.println("Command execution successful");
                            } else {
                                System.out.println("Command execution failed.
Status: " + status);
                            }
                        } else {
```

```
                            Throwable invocationCause = (invocationEx instanceof
CompletionException) ? invocationEx.getCause() : invocationEx;
                            throw new CompletionException(invocationCause);
                        }
                    }).join();
                } catch (InterruptedException e) {
                    throw new RuntimeException(e);
                }
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                if (cause instanceof SsmException) {
                    throw (SsmException) cause;
                } else {
                    throw new RuntimeException(cause);
                }
            }
        }).join();

        return commandId[0];
    }

    /**
     * Creates an AWS SSM document asynchronously.
     *
     * @param docName The name of the document to create.
     * <p>
     * This method initiates an asynchronous request to create an SSM document.
     * If the request is successful, it prints the document status.
     * If an exception occurs, it handles the error appropriately.
     */
    public void createSSMDoc(String docName) throws SsmException {
        String jsonData = """
        {
        "schemaVersion": "2.2",
        "description": "Run a simple shell command",
        "mainSteps": [
            {
                "action": "aws:runShellScript",
                "name": "runEchoCommand",
                "inputs": {
                  "runCommand": [
                    "echo 'Hello, world!'"
                  ]
```

```
                }
              }
            ]
        }
        """;

        CreateDocumentRequest request = CreateDocumentRequest.builder()
                .content(jsonData)
                .name(docName)
                .documentType(DocumentType.COMMAND)
                .build();

        CompletableFuture<CreateDocumentResponse> future =
getAsyncClient().createDocument(request);
        future.thenAccept(response -> {
            System.out.println("The status of the SSM document is " +
response.documentDescription().status());
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof DocumentAlreadyExistsException) {
                throw new CompletionException(cause);
            } else if (cause instanceof SsmException) {
                throw new CompletionException(cause);
            } else {
                throw new RuntimeException(cause);
            }
        }).join();
    }

    /**
     * Updates an SSM maintenance window asynchronously.
     *
     * @param id The ID of the maintenance window to update.
     * @param name The new name for the maintenance window.
     * <p>
     * This method initiates an asynchronous request to update an SSM maintenance
window.
     * If the request is successful, it prints a success message.
     * If an exception occurs, it handles the error appropriately.
     */
    public void updateSSMMaintenanceWindow(String id, String name) throws
SsmException {
```

```
        UpdateMaintenanceWindowRequest updateRequest =
UpdateMaintenanceWindowRequest.builder()
                .windowId(id)
                .allowUnassociatedTargets(true)
                .duration(24)
                .enabled(true)
                .name(name)
                .schedule("cron(0 0 ? * MON *)")
                .build();

        CompletableFuture<UpdateMaintenanceWindowResponse> future =
getAsyncClient().updateMaintenanceWindow(updateRequest);
        future.whenComplete((response, ex) -> {
            if (response != null) {
                System.out.println("The SSM maintenance window was successfully
updated");
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                if (cause instanceof SsmException) {
                    throw new CompletionException(cause);
                } else {
                    throw new RuntimeException(cause);
                }
            }
        }).join();
    }

    /**
     * Creates an SSM maintenance window asynchronously.
     *
     * @param winName The name of the maintenance window.
     * @return The ID of the created or existing maintenance window.
     * <p>
     * This method initiates an asynchronous request to create an SSM maintenance
window.
     * If the request is successful, it prints the maintenance window ID.
     * If an exception occurs, it handles the error appropriately.
     */
    public String createMaintenanceWindow(String winName) throws SsmException,
DocumentAlreadyExistsException {
        CreateMaintenanceWindowRequest request =
CreateMaintenanceWindowRequest.builder()
                .name(winName)
```

```
                .description("This is my maintenance window")
                .allowUnassociatedTargets(true)
                .duration(2)
                .cutoff(1)
                .schedule("cron(0 10 ? * MON-FRI *)")
                .build();

        CompletableFuture<CreateMaintenanceWindowResponse> future =
getAsyncClient().createMaintenanceWindow(request);
        final String[] windowId = {null};
        future.whenComplete((response, ex) -> {
            if (response != null) {
                String maintenanceWindowId = response.windowId();
                System.out.println("The maintenance window id is " +
maintenanceWindowId);
                windowId[0] = maintenanceWindowId;
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                if (cause instanceof DocumentAlreadyExistsException) {
                    throw new CompletionException(cause);
                } else if (cause instanceof SsmException) {
                    throw new CompletionException(cause);
                } else {
                    throw new RuntimeException(cause);
                }
            }
        }).join();

        if (windowId[0] == null) {
            MaintenanceWindowFilter filter = MaintenanceWindowFilter.builder()
                    .key("name")
                    .values(winName)
                    .build();

            DescribeMaintenanceWindowsRequest winRequest =
DescribeMaintenanceWindowsRequest.builder()
                    .filters(filter)
                    .build();

            CompletableFuture<DescribeMaintenanceWindowsResponse> describeFuture =
getAsyncClient().describeMaintenanceWindows(winRequest);
            describeFuture.whenComplete((describeResponse, describeEx) -> {
                if (describeResponse != null) {
```

```
                    List<MaintenanceWindowIdentity> windows =
 describeResponse.windowIdentities();
                    if (!windows.isEmpty()) {
                        windowId[0] = windows.get(0).windowId();
                        System.out.println("Window ID: " + windowId[0]);
                    } else {
                        System.out.println("Window not found.");
                        windowId[0] = "";
                    }
                } else {
                    Throwable describeCause = (describeEx instanceof
 CompletionException) ? describeEx.getCause() : describeEx;
                    throw new RuntimeException("Error describing maintenance
 windows: " + describeCause.getMessage(), describeCause);
                }
            }).join();
        }

        return windowId[0];
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - CreateDocument
  - CreateMaintenanceWindow
  - CreateOpsItem
  - DeleteMaintenanceWindow
  - ListCommandInvocations
  - SendCommand
  - UpdateOpsItem

Acciones

`CreateDocument`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateDocument`.

SDK para Java 2.x

> **Note**
>
> Hay más información GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * Creates an AWS SSM document asynchronously.
 *
 * @param docName The name of the document to create.
 * <p>
 * This method initiates an asynchronous request to create an SSM document.
 * If the request is successful, it prints the document status.
 * If an exception occurs, it handles the error appropriately.
 */
public void createSSMDoc(String docName) throws SsmException {
    String jsonData = """
    {
    "schemaVersion": "2.2",
    "description": "Run a simple shell command",
    "mainSteps": [
        {
            "action": "aws:runShellScript",
            "name": "runEchoCommand",
            "inputs": {
              "runCommand": [
                "echo 'Hello, world!'"
              ]
            }
          }
        ]
    }
    """;

    CreateDocumentRequest request = CreateDocumentRequest.builder()
            .content(jsonData)
            .name(docName)
            .documentType(DocumentType.COMMAND)
            .build();
```

```
        CompletableFuture<CreateDocumentResponse> future =
getAsyncClient().createDocument(request);
        future.thenAccept(response -> {
            System.out.println("The status of the SSM document is " +
response.documentDescription().status());
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof DocumentAlreadyExistsException) {
                throw new CompletionException(cause);
            } else if (cause instanceof SsmException) {
                throw new CompletionException(cause);
            } else {
                throw new RuntimeException(cause);
            }
        }).join();
    }
```

- Para obtener más información sobre la API, consulta CreateDocumentla Referencia AWS SDK for Java 2.x de la API.

`CreateMaintenanceWindow`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateMaintenanceWindow`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Creates an SSM maintenance window asynchronously.
     *
     * @param winName The name of the maintenance window.
     * @return The ID of the created or existing maintenance window.
     * <p>
```

```
    * This method initiates an asynchronous request to create an SSM maintenance
window.
    * If the request is successful, it prints the maintenance window ID.
    * If an exception occurs, it handles the error appropriately.
    */
   public String createMaintenanceWindow(String winName) throws SsmException,
DocumentAlreadyExistsException {
       CreateMaintenanceWindowRequest request =
CreateMaintenanceWindowRequest.builder()
               .name(winName)
               .description("This is my maintenance window")
               .allowUnassociatedTargets(true)
               .duration(2)
               .cutoff(1)
               .schedule("cron(0 10 ? * MON-FRI *)")
               .build();

       CompletableFuture<CreateMaintenanceWindowResponse> future =
getAsyncClient().createMaintenanceWindow(request);
       final String[] windowId = {null};
       future.whenComplete((response, ex) -> {
           if (response != null) {
               String maintenanceWindowId = response.windowId();
               System.out.println("The maintenance window id is " +
maintenanceWindowId);
               windowId[0] = maintenanceWindowId;
           } else {
               Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
               if (cause instanceof DocumentAlreadyExistsException) {
                   throw new CompletionException(cause);
               } else if (cause instanceof SsmException) {
                   throw new CompletionException(cause);
               } else {
                   throw new RuntimeException(cause);
               }
           }
       }).join();

       if (windowId[0] == null) {
           MaintenanceWindowFilter filter = MaintenanceWindowFilter.builder()
                   .key("name")
                   .values(winName)
                   .build();
```

```
            DescribeMaintenanceWindowsRequest winRequest =
DescribeMaintenanceWindowsRequest.builder()
                    .filters(filter)
                    .build();

            CompletableFuture<DescribeMaintenanceWindowsResponse> describeFuture =
getAsyncClient().describeMaintenanceWindows(winRequest);
            describeFuture.whenComplete((describeResponse, describeEx) -> {
                if (describeResponse != null) {
                    List<MaintenanceWindowIdentity> windows =
describeResponse.windowIdentities();
                    if (!windows.isEmpty()) {
                        windowId[0] = windows.get(0).windowId();
                        System.out.println("Window ID: " + windowId[0]);
                    } else {
                        System.out.println("Window not found.");
                        windowId[0] = "";
                    }
                } else {
                    Throwable describeCause = (describeEx instanceof
CompletionException) ? describeEx.getCause() : describeEx;
                    throw new RuntimeException("Error describing maintenance
windows: " + describeCause.getMessage(), describeCause);
                }
            }).join();
        }

        return windowId[0];
    }
```

- Para obtener más información sobre la API, consulta CreateMaintenanceWindowla Referencia AWS SDK for Java 2.x de la API.

`CreateOpsItem`

En el siguiente ejemplo de código, se muestra cómo utilizar `CreateOpsItem`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Creates an SSM OpsItem asynchronously.
    *
    * @param title The title of the OpsItem.
    * @param source The source of the OpsItem.
    * @param category The category of the OpsItem.
    * @param severity The severity of the OpsItem.
    * @return The ID of the created OpsItem.
    * <p>
    * This method initiates an asynchronous request to create an SSM OpsItem.
    * If the request is successful, it returns the OpsItem ID.
    * If an exception occurs, it handles the error appropriately.
    */
   public String createSSMOpsItem(String title, String source, String category,
String severity) {
       CreateOpsItemRequest opsItemRequest = CreateOpsItemRequest.builder()
               .description("Created by the SSM Java API")
               .title(title)
               .source(source)
               .category(category)
               .severity(severity)
               .build();

       CompletableFuture<CreateOpsItemResponse> future =
getAsyncClient().createOpsItem(opsItemRequest);

       try {
           CreateOpsItemResponse response = future.join();
           return response.opsItemId();
       } catch (CompletionException e) {
           Throwable cause = e.getCause();
           if (cause instanceof SsmException) {
               throw (SsmException) cause;
           } else {
```

```
                throw new RuntimeException(cause);
            }
        }
    }
```

- Para obtener más información sobre la API, consulta CreateOpsItemla Referencia AWS SDK for Java 2.x de la API.

`DeleteDocument`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteDocument`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes an AWS SSM document asynchronously.
     *
     * @param documentName The name of the document to delete.
     * <p>
     * This method initiates an asynchronous request to delete an SSM document.
     * If an exception occurs, it handles the error appropriately.
     */
    public void deleteDoc(String documentName) {
        DeleteDocumentRequest documentRequest = DeleteDocumentRequest.builder()
                .name(documentName)
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().deleteDocument(documentRequest)
                    .thenAccept(response -> {
                        System.out.println("The SSM document was successfully
deleted.");
                    })
                    .exceptionally(ex -> {
```

```
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }
```

- Para obtener más información sobre la API, consulta DeleteDocumentla Referencia AWS SDK for Java 2.x de la API.

`DeleteMaintenanceWindow`

En el siguiente ejemplo de código, se muestra cómo utilizar `DeleteMaintenanceWindow`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Deletes an AWS SSM Maintenance Window asynchronously.
     *
```

```
    * @param winId The ID of the Maintenance Window to delete.
    * <p>
    * This method initiates an asynchronous request to delete an SSM Maintenance
Window.
    * If an exception occurs, it handles the error appropriately.
    */
   public void deleteMaintenanceWindow(String winId) {
       DeleteMaintenanceWindowRequest windowRequest =
DeleteMaintenanceWindowRequest.builder()
               .windowId(winId)
               .build();

       CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
           getAsyncClient().deleteMaintenanceWindow(windowRequest)
                   .thenAccept(response -> {
                       System.out.println("The maintenance window was successfully
deleted.");
                   })
                   .exceptionally(ex -> {
                       throw new CompletionException(ex);
                   }).join();
       }).exceptionally(ex -> {
           Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
           if (cause instanceof SsmException) {
               throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
           } else {
               throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
           }
       });

       try {
           future.join();
       } catch (CompletionException ex) {
           throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
       }
   }
```

- Para obtener más información sobre la API, consulta DeleteMaintenanceWindowla Referencia AWS SDK for Java 2.x de la API.

`DescribeOpsItems`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeOpsItems`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Describes AWS SSM OpsItems asynchronously.
     *
     * @param key The key to filter OpsItems by (e.g., OPS_ITEM_ID).
     *
     * This method initiates an asynchronous request to describe SSM OpsItems.
     * If the request is successful, it prints the title and status of each OpsItem.
     * If an exception occurs, it handles the error appropriately.
     */
    public void describeOpsItems(String key) {
        OpsItemFilter filter = OpsItemFilter.builder()
                .key(OpsItemFilterKey.OPS_ITEM_ID)
                .values(key)
                .operator(OpsItemFilterOperator.EQUAL)
                .build();

        DescribeOpsItemsRequest itemsRequest = DescribeOpsItemsRequest.builder()
                .maxResults(10)
                .opsItemFilters(filter)
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().describeOpsItems(itemsRequest)
                    .thenAccept(itemsResponse -> {
                        List<OpsItemSummary> items =
itemsResponse.opsItemSummaries();
                        for (OpsItemSummary item : items) {
```

```
                            System.out.println("The item title is " + item.title() +
" and the status is " + item.status().toString());
                        }
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }
```

- Para obtener más información sobre la API, consulta DescribeOpsItemsla Referencia AWS SDK for Java 2.x de la API.

`DescribeParameters`

En el siguiente ejemplo de código, se muestra cómo utilizar `DescribeParameters`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ssm.SsmClient;
import software.amazon.awssdk.services.ssm.model.GetParameterRequest;
import software.amazon.awssdk.services.ssm.model.GetParameterResponse;
import software.amazon.awssdk.services.ssm.model.SsmException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetParameter {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <paraName>

                Where:
                    paraName - The name of the parameter.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String paraName = args[0];
        Region region = Region.US_EAST_1;
        SsmClient ssmClient = SsmClient.builder()
                .region(region)
                .build();

        getParaValue(ssmClient, paraName);
        ssmClient.close();
    }

    public static void getParaValue(SsmClient ssmClient, String paraName) {
        try {
            GetParameterRequest parameterRequest = GetParameterRequest.builder()
```

```
                    .name(paraName)
                    .build();

            GetParameterResponse parameterResponse =
 ssmClient.getParameter(parameterRequest);
            System.out.println("The parameter value is " +
 parameterResponse.parameter().value());

        } catch (SsmException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DescribeParameterslla Referencia AWS SDK for Java 2.x de la API.

`PutParameter`

En el siguiente ejemplo de código, se muestra cómo utilizar `PutParameter`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ssm.SsmClient;
import software.amazon.awssdk.services.ssm.model.ParameterType;
import software.amazon.awssdk.services.ssm.model.PutParameterRequest;
import software.amazon.awssdk.services.ssm.model.SsmException;

public class PutParameter {

    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:
                    <paraName>

                Where:
                    paraName - The name of the parameter.
                    paraValue - The value of the parameter.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String paraName = args[0];
        String paraValue = args[1];
        Region region = Region.US_EAST_1;
        SsmClient ssmClient = SsmClient.builder()
                .region(region)
                .build();

        putParaValue(ssmClient, paraName, paraValue);
        ssmClient.close();
    }

    public static void putParaValue(SsmClient ssmClient, String paraName, String
 value) {
        try {
            PutParameterRequest parameterRequest = PutParameterRequest.builder()
                    .name(paraName)
                    .type(ParameterType.STRING)
                    .value(value)
                    .build();

            ssmClient.putParameter(parameterRequest);
            System.out.println("The parameter was successfully added.");

        } catch (SsmException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta PutParameterla Referencia AWS SDK for Java 2.x de la API.

`SendCommand`

En el siguiente ejemplo de código, se muestra cómo utilizar `SendCommand`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Sends a SSM command to a managed node asynchronously.
     *
     * @param documentName The name of the document to use.
     * @param instanceId The ID of the instance to send the command to.
     * @return The command ID.
     * <p>
     * This method initiates asynchronous requests to send a SSM command to a
managed node.
     * It waits until the document is active, sends the command, and checks the
command execution status.
     */
    public String sendSSMCommand(String documentName, String instanceId) throws
InterruptedException, SsmException {
        // Before we use Document to send a command - make sure it is active.
        CompletableFuture<Void> documentActiveFuture = CompletableFuture.runAsync(()
-> {
            boolean isDocumentActive = false;
            DescribeDocumentRequest request = DescribeDocumentRequest.builder()
                    .name(documentName)
                    .build();

            while (!isDocumentActive) {
```

```
                CompletableFuture<DescribeDocumentResponse> response =
getAsyncClient().describeDocument(request);
                String documentStatus = response.join().document().statusAsString();
                if (documentStatus.equals("Active")) {
                    System.out.println("The SSM document is active and ready to
use.");
                    isDocumentActive = true;
                } else {
                    System.out.println("The SSM document is not active. Status: " +
documentStatus);
                    try {
                        Thread.sleep(5000);
                    } catch (InterruptedException e) {
                        throw new RuntimeException(e);
                    }
                }
            }
        });

        documentActiveFuture.join();

        // Create the SendCommandRequest.
        SendCommandRequest commandRequest = SendCommandRequest.builder()
                .documentName(documentName)
                .instanceIds(instanceId)
                .build();

        // Send the command.
        CompletableFuture<SendCommandResponse> commandFuture =
getAsyncClient().sendCommand(commandRequest);
        final String[] commandId = {null};

        commandFuture.whenComplete((commandResponse, ex) -> {
            if (commandResponse != null) {
                commandId[0] = commandResponse.command().commandId();
                System.out.println("Command ID: " + commandId[0]);

                // Wait for the command execution to complete.
                GetCommandInvocationRequest invocationRequest =
GetCommandInvocationRequest.builder()
                        .commandId(commandId[0])
                        .instanceId(instanceId)
                        .build();
```

```
                try {
                    System.out.println("Wait 5 secs");
                    TimeUnit.SECONDS.sleep(5);

                    // Retrieve the command execution details.
                    CompletableFuture<GetCommandInvocationResponse> invocationFuture
= getAsyncClient().getCommandInvocation(invocationRequest);
                    invocationFuture.whenComplete((commandInvocationResponse,
invocationEx) -> {
                        if (commandInvocationResponse != null) {
                            // Check the status of the command execution.
                            CommandInvocationStatus status =
commandInvocationResponse.status();
                            if (status == CommandInvocationStatus.SUCCESS) {
                                System.out.println("Command execution successful");
                            } else {
                                System.out.println("Command execution failed.
Status: " + status);
                            }
                        } else {
                            Throwable invocationCause = (invocationEx instanceof
CompletionException) ? invocationEx.getCause() : invocationEx;
                            throw new CompletionException(invocationCause);
                        }
                    }).join();
                } catch (InterruptedException e) {
                    throw new RuntimeException(e);
                }
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                if (cause instanceof SsmException) {
                    throw (SsmException) cause;
                } else {
                    throw new RuntimeException(cause);
                }
            }
        }).join();

        return commandId[0];
    }
```

- Para obtener más información sobre la API, consulta SendCommandla Referencia AWS SDK for Java 2.x de la API.

`UpdateMaintenanceWindow`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateMaintenanceWindow`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
   /**
    * Updates an SSM maintenance window asynchronously.
    *
    * @param id The ID of the maintenance window to update.
    * @param name The new name for the maintenance window.
    * <p>
    * This method initiates an asynchronous request to update an SSM maintenance
window.
    * If the request is successful, it prints a success message.
    * If an exception occurs, it handles the error appropriately.
    */
   public void updateSSMMaintenanceWindow(String id, String name) throws
SsmException {
       UpdateMaintenanceWindowRequest updateRequest =
UpdateMaintenanceWindowRequest.builder()
               .windowId(id)
               .allowUnassociatedTargets(true)
               .duration(24)
               .enabled(true)
               .name(name)
               .schedule("cron(0 0 ? * MON *)")
               .build();

       CompletableFuture<UpdateMaintenanceWindowResponse> future =
getAsyncClient().updateMaintenanceWindow(updateRequest);
       future.whenComplete((response, ex) -> {
           if (response != null) {
```

```
                System.out.println("The SSM maintenance window was successfully
updated");
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                if (cause instanceof SsmException) {
                    throw new CompletionException(cause);
                } else {
                    throw new RuntimeException(cause);
                }
            }
        }).join();
    }
```

- Para obtener más información sobre la API, consulta UpdateMaintenanceWindowla Referencia AWS SDK for Java 2.x de la API.

`UpdateOpsItem`

En el siguiente ejemplo de código, se muestra cómo utilizar `UpdateOpsItem`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
    /**
     * Resolves an AWS SSM OpsItem asynchronously.
     *
     * @param opsID The ID of the OpsItem to resolve.
     * <p>
     * This method initiates an asynchronous request to resolve an SSM OpsItem.
     * If an exception occurs, it handles the error appropriately.
     */
    public void resolveOpsItem(String opsID) {
        UpdateOpsItemRequest opsItemRequest = UpdateOpsItemRequest.builder()
                .opsItemId(opsID)
```

```
                .status(OpsItemStatus.RESOLVED)
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().updateOpsItem(opsItemRequest)
                    .thenAccept(response -> {
                        System.out.println("OpsItem resolved successfully.");
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }
```

- Para obtener más información sobre la API, consulta UpdateOpsItemla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon Textract usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x con Amazon Textract.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`AnalyzeDocument`

En el siguiente ejemplo de código, se muestra cómo utilizar `AnalyzeDocument`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.textract.TextractClient;
import software.amazon.awssdk.services.textract.model.AnalyzeDocumentRequest;
import software.amazon.awssdk.services.textract.model.Document;
import software.amazon.awssdk.services.textract.model.FeatureType;
import software.amazon.awssdk.services.textract.model.AnalyzeDocumentResponse;
import software.amazon.awssdk.services.textract.model.Block;
import software.amazon.awssdk.services.textract.model.TextractException;
import java.io.File;
import java.io.FileInputStream;
import java.io.FileNotFoundException;
```

```
import java.io.InputStream;
import java.util.ArrayList;
import java.util.Iterator;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class AnalyzeDocument {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <sourceDoc>\s

                Where:
                    sourceDoc - The path where the document is located (must be an
 image, for example, C:/AWS/book.png).\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String sourceDoc = args[0];
        Region region = Region.US_EAST_2;
        TextractClient textractClient = TextractClient.builder()
                .region(region)
                .build();

        analyzeDoc(textractClient, sourceDoc);
        textractClient.close();
    }

    public static void analyzeDoc(TextractClient textractClient, String sourceDoc) {
        try {
            InputStream sourceStream = new FileInputStream(new File(sourceDoc));
            SdkBytes sourceBytes = SdkBytes.fromInputStream(sourceStream);
```

```
            // Get the input Document object as bytes
            Document myDoc = Document.builder()
                    .bytes(sourceBytes)
                    .build();

            List<FeatureType> featureTypes = new ArrayList<FeatureType>();
            featureTypes.add(FeatureType.FORMS);
            featureTypes.add(FeatureType.TABLES);

            AnalyzeDocumentRequest analyzeDocumentRequest =
 AnalyzeDocumentRequest.builder()
                    .featureTypes(featureTypes)
                    .document(myDoc)
                    .build();

            AnalyzeDocumentResponse analyzeDocument =
 textractClient.analyzeDocument(analyzeDocumentRequest);
            List<Block> docInfo = analyzeDocument.blocks();
            Iterator<Block> blockIterator = docInfo.iterator();

            while (blockIterator.hasNext()) {
                Block block = blockIterator.next();
                System.out.println("The block type is " +
 block.blockType().toString());
            }

        } catch (TextractException | FileNotFoundException e) {

            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta AnalyzeDocumentla Referencia AWS SDK for Java 2.x de la API.

`DetectDocumentText`

En el siguiente ejemplo de código, se muestra cómo utilizar `DetectDocumentText`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Detectar texto de un documento de entrada.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.textract.TextractClient;
import software.amazon.awssdk.services.textract.model.Document;
import software.amazon.awssdk.services.textract.model.DetectDocumentTextRequest;
import software.amazon.awssdk.services.textract.model.DetectDocumentTextResponse;
import software.amazon.awssdk.services.textract.model.Block;
import software.amazon.awssdk.services.textract.model.DocumentMetadata;
import software.amazon.awssdk.services.textract.model.TextractException;
import java.io.File;
import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectDocumentText {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <sourceDoc>\s

                Where:
                    sourceDoc - The path where the document is located (must be an
 image, for example, C:/AWS/book.png).\s
```

```
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String sourceDoc = args[0];
        Region region = Region.US_EAST_2;
        TextractClient textractClient = TextractClient.builder()
                .region(region)
                .build();

        detectDocText(textractClient, sourceDoc);
        textractClient.close();
    }

    public static void detectDocText(TextractClient textractClient, String
sourceDoc) {
        try {
            InputStream sourceStream = new FileInputStream(new File(sourceDoc));
            SdkBytes sourceBytes = SdkBytes.fromInputStream(sourceStream);

            // Get the input Document object as bytes.
            Document myDoc = Document.builder()
                    .bytes(sourceBytes)
                    .build();

            DetectDocumentTextRequest detectDocumentTextRequest =
DetectDocumentTextRequest.builder()
                    .document(myDoc)
                    .build();

            // Invoke the Detect operation.
            DetectDocumentTextResponse textResponse =
textractClient.detectDocumentText(detectDocumentTextRequest);
            List<Block> docInfo = textResponse.blocks();
            for (Block block : docInfo) {
                System.out.println("The block type is " +
block.blockType().toString());
            }

            DocumentMetadata documentMetadata = textResponse.documentMetadata();
```

```
            System.out.println("The number of pages in the document is " +
 documentMetadata.pages());

        } catch (TextractException | FileNotFoundException e) {

            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

Detectar texto de un documento ubicado en un bucket de Amazon S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.textract.model.S3Object;
import software.amazon.awssdk.services.textract.TextractClient;
import software.amazon.awssdk.services.textract.model.Document;
import software.amazon.awssdk.services.textract.model.DetectDocumentTextRequest;
import software.amazon.awssdk.services.textract.model.DetectDocumentTextResponse;
import software.amazon.awssdk.services.textract.model.Block;
import software.amazon.awssdk.services.textract.model.DocumentMetadata;
import software.amazon.awssdk.services.textract.model.TextractException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectDocumentTextS3 {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <bucketName> <docName>\s

                Where:
                    bucketName - The name of the Amazon S3 bucket that contains the
 document.\s
```

```
                    docName - The document name (must be an image, i.e., book.png).
\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String docName = args[1];
        Region region = Region.US_WEST_2;
        TextractClient textractClient = TextractClient.builder()
                .region(region)
                .build();

        detectDocTextS3(textractClient, bucketName, docName);
        textractClient.close();
    }

    public static void detectDocTextS3(TextractClient textractClient, String
 bucketName, String docName) {
        try {
            S3Object s3Object = S3Object.builder()
                    .bucket(bucketName)
                    .name(docName)
                    .build();

            // Create a Document object and reference the s3Object instance.
            Document myDoc = Document.builder()
                    .s3Object(s3Object)
                    .build();

            DetectDocumentTextRequest detectDocumentTextRequest =
 DetectDocumentTextRequest.builder()
                    .document(myDoc)
                    .build();

            DetectDocumentTextResponse textResponse =
 textractClient.detectDocumentText(detectDocumentTextRequest);
            for (Block block : textResponse.blocks()) {
                System.out.println("The block type is " +
 block.blockType().toString());
```

```
            }

            DocumentMetadata documentMetadata = textResponse.documentMetadata();
            System.out.println("The number of pages in the document is " +
 documentMetadata.pages());

        } catch (TextractException e) {

            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Para obtener más información sobre la API, consulta DetectDocumentTextla Referencia AWS SDK for Java 2.x de la API.

`StartDocumentAnalysis`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartDocumentAnalysis`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.textract.model.S3Object;
import software.amazon.awssdk.services.textract.TextractClient;
import software.amazon.awssdk.services.textract.model.StartDocumentAnalysisRequest;
import software.amazon.awssdk.services.textract.model.DocumentLocation;
import software.amazon.awssdk.services.textract.model.TextractException;
import software.amazon.awssdk.services.textract.model.StartDocumentAnalysisResponse;
import software.amazon.awssdk.services.textract.model.GetDocumentAnalysisRequest;
import software.amazon.awssdk.services.textract.model.GetDocumentAnalysisResponse;
import software.amazon.awssdk.services.textract.model.FeatureType;
import java.util.ArrayList;
```

```
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class StartDocumentAnalysis {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <bucketName> <docName>\s

                Where:
                    bucketName - The name of the Amazon S3 bucket that contains the
 document.\s
                    docName - The document name (must be an image, for example,
 book.png).\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String docName = args[1];
        Region region = Region.US_WEST_2;
        TextractClient textractClient = TextractClient.builder()
                .region(region)
                .build();

        String jobId = startDocAnalysisS3(textractClient, bucketName, docName);
        System.out.println("Getting results for job " + jobId);
        String status = getJobResults(textractClient, jobId);
        System.out.println("The job status is " + status);
        textractClient.close();
    }
```

```
   public static String startDocAnalysisS3(TextractClient textractClient, String
bucketName, String docName) {
       try {
           List<FeatureType> myList = new ArrayList<>();
           myList.add(FeatureType.TABLES);
           myList.add(FeatureType.FORMS);

           S3Object s3Object = S3Object.builder()
                   .bucket(bucketName)
                   .name(docName)
                   .build();

           DocumentLocation location = DocumentLocation.builder()
                   .s3Object(s3Object)
                   .build();

           StartDocumentAnalysisRequest documentAnalysisRequest =
StartDocumentAnalysisRequest.builder()
                   .documentLocation(location)
                   .featureTypes(myList)
                   .build();

           StartDocumentAnalysisResponse response =
textractClient.startDocumentAnalysis(documentAnalysisRequest);

           // Get the job ID
           String jobId = response.jobId();
           return jobId;

       } catch (TextractException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
       return "";
   }

   private static String getJobResults(TextractClient textractClient, String jobId)
{
       boolean finished = false;
       int index = 0;
       String status = "";

       try {
           while (!finished) {
```

```
                GetDocumentAnalysisRequest analysisRequest =
 GetDocumentAnalysisRequest.builder()
                        .jobId(jobId)
                        .maxResults(1000)
                        .build();

                GetDocumentAnalysisResponse response =
 textractClient.getDocumentAnalysis(analysisRequest);
                status = response.jobStatus().toString();

                if (status.compareTo("SUCCEEDED") == 0)
                    finished = true;
                else {
                    System.out.println(index + " status is: " + status);
                    Thread.sleep(1000);
                }
                index++;
            }

            return status;

        } catch (InterruptedException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Para obtener más información sobre la API, consulta StartDocumentAnalysisla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Creación de una aplicación para analizar los comentarios de los clientes

El siguiente ejemplo de código muestra cómo crear una aplicación que analice las tarjetas de comentarios de los clientes, las traduzca del idioma original, determine sus opiniones y genere un archivo de audio a partir del texto traducido.

SDK para Java 2.x

Esta aplicación de ejemplo analiza y almacena las tarjetas de comentarios de los clientes. Concretamente, satisface la necesidad de un hotel ficticio en la ciudad de Nueva York. El hotel recibe comentarios de los huéspedes en varios idiomas en forma de tarjetas de comentarios físicas. Esos comentarios se cargan en la aplicación a través de un cliente web. Una vez cargada la imagen de una tarjeta de comentarios, se llevan a cabo los siguientes pasos:

- El texto se extrae de la imagen mediante Amazon Textract.
- Amazon Comprehend determina la opinión del texto extraído y su idioma.
- El texto extraído se traduce al inglés mediante Amazon Translate.
- Amazon Polly sintetiza un archivo de audio a partir del texto extraído.

La aplicación completa se puede implementar con AWS CDK. Para ver el código fuente y las instrucciones de implementación, consulta el proyecto en GitHub.

Servicios utilizados en este ejemplo

- Amazon Comprehend
- Lambda
- Amazon Polly
- Amazon Textract
- Amazon Translate

Ejemplos de Amazon Transcribe usando SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x con Amazon Transcribe.

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`ListTranscriptionJobs`

En el siguiente ejemplo de código, se muestra cómo utilizar `ListTranscriptionJobs`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public class ListTranscriptionJobs {
    public static void main(String[] args) {
        TranscribeClient transcribeClient = TranscribeClient.builder()
            .region(Region.US_EAST_1)
            .build();

            listTranscriptionJobs(transcribeClient);
        }

        public static void listTranscriptionJobs(TranscribeClient transcribeClient)
 {
            ListTranscriptionJobsRequest listJobsRequest =
 ListTranscriptionJobsRequest.builder()
                .build();


 transcribeClient.listTranscriptionJobsPaginator(listJobsRequest).stream()
                .flatMap(response -> response.transcriptionJobSummaries().stream())
                .forEach(jobSummary -> {
                    System.out.println("Job Name: " +
 jobSummary.transcriptionJobName());
                    System.out.println("Job Status: " +
 jobSummary.transcriptionJobStatus());
```

```
                    System.out.println("Output Location: " +
jobSummary.outputLocationType());
                    // Add more information as needed

                    // Retrieve additional details for the job if necessary
                    GetTranscriptionJobResponse jobDetails =
transcribeClient.getTranscriptionJob(
                        GetTranscriptionJobRequest.builder()
                            .transcriptionJobName(jobSummary.transcriptionJobName())
                            .build());

                    // Display additional details
                    System.out.println("Language Code: " +
jobDetails.transcriptionJob().languageCode());
                    System.out.println("Media Format: " +
jobDetails.transcriptionJob().mediaFormat());
                    // Add more details as needed

                    System.out.println("--------------");
                });
        }
    }
```

- Para obtener más información sobre la API, consulta ListTranscriptionJobsla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Transcribir audio y obtener datos de trabajo

En el siguiente ejemplo de código, se muestra cómo:

- Iniciar un trabajo de transcripción con Amazon Transcribe.
- Esperar a que el trabajo finalice.
- Obtener el URI en el que está almacenada la transcripción.

Para obtener información, consulte Introducción a Amazon Transcribe.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

Transcribe un archivo PCM.

```
/**
 * To run this AWS code example, ensure that you have set up your development
 * environment, including your AWS credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class TranscribeStreamingDemoFile {
    private static final Region REGION = Region.US_EAST_1;
    private static TranscribeStreamingAsyncClient client;

    public static void main(String args[]) throws ExecutionException,
 InterruptedException {

        final String USAGE = "\n" +
                "Usage:\n" +
                "    <file> \n\n" +
                "Where:\n" +
                "    file - the location of a PCM file to transcribe. In this
 example, ensure the PCM file is 16 hertz (Hz). \n";

        if (args.length != 1) {
            System.out.println(USAGE);
            System.exit(1);
        }

        String file = args[0];
        client = TranscribeStreamingAsyncClient.builder()
                .region(REGION)
                .build();
```

```
        CompletableFuture<Void> result =
client.startStreamTranscription(getRequest(16_000),
                new AudioStreamPublisher(getStreamFromFile(file)),
                getResponseHandler());

        result.get();
        client.close();
    }

    private static InputStream getStreamFromFile(String file) {
        try {
            File inputFile = new File(file);
            InputStream audioStream = new FileInputStream(inputFile);
            return audioStream;

        } catch (FileNotFoundException e) {
            throw new RuntimeException(e);
        }
    }

    private static StartStreamTranscriptionRequest getRequest(Integer
mediaSampleRateHertz) {
        return StartStreamTranscriptionRequest.builder()
                .languageCode(LanguageCode.EN_US)
                .mediaEncoding(MediaEncoding.PCM)
                .mediaSampleRateHertz(mediaSampleRateHertz)
                .build();
    }

    private static StartStreamTranscriptionResponseHandler getResponseHandler() {
        return StartStreamTranscriptionResponseHandler.builder()
                .onResponse(r -> {
                    System.out.println("Received Initial response");
                })
                .onError(e -> {
                    System.out.println(e.getMessage());
                    StringWriter sw = new StringWriter();
                    e.printStackTrace(new PrintWriter(sw));
                    System.out.println("Error Occurred: " + sw.toString());
                })
                .onComplete(() -> {
                    System.out.println("=== All records stream successfully ===");
                })
                .subscriber(event -> {
```

```
                    List<Result> results = ((TranscriptEvent)
 event).transcript().results();
                    if (results.size() > 0) {
                        if (!
results.get(0).alternatives().get(0).transcript().isEmpty()) {

 System.out.println(results.get(0).alternatives().get(0).transcript());
                        }
                    }
                })
                .build();
    }

    private static class AudioStreamPublisher implements Publisher<AudioStream> {
        private final InputStream inputStream;
        private static Subscription currentSubscription;

        private AudioStreamPublisher(InputStream inputStream) {
            this.inputStream = inputStream;
        }

        @Override
        public void subscribe(Subscriber<? super AudioStream> s) {

            if (this.currentSubscription == null) {
                this.currentSubscription = new SubscriptionImpl(s, inputStream);
            } else {
                this.currentSubscription.cancel();
                this.currentSubscription = new SubscriptionImpl(s, inputStream);
            }
            s.onSubscribe(currentSubscription);
        }
    }

    public static class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024 * 1;
        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;
        private ExecutorService executor = Executors.newFixedThreadPool(1);
        private AtomicLong demand = new AtomicLong(0);

        SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream inputStream)
 {
            this.subscriber = s;
```

```
            this.inputStream = inputStream;
        }

        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);

            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
                            AudioEvent audioEvent =
audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (Exception e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {
            executor.shutdown();
        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer = null;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];

            int len = 0;
            try {
                len = inputStream.read(audioBytes);
```

```
                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                    .audioChunk(SdkBytes.fromByteBuffer(bb))
                    .build();
        }
    }
}
```

Transcribe el audio en streaming desde el micrófono del equipo.

```
public class TranscribeStreamingDemoApp {
    private static final Region REGION = Region.US_EAST_1;
    private static TranscribeStreamingAsyncClient client;

    public static void main(String[] args)
            throws URISyntaxException, ExecutionException, InterruptedException,
 LineUnavailableException {

        client = TranscribeStreamingAsyncClient.builder()
                .credentialsProvider(getCredentials())
                .region(REGION)
                .build();

        CompletableFuture<Void> result =
 client.startStreamTranscription(getRequest(16_000),
                new AudioStreamPublisher(getStreamFromMic()),
                getResponseHandler());

        result.get();
        client.close();
```

```
    }

    private static InputStream getStreamFromMic() throws LineUnavailableException {

        // Signed PCM AudioFormat with 16kHz, 16 bit sample size, mono
        int sampleRate = 16000;
        AudioFormat format = new AudioFormat(sampleRate, 16, 1, true, false);
        DataLine.Info info = new DataLine.Info(TargetDataLine.class, format);

        if (!AudioSystem.isLineSupported(info)) {
            System.out.println("Line not supported");
            System.exit(0);
        }

        TargetDataLine line = (TargetDataLine) AudioSystem.getLine(info);
        line.open(format);
        line.start();

        InputStream audioStream = new AudioInputStream(line);
        return audioStream;
    }

    private static AwsCredentialsProvider getCredentials() {
        return DefaultCredentialsProvider.create();
    }

    private static StartStreamTranscriptionRequest getRequest(Integer
mediaSampleRateHertz) {
        return StartStreamTranscriptionRequest.builder()
                .languageCode(LanguageCode.EN_US.toString())
                .mediaEncoding(MediaEncoding.PCM)
                .mediaSampleRateHertz(mediaSampleRateHertz)
                .build();
    }

    private static StartStreamTranscriptionResponseHandler getResponseHandler() {
        return StartStreamTranscriptionResponseHandler.builder()
                .onResponse(r -> {
                    System.out.println("Received Initial response");
                })
                .onError(e -> {
                    System.out.println(e.getMessage());
                    StringWriter sw = new StringWriter();
                    e.printStackTrace(new PrintWriter(sw));
```

```
                    System.out.println("Error Occurred: " + sw);
                })
                .onComplete(() -> {
                    System.out.println("=== All records stream successfully ===");
                })
                .subscriber(event -> {
                    List<Result> results = ((TranscriptEvent)
 event).transcript().results();
                    if (results.size() > 0) {
                        if (!
results.get(0).alternatives().get(0).transcript().isEmpty()) {

 System.out.println(results.get(0).alternatives().get(0).transcript());
                        }
                    }
                })
                .build();
    }


    private static class AudioStreamPublisher implements Publisher<AudioStream> {
        private static Subscription currentSubscription;
        private final InputStream inputStream;

        private AudioStreamPublisher(InputStream inputStream) {
            this.inputStream = inputStream;
        }

        @Override
        public void subscribe(Subscriber<? super AudioStream> s) {

            if (currentSubscription == null) {
                currentSubscription = new SubscriptionImpl(s, inputStream);
            } else {
                currentSubscription.cancel();
                currentSubscription = new SubscriptionImpl(s, inputStream);
            }
            s.onSubscribe(currentSubscription);
        }
    }

    public static class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024;
        private final Subscriber<? super AudioStream> subscriber;
```

```
        private final InputStream inputStream;
        private final ExecutorService executor = Executors.newFixedThreadPool(1);
        private final AtomicLong demand = new AtomicLong(0);

        SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream inputStream)
{
            this.subscriber = s;
            this.inputStream = inputStream;
        }

        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);

            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
                            AudioEvent audioEvent =
audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (Exception e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {
            executor.shutdown();
        }

        private ByteBuffer getNextEvent() {
```

```
            ByteBuffer audioBuffer = null;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];

            int len = 0;
            try {
                len = inputStream.read(audioBytes);

                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                    .audioChunk(SdkBytes.fromByteBuffer(bb))
                    .build();
        }
    }
}
```

- Para obtener detalles sobre la API, consulte los siguientes temas en la Referencia de la API de AWS SDK for Java 2.x .
  - GetTranscriptionJob
  - StartTranscriptionJob

Ejemplos de Amazon Transcribe Streaming con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes mediante Amazon Transcribe Streaming. AWS SDK for Java 2.x

Las acciones son extractos de código de programas más grandes y deben ejecutarse en contexto. Mientras las acciones muestran cómo llamar a las distintas funciones de servicio, es posible ver las acciones en contexto en los escenarios relacionados.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Acciones
- Escenarios

Acciones

`StartMedicalStreamTranscription`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartMedicalStreamTranscription`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto. GitHub Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/*
To run this AWS code example, ensure that you have set up your development
 environment, including your AWS credentials.

 For information, see this documentation topic:

 https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html

This code demonstrates the process of starting a medical transcription job using the
 AWS Transcribe
Streaming service, including setting up the audio input stream, configuring the
 transcription request,
and handling the transcription response.
 */
```

```
public class TranscribeMedicalStreamingDemoApp {
    private static TranscribeStreamingAsyncClient client;

    public static void main(String args[])
        throws ExecutionException, InterruptedException, LineUnavailableException {

        client = TranscribeStreamingAsyncClient.builder()
            .credentialsProvider(getCredentials())
            .build();

        CompletableFuture<Void> result =
 client.startMedicalStreamTranscription(getMedicalRequest(16_000),
            new AudioStreamPublisher(getStreamFromMic()),
            getMedicalResponseHandler());

        result.get();
        client.close();
    }

    private static InputStream getStreamFromMic() throws LineUnavailableException {

        // Signed PCM AudioFormat with 16kHz, 16 bit sample size, mono
        int sampleRate = 16000;
        AudioFormat format = new AudioFormat(sampleRate, 16, 1, true, false);
        DataLine.Info info = new DataLine.Info(TargetDataLine.class, format);

        if (!AudioSystem.isLineSupported(info)) {
            System.out.println("Line not supported");
            throw new LineUnavailableException("The audio system microphone line is
 not supported.");
        }

        TargetDataLine line = (TargetDataLine) AudioSystem.getLine(info);
        line.open(format);
        line.start();

        InputStream audioStream = new AudioInputStream(line);
        return audioStream;
    }

    private static AwsCredentialsProvider getCredentials() {
        return DefaultCredentialsProvider.create();
    }
```

```
    private static StartMedicalStreamTranscriptionRequest getMedicalRequest(Integer
 mediaSampleRateHertz) {
        return StartMedicalStreamTranscriptionRequest.builder()
            .languageCode(LanguageCode.EN_US.toString()) // For medical
 transcription, EN_US is typically used.
            .mediaEncoding(MediaEncoding.PCM)
            .mediaSampleRateHertz(mediaSampleRateHertz)
            .specialty(Specialty.PRIMARYCARE) // Specify the medical specialty.
            .type(Type.CONVERSATION) // Set the type as CONVERSATION or DICTATION.
            .build();
    }

    private static StartMedicalStreamTranscriptionResponseHandler
 getMedicalResponseHandler() {
        return StartMedicalStreamTranscriptionResponseHandler.builder()
            .onResponse(r -> {
                System.out.println("Received Initial response");
            })
            .onError(e -> {
                System.out.println(e.getMessage());
                StringWriter sw = new StringWriter();
                e.printStackTrace(new PrintWriter(sw));
                System.out.println("Error Occurred: " + sw.toString());
            })
            .onComplete(() -> {
                System.out.println("=== All records streamed successfully ===");
            })
            .subscriber(event -> {
                List<MedicalResult> results = ((MedicalTranscriptEvent)
 event).transcript().results();
                if (results.size() > 0) {
                    if (!
results.get(0).alternatives().get(0).transcript().isEmpty()) {

 System.out.println(results.get(0).alternatives().get(0).transcript());
                    }
                }
            })
            .build();
    }

    private static class AudioStreamPublisher implements Publisher<AudioStream> {
        private final InputStream inputStream;
        private static Subscription currentSubscription;
```

```
        private AudioStreamPublisher(InputStream inputStream) {
            this.inputStream = inputStream;
        }

        @Override
        public void subscribe(Subscriber<? super AudioStream> s) {

            if (this.currentSubscription == null) {
                this.currentSubscription = new SubscriptionImpl(s, inputStream);
            } else {
                this.currentSubscription.cancel();
                this.currentSubscription = new SubscriptionImpl(s, inputStream);
            }
            s.onSubscribe(currentSubscription);
        }
    }

    public static class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024 * 1;
        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;
        private ExecutorService executor = Executors.newFixedThreadPool(1);
        private AtomicLong demand = new AtomicLong(0);

        SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream inputStream)
{
            this.subscriber = s;
            this.inputStream = inputStream;
        }

        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);
            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
```

```
                            AudioEvent audioEvent =
audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (Exception e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {
            executor.shutdown();
        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer = null;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];

            int len = 0;
            try {
                len = inputStream.read(audioBytes);

                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                .audioChunk(SdkBytes.fromByteBuffer(bb))
                .build();
        }
```

```
    }
}
```

- Para obtener más información sobre la API, consulta StartMedicalStreamTranscriptionla Referencia AWS SDK for Java 2.x de la API.

`StartStreamTranscription`

En el siguiente ejemplo de código, se muestra cómo utilizar `StartStreamTranscription`.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public class TranscribeStreamingDemoApp {
    private static final Region REGION = Region.US_EAST_1;
    private static TranscribeStreamingAsyncClient client;

    public static void main(String[] args)
            throws URISyntaxException, ExecutionException, InterruptedException,
 LineUnavailableException {

        client = TranscribeStreamingAsyncClient.builder()
                .credentialsProvider(getCredentials())
                .region(REGION)
                .build();

        CompletableFuture<Void> result =
 client.startStreamTranscription(getRequest(16_000),
                new AudioStreamPublisher(getStreamFromMic()),
                getResponseHandler());

        result.get();
        client.close();
    }
```

```
    private static InputStream getStreamFromMic() throws LineUnavailableException {

        // Signed PCM AudioFormat with 16kHz, 16 bit sample size, mono
        int sampleRate = 16000;
        AudioFormat format = new AudioFormat(sampleRate, 16, 1, true, false);
        DataLine.Info info = new DataLine.Info(TargetDataLine.class, format);

        if (!AudioSystem.isLineSupported(info)) {
            System.out.println("Line not supported");
            System.exit(0);
        }

        TargetDataLine line = (TargetDataLine) AudioSystem.getLine(info);
        line.open(format);
        line.start();

        InputStream audioStream = new AudioInputStream(line);
        return audioStream;
    }

    private static AwsCredentialsProvider getCredentials() {
        return DefaultCredentialsProvider.create();
    }

    private static StartStreamTranscriptionRequest getRequest(Integer
mediaSampleRateHertz) {
        return StartStreamTranscriptionRequest.builder()
                .languageCode(LanguageCode.EN_US.toString())
                .mediaEncoding(MediaEncoding.PCM)
                .mediaSampleRateHertz(mediaSampleRateHertz)
                .build();
    }

    private static StartStreamTranscriptionResponseHandler getResponseHandler() {
        return StartStreamTranscriptionResponseHandler.builder()
                .onResponse(r -> {
                    System.out.println("Received Initial response");
                })
                .onError(e -> {
                    System.out.println(e.getMessage());
                    StringWriter sw = new StringWriter();
                    e.printStackTrace(new PrintWriter(sw));
                    System.out.println("Error Occurred: " + sw);
                })
```

```
                .onComplete(() -> {
                    System.out.println("=== All records stream successfully ===");
                })
                .subscriber(event -> {
                    List<Result> results = ((TranscriptEvent)
 event).transcript().results();
                    if (results.size() > 0) {
                        if (!
results.get(0).alternatives().get(0).transcript().isEmpty()) {

 System.out.println(results.get(0).alternatives().get(0).transcript());
                        }
                    }
                })
                .build();
    }


    private static class AudioStreamPublisher implements Publisher<AudioStream> {
        private static Subscription currentSubscription;
        private final InputStream inputStream;

        private AudioStreamPublisher(InputStream inputStream) {
            this.inputStream = inputStream;
        }

        @Override
        public void subscribe(Subscriber<? super AudioStream> s) {

            if (currentSubscription == null) {
                currentSubscription = new SubscriptionImpl(s, inputStream);
            } else {
                currentSubscription.cancel();
                currentSubscription = new SubscriptionImpl(s, inputStream);
            }
            s.onSubscribe(currentSubscription);
        }
    }

    public static class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024;
        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;
        private final ExecutorService executor = Executors.newFixedThreadPool(1);
```

```
        private final AtomicLong demand = new AtomicLong(0);

        SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream inputStream)
{
            this.subscriber = s;
            this.inputStream = inputStream;
        }

        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);

            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
                            AudioEvent audioEvent =
audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (Exception e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {
            executor.shutdown();
        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer = null;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];
```

```
            int len = 0;
            try {
                len = inputStream.read(audioBytes);

                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                    .audioChunk(SdkBytes.fromByteBuffer(bb))
                    .build();
        }
    }
}
```

- Para obtener más información sobre la API, consulta StartStreamTranscriptionla Referencia AWS SDK for Java 2.x de la API.

Escenarios

Transcripción de un archivo de audio

El siguiente ejemplo de código muestra cómo generar una transcripción de un archivo de audio de origen mediante Amazon Transcribe Streaming.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
/**
 * To run this AWS code example, ensure that you have set up your development
 * environment, including your AWS credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class TranscribeStreamingDemoFile {
    private static final Region REGION = Region.US_EAST_1;
    private static TranscribeStreamingAsyncClient client;

    public static void main(String args[]) throws ExecutionException,
 InterruptedException {

        final String USAGE = "\n" +
                "Usage:\n" +
                "    <file> \n\n" +
                "Where:\n" +
                "    file - the location of a PCM file to transcribe. In this
 example, ensure the PCM file is 16 hertz (Hz). \n";

        if (args.length != 1) {
            System.out.println(USAGE);
            System.exit(1);
        }

        String file = args[0];
        client = TranscribeStreamingAsyncClient.builder()
                .region(REGION)
                .build();
```

```
        CompletableFuture<Void> result =
client.startStreamTranscription(getRequest(16_000),
                new AudioStreamPublisher(getStreamFromFile(file)),
                getResponseHandler());

        result.get();
        client.close();
    }

    private static InputStream getStreamFromFile(String file) {
        try {
            File inputFile = new File(file);
            InputStream audioStream = new FileInputStream(inputFile);
            return audioStream;

        } catch (FileNotFoundException e) {
            throw new RuntimeException(e);
        }
    }

    private static StartStreamTranscriptionRequest getRequest(Integer
mediaSampleRateHertz) {
        return StartStreamTranscriptionRequest.builder()
                .languageCode(LanguageCode.EN_US)
                .mediaEncoding(MediaEncoding.PCM)
                .mediaSampleRateHertz(mediaSampleRateHertz)
                .build();
    }

    private static StartStreamTranscriptionResponseHandler getResponseHandler() {
        return StartStreamTranscriptionResponseHandler.builder()
                .onResponse(r -> {
                    System.out.println("Received Initial response");
                })
                .onError(e -> {
                    System.out.println(e.getMessage());
                    StringWriter sw = new StringWriter();
                    e.printStackTrace(new PrintWriter(sw));
                    System.out.println("Error Occurred: " + sw.toString());
                })
                .onComplete(() -> {
                    System.out.println("=== All records stream successfully ===");
                })
                .subscriber(event -> {
```

```
                    List<Result> results = ((TranscriptEvent)
 event).transcript().results();
                    if (results.size() > 0) {
                        if (!
results.get(0).alternatives().get(0).transcript().isEmpty()) {

 System.out.println(results.get(0).alternatives().get(0).transcript());
                        }
                    }
                })
                .build();
    }

    private static class AudioStreamPublisher implements Publisher<AudioStream> {
        private final InputStream inputStream;
        private static Subscription currentSubscription;

        private AudioStreamPublisher(InputStream inputStream) {
            this.inputStream = inputStream;
        }

        @Override
        public void subscribe(Subscriber<? super AudioStream> s) {

            if (this.currentSubscription == null) {
                this.currentSubscription = new SubscriptionImpl(s, inputStream);
            } else {
                this.currentSubscription.cancel();
                this.currentSubscription = new SubscriptionImpl(s, inputStream);
            }
            s.onSubscribe(currentSubscription);
        }
    }

    public static class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024 * 1;
        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;
        private ExecutorService executor = Executors.newFixedThreadPool(1);
        private AtomicLong demand = new AtomicLong(0);

        SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream inputStream)
 {
            this.subscriber = s;
```

```
            this.inputStream = inputStream;
        }

        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);

            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
                            AudioEvent audioEvent =
audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (Exception e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {
            executor.shutdown();
        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer = null;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];

            int len = 0;
            try {
                len = inputStream.read(audioBytes);
```

```
                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                    .audioChunk(SdkBytes.fromByteBuffer(bb))
                    .build();
        }
    }
}
```

- Para obtener más información sobre la API, consulta StartStreamTranscriptionla Referencia AWS SDK for Java 2.x de la API.

Transcripción de audio desde un micrófono

El siguiente ejemplo de código muestra cómo generar una transcripción desde un micrófono mediante Amazon Transcribe Streaming.

SDK para Java 2.x

> **Note**
>
> Hay más información al respecto GitHub. Busque el ejemplo completo y aprenda a configurar y ejecutar en el Repositorio de ejemplos de código de AWS.

```
public class TranscribeStreamingDemoApp {
    private static final Region REGION = Region.US_EAST_1;
    private static TranscribeStreamingAsyncClient client;
```

```
    public static void main(String[] args)
            throws URISyntaxException, ExecutionException, InterruptedException,
LineUnavailableException {

        client = TranscribeStreamingAsyncClient.builder()
                .credentialsProvider(getCredentials())
                .region(REGION)
                .build();

        CompletableFuture<Void> result =
client.startStreamTranscription(getRequest(16_000),
                new AudioStreamPublisher(getStreamFromMic()),
                getResponseHandler());

        result.get();
        client.close();
    }

    private static InputStream getStreamFromMic() throws LineUnavailableException {

        // Signed PCM AudioFormat with 16kHz, 16 bit sample size, mono
        int sampleRate = 16000;
        AudioFormat format = new AudioFormat(sampleRate, 16, 1, true, false);
        DataLine.Info info = new DataLine.Info(TargetDataLine.class, format);

        if (!AudioSystem.isLineSupported(info)) {
            System.out.println("Line not supported");
            System.exit(0);
        }

        TargetDataLine line = (TargetDataLine) AudioSystem.getLine(info);
        line.open(format);
        line.start();

        InputStream audioStream = new AudioInputStream(line);
        return audioStream;
    }

    private static AwsCredentialsProvider getCredentials() {
        return DefaultCredentialsProvider.create();
    }

    private static StartStreamTranscriptionRequest getRequest(Integer
mediaSampleRateHertz) {
```

```
        return StartStreamTranscriptionRequest.builder()
                .languageCode(LanguageCode.EN_US.toString())
                .mediaEncoding(MediaEncoding.PCM)
                .mediaSampleRateHertz(mediaSampleRateHertz)
                .build();
    }

    private static StartStreamTranscriptionResponseHandler getResponseHandler() {
        return StartStreamTranscriptionResponseHandler.builder()
                .onResponse(r -> {
                    System.out.println("Received Initial response");
                })
                .onError(e -> {
                    System.out.println(e.getMessage());
                    StringWriter sw = new StringWriter();
                    e.printStackTrace(new PrintWriter(sw));
                    System.out.println("Error Occurred: " + sw);
                })
                .onComplete(() -> {
                    System.out.println("=== All records stream successfully ===");
                })
                .subscriber(event -> {
                    List<Result> results = ((TranscriptEvent)
 event).transcript().results();
                    if (results.size() > 0) {
                        if (!
results.get(0).alternatives().get(0).transcript().isEmpty()) {

 System.out.println(results.get(0).alternatives().get(0).transcript());
                        }
                    }
                })
                .build();
    }


    private static class AudioStreamPublisher implements Publisher<AudioStream> {
        private static Subscription currentSubscription;
        private final InputStream inputStream;

        private AudioStreamPublisher(InputStream inputStream) {
            this.inputStream = inputStream;
        }
```

```
        @Override
        public void subscribe(Subscriber<? super AudioStream> s) {

            if (currentSubscription == null) {
                currentSubscription = new SubscriptionImpl(s, inputStream);
            } else {
                currentSubscription.cancel();
                currentSubscription = new SubscriptionImpl(s, inputStream);
            }
            s.onSubscribe(currentSubscription);
        }
    }

    public static class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024;
        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;
        private final ExecutorService executor = Executors.newFixedThreadPool(1);
        private final AtomicLong demand = new AtomicLong(0);

        SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream inputStream)
{
            this.subscriber = s;
            this.inputStream = inputStream;
        }

        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);

            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
                            AudioEvent audioEvent =
audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
```

```
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (Exception e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {
            executor.shutdown();
        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer = null;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];

            int len = 0;
            try {
                len = inputStream.read(audioBytes);

                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                    .audioChunk(SdkBytes.fromByteBuffer(bb))
                    .build();
        }
    }
}
```

- Para obtener más información sobre la API, consulta StartStreamTranscriptionla Referencia AWS SDK for Java 2.x de la API.

Ejemplos de Amazon Translate con SDK para Java 2.x

Los siguientes ejemplos de código muestran cómo realizar acciones e implementar escenarios comunes AWS SDK for Java 2.x mediante Amazon Translate.

Los escenarios son ejemplos de código que muestran cómo llevar a cabo una tarea específica a través de llamadas a varias funciones dentro del servicio o combinado con otros Servicios de AWS.

En cada ejemplo se incluye un enlace al código de origen completo, con instrucciones de configuración y ejecución del código en el contexto.

Temas

- Escenarios

Escenarios

Crear un chatbot de Amazon Lex

En el siguiente ejemplo de código se muestra cómo crear un chatbot para atraer a visitantes a su sitio web.

SDK para Java 2.x

Indica cómo utilizar la API de Amazon Lex para crear un Chatbot dentro de una aplicación web con el fin de atraer visitantes a su sitio web.

Para obtener el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulte el ejemplo completo en GitHub.

Servicios utilizados en este ejemplo

- Amazon Comprehend
- Amazon Lex
- Amazon Translate

Creación de una aplicación de Amazon SNS

El siguiente ejemplo de código muestra cómo crear una aplicación que cuente con la funcionalidad de suscripción y publicación y traduzca mensajes.

SDK para Java 2.x

Indica cómo utilizar la API de Java de Amazon Simple Notification Service para crear una aplicación web con la funcionalidad de suscripción y publicación. Además, esta aplicación de ejemplo también traduce los mensajes.

Para ver el código fuente completo y las instrucciones sobre cómo configurarlo y ejecutarlo, consulta el ejemplo completo en GitHub.

Para obtener el código fuente completo y las instrucciones sobre cómo configurar y ejecutar el ejemplo que usa la API Java Async, consulta el ejemplo completo en. GitHub

Servicios utilizados en este ejemplo

- Amazon SNS
- Amazon Translate

Creación de una aplicación para analizar los comentarios de los clientes

El siguiente ejemplo de código muestra cómo crear una aplicación que analice las tarjetas de comentarios de los clientes, las traduzca del idioma original, determine sus opiniones y genere un archivo de audio a partir del texto traducido.

SDK para Java 2.x

Esta aplicación de ejemplo analiza y almacena las tarjetas de comentarios de los clientes. Concretamente, satisface la necesidad de un hotel ficticio en la ciudad de Nueva York. El hotel recibe comentarios de los huéspedes en varios idiomas en forma de tarjetas de comentarios físicas. Esos comentarios se cargan en la aplicación a través de un cliente web. Una vez cargada la imagen de una tarjeta de comentarios, se llevan a cabo los siguientes pasos:

- El texto se extrae de la imagen mediante Amazon Textract.
- Amazon Comprehend determina la opinión del texto extraído y su idioma.
- El texto extraído se traduce al inglés mediante Amazon Translate.
- Amazon Polly sintetiza un archivo de audio a partir del texto extraído.

La aplicación completa se puede implementar con AWS CDK. Para ver el código fuente y las instrucciones de implementación, consulta el proyecto en. GitHub

Servicios utilizados en este ejemplo

- Amazon Comprehend
- Lambda
- Amazon Polly
- Amazon Textract
- Amazon Translate

Migrar de la versión 1.x a la 2.x del AWS SDK para Java

El AWS SDK para Java 2.x es un cambio importante con respecto a la base de código de la versión 1.x basada en versiones posteriores a Java 8. Incluye muchas actualizaciones como, por ejemplo, coherencia mejorada, facilidad de uso e inmutabilidad sólidamente aplicada. En esta sección se describen las principales características nuevas de la versión 2.x y se explica cómo migrar el código de la versión 1.x a la 2.x.

Temas

- ¿Qué novedades incluye la versión 2?
- Cómo migrar tu código de AWS SDK para Java 1.x a 2.x
- Qué diferencia hay entre la AWS SDK para Java 1.x y la 2.x
- Utilizar el SDK para Java 1.x y 2.x en paralelo
- Encuentre aplicaciones mediante clientes AWS SDK para Java 1.x

¿Qué novedades incluye la versión 2?

- Puede configurar sus propios clientes HTTP. Consulte Configuración del transporte HTTP.
- Los clientes asincrónicos presentan compatibilidad de E/S sin bloqueo y devuelven objetos `CompletableFuture`. Consulte Programación asíncrona.
- Las operaciones que devuelven varias páginas tienen respuestas paginadas automáticamente. De esta forma, puede centrar su código en qué hacer con la respuesta, sin necesidad de comprobar y obtener páginas posteriores. Consulte Paginación.
- El rendimiento del tiempo de inicio del SDK se ha mejorado para las funciones de AWS Lambda. Consulte Mejoras en el rendimiento del tiempo de inicio del SDK.
- La versión 2.x admite un nuevo método abreviado para crear solicitudes.

  Example

  ```
  dynamoDbClient.putItem(request -> request.tableName(TABLE))
  ```

Para obtener más detalles sobre las nuevas características y ver ejemplos de código específicos, consulte las demás secciones de esta guía.

- Quick Start (Inicio rápido
- Cómo configurar
- Ejemplos de código para el AWS SDK para Java 2.x
- Usar el SDK
- Seguridad para el AWS SDK para Java

Cómo migrar tu código de AWS SDK para Java 1.x a 2.x

Puede migrar sus aplicaciones existentes del SDK para Java 1.x de dos formas.

1. Método automatizado mediante la herramienta de migración.
2. Método manual reemplazando incrementalmente las importaciones de 1.x con importaciones de 2.x.

Le recomendamos que empiece utilizando la herramienta de migración. Automatiza gran parte de la rutina, el trabajo de reemplazo del código de 1.x a 2.x.

Dado que la herramienta no migra todas las características, deberá buscar el código restante de la v1 después de ejecutar la herramienta. Cuando encuentre un código que la herramienta no haya migrado, siga las step-by-step instrucciones (enfoque manual) y utilice los artículos de la guía de migración para finalizar la migración.

Temas

- Herramienta de migración de AWS SDK para Java
- step-by-stepInstrucciones de migración con ejemplo

Herramienta de migración de AWS SDK para Java

AWS SDK para Java proporciona una herramienta de migración que ayuda a automatizar la migración del SDK para código Java 1.x (V1) a 2.x (V2). La herramienta utiliza OpenRewrite, una herramienta de refactorización del código fuente abierto, para realizar la migración. OpenRewrite utiliza reglas de modificación de código (denominadas “fórmulas”) para actualizar automáticamente el código fuente de sintaxis y patrones de V1 a V2.

La herramienta admite las reglas de modificación de código para clientes de servicio del SDK y la biblioteca de alto nivel de S3 Transfer Manager. No se admiten reglas de modificación de código

para otras API de alto nivel, como `DynamoDBMapper` de la V1 a la API DynamoDB Enhanced Client de la V2.

Para obtener más información sobre las limitaciones, consulte el final de esta página. Para ver ejemplos detallados de patrones de código comunes no admitidos con pasos de migración manual, consulte Patrones de código no admitidos.

Uso de la herramienta de migración

Migración de un proyecto de Maven

Siga las instrucciones que aparecen a continuación para migrar un proyecto basado en Maven del SDK para Java 1.x mediante la herramienta Complemento OpenRewrite Maven.

1. Navegación al directorio raíz del proyecto de Maven

   Abra una ventana de terminal (línea de comandos) y acceda al directorio raíz de la aplicación basada en Maven.
2. Ejecución del comando `rewrite-maven-plugin` del plugin

   Puede elegir entre dos modos (objetivos de Maven): `dryRun` y `run`.

   `dryRun` Modo

   En el modo `dryRun`, el complemento genera registros de diferencias en la salida de la consola y un archivo de parche llamado `rewrite.patch` en la carpeta `target/rewrite`. Este modo permite previsualizar los cambios que se realizarían, ya que no se realizan cambios en los archivos de código fuente.

   El siguiente ejemplo muestra cómo invocar el complemento en modo `dryRun`.

   ```
   mvn org.openrewrite.maven:rewrite-maven-plugin:<rewrite-plugin-version>*:dryRun \
     -Drewrite.recipeArtifactCoordinates=software.amazon.awssdk:v2-
   migration:<sdkversion>** \
     -Drewrite.activeRecipes=software.amazon.awssdk.v2migration.AwsSdkJavaV1ToV2
   ```

   *Sustituya *<rewrite-plugin-version>* por el valor `rewriteMavenPluginVersion` que aparece en este archivo de prueba.

   **Sustituya *<sdkversion>* por una versión 2.x del SDK. Visite Central de Maven para comprobar si hay una nueva versión.

> **Important**
>
> Asegúrese de usar la versión del `rewrite-maven-plugin` que se muestra en el archivo de prueba, ya que es posible que otras versiones no funcionen.

La salida de la consola del modo `dryRun` debe ser similar a la siguiente.

```
[WARNING] These recipes would make changes to project/src/test/resources/maven/
before/pom.xml:
[WARNING]     software.amazon.awssdk.v2migration.AwsSdkJavaV1ToV2
[WARNING]         software.amazon.awssdk.v2migration.UpgradeSdkDependencies
[WARNING]             org.openrewrite.java.dependencies.AddDependency:
 {groupId=software.amazon.awssdk, artifactId=apache-client, version=2.27.0,
 onlyIfUsing=com.amazonaws.ClientConfiguration}
[WARNING]             org.openrewrite.java.dependencies.AddDependency:
 {groupId=software.amazon.awssdk, artifactId=netty-nio-client, version=2.27.0,
 onlyIfUsing=com.amazonaws.ClientConfiguration}
[WARNING]             org.openrewrite.java.dependencies.ChangeDependency:
 {oldGroupId=com.amazonaws, oldArtifactId=aws-java-sdk-bom,
 newGroupId=software.amazon.awssdk, newArtifactId=bom, newVersion=2.27.0}
[WARNING]             org.openrewrite.java.dependencies.ChangeDependency:
 {oldGroupId=com.amazonaws, oldArtifactId=aws-java-sdk-s3,
 newGroupId=software.amazon.awssdk, newArtifactId=s3, newVersion=2.27.0}
[WARNING]             org.openrewrite.java.dependencies.ChangeDependency:
 {oldGroupId=com.amazonaws, oldArtifactId=aws-java-sdk-sqs,
 newGroupId=software.amazon.awssdk, newArtifactId=sqs, newVersion=2.27.0}
[WARNING] These recipes would make changes to project/src/test/resources/maven/
before/src/main/java/foo/bar/Application.java:
[WARNING]     software.amazon.awssdk.v2migration.AwsSdkJavaV1ToV2
[WARNING]         software.amazon.awssdk.v2migration.S3GetObjectConstructorToFluent
[WARNING]             software.amazon.awssdk.v2migration.ConstructorToFluent
[WARNING]         software.amazon.awssdk.v2migration.S3StreamingResponseToV2
[WARNING]         software.amazon.awssdk.v2migration.ChangeSdkType
[WARNING]         software.amazon.awssdk.v2migration.ChangeSdkCoreTypes
[WARNING]             software.amazon.awssdk.v2migration.ChangeExceptionTypes
[WARNING]                 org.openrewrite.java.ChangeType:
 {oldFullyQualifiedTypeName=com.amazonaws.AmazonClientException,
 newFullyQualifiedTypeName=software.amazon.awssdk.core.exception.SdkException}
```

```
[WARNING]                org.openrewrite.java.ChangeMethodName:
 {methodPattern=com.amazonaws.AmazonServiceException getRequestId(),
 newMethodName=requestId}
[WARNING]                org.openrewrite.java.ChangeMethodName:
 {methodPattern=com.amazonaws.AmazonServiceException getErrorCode(),
 newMethodName=awsErrorDetails().errorCode}
[WARNING]                org.openrewrite.java.ChangeMethodName:
 {methodPattern=com.amazonaws.AmazonServiceException getServiceName(),
 newMethodName=awsErrorDetails().serviceName}
[WARNING]                org.openrewrite.java.ChangeMethodName:
 {methodPattern=com.amazonaws.AmazonServiceException getErrorMessage(),
 newMethodName=awsErrorDetails().errorMessage}
[WARNING]                org.openrewrite.java.ChangeMethodName:
 {methodPattern=com.amazonaws.AmazonServiceException getRawResponse(),
 newMethodName=awsErrorDetails().rawResponse().asByteArray}
[WARNING]                org.openrewrite.java.ChangeMethodName:
 {methodPattern=com.amazonaws.AmazonServiceException getRawResponseContent(),
 newMethodName=awsErrorDetails().rawResponse().asUtf8String}
[WARNING]                org.openrewrite.java.ChangeType:
 {oldFullyQualifiedTypeName=com.amazonaws.AmazonServiceException,
 newFullyQualifiedTypeName=software.amazon.awssdk.awscore.exception.AwsServiceException}
[WARNING]         software.amazon.awssdk.v2migration.NewClassToBuilderPattern
[WARNING]             software.amazon.awssdk.v2migration.NewClassToBuilder
[WARNING]             software.amazon.awssdk.v2migration.V1SetterToV2
[WARNING]         software.amazon.awssdk.v2migration.V1GetterToV2
...
[WARNING]         software.amazon.awssdk.v2migration.V1BuilderVariationsToV2Builder
[WARNING]         software.amazon.awssdk.v2migration.NewClassToBuilderPattern
[WARNING]             software.amazon.awssdk.v2migration.NewClassToBuilder
[WARNING]             software.amazon.awssdk.v2migration.V1SetterToV2
[WARNING]         software.amazon.awssdk.v2migration.HttpSettingsToHttpClient
[WARNING]         software.amazon.awssdk.v2migration.WrapSdkClientBuilderRegionStr
[WARNING] Patch file available:
[WARNING]     project/src/test/resources/maven/before/target/rewrite/rewrite.patch
[WARNING] Estimate time saved: 20m
[WARNING] Run 'mvn rewrite:run' to apply the recipes.
```

`run` Modo

Cuando ejecuta el complemento en modo `run`, se modifica el código fuente del disco para aplicar los cambios. Asegúrese de tener una copia de seguridad del código fuente antes de ejecutar el comando.

El siguiente ejemplo muestra cómo invocar el complemento en modo `run`.

```
mvn org.openrewrite.maven:rewrite-maven-plugin:<rewrite-plugin-version>*:run \
  -Drewrite.recipeArtifactCoordinates=software.amazon.awssdk:v2-
migration:<sdkversion>** \
  -Drewrite.activeRecipes=software.amazon.awssdk.v2migration.AwsSdkJavaV1ToV2
```

*Sustituya <rewrite-plugin-version> por el `rewriteMavenPluginVersionvalue` que aparece en este archivo de prueba.

**Sustituya *<sdkversion>* por una versión 2.x del SDK. Visite Central de Maven para comprobar si hay una nueva versión.

Tras ejecutar el comando, compile la aplicación y ejecute pruebas para comprobar los cambios.

Migración de un proyecto de Gradle

Siga las instrucciones que aparecen a continuación para migrar un proyecto basado en Gradle del SDK para Java 1.x mediante la herramienta Complemento OpenRewrite Gradle.

1. Navegación al directorio raíz del proyecto de Gradle

   Abra una ventana de terminal (línea de comandos) y acceda al directorio raíz de la aplicación basada en Gradle.

2. Creación de un script de inicio de Gradle

   Cree un archivo `init.gradle` con el contenido siguiente en el directorio.

```
initscript {
    repositories {
        maven { url "https://plugins.gradle.org/m2" }
    }
    dependencies {
        classpath("org.openrewrite:plugin:<rewrite-plugin-version>*")
    }
}

rootProject {
    plugins.apply(org.openrewrite.gradle.RewritePlugin)
    dependencies {
```

```
        rewrite("software.amazon.awssdk:v2-migration:latest.release")
    }

    afterEvaluate {
        if (repositories.isEmpty()) {
            repositories {
                mavenCentral()
            }
        }
    }
}
```

*Sustituya *<rewrite-plugin-version>* por la versión que aparece en este archivo de prueba.

3. Ejecute el comando `rewrite`

   Al igual que con el complemento de Maven, puede ejecutar el complemento de Gradle en modo `dryRun` o `run`.

   `dryRun` Modo

   El siguiente ejemplo muestra cómo invocar el complemento en modo `dryRun`.

```
gradle rewriteDryRun --init-script init.gradle \
  -Drewrite.activeRecipes=software.amazon.awssdk.v2migration.AwsSdkJavaV1ToV2
```

   `run` Modo

   El siguiente ejemplo muestra cómo invocar el complemento en modo `run`.

```
gradle rewriteRun --init-script init.gradle \
  -Drewrite.activeRecipes=software.amazon.awssdk.v2migration.AwsSdkJavaV1ToV2
```

Limitaciones actuales

Si bien la migración admite la mayor parte del código de la V1 mediante reglas de modificación de código que se actualizan al equivalente de la V2, algunas clases y métodos no están cubiertos. Para estas clases y métodos, siga las instrucciones paso a paso para migrar el código manualmente.

En el caso de algunas reglas de modificación de código no compatibles, la herramienta de migración puede agregar un comentario que comience por:

```
/*AWS SDK for Java v2 migration: Transform for ...
```

Tras el comentario, la herramienta genera un código auxiliar genérico de la versión V2 del método o la clase. Por ejemplo, en el siguiente resultado, la herramienta de migración intentó migrar el método `setBucketLifecycleConfiguration` del cliente V1 S3:

```
/*AWS SDK for Java v2 migration: Transform for setBucketLifecycleConfiguration method
 not supported.
Please manually migrate your code by using builder pattern, update from
 BucketLifecycleConfiguration.Rule
to LifecycleRule, StorageClass to TransitionStorageClass, and adjust imports and
 names.*/
s3.putBucketLifecycleConfiguration(
        PutBucketLifecycleConfigurationRequest.builder()
            .bucket(bucketName)
            .lifecycleConfiguration(BucketLifecycleConfiguration.builder()
                .build())
            .build());
```

Los enlaces de la lista siguiente le llevan a la información sobre migración para ayudarle a migrar el código manualmente.

- the section called “Diferencias entre clientes de S3”
- S3 Transfer Manager (TransferManager)
- Asignación de objetos de DynamoDB (DynamoDBMapper)
- Utilidad de metadatos de EC2 (EC2MetadataUtils)
- Esperadores (AmazonDynamoDBWaiters)
- Generador de políticas de IAM (Policy)
- Prefirma de CloudFront (CloudFrontUrlSigner, CloudFrontCookieSigner)
- Notificaciones de eventos de S3 (S3EventNotification)
- Publicación de métricas de SDK (documentación de 1.x, documentación de 2.x)
- Patrones de código no compatibles: ejemplos detallados de patrones de código comunes que requieren migración manual

Patrones de código no compatibles de la herramienta de migración

La herramienta de migración convierte automáticamente la mayor parte del código de la v1 a la v2. Sin embargo, algunos patrones de código requieren migración manual. En este tema se proporcionan ejemplos detallados de los patrones no compatibles más comunes y se muestra cómo convertirlos manualmente.

Lo que sigue no es una lista de patrones exhaustiva. Si el código no se compila después de ejecutar la herramienta de migración, sigue las instrucciones de step-by-step migración para migrar manualmente el resto del código de la versión 1.

Solicitud de constructores de objetos con parámetros

A petición POJOs (excepto Amazon S3), la herramienta de migración solo transforma los métodos setter. La herramienta no admite constructores con parámetros.

Patrón compatible: solicite un objeto mediante setters (sin parámetros de constructor)

Antes (código de v1 original):

```
import com.amazonaws.services.sqs.model.SendMessageRequest;

SendMessageRequest request = new SendMessageRequest().withMessageBody("Hello World");
request.setQueueUrl("https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue");
```

Después (resultado de la herramienta de migración):

```
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;

SendMessageRequest request = SendMessageRequest.builder()
    .messageBody("Hello World").build();
request = request.toBuilder()
    .queueUrl("https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue").build();
```

Patrón no compatible: solicite un constructor de objetos con parámetros

La herramienta de migración no puede convertir constructores con parámetros:

Antes de la migración manual, pero después de la herramienta de migración:

```
import software.amazon.awssdk.services.sqs.model.SendMessageRequest; // Import updated
 to v2.
```

```
// This pattern requires manual migration.
SendMessageRequest request = new SendMessageRequest(
    "https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue",
    "Hello World");
```

La herramienta de migración transforma la importación a la v2, pero el código del constructor permanece sin cambios y requiere actualizaciones manuales para utilizar el patrón del compilador.

Después de la migración manual:

```
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;

SendMessageRequest request = SendMessageRequest.builder()
    .messageBody("Hello World")
    .queueUrl("https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue")
    .build();
```

Métodos del cliente de servicio con parámetros individuales

La herramienta de migración no puede convertir los métodos del cliente de servicio que utilizan parámetros individuales en lugar de objetos de solicitud (excepto Amazon S3).

Antes (código de v1):

```
import com.amazonaws.services.sqs.AmazonSQS;
import com.amazonaws.services.sqs.AmazonSQSClient;

AmazonSQS sqs = new AmazonSQSClient();
// The following v1 method takes individual parameters.
sqs.sendMessage("https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue", "Hello
 World");
```

Después (resultado de la herramienta de migración, no se compila):

```
import software.amazon.awssdk.services.sqs.SqsClient;  // Import updated to v2.
// No import statement for the v2 request POJO.

SqsClient sqs = SqsClient.builder().build();

// Does not compile–v2 methods only accept request POJOs.
```

```
sqs.sendMessage("https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue", "Hello
 World");
```

Debe actualizar manualmente los argumentos del método para usar un objeto de solicitud:

```
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.SendMessageRequest; // Add manually.

SqsClient sqs = SqsClient.builder().build();

// Corrected v2 code.
SendMessageRequest request = SendMessageRequest.builder()
    .queueUrl("https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue")
    .messageBody("Hello World")
    .build();
sqs.sendMessage(request);
```

Métodos de tiempo de espera de solicitud

La herramienta de migración no convierte los métodos que establecen tiempos de espera en objetos de solicitud.

Antes (código de v1):

```
import com.amazonaws.services.sqs.model.SendMessageRequest;

SendMessageRequest request = new SendMessageRequest();
request.setSdkRequestTimeout(7);
```

Después (resultado de la herramienta de migración, no se compila):

```
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;  // Import updated
 to v2.

SendMessageRequest request = SendMessageRequest.builder().build();

// Does not compile.
request.setSdkRequestTimeout(7);
```

Debe migrar manualmente para usar el método `overrideConfiguration` de la v2:

```
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;
```

```
import java.time.Duration;

SendMessageRequest request = SendMessageRequest.builder().build();

// Corrected v2 code.
request = request.toBuilder()
    .overrideConfiguration(o -> o.apiCallTimeout(Duration.ofSeconds(7)))
    .build();
```

Constructores de clientes de servicio con parámetros

La herramienta de migración convierte los constructores de clientes de servicio vacíos, pero no puede convertir los constructores que aceptan parámetros como credenciales o configuración.

Antes (código de v1):

```
import com.amazonaws.auth.AWSCredentials;
import com.amazonaws.auth.BasicAWSCredentials;
import com.amazonaws.services.sqs.AmazonSQS;
import com.amazonaws.services.sqs.AmazonSQSClient;

AWSCredentials awsCredentials = new BasicAWSCredentials("akid", "skid");
AmazonSQS sqs = new AmazonSQSClient(awsCredentials);
```

Después (resultado de la herramienta de migración, no se compila):

```
import software.amazon.awssdk.auth.credentials.AwsCredentials;
import software.amazon.awssdk.auth.credentials.AwsBasicCredentials;
import software.amazon.awssdk.services.sqs.SqsClient;  // Import updated to v2.

AwsCredentials awsCredentials = AwsBasicCredentials.create("akid", "skid");

// Does not compile.
SqsClient sqs = new SqsClient(awsCredentials);
```

Debe actualizar manualmente el constructor de clientes de servicio para utilizar el patrón del compilador:

```
import software.amazon.awssdk.auth.credentials.AwsCredentials;
import software.amazon.awssdk.auth.credentials.AwsBasicCredentials;
import software.amazon.awssdk.auth.credentials.StaticCredentialsProvider;  // Add
 manually.
```

```
import software.amazon.awssdk.services.sqs.SqsClient;

AwsCredentials awsCredentials = AwsBasicCredentials.create("akid", "skid");

// Corrected v2 code.
SqsClient sqs = SqsClient.builder()
    .credentialsProvider(StaticCredentialsProvider.create(awsCredentials))
    .build();
```

step-by-stepInstrucciones de migración con ejemplo

En esta sección se proporciona una step-by-step guía para migrar la aplicación que actualmente usa el SDK para Java v1.x al SDK para Java 2.x. La primera parte presenta una descripción general de los pasos, seguida de un ejemplo detallado de migración.

Los pasos que se describen aquí describen la migración de un caso de uso normal, en el que la aplicación llama Servicios de AWS mediante clientes de servicio basados en modelos. Si necesita migrar un código que utilice un nivel superior APIs , como S3 Transfer Manager o la CloudFrontpresignación, consulte la sección situada debajo del the section called “Diferencias entre 1.x y 2.x” índice.

El método que se describe aquí es una sugerencia. Puede utilizar otras técnicas y aprovechar las características de edición de código de su IDE para obtener el mismo resultado.

Información general sobre los pasos

1. Inicio agregando la BOM del SDK para Java 2.x

Al añadir el elemento BOM (lista de materiales) de Maven para el SDK para Java 2.x a su archivo POM, se asegura de que todas las dependencias de la v2 que necesita son de la misma versión. Su POM puede contener dependencias de v1 y v2. Esto le permite migrar el código de forma incremental en lugar de cambiarlo todo de una vez.

BOM del SDK para Java 2.x

```
<dependencyManagement>
  <dependencies>
    <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>bom</artifactId>
      <version>2.27.21</version>
```

```
      <type>pom</type>
      <scope>import</scope>
    </dependency>
  </dependencies>
</dependencyManagement>
```

Encontrará la versión más reciente en el Repositorio central de Maven.

2. Búsqueda de archivos para instrucciones de importación de la clase v1

Si escaneas los archivos de tu aplicación en busca del SERVICE_ IDs utilizado en las importaciones de la versión 1, encontrarás el único IDs SERVICE_ utilizado. Un SERVICE_ID es un nombre corto y único para un. Servicio de AWS Por ejemplo, `cognitoidentity` es el SERVICE_ID de Amazon Cognito Identity.

3. Determinación de las dependencias de Maven de la v2 a partir de las instrucciones de importación de la v1

Después de encontrar todos los SERVICE_ v1 únicosIDs, puedes determinar el artefacto de Maven correspondiente a la dependencia v2 consultando. the section called “Asignaciones de nombre del paquete a artifactId”

4. Adición de elementos de dependencia de la v2 al archivo POM

Actualice el archivo POM de Maven con los elementos de dependencia determinados en el paso 3.

5. En los archivos Java, cambio gradual de las clases de la v1 a las clases de la v2

A medida que sustituya las clases de la v1 por las de la v2, realice los cambios necesarios para que sean compatibles con la API de v2, como utilizar compiladores en lugar de constructores y utilizar fluent getters y setters.

6. Eliminación las dependencias de Maven de v1 desde el POM y las importaciones de v1 desde los archivos

Después de migrar el código para usar clases de la v2, elimine las importaciones sobrantes de la v1 de los archivos y todas las dependencias del archivo de compilación.

7. Refactorización del código para usar mejoras de la API de la v2

Una vez que el código se haya compilado correctamente y superado las pruebas, puede aprovechar las mejoras de la v2, como utilizar un cliente de HTTP diferente o paginadores para simplificar el código. Se trata de un paso opcional.

Ejemplo de migración

En este ejemplo, migramos una aplicación que usa el SDK para Java v1 y accede a varios Servicios de AWS. En el paso 5 analizaremos en detalle el siguiente método de la v1. Es un método de una clase que contiene ocho métodos y hay 32 clases en la aplicación.

Método de la v1 para migrar

Solo se enumeran las importaciones del SDK de la v1 a continuación del archivo Java.

```
import com.amazonaws.ClientConfiguration;
import com.amazonaws.regions.Region;
import com.amazonaws.regions.RegionUtils;
import com.amazonaws.services.ec2.AmazonEC2Client;
import com.amazonaws.services.ec2.model.AmazonEC2Exception;
import com.amazonaws.services.ec2.model.CreateTagsRequest;
import com.amazonaws.services.ec2.model.DescribeInstancesRequest;
import com.amazonaws.services.ec2.model.DescribeInstancesResult;
import com.amazonaws.services.ec2.model.Instance;
import com.amazonaws.services.ec2.model.InstanceStateName;
import com.amazonaws.services.ec2.model.Reservation;
import com.amazonaws.services.ec2.model.Tag;
import com.amazonaws.services.ec2.model.TerminateInstancesRequest;
...
private static List<Instance> getRunningInstances(AmazonEC2Client ec2, List<String>
 instanceIds) {
    List<Instance> runningInstances = new ArrayList<>();
    try {
        DescribeInstancesRequest request = new DescribeInstancesRequest()
                .withInstanceIds(instanceIds);
        DescribeInstancesResult result;
        do {
            // DescribeInstancesResponse is a paginated response, so use tokens with
 multiple requests.
            result = ec2.describeInstances(request);
            request.setNextToken(result.getNextToken());   // Prepare request for next
 page.
            for (final Reservation r : result.getReservations()) {
                for (final Instance instance : r.getInstances()) {
                    LOGGER.info("Examining instanceId: "+ instance.getInstanceId());
                    // if instance is in a running state, add it to runningInstances
 list.
                    if (RUNNING_STATES.contains(instance.getState().getName())) {
```

```
                        runningInstances.add(instance);
                    }
                }
            }
        } while (result.getNextToken() != null);
    } catch (final AmazonEC2Exception exception) {
        // if instance isn't found, assume its terminated and continue.
        if (exception.getErrorCode().equals(NOT_FOUND_ERROR_CODE)) {
            LOGGER.info("Instance probably terminated; moving on.");
        } else {
            throw exception;
        }
    }
    return runningInstances;
}
```

1. Adición de BOM de Maven de la v2

Agregue la BOM de Maven para el SDK para Java 2.x al POM junto con cualquier otra dependencia en la sección `dependencyManagement`. Si el archivo POM tiene la BOM de la v1 del SDK, déjela por ahora. Se eliminará en un paso posterior.

Administración de dependencias de POM al principio

```
<dependencyManagement>
  <dependencies>
    <dependency>
      <groupId>org.example</groupId>             <!--Existing dependency in POM. -->
      <artifactId>bom</artifactId>
      <version>1.3.4</version>
      <type>pom</type>
      <scope>import</scope>
    </dependency>
    ...
    <dependency>
      <groupId>com.amazonaws</groupId>
      <artifactId>aws-java-sdk-bom</artifactId>  <!--Existing v1 BOM dependency. -->
      <version>1.11.1000</version>
      <type>pom</type>
      <scope>import</scope>
    </dependency>
    ...
    <dependency>
```

```
      <groupId>software.amazon.awssdk</groupId>  <!--Add v2 BOM dependency. -->
      <artifactId>bom</artifactId>
      <version>2.27.21</version>
      <type>pom</type>
      <scope>import</scope>
    </dependency>
  </dependencies>
</dependencyManagement>
```

2. Búsqueda de archivos para instrucciones de importación de la clase v1

Busque en el código de la aplicación apariciones únicas de `import com.amazonaws.services`. Esto nos ayuda a determinar las dependencias de la v1 que utiliza el proyecto. Si su aplicación tiene un archivo POM de Maven en la que figuran dependencias de la v1, puede utilizar esta información en su lugar.

En este ejemplo, utilizamos el comando `ripgrep (rg)` para buscar en la base de código.

Desde la raíz de la base de código, ejecute el comando `ripgrep` siguiente. Una vez `ripgrep` que encuentra las sentencias de importación, se canalizan a los `uniq` comandos `cutsort`, y para aislar el SERVICE_. IDs

```
rg --no-filename 'import\s+com\.amazonaws\.services' | cut -d '.' -f 4 | sort | uniq
```

Para esta aplicación, se IDs registran los siguientes SERVICE_ en la consola.

```
autoscaling
cloudformation
ec2
identitymanagement
```

Esto indica que se ha utilizado al menos una vez cada uno de los siguientes nombres de paquetes en las instrucciones de `import`. Para nuestros propósitos, los nombres de las clases individuales no tienen importancia. Solo necesitamos encontrar los SERVICE_ IDs que se utilizan.

```
com.amazonaws.services.autoscaling.*
com.amazonaws.services.cloudformation.*
com.amazonaws.services.ec2.*
com.amazonaws.services.identitymanagement.*
```

3. Determinación de las dependencias de Maven de la v2 a partir de las instrucciones de importación de la v1

El SERVICE_ IDs de la versión 1 que hemos aislado del paso 2 (por ejemplo, `autoscaling` y) se `cloudformation` puede asignar al mismo SERVICE_ID de la versión 2 en su mayor parte. Dado que el artifactId de Maven de la v2 coincide con el SERVICE_ID en la mayoría de los casos, usted tiene la información que necesita para añadir bloques de dependencias a su archivo POM.

En la siguiente tabla se muestra cómo podemos determinar las dependencias de la v2.

SERVICE_ID de v1 se asigna a... nombre del paquete	SERVICE_ID de v2 se asigna a... nombre del paquete	Dependencia de Maven de v2

ec2
 	
`com.amazonaws.services. ec2.*`
	ec2
	
	`software.amazon.awssdk.services. ec2.*`
		`<dependency>`
		`<groupId>software.amazon.awssdk</groupId>`
		`<artifactId> ec2</artifactId>`
		`</dependency>`

escalado automático
 	
`com.amazonaws.services. autoscaling .*`
	escalado automático
	
	`software.amazon.awssdk.services. autoscaling .*`
		`<dependency>`
		`<groupId>software.amazon.awssdk</groupId>`
		`<artifactId> autoscaling </artifactId>`
		`</dependency>`

cloudformation
 	
`com.amazonaws.services. cloudformation .*`
	cloudformation
	
	`software.amazon.awssdk. cloudformation .*`
		`<dependency>`
		`<groupId>software.amazon.awssdk</groupId>`
		`<artifactId> cloudformation </artifactId>`
		`</dependency>`

SERVICE_ID de v1 se asigna a... nombre del paquete	SERVICE_ID de v2 se asigna a... nombre del paquete	Dependencia de Maven de v2

identitymanagement*
 	
`com.amazonaws.services.identitymanagement.*`
	iam*
	
	`software.amazon.awssdk.iam.*`
		`<dependency>`
		`  <groupId>software.amazon.awssdk</groupId>`
		`  <artifactId>iam</artifactId>`
		`</dependency>`

* La asignación de `identitymanagement` a `iam` es una excepción en la que el SERVICE_ID difiere según la versión. Consulte en la the section called “Asignaciones de nombre del paquete a artifactId” las excepciones si Maven o Gradle no pueden resolver la dependencia de la v2.

4. Adición de elementos de dependencia de la v2 al archivo POM

En el paso 3, hemos determinado los cuatro bloques de dependencia que deben añadirse al archivo POM. No necesitamos añadir una versión porque especificamos la BOM en el paso 1. Una vez agregadas las importaciones, nuestro archivo POM tiene los siguientes elementos de dependencia.

```
  ...
<dependencies>
  ...
  <dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>autoscaling</artifactId>
  </dependency>
  <dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>iam</artifactId>
  </dependency>
  <dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>cloudformation</artifactId>
  </dependency>
  <dependency>
    <groupId>software.amazon.awssdk</groupId>
```

```
      <artifactId>ec2</artifactId>
    </dependency>
    ...
  </dependencies>
    ...
```

5. En los archivos Java, cambio gradual de las clases de la v1 a las clases de la v2

En el método que estamos migrando, vemos

- Un cliente de servicio de EC2 de `com.amazonaws.services.ec2.AmazonEC2Client`.
- Se han utilizado varias clases de modelos de EC2. Por ejemplo, `DescribeInstancesRequest` y `DescribeInstancesResult`.

```
import com.amazonaws.ClientConfiguration;
import com.amazonaws.regions.Region;
import com.amazonaws.regions.RegionUtils;
import com.amazonaws.services.ec2.AmazonEC2Client;
import com.amazonaws.services.ec2.model.AmazonEC2Exception;
import com.amazonaws.services.ec2.model.CreateTagsRequest;
import com.amazonaws.services.ec2.model.DescribeInstancesRequest;
import com.amazonaws.services.ec2.model.DescribeInstancesResult;
import com.amazonaws.services.ec2.model.Instance;
import com.amazonaws.services.ec2.model.InstanceStateName;
import com.amazonaws.services.ec2.model.Reservation;
import com.amazonaws.services.ec2.model.Tag;
import com.amazonaws.services.ec2.model.TerminateInstancesRequest;
...
private static List<Instance> getRunningInstances(AmazonEC2Client ec2, List<String>
 instanceIds)
    List<Instance> runningInstances = new ArrayList<>();
    try {
        DescribeInstancesRequest request = new DescribeInstancesRequest()
                .withInstanceIds(instanceIds);
        DescribeInstancesResult result;
        do {
            // DescribeInstancesResponse is a paginated response, so use tokens with
 multiple re
            result = ec2.describeInstances(request);
            request.setNextToken(result.getNextToken());   // Prepare request for next
 page.
            for (final Reservation r : result.getReservations()) {
```

```
                for (final Instance instance : r.getInstances()) {
                    LOGGER.info("Examining instanceId: "+ instance.getInstanceId());
                    // if instance is in a running state, add it to runningInstances
 list.
                    if (RUNNING_STATES.contains(instance.getState().getName())) {
                        runningInstances.add(instance);
                    }
                }
            }
        } while (result.getNextToken() != null);
    } catch (final AmazonEC2Exception exception) {
        // if instance isn't found, assume its terminated and continue.
        if (exception.getErrorCode().equals(NOT_FOUND_ERROR_CODE)) {
            LOGGER.info("Instance probably terminated; moving on.");
        } else {
            throw exception;
        }
    }
    return runningInstances;
}
...
```

Nuestro objetivo es sustituir todas las importaciones de la v1 por las de la v2. Procedemos clase por clase.

a. Reemplace la instrucción de importación o el nombre de clase

Vemos que el primer parámetro del método `describeRunningInstances` es una instancia de `AmazonEC2Client` v1. Realice una de las siguientes acciones:

- Sustituya la importación de `com.amazonaws.services.ec2.AmazonEC2Client` con `software.amazon.awssdk.services.ec2.Ec2Client` y cambie `AmazonEC2Client` a `Ec2Client`.
- Cambie el tipo de parámetro a `Ec2Client` y deje que el IDE nos pida la importación correcta. Nuestro IDE nos pedirá que importemos la clase v2 porque los nombres de cliente son diferentes: `AmazonEC2Client` y `Ec2Client`. Este método no funciona si el nombre de clase es el mismo en ambas versiones.

b. Reemplazo de las clases del modelo de v1 por equivalentes de v2

Tras el cambio a `Ec2Client` v2, si utilizamos un IDE, aparecen errores de compilación en la siguiente instrucción.

```
result = ec2.describeInstances(request);
```

El error de compilación se debe al uso de una instancia de `DescribeInstancesRequest` de la v1 como parámetro del método `Ec2Client` `describeInstances` de la v2. Para corregirlo, aplique las siguientes instrucciones de sustitución o importación.

replace	por
`import com.amazonaws.services.ec2.model.DescribeInstancesRequest`	`import software.amazon.awssdk.services.ec2.model.DescribeInstancesRequest`

c. Cambie los constructores de v1 por constructores de v2.

Siguen apareciendo errores de compilación porque no hay constructores en clases de la v2. Para corregirlo, realice el siguiente cambio.

cambiar	a

`final DescribeInstancesRequest request = new DescribeInstancesRequest()`
`.withInstanceIds(instanceIdsCopy);`
	`final DescribeInstancesRequest request = DescribeInstancesRequest.builder()`
	`.instanceIds(instanceIdsCopy)`
	`.build();`

d. Reemplace los objetos de respuesta de **`*Result`** de v1 con los equivalentes de **`*Response`** de v2

Una diferencia constante entre v1 y v2 es que todos los objetos de respuesta de v2 terminan en `*Response` en lugar de `*Result`. Reemplace la importación de `DescribeInstancesResult` de v1 por la importación de v2, `DescribeInstancesResponse`.

d. Realización de cambios en la API

La siguiente instrucción necesita algunos cambios.

```
request.setNextToken(result.getNextToken());
```

En la v2, los métodos setter no utilizan `set` o `prefix`. Los métodos Getter con prefijo con `get` también han desaparecido del SDK para Java 2.x

Las clases de modelos, como la instancia de `request`, son inmutables en la v2, por lo que debemos crear una `DescribeInstancesRequest` nueva con un compilador.

En la v2, la instrucción pasa a ser la siguiente.

```
request = DescribeInstancesRequest.builder()
        .nextToken(result.nextToken())
        .build();
```

d. Repita hasta que el método se compile con clases de la v2

Continúe con el resto del código. Sustituya las importaciones de la v1 por las de la v2 y corrija los errores de compilación. Consulte la Referencia de la API de la v2 y la Referencia de diferencias si es necesario.

Después de migrar este método individual, tendremos el siguiente código de la v2.

```
import com.amazonaws.ClientConfiguration;
import com.amazonaws.regions.Region;
import com.amazonaws.regions.RegionUtils;
import com.amazonaws.services.ec2.AmazonEC2Client;
import com.amazonaws.services.ec2.model.AmazonEC2Exception;
import com.amazonaws.services.ec2.model.CreateTagsRequest;
import com.amazonaws.services.ec2.model.InstanceStateName;
import com.amazonaws.services.ec2.model.Tag;
import com.amazonaws.services.ec2.model.TerminateInstancesRequest;

import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesRequest;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesResponse;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.Instance;
import software.amazon.awssdk.services.ec2.model.Reservation;
...
```

```
private static List<Instance> getRunningInstances(Ec2Client ec2, List<String>
 instanceIds) {
    List<Instance> runningInstances = new ArrayList<>();
        try {
            DescribeInstancesRequest request = DescribeInstancesRequest.builder()
                    .instanceIds(instanceIds)
                    .build();
            DescribeInstancesResponse result;
            do {
                // DescribeInstancesResponse is a paginated response, so use tokens
 with multiple re
                result = ec2.describeInstances(request);
                request = DescribeInstancesRequest.builder()   // Prepare request for
 next page.
                        .nextToken(result.nextToken())
                        .build();
                for (final Reservation r : result.reservations()) {
                    for (final Instance instance : r.instances()) {
                        // if instance is in a running state, add it to
 runningInstances list.
                        if (RUNNING_STATES.contains(instance.state().nameAsString())) {
                            runningInstances.add(instance);
                        }
                    }
                }
            } while (result.nextToken() != null);
        } catch (final Ec2Exception exception) {
            // if instance isn't found, assume its terminated and continue.
            if (exception.awsErrorDetails().errorCode().equals(NOT_FOUND_ERROR_CODE)) {
                    LOGGER.info("Instance probably terminated; moving on.");
            } else {
                throw exception;
            }
        }
        return runningInstances;
    }
...
```

Dado que estamos migrando un único método en un archivo Java con ocho métodos, tenemos una combinación de importaciones de la v1 y v2 a medida que avanzamos en el archivo. Hemos añadido las seis últimas instrucciones de importación a medida que dábamos los pasos.

Después de migrar todo el código, no habrá más instrucciones de importación de v1.

6. Eliminación las dependencias de Maven de v1 desde el POM y las importaciones de v1 desde los archivos

Tras migrar todo el código de la v1 del archivo, tenemos las siguientes instrucciones de importación del SDK de la v2.

```
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.regions.ServiceMetadata;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.CreateTagsRequest;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesRequest;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesResponse;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.Instance;
import software.amazon.awssdk.services.ec2.model.InstanceStateName;
import software.amazon.awssdk.services.ec2.model.Reservation;
import software.amazon.awssdk.services.ec2.model.Tag;
import software.amazon.awssdk.services.ec2.model.TerminateInstancesRequest;
```

Después de migrar todos los archivos de nuestra aplicación, ya no necesitamos las dependencias de la v1 en nuestro archivo POM. Elimine la BOM de la v1 de la sección `dependencyManagement`, si la está utilizando, y todos los bloques de dependencias de la v1.

7. Refactorización del código para usar mejoras de la API de la v2

Para el fragmento de código que hemos estado migrando, podemos usar opcionalmente un paginador de v2 y dejar que el SDK administre las solicitudes de datos adicionales basadas en tokens.

Podemos sustituir toda la cláusula do por lo siguiente.

```
               DescribeInstancesIterable responses =
ec2.describeInstancesPaginator(request);

               responses.reservations().stream()
                       .forEach(reservation -> reservation.instances()
                               .forEach(instance -> {
                                   if
(RUNNING_STATES.contains(instance.state().nameAsString())) {
                                       runningInstances.put(instance.instanceId(),
instance);
```

```
                                    }
                                }));
```

Asignaciones de nombre del paquete a artifactId de Maven

Al migrar el proyecto de Maven o Gradle de la v1 del SDK para Java a la v2, debe determinar qué dependencias desea añadir al archivo de compilación. El método descrito en los the section called “Step-by-step instrucciones” (paso 3) utiliza los nombres de paquetes de las instrucciones de importación como punto de partida para determinar las dependencias (como artifactId) que se van a añadir al archivo de compilación.

Puede usar la información de este tema para asignar los nombres de paquetes de la v1 a los artifactId de la v2.

Convención de nomenclatura común utilizada en nombres de paquetes y artifactId de Maven

La siguiente tabla muestra la convención de nomenclatura común que se SDKs utiliza para un SERVICE_ID determinado. Un SERVICE_ID es un identificador único para un. Servicio de AWS Por ejemplo, el SERVICE_ID del servicio de Amazon S3 es `s3` y `cognitoidentity` es el SERVICE_ID de Amazon Cognito Identity.

Nombre del paquete v1 (instrucción de importación)	artifactId v1	artifactId v2	nombre del paquete v2 (instrucción de importación)
com.amazonaws.services.SERVICE_ID	aws-java-sdk-SERVICE_ID	SERVICE_ID	software.amazon.awssdk.services.SERVICE_ID
Ejemplo de Amazon Cognito Identity (SERVICE_ID: ***`cognitoidentity`***)			
com.amazonaws.services.cognitoidentity	aws-java-sdk-identidad cognitiva	cognitoidentity	software.amazon.awssdk.services.cognitoidentity

Diferencias de SERVICE_ID

En v1

En algunos casos, el SERVICE_ID presenta diferencias entre el nombre del paquete y el artifactId del mismo servicio. Por ejemplo, la fila de CloudWatch métricas de la siguiente tabla muestra que `metrics` es el SERVICE_ID del nombre del paquete, pero `cloudwatchmetrics` es el SERVICE_ID del ArtifactID.

En v2

No hay diferencias en el SERVICE_ID utilizado en los nombres de paquetes y artifactId.

Entre v1 y v2.

En la mayoría de los servicios, el SERVICE_ID de la v2 es el mismo que el SERVICE_ID de la v1, tanto en los nombres de paquetes como en los artifactId. Un ejemplo de esto es el SERVICE_ID `cognitoedentity` que se muestra en la tabla anterior. Sin embargo, algunos SERVICE_ IDs difieren entre sí, como se muestra en la siguiente tabla. SDKs

Un SERVICE_ID en negrita en las columnas de la v1 indica que es diferente del SERVICE_ID utilizado en la v2.

Nombre del servicio	Nombre del paquete v1	artifactId v1	artifactId v2	Nombre del paquete v2
	Todos los nombres de paquetes comienzan por `com.amazonaws.services` , como se muestra en la primera fila.	Todos los artifactId aparecen entre etiquetas, como se muestra en la primera fila.	Todos los artifactId aparecen entre etiquetas, como se muestra en la primera fila.	Todos los nombres de paquetes comienzan por `software.amazon.awssdk` , como se muestra en la primera fila.
API Gateway	com.amazonaws.services.apigateway	<artifactId>aws-java-sdk- puerta	<artifactId>apigateway</artifactId>	software.amazon.aw

Nombre del servicio	Nombre del paquete v1	artifactId v1	artifactId v2	Nombre del paquete v2
		de enlace api</ artifactId>		ssdk.serv ices.apigateway
App Registry	appregistry	appregistry	serviceca talogappregistry	serviceca talogappregistry
Application Discovery	applicati ondiscovery	discovery	applicati ondiscovery	applicati ondiscovery
Augmented AI Runtime	augmented airuntime	augmented airuntime	sagemaker a2iruntime	sagemaker a2iruntime
Certificate Manager	certifica temanager	acm	acm	acm
CloudControl API	cloudcontrolapi	cloudcontrolapi	cloudcontrol	cloudcontrol
CloudSearch	cloudsearchv2	cloudsearch	cloudsearch	cloudsearch
CloudSearch Dominio	cloudsear chdomain	cloudsearch	cloudsear chdomain	cloudsear chdomain
CloudWatch Eventos	cloudwatc hevents	eventos	cloudwatc hevents	cloudwatc hevents
CloudWatch Evidentemente	cloudwatc hevidently	cloudwatc hevidently	evidently	evidently
CloudWatch Registros	logs	logs	cloudwatchlogs	cloudwatchlogs
CloudWatch Métricas	métricas	cloudwatc hmetrics	cloudwatch	cloudwatch
CloudWatch Ron	cloudwatchrum	cloudwatchrum	rum	rum

Nombre del servicio	Nombre del paquete v1	artifactId v1	artifactId v2	Nombre del paquete v2
Amazon Cognito Identity Provider	cognitoide	cognitoide	cognitoid entityprovider	cognitoid entityprovider
Connect Campaign	connectca mpaign	connectca mpaign	connectca mpaigns	connectca mpaigns
Connect Wisdom	connectwisdom	connectwisdom	wisdom	wisdom
Database Migration Service	databasem igrationservice	dms	databasem igration	databasem igration
DataZone	datazone	datazoneexternal	datazone	datazone
DynamoDB	dynamodbv2	dynamodb	dynamodb	dynamodb
Elastic File System	sistema de archivos elástico	efs	efs	efs
Elastic Map Reduce	elasticma preduce	emr	emr	emr
Glue DataBrew	gluedatabrew	gluedatabrew	databrew	databrew
IAM Roles Anywhere	iamrolesa nywhere	iamrolesa nywhere	rolesanywhere	rolesanywhere
Administración de identidades	identitym anagement	iam	iam	iam
IoT Data	iotdata	iot	iotdataplane	iotdataplane
Kinesis Analytics	kinesisanalytics	kinesis	kinesisanalytics	kinesisanalytics
Kinesis Firehose	kinesisfirehose	kinesis	firehose	firehose

Nombre del servicio	Nombre del paquete v1	artifactId v1	artifactId v2	Nombre del paquete v2
Kinesis Video Signaling Channels	kinesisvi deosignal ingchannels	kinesisvi deosignal ingchannels	kinesisvi deosignaling	kinesisvi deosignaling
Lex	lexruntime	Álex	lexruntime	lexruntime
Lookout For Vision	lookoutforvision	lookoutforvision	lookoutvision	lookoutvision
Modernización de la unidad central	mainframe modernization	mainframe modernization	m2	m2
Marketplace Metering	marketpla cemetering	marketpla cemeterin gservice	marketpla cemetering	marketpla cemetering
Managed Grafana	managedgrafana	managedgrafana	grafana	grafana
Mechanical Turk	mturk	mechanica lturkrequester	mturk	mturk
Recomenda ciones de estrategias de Migration Hub	migration hubstrate gyrecomme ndations	migration hubstrate gyrecomme ndations	migration hubstrategy	migration hubstrategy
Nimble Studio	nimblestudio	nimblestudio	nimble	nimble
Private 5G	private5g	private5g	redes privadas	redes privadas
Prometheus	prometheus	prometheus	amp	amp
Papelera de reciclaje	recyclebin	recyclebin	rbin	rbin

Nombre del servicio	Nombre del paquete v1	artifactId v1	artifactId v2	Nombre del paquete v2
API de datos de Redshift	redshiftdataapi	redshiftdataapi	redshiftdata	redshiftdata
Route 53	route53domains	route53	route53domains	route53domains
Sage Maker Edge Manager	sagemaker edgemanager	sagemaker edgemanager	sagemakeredge	sagemakeredge
Security Token	securitytoken	sts	sts	sts
Server Migration	servermigration	servermigration	sms	sms
Simple Email	simpleemail	ses	ses	ses
Simple Email V2	simpleemailv2	sesv2	sesv2	sesv2
Simple Systems Management	simplesys temsmanag ement	ssm	ssm	ssm
Simple Workflow	simpleworkflow	simpleworkflow	swf	swf
Step Functions	stepfunctions	stepfunctions	sfn	sfn

Qué diferencia hay entre la AWS SDK para Java 1.x y la 2.x

En esta sección se describen los principales cambios que hay que tener en cuenta al convertir una aplicación de la AWS SDK para Java versión 1.x a la versión 2.x.

Cambio de nombre de paquete

Un cambio notable del SDK para Java 1.x al SDK para Java 2.x es el cambio de nombre del paquete. Los nombres de los paquetes comienzan por `software.amazon.awssdk` en el SDK 2.x, mientras que en el SDK 1.x se usa `com.amazonaws`.

Estos mismos nombres diferencian los artefactos de Maven del SDK 1.x del SDK 2.x. Los artefactos de Maven para el SDK 2.x usan el GroupID `software.amazon.awssdk`, mientras que el SDK 1.x usa el GroupID `com.amazonaws`.

Hay ocasiones en las que el código requiere una dependencia `com.amazonaws` para un proyecto que, de otro modo, solo utilizaría artefactos del SDK 2.x. Un ejemplo de ello es cuando trabajas con AWS Lambda del lado del servidor. Esto se mostró anteriormente en la sección Configurar un proyecto de Apache Maven en esta guía.

> **Note**
>
> Varios nombres de paquetes en el SDK 1.x contienen `v2`. El uso de `v2` en este caso suele significar que el código del paquete está orientado a funcionar con la versión 2 del servicio. Como el nombre completo del paquete comienza por `com.amazonaws`, se trata de componentes del SDK 1.x. Algunos ejemplos de estos nombres de paquetes en el SDK 1.x son:
>
> - `com.amazonaws.services.dynamodbv2`
> - `com.amazonaws.retry.v2`
> - `com.amazonaws.services.apigatewayv2`
> - `com.amazonaws.services.simpleemailv2`

Adición de la versión 2.x a su proyecto

Maven es la forma recomendada de gestionar las dependencias cuando se utiliza la 2.x. AWS SDK para Java Para añadir componentes de la versión 2.x a su proyecto, actualice el archivo `pom.xml` con una dependencia en el SDK.

Example

```
<dependencyManagement>
    <dependencies>
        <dependency>
          <groupId>software.amazon.awssdk</groupId>
          <artifactId>bom</artifactId>
          <version>2.27.21</version>
          <type>pom</type>
```

```
          <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>

<dependencies>
    <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>dynamodb</artifactId>
    </dependency>
</dependencies>
```

También puedes usar las versiones 1.x y 2.x al migrar tu proyecto a la versión 2.x side-by-side.

Inmutable POJOs

Los objetos de respuesta y solicitud de operación y clientes son ahora inmutables y no se pueden cambiar tras la creación. Para reutilizar una variable de respuesta o solicitud, debe crear un objeto nuevo para asignarlo a la misma.

Example de actualización de un objeto de solicitud en 1.x

```
DescribeAlarmsRequest request = new DescribeAlarmsRequest();
DescribeAlarmsResult response = cw.describeAlarms(request);

request.setNextToken(response.getNextToken());
```

Example de actualización de un objeto de solicitud en 2.x

```
DescribeAlarmsRequest request = DescribeAlarmsRequest.builder().build();
DescribeAlarmsResponse response = cw.describeAlarms(request);

request = DescribeAlarmsRequest.builder()
        .nextToken(response.nextToken())
        .build();
```

Métodos setter y getter

En la versión AWS SDK para Java 2.x, los nombres de los métodos setter no incluyen el prefijo or. `set` `with` Por ejemplo, `*.withEndpoint()` es ahora `*.endpoint()`.

Los nombres de los métodos getter no añaden el prefijo `get`.

Example de utilizar métodos setter en 1.x

```
AmazonDynamoDB client = AmazonDynamoDBClientBuilder.standard()
          .withRegion("us-east-1")
          .build();
```

Example de utilizar métodos setter en 2.x

```
DynamoDbClient client = DynamoDbClient.builder()
          .region(Region.US_EAST_1)
          .build();
```

Example de utilizar métodos getter en 1.x

```
String token = request.getNextToken();
```

Example de utilizar métodos getter en 2.x

```
String token = request.nextToken();
```

Nombres de clases de modelo

Los nombres de clases de modelo que representan respuestas de servicio terminan en `Response` en v2, en lugar de `Result` como en v1.

Example de nombres de clases que representan una respuesta en v1

```
CreateApiKeyResult
AllocateAddressResult
```

Example de nombres de clases que representan una respuesta en v2

```
CreateApiKeyResponse
AllocateAddressResponse
```

Estado migratorio de bibliotecas y utilidades

Bibliotecas y utilidades del SDK para Java

En la siguiente tabla, se muestra el estado de migración de bibliotecas y utilidades del SDK para Java.

Nombre de la versión 1.12.x	Nombre de la versión 2.x	A partir de la versión 2.x
Dinamo DBMapper	DynamoDbEnhancedClient	2.12.0
Esperadores	Esperadores	2.15.0
CloudFrontUrlSigner, CloudFrontCookieSigner	CloudFrontUtilities	2.18.33
TransferManager	S3TransferManager	2.19.0
Cliente de metadatos EC2	Cliente de metadatos de EC2	2.19,29
Analizador de URI S3	Analizador de URI S3	2.20,41
Creador de políticas de IAM	Creador de políticas de IAM	2.20.126
Notificaciones de eventos de S3	Notificaciones de eventos de S3	2.25.11
Almacenamiento en búfer del cliente Amazon SQS	API de procesamiento automático de solicitudes por lotes para Amazon SQS	2.28.0
Agentes de escucha de progreso	Agentes de escucha de progreso	no publicado aún

Bibliotecas relacionadas

En la tabla siguiente se enumeran las bibliotecas que se publican por separado pero que funcionan con el SDK para Java 2.x.

Nombre utilizado en la versión 2.x del SDK para Java	Desde la versión
Cliente de cifrado de Amazon S3	3.0,0 1
AWS SDK de cifrado de bases de datos para DynamoDB	3.0.0 2

[1]Cliente de cifrado de Amazon S3

El cliente de cifrado de Amazon S3 está disponible mediante la siguiente dependencia de Maven.

```
<dependency>
    <groupId>software.amazon.encryption.s3</groupId>
    <artifactId>amazon-s3-encryption-client-java</artifactId>
    <version>3.x</version>
</dependency>
```

[2] SDK AWS de cifrado de bases de datos para DynamoDB

El SDK AWS de cifrado de bases de datos para DynamoDB está disponible para la versión 2 mediante la siguiente dependencia de Maven.

```
<dependency>
    <groupId>software.amazon.cryptography</groupId>
    <artifactId>aws-database-encryption-sdk-dynamodb</artifactId>
    <version>3.x</version>
</dependency>
```

La información sobre la biblioteca de cifrado de DynamoDB que funciona con la versión 1 del SDK de Java está disponible en la Guía para desarrolladores AWS del SDK de cifrado de bases de datos (denominada Amazon DynamoDB Encryption Client for Java) y en. GitHub

Para obtener más información sobre la biblioteca de cifrado de DynamoDB que es compatible con la versión 2 del SDK de Java, consulte la Guía para desarrolladores del SDK de cifrado de bases de datos y AWS la fuente. GitHub

La información de migración sobre la biblioteca de cifrado está disponible en la Guía para desarrolladores del SDK de cifrado de bases de datos de AWS.

Detalles de migración para bibliotecas y utilidades

- Gestor de transferencias
- Utilidad de metadatos EC2
- CloudFrontprefirmando
- Análisis de URI de S3
- DynamoDB mapping/document APIs
- Creador de políticas de IAM
- Notificaciones de eventos de S3
- Publicación de métricas de SDK (documentación de 1.x, documentación de 2.x)

Cambios de cliente

Compiladores de clientes

Debe crear todos los clientes mediante el método del compilador de clientes. Los constructores ya no están disponibles.

Example de creación de un cliente en la versión 1.x

```
AmazonDynamoDB ddbClient = AmazonDynamoDBClientBuilder.defaultClient();
AmazonDynamoDBClient ddbClient = new AmazonDynamoDBClient();
```

Example de creación de un cliente en la versión 2.x

```
DynamoDbClient ddbClient = DynamoDbClient.create();
DynamoDbClient ddbClient = DynamoDbClient.builder().build();
```

Nombres de clase de cliente

Ahora todos los nombres de las clases de los clientes se escriben con mayúsculas y minúsculas y ya no llevan el prefijo `Amazon`. Estos cambios concuerdan con los nombres utilizados en la AWS CLI.

Example de nombres de clase en 1.x

```
AmazonDynamoDB
AWSACMPCAAsyncClient
```

Example de nombres de clase en 2.x

```
DynamoDbClient
AcmAsyncClient
```

Cambios en el nombre de clases de cliente

Cliente 1.x	Cliente 2.x
com.amazonaws.services.acmpca.AWSACMPCAAsyncClient	software.amazon.awssdk.services.acm.AcmAsyncClient
com.amazonaws.services.acmpca.AWSACMPCAClient	software.amazon.awssdk.services.acm.AcmClient
com.amazonaws.services.alexaforbusiness.AmazonAlexaForBusinessAsyncClient	software.amazon.awssdk.services.alexaforbusiness.AlexaForBusinessAsyncClient
com.amazonaws.services.alexaforbusiness.AmazonAlexaForBusinessClient	software.amazon.awssdk.services.alexaforbusiness.AlexaForBusinessClient
com.amazonaws.services.apigateway.AmazonApiGatewayAsyncClient	software.amazon.awssdk.services.apigateway.ApiGatewayAsyncClient
com.amazonaws.services.apigateway.AmazonApiGatewayClient	software.amazon.awssdk.services.apigateway.ApiGatewayClient
com.amazonaws.services.applicationautoscaling.AWSApplicationAutoScalingAsyncClient	software.amazon.awssdk.services.applicationautoscaling.ApplicationAutoScalingAsyncClient
com.amazonaws.services.applicationautoscaling.AWSApplicationAutoScalingClient	software.amazon.awssdk.services.applicationautoscaling.ApplicationAutoScalingClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.applicationdiscovery.AWSApplicationDiscoveryAsyncClient	software.amazon.awssdk.services.applicationdiscovery.ApplicationDiscoveryAsyncClient
com.amazonaws.services.applicationdiscovery.AWSApplicationDiscoveryClient	software.amazon.awssdk.services.applicationdiscovery.ApplicationDiscoveryClient
com.amazonaws.services.appstream.AmazonAppStreamAsyncClient	software.amazon.awssdk.services.appstream.AppStreamAsyncClient
com.amazonaws.services.appstream.AmazonAppStreamClient	software.amazon.awssdk.services.appstream.AppStreamClient
com.amazonaws.services.appsync.AWSAppSyncAsyncClient	software.amazon.awssdk.services.appsync.AppSyncAsyncClient
com.amazonaws.services.appsync.AWSAppSyncClient	software.amazon.awssdk.services.appsync.AppSyncClient
com.amazonaws.services.athena.AmazonAthenaAsyncClient	software.amazon.awssdk.services.athena.AthenaAsyncClient
com.amazonaws.services.athena.AmazonAthenaClient	software.amazon.awssdk.services.athena.AthenaClient
com.amazonaws.services.autoscaling.AmazonAutoScalingAsyncClient	software.amazon.awssdk.services.autoscaling.AutoScalingAsyncClient
com.amazonaws.services.autoscaling.AmazonAutoScalingClient	software.amazon.awssdk.services.autoscaling.AutoScalingClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.autoscalingplans.AWSAutoScalingPlansAsyncClient	software.amazon.awssdk.services.autoscalingplans.AutoScalingPlansAsyncClient
com.amazonaws.services.autoscalingplans.AWSAutoScalingPlansClient	software.amazon.awssdk.services.autoscalingplans.AutoScalingPlansClient
com.amazonaws.services.batch.AWSBatchAsyncClient	software.amazon.awssdk.services.batch.BatchAsyncClient
com.amazonaws.services.batch.AWSBatchClient	software.amazon.awssdk.services.batch.BatchClient
com.amazonaws.services.budgets.AWSBudgetsAsyncClient	software.amazon.awssdk.services.budgets.BudgetsAsyncClient
com.amazonaws.services.budgets.AWSBudgetsClient	software.amazon.awssdk.services.budgets.BudgetsClient
com.amazonaws.services.certificatemanager.AWSCertificateManagerAsyncClient	software.amazon.awssdk.services.acm.AcmAsyncClient
com.amazonaws.services.certificatemanager.AWSCertificateManagerClient	software.amazon.awssdk.services.acm.AcmClient
com.amazonaws.services.cloud9.AWSCloud9AsyncClient	software.amazon.awssdk.services.cloud9.Cloud9AsyncClient
com.amazonaws.services.cloud9.AWSCloud9Client	software.amazon.awssdk.services.cloud9.Cloud9Client
com.amazonaws.services.clouddirectory.AmazonCloudDirectoryAsyncClient	software.amazon.awssdk.services.clouddirectory.CloudDirectoryAsyncClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.clouddirectory.AmazonCloudDirectoryClient	software.amazon.awssdk.services.clouddirectory.CloudDirectoryClient
com.amazonaws.services.cloudformation.AmazonCloudFormationAsyncClient	software.amazon.awssdk.services.cloudformation.CloudFormationAsyncClient
com.amazonaws.services.cloudformation.AmazonCloudFormationClient	software.amazon.awssdk.services.cloudformation.CloudFormationClient
com.amazonaws.services.cloudfront.AmazonCloudFrontAsyncClient	software.amazon.awssdk.services.cloudfront.CloudFrontAsyncClient
com.amazonaws.services.cloudfront.AmazonCloudFrontClient	software.amazon.awssdk.services.cloudfront.CloudFrontClient
com.amazonaws.services.cloudhsm.AWSCloudHSMAsyncClient	software.amazon.awssdk.services.cloudhsm.CloudHsmAsyncClient
com.amazonaws.services.cloudhsm.AWSCloudHSMClient	software.amazon.awssdk.services.cloudhsm.CloudHsmClient
com.amazonaws.services.cloudhsmv2.AWSCloudHSMV2AsyncClient	software.amazon.awssdk.services.cloudhsmv2.CloudHsmV2AsyncClient
com.amazonaws.services.cloudhsmv2.AWSCloudHSMV2Client	software.amazon.awssdk.services.cloudhsmv2.CloudHsmV2Client

Cliente 1.x	Cliente 2.x
com.amazonaws.services.cloudsearchdomain.AmazonCloudSearchDomainAsyncClient	software.amazon.awssdk.services.cloudsearchdomain.CloudSearchDomainAsyncClient
com.amazonaws.services.cloudsearchdomain.AmazonCloudSearchDomainClient	software.amazon.awssdk.services.cloudsearchdomain.CloudSearchDomainClient
com.amazonaws.services.cloudsearchv2.AmazonCloudSearchAsyncClient	software.amazon.awssdk.services.cloudsearch.CloudSearchAsyncClient
com.amazonaws.services.cloudsearchv2.AmazonCloudSearchClient	software.amazon.awssdk.services.cloudsearch.CloudSearchClient
com.amazonaws.services.cloudtrail.AWSCloudTrailAsyncClient	software.amazon.awssdk.services.cloudtrail.CloudTrailAsyncClient
com.amazonaws.services.cloudtrail.AWSCloudTrailClient	software.amazon.awssdk.services.cloudtrail.CloudTrailClient
com.amazonaws.services.cloudwatch.AmazonCloudWatchAsyncClient	software.amazon.awssdk.services.cloudwatch.CloudWatchAsyncClient
com.amazonaws.services.cloudwatch.AmazonCloudWatchClient	software.amazon.awssdk.services.cloudwatch.CloudWatchClient
com.amazonaws.services.cloudwatchevents.AmazonCloudWatchEventsAsyncClient	software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsAsyncClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.cloudwatchevents.AmazonCloudWatchEventsClient	software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient
com.amazonaws.services.codebuild.AWSCodeBuildAsyncClient	software.amazon.awssdk.services.codebuild.CodeBuildAsyncClient
com.amazonaws.services.codebuild.AWSCodeBuildClient	software.amazon.awssdk.services.codebuild.CodeBuildClient
com.amazonaws.services.codecommit.AWSCodeCommitAsyncClient	software.amazon.awssdk.services.codecommit.CodeCommitAsyncClient
com.amazonaws.services.codecommit.AWSCodeCommitClient	software.amazon.awssdk.services.codecommit.CodeCommitClient
com.amazonaws.services.codedeploy.AmazonCodeDeployAsyncClient	software.amazon.awssdk.services.codedeploy.CodeDeployAsyncClient
com.amazonaws.services.codedeploy.AmazonCodeDeployClient	software.amazon.awssdk.services.codedeploy.CodeDeployClient
com.amazonaws.services.codepipeline.AWSCodePipelineAsyncClient	software.amazon.awssdk.services.codepipeline.CodePipelineAsyncClient
com.amazonaws.services.codepipeline.AWSCodePipelineClient	software.amazon.awssdk.services.codepipeline.CodePipelineClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.codestar.AWSCodeStarAsyncClient	software.amazon.awssdk.services.codestar.CodeStarAsyncClient
com.amazonaws.services.codestar.AWSCodeStarClient	software.amazon.awssdk.services.codestar.CodeStarClient
com.amazonaws.services.cognitoidentity.AmazonCognitoIdentityAsyncClient	software.amazon.awssdk.services.cognitoidentity.CognitoIdentityAsyncClient
com.amazonaws.services.cognitoidentity.AmazonCognitoIdentityClient	software.amazon.awssdk.services.cognitoidentity.CognitoIdentityClient
com.amazonaws.services.cognitoidp.AWSCognitoIdentityProviderAsyncClient	software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderAsyncClient
com.amazonaws.services.cognitoidp.AWSCognitoIdentityProviderClient	software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient
com.amazonaws.services.cognitosync.AmazonCognitoSyncAsyncClient	software.amazon.awssdk.services.cognitosync.CognitoSyncAsyncClient
com.amazonaws.services.cognitosync.AmazonCognitoSyncClient	software.amazon.awssdk.services.cognitosync.CognitoSyncClient
com.amazonaws.services.comprehend.AmazonComprehendAsyncClient	software.amazon.awssdk.services.comprehend.ComprehendAsyncClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.comprehend.AmazonComprehendClient	software.amazon.awssdk.services.comprehend.ComprehendClient
com.amazonaws.services.config.AmazonConfigAsyncClient	software.amazon.awssdk.services.config.ConfigAsyncClient
com.amazonaws.services.config.AmazonConfigClient	software.amazon.awssdk.services.config.ConfigClient
com.amazonaws.services.connect.AmazonConnectAsyncClient	software.amazon.awssdk.services.connect.ConnectAsyncClient
com.amazonaws.services.connect.AmazonConnectClient	software.amazon.awssdk.services.connect.ConnectClient
com.amazonaws.services.costandusagereport.AWSCostAndUsageReportAsyncClient	software.amazon.awssdk.services.costandusagereport.CostAndUsageReportAsyncClient
com.amazonaws.services.costandusagereport.AWSCostAndUsageReportClient	software.amazon.awssdk.services.costandusagereport.CostAndUsageReportClient
com.amazonaws.services.costexplorer.AWSCostExplorerAsyncClient	software.amazon.awssdk.services.costexplorer.CostExplorerAsyncClient
com.amazonaws.services.costexplorer.AWSCostExplorerClient	software.amazon.awssdk.services.costexplorer.CostExplorerClient
com.amazonaws.services.databasemigrationservice.AWSDatabaseMigrationServiceAsyncClient	software.amazon.awssdk.services.databasemigration.DatabaseMigrationAsyncClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.databasemigrationservice.AWSDatabaseMigrationServiceClient	software.amazon.awssdk.services.databasemigration.DatabaseMigrationClient
com.amazonaws.services.datapipeline.DataPipelineAsyncClient	software.amazon.awssdk.services.datapipeline.DataPipelineAsyncClient
com.amazonaws.services.datapipeline.DataPipelineClient	software.amazon.awssdk.services.datapipeline.DataPipelineAsyncClient
com.amazonaws.services.dax.AmazonDaxAsyncClient	software.amazon.awssdk.services.dax.DaxAsyncClient
com.amazonaws.services.dax.AmazonDaxClient	software.amazon.awssdk.services.dax.DaxClient
com.amazonaws.services.devicefarm.AWSDeviceFarmAsyncClient	software.amazon.awssdk.services.devicefarm.DeviceFarmAsyncClient
com.amazonaws.services.devicefarm.AWSDeviceFarmClient	software.amazon.awssdk.services.devicefarm.DeviceFarmClient
com.amazonaws.services.directconnect.AmazonDirectConnectAsyncClient	software.amazon.awssdk.services.directconnect.DirectConnectAsyncClient
com.amazonaws.services.directconnect.AmazonDirectConnectClient	software.amazon.awssdk.services.directconnect.DirectConnectClient
com.amazonaws.services.directory.AWSDirectoryServiceAsyncClient	software.amazon.awssdk.services.directory.DirectoryAsyncClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.directory.AWSDirectoryServiceClient	software.amazon.awssdk.services.directory.DirectoryClient
com.amazonaws.services.dlm.AmazonDLMAsyncClient	software.amazon.awssdk.services.dlm.DlmAsyncClient
com.amazonaws.services.dlm.AmazonDLMClient	software.amazon.awssdk.services.dlm.DlmClient
com.amazonaws.services.dynamodbv2.AmazonDynamoDBAsyncClient	software.amazon.awssdk.services.dynamodb.DynamoDbAsyncClient
com.amazonaws.services.dynamodbv2.AmazonDynamoDBClient	software.amazon.awssdk.services.dynamodb.DynamoDbClient
com.amazonaws.services.dynamodbv2.AmazonDynamoDBStreamsAsyncClient	software.amazon.awssdk.services.dynamodb.streams.DynamoDbStreamsAsyncClient
com.amazonaws.services.dynamodbv2.AmazonDynamoDBStreamsClient	software.amazon.awssdk.services.dynamodb.streams.DynamoDbStreamsClient
com.amazonaws.services.ec2.AmazonEC2AsyncClient	software.amazon.awssdk.services.ec2.Ec2AsyncClient
com.amazonaws.services.ec2.AmazonEC2Client	software.amazon.awssdk.services.ec2.Ec2Client
com.amazonaws.services.ecr.AmazonECRAsyncClient	software.amazon.awssdk.services.ecr.EcrAsyncClient
com.amazonaws.services.ecr.AmazonECRClient	software.amazon.awssdk.services.ecr.EcrClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.ecs.AmazonECSAsyncClient	software.amazon.awssdk.services.ecs.EcsAsyncClient
com.amazonaws.services.ecs.AmazonECSClient	software.amazon.awssdk.services.ecs.EcsClient
com.amazonaws.services.eks.AmazonEKSAsyncClient	software.amazon.awssdk.services.eks.EksAsyncClient
com.amazonaws.services.eks.AmazonEKSClient	software.amazon.awssdk.services.eks.EksClient
com.amazonaws.services.elasticache.AmazonElastiCacheAsyncClient	software.amazon.awssdk.services.elasticache.ElastiCacheAsyncClient
com.amazonaws.services.elasticache.AmazonElastiCacheClient	software.amazon.awssdk.services.elasticache.ElastiCacheClient
com.amazonaws.services.elasticbeanstalk.AWSElasticBeanstalkAsyncClient	software.amazon.awssdk.services.elasticbeanstalk.ElasticBeanstalkAsyncClient
com.amazonaws.services.elasticbeanstalk.AWSElasticBeanstalkClient	software.amazon.awssdk.services.elasticbeanstalk.ElasticBeanstalkClient
com.amazonaws.services.elasticfilesystem.AmazonElasticFileSystemAsyncClient	software.amazon.awssdk.services.efs.EfsAsyncClient
com.amazonaws.services.elasticfilesystem.AmazonElasticFileSystemClient	software.amazon.awssdk.services.efs.EfsClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.elasticloadbalancing.AmazonElasticLoadBalancingAsyncClient	software.amazon.awssdk.services.elasticloadbalancing.ElasticLoadBalancingAsyncClient
com.amazonaws.services.elasticloadbalancing.AmazonElasticLoadBalancingClient	software.amazon.awssdk.services.elasticloadbalancing.ElasticLoadBalancingClient
com.amazonaws.services.elasticloadbalancingv2.AmazonElasticLoadBalancingAsyncClient	software.amazon.awssdk.services.elasticloadbalancingv2.ElasticLoadBalancingV2AsyncClient
com.amazonaws.services.elasticloadbalancingv2.AmazonElasticLoadBalancingClient	software.amazon.awssdk.services.elasticloadbalancingv2.ElasticLoadBalancingV2Client
com.amazonaws.services.elasticmapreduce.AmazonElasticMapReduceAsyncClient	software.amazon.awssdk.services.emr.EmrAsyncClient
com.amazonaws.services.elasticmapreduce.AmazonElasticMapReduceClient	software.amazon.awssdk.services.emr.EmrClient
com.amazonaws.services.elasticsearch.AWSElasticsearchAsyncClient	software.amazon.awssdk.services.elasticsearch.ElasticsearchAsyncClient
com.amazonaws.services.elasticsearch.AWSElasticsearchClient	software.amazon.awssdk.services.elasticsearch.ElasticsearchClient
com.amazonaws.services.elastictranscoder.AmazonElasticTranscoderAsyncClient	software.amazon.awssdk.services.elastictranscoder.ElasticTranscoderAsyncClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.elastictranscoder.AmazonElasticTranscoderClient	software.amazon.awssdk.services.elastictranscoder.ElasticTranscoderClient
com.amazonaws.services.fms.AWSFMSAsyncClient	software.amazon.awssdk.services.fms.FmsAsyncClient
com.amazonaws.services.fms.AWSFMSClient	software.amazon.awssdk.services.fms.FmsClient
com.amazonaws.services.gamelift.AmazonGameLiftAsyncClient	software.amazon.awssdk.services.gamelift.GameLiftAsyncClient
com.amazonaws.services.gamelift.AmazonGameLiftClient	software.amazon.awssdk.services.gamelift.GameLiftClient
com.amazonaws.services.glacier.AmazonGlacierAsyncClient	software.amazon.awssdk.services.glacier.GlacierAsyncClient
com.amazonaws.services.glacier.AmazonGlacierClient	software.amazon.awssdk.services.glacier.GlacierClient
com.amazonaws.services.glue.AWSGlueAsyncClient	software.amazon.awssdk.services.glue.GlueAsyncClient
com.amazonaws.services.glue.AWSGlueClient	software.amazon.awssdk.services.glue.GlueClient
com.amazonaws.services.greengrass.AWSGreengrassAsyncClient	software.amazon.awssdk.services.greengrass.GreengrassAsyncClient
com.amazonaws.services.greengrass.AWSGreengrassClient	software.amazon.awssdk.services.greengrass.GreengrassClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.guardduty.AmazonGuardDutyAsyncClient	software.amazon.awssdk.services.guardduty.GuardDutyAsyncClient
com.amazonaws.services.guardduty.AmazonGuardDutyClient	software.amazon.awssdk.services.guardduty.GuardDutyClient
com.amazonaws.services.health.AWSHealthAsyncClient	software.amazon.awssdk.services.health.HealthAsyncClient
com.amazonaws.services.health.AWSHealthClient	software.amazon.awssdk.services.health.HealthClient
com.amazonaws.services.identitymanagement.AmazonIdentityManagementAsyncClient	software.amazon.awssdk.services.iam.IamAsyncClient
com.amazonaws.services.identitymanagement.AmazonIdentityManagementClient	software.amazon.awssdk.services.iam.IamClient
com.amazonaws.services.importexport.AmazonImportExportAsyncClient	*Deprecated*
com.amazonaws.services.importexport.AmazonImportExportClient	*Deprecated*
com.amazonaws.services.inspector.AmazonInspectorAsyncClient	software.amazon.awssdk.services.inspector.InspectorAsyncClient
com.amazonaws.services.inspector.AmazonInspectorClient	software.amazon.awssdk.services.inspector.InspectorClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.iot.AWSIotAsyncClient	software.amazon.awssdk.services.iot.IotAsyncClient
com.amazonaws.services.iot.AWSIotClient	software.amazon.awssdk.services.iot.IotClient
com.amazonaws.services.iot1clickdevices.AWSIoT1ClickDevicesAsyncClient	software.amazon.awssdk.services.iot1clickdevices.Iot1ClickDevicesAsyncClient
com.amazonaws.services.iot1clickdevices.AWSIoT1ClickDevicesClient	software.amazon.awssdk.services.iot1clickdevices.Iot1ClickDevicesClient
com.amazonaws.services.iot1clickprojects.AWSIoT1ClickProjectsAsyncClient	software.amazon.awssdk.services.iot1clickprojects.Iot1ClickProjectsAsyncClient
com.amazonaws.services.iot1clickprojects.AWSIoT1ClickProjectsClient	software.amazon.awssdk.services.iot1clickprojects.Iot1ClickProjectsClient
com.amazonaws.services.iotanalytics.AWSIoTAnalyticsAsyncClient	software.amazon.awssdk.services.iotanalytics.IotAnalyticsAsyncClient
com.amazonaws.services.iotanalytics.AWSIoTAnalyticsClient	software.amazon.awssdk.services.iotanalytics.IotAnalyticsClient
com.amazonaws.services.iotdata.AWSIotDataAsyncClient	software.amazon.awssdk.services.iotdata.IotDataAsyncClient
com.amazonaws.services.iotdata.AWSIotDataClient	software.amazon.awssdk.services.iotdata.IotDataClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.iotjobsdataplane.AWSIoTJobsDataPlaneAsyncClient	software.amazon.awssdk.services.iotdataplane.IotDataPlaneAsyncClient
com.amazonaws.services.iotjobsdataplane.AWSIoTJobsDataPlaneClient	software.amazon.awssdk.services.iotdataplane.IotDataPlaneClient
com.amazonaws.services.kinesis.AmazonKinesisAsyncClient	software.amazon.awssdk.services.kinesis.KinesisAsyncClient
com.amazonaws.services.kinesis.AmazonKinesisClient	software.amazon.awssdk.services.kinesis.KinesisClient
com.amazonaws.services.kinesisanalytics.AmazonKinesisAnalyticsAsyncClient	software.amazon.awssdk.services.kinesisanalytics.KinesisAnalyticsAsyncClient
com.amazonaws.services.kinesisanalytics.AmazonKinesisAnalyticsClient	software.amazon.awssdk.services.kinesisanalytics.KinesisAnalyticsClient
com.amazonaws.services.kinesisfirehose.AmazonKinesisFirehoseAsyncClient	software.amazon.awssdk.services.firehose.FirehoseAsyncClient
com.amazonaws.services.kinesisfirehose.AmazonKinesisFirehoseClient	software.amazon.awssdk.services.firehose.FirehoseClient
com.amazonaws.services.kinesisvideo.AmazonKinesisVideoArchivedMediaAsyncClient	software.amazon.awssdk.services.kinesisvideoarchivedmedia.KinesisVideoArchivedMediaAsyncClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.kinesisvideo.AmazonKinesisVideoArchivedMediaClient	software.amazon.awssdk.services.kinesisvideoarchivedmedia.KinesisVideoArchivedMediaClient
com.amazonaws.services.kinesisvideo.AmazonKinesisVideoAsyncClient	software.amazon.awssdk.services.kinesisvideo.KinesisVideoAsyncClient
com.amazonaws.services.kinesisvideo.AmazonKinesisVideoClient	software.amazon.awssdk.services.kinesisvideo.KinesisVideoClient
com.amazonaws.services.kinesisvideo.AmazonKinesisVideoMediaAsyncClient	software.amazon.awssdk.services.kinesisvideomedia.KinesisVideoMediaAsyncClient
com.amazonaws.services.kinesisvideo.AmazonKinesisVideoMediaClient	software.amazon.awssdk.services.kinesisvideomedia.KinesisVideoMediaClient
com.amazonaws.services.kinesisvideo.AmazonKinesisVideoPutMediaClient	No es compatible
com.amazonaws.services.kms.AWSKMSAsyncClient	software.amazon.awssdk.services.kms.KmsAsyncClient
com.amazonaws.services.kms.AWSKMSClient	software.amazon.awssdk.services.kms.KmsClient
com.amazonaws.services.lambda.AWSLambdaAsyncClient	software.amazon.awssdk.services.lambda.LambdaAsyncClient
com.amazonaws.services.lambda.AWSLambdaClient	software.amazon.awssdk.services.lambda.LambdaClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.lexmodelbuilding.AmazonLexModelBuildingAsyncClient	software.amazon.awssdk.services.lexmodelbuilding.LexModelBuildingAsyncClient
com.amazonaws.services.lexmodelbuilding.AmazonLexModelBuildingClient	software.amazon.awssdk.services.lexmodelbuilding.LexModelBuildingClient
com.amazonaws.services.lexruntime.AmazonLexRuntimeAsyncClient	software.amazon.awssdk.services.lexruntime.LexRuntimeAsyncClient
com.amazonaws.services.lexruntime.AmazonLexRuntimeClient	software.amazon.awssdk.services.lexruntime.LexRuntimeClient
com.amazonaws.services.lightsail.AmazonLightsailAsyncClient	software.amazon.awssdk.services.lightsail.LightsailAsyncClient
com.amazonaws.services.lightsail.AmazonLightsailClient	software.amazon.awssdk.services.lightsail.LightsailClient
com.amazonaws.services.logs.AWSLogsAsyncClient	software.amazon.awssdk.services.logs.LogsAsyncClient
com.amazonaws.services.logs.AWSLogsClient	software.amazon.awssdk.services.logs.LogsClient
com.amazonaws.services.machinelearning.AmazonMachineLearningAsyncClient	software.amazon.awssdk.services.machinelearning.MachineLearningAsyncClient
com.amazonaws.services.machinelearning.AmazonMachineLearningClient	software.amazon.awssdk.services.machinelearning.MachineLearningClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.macie.AmazonMacieAsyncClient	software.amazon.awssdk.services.macie.MacieAsyncClient
com.amazonaws.services.macie.AmazonMacieClient	software.amazon.awssdk.services.macie.MacieClient
com.amazonaws.services.marketplacecommerceanalytics.AWSMarketplaceCommerceAnalyticsAsyncClient	software.amazon.awssdk.services.marketplacecommerceanalytics.MarketplaceCommerceAnalyticsAsyncClient
com.amazonaws.services.marketplacecommerceanalytics.AWSMarketplaceCommerceAnalyticsClient	software.amazon.awssdk.services.marketplacecommerceanalytics.MarketplaceCommerceAnalyticsClient
com.amazonaws.services.marketplaceentitlement.AWSMarketplaceEntitlementAsyncClient	software.amazon.awssdk.services.marketplaceentitlement.MarketplaceEntitlementAsyncClient
com.amazonaws.services.marketplaceentitlement.AWSMarketplaceEntitlementClient	software.amazon.awssdk.services.marketplaceentitlement.MarketplaceEntitlementClient
com.amazonaws.services.marketplacemetering.AWSMarketplaceMeteringAsyncClient	software.amazon.awssdk.services.marketplacemetering.MarketplaceMeteringAsyncClient
com.amazonaws.services.marketplacemetering.AWSMarketplaceMeteringClient	software.amazon.awssdk.services.marketplacemetering.MarketplaceMeteringClient
com.amazonaws.services.mediaconvert.AWSMediaConvertAsyncClient	software.amazon.awssdk.services.mediaconvert.MediaConvertAsyncClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.mediaconvert.AWSMediaConvertClient	software.amazon.awssdk.services.mediaconvert.MediaConvertClient
com.amazonaws.services.medialive.AWSMediaLiveAsyncClient	software.amazon.awssdk.services.medialive.MediaLiveAsyncClient
com.amazonaws.services.medialive.AWSMediaLiveClient	software.amazon.awssdk.services.medialive.MediaLiveClient
com.amazonaws.services.mediapackage.AWSMediaPackageAsyncClient	software.amazon.awssdk.services.mediapackage.MediaPackageAsyncClient
com.amazonaws.services.mediapackage.AWSMediaPackageClient	software.amazon.awssdk.services.mediapackage.MediaPackageClient
com.amazonaws.services.mediastore.AWSMediaStoreAsyncClient	software.amazon.awssdk.services.mediastore.MediaStoreAsyncClient
com.amazonaws.services.mediastore.AWSMediaStoreClient	software.amazon.awssdk.services.mediastore.MediaStoreClient
com.amazonaws.services.mediastoredata.AWSMediaStoreDataAsyncClient	software.amazon.awssdk.services.mediastoredata.MediaStoreDataAsyncClient
com.amazonaws.services.mediastoredata.AWSMediaStoreDataClient	software.amazon.awssdk.services.mediastoredata.MediaStoreDataClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.mediatailor.AWSMediaTailorAsyncClient	software.amazon.awssdk.services.mediatailor.MediaTailorAsyncClient
com.amazonaws.services.mediatailor.AWSMediaTailorClient	software.amazon.awssdk.services.mediatailor.MediaTailorClient
com.amazonaws.services.migrationhub.AWSMigrationHubAsyncClient	software.amazon.awssdk.services.migrationhub.MigrationHubAsyncClient
com.amazonaws.services.migrationhub.AWSMigrationHubClient	software.amazon.awssdk.services.migrationhub.MigrationHubClient
com.amazonaws.services.mobile.AWSMobileAsyncClient	software.amazon.awssdk.services.mobile.MobileAsyncClient
com.amazonaws.services.mobile.AWSMobileClient	software.amazon.awssdk.services.mobile.MobileClient
com.amazonaws.services.mq.AmazonMQAsyncClient	software.amazon.awssdk.services.mq.MqAsyncClient
com.amazonaws.services.mq.AmazonMQClient	software.amazon.awssdk.services.mq.MqClient
com.amazonaws.services.mturk.AmazonMTurkAsyncClient	software.amazon.awssdk.services.mturk.MTurkAsyncClient
com.amazonaws.services.mturk.AmazonMTurkClient	software.amazon.awssdk.services.mturk.MTurkClient
com.amazonaws.services.neptune.AmazonNeptuneAsyncClient	software.amazon.awssdk.services.neptune.NeptuneAsyncClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.neptune.AmazonNeptuneClient	software.amazon.awssdk.services.neptune.NeptuneClient
com.amazonaws.services.opsworks.AWSOpsWorksAsyncClient	software.amazon.awssdk.services.opsworks.OpsWorksAsyncClient
com.amazonaws.services.opsworks.AWSOpsWorksClient	software.amazon.awssdk.services.opsworks.OpsWorksClient
com.amazonaws.services.opsworkscm.AWSOpsWorksCMAsyncClient	software.amazon.awssdk.services.opsworkscm.OpsWorksCmAsyncClient
com.amazonaws.services.opsworkscm.AWSOpsWorksCMClient	software.amazon.awssdk.services.opsworkscm.OpsWorksCmClient
com.amazonaws.services.organizations.AWSOrganizationsAsyncClient	software.amazon.awssdk.services.organizations.OrganizationsAsyncClient
com.amazonaws.services.organizations.AWSOrganizationsClient	software.amazon.awssdk.services.organizations.OrganizationsClient
com.amazonaws.services.pi.AWSPIAsyncClient	software.amazon.awssdk.services.pi.PiAsyncClient
com.amazonaws.services.pi.AWSPIClient	software.amazon.awssdk.services.pi.PiClient
com.amazonaws.services.pinpoint.AmazonPinpointAsyncClient	software.amazon.awssdk.services.pinpoint.PinpointAsyncClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.pinpoint.AmazonPinpointClient	software.amazon.awssdk.services.pinpoint.PinpointClient
com.amazonaws.services.polly.AmazonPollyAsyncClient	software.amazon.awssdk.services.polly.PollyAsyncClient
com.amazonaws.services.polly.AmazonPollyClient	software.amazon.awssdk.services.polly.PollyClient
com.amazonaws.services.pricing.AWSPricingAsyncClient	software.amazon.awssdk.services.pricing.PricingAsyncClient
com.amazonaws.services.pricing.AWSPricingClient	software.amazon.awssdk.services.pricing.PricingClient
com.amazonaws.services.rds.AmazonRDSAsyncClient	software.amazon.awssdk.services.rds.RdsAsyncClient
com.amazonaws.services.rds.AmazonRDSClient	software.amazon.awssdk.services.rds.RdsClient
com.amazonaws.services.redshift.AmazonRedshiftAsyncClient	software.amazon.awssdk.services.redshift.RedshiftAsyncClient
com.amazonaws.services.redshift.AmazonRedshiftClient	software.amazon.awssdk.services.redshift.RedshiftClient
com.amazonaws.services.rekognition.AmazonRekognitionAsyncClient	software.amazon.awssdk.services.rekognition.RekognitionAsyncClient
com.amazonaws.services.rekognition.AmazonRekognitionClient	software.amazon.awssdk.services.rekognition.RekognitionClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.resourcegroups.AWSResourceGroupsAsyncClient	software.amazon.awssdk.services.resourcegroups.ResourceGroupsAsyncClient
com.amazonaws.services.resourcegroups.AWSResourceGroupsClient	software.amazon.awssdk.services.resourcegroups.ResourceGroupsClient
com.amazonaws.services.resourcegroupstaggingapi.AWSResourceGroupsTaggingAPIAsyncClient	software.amazon.awssdk.services.resourcegroupstaggingapi.ResourceGroupsTaggingApiAsyncClient
com.amazonaws.services.resourcegroupstaggingapi.AWSResourceGroupsTaggingAPIClient	software.amazon.awssdk.services.resourcegroupstaggingapi.ResourceGroupsTaggingApiClient
com.amazonaws.services.route53.AmazonRoute53AsyncClient	software.amazon.awssdk.services.route53.Route53AsyncClient
com.amazonaws.services.route53.AmazonRoute53Client	software.amazon.awssdk.services.route53.Route53Client
com.amazonaws.services.route53domains.AmazonRoute53DomainsAsyncClient	software.amazon.awssdk.services.route53domains.Route53DomainsAsyncClient
com.amazonaws.services.route53domains.AmazonRoute53DomainsClient	software.amazon.awssdk.services.route53domains.Route53DomainsClient
com.amazonaws.services.s3.AmazonS3Client	software.amazon.awssdk.services.s3.S3Client

Cliente 1.x	Cliente 2.x
com.amazonaws.services.sagemaker.AmazonSageMakerAsyncClient	software.amazon.awssdk.services.sagemaker.SageMakerAsyncClient
com.amazonaws.services.sagemaker.AmazonSageMakerClient	software.amazon.awssdk.services.sagemaker.SageMakerClient
com.amazonaws.services.sagemakerruntime.AmazonSageMakerRuntimeAsyncClient	software.amazon.awssdk.services.sagemakerruntime.SageMakerRuntimeAsyncClient
com.amazonaws.services.sagemakerruntime.AmazonSageMakerRuntimeClient	software.amazon.awssdk.services.sagemakerruntime.SageMakerRuntimeClient
com.amazonaws.services.secretsmanager.AWSSecretsManagerAsyncClient	software.amazon.awssdk.services.secretsmanager.SecretsManagerAsyncClient
com.amazonaws.services.secretsmanager.AWSSecretsManagerClient	software.amazon.awssdk.services.secretsmanager.SecretsManagerClient
com.amazonaws.services.securitytoken.AWSSecurityTokenServiceAsyncClient	software.amazon.awssdk.services.sts.StsAsyncClient
com.amazonaws.services.securitytoken.AWSSecurityTokenServiceClient	software.amazon.awssdk.services.sts.StsClient
com.amazonaws.services.serverlessapplicationrepository.AWSServerlessApplicationRepositoryAsyncClient	software.amazon.awssdk.services.serverlessapplicationrepository.ServerlessApplicationRepositoryAsyncClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.serverlessapplicationrepository.AWSServerlessApplicationRepositoryClient	software.amazon.awssdk.services.serverlessapplicationrepository.ServerlessApplicationRepositoryClient
com.amazonaws.services.servermigration.AWSServerMigrationAsyncClient	software.amazon.awssdk.services.sms.SmsAsyncClient
com.amazonaws.services.servermigration.AWSServerMigrationClient	software.amazon.awssdk.services.sms.SmsClient
com.amazonaws.services.servicecatalog.AWSServiceCatalogAsyncClient	software.amazon.awssdk.services.servicecatalog.ServiceCatalogAsyncClient
com.amazonaws.services.servicecatalog.AWSServiceCatalogClient	software.amazon.awssdk.services.servicecatalog.ServiceCatalogClient
com.amazonaws.services.servicediscovery.AWSServiceDiscoveryAsyncClient	software.amazon.awssdk.services.servicediscovery.ServiceDiscoveryAsyncClient
com.amazonaws.services.servicediscovery.AWSServiceDiscoveryClient	software.amazon.awssdk.services.servicediscovery.ServiceDiscoveryClient
com.amazonaws.services.shield.AWSShieldAsyncClient	software.amazon.awssdk.services.shield.ShieldAsyncClient
com.amazonaws.services.shield.AWSShieldClient	software.amazon.awssdk.services.shield.ShieldClient

Cliente 1.x	Cliente 2.x
`com.amazonaws.services.simpledb.AmazonSimpleDBAsyncClient`	`software.amazon.awssdk.services.simpledb.SimpleDbAsyncClient`
`com.amazonaws.services.simpledb.AmazonSimpleDBClient`	`software.amazon.awssdk.services.simpledb.SimpleDbClient`
`com.amazonaws.services.simpleemail.AmazonSimpleEmailServiceAsyncClient`	`software.amazon.awssdk.services.ses.SesAsyncClient`
`com.amazonaws.services.simpleemail.AmazonSimpleEmailServiceClient`	`software.amazon.awssdk.services.ses.SesClient`
`com.amazonaws.services.simplesystemsmanagement.AWSSimpleSystemsManagementAsyncClient`	`software.amazon.awssdk.services.ssm.SsmAsyncClient`
`com.amazonaws.services.simplesystemsmanagement.AWSSimpleSystemsManagementClient`	`software.amazon.awssdk.services.ssm.SsmClient`
`com.amazonaws.services.simpleworkflow.AmazonSimpleWorkflowAsyncClient`	`software.amazon.awssdk.services.swf.SwfAsyncClient`
`com.amazonaws.services.simpleworkflow.AmazonSimpleWorkflowClient`	`software.amazon.awssdk.services.swf.SwfClient`
`com.amazonaws.services.snowball.AmazonSnowballAsyncClient`	`software.amazon.awssdk.services.snowball.SnowballAsyncClient`
`com.amazonaws.services.snowball.AmazonSnowballClient`	`software.amazon.awssdk.services.snowball.SnowballClient`

Cliente 1.x	Cliente 2.x
com.amazonaws.services.sns.AmazonSNSAsyncClient	software.amazon.awssdk.services.sns.SnsAsyncClient
com.amazonaws.services.sns.AmazonSNSClient	software.amazon.awssdk.services.sns.SnsClient
com.amazonaws.services.sqs.AmazonSQSAsyncClient	software.amazon.awssdk.services.sqs.SqsAsyncClient
com.amazonaws.services.sqs.AmazonSQSClient	software.amazon.awssdk.services.sqs.SqsClient
com.amazonaws.services.stepfunctions.AWSStepFunctionsAsyncClient	software.amazon.awssdk.services.sfn.SfnAsyncClient
com.amazonaws.services.stepfunctions.AWSStepFunctionsClient	software.amazon.awssdk.services.sfn.SfnClient
com.amazonaws.services.storagegateway.AWSStorageGatewayAsyncClient	software.amazon.awssdk.services.storagegateway.StorageGatewayAsyncClient
com.amazonaws.services.storagegateway.AWSStorageGatewayClient	software.amazon.awssdk.services.storagegateway.StorageGatewayClient
com.amazonaws.services.support.AWSSupportAsyncClient	software.amazon.awssdk.services.support.SupportAsyncClient
com.amazonaws.services.support.AWSSupportClient	software.amazon.awssdk.services.support.SupportClient
com.amazonaws.services.transcribe.AmazonTranscribeAsyncClient	software.amazon.awssdk.services.transcribe.TranscribeAsyncClient

Cliente 1.x	Cliente 2.x
com.amazonaws.services.transcribe.AmazonTranscribeClient	software.amazon.awssdk.services.transcribe.TranscribeClient
com.amazonaws.services.translate.AmazonTranslateAsyncClient	software.amazon.awssdk.services.translate.TranslateAsyncClient
com.amazonaws.services.translate.AmazonTranslateClient	software.amazon.awssdk.services.translate.TranslateClient
com.amazonaws.services.waf.AWSWAFAsyncClient	software.amazon.awssdk.services.waf.WafAsyncClient
com.amazonaws.services.waf.AWSWAFClient	software.amazon.awssdk.services.waf.WafClient
com.amazonaws.services.waf.AWSWAFRegionalAsyncClient	software.amazon.awssdk.services.waf.regional.WafRegionalAsyncClient
com.amazonaws.services.waf.AWSWAFRegionalClient	software.amazon.awssdk.services.waf.regional.WafRegionalClient
com.amazonaws.services.workdocs.AmazonWorkDocsAsyncClient	software.amazon.awssdk.services.workdocs.WorkDocsAsyncClient
com.amazonaws.services.workdocs.AmazonWorkDocsClient	software.amazon.awssdk.services.workdocs.WorkDocsClient
com.amazonaws.services.workmail.AmazonWorkMailAsyncClient	software.amazon.awssdk.services.workmail.WorkMailAsyncClient

Cliente 1.x	Cliente 2.x
`com.amazonaws.services.workmail.AmazonWorkMailClient`	`software.amazon.awssdk.services.workmail.WorkMailClient`
`com.amazonaws.services.workspaces.AmazonWorkspacesAsyncClient`	`software.amazon.awssdk.services.workspaces.WorkSpacesAsyncClient`
`com.amazonaws.services.workspaces.AmazonWorkspacesClient`	`software.amazon.awssdk.services.workspaces.WorkSpacesClient`
`com.amazonaws.services.xray.AWSXRayAsyncClient`	`software.amazon.awssdk.services.xray.XRayAsyncClient`
`com.amazonaws.services.xray.AWSXRayClient`	`software.amazon.awssdk.services.xray.XRayClient`

Valores predeterminados de creación de clientes

En la versión 2.x, se han realizado los siguientes cambios en la lógica predeterminada de creación de clientes.

- La cadena predeterminada de proveedor de credenciales para S3 ya no incluye credenciales anónimas. Debe especificar manualmente el acceso anónimo a S3 con `AnonymousCredentialsProvider`.
- Las siguientes variables de entorno relacionadas con la creación de clientes predeterminada son diferentes.

1.x	2.x
`AWS_CBOR_DISABLED`	`CBOR_ENABLED`
`AWS_ION_BINARY_DISABLE`	`BINARY_ION_ENABLED`

- Las siguientes propiedades del sistema relacionadas con la creación predeterminada de cliente son difererentes.

1.x	2.x
com.amazonaws.sdk.disableEc2Metadata	aws.disableEc2Metadata
com.amazonaws.sdk.ec2MetadataServiceEndpointOverride	aws.ec2MetadataServiceEndpoint
com.amazonaws.sdk.disableCbor	aws.cborEnabled
com.amazonaws.sdk.disableIonBinary	aws.binaryIonEnabled

- La versión 2.x no admite las siguientes propiedades del sistema.
-

1.x
com.amazonaws.sdk.disableCertChecking
com.amazonaws.sdk.enableDefaultMetrics
com.amazonaws.sdk.enableThrottledRetry
com.amazonaws.regions.RegionUtils.fileOverride
com.amazonaws.regions.RegionUtils.disableRemote
com.amazonaws.services.s3.disableImplicitGlobalClients
com.amazonaws.sdk.enableInRegionOptimizedMode

- Ya no se admite la carga de la configuración de la región desde un archivo `endpoints.json` personalizado.

Configuración de cliente

En la versión 1.x, la configuración del cliente del SDK se modificaba estableciendo una instancia `ClientConfiguration` en el cliente o en el compilador de clientes. En la versión 2.x, la configuración del cliente se divide en clases de configuración independientes. Con las clases de

configuración separadas, puede configurar diferentes clientes HTTP para clientes asíncronos frente a síncronos, pero seguir utilizando la misma clase `ClientOverrideConfiguration`.

Example de configuración del cliente en la versión 1.x

```
AmazonDynamoDBClientBuilder.standard()
.withClientConfiguration(clientConfiguration)
.build()
```

Example de configuración de clientes síncronos en la versión 2.x

```
ProxyConfiguration.Builder proxyConfig = ProxyConfiguration.builder();

ApacheHttpClient.Builder httpClientBuilder =
        ApacheHttpClient.builder()
                        .proxyConfiguration(proxyConfig.build());

ClientOverrideConfiguration.Builder overrideConfig =
        ClientOverrideConfiguration.builder();

DynamoDbClient client =
        DynamoDbClient.builder()
                      .httpClientBuilder(httpClientBuilder)
                      .overrideConfiguration(overrideConfig.build())
                      .build();
```

Example de configuración de clientes asíncronos en la versión 2.x

```
NettyNioAsyncHttpClient.Builder httpClientBuilder =
        NettyNioAsyncHttpClient.builder();

ClientOverrideConfiguration.Builder overrideConfig =
        ClientOverrideConfiguration.builder();

ClientAsyncConfiguration.Builder asyncConfig =
        ClientAsyncConfiguration.builder();

DynamoDbAsyncClient client =
        DynamoDbAsyncClient.builder()
                           .httpClientBuilder(httpClientBuilder)
                           .overrideConfiguration(overrideConfig.build())
                           .asyncConfiguration(asyncConfig.build())
```

```
                                .build();
```

Clientes de HTTP

Cambios destacados

- En la versión 2.x, puede cambiar qué cliente de HTTP desea usar en tiempo de ejecución especificando una implementación mediante `clientBuilder.httpClientBuilder`.
- Al pasar un cliente de HTTP mediante `clientBuilder.httpClient` a un compilador de clientes de servicio, el cliente de HTTP no se cierra de forma predeterminada si el cliente de servicio se cierra. Esto le permite compartir clientes de HTTP entre clientes de servicio.
- Los clientes de HTTP asincrónicos ahora usan una E/S no bloqueante.
- Algunas operaciones utilizan ahora HTTP/2 para mejorar el rendimiento.

Cambios de configuración

Opción	1.x	2.x Sync, Apache	2.x Async, Netty
	`ClientConfiguration clientConfig = new ClientConfiguration()`	`ApacheHttpClient.Builder httpClientBuilder = ApacheHttpClient.builder()`	`NettyNioAsyncHttpClient.Builder httpClientBuilder = NettyNioAsyncHttpClient.builder()`
Máximo de conexiones	`clientConfig.setMaxConnections(...)` `clientConfig.withMaxConnections(...)`	`httpClientBuilder.maxConnections(...)`	`httpClientBuilder.maxConcurrency(...)`
Tiempo de espera de la conexión	`clientConfig.setCo`	`httpClientBuilder.`	`httpClientBuilder.`

Opción	1.x	2.x Sync, Apache	2.x Async, Netty
	`nnectionT imeout(...) clientConfig.wi thConnect ionTimeout(...)`	`connectio nTimeout(...) httpClientBui lder.conn ectionAcq uisitionT imeout(...)`	`connectio nTimeout(...)`
Tiempo de espera de sockets	`clientCon fig.setSo cketTimeo ut(...) clientConf ig.withSo cketTimeo ut(...)`	`httpClien tBuilder. socketTim eout(...)`	`httpClien tBuilder. writeTime out(...) httpClien tBuilder. readTimeo ut(...)`
TTL de conexión	`clientCon fig.setCo nnectionT TL(...) clientConf ig.withCo nnectionT TL(...)`	`httpClien tBuilder. connectio nTimeToLi ve(...)`	`httpClien tBuilder. connectio nTimeToLi ve(...)`
Inactividad máx. de conexión	`clientCon fig.setCo nnectionM axIdleMil lis(...) clientCon fig.withC onnection MaxIdleMi llis(...)`	`httpClien tBuilder. connectio nMaxIdleT ime(...)`	`httpClien tBuilder. connectio nMaxIdleT ime(...)`

Opción	1.x	2.x Sync, Apache	2.x Async, Netty
Validación después de inactividad	`clientConfig.setValidateAfterInactivityMillis(...)` `clientConfig.withValidateAfterInactivityMillis(...)`	No se admite (característica de solicitud)	No se admite (característica de solicitud)
Dirección local	`clientConfig.setLocalAddress(...)` `clientConfig.withLocalAddress(...)`	`httpClientBuilder.localAddress(...)`	No compatible
Expect-continue habilitada	`clientConfig.setUseExpectContinue(...)` `clientConfig.withUseExpectContinue(...)`	`httpClientBuilder.expectContinueEnabled(...)`	No se admite (característica de solicitud)
Connection reaper	`clientConfig.setUseReaper(...)` `clientConfig.withReaper(...)`	`httpClientBuilder.useIdleConnectionReaper(...)`	`httpClientBuilder.useIdleConnectionReaper(...)`

Opción	1.x	2.x Sync, Apache	2.x Async, Netty

	`AmazonDynamoDBClientBuilder.standard()`
	`.withClientConfiguration(clientConfiguration)`
	`.build()`
		`DynamoDbClient.builder()`
		`.httpClientBuilder(httpClientBuilder)`
		`.build()`
			`DynamoDbAsyncClient.builder()`
			`.httpClientBuilder(httpClientBuilder)`
			`.build()`

Proxies de cliente de HTTP

Configuración	1.x	2.x Sync, Apache	2.x Async, Netty
	`ClientConfiguration clientConfig = new ClientConfiguration()`	`ProxyConfiguration.Builder proxyConfig = ProxyConfiguration.builder()`	`ProxyConfiguration.Builder proxyConfig = ProxyConfiguration.builder()`
Host del proxy.	`clientConfig.setProxyHost(...)` `clientConfig.withProxyHost(...)`	`proxyConfig.endpoint(...)`	`proxyConfig.host(...)`
Puerto del proxy.	`clientConfig.setProxyPort(...)` `clientConfig.withProxyPort(...)`	`proxyConfig.endpoint(...)`	`proxyConfig.port(...)`

Configuración	1.x	2.x Sync, Apache	2.x Async, Netty
		El puerto proxy está incrustado en `endpoint`	
Nombre de usuario del proxy	`clientConfig.setProxyUsername(...)` `clientConfig.withProxyUsername(...)`	`proxyConfig.username(...)`	`proxyConfig.username(...)`
Contraseña del proxy.	`clientConfig.setProxyPassword(...)` `clientConfig.withProxyPassword(...)`	`proxyConfig.password(...)`	`proxyConfig.password(...)`
Dominio de proxy	`clientConfig.setProxyDomain(...)` `clientConfig.withProxyDomain(...)`	`proxyConfig.ntlmDomain(...)`	No se admite (característica de solicitud)
Estación de trabajo proxy	`clientConfig.setProxyWorkspace(...)` `clientConfig.withProxyWorkstation(...)`	`proxyConfig.ntlmWorkstation(...)`	No se admite (característica de solicitud)

Configuración	1.x	2.x Sync, Apache	2.x Async, Netty
Métodos de autenticación de proxy	`clientConfig.setProxyAuthenticationMethods(...)` `clientConfig.withProxyAuthenticationMethods(...)`	No se admite	No se admite (característica de solicitud)
Autenticación proxy básica prioritaria	`clientConfig.setPreemptiveBasicProxyAuth(...)` `clientConfig.withPreemptiveBasicProxyAuth(...)`	`proxyConfig.preemptiveBasicAuthenticationEnabled(...)`	No se admite (característica de solicitud)
Host sin proxy	`clientConfig.setNonProxyHosts(...)` `clientConfig.withNonProxyHosts(...)`	`proxyConfig.nonProxyHosts(...)`	`proxyConfig.nonProxyHosts(...)`

Configuración	1.x	2.x Sync, Apache	2.x Async, Netty
Deshabilitación del proxy de sockets	`clientConfig.setDisableSocketProxy(...)` `clientConfig.withDisableSocketProxy(...)`	No se admite (característica de solicitud)	No se admite (característica de solicitud)

	`AmazonDynamoDBClientBuilder.standard()`
	`.withClientConfiguration(clientConfiguration)`
	`.build()`
		`httpClientBuilder.proxyConfiguration(`
		`proxyConfig.build())`
			`httpClientBuilder.proxyConfiguration(`
			`proxyConfig.build())`

Anulaciones de clientes

Opción	1.x	2.x
	`ClientConfiguration clientConfig =` `new ClientConfiguration()`	`ClientOverrideConfiguration.Builder overrideConfig =` `ClientOverrideConfiguration.builder()`
Prefijo de agente de usuario	`clientConfig.setUserAgentPrefix(...)` `clientConfig.withUserAgentPrefix(...)`	`overrideConfig.advancedOption(` `SdkAdvancedClientOption.USER_AGENT_PREFIX, ...)`

Opción	1.x	2.x
Sufijo de agente de usuario	`clientConfig.setUserAgentSuffix(...)` `clientConfig.withUserAgentSuffix(...)`	`overrideConfig.advancedOption( SdkAdvancedClientOption.USER_AGENT_SUFFIX, ...)`
Signer	`clientConfig.setSignerOverride(...)` `clientConfig.withSignerOverride(...)`	`overrideConfig.advancedOption( SdkAdvancedClientOption.SIGNER, ...)`
Encabezados adicionales	`clientConfig.addHeader(...)` `clientConfig.withHeader(...)`	`overrideConfig.putHeader(...)`
Solicita tiempo de espera	`clientConfig.setRequestTimeout(...)` `clientConfig.withRequestTimeout(...)`	`overrideConfig.apiCallAttemptTimeout(...)`
Tiempo de espera de ejecución de clientes	`clientConfig.setClientExecutionTimeout(...)` `clientConfig.withClientExecutionTimeout(...)`	`overrideConfig.apiCallTimeout(...)`
Uso de Gzip	`clientConfig.setUseGzip(...)` `clientConfig.withGzip(...)`	No se admite (característica de solicitud)

Opción	1.x	2.x
Sugerencia del tamaño del búfer de socket	`clientConfig.setSocketBufferSizeHints(...)` `clientConfig.withSocketBufferSizeHints(...)`	No se admite (característica de solicitud)
Metadatos de respuesta en caché	`clientConfig.setCacheResponseMetadata(...)` `clientConfig.withCacheResponseMetadata(...)`	No se admite (característica de solicitud)
Tamaño de caché de metadatos de respuesta	`clientConfig.setResponseMetadataCacheSize(...)` `clientConfig.withResponseMetadataCacheSize(...)`	No se admite (característica de solicitud)
servicio de resolución de nombres DNS	`clientConfig.setDnsResolver(...)` `clientConfig.withDnsResolver(...)`	No se admite (característica de solicitud)

keepalive de TCP	`clientConfig.setUseTcpKeepAlive(...)` `clientConfig.withTcpKeepAlive(...)`	Esta opción se encuentra ahora en la configuración del cliente de HTTP
		`- ApacheHttpClient.builder().tcpKeepAlive(true)`
		`- NettyNioAsyncHttpClient.builder().tcpKeepAlive(true)`

Opción	1.x	2.x
Protección aleatoria	`clientConfig.setSecureRandom(...)` `clientConfig.withSecureRandom(...)`	No se admite (característica de solicitud)

	`AmazonDynamoDBClientBuilder.standard()`
	`.withClientConfiguration(clientConfiguration)`
	`.build()`
		`DynamoDbClient.builder()`
		`.overrideConfiguration(overrideConfig.build())`
		`.build()`

El cliente anula los reintentos

Opción	1.x	2.x
	`ClientConfiguration clientConfig =` `new ClientConfiguration()`	`ClientOverrideConfiguration.Builder overrideConfigBuilder =` `ClientOverrideConfiguration.builder();`
Error máx. de reintento	`clientConfig.setMaxErrorRetry(...)` `clientConfig.withMaxErrorRetry(...)`	`// Configure the default retry strategy.` `overrideConfigBuilder.retryStrategy(b -> b.maxAttempts(...));`
Uso de reintentos limitados	`clientConfig.setUseThrottleRetries(...)`	No compatible

Opción	1.x	2.x
	`clientConfig.withUseThrottleRetries(...)`	
Máx. de reintentos consecutivos antes de limitación	`clientConfig.setMaxConsecutiveRetriesBeforeThrottling(...)` `clientConfig.withMaxConsecutiveRetriesBeforeThrottling(...)`	No compatible

	`AmazonDynamoDBClientBuilder.standard()`
	`    .withClientConfiguration(clientConfiguration)`
	`    .build()`
		`DynamoDbClient.builder()`
		`        .overrideConfiguration(overrideConfigBuilder.build())`
		`        .build();`
		
		`// You also have the option to use a lambda expression to configure and`
		`// build the 'ClientOverrideConfiguration.Builder'.`
		`DynamoDbClient client = DynamoDbClient.builder()`
		`        .overrideConfiguration(o -> o.retryStrategy(b -> b.maxAttempts(5)))`
		`        .build();`

Clientes asíncronos

Opción	1.x	2.x
		`ClientAsyncConfiguration.Builder asyncConfig = ClientAsyncConfiguration.builder()`
Ejecutor	`AmazonDynamoDBAsyncClientBuilder.standard() .withExecutorFactory(...) .build()`	`asyncConfig.advancedOption( SdkAdvancedAsyncClientOption.FUTURE_COMPLETION_EXECUTOR, ...)`
		`DynamoDbAsyncClient.builder() .asyncConfiguration(asyncConfig) .build()`

Otros cambios de cliente

La siguiente opción `ClientConfiguration` de la versión 1.x ha cambiado en 2.x del SDK y no tiene un equivalente directo.

Opción	1.x	Equivalente en 2.x
Protocolo	`clientConfig.setProtocol(Protocol.HTTP) clientConfig.withProtocol(Protocol.HTTP)`	El ajuste del protocolo es HTTPS de forma predeterminada. Para modificar el ajuste, especifique el protocolo estableciendo un punto de conexión HTTP en el compilador de clientes:

Opción	1.x	Equivalente en 2.x
		`clientBuilder.endpointOverride(URI.create("http://..."))`

Cambios en el proveedor de credenciales

En esta sección se ofrece un esquema de los cambios de nombre de las clases y los métodos de proveedor de credenciales entre las versiones 1.x y 2.x del AWS SDK para Java.

Diferencias destacadas

- En la versión 2.x, el proveedor de credenciales predeterminado carga las propiedades del sistema antes que las variables de entorno. Para obtener más información, consulte Uso de credenciales.
- El método constructor se sustituye por los métodos `create` o `builder`.

  Example

  ```
  DefaultCredentialsProvider.create();
  ```

- La actualización asíncrona ya no está configurada de forma predeterminada. Debe especificarla con el `builder` del proveedor de credenciales.

  Example

  ```
  ContainerCredentialsProvider provider = ContainerCredentialsProvider.builder()
            .asyncCredentialUpdateEnabled(true)
            .build();
  ```

- Puede especificar una ruta a un archivo de perfil personalizado utilizando `ProfileCredentialsProvider.builder()`.

  Example

  ```
  ProfileCredentialsProvider profile = ProfileCredentialsProvider.builder()

   .profileFile(ProfileFile.builder().content(Paths.get("myProfileFile.file")).build())
  ```

```
            .build();
```

- El formato del archivo de perfil ha cambiado para que coincida mejor con la AWS CLI. Para obtener más información, consulte Configurar la AWS CLI en la Guía del usuario de AWS Command Line Interface.

Cambios del proveedor de credenciales entre las versiones 1.x y 2.x

`AWSCredentialsProvider`

Categoría del cambio	1.x	2.x
Nombre del paquete/clase	`com.amazonaws.auth.AWSCredentialsProvider`	`software.amazon.awssdk.auth.credentials.AwsCredentialsProvider`
Nombre del método	`getCredentials`	`resolveCredentials`
Método no admitido	`refresh`	No admitido

`DefaultAWSCredentialsProviderChain`

Categoría del cambio	1.x	2.x
Nombre del paquete/clase	`com.amazonaws.auth.DefaultAWSCredentialsProviderChain`	`software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider`
Creación	`new DefaultAWSCredentialsProviderChain`	`DefaultCredentialsProvider.create`
Método no admitido	`getInstance`	No admitido
Orden de prioridad de ajustes externos	Variables de entorno antes que propiedades del sistema	Propiedades del sistema antes que variables de entorno

`AWSStaticCredentialsProvider`

Categoría del cambio	1.x	2.x
Nombre del paquete/clase	`com.amazonaws.auth.AWSStaticCredentialsProvider`	`software.amazon.awssdk.auth.credentials.StaticCredentialsProvider`
Creación	`new AWSStaticCredentialsProvider`	`StaticCredentialsProvider.create`

`EnvironmentVariableCredentialsProvider`

Categoría del cambio	1.x	2.x
Nombre del paquete/clase	`com.amazonaws.auth.EnvironmentVariableCredentialsProvider`	`software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider`
Creación	`new EnvironmentVariableCredentialsProvider`	`EnvironmentVariableCredentialsProvider.create`
Nombre de la variable de entorno	`AWS_ACCESS_KEY`	`AWS_ACCESS_KEY_ID`
	`AWS_SECRET_KEY`	`AWS_SECRET_ACCESS_KEY`

`SystemPropertiesCredentialsProvider`

Categoría del cambio	1.x	2.x
Nombre del paquete/clase	`com.amazonaws.auth.SystemPropertiesCredentialsProvider`	`software.amazon.awssdk.auth.credentials.SystemPropertyCredentialsProvider`
Creación	`new SystemPropertiesCredentialsProvider`	`SystemPropertiesCredentialsProvider.create`
Nombre de la propiedad del sistema	`aws.secretKey`	`aws.secretAccessKey`

`ProfileCredentialsProvider`

Categoría del cambio	1.x	2.x
Nombre del paquete/clase	`com.amazonaws.auth.profile.ProfileCredentialsProvider`	`software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider`
Creación	`new ProfileCredentialsProvider`	`ProfileCredentialsProvider.create`
Ubicación del perfil personalizado	• `AWS_CREDENTIAL_PROFILES_FILE` variable de entorno • `new ProfileCredentialsProvider`	• `AWS_SHARED_CREDENTIALS_FILE` variable de entorno • `ProfileCredentialsProvider.builder`

`ContainerCredentialsProvider`

Categoría del cambio	1.x	2.x
Nombre del paquete/clase	`com.amazonaws.auth.ContainerCredentialsProvider`	`software.amazon.awssdk.auth.credentials.ContainerCredentialsProvider`
Creación	`new ContainerCredentialsProvider`	`ContainerCredentialsProvider.create`
Especificación de actualización asincrónica	No admitido	Comportamiento predeterminado

`InstanceProfileCredentialsProvider`

Categoría del cambio	1.x	2.x
Nombre del paquete/clase	`com.amazonaws.auth.InstanceProfileCredentialsProvider`	`software.amazon.awssdk.auth.credentials.InstanceProfileCredentialsProvider`
Creación	`new InstanceProfileCredentialsProvider`	`InstanceProfileCredentialsProvider.create`
Especificación de actualización asincrónica	`new InstanceProfileCredentialsProvider(true)`	`InstanceProfileCredentialProvider.builder().asyncCredentialUpdateEnabled(true).build()`
Nombre de la propiedad del sistema	`com.amazonaws.sdk.disableEc2Metadata`	`aws.disableEc2Metadata`

Categoría del cambio	1.x	2.x
	`com.amazonaws.sdk.ec2MetadataServiceEndpointOverride`	`aws.ec2MetadataServiceEndpoint`

`STSAssumeRoleSessionCredentialsProvider`

Categoría del cambio	1.x	2.x
Nombre del paquete/clase	`com.amazonaws.auth.STSAssumeRoleSessionCredentialsProvider`	`software.amazon.awssdk.services.sts.auth.StsAssumeRoleCredentialsProvider`
Creación	• `new STSAssumeRoleSessionCredentialsProvider` • `new STSAssumeRoleSessionCredentialsProvider.Builder`	`StsAssumeRoleCredentialsProvider.builder`
Actualización asincrónica	Comportamiento predeterminado	Comportamiento predeterminado
Configuración	`new STSAssumeRoleSessionCredentialsProvider.Builder`	Configuración de una solicitud `StsClient` y `AssumeRoleRequest`

`STSSessionCredentialsProvider`

Categoría del cambio	1.x	2.x
Nombre del paquete/clase	`com.amazonaws.auth.STSSessionCredentialsProvider`	`software.amazon.awssdk.services.sts.auth.StsGetSessionTokenCredentialsProvider`
Creación	`new STSSessionCredentialsProvider`	`StsGetSessionTokenCredentialsProvider.builder`
Actualización asincrónica	Comportamiento predeterminado	`StsGetSessionTokenCredentialsProvider.builder`
Configuración	Parámetros del constructor	Configuración de una solicitud `StsClient` y `GetSessionTokenRequest` en un compilador

`WebIdentityFederationSessionCredentialsProvider`

Categoría del cambio	1.x	2.x
Nombre del paquete/clase	`com.amazonaws.auth.WebIdentityFederationSessionCredentialsProvider`	`software.amazon.awssdk.services.sts.auth.StsAssumeRoleWithWebIdentityCredentialsProvider`
Creación	`new WebIdentityFederationSessionCredentialsProvider`	`StsAssumeRoleWithWebIdentityCredentialsProvider.builder`

Categoría del cambio	1.x	2.x
Actualización asincrónica	Comportamiento predeterminado	`StsAssumeRoleWithWebIdentityCredentialsProvider.builder`
Configuración	Parámetros del constructor	Configuración de una solicitud `StsClient` y `AssumeRoleWithWebIdentityRequest` en un compilador

Clases reemplazadas

Clase 1.x	Clases de reemplazo 2.x
`com.amazonaws.auth.EC2ContainerCredentialsProviderWrapper`	`software.amazon.awssdk.auth.credentials.ContainerCredentialsProvider` y `software.amazon.awssdk.auth.credentials.InstanceProfileCredentialsProvider`
`com.amazonaws.services.s3.S3CredentialsProviderChain`	`software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider` y `software.amazon.awssdk.auth.credentials.AnonymousCredentialsProvider`

Clases eliminadas

Clase 1.x
`com.amazonaws.auth.ClasspathPropertiesFileCredentialsProvider`
`com.amazonaws.auth.PropertiesFileCredentialsProvider`

Cambios de región

En esta sección se describen los cambios implementados en el AWS SDK para Java 2.x para usar las clases `Region` y `Regions`.

Configuración de región

- Algunos servicios de AWS no tienen puntos de conexión específicos de cada región. Al utilizar dichos servicios, debe configurar la región como `Region.AWS_GLOBAL` o `Region.AWS_CN_GLOBAL`.

  Example

  ```
  Region region = Region.AWS_GLOBAL;
  ```

- Las clases `com.amazonaws.regions.Regions` y `com.amazonaws.regions.Region` se combinan ahora en una clase, `software.amazon.awssdk.regions.Region`.

Asignaciones de nombres de métodos y clases

Las tablas siguientes asignan clases relacionadas con la región entre las versiones 1.x y 2.x del AWS SDK para Java. Puede crear una instancia de estas clases utilizando el método `of()`.

Example

```
RegionMetadata regionMetadata = RegionMetadata.of(Region.US_EAST_1);
```

Cambios en el método de clases de regiones 1.x

1.x	2.x
`Regions.fromName`	`Region.of`
`Regions.getName`	`Region.id`
`Regions.getDescription`	`Region.metadata().description()`
`Regions.getCurrentRegion`	No es compatible
`Regions.DEFAULT_REGION`	No es compatible

1.x	2.x
`Regions.name`	`Region.id`

Cambios en el método de clases de región 1.x

1.x	2.x
`Region.getName`	`Region.id`
`Region.hasHttpsEndpoint`	No es compatible
`Region.hasHttpEndpoint`	No es compatible
`Region.getAvailableEndpoints`	No es compatible
`Region.createClient`	No es compatible

Cambios de método de la clase RegionMetadata

1.x	2.x
`RegionMetadata.getName`	`RegionMetadata.name`
`RegionMetadata.getDomain`	`RegionMetadata.domain`
`RegionMetadata.getPartition`	`RegionMetadata.partition`

Cambios de método de la clase ServiceMetadata

1.x	2.x
`Region.getServiceEndpoint`	`ServiceMetadata.endpointFor(Region)`
`Region.isServiceSupported`	`ServiceMetadata.regions().contains(Region)`

Cambios en operaciones, solicitudes y respuestas

En la versión 2 del SDK para Java, las solicitudes se pasan a una operación de cliente. Por ejemplo, `DynamoDbClient's PutItemRequest` se pasa a la operación `DynamoDbClient.putItem`. Estas operaciones devuelven una respuesta de Servicio de AWS, como un`PutItemResponse`.

La versión 2 del SDK para Java presenta los siguientes cambios con respecto a la versión 1.

- Las operaciones con varias páginas de respuesta ahora tienen un método `Paginator` para iterar automáticamente todos los elementos de la respuesta.
- No se pueden mutar solicitudes y respuestas.
- Debe crear solicitudes y respuestas con un método de creador estático en lugar de un constructor. Por ejemplo, `new PutItemRequest().withTableName(...)` de la versión 1 ahora es `PutItemRequest.builder().tableName(...).build()`.
- Las operaciones admiten una forma abreviada de crear solicitudes: `dynamoDbClient.putItem(request -> request.tableName(...))`.

En las siguientes secciones se describen cambios específicos entre la versión 1 y la 2. Algunos cambios en los tipos de parámetros se pueden convertir automáticamente mediante la herramienta de migración, mientras que otros cambios requieren actualizaciones manuales del código.

Cambios en el parámetro Fecha

En la versión 1, muchas operaciones aceptaban objetos `java.util.Date` como parámetros basados en tiempo. En la versión 2, estas operaciones utilizan objetos `java.time.Instant` en su lugar.

Puede convertir los parámetros `Date` automáticamente mediante la herramienta de migración o puede convertirlos manualmente llamando al método `toInstant()` del objeto `Date`.

Example- Genere una URL prefirmada con fecha de caducidad en la versión 1

```
// Generate a presigned URL that expires at a specific date
Date expiration = new Date(System.currentTimeMillis() + 3600000); // 1 hour from now
URL presignedUrl = s3Client.generatePresignedUrl(bucketName, keyName, expiration);
```

Example- Genere una URL prefirmada con un instante de caducidad en la versión 2

```
// Generate a presigned URL that expires at a specific instant
```

```
Date expiration = new Date(System.currentTimeMillis() + 3600000); // 1 hour from now
PresignedGetObjectRequest presignedRequest = presigner.presignGetObject(
    GetObjectPresignRequest.builder()
        .getObjectRequest(GetObjectRequest.builder()
            .bucket(bucketName)
            .key(keyName)
            .build())
        .signatureDuration(Duration.between(Instant.now(), expiration.toInstant()))
        .build());
```

Cambios en el tratamiento de datos binarios

En la versión 1, los datos binarios se trataban utilizando objetos `ByteBuffer` directamente. En la versión 2, el SDK utiliza objetos `SdkBytes` que proporcionan una forma más cómoda y segura de trabajar con datos binarios.

Puede convertir `SdkBytes` a `ByteBuffer` automáticamente mediante la herramienta de migración o puede convertirlos manualmente llamando a `asByteBuffer()` en el objeto `SdkBytes` devuelto.

Example- Obtenga datos binarios de un atributo de mensaje en la versión 1

```
// Get binary data from a message attribute
MessageAttributeValue messageAttributeValue = new MessageAttributeValue();
ByteBuffer binaryValue = messageAttributeValue.getBinaryValue();
String binaryString = new String(messageAttributeValue.getBinaryValue().array());
```

Example- Obtenga datos binarios de un atributo de mensaje en la versión 2

```
// Get binary data from a message attribute
MessageAttributeValue messageAttributeValue = MessageAttributeValue.builder().build();
ByteBuffer binaryValue = messageAttributeValue.binaryValue().asByteBuffer();
String binaryString = new
 String(messageAttributeValue.binaryValue().asByteBuffer().array());
```

Cambios en el parámetro Tiempo de espera

En la versión 1, los valores de tiempo de espera se especificaban como valores enteros que representaban milisegundos. En la versión 2, los parámetros de tiempo de espera utilizan objetos `java.time.Duration` para mejorar la seguridad y claridad de los textos.

Puede convertir los valores de tiempo de espera numéricos automáticamente mediante la herramienta de migración, o puede convertirlos manualmente ajustando los valores numéricos con el método de fábrica de `Duration` adecuado.

Example- Establezca un tiempo de espera de solicitud en la versión 1

```
// Set request timeout in milliseconds
ClientConfiguration clientConfiguration = new ClientConfiguration();
clientConfiguration.setRequestTimeout(5000); // 5 seconds
```

Example- Establezca un tiempo de espera de solicitud en la versión 2

```
// Set request timeout using Duration
ClientConfiguration clientConfiguration = new ClientConfiguration();
clientConfiguration.setRequestTimeout(Duration.ofMillis(5000)); // 5 seconds

// Or more clearly:
clientConfiguration.setRequestTimeout(Duration.ofSeconds(5)); // 5 seconds
```

Puede usar uno de los siguientes métodos de fábrica de `Duration` para los valores de tiempo de espera:

- `Duration.ofMillis(long millis)`: para valores de milisegundos.
- `Duration.ofSeconds(long seconds)`: para valores de segundos.
- `Duration.ofMinutes(long minutes)`: para valores de minutos.

Diferencias en la operación de streaming entre 1.x y 2.x del AWS SDK para Java

Las operaciones de streaming, como Amazon S3 `getObject` y sus `putObject` métodos, admiten el no bloqueo I/O en la versión 2.x del SDK. Como resultado, los objetos del modelo de solicitud y respuesta ya no toman un `InputStream` como parámetro. En su lugar, para solicitudes sincrónicas, el objeto de solicitud acepta `RequestBody`, que es un flujo de bytes. El equivalente asincrónico acepta un `AsyncRequestBody`.

Example de la operación **`putObject`** de Amazon S3 en 1.x

```
s3client.putObject(BUCKET, KEY, new File(file_path));
```

Example de la operación **`putObject`** de Amazon S3 en 2.x

```
s3client.putObject(PutObjectRequest.builder()
                                   .bucket(BUCKET)
                                   .key(KEY)
                                   .build(),
                   RequestBody.of(Paths.get("myfile.in")));
```

Un objeto de respuesta de streaming acepta un `ResponseTransformer` para clientes sincrónicos y un `AsyncResponseTransformer` para asincrónicos en V2.

Example de la operación **`getObject`** de Amazon S3 en 1.x

```
S3Object o = s3.getObject(bucket, key);
S3ObjectInputStream s3is = o.getObjectContent();
FileOutputStream fos = new FileOutputStream(new File(key));
```

Example de la operación **`getObject`** de Amazon S3 en 2.x

```
s3client.getObject(GetObjectRequest.builder().bucket(bucket).key(key).build(),
  ResponseTransformer.toFile(Paths.get("key")));
```

En el SDK para Java 2.x, las operaciones de respuesta de streaming tienen un método `AsBytes` para cargar la respuesta en la memoria y simplificar las conversiones de tipo común en la memoria.

Diferencias de serialización entre 1.x y 2.x del AWS SDK para Java

Enumere los objetos para solicitar la diferencia de parámetros

Los SDK para Java v1.x y v2.x difieren en la forma en que serializan los objetos de lista para solicitar parámetros.

El SDK para Java 1.x no serializa una lista vacía, mientras que el SDK para Java 2.x serializa una lista vacía como un parámetro vacío.

Por ejemplo, pensemos en un servicio con un `SampleOperation` que toma un `SampleRequest`. `SampleRequest` acepta dos parámetros: un tipo de cadena `str1` y un tipo de lista `listParam`, como se muestra en los siguientes ejemplos.

Example de **`SampleOperation`** en 1.x

```
SampleRequest v1Request = new SampleRequest()
```

```
    .withStr1("TestName");

sampleServiceV1Client.sampleOperation(v1Request);
```

El registro a nivel de cable muestra que el parámetro `listParam` no está serializado.

```
Action=SampleOperation&Version=2011-01-01&str1=TestName
```

Example de **`SampleOperation`** en 2.x

```
sampleServiceV2Client.sampleOperation(b -> b
    .str1("TestName"));
```

El registro a nivel de cable muestra que el parámetro `listParam` está serializado con ningún valor.

```
Action=SampleOperation&Version=2011-01-01&str1=TestName&listParam=
```

POJOs en la V1 en comparación con los constructores de la V2

Dado que SDK V1 para Java usa clases POJO mutables, las bibliotecas de serialización y deserialización, como Jackson, pueden usar objetos de modelo directamente.

El SDK V2 para Java, por el contrario, utiliza objetos de modelo inmutables. Debe usar un compilador intermedio para realizar desserialización.

El siguiente ejemplo muestra las diferencias entre de/serializing una llamada a la `headBucket` API con la V1 y la V2 con un Jackson`ObjectMapper`.

```
    public void sendRequest() throws IOException {
        final String bucketName = "amzn-s3-demo-bucket";
        final ObjectMapper mapper = new ObjectMapper();

        // V1 uses POJOs to serialize and deserialize.
        final AmazonS3 v1S3Client = AmazonS3ClientBuilder.defaultClient();
        HeadBucketResult resultV1 = v1S3Client.headBucket(
            new HeadBucketRequest(bucketName));

        String v1Serialized = mapper.writeValueAsString(resultV1);

        HeadBucketResult deserializedV1 = mapper.readValue(v1Serialized,
 HeadBucketResult.class);
```

```
        // V2 uses builders to serialize and deserialize.
        S3Client v2S3Client = S3Client.create();
        HeadBucketResponse v2Response = v2S3Client.headBucket(
            b -> b.bucket(bucketName));

        String v2Serialized = mapper.writeValueAsString(
            v2Response.toBuilder());

        HeadBucketResponse v2Deserialized = mapper.readValue(
            v2Serialized, HeadBucketResponse.serializableBuilderClass())
            .build();
    }
```

Diferencias de deserialización entre 1.x y 2.x del AWS SDK para Java

Colecciones vacías en V2 en comparación con **`nulls`** en V1

Los SDK para Java v1.x y v2.x difieren en la forma en que deserializan las respuestas de JSON con listas y mapas vacíos.

Cuando el SDK recibe una respuesta en la que falta una propiedad que está modelada como lista o mapa, la V1 deserializa la propiedad que falta en `null`, mientras que la V2 deserializa la propiedad en un objeto de colección vacío e inmutable.

Por ejemplo, considere la respuesta que devuelve el método `describeTable` desde un cliente de DynamoDB. El siguiente método de ejemplo contiene un cliente de DynamoDB V2 y un cliente de DynamoDB V1 que ejecutan el método `describeTable` en una tabla que no tiene índices secundarios globales.

Example de la deserialización de una propiedad modelada como lista que falta en la respuesta

```
public void deserializationDiffs(){

    DescribeTableResponse v2Response = dynamoDbClientV2.describeTable(builder ->
 builder.tableName(TABLE_NAME));
    // V2 provides has* methods on model objects for list/map members. No null check
 needed.
    LOGGER.info( String.valueOf(v2Response.table().hasGlobalSecondaryIndexes()) );

 LOGGER.info( String.valueOf(v2Response.table().globalSecondaryIndexes().isEmpty()) );
    // V2 deserialize to an empty collection.
    LOGGER.info(v2Response.table().globalSecondaryIndexes().toString());
```

```
    // V1 deserialize to null.
    DescribeTableResult v1Result = dynamoDbClientV1.describeTable(new
 DescribeTableRequest(TABLE_NAME));
    if (v1Result.getTable().getGlobalSecondaryIndexes() != null){
        LOGGER.info(v1Result.getTable().getGlobalSecondaryIndexes().toString());
    } else {
        LOGGER.info("The list of global secondary indexes returned by the V1 call is
 <null>");
    }
}
```

A continuación se muestra la salida registrada:

```
INFO  org.example.DeserializationDifferences:45 - false
INFO  org.example.DeserializationDifferences:46 - true
INFO  org.example.DeserializationDifferences:48 - []
INFO  org.example.DeserializationDifferences:55 - The list of global secondary indexes
 returned by the V1 call is <null>
```

El SDK 2.x de Java adopta un método idiomático deserializando mapas y listas vacías en colecciones vacías inmutables en lugar de devolver `null`, lo que promueve un código más seguro y conciso. Con la V2 puede comprobar si un servicio ha devuelto un atributo modelado como lista o mapa con el método `has*`, como los `hasGlobalSecondaryIndexes` que se muestran en el ejemplo anterior.

Este método evita la necesidad de realizar comprobaciones de `null` explícitas y se ajusta a las modernas prácticas recomendadas de Java para administrar estructuras de datos ausentes o vacías.

Ejemplo completo

```
package org.example;

import com.amazonaws.regions.Regions;
import com.amazonaws.services.dynamodbv2.AmazonDynamoDB;
import com.amazonaws.services.dynamodbv2.AmazonDynamoDBClientBuilder;
import com.amazonaws.services.dynamodbv2.model.DescribeTableRequest;
import com.amazonaws.services.dynamodbv2.model.DescribeTableResult;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.BillingMode;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableResponse;
```

```
import software.amazon.awssdk.services.dynamodb.model.KeyType;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;

import java.util.UUID;

public class DeserializationDifferences {
    private static final Logger LOGGER =
 LoggerFactory.getLogger(DeserializationDifferences.class);
    private static final String TABLE_NAME = "DeserializationTable-" +
 UUID.randomUUID();
    DynamoDbClient dynamoDbClientV2 = DynamoDbClient.create();
    AmazonDynamoDB dynamoDbClientV1 =
 AmazonDynamoDBClientBuilder.standard().withRegion(Regions.US_EAST_1).build();

    public static void main(String[] args) {

        DeserializationDifferences difference = new DeserializationDifferences();
        difference.createTable();
        difference.deserializationDiffs();
        difference.deleteTable();
    }

    public void createTable(){
        dynamoDbClientV2.createTable(b -> b
                .billingMode(BillingMode.PAY_PER_REQUEST)
                .tableName(TABLE_NAME)
                .keySchema(b1 -> b1.attributeName("Id").keyType(KeyType.HASH))
                .attributeDefinitions(b2 ->
 b2.attributeName("Id").attributeType(ScalarAttributeType.S)));
        dynamoDbClientV2.waiter().waitUntilTableExists(b -> b.tableName(TABLE_NAME));
    }

    public void deserializationDiffs(){

        DescribeTableResponse v2Response = dynamoDbClientV2.describeTable(builder ->
 builder.tableName(TABLE_NAME));
        // V2 provides has* methods on model objects for list/map members. No null
 check needed.
        LOGGER.info( String.valueOf(v2Response.table().hasGlobalSecondaryIndexes()) );

 LOGGER.info( String.valueOf(v2Response.table().globalSecondaryIndexes().isEmpty()) );
        // V2 deserialize to an empty collection.
        LOGGER.info(v2Response.table().globalSecondaryIndexes().toString());
```

```
        // V1 deserialize to null.
        DescribeTableResult v1Result = dynamoDbClientV1.describeTable(new
 DescribeTableRequest(TABLE_NAME));
        if (v1Result.getTable().getGlobalSecondaryIndexes() != null){
            LOGGER.info(v1Result.getTable().getGlobalSecondaryIndexes().toString());
        } else {
            LOGGER.info("The list of global secondary indexes returned by the V1 call
 is <null>");
        }
    }

    public void deleteTable(){
        dynamoDbClientV2.deleteTable(b -> b.tableName(TABLE_NAME));
        dynamoDbClientV2.waiter().waitUntilTableNotExists(b ->
 b.tableName(TABLE_NAME));
    }
}
```

La respuesta de JSON para el método `describeTable` del cliente de la V1 y V2 no contiene ningún atributo `GlobalSecondaryIndexes`:

```
{
  "Table": {
    "AttributeDefinitions": [
      {
        "AttributeName": "Id",
        "AttributeType": "S"
      }
    ],
    "BillingModeSummary": {
      "BillingMode": "PAY_PER_REQUEST",
      "LastUpdateToPayPerRequestDateTime": ...
    },
    "CreationDateTime": ...,
    "DeletionProtectionEnabled": false,
    "ItemCount": 0,
    "KeySchema": [
      {
        "AttributeName": "Id",
        "KeyType": "HASH"
      }
    ],
    "ProvisionedThroughput": {
```

```
      "NumberOfDecreasesToday": 0,
      "ReadCapacityUnits": 0,
      "WriteCapacityUnits": 0
    },
    "TableArn": "arn:aws:dynamodb:us-east-1:11111111111:table/
DeserializationTable-...",
    "TableId": "...",
    "TableName": "DeserializationTable-...",
    "TableSizeBytes": 0,
    "TableStatus": "ACTIVE",
    "TableThroughputModeSummary": {
      "LastUpdateToPayPerRequestDateTime": ...,
      "TableThroughputMode": "PAY_PER_REQUEST"
    },
    "WarmThroughput": {
      "ReadUnitsPerSecond": 12000,
      "Status": "ACTIVE",
      "WriteUnitsPerSecond": 4000
    }
  }
}
```

Cambios de excepción

Los nombre de clases de excepción también han cambiado, así como sus estructuras y relaciones. `software.amazon.awssdk.core.exception.SdkException` es la nueva clase de `Exception` base que amplían todas las demás excepciones.

En esta tabla se mapean los cambios de nombres de clase de excepción.

1.x	2.x
`com.amazonaws.SdkBaseException com.amazonaws.AmazonClientException`	`software.amazon.awssdk.core.exception.SdkException`
`com.amazonaws.SdkClientException`	`software.amazon.awssdk.core.exception.SdkClientException`

1.x	2.x
`com.amazonaws.AmazonServiceException`	`software.amazon.awssdk.awscore.exception.AwsServiceException`

En la siguiente tabla se mapean los métodos de las clases de excepción entre la versión 1.x y la 2.x.

1.x	2.x
`AmazonServiceException.getRequestId`	`SdkServiceException.requestId`
`AmazonServiceException.getServiceName`	`AwsServiceException.awsErrorDetails().serviceName`
`AmazonServiceException.getErrorCode`	`AwsServiceException.awsErrorDetails().errorCode`
`AmazonServiceException.getErrorMessage`	`AwsServiceException.awsErrorDetails().errorMessage`
`AmazonServiceException.getStatusCode`	`AwsServiceException.awsErrorDetails().sdkHttpResponse().statusCode`
`AmazonServiceException.getHttpHeaders`	`AwsServiceException.awsErrorDetails().sdkHttpResponse().headers`
`AmazonServiceException.rawResponse`	`AwsServiceException.awsErrorDetails().rawResponse`

Cambios específicos de los servicios

Cambios en Amazon S3

SDK para Java 2.x deshabilita el acceso anónimo de forma predeterminada. Por lo tanto, debe habilitar el acceso anónimo mediante el `AnonymousCredentialsProvider`.

Cambios en nombres de operaciones

Muchos de los nombres de operación para el cliente de Amazon S3 han cambiado en el AWS SDK para Java 2.x. En la versión 1.x, el cliente de Amazon S3 no se generaba directamente desde la API de servicio. Esto se traduce en una incoherencia entre las operaciones de SDK y la API de servicio. En la versión 2.x, ahora generamos el cliente de Amazon S3 para que sea más coherente con la API de servicio.

En la tabla siguiente se muestran los nombres de operaciones en las dos versiones.

Nombres de operaciones de Amazon S3

1.x	2.x
`abortMultipartUpload`	`abortMultipartUpload`
`changeObjectStorageClass`	`copyObject`
`completeMultipartUpload`	`completeMultipartUpload`
`copyObject`	`copyObject`
`copyPart`	`uploadPartCopy`
`createBucket`	`createBucket`
`deleteBucket`	`deleteBucket`
`deleteBucketAnalyticsConfiguration`	`deleteBucketAnalyticsConfiguration`
`deleteBucketCrossOriginConfiguration`	`deleteBucketCors`
`deleteBucketEncryption`	`deleteBucketEncryption`

1.x	2.x
deleteBucketInventoryConfiguration	deleteBucketInventoryConfiguration
deleteBucketLifecycleConfiguration	deleteBucketLifecycle
deleteBucketMetricsConfiguration	deleteBucketMetricsConfiguration
deleteBucketPolicy	deleteBucketPolicy
deleteBucketReplicationConfiguration	deleteBucketReplication
deleteBucketTaggingConfiguration	deleteBucketTagging
deleteBucketWebsiteConfiguration	deleteBucketWebsite
deleteObject	deleteObject
deleteObjectTagging	deleteObjectTagging
deleteObjects	deleteObjects
deleteVersion	deleteObject
disableRequesterPays	putBucketRequestPayment
doesBucketExist	headBucket
doesBucketExistV2	headBucket
doesObjectExist	headObject
enableRequesterPays	putBucketRequestPayment
generatePresignedUrl	S3Presigner
getBucketAccelerateConfiguration	getBucketAccelerateConfiguration

1.x	2.x
getBucketAcl	getBucketAcl
getBucketAnalyticsConfiguration	getBucketAnalyticsConfiguration
getBucketCrossOriginConfiguration	getBucketCors
getBucketEncryption	getBucketEncryption
getBucketInventoryConfiguration	getBucketInventoryConfiguration
getBucketLifecycleConfiguration	getBucketLifecycle o getBucketLifecycleConfiguration
getBucketLocation	getBucketLocation
getBucketLoggingConfiguration	getBucketLogging
getBucketMetricsConfiguration	getBucketMetricsConfiguration
getBucketNotificationConfiguration	getBucketNotification o getBucketNotificationConfiguration
getBucketPolicy	getBucketPolicy
getBucketReplicationConfiguration	getBucketReplication
getBucketTaggingConfiguration	getBucketTagging
getBucketVersioningConfiguration	getBucketVersioning
getBucketWebsiteConfiguration	getBucketWebsite
getObject	getObject
getObjectAcl	getObjectAcl
getObjectAsString	getObjectAsBytes().asUtf8String

1.x	2.x
getObjectMetadata	headObject
getObjectTagging	getObjectTagging
getResourceUrl	S3Utilities#getUrl
getS3AccountOwner	listBuckets
getUrl	S3Utilities#getUrl
headBucket	headBucket
initiateMultipartUpload	createMultipartUpload
isRequesterPaysEnabled	getBucketRequestPayment
listBucketAnalyticsConfigurations	listBucketAnalyticsConfigurations
listBucketInventoryConfigurations	listBucketInventoryConfigurations
listBucketMetricsConfigurations	listBucketMetricsConfigurations
listBuckets	listBuckets
listMultipartUploads	listMultipartUploads
listNextBatchOfObjects	listObjectsV2Paginator
listNextBatchOfVersions	listObjectVersionsPaginator
listObjects	listObjects
listObjectsV2	listObjectsV2
listParts	listParts
listVersions	listObjectVersions

1.x	2.x
putObject	putObject
restoreObject	restoreObject
restoreObjectV2	restoreObject
selectObjectContent	selectObjectContent
setBucketAccelerateConfiguration	putBucketAccelerateConfiguration
setBucketAcl	putBucketAcl
setBucketAnalyticsConfiguration	putBucketAnalyticsConfiguration
setBucketCrossOriginConfiguration	putBucketCors
setBucketEncryption	putBucketEncryption
setBucketInventoryConfiguration	putBucketInventoryConfiguration
setBucketLifecycleConfiguration	putBucketLifecycle o putBucketLifecycleConfiguration
setBucketLoggingConfiguration	putBucketLogging
setBucketMetricsConfiguration	putBucketMetricsConfiguration
setBucketNotificationConfiguration	putBucketNotification o putBucketNotificationConfiguration
setBucketPolicy	putBucketPolicy
setBucketReplicationConfiguration	putBucketReplication
setBucketTaggingConfiguration	putBucketTagging
setBucketVersioningConfiguration	putBucketVersioning

1.x	2.x
`setBucketWebsiteConfiguration`	`putBucketWebsite`
`setObjectAcl`	`putObjectAcl`
`setObjectRedirectLocation`	`copyObject`
`setObjectTagging`	`putObjectTagging`
`uploadPart`	`uploadPart`

Cambios en Amazon SNS

Un cliente de SNS ya no puede acceder a temas de SNS en regiones distintas de la región para la que está configurado.

Cambios en Amazon SQS

Un cliente de SQS ya no puede acceder a colas de SQS en regiones distintas de la región para la que está configurado.

Cambios en Amazon RDS

El SDK para Java 2.x utiliza `RdsUtilities#generateAuthenticationToken` en lugar de la clase `RdsIamAuthTokenGenerator` de 1.x.

Cambios en el trabajo con Amazon S3 de la versión 1 a la versión 2 del AWS SDK para Java

AWS SDK for Java 2.x Introduce cambios importantes en el cliente S3, que incluyen una nueva estructura de paquetes, nombres de clases actualizados y firmas de métodos revisadas. Si bien muchos métodos se pueden migrar automáticamente de la V1 a la V2 mediante la herramienta de migración, algunos requieren migración manual, como `listNextBatchOfObjects` y `selectObjectContent`. Además, la V2 reemplaza algunas clases de la V1, como `AccessControlList` y `CannedAccessControlList` con nuevas implementaciones.

Temas

- Diferencias del cliente S3 entre la versión 1 y la versión 2 del AWS SDK para Java
- Migre el Transfer Manager de la versión 1 a la versión 2 del AWS SDK para Java
- Cambios en el análisis de Amazon S3 URIs de la versión 1 a la versión 2
- Cambios en la API Notificaciones de eventos de S3 de la versión 1 a la 2

Diferencias del cliente S3 entre la versión 1 y la versión 2 del AWS SDK para Java

En este tema, las diferencias entre los clientes de S3 de la versión 1 y la 2 del SDK para Java se organizan según la forma en que la herramienta de migración puede automatizar la migración. La herramienta admite la migración de la mayoría de los métodos de la V1 a la V2, pero algunos métodos requieren migración manual. Además de los métodos de cliente de S3, algunas clases de S3 V1 no tienen un equivalente directo de V2, por lo que es necesario migrarlas manualmente.

Contenido

- Ejemplos de métodos V1 compatibles con la herramienta de migración
  - putObject
  - getObject
- Métodos de la V1 que requieren migración manual
  - getObject de V1 que utilizan S3ObjectId de V1 a GetObjectRequest.builder() de V2
  - getETag() de V1 que utilizan ObjectMetadata de V1 a GetObjectResponse.eTag() de V2
  - listNextBatchOfObjects de V1 a listObjectsV2Paginator de V2
  - listNextBatchOfVersions de V1 a listObjectVersionsPaginator de V2
  - selectObjectContent
  - Método setBucketAcl de V1 a acl de V2 en PutBucketAclRequest.builder()
  - Método setObjectAcl de V1 a acl de V2 en PutObjectAclRequest.builder()
  - initiateMultipartUpload de V1 a createMultipartUpload de V2
    - Ejemplo de migración
    - Diferencias en implementación
  - Método setRegion de V1 a region de V2 en compilador de clientes
  - setS3ClientOptions(S3ClientOptions clientOptions) de V1
  - setBucketLoggingConfiguration de V1 a putBucketLogging de V2
  - setBucketLifecycleConfiguration de V1 a putBucketLifecycleConfiguration de V2

  - setBucketTaggingConfiguration de V1 a putBucketTagging de V2
- Clases de la V1 que requieren migración manual
  - AccessControlList de V1 a AccessControlPolicy de V2
  - Enumeración CannedAccessControlList de V1 a la enumeraciones BucketCannedACL y ObjectCannedACL de V2
  - BucketNotificationConfiguration de V1 a NotificationConfiguration de V2
  - Método MultiFactorAuthentication de V1 a mfa de V2 en compilador de clientes

Ejemplos de métodos V1 compatibles con la herramienta de migración

La herramienta de migración migra automáticamente la mayoría de los métodos de la V1 a la V2. Los métodos `putObject` y `getObject` son dos ejemplos.

`putObject`

```
// SDK V1
s3Client.putObject("amzn-s3-demo-bucket", "my-key", "Hello World!");


// SDK V2
s3Client.putObject(req -> req
    .bucket("amzn-s3-demo-bucket")
    .key("my-key"),
    RequestBody.fromString("Hello World!"));
```

`getObject`

```
// SDK V1
S3Object object = s3Client.getObject("amzn-s3-demo-bucket", "my-key");
InputStream content = object.getObjectContent();


// SDK V2
ResponseInputStream<GetObjectResponse> response = s3Client.getObject(req -> req
    .bucket("amzn-s3-demo-bucket")
    .key("my-key"));
```

Métodos de la V1 que requieren migración manual

Debe migrar manualmente los siguientes métodos de cliente de S3 V1. Al utilizar la herramienta de migración, ve un comentario en el archivo de Java de salida de la V2 que le remite a este tema.

`getObject` de V1 que utilizan **`S3ObjectId`** de V1 a **`GetObjectRequest.builder()`** de V2

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
        .withRegion(Regions.US_WEST_2)
        .build();

S3ObjectId s3ObjectId = new S3ObjectId(
    "amzn-s3-demo-bucket",
    "object-key",
    "abc123version"
);

GetObjectRequest getRequest= new GetObjectRequest(s3ObjectId);
S3Object s3ObjectVersioned = s3Client.getObject(getRequest);


// SDK V2
// V2 does not include a 'S3ObjectId' class. V2 uses the request builder pattern
// to supply the bucket, key, and version parameters.
S3Client s3Client = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

GetObjectRequest getRequest = GetObjectRequest.builder()
    .bucket("amzn-s3-demo-bucket")
    .key("object-key")
    .versionId("abc123version")
    .build();

ResponseInputStream<GetObjectResponse> response = s3Client.getObject(getRequest);
```

`getETag()` de V1 que utilizan **`ObjectMetadata`** de V1 a **`GetObjectResponse.eTag()`** de V2

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();
```

```
S3Object object = s3ClientV1.getObject("amzn-s3-demo-bucket", "my-key");

// Double quotes are removed by the S3 client.
System.out.println(object.getObjectMetadata().getETag());

// SDK V2
S3Client s3ClientV2 = S3Client.builder()
        .region(Region.US_WEST_2)
        .build();

ResponseInputStream<GetObjectResponse> response = s3ClientV2.getObject(
        req -> req.bucket("amzn-s3-demo-bucket").key("my-key"));

// Double quotes are *NOT* removed. This is the unchanged ETag value as S3 sent it.
System.out.println(response.response().eTag());
```

listNextBatchOfObjects de V1 a **listObjectsV2Paginator** de V2

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

ObjectListing objectListing = s3ClientV1.listObjects("bucket-name");
while (objectListing.isTruncated()) {
    objectListing = s3ClientV1.listNextBatchOfObjects(objectListing);
    for (S3ObjectSummary summary : objectListing.getObjectSummaries()) {
        System.out.println(summary.getKey());
    }
}


// SDK V2
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

ListObjectsV2Request request = ListObjectsV2Request.builder()
    .bucket("bucket-name")
    .build();

// V2 returns a paginator.
```

```
ListObjectsV2Iterable responses = s3Client.listObjectsV2Paginator(request);

for (ListObjectsV2Response page : responses) {
    page.contents().forEach(content -> {
        System.out.println(content.key());
    });
}
```

listNextBatchOfVersions de V1 a **listObjectVersionsPaginator** de V2

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

VersionListing versionListing = s3ClientV1.listVersions("bucket-name", "prefix");
while (versionListing.isTruncated()) {
    versionListing = s3ClientV1.listNextBatchOfVersions(versionListing);
    for (S3VersionSummary version : versionListing.getVersionSummaries()) {
        System.out.println(version.getKey() + " " + version.getVersionId());
    }
}


// SDK V2
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

ListObjectVersionsRequest request = ListObjectVersionsRequest.builder()
    .bucket("bucket-name")
    .prefix("prefix")
    .build();

// V2 returns a paginator.
ListObjectVersionsIterable responses = s3ClientV2.listObjectVersionsPaginator(request);

for (ListObjectVersionsResponse page : responses) {
    page.versions().forEach(version -> {
        System.out.println(version.key() + " " + version.versionId());
    });
}
```

`selectObjectContent`

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

SelectObjectContentRequest request = new SelectObjectContentRequest()
    .withBucket("bucket-name")
    .withKey("object-key")
    .withExpression("select * from S3Object")
    .withExpressionType(ExpressionType.SQL)


SelectObjectContentResult result = s3ClientV1.selectObjectContent(request);
InputStream resultInputStream = result.getPayload().getRecordsInputStream();


// SDK V2
// In V2, 'selectObjectContent()' is available only on the S3AsyncClient.
// V2 handles responses using an event-based 'SelectObjectContentEventStream'.
S3AsyncClient s3ClientV2 = S3AsyncClient.builder()
    .region(Region.US_WEST_2)
    .build();

SelectObjectContentRequest request = SelectObjectContentRequest.builder()
    .bucket("bucket-name")
    .key("object-key")
    .expression("select * from S3Object")
    .expressionType(ExpressionType.SQL)
    .build();

SelectObjectContentResponseHandler handler = new SelectObjectContentResponseHandler() {
    // Implement the required abstract methods such as 'onEventStream()'.
};

CompletableFuture<Void> future = s3ClientV2.selectObjectContent(request, handler);
// The 'SelectObjectContentResponseHandler' implementation processes the results.
```

Método `setBucketAcl` de V1 a `acl` de V2 en `PutBucketAclRequest.builder()`

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
```

```
    .withRegion(Regions.US_WEST_2)
    .build();

AccessControlList acl = new AccessControlList();
acl.grantPermission(GroupGrantee.AllUsers, Permission.Read);
s3ClientV1.setBucketAcl("bucket-name", acl);


// SDK V2
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

PutBucketAclRequest request = PutBucketAclRequest.builder()
    .bucket("bucket-name")
    .acl(BucketCannedACL.PRIVATE)
    .build();

s3ClientV2.putBucketAcl(request);
```

Método **`setObjectAcl`** de V1 a **`acl`** de V2 en **`PutObjectAclRequest.builder()`**

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

AccessControlList acl = new AccessControlList();
acl.grantPermission(GroupGrantee.AllUsers, Permission.Read);
s3ClientV1.setObjectAcl("bucket-name", "object-key", acl);


// SDK V2
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

PutObjectAclRequest request = PutObjectAclRequest.builder()
    .bucket("bucket-name")
    .key("object-key")
    .acl(ObjectCannedACL.PRIVATE)
    .build();
```

```
s3ClientV2.putObjectAcl(request);
```

initiateMultipartUpload de V1 a **createMultipartUpload** de V2

Ejemplo de migración

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

ObjectMetadata metadata = new ObjectMetadata();
metadata.setContentType("application/zip");
metadata.addUserMetadata("mykey", "myvalue");

InitiateMultipartUploadRequest initRequest = new InitiateMultipartUploadRequest(
    "bucket-name",
    "object-key",
    metadata
);

InitiateMultipartUploadResult initResponse =
 s3ClientV1.initiateMultipartUpload(initRequest);
String uploadId = initResponse.getUploadId();


// SDK V2
// V1 uses ObjectMetadata methods, whereas V2 uses a simple Map.
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

CreateMultipartUploadRequest createMultipartRequest =
 CreateMultipartUploadRequest.builder()
    .bucket("amzn-s3-demo-bucket")
    .key("object-key")
    .contentType("application/zip")
    .metadata(Collections.singletonMap("mykey", "myvalue"))
    .build();

CreateMultipartUploadResponse response =
 s3ClientV2.createMultipartUpload(createMultipartRequest);
String uploadId = response.uploadId();
```

Diferencias en implementación

El valor de encabezado `Content-Type` predeterminado de los siguientes métodos es diferente según se muestra en la siguiente tabla.

Versión de SDK	Método	Valor de **`Content-Type`** predeterminado
versión 1	`initiateMultipartUpload`	`application/octet-stream`
versión 2	`createMultipartUpload`	`binary/octet-stream`

Método **`setRegion`** de V1 a **`region`** de V2 en compilador de clientes

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard().build();
s3ClientV1.setRegion(Region.getRegion(Regions.US_WEST_2));


// SDK V2
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();
```

`setS3ClientOptions(S3ClientOptions clientOptions)` de V1

En lugar de utilizar un único objeto `S3ClientOptions` con el método `setS3ClientOptions`, V2 proporciona métodos en el compilador de clientes para configurar opciones.

`setBucketLoggingConfiguration` de V1 a **`putBucketLogging`** de V2

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

BucketLoggingConfiguration loggingConfig = new BucketLoggingConfiguration();
loggingConfig.setDestinationBucketName("log-bucket");
```

```
SetBucketLoggingConfigurationRequest request = new
 SetBucketLoggingConfigurationRequest(
    "amzn-s3-demo-source-bucket",
    loggingConfig
);

s3ClientV1.setBucketLoggingConfiguration(request);


// SDK V2
// In V2, V1's 'BucketLoggingConfiguration' is replaced by 'BucketLoggingStatus'
// and 'LoggingEnabled'.
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

LoggingEnabled loggingEnabled = LoggingEnabled.builder()
    .targetBucket("log-bucket")
    .build();

BucketLoggingStatus loggingStatus = BucketLoggingStatus.builder()
    .loggingEnabled(loggingEnabled)
    .build();

PutBucketLoggingRequest request = PutBucketLoggingRequest.builder()
    .bucket("amzn-s3-demo-source-bucket")
    .bucketLoggingStatus(loggingStatus)
    .build();

s3ClientV2.putBucketLogging(request);
```

setBucketLifecycleConfiguration de V1 a **putBucketLifecycleConfiguration** de V2

```
// SDK V1
BucketLifecycleConfiguration.Rule rule = new BucketLifecycleConfiguration.Rule()
    .withId("Archive and Delete Rule")
    .withPrefix("documents/")
    .withStatus(BucketLifecycleConfiguration.ENABLED)
    .withTransitions(Arrays.asList(
        new Transition()
            .withDays(30)
            .withStorageClass(StorageClass.StandardInfrequentAccess.toString()),
```

```
        new Transition()
            .withDays(90)
            .withStorageClass(StorageClass.Glacier.toString())
    ))
    .withExpirationInDays(365);

BucketLifecycleConfiguration configuration = new BucketLifecycleConfiguration()
    .withRules(Arrays.asList(rule));

s3ClientV1.setBucketLifecycleConfiguration("amzn-s3-demo-bucket", configuration);


// SDK V2
LifecycleRule rule = LifecycleRule.builder()
    .id("Archive and Delete Rule")
    .filter(LifecycleRuleFilter.builder()
        .prefix("documents/")
        .build())
    .status(ExpirationStatus.ENABLED)
    .transitions(Arrays.asList(
        Transition.builder()
            .days(30)
            .storageClass(TransitionStorageClass.STANDARD_IA)
            .build(),
        Transition.builder()
            .days(90)
            .storageClass(TransitionStorageClass.GLACIER)
            .build()
    ))
    .expiration(LifecycleExpiration.builder()
        .days(365)
        .build())
    .build();

PutBucketLifecycleConfigurationRequest request =
 PutBucketLifecycleConfigurationRequest.builder()
    .bucket("amzn-s3-demo-bucket")
    .lifecycleConfiguration(BucketLifecycleConfiguration.builder()
        .rules(rule)
        .build())
    .build();

s3ClientV2.putBucketLifecycleConfiguration(request);
```

setBucketTaggingConfiguration de V1 a **putBucketTagging** de V2

```
// SDK V1
List<TagSet> tagsets = new ArrayList<>();
TagSet tagSet = new TagSet();
tagSet.setTag("key1", "value1");
tagSet.setTag("key2", "value2");
tagsets.add(tagSet);

BucketTaggingConfiguration bucketTaggingConfiguration = new
 BucketTaggingConfiguration();
bucketTaggingConfiguration.setTagSets(tagsets);

SetBucketTaggingConfigurationRequest request = new
 SetBucketTaggingConfigurationRequest(
    "amzn-s3-demo-bucket",
    bucketTaggingConfiguration
);

s3ClientV1.setBucketTaggingConfiguration(request);


// SDK V2
Tagging tagging = Tagging.builder()
    .tagSet(Arrays.asList(
        Tag.builder()
            .key("key1")
            .value("value1")
            .build(),
        Tag.builder()
            .key("key2")
            .value("value2")
            .build()
    ))
    .build();

PutBucketTaggingRequest request = PutBucketTaggingRequest.builder()
    .bucket("amzn-s3-demo-bucket")
    .tagging(tagging)
    .build();

s3ClientV2.putBucketTagging(request);
```

Clases de la V1 que requieren migración manual

`AccessControlList` de V1 a **`AccessControlPolicy`** de V2

```
// SDK V1
AccessControlList aclV1 = new AccessControlList();
aclV1.setOwner(new Owner("owner-id", "owner-name"));
aclV1.grantPermission(GroupGrantee.AllUsers, Permission.Read);

// SDK V2
// To migrate from V1 to V2, replace direct 'AccessControlList' modifications with an
// 'AccessControlPolicy.builder()' that contains both owner information and grants.
// Note that V2's approach requires building the complete permission set upfront rather
 than modifying permissions incrementally.
AccessControlPolicy acpV2 = AccessControlPolicy.builder()
    .owner(Owner.builder()
        .id("owner-id")
        .displayName("owner-name")
        .build())
    .grants(Arrays.asList(
         Grant.builder()
            .grantee(Grantee.builder()
                 .type(Type.GROUP)
                 .uri("http://acs.amazonaws.com/groups/global/AllUsers")
                 .build())
             .permission(Permission.READ)
             .build()
     ))
     .build();
```

Enumeración **`CannedAccessControlList`** de V1 a la enumeraciones **`BucketCannedACL`** y **`ObjectCannedACL`** de V2

```
// SDK V1
// In V1, 'CannedAccessControlList' is an enumeration of predefined ACLs.
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard().build();

// Creating a bucket.
s3ClientV1.setBucketAcl("bucket-name", CannedAccessControlList.PublicRead);

// Creating an object.
PutObjectRequest putObjectRequest = new PutObjectRequest("bucket-name", "object-key",
 file)
```

```
    .withCannedAcl(CannedAccessControlList.PublicRead);
s3ClientV1.putObject(putObjectRequest);


// SDK V2
// V2 replaces V1's 'CannedAccessControlList' with 'BucketCannedACL' for buckets and
 'ObjectCannedACL' for objects.
S3Client s3ClientV2 = S3Client.builder().build();

// Creating a bucket.
PutBucketAclRequest bucketRequest = PutBucketAclRequest.builder()
    .bucket("bucket-name")
    .acl(BucketCannedACL.PRIVATE)
    .build();
s3ClientV2.putBucketAcl(bucketRequest);

// Creating an object.
PutObjectRequest objectRequest = PutObjectRequest.builder()
    .bucket("bucket-name")
    .key("object-key")
    .acl(ObjectCannedACL.PUBLIC_READ)
    .build();
s3ClientV2.putObject(objectRequest, RequestBody.fromFile(file));
```

BucketNotificationConfiguration de V1 a **NotificationConfiguration** de V2

```
//SDK V1
BucketNotificationConfiguration notificationConfig = new
 BucketNotificationConfiguration();

// Adding configurations by name
notificationConfig.addConfiguration("lambdaConfig",
    new LambdaConfiguration("arn:aws:lambda:function", "s3:ObjectCreated:"));

notificationConfig.addConfiguration("topicConfig",
    new TopicConfiguration("arn:aws:sns:topic", "s3:ObjectRemoved:"));

notificationConfig.addConfiguration("queueConfig",
    new QueueConfiguration("arn:aws:sqs:queue", "s3:ObjectRestore:*"));

s3Client.setBucketNotificationConfiguration("bucket", notificationConfig);
```

```
// SDK V2
// In V2, V1's BucketNotificationConfiguration is renamed to
 NotificationConfiguration.
// V2 contains no common abstract class for LambdaFunction/Topic/Queue configurations.
NotificationConfiguration notificationConfig = NotificationConfiguration.builder()
    .lambdaFunctionConfigurations(
        LambdaFunctionConfiguration.builder()
            .lambdaFunctionArn("arn:aws:lambda:function")
            .events(Event.valueOf("s3:ObjectCreated:"))
            .build())
    .topicConfigurations(
        TopicConfiguration.builder()
            .topicArn("arn:aws:sns:topic")
            .events(Event.valueOf("s3:ObjectRemoved:"))
            .build())
    .queueConfigurations(
        QueueConfiguration.builder()
            .queueArn("arn:aws:sqs:queue")
            .events(Event.valueOf("s3:ObjectRestore:*"))
            .build())
    .build();

s3Client.putBucketNotificationConfiguration(req -> req
    .bucket("bucket")
    .notificationConfiguration(notificationConfig));
```

Método **`MultiFactorAuthentication`** de V1 a **`mfa`** de V2 en compilador de clientes

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

BucketVersioningConfiguration versioningConfig = new BucketVersioningConfiguration()
    .withStatus(BucketVersioningConfiguration.ENABLED);

// Create an MFA configuration object.
MultiFactorAuthentication mfa = new MultiFactorAuthentication(
    "arn:aws:iam::1234567890:mfa/user",
    "123456"
);

// Create the request object.
```

```
SetBucketVersioningConfigurationRequest request = new
 SetBucketVersioningConfigurationRequest(
    "bucket-name",
    versioningConfig,
    mfa
);

// Send the request.
s3ClientV1.setBucketVersioningConfiguration(request);


// SDK V2
// V2 replaces V1's MultiFactorAuthentication POJO with parameters you set on the
 request builder.
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

PutBucketVersioningRequest request = PutBucketVersioningRequest.builder()
    .bucket("bucket-name")
    .versioningConfiguration(VersioningConfiguration.builder()
        .status(BucketVersioningStatus.ENABLED)
        .build())
    .mfa("arn:aws:iam::1234567890:mfa/user 123456")  // Single method takes both MFA
 erial number and token.
    .build();

s3ClientV2.putBucketVersioning(request);
```

Migre el Transfer Manager de la versión 1 a la versión 2 del AWS SDK para Java

En esta guía de migración se describen las principales diferencias entre Transfer Manager v1 y S3 Transfer Manager v2, incluidos cambios de constructores, asignaciones de métodos y código de ejemplo para operaciones comunes. Tras repasar estas diferencias, podrá migrar correctamente el código existente de Transfer Manager para aprovechar el rendimiento mejorado y las operaciones asíncronas de v2.

⚠ Acerca de la herramienta AWS de migración del SDK

AWS SDK para Java Proporciona una herramienta de migración automatizada que puede migrar gran parte de la API de Transfer Manager de la versión 1 a la versión 2. Sin embargo, la herramienta de migración no es compatible con varias características de Transfer Manager

v1. En estos casos, deberá migrar manualmente el código de Transfer Manager siguiendo las instrucciones de este tema.
A lo largo de esta guía, el Estado de migración muestra si la herramienta de migración puede migrar automáticamente un constructor, un método o una característica:

- Compatible: la herramienta de migración puede transformar automáticamente este código
- No compatible: es necesario migrar el código manualmente

Incluso en el caso de los elementos marcados como “compatibles”, revise los resultados de la migración y realice pruebas exhaustivas. La migración de Transfer Manager implica cambios significativos en la arquitectura, de operaciones síncronas a asíncronas.

Descripción general de

S3 Transfer Manager v2 introduce cambios significativos en la API de Transfer Manager. S3 Transfer Manager v2 se basa en operaciones asíncronas y ofrece un mejor rendimiento, especialmente cuando se utiliza el cliente Amazon S3 AWS basado en CRT.

Diferencias clave

- Paquete: `com.amazonaws.services.s3.transfer` → `software.amazon.awssdk.transfer.s3`
- Nombres de clase: `TransferManager` → `S3TransferManager`
- Dependencia del cliente: cliente de Amazon S3 síncrono → cliente de Amazon S3 asíncrono (`S3AsyncClient`)
- Arquitectura: operaciones síncronas → operaciones asíncronas con `CompletableFuture`
- Rendimiento: mejorado con soporte para clientes basado en CRT AWS

Cambios de alto nivel

Aspecto	V1	V2
Dependencia de Maven	`aws-java-sdk-s3`	`s3-transfer-manager`
Package	`com.amazonaws.services.s3.transfer`	`software.amazon.awssdk.transfer.s3`

Aspecto	V1	V2
Clase principal	`TransferManager`	`S3TransferManager`
Cliente de Amazon S3	`AmazonS3` (sync)	`S3AsyncClient` (async)
Tipos de devolución	Operaciones de bloqueo	`CompletableFuture<T>`

dependencias Maven

V1

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>com.amazonaws</
groupId>
            <artifactId>aws-java-sdk-
bom</artifactId>
            <version>> 1.12.787[1]</
version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>com.amazonaws</gro
upId>
        <artifactId>aws-java-sdk-s3
</artifactId>
    </dependency>
</dependencies>
```

V2

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.
amazon.awssdk</groupId>
            <artifactId>bom</a
rtifactId>
            <version> 2.31.68[2]</version
>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.aw
ssdk</groupId>
        <artifactId>s3-transfer-man
ager</artifactId>
    </dependency>
    <!-- Optional: For enhanced
 performance with AWS CRT -->
    <dependency>
        <groupId>software.amazon.aw
ssdk.crt</groupId>
        <artifactId>aws-crt</artifa
ctId>
        <version> 0.38.5[3]</version>
```

V1	V2
	</dependency> </dependencies>

[1] Última versión.. [2] Última versión. [3] Última versión.

Migración de constructores de clientes

Constructores compatibles (migración automática)

Constructor V1	Equivalente V2	Estado de migración
`new TransferManager()`	`S3TransferManager.create()`	Soportado
`TransferManagerBuilder.defaultTransferManager()`	`S3TransferManager.create()`	Soportado
`TransferManagerBuilder.standard().build()`	`S3TransferManager.builder().build()`	Soportado
`new TransferManager(AWSCredentials)`	`S3TransferManager.builder() .s3Client(S3AsyncClient.builder() .credentialsProvider(...).build()) .build()`	Soportado
`new TransferManager( AWSCredentialsProvider)`	`S3TransferManager.builder() .s3Client(S3AsyncClient.builder() .credentialsProvider(...).build()) .build()`	compatible

Constructores no compatibles (se requiere migración manual)

Constructor V1	Equivalente V2	Notas de migración
`new TransferManager(AmazonS3)`	Se requiere migración manual	Cree un `S3AsyncClient` por separado
`new TransferManager(AmazonS3, ExecutorService)`	Se requiere migración manual	Cree un `S3AsyncClient` y configure el ejecutor
`new TransferManager(AmazonS3, ExecutorService, boolean)`	Se requiere migración manual	Parámetro `shutDownThreadPools` no compatible

Ejemplos de migración manual

Código V1:

```
AmazonS3 s3Client = AmazonS3ClientBuilder.defaultClient();
TransferManager transferManager = new TransferManager(s3Client);
```

Código V2:

```
// Create an `S3AsyncClient` with similar configuration
S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
    .credentialsProvider(DefaultCredentialsProvider.create())
    .build();

// Provide the configured `S3AsyncClient` to the S3 transfer manager builder.
S3TransferManager transferManager = S3TransferManager.builder()
    .s3Client(s3AsyncClient)
    .build();
```

Migración de métodos de cliente

Actualmente, la herramienta de migración admite los métodos `copy`, `download`, `upload`, `uploadDirectory`, `downloadDirectory`, `resumeDownload` y `resumeUpload` básicos.

Métodos de transferencia principales

Método V1	Método V2	Cambio de tipo de retorno	Estado de migración
`upload(String, String, File)`	`uploadFile(UploadFileRequest)`	`Upload` → `FileUpload`	Soportado
`upload(PutObjectRequest)`	`upload(UploadRequest)`	`Upload` → `Upload`	Soportado
`download(String, String, File)`	`downloadFile(DownloadFileRequest)`	`Download` → `FileDownload`	Soportado
`download(GetObjectRequest, File)`	`downloadFile(DownloadFileRequest)`	`Download` → `FileDownload`	Soportado
`copy(String, String, String, String)`	`copy(CopyRequest)`	`Copy` → `Copy`	Soportado
`copy(CopyObjectRequest)`	`copy(CopyRequest)`	`Copy` → `Copy`	Soportado
`uploadDirectory(String, String, File, boolean)`	`uploadDirectory( UploadDirectoryRequest)`	`MultipleFileUpload` → `DirectoryUpload`	Soportado
`downloadDirectory(String, String, File)`	`downloadDirectory( DownloadDirectoryRequest)`	`MultipleFileDownload` → `DirectoryDownload`	compatible

Métodos de transferencia reanudables

Método V1	Método V2	Estado de migración
`resumeUpload(PersistableUpload)`	`resumeUploadFile(ResumableFileUpload)`	Soportado
`resumeDownload(PersistableDownload)`	`resumeDownloadFile(ResumableFileDownload)`	compatible

Métricas del ciclo de vida

Método V1	Método V2	Estado de migración
`shutdownNow()`	`close()`	compatible
`shutdownNow(boolean)`	Ajuste el código manualmente mediante el método `close()`	No es compatible

Métodos de cliente V1 no compatibles

Método V1	Alternativa V2	Notas
`abortMultipartUploads(String, Date)`	Use el cliente de Amazon S3 de bajo nivel	No es compatible
`getAmazonS3Client()`	Guarde una referencia por separado	No compatible; no hay getter en v2
`getConfiguration()`	Guarde una referencia por separado	No compatible; no hay getter en v2
`uploadFileList(...)`	Realice múltiples llamadas a `uploadFile()`	No es compatible

Método V1	Alternativa V2	Notas
Métodos `copy` con un parámetro `TransferStateChangeListener`	Uso de `TransferListener`	Consulte ejemplo de migración manual
Métodos `download` con un parámetro `S3ProgressListener`	Uso de `TransferListener`	Consulte el ejemplo de migración manual
Métodos `downloadDirectory` con 4 o más parámetros		Consulte el ejemplo de migración manual
Método `upload` con un parámetro `ObjectMetadataProvider`	Establezca metadatos en la solicitud	Consulte el ejemplo de migración manual
Métodos `uploadDirectory` con parámetro `*Provider`	Establezca etiquetas en la solicitud	Consulte el ejemplo de migración manual

Métodos **`copy`** con un parámetro **`TransferStateChangeListener`**

- `copy(CopyObjectRequest copyObjectRequest, AmazonS3 srcS3, TransferStateChangeListener stateChangeListener)`
- `copy(CopyObjectRequest copyObjectRequest, TransferStateChangeListener stateChangeListener)`

```
// V1
 ---------------------------------------------------------------------------------------------
// Initialize source S3 client
AmazonS3 s3client = AmazonS3ClientBuilder.standard()
                .withRegion("us-west-2")
                .build();

// Initialize Transfer Manager
TransferManager tm = TransferManagerBuilder.standard()
                .withS3Client(srcS3)
                .build();
```

```
CopyObjectRequest copyObjectRequest = new CopyObjectRequest(
                "amzn-s3-demo-source-bucket",
                "source-key",
                "amzn-s3-demo-destination-bucket",
                "destination-key"
        );

TransferStateChangeListener stateChangeListener = new TransferStateChangeListener() {
            @Override
            public void transferStateChanged(Transfer transfer, TransferState state) {
              //Implementation of the TransferStateChangeListener
            }
        };

Copy copy = tm.copy(copyObjectRequest, srcS3, stateChangeListener);


// V2
 ---------------------------------------------------------------------------------------------------
S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
                .region(Region.US_WEST_2)
                .build();

S3TransferManager transferManager = S3TransferManager.builder()
                .s3Client(s3AsyncClient)
                .build();

// Create transfer listener (equivalent to TransferStateChangeListener in v1)

TransferListener transferListener = new TransferListener() {
            @Override
            public void transferInitiated(Context.TransferInitiated context) {
               //Implementation
               System.out.println("Transfer initiated");
            }

            @Override
            public void bytesTransferred(Context.BytesTransferred context) {
                //Implementation
                System.out.println("Bytes transferred");
            }

            @Override
```

```
            public void transferComplete(Context.TransferComplete context) {
                //Implementation
                System.out.println("Transfer completed!");
            }

            @Override
            public void transferFailed(Context.TransferFailed context) {
                //Implementation
                System.out.println("Transfer failed");
            }
        };

CopyRequest copyRequest = CopyRequest.builder()
                              .copyObjectRequest(req -> req
                                  .sourceBucket("amzn-s3-demo-source-bucket")
                                  .sourceKey("source-key")
                                  .destinationBucket("amzn-s3-demo-destination-bucket")
                                  .destinationKey("destination-key")
                               )
                                .addTransferListener(transferListener) // Configure the
 transferListener into the request
                                .build();

Copy copy = transferManager.copy(copyRequest);
```

Métodos **`download`** con un parámetro **`S3ProgressListener`**

- `download(GetObjectRequest getObjectRequest, File file, S3ProgressListener progressListener)`
- `download(GetObjectRequest getObjectRequest, File file, S3ProgressListener progressListener, long timeoutMillis)`
- `download(GetObjectRequest getObjectRequest, File file, S3ProgressListener progressListener, long timeoutMillis, boolean resumeOnRetry)`

```
// V1
 ----------------------------------------------------------------------------------------
S3ProgressListener progressListener = new S3ProgressListener() {
        @Override
        public void progressChanged(com.amazonaws.event.ProgressEvent progressEvent) {
            long bytes = progressEvent.getBytesTransferred();
            ProgressEventType eventType = progressEvent.getEventType();
```

```
            // Use bytes and eventType as needed
        }

        @Override
        public void onPersistableTransfer(PersistableTransfer persistableTransfer) {

        }
    };

Download download1 = tm.download(getObjectRequest, file, progressListener);
Download download2 = tm.download(getObjectRequest, file, progressListener,
 timeoutMillis)
Download download3 = tm.download(getObjectRequest, file, progressListener,
 timeoutMillis, true)

// V2
 ---------------------------------------------------------------------------------------------
TransferListener transferListener = new TransferListener() {
    @Override
    public void transferInitiated(Context.InitializedContext context) {
        // Equivalent to ProgressEventType.TRANSFER_STARTED_EVENT
        System.out.println("Transfer initiated");
    }

    @Override
    public void bytesTransferred(Context.BytesTransferred context) {
        // Equivalent to ProgressEventType.REQUEST_BYTE_TRANSFER_EVENT
        long bytes = context.bytesTransferred();
        System.out.println("Bytes transferred: " + bytes);
    }

    @Override
    public void transferComplete(Context.TransferComplete context) {
        // Equivalent to ProgressEventType.TRANSFER_COMPLETED_EVENT
        System.out.println("Transfer completed");
    }

    @Override
    public void transferFailed(Context.TransferFailed context) {
        // Equivalent to ProgressEventType.TRANSFER_FAILED_EVENT
        System.out.println("Transfer failed: " + context.exception().getMessage());
    }
};
DownloadFileRequest downloadFileRequest =
```

```
                            DownloadFileRequest.builder()
                                .getObjectRequest(getObjectRequest)
                                .destination(file.toPath())
                                .addTransferListener(transferListener)
                                .build();

// For download1
FileDownload download = transferManager.downloadFile(downloadFileRequest);

// For download2
CompletedFileDownload completedFileDownload = download.completionFuture()
                                                      .get(timeoutMillis,
 TimeUnit.MILLISECONDS);

// For download3, the v2 SDK does not have a direct equiavalent to the `resumeOnRetry`
 method of v1.
// If a download is interrupted, you need to start a new download request.
```

Métodos **`downloadDirectory`** con 4 o más parámetros

- `downloadDirectory(String bucketName, String keyPrefix, File destinationDirectory, boolean resumeOnRetry)`
- `downloadDirectory(String bucketName, String keyPrefix, File destinationDirectory, boolean resumeOnRetry, KeyFilter filter)`
- `downloadDirectory(String bucketName, String keyPrefix, File destinationDirectory, KeyFilter filter)`

```
// V1
 ----------------------------------------------------------------------------------------
KeyFilter filter = new KeyFilter() {
            @Override
            public boolean shouldInclude(S3ObjectSummary objectSummary) {
                //Filter implementation
            }
        };
MultipleFileDownload multipleFileDownload = tm.downloadDirectory(bucketName, keyPrefix,
 destinationDirectory, filter);

// V2
 ----------------------------------------------------------------------------------------
// The v2 SDK does not have a direct equiavalent to the `resumeOnRetry` method of v1.
```

```
// If a download is interrupted, you need to start a new download request.
DownloadFilter filter = new DownloadFilter() {
            @Override
            public boolean test(S3Object s3Object) {
                // Filter implementation.
            }
        };

DownloadDirectoryRequest downloadDirectoryRequest =
                               DownloadDirectoryRequest.builder()
                                   .bucket(bucketName)
                                   .filter(filter)
                                   .listObjectsV2RequestTransformer(builder ->
 builder.prefix(keyPrefix))
                                   .destination(destinationDirectory.toPath())
                                   .build();

DirectoryDownload directoryDownload =
 transferManager.downloadDirectory(downloadDirectoryRequest);
```

Método **upload** con parámetro **ObjectMetadata**

- upload(String bucketName, String key, InputStream input, ObjectMetadata objectMetadata)

```
// V1
 ----------------------------------------------------------------------------------------------
ObjectMetadata metadata = new ObjectMetadata();
ObjectMetadata metadata = new ObjectMetadata();

metadata.setContentType("text/plain");        // System-defined metadata
metadata.setContentLength(22L);               // System-defined metadata
metadata.addUserMetadata("myKey", "myValue"); // User-defined metadata

PutObjectRequest putObjectRequest = new PutObjectRequest(bucketName, key, inputStream,
 metadata);

Upload upload = transferManager.upload("amzn-s3-demo-bucket", "my-key", inputStream,
 metadata);

// V2
 ----------------------------------------------------------------------------------------------
```

```
/* When you use an InputStream to upload in V2, you should specify the content length
   and use `RequestBody.fromInputStream()`.
   If you don't provide the content length, the entire stream will be buffered in
 memory.
   If you can't determine the content length, we recommend using the CRT-based S3
 client.
*/
Map<String, String> userMetadata = new HashMap<>();
userMetadata.put("x-amz-meta-myKey", "myValue");

PutObjectRequest putObjectRequest =
                        PutObjectRequest.builder()
                            .bucket("amzn-s3-demo-bucket1")
                            .key("k")
                            .contentType("text/plain") //System-defined metadata
 usually has separate methods in the builder.
                            .contentLength(22L)
                            .metadata(userMetadata) //metadata() is only for user-
defined metadata.
                            .build();

UploadRequest uploadRequest =
                        UploadRequest.builder()
                            .putObjectRequest(putObjectRequest)
                            .requestBody(AsyncRequestBody.fromInputStream(stream, 22L,
 executor))
                            .build();

transferManager.upload(uploadRequest).completionFuture().join();
```

uploadDirectory con parámetro **ObjectMetadataProvider**

- uploadDirectory(String bucketName, String virtualDirectoryKeyPrefix, File directory, boolean includeSubdirectories, ObjectMetadataProvider metadataProvider)
- uploadDirectory(String bucketName, String virtualDirectoryKeyPrefix, File directory, boolean includeSubdirectories, ObjectMetadataProvider metadataProvider, ObjectTaggingProvider taggingProvider)
- uploadDirectory(String bucketName, String virtualDirectoryKeyPrefix, File directory, boolean includeSubdirectories, ObjectMetadataProvider

```
 metadataProvider, ObjectTaggingProvider taggingProvider,
 ObjectCannedAclProvider cannedAclProvider)
```

```
// V1
 ---------------------------------------------------------------------------------------------
tm.uploadDirectory(bucketName, virtualDirectoryKeyPrefix, directory,
 includeSubdirectories, metadataProvider)
tm.uploadDirectory(bucketName, virtualDirectoryKeyPrefix, directory,
 includeSubdirectories, metadataProvider, taggingProvider)
tm.uploadDirectory(bucketName, virtualDirectoryKeyPrefix, directory,
 includeSubdirectories, metadataProvider, taggingProvider, cannedAclProvider)

// V2
 ---------------------------------------------------------------------------------------------
UploadDirectoryRequest request = UploadDirectoryRequest.builder()
                                 .bucket(bucketName)
                                 .s3Prefix(virtualDirectoryKeyPrefix)
                                 .source(directory.toPath())
                                 .maxDepth(includeSubdirectories ? Integer.MAX_VALUE :
 1)
                                 .uploadFileRequestTransformer(builder -> {
                                     // 1.Replace `ObjectMetadataProvider`,
 `ObjectTaggingProvider`, and `ObjectCannedAclProvider` with an
                                       // `UploadFileRequestTransformer` that can
 combine the functionality of all three *Provider implementations.
                                       // 2. Convert your v1 `ObjectMetadata` to v2
 `PutObjectRequest` parameters.
                                       // 3. Convert your v1 `ObjectTagging` to v2
 `Tagging`.
                                       // 4. Convert your v1 `CannedAccessControlList`
 to v2 `ObjectCannedACL`.
                                 })
                                 .build();

DirectoryUpload directoryUpload = transferManager.uploadDirectory(request);
```

Migración de objetos del modelo

En AWS SDK for Java 2.x, muchos de los objetos del `TransferManager` modelo se han rediseñado y varios métodos getter y setter disponibles en los objetos del modelo de la versión 1 ya no son compatibles.

En v2, puede usar la clase `CompletableFuture<T>` para realizar acciones cuando se complete la transferencia, ya sea correctamente o con una excepción. Si es necesario, puede usar el método `join()` para esperar a que se complete.

Objetos de transferencia principales

Clase V1	Clase V2	Estado de migración
`TransferManager`	`S3TransferManager`	Soportado
`TransferManagerBuilder`	`S3TransferManager.Builder`	Soportado
`Transfer`	`Transfer`	compatible
`AbortableTransfer`	`Transfer`	Compatible (sin clase aparte)
`Copy`	`Copy`	Soportado
`Download`	`FileDownload`	Soportado
`Upload`	`Upload` / `FileUpload`	Soportado
`MultipleFileDownload`	`DirectoryDownload`	Soportado
`MultipleFileUpload`	`DirectoryUpload`	compatible

Objetos de persistencia

Clase V1	Clase V2	Estado de migración
`PersistableDownload`	`ResumableFileDownload`	Soportado
`PersistableUpload`	`ResumableFileUpload`	Soportado
`PersistableTransfer`	`ResumableTransfer`	compatible
`PauseResult<T>`	Objeto reanudable directo	No es compatible

Objetos de resultado

Clase V1	Clase V2	Estado de migración
`CopyResult`	`CompletedCopy`	Soportado
`UploadResult`	`CompletedUpload`	compatible

Objetos de configuración

Clase V1	Clase V2	Estado de migración
`TransferManagerConfiguration`	`MultipartConfiguration` (en el cliente de Amazon S3)	Soportado
`TransferProgress`	`TransferProgress` + `TransferProgressSnapshot`	Soportado
`KeyFilter`	`DownloadFilter`	compatible

Objetos no admitidos

Clase V1	Alternativa V2	Estado de migración
`PauseStatus`	No admitido	No es compatible
`UploadContext`	No admitido	No es compatible
`ObjectCannedAclProvider`	`PutObjectRequest.builder().acl()`	No es compatible
`ObjectMetadataProvider`	`PutObjectRequest.builder().metadata()`	No es compatible

Clase V1	Alternativa V2	Estado de migración
`ObjectTaggingProvider`	`PutObjectRequest.builder().tagging()`	No es compatible
`PresignedUrlDownload`	No admitido	No es compatible

TransferManagerBuilder migración de la configuración

Cambios de configuración

Los cambios de configuración que debe establecer para Transfer Manager v2 dependen del cliente de S3 que utilice. Puede elegir entre el cliente S3 AWS basado en CRT o el cliente asíncrono S3 estándar basado en Java. Para obtener más información acerca de las diferencias, consulte el tema the section called “Clientes de S3 en el SDK”.

Use the AWS CRT-based S3 client

Opción	v1	v2: Transfer Manager utiliza un cliente S3 basado en CRT AWS
(conseguir un compilador)	`TransferManagerBuilder tmBuilder = TransferManagerBuilder.standard();`	`S3TransferManager.Builder tmBuilder = S3TransferManager.builder();`
cliente S3	`tmBuilder.withS3Client(...); tmBuilder.setS3Client(...);`	`tmBuilder.s3Client(...);`
Ejecutor	`tmBuilder.withExecutorFactory(...); tmBuilder.setExecutorFactory(...);`	`tmBuilder.executor(...);`

Opción	v1	v2: Transfer Manager utiliza un cliente S3 basado en CRT AWS
Cerrar los grupos de hilos	`tmBuilder.withShutDownThreadPools(...);` `tmBuilder.setShutdownThreadPools(...);`	No admitido. El ejecutor proporcionado no se cerrará cuando se cierre `S3TransferManager`

Tamaño mínimo de la pieza de carga	`tmBuilder.withMinimumUploadPartSize(...);`
	`tmBuilder.setMinimumUploadPartSize(...);`
		`S3AsyncClient s3 = S3AsyncClient.crtBuilder().minimumPartSizeInBytes(...).build();`
		
		`tmBuilder.s3Client(s3);`

Umbral de la carga multiparte	`tmBuilder.withMultipartUploadThreshold(...);`
	`tmBuilder.setMultipartUploadThreshold(...);`
		`S3AsyncClient s3 = S3AsyncClient.crtBuilder().thresholdInBytes(...).build();`
		
		`tmBuilder.s3Client(s3);`

Opción	v1	v2: Transfer Manager utiliza un cliente S3 basado en CRT AWS

Tamaño mínimo de la pieza de copia	`tmBuilder.withMultipartCopyPartSize(...);`
	`tmBuilder.setMultipartCopyPartSize(...);`
		`S3AsyncClient s3 = S3AsyncClient.crtBuilder().minimumPartSizeInBytes(...).build();`
		
		`tmBuilder.s3Client(s3);`

Umbral de copia multiparte	`tmBuilder.withMultipartCopyThreshold(...);`
	`tmBuilder.setMultipartCopyThreshold(...);`
		`S3AsyncClient s3 = S3AsyncClient.crtBuilder().thresholdInBytes(...).build();`
		
		`tmBuilder.s3Client(s3);`

Inhabilitar descargas paralelas	`tmBuilder.withDisableParallelDownloads(...);`
	`tmBuilder.setDisableParallelDownloads(...);`
		Deshabilite las descargas paralelas pasando un cliente de S3 estándar basado en Java con multiparte deshabilitada (opción predeterminada) a Transfer Manager.
		
		`S3AsyncClient s3 = S3AsyncClient.builder().build();`
		
		`tmBuilder.s3Client(s3);`

Opción	v1	v2: Transfer Manager utiliza un cliente S3 basado en CRT AWS
Calcular siempre md5 multiparte	`tmBuilder.withAlwaysCalculateMultipartMd5(...);` `tmBuilder.setAlwaysCalculateMultipartMd5(...);`	No admitido.

Use Java-based S3 async client

Opción	v1	v2: Transfer Manager con el cliente asíncrono de S3 basado en Java
(conseguir un compilador)	`TransferManagerBuilder tmBuilder = TransferManagerBuilder.standard();`	`S3TransferManager.Builder tmBuilder = S3TransferManager.builder();`
cliente S3	`tmBuilder.withS3Client(...);` `tmBuilder.setS3Client(...);`	`tmBuilder.s3Client(...);`
Ejecutor	`tmBuilder.withExecutorFactory(...);` `tmBuilder.setExecutorFactory(...);`	`tmBuilder.executor(...);`
Cerrar los grupos de hilos	`tmBuilder.withShutDownThreadPools(...);`	No admitido. El ejecutor proporcionado no se cerrará cuando se cierre `S3TransferManager`

Opción	v1	v2: Transfer Manager con el cliente asíncrono de S3 basado en Java
	`tmBuilder.setShutdownThreadPools(...);`	

Tamaño mínimo de la pieza de carga	`tmBuilder.withMinimumUploadPartSize(...);`
	`tmBuilder.setMinimumUploadPartSize(...);`
		`S3AsyncClient s3 = S3AsyncClient.builder()`
		`.multipartConfiguration(cfg -> cfg.minimumPartSizeInBytes(...)).build();`
		
		`tmBuilder.s3Client(s3);`

Umbral de la carga multiparte	`tmBuilder.withMultipartUploadThreshold(...);`
	`tmBuilder.setMultipartUploadThreshold(...);`
		`S3AsyncClient s3 = S3AsyncClient.builder()`
		`.multipartConfiguration(cfg -> cfg.thresholdInBytes(...)).build();`
		
		`tmBuilder.s3Client(s3);`

Opción	v1	v2: Transfer Manager con el cliente asíncrono de S3 basado en Java

Tamaño mínimo de la pieza de copia	`tmBuilder.withMultipartCopyPartSize(...);`
	`tmBuilder.setMultipartCopyPartSize(...);`
		`S3AsyncClient s3 = S3AsyncClient.builder()`
		`.multipartConfiguration(cfg ->`
		`cfg.minimumPartSizeInBytes(...)).build();`
		
		`tmBuilder.s3Client(s3);`

Umbral de copia multiparte	`tmBuilder.withMultipartCopyThreshold(...);`
	`tmBuilder.setMultipartCopyThreshold(..);`
		`S3AsyncClient s3 = S3AsyncClient.builder()`
		`.multipartConfiguration(cfg ->`
		`cfg.thresholdInBytes(...)).build();`
		
		`tmBuilder.s3Client(s3);`

Opción	v1	v2: Transfer Manager con el cliente asíncrono de S3 basado en Java

Inhabilitar descargas paralelas	`tmBuilder.withDisableParallelDownloads(...);`
	`tmBuilder.setDisableParallelDownloads(...);`
		Deshabilite las descargas paralelas pasando un cliente de S3 estándar basado en Java con multiparte deshabilitada (opción predeterminada) a Transfer Manager.
		`S3AsyncClient s3 = S3AsyncClient.builder().build();`
		`tmBuilder.s3Client(s3);`

Calcular siempre md5 multiparte	`tmBuilder.withAlwaysCalculateMultipartMd5(...);` `tmBuilder.setAlwaysCalculateMultipartMd5(...);`	No admitido.

Cambios de comportamiento

Operaciones asíncronas

V1 (bloqueo):

```
Upload upload = transferManager.upload("amzn-s3-demo-bucket", "key", file);
upload.waitForCompletion(); // Blocks until complete
```

V2 (asincrónico):

```
FileUpload upload = transferManager.uploadFile(UploadFileRequest.builder()
    .putObjectRequest(PutObjectRequest.builder()
```

```
        .bucket("amzn-s3-demo-bucket")
        .key("key")
        .build())
    .source(file)
    .build());

CompletedFileUpload result = upload.completionFuture().join(); // Blocks until complete
// Or handle asynchronously:
upload.completionFuture().thenAccept(result -> {
    System.out.println("Upload completed: " + result.response().eTag());
});
```

Gestión de errores

V1: las transferencias de directorio fallan por completo si se produce un error en alguna solicitud secundaria.

V2: las transferencias de directorio se completan correctamente incluso aunque fallen algunas solicitudes secundarias. Compruebe si hay errores de forma explícita:

```
DirectoryUpload directoryUpload = transferManager.uploadDirectory(request);
CompletedDirectoryUpload result = directoryUpload.completionFuture().join();

// Check for failed transfers
if (!result.failedTransfers().isEmpty()) {
    System.out.println("Some uploads failed:");
    result.failedTransfers().forEach(failed ->
        System.out.println("Failed: " + failed.exception().getMessage()));
}
```

Descarga paralela mediante búsquedas por rango de bytes

Cuando la característica de transferencia paralela automática está habilitada en el SDK v2, Transfer Manager de S3 utiliza recuperaciones de rango de byte para recuperar partes específicas del objeto en paralelo (descarga de multiparte). La forma en que se descarga un objeto con la versión 2 no depende de cómo se cargó originalmente. Todas las descargas pueden beneficiarse de un alto rendimiento y simultaneidad.

Por el contrario, con Transfer Manager v1 es importante cómo se cargó originalmente el objeto. Transfer Manager v1 recupera las partes del objeto de la misma forma en que se cargaron las partes. Si un objeto se cargó originalmente como un objeto único, Transfer Manager v1 no puede acelerar el proceso de descarga mediante solicitudes secundarias.

Cambios en el análisis de Amazon S3 URIs de la versión 1 a la versión 2

En este tema se detallan los cambios en el análisis de Amazon S3 URIs de la versión 1 (v1) a la versión 2 (v2.).

Cambios de alto nivel

Para empezar a analizar un URI de S3 en la v1, cree una instancia de un `AmazonS3URI` utilizando un constructor. En la v2, llame a `parseUri()` en una instancia de `S3Utilities` para devolver un `S3URI`.

Cambio	v1	v2

dependencias Maven	`<dependencyManagement>`
	`  <dependencies>`
	`  <dependency>`
	`  <groupId>com.amazonaws</groupId>`
	`  <artifactId>aws-java-sdk-bom</artifactId>`
	`  <version>`*`1.12.587`*`[1]</version>`
	`  <type>pom</type>`
	`  <scope>import</scope>`
	`  </dependency>`
	`  </dependencies>`
	`</dependencyManagement>`
	`<dependencies>`
	`  <dependency>`
	`  <groupId>com.amazonaws</groupId>`
	`  <artifactId>s3</artifactId>`
	`  </dependency>`
	`</dependencies>`
		`<dependencyManagement>`
		`  <dependencies>`
		`  <dependency>`
		`  <groupId>software.amazon.awssdk</groupId>`
		`  <artifactId>bom</artifactId>`
		`  <version>`*`2.27.21`*`[2]</version>`
		`  <type>pom</type>`
		`  <scope>import</scope>`
		`  </dependency>`
		`  </dependencies>`
		`</dependencyManagement>`
		`<dependencies>`
		`  <dependency>`
		`  <groupId>software.amazon.awssdk</groupId>`
		`  <artifactId>s3</artifactId>`
		`  </dependency>`
		`</dependencies>`

Cambio	v1	v2
Nombre del paquete	`com.amazonaws.services.s3`	`software.amazon.awssdk.services.s3`
Nombres de clase	`AmazonS3URI`	`S3URI`

[1] Última versión. [2] Última versión.

Cambios en la API

Comportamiento	v1	v2

Analizar un URI de S3.	`URI uri = URI.create( "https://s3.amazonaws.com");`
	
	`AmazonS3Uri s3Uri = new AmazonS3URI(uri, false);`
		`S3Client s3Client = S3Client.create();`
		`S3Utilities s3Utilities = s3Client.utilities();`
		
		`S3Uri s3Uri = s3Utilities.parseUri(uri);`

Recuperar el nombre del bucket de un URI de S3.	`String bucket = s3Uri.getBucket();`	`Optional<String> bucket = s3Uri.bucket();`
Recuperar la clave.	`String key = s3Uri.getKey();`	`Optional<String> key = s3Uri.key();`

Recuperar la región.	`String region = s3Uri.getRegion();`	`Optional<Region> region = s3Uri.region();`
		
		`String region;`
		`if (s3Uri.region().isPresent()) {`
		`region = s3Uri.region().get().id();`

Comportamiento	v1	v2
		`}`
Recuperar si el URI de S3 es de estilo de ruta.	`boolean isPathStyle = s3Uri.isPathStyle();`	`boolean isPathStyle = s3Uri.isPathStyle();`
Recuperar el ID de versión.	`String versionId = s3Uri.getVersionId();`	`Optional<String> versionId = s3Uri.firstMatchingRawQueryParameter("versionId");`
Recuperar los parámetros de consulta.	N/A	`Map<String, List<String>> queryParams = s3Uri.rawQueryParameters();`

Cambios de comportamiento

Codificación de URL

La v1 ofrece la opción de pasar una marca para especificar si el URI debe estar codificado como URL. El valor predeterminado es `true`.

En la v2 no se admite codificación de URL. Si trabaja con claves de objeto o parámetros de consulta que tienen caracteres reservados o no seguros, debe codificarlos mediante URL. Por ejemplo, debe reemplazar un espacio en blanco `" "` por `%20`.

Cambios en la API Notificaciones de eventos de S3 de la versión 1 a la 2

En este tema se detallan los cambios en la API Notificaciones de eventos de S3 de la versión 1.x (v1) a la versión 2.x (v2) de AWS SDK para Java.

Cambios de alto nivel

Cambios estructurales

La V1 usa clases internas estáticas para tipos `EventNotificationRecord` y sus atributos, mientras que la v2 usa clases públicas independientes para tipos `EventNotificationRecord`.

Cambios en la convención de nomenclatura

En v1, los nombres de las clases de atributos incluyen el sufijo Entity, mientras que v2 omite este sufijo para simplificar la nomenclatura: por ejemplo, EventData en lugar de. eventDataEntity

Cambios en dependencias, paquetes y nombres de clases

En la v1, las clases de la API Notificación de eventos de S3 se importan de forma transitiva junto con el módulo S3 (artifactId `aws-java-sdk-s3`). Sin embargo, en la v2 es necesario añadir una dependencia al artefacto `s3-event-notifications`.

Cambio	v1	v2
dependencias Maven	<dependencyManagement> <dependencies> <dependency> <groupId> com.amazonaws</gro upId> <artifact Id>aws-java-sdk-bom</ artifactId> <version> *1.X.X*</version> <type>pom</ type> <scope>im port</scope> </dependency> </dependencies> </dependencyManageme nt> <dependencies> <dependency>	<dependencyManagement> <dependencies> <dependency> <groupId> software.amazon.aw ssdk</groupId> <artifact Id>bom</artifactId> <version> *2.X.X*[1]</version> <type>pom</ type> <scope>im port</scope> </dependency> </dependencies> </dependencyManageme nt> <dependencies> <dependency> <groupId> software.amazon.aw ssdk</groupId>

Cambio	v1	v2
	<groupId>com.amazonaws</groupId> <artifactId>aws-java-sdk-s3</artifactId> </dependency> </dependencies>	<artifactId>s3-event-notifications</artifactId> </dependency> </dependencies>
Nombre del paquete	com.amazonaws.services.s3.event	software.amazon.awssdk.eventnotifications.s3.model

Cambio	v1	v2
Nombres de clase	S3EventNotification S3 S.3 EventNotification EventNotificationRecord S3EventNotification. GlacierEventDataEntity S3EventNotification. IntelligentTieringEventDataEntity S3EventNotification. LifecycleEventDataEntity S3EventNotification. ReplicationEventDataEntity S3EventNotification. RequestParametersEntity S3EventNotification. ResponseElementsEntity S3EventNotification. RestoreEventDataEntity S3 EventNotification S3 BucketEntity Entidad S3 S.3 EventNotification EventNotificationS3 S3. ObjectEntity S3EventNotification. TransitionEventDataEntity	S3EventNotification S3EventNotificationRecord GlacierEventData IntelligentTieringEventData LifecycleEventData ReplicationEventData RequestParameters ResponseElements RestoreEventData S3 Bucket S3 Objeto S3 TransitionEventData UserIdentity

Cambio	v1	v2
	S3EventNotification. UserIdentityEntity	

[1] Última versión.

Cambios en la API

JSON a **`S3EventNotification`** y a la inversa

Caso de uso	v1	v2
Crear `S3EventNotification` a partir de cadena JSON	`S3EventNotification notification = S3EventNotification.parseJson(message.body());`	`S3EventNotification notification = S3EventNotification.fromJson(message.body());`
Convertir `S3EventNotification` a cadena JSON	`String json = notification.toJson();`	`String json = notification.toJson();`

Acceder a atributos de **`S3EventNotification`**

Caso de uso	v1	v2
Recuperar registros de una notificación	`List<S3EventNotification.S3EventNotificationRecord> records = notifcation.getRecords();`	`List<S3EventNotificationRecord> records = notification.getRecords();`
Recuperar un registro de una lista de registros	`S3EventNotification.S3EventNotificationRecord record =`	`S3EventNotificationRecord record =`

Caso de uso	v1	v2
	`records.stream().findAny().get();`	`records.stream().findAny().get();`
Recuperar datos de eventos de Glacier	`S3EventNotification.GlacierEventDataEntity glacierEventData = record.getGlacierEventData();`	`GlacierEventData glacierEventData = record.getGlacierEventData();`
Recuperar datos de eventos de restauración de un evento de Glacier	`S3EventNotification.RestoreEventDataEntity restoreEventData = glacierEventData.getRestoreEventDataEntity();`	`RestoreEventData restoreEventData = glacierEventData.getRestoreEventData();`
Recuperar parámetros de solicitudes	`S3EventNotification.RequestParametersEntity requestParameters = record.getRequestParameters();`	`RequestParameters requestParameters = record.getRequestParameters();`
Recuperar datos de los eventos de Intelligent Tiering	`S3EventNotification.IntelligentTieringEventDataEntity tieringEventData = record.getIntelligentTieringEventData();`	`IntelligentTieringEventData intelligentTieringEventData = record.getIntelligentTieringEventData();`
Recuperar datos de eventos del ciclo de vida	`S3EventNotification.LifecycleEventDataEntity lifecycleEventData = record.getLifecycleEventData();`	`LifecycleEventData lifecycleEventData = record.getLifecycleEventData();`

Caso de uso	v1	v2
Recuperar nombre del evento como enumeración	`S3Event eventNameAsEnum = record.getEventNameAsEnum();`	`//getEventNameAsEnum does not exist; use 'getEventName()' String eventName = record.getEventName();`
Recuperar datos de eventos de replicación	`S3EventNotification.ReplicationEventDataEntity replicationEntity = record.getReplicationEventDataEntity();`	`ReplicationEventData replicationEventData = record.getReplicationEventData();`
Recuperar información de buckets y objetos de S3	`S3EventNotification.S3Entity s3 = record.getS3();`	`S3 s3 = record.getS3();`
Recuperar información de identidad de usuario	`S3EventNotification.UserIdentityEntity userIdentity = record.getUserIdentity();`	`UserIdentity userIdentity = record.getUserIdentity();`
Recuperar elementos de respuesta	`S3EventNotification.ResponseElementsEntity responseElements = record.getResponseElements();`	`ResponseElements responseElements = record.getResponseElements();`

Migración de la versión de la biblioteca **`aws-lambda-java-events`**

Si aws-lambda-java-eventssolía trabajar con eventos de notificación de S3 dentro de una función Lambda, le recomendamos que actualice a la última versión 3.x.x. Las versiones recientes eliminan

todas las dependencias de la API de notificación de eventos de S3 con la versión AWS SDK para Java 1.x.

Para obtener más información sobre las diferencias en el tratamiento de notificaciones de eventos de S3 entre la biblioteca `aws-lambda-java-events` y el SDK para Java 2.x, consulte the section called “Opciones de administración de notificaciones de eventos de S3”.

Cambios del archivo de perfil

AWS SDK for Java 2.x analiza las definiciones de perfil en `~/.aws/config` y `~/.aws/credentials` para emular más de cerca la forma en que la AWS CLI analiza los archivos.

El SDK para Java 2.x:

- Resuelve `~/` o `~` seguido del separador de rutas predeterminado del sistema de archivos al principio de la ruta comprobando, en orden, `$HOME`, `$USERPROFILE` (solo Windows), `$HOMEDRIVE`, `$HOMEPATH` (solo Windows) y, a continuación, la propiedad del sistema `user.home`.
- Busca la variable de entorno de `AWS_SHARED_CREDENTIALS_FILE` en lugar de `AWS_CREDENTIAL_PROFILES_FILE`.
- Elimina silenciosamente las definiciones de perfil en los archivos de configuración sin la palabra `profile` al principio del nombre del perfil.
- Elimina silenciosamente las definiciones de perfil que no estén compuestas por caracteres alfanuméricos, guiones bajos o guiones (una vez eliminada la palabra principal de `profile` de los archivos de configuración).
- Combina los ajustes de definiciones de perfil duplicados en el mismo archivo.
- Combina los ajustes de definiciones de perfil duplicados en los archivos de configuración y de credenciales.
- NO combina los ajustes si `[profile foo]` y `[foo]` se encuentran en el mismo archivo.
- Utiliza ajustes en `[profile foo]` si `[profile foo]` y `[foo]` se encuentran en el archivo de configuración.
- Utiliza el valor del último ajuste duplicado en el mismo archivo y perfil.
- Reconoce `;` y # para definir un comentario.
- Reconoce `;` y # en definiciones de perfil para definir un comentario, incluso aunque los caracteres estén junto al corchete de cierre.

- Reconoce `;` y # para definir un comentario solo al establecer valores si van precedidos de espacios en blanco.
- Reconoce `;` y # y todo el contenido siguiente al establecer valores si no van precedidos de espacios en blanco.
- Considera que las credenciales basadas en roles son las credenciales de mayor prioridad. El SDK 2.x siempre usa credenciales basadas en roles si el usuario especifica la propiedad `role_arn`.
- Considera que las credenciales basadas en sesiones son las credenciales con la segunda mayor prioridad. El SDK 2.x siempre usa credenciales basadas en sesiones si no se han utilizado credenciales basadas en roles y el usuario especifica las propiedades `aws_access_key_id` y `aws_session_token`.
- Utiliza credenciales básicas si las credenciales basadas en roles y basadas en sesiones no se utilizan y el usuario ha especificado la propiedad `aws_access_key_id`.

Cambios en variables de entorno y propiedades del sistema

Variable de entorno 1.x	Propiedad del sistema 1.x	Variable de entorno 2.x	Propiedad del sistema 2.x
`AWS_ACCESS_KEY_ID AWS_ACCESS_KEY`	`aws.accessKeyId`	`AWS_ACCESS_KEY_ID`	`aws.accessKeyId`
`AWS_SECRET_KEY AWS_SECRET_ACCESS_KEY`	`aws.secretKey`	`AWS_SECRET_ACCESS_KEY`	`aws.secretAccessKey`
`AWS_SESSION_TOKEN`	`aws.sessionToken`	`AWS_SESSION_TOKEN`	`aws.sessionToken`
`AWS_REGION`	`aws.region`	`AWS_REGION`	`aws.region`
`AWS_CONFIG_FILE`		`AWS_CONFIG_FILE`	`aws.configFile`

Variable de entorno 1.x	Propiedad del sistema 1.x	Variable de entorno 2.x	Propiedad del sistema 2.x
AWS_CREDENTIAL_PROFILES_FILE		AWS_SHARED_CREDENTIALS_FILE	aws.sharedCredentialsFile
AWS_PROFILE	aws.profile	AWS_PROFILE	aws.profile
AWS_EC2_METADATA_DISABLED	com.amazonaws.sdk.disableEc2Metadata	AWS_EC2_METADATA_DISABLED	aws.disableEc2Metadata
	com.amazonaws.sdk.ec2MetadataServiceEndpointOverride	AWS_EC2_METADATA_SERVICE_ENDPOINT	aws.ec2MetadataServiceEndpoint
AWS_CONTAINER_CREDENTIALS_RELATIVE_URI		AWS_CONTAINER_CREDENTIALS_RELATIVE_URI	aws.containerCredentialsPath
AWS_CONTAINER_CREDENTIALS_FULL_URI		AWS_CONTAINER_CREDENTIALS_FULL_URI	aws.containerCredentialsFullUri
AWS_CONTAINER_AUTHORIZATION_TOKEN		AWS_CONTAINER_AUTHORIZATION_TOKEN	aws.containerAuthorizationToken

Variable de entorno 1.x	Propiedad del sistema 1.x	Variable de entorno 2.x	Propiedad del sistema 2.x
AWS_CBOR_DISABLED	com.amazonaws.sdk.disableCbor	CBOR_ENABLED	aws.cborEnabled
AWS_ION_BINARY_DISABLE	com.amazonaws.sdk.disableIonBinary	BINARY_ION_ENABLED	aws.binaryIonEnabled
AWS_EXECUTION_ENV		AWS_EXECUTION_ENV	aws.executionEnvironment
	com.amazonaws.sdk.disableCertChecking	No se admite (característica de solicitud)	No se admite (característica de solicitud)
	com.amazonaws.sdk.enableDefaultMetrics	No admitido	No admitido
	com.amazonaws.sdk.enableThrottledRetry	No admitido	No admitido
	com.amazonaws.regions.RegionUtils.fileOverride	No se admite (característica de solicitud)	No se admite (característica de solicitud)

Variable de entorno 1.x	Propiedad del sistema 1.x	Variable de entorno 2.x	Propiedad del sistema 2.x
	`com.amazonaws.regions.RegionUtils.disableRemote`	No se admite (característica de solicitud)	No se admite (característica de solicitud)
	`com.amazonaws.services.s3.disableImplicitGlobalClients`	No se admite (característica de solicitud)	No se admite (característica de solicitud)
	`com.amazonaws.sdk.enableInRegionOptimizedMode`	No se admite (característica de solicitud)	No se admite (característica de solicitud)

Cambios en esperadores de la versión 1 a la versión 2

En este tema se detallan los cambios en la funcionalidad de esperadores de la versión 1 (v1) a la versión 2 (v2).

En las siguientes tablas se muestra la diferencia específicamente para los esperadores de DynamoDB. Los esperadores de otros servicios siguen el mismo patrón.

Cambios de alto nivel

Las clases de esperadores tienen el mismo artefacto de Maven que el servicio.

Cambio	v1	v2
dependencias Maven	`<dependencyManagement>`	`<dependencyManagement>`

Cambio	v1	v2
	<dependencies> <dependency> <groupId> com.amazonaws</gro upId> <artifact Id>aws-java-sdk-bom</ artifactId> <version> *1.12.680*[1]</version> <type>pom</ type> <scope>im port</scope> </dependency> </dependencies> </dependencyManageme nt> <dependencies> <dependency> <groupId> com.amazonaws</gro upId> <artifact Id>dynamodb</artif actId> </dependency> </dependencies>	<dependencies> <dependency> <groupId> software.amazon.aw ssdk</groupId> <artifact Id>bom</artifactId> <version> *2.27.10*[2]</version> <type>pom</ type> <scope>im port</scope> </dependency> </dependencies> </dependencyManageme nt> <dependencies> <dependency> <groupId> software.amazon.aw ssdk</groupId> <artifact Id>dynamodb</artif actId> </dependency> </dependencies>
Package name	`com.amazonaws.serv ices.dynamodbv2.wa iters`	`software.amazon.aw ssdk.services.dyna modb.waiters`
Nombres de clase	`AmazonDynamoDBWait ers`	• Síncrono: `DynamoDbW aiter` • Asíncrono: `DynamoDbA syncWaiter`

[1] Última versión. [2] Última versión.

Cambios en la API

<table>
<tr><th>Cambio</th><th>v1</th><th>v2</th></tr>
<tr><td>Cree un esperador</td><td><pre>AmazonDynamoDB client
 = AmazonDynamoDBClie
ntBuilder

    .standard().build(
);
AmazonDynamoDBWaiters
 waiter = client.wa
iters();</pre></td><td>Sincrónico:<pre>DynamoDbClient client
 = DynamoDbClient.cre
ate();
DynamoDbWaiter waiter
 = client.waiter();</pre>Asincrónico:<pre>DynamoDbAsyncClient
 asyncClient =
        DynamoDbA
syncClient.create();
DynamoDbAsyncWaiter
 waiter = asyncClie
nt.waiter();</pre></td></tr>
<tr><td>Espere a que haya una tabla</td><td>Sincrónico:<pre>waiter.tableExists()
    .run(new WaiterPar
ameters<>(
        new DescribeT
ableRequest(tableN
ame)));</pre>Asincrónico:<pre>waiter.tableExists()
    .runAsync(new
 WaiterParameters()
      .withRequest(new
 DescribeTableReque
st(tableName)),</pre></td><td>Sincrónico:<pre>WaiterResponse<Des
cribeTableResponse>
 waiterResponse =
    waiter.waitUntilTa
bleExists(
        r -> r.tableNa
me("myTable"));
waiterResponse.match
ed().response()
       .ifPresen
t(System.out::prin
tln);</pre>Asincrónico:</td></tr>
</table>

Cambio	v1	v2
	`new WaiterHandler() { @Override public void onWaitSuccess( AmazonWebServiceRequest amazonWebServiceRequest) { System.out.println("Table creation succeeded"); } @Override public void onWaitFailure(Exception e) { e.printStackTrace(); } }).get();`	`waiter.waitUntilTableExists(r -> r.tableName(tableName)) .whenComplete((r, t) -> { if (t != null) { t.printStackTrace(); } else { System.out.println( "Table creation succeeded"); } }).join();`

Cambios de configuración

Cambio	v1	v2
Estrategia de sondeo (número máximo de intentos y retraso fijo)	`MaxAttemptsRetryStrategy maxAttemptsRetryStrategy = new MaxAttemptsRetryStrategy(10); FixedDelayStrategy fixedDelayStrategy = new FixedDelayStrategy(3);`	`FixedDelayBackoffStrategy fixedDelayBackoffStrategy = FixedDelayBackoffStrategy .create(Duration.ofSeconds(3));`

Cambio	v1	v2
	`PollingStrategy pollingStrategy = new PollingStrategy(maxAttempts RetryStrategy, fixedDelayStrategy); waiter.tableExists().run( new WaiterParameters<>( new DescribeTableRequest(tableName)), pollingStrategy);`	`waiter.waitUntilTableExists(r -> r.tableName(tableName), c -> c.maxAttempts(10) .backoffStrategy(fixedDelayBackoffStrategy));`

Cambios en la utilidad de metadatos de EC2 de la versión 1 a versión 2

En este tema se detallan los cambios en la utilidad de metadatos Amazon Elastic Compute Cloud (EC2) del SDK para Java de la versión 1 (v1) a la versión 2 (v2).

Cambios de alto nivel

Cambio	v1	v2
dependencias Maven	`<dependencyManagement> <dependencies> <dependency> <groupId>com.amazonaws</groupId> <artifactId>aws-java-sdk-bom</artifactId> <version>1.12.587[1]</version>`	`<dependencyManagement> <dependencies> <dependency> <groupId>software.amazon.awssdk</groupId> <artifactId>bom</artifactId> <version>2.27.21[2]</version> <type>pom</type>`

Cambio	v1	v2
	<type>pom</type> <scope>import</scope> </dependency> </dependencies> </dependencyManagement> <dependencies> <dependency> <groupId>com.amazonaws</groupId> <artifactId>aws-java-sdk-core</artifactId> </dependency> </dependencies>	<scope>import</scope> </dependency> </dependencies> </dependencyManagement> <dependencies> <dependency> <groupId>software.amazon.awssdk</groupId> <artifactId>imds</artifactId> </dependency> <dependency> <groupId>software.amazon.awssdk</groupId> <artifactId>apache-client [3]</artifactId> </dependency> </dependencies>
Nombre del paquete	`com.amazonaws.util`	`software.amazon.awssdk.imds`

Cambio	v1	v2

Enfoque de instanciación	Utilice métodos de utilidad estáticos; sin instanciación:
	`String localHostName = EC2MetadataUtils.getLocalHostName();`
		Utilice un método de fábrica estático:
		`Ec2MetadataClient client = Ec2MetadataClient.create();`
		O utilice un enfoque de creación:
		`Ec2MetadataClient client = Ec2MetadataClient.builder()`
		`.endpointMode(EndpointMode.IPV6)`
		`.build();`

Tipos de clientes	Métodos de utilidad únicamente síncronos: `EC2MetadataUtils`	Síncrono: `Ec2MetadataClient` Asíncrono: `Ec2MetadataAsyncClient`

[1] Última versión. [2] Última versión.

[3] Observe la declaración del módulo `apache-client` para la versión 2. La versión 2 de la utilidad de metadatos EC2 requiere una implementación de la interfaz `SdkHttpClient` para el cliente de metadatos síncrono o la interfaz `SdkAsyncHttpClient` para el cliente de metadatos asíncrono. La sección ??? muestra la lista de clientes HTTP que puede utilizar.

Solicitar metadatos

En la versión 1, se utilizan métodos estáticos que no aceptan parámetros para solicitar metadatos para un recurso de EC2. Por el contrario, debe especificar la ruta al recurso de EC2 como parámetro en la v2. En la tabla siguiente, se muestran los diferentes enfoques.

v1	v2

`String userMetaData = EC2MetadataUtils.getUserData();`	`Ec2MetadataClient client = Ec2MetadataClient.create();`
	`Ec2MetadataResponse response = client.get("/latest/user-data");`
	`String userMetaData = response.asString();`

Consulte las categorías de metadatos de la instancia para encontrar la ruta que necesita proporcionar para solicitar un fragmento de metadatos.

> **Note**
>
> Cuando utilice un cliente de metadatos de instancia en la versión 2, debe intentar usar el mismo cliente para todas las solicitudes de recuperación de metadatos.

Cambios de comportamiento

Datos JSON

En EC2, el Servicio de metadatos de instancias (IMDS) que se ejecuta localmente devuelve algunos metadatos en forma de cadenas con formato JSON. Un ejemplo de ello son los metadatos dinámicos de un documento de identidad de instancias.

La API v1 contiene métodos independientes para cada elemento de metadatos de identidad de la instancia, mientras que la API v2 devuelve directamente la cadena JSON. Para trabajar con la cadena JSON, puede usar la API de documentos para analizar la respuesta y navegar por la estructura JSON.

En la siguiente tabla, se compara la forma de recuperar los metadatos de un documento de identidad de instancia en las versiones 1 y 2.

Caso de uso	v1	v2
Recuperar la región	`InstanceInfo instanceInfo = EC2MetadataUtils.getInstanceInfo(); String region = instanceInfo.getRegion();`	`Ec2MetadataResponse response = client.get("/latest/dynamic/instance-identity/document"); Document instanceInfo = response.asDocument(); String region = instanceInfo.asMap().get("region").asString();`
Recupera el identificador de la instancia	`InstanceInfo instanceInfo = EC2MetadataUtils.getInstanceInfo(); String instanceId = instanceInfo.instanceId;`	`Ec2MetadataResponse response = client.get("/latest/dynamic/instance-identity/document"); Document instanceInfo = response.asDocument(); String instanceId = instanceInfo.asMap().get("instanceId").asString();`
Recupera el tipo de la instancia	`InstanceInfo instanceInfo = EC2MetadataUtils.getInstanceInfo(); String instanceType = instanceInfo.instanceType();`	`Ec2MetadataResponse response = client.get("/latest/dynamic/instance-identity/document"); Document instanceInfo = response.asDocument(); String instanceType = instanceInfo.asMap().get("instanceType").asString();`

Diferencias en la resolución de punto de conexión

La siguiente tabla muestra las ubicaciones que el SDK comprueba para resolver el punto de conexión en el IMDS. Las ubicaciones se muestran en orden de prioridad descendente.

v1	v2
Propiedad del sistema: `com.amazonaws.sdk.ec2MetadataServiceEndpointOverride`	Método de configuración del creador de clientes: `endpoint(...)`
Variable de entorno: `AWS_EC2_METADATA_SERVICE_ENDPOINT`	Propiedad del sistema: `aws.ec2MetadataServiceEndpoint`
Valor predeterminado: `http://169.254.169.254`	Archivo de configuración: `~.aws/config` con la configuración `ec2_metadata_service_endpoint`
	Valor asociado a `endpoint-mode` resuelto
	Valor predeterminado: `http://169.254.169.254`

Resolución del punto de conexión en la versión 2

Cuando se establece explícitamente un punto de conexión mediante el creador, el valor de ese punto de conexión tiene prioridad sobre todos los demás ajustes. Cuando se ejecuta el siguiente código, la propiedad del sistema `aws.ec2MetadataServiceEndpoint` y el ajuste `ec2_metadata_service_endpoint` del archivo de configuración se ignoran si existen.

```
Ec2MetadataClient client = Ec2MetadataClient
  .builder()
  .endpoint(URI.create("endpoint.to.use"))
  .build();
```

Modo de punto de conexión

Con la versión 2, puede especificar un modo de punto final para configurar el cliente de metadatos de modo que utilice los valores de punto final predeterminados para o. IPv4 IPv6 El modo de punto

de conexión no está disponible para la versión 1. El valor predeterminado utilizado para IPv4 es `http://169.254.169.254` y para. `http://[fd00:ec2::254]` IPv6

En la siguiente tabla se muestran las distintas formas de configurar el modo de punto de conexión en orden descendente de prioridad.

		Valores posibles
Método de configuración del creador de clientes: `endpointMode(...)`	`Ec2MetadataClient client = Ec2MetadataClient.builder().endpointMode(EndpointMode.IPV4).build();`	`EndpointMode.IPV4` , `EndpointMode.IPV6`
Propiedad del sistema	`aws.ec2MetadataServiceEndpointMode`	`IPv4`, `IPv6` (no distingue entre mayúsculas y minúsculas)
Archivo de configuración: `~.aws/config`	Ajuste `ec2_metadata_service_endpoint`	`IPv4`, `IPv6` (no distingue entre mayúsculas y minúsculas)
No especificado de las formas anteriores	IPv4 se utiliza	

Cómo resuelve el SDK **`endpoint`** o **`endpoint-mode`** en la versión 2

1. El SDK usa el valor que se establece en el código del creador de clientes e ignora cualquier configuración externa. Como el SDK genera una excepción si ambos `endpoint` y `endpointMode` se invocan en el creador de clientes, el SDK usa el valor de punto de conexión del método que utilice.
2. Si no establece un valor en el código, el SDK busca en la configuración externa primero las propiedades del sistema y, después, una configuración en el archivo de configuración.
   a. El SDK primero comprueba si hay un valor de punto de conexión. Si se encuentra un valor, se usa.

b. Si el SDK sigue sin encontrar ningún valor, busca la configuración del modo de punto de conexión.

3. Por último, si el SDK no encuentra ninguna configuración externa y usted no ha configurado el cliente de metadatos en el código, el SDK utiliza el IPv4 valor de`http://169.254.169.254`.

IMDSv2

Amazon EC2 define dos enfoques para acceder a los metadatos de las instancias:

- Versión 1 del servicio de metadatos de instancia (IMDSv1): enfoque de solicitud/respuesta
- Instance Metadata Service, versión 2 (IMDSv2): enfoque orientado a la sesión

En la siguiente tabla se compara el SDKs funcionamiento de Java con el IMDS.

v1	v2
IMDSv2 se usa de forma predeterminada	Siempre usa IMDSv2
Intenta obtener un token de sesión para cada solicitud y recurre a él IMDSv1 si no consigue recuperar un token de sesión	Mantiene un token de sesión en una caché interna que se reutiliza para múltiples solicitud es

El SDK para Java 2.x solo admite IMDSv2 y no recurre a IMDSv1.

Diferencias de configuración

En la tabla siguiente se muestran las diferentes opciones de configuración.

Configuración	v1	v2
Reintentos	La configuración no está disponible	Configurable mediante el método de creador `retryPolicy(...)`
HTTP	El tiempo de espera de la conexión se puede configura r mediante la variable de	La configuración está disponible pasando un cliente HTTP al método de creador

Configuración	v1	v2
	entorno de `AWS_METADATA_SERVICE_TIMEOUT` . El valor predeterminado es de 1 segundo.	`httpClient(...)` . El tiempo de espera de conexión predeterminado para los clientes HTTP es de 2 segundos.

Ejemplo de configuración HTTP v2

En el siguiente ejemplo, se muestra cómo se puede configurar el cliente de metadatos. En este ejemplo se configura el tiempo de espera de la conexión y se utiliza el cliente HTTP Apache.

```
SdkHttpClient httpClient = ApacheHttpClient.builder()
    .connectionTimeout(Duration.ofSeconds(1))
    .build();

Ec2MetadataClient imdsClient = Ec2MetadataClient.builder()
    .httpClient(httpClient)
    .build();
```

Cambios en la CloudFront presignación de Amazon de la versión 1 a la versión 2

En este tema se detallan los cambios en Amazon CloudFront desde la versión 1 (v1) a la versión 2 (v2).

Cambios de alto nivel

Cambio	v1	v2
dependencias Maven	`<dependencyManagement> <dependencies> <dependency> <groupId> com.amazonaws</groupId>`	`<dependencyManagement> <dependencies> <dependency> <groupId> software.amazon.awssdk</groupId> <artifactId>bom</artifactId>`

Cambio	v1	v2
	<artifact Id>aws-java-sdk-bom</ artifactId> <version> 1.12.587[1]</version> <type>pom</ type> <scope>im port</scope> </dependency> </dependencies> </dependencyManageme nt> <dependencies> <dependency> <groupId> com.amazonaws</gro upId> <artifact Id>cloudfront</art ifactId> </dependency> </dependencies>	<version> 2.27.21[2]</version> <type>pom</ type> <scope>im port</scope> </dependency> </dependencies> </dependencyManageme nt> <dependencies> <dependency> <groupId> software.amazon.aw ssdk</groupId> <artifact Id>cloudfront</art ifactId> </dependency> </dependencies>
Nombre del paquete	`com.amazonaws.serv ices.cloudfront`	`software.amazon.aw ssdk.services.clou dfront`
Nombres de clase	CloudFrontUrlSigner CloudFrontCookieSigner	CloudFrontUtilities SignedUrl CannedSignerRequest CustomSignerRequest

[1] Última versión. [2] Última versión.

Cambios en la API

Comportamiento	v1	v2
Creación de una solicitud predefinida	Los argumentos se pasan directamente a la API.	`CannedSignerRequest cannedRequest = CannedSignerRequest.builder() .resourceUrl(resourceUrl) .privateKey(privateKey) .keyPairId(keyPairId) .expirationDate(expirationDate) .build();`
Creación de una solicitud de personalizada	Los argumentos se pasan directamente a la API.	`CustomSignerRequest customRequest = CustomSignerRequest.builder() .resourceUrl(resourceUrl) .resourceUrlPattern(resourceUrlPattern) .privateKey(keyFile) .keyPairId(keyPairId) .expirationDate(expirationDate) .activeDate(activeDate)`

Comportamiento	v1	v2

		`.ipRange(ipRange)`
		
		`.build();`

Generación de una URL firmada (predefinida)	`String signedUrl = CloudFrontUrlSigner.getSignedURLWithCannedPolicy( resourceUrl, keyPairId, privateKey, expirationDate);`	`CloudFrontUtilities cloudFrontUtilities = CloudFrontUtilities.create();`
		
		`SignedUrl signedUrl =`
		
		`cloudFrontUtilities.getSignedUrlWithCannedPolicy(cannedRequest);`
		
		`String url = signedUrl.url();`

Generación de una cookie firmada (personalizada)	`CookiesForCustomPolicy cookies = CloudFrontCookieSigner.getCookiesForCustomPolicy( resourceUrl, privateKey, keyPairId, expirationDate, activeDate, ipRange);`	`CloudFrontUtilities cloudFrontUtilities = CloudFrontUtilities.create();`
		
		`CookiesForCustomPolicy cookies = cloudFrontUtilities.getCookiesForCustomPolicy(customRequest);`

Se han refactorizado los encabezados de cookies en v2

En Java v1, el SDK de Java proporciona encabezados de cookies como `Map.Entry<String, String>`.

```
Map.Entry<String, String> signatureMap = cookies.getSignature();
```

```
String signatureKey = signatureMap.getKey(); // "CloudFront-Signature"
String signatureValue = signatureMap.getValue(); // "[SIGNATURE_VALUE]"
```

El SDK de Java v2 ofrece el encabezado completo como una sola `String`.

```
String signatureHeaderValue = cookies.signatureHeaderValue(); // "CloudFront-
Signature=[SIGNATURE_VALUE]"
```

Cambios en la API del creador de políticas de IAM de la versión 1 a la 2

En este tema se detallan los cambios en la API del creador de políticas de IAM de la versión 1 (v1) a la versión 2 (v2).

Cambios de alto nivel

Cambio	v1	v2
dependencias Maven	`<dependencyManagement> <dependencies> <dependency> <groupId> com.amazonaws</groupId> <artifactId>aws-java-sdk-bom</artifactId> <version> 1.12.587[1]</version> <type>pom</type> <scope>import</scope> </dependency> </dependencies> </dependencyManagement> <dependencies> <dependency> <groupId> com.amazonaws</groupId>`	`<dependencyManagement> <dependencies> <dependency> <groupId> software.amazon.awssdk</groupId> <artifactId>bom</artifactId> <version> 2.27.21[2]</version> <type>pom</type> <scope>import</scope> </dependency> </dependencies> </dependencyManagement> <dependencies> <dependency> <groupId> software.amazon.awssdk</groupId>`

Cambio	v1	v2
	<artifact Id>aws-java-sdk-core</artifactId> </dependency> </dependencies>	<artifact Id>iam-policy-builder</artifactId> </dependency> </dependencies>
Nombre del paquete	com.amazonaws.auth.policy	software.amazon.awssdk.policybuilder.iam
Nombres de clase	Política Instrucción • Statement.Effect • IdentiyManagementActions • Resource • Entidad principal • Condición	IamPolicy IamStatement • IamEffect • IamAction • IamResource • IamPrincipal • IamCondition • IamConditionOperator • IamConditionKey

[1] Última versión. [2] Última versión.

Cambios en la API

Opción	v1	v2
Crear una instancia de una política	`Policy policy = new Policy();`	`IamPolicy.Builder policyBuilder = IamPolicy.builder(); ... IamPolicy policy = policyBuilder.build();`

Opción	v1	v2
Establecer ID	`policy.withtId(...);` `policy.setId(...);`	`policyBuilder.id(...);`
Establecer versión	N/A: usa la versión predeterminada de `2012-10-17`	`policyBuilder.version(...);`
Crear instrucción	`Statement statement = new Statement (Effect.Allow) .withActions(...) .withConditions(...) .withId(...) .withPrincipals(...) .withResources(...);`	`IamStatement statement = IamStatement.builder() .effect(IamEffect.ALLOW) .actions(...) .notActions(...) .conditions(...) .sid(...) .principals(...) .notPrincipals(...) .resources(...) .notResources(...) .build()`
Establecer instrucción	`policy.withStatements(statement);` `policy.setStatements(statement);`	`policyBuilder.addStatement(statement);`

Diferencias en la creación de una instrucción

Acciones

v1

El SDK v1 tiene tipos de `enum` para acciones de servicio que representan elementos de *`Action`* de una instrucción de política. A continuación, se muestran ejemplos de tipos de `enum`.

- `IdentityManagementActions`
- `DynamoDBv2Actions`
- `SQSActions`

En el siguiente ejemplo se muestra la constante de `SendMessage` para `SQSActions`.

```
Action action = SQSActions.SendMessage;
```

No puede especificar un elemento *`NotAction`* en una instrucción en v1.

v2

En la versión 2, la IamActioninterfaz representa todas las acciones. Para especificar un elemento de acción específico del servicio, pase una cadena al método `create`, como se muestra en el código siguiente.

```
IamAction action = IamAction.create("sqs:SendMessage");
```

Puede especificar un *`NotAction`* para una instrucción con v2 tal como se muestra en el siguiente código.

```
IamAction action = IamAction.create("sqs:SendMessage");
IamStatement.builder().addNotAction(action);
```

Condiciones

v1

Para representar las condiciones la instrucción, el SDK v1 usa subclases de `Condition`.

- ArnCondition
- BooleanCondition
- DateCondition
- IpAddressCondition
- NumericCondition
- StringCondition

Cada subclase `Condition` define un tipo de comparación `enum` para ayudar a definir la condición. Por ejemplo, a continuación se muestra una cadena de comparación no como para una condición.

```
Condition condition = new StringCondition(StringComparisonType.StringNotLike, "key",
 "value");
```

v2

En v2 se crea una condición para una instrucción de política utilizando `IamCondition` y proporcionando un `IamConditionOperator`, que contiene `enums` para todos los tipos.

```
IamCondition condition = IamCondition.create(IamConditionOperator.STRING_NOT_LIKE,
 "key", "value");
```

Recursos

v1

El elemento *`Resource`* de una instrucción de política se representa mediante la clase `Resource` del SDK. El ARN se proporciona como cadena en el constructor. Las siguientes subclases proporcionan constructores de conveniencia.

- S3BucketResource
- S3ObjectResource
- SQSQueueResource

En v1 puede especificar un elemento *`NotResource`* para un `Resource` llamando al método `withIsNotType`, como se muestra en la siguiente instrucción.

```
Resource resource = new Resource("arn:aws:s3:::amzn-s3-demo-
bucket").withIsNotType(true);
```

v2

En v2 se crea un elemento *Resource* pasando un ARN al método `IamResource.create`.

```
IamResource resource = IamResource.create("arn:aws:s3:::amzn-s3-demo-bucket");
```

Se puede establecer un `IamResource` como elemento *NotResource*, como se muestra en el siguiente fragmento de código.

```
IamResource resource = IamResource.create("arn:aws:s3:::amzn-s3-demo-bucket");
IamStatement.builder().addNotResource(resource);
```

`IamResource.ALL` representa todos los recursos.

Entidades principales

v1

El SDK v1 ofrece las siguientes clases `Principal` para representar los tipos de entidades principales que incluyen a todos los miembros:

- `AllUsers`
- `AllServices`
- `AllWebProviders`
- `All`

No se puede añadir un elemento *NotPrincipal* a una instrucción.

v2

En v2, `IamPrincipal.ALL` representa todas las entidades principales:

Para representar a todos los miembros de otros tipos de entidades principales, utilice las clases `IamPrincipalType` al crear un `IamPrincipal`.

- `IamPrincipal.create(IamPrincipalType.AWS,"*")` para todos los usuarios.

- `IamPrincipal.create(IamPrincipalType.SERVICE,"*")` para todos los servicios.
- `IamPrincipal.create(IamPrincipalType.FEDERATED,"*")` para todos los proveedores web.
- `IamPrincipal.create(IamPrincipalType.CANONICAL_USER,"*")` para todos los usuarios canónicos.

Puede utilizar el método `addNotPrincipal` para representar un elemento *`NotPrincipal`* al crear una instrucción de política, como se muestra en la siguiente instrucción.

```
IamPrincipal principal = IamPrincipal.create(IamPrincipalType.AWS,
 "arn:aws:iam::444455556666:root");
IamStatement.builder().addNotPrincipal(principal);
```

Cambios en el trabajo con DynamoDB de la versión 1 a la versión 2 del AWS SDK para Java

Temas

- Diferencias de la API de mapeo de DynamoDB entre la versión 1 y la versión 2 del AWS SDK para Java
- Documente las diferencias de API entre la versión 1 y la versión 2 de AWS SDK para Java
- Migración de la biblioteca de cifrado

Diferencias de la API de mapeo de DynamoDB entre la versión 1 y la versión 2 del AWS SDK para Java

El APIs mapeo de DynamoDB cambió significativamente entre la versión 1 y la versión 2 de. AWS SDK para Java En la versión 1, se utiliza `DynamoDBMapper` para trabajar con Java. POJOs En la versión 2, se utiliza `DynamoDbEnhancedClient` con nombres de métodos actualizados, opciones de definición de esquemas mejoradas y seguridad de tipos mejorada.

Principales diferencias:

- Nuevos nombres de métodos (por ejemplo, `getItem` en lugar de `load`)
- Creación de esquemas de tabla explícitos
- Compatibilidad integrada con operaciones sincrónicas y asincrónicas

- Cambios en la forma en que se administran las cadenas vacías y la configuración

En esta sección, se describen los cambios en la API de asignación, las diferencias en las anotaciones, las actualizaciones de configuración y la guía de migración para ayudarte a realizar la transición de `DynamoDBMapper` v1 a `DynamoDbEnhancedClient` v2.

Contenido

- Cambios de alto nivel en las bibliotecas asignación de la versión 1 a la 2 del SDK para Java
  - Diferencias en dependencia de importación
- Cambios en el APIs mapeo de DynamoDB entre la versión 1 y la versión 2 del SDK for Java
  - Crear un cliente
  - Establecimiento de asignación a tabla/índice de DynamoDB
  - Operaciones de tabla
  - Asignación de clases y propiedades
    - Anotaciones de bean
    - Anotaciones adicionales de la V2
  - Configuración
    - Configuración por operación
  - Condicionales
  - Conversión de tipos
    - Convertidores predeterminados
    - Establecimiento de un conversor personalizado para un atributo
    - Adición de una fábrica o un proveedor de convertidores de tipos
- Diferencias en el tratamiento de cadenas entre la versión 1 y la 2 del SDK para Java
- Diferencias de bloqueo positivo entre la versión 1 y la 2 del SDK para Java
- Fluent setters: diferencias entre la versión 1 y la 2 del SDK para Java

Cambios de alto nivel en las bibliotecas asignación de la versión 1 a la 2 del SDK para Java

Los nombres del cliente de asignación de cada biblioteca difieren en la V1 y en la V2:

- V1: Dynamo DBMapper
- V2: Cliente mejorado de DynamoDB

Se interactúa con las dos bibliotecas prácticamente de la misma manera: se crea una instancia mapper/client y, a continuación, se proporciona un POJO de Java para leer y escribir estos APIs elementos en las tablas de DynamoDB. Ambas bibliotecas también ofrecen anotaciones para la clase del POJO para indicar la forma en que el cliente gestiona el POJO.

Diferencias notables al pasar a V2:

- V2 y V1 utilizan nombres de métodos diferentes para las operaciones de DynamoDB de bajo nivel. Por ejemplo:

V1	V2
carga	getItem
save	putItem
batchLoad	batchGetItem

- La versión 2 ofrece varias formas de definir esquemas de tablas y asignarlos a tablas. POJOs Puede elegir entre el uso de anotaciones o un esquema generado a partir de código mediante un generador. V2 también ofrece versiones mutables e inmutables de los esquemas.
- Con V2, se crea específicamente el esquema de tabla como uno de los primeros pasos, mientras que en V1, el esquema de tabla se deduce de la clase anotada según sea necesario.
- V2 incluye el Cliente de la API de documento en la API de cliente mejorada, mientras que V1 usa una API aparte.
- Todas APIs están disponibles en versiones síncronas y asíncronas en la versión 2.

Consulte la sección de asignación de DynamoDB de esta guía para obtener información más detallada sobre el cliente mejorado de V2.

Diferencias en dependencia de importación

V1	V2
<dependencyManagement> <dependencies> <dependency>	<dependencyManagement> <dependencies> <dependency>

V1	V2
<groupId>com.amazonaws</groupId> <artifactId>aws-java-sdk-bom</artifactId> <version> *1.X.X*</version> <type>pom</type> <scope>import</scope> </dependency> </dependencies> </dependencyManagement> <dependencies> <dependency> <groupId>com.amazonaws</groupId> <artifactId>aws-java-sdk-dynamodb</artifactId> </dependency> </dependencies>	<groupId>software.amazon.awssdk</groupId> <artifactId>bom</artifactId> <version> *2.X.X**</version> <type>pom</type> <scope>import</scope> </dependency> </dependencies> </dependencyManagement> <dependencies> <dependency> <groupId>software.amazon.awssdk</groupId> <artifactId>dynamodb-enhanced</artifactId> </dependency> </dependencies>

* Última versión.

En la versión 1, una sola dependencia incluye tanto la API de DynamoDB de bajo nivel como mapping/document la API, mientras que en la versión 2, se utiliza `dynamodb-enhanced` la dependencia de artefactos para acceder a la API. mapping/document El módulo `dynamodb-enhanced` contiene una dependencia transitiva del módulo `dynamodb` de bajo nivel.

Cambios en el APIs mapeo de DynamoDB entre la versión 1 y la versión 2 del SDK for Java

Crear un cliente

Caso de uso	V1	V2
Instanciación normal	`AmazonDynamoDB standardClient = AmazonDynamoDBClientBuilder.standard() .withCredentials(credentialsProvider)`	`DynamoDbClient standardClient = DynamoDbClient.builder() .credentialsProvider(ProfileCredentialsProvider.create())`

Caso de uso	V1	V2

	`.withRegion(Regions.US_EAST_1)`
	`.build();`
	`DynamoDBMapper mapper = new DynamoDBMapper(standardClient);`
		`.region(Region.US_EAST_1)`
		`.build();`
		`DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()`
		`.dynamoDbClient(standardClient)`
		`.build();`

Instanciación mínima	`AmazonDynamoDB standardClient = AmazonDynamoDBClientBuilder.standard();` `DynamoDBMapper mapper = new DynamoDBMapper(standardClient);`	`DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.create();`

Con transformador de atributos*	`DynamoDBMapper mapper = new DynamoDBMapper(standardClient,`
	
	`attributeTransformerInstance);`
		`DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()`
		`.dynamoDbClient(standardClient)`
		`.extensions(extensionAInstance, extensionBInstance)`
		`.build();`

*Las extensiones de V2 corresponden aproximadamente a los transformadores de atributos de V1. La sección the section called “Personalización de operaciones con extensiones” contiene más información sobre extensiones de V2.

Establecimiento de asignación a tabla/índice de DynamoDB

En V1, se especifica un nombre de tabla de DynamoDB mediante una anotación de bean. En V2, un método de fábrica, `table()`, produce una instancia de `DynamoDbTable` que representa la

tabla remota de DynamoDB. El primer parámetro del método `table()` es el nombre de tabla de DynamoDB.

Caso de uso	V1	V2

Asignar la clase POJO de Java a la tabla de DynamoDB	`@DynamoDBTable(tableName ="Customer")`
	`public class Customer {`
	`  ...`
	`}`
		`DynamoDbTable<Customer> customerTable = enhancedClient.table("Customer", TableSchema.fromBean(Customer.class));`

Asignar a un índice secundario de DynamoDB	1. Defina una clase POJO que represente el índice.
	• Anote la clase con `@DynamoDBTable` proporcionando el nombre de la tabla que contiene el índice.
	• Anote propiedades con `@DynamoDBIndexHashKey` y, opcionalmente, `@DynamoDBIndexRangeKey` .
	2. Cree una expresión de consulta.
	3. Consulte haciendo referencia a la clase POJO que representa el índice. Por ejemplo
	`mapper.query(IdEmailIndex.class, queryExpression)`
		1. Anote atributos de una clase POJO con `@DynamoDbSecondaryPartitionKey` (para un GSI) y `@DynamoDbSecondarySortKey` (para un GSI o LSI). Por ejemplo:
		`@DynamoDbSecondarySortKey(indexNames = "IdEmailIndex")`
		`public String getEmail() { return this.email; }`
		2. Recupere una referencia al índice. Por ejemplo:
		`DynamoDbIndex<Customer> customerIndex = customerTable.index("IdEmailIndex");`
		3. Consulte el índice.

Caso de uso	V1	V2
	donde `IdEmailIndex` es la clase de asignación del índice. En la sección de la Guía para desarrolladores de DynamoDB que analiza el método de `query` V1 se muestra un ejemplo completo.	En la sección ??? de esta guía se proporciona más informaci ón.

Operaciones de tabla

En esta sección se describen las operaciones APIs que difieren entre la V1 y la V2 en la mayoría de los casos de uso estándar.

En la V2, todas las operaciones que implican una sola tabla se llaman en la instancia de `DynamoDbTable`, no en el cliente mejorado. El cliente mejorado contiene métodos que pueden referirse a varias tablas.

En la tabla denominada Operaciones de tabla que aparece a continuación, se hace referencia a una instancia de POJO como `item` o como tipo específico, por ejemplo `customer1`. En los ejemplos de la V2, la instancia llamada `table` es resultado de una llamada anterior a `enhancedClient.table()` que devuelve una referencia a la instancia `DynamoDbTable`.

Tenga en cuenta que la mayoría de las operaciones de la V2 se pueden llamar con un patrón de consumo fluido, incluso cuando no se muestran. Por ejemplo:

```
Customer customer = table.getItem(r # r.key(key));
  or
Customer customer = table.getItem(r # r.key(k ->
 k.partitionValue("id").sortValue("email")))
```

Para las operaciones de la V1, Operaciones de tabla (a continuación) contiene algunos de los formularios más utilizados y no todos los formularios sobrecargados. Por ejemplo, el método `load()` presenta las siguientes sobrecargas:

```
mapper.load(Customer.class, hashKey)
mapper.load(Customer.class, hashKey, rangeKey)
mapper.load(Customer.class, hashKey, config)
mapper.load(Customer.class, hashKey, rangeKey, config)
mapper.load(item)
mapper.load(item, config)
```

Operaciones de tabla (a continuación) muestra los formularios más utilizados:

```
mapper.load(item)
mapper.load(item, config)
```

Operaciones de tabla

Caso de uso	V1	V2

Escribir un POJO de Java en una tabla de Dynam
 	
Operac de Dynam PutIte Update m
	`mapper.save(item)`
	`mapper.save(item, config)`
	`mapper.save(item, saveExpression, config)`
	
	En la V1, `DynamoDBMapperConfig.SaveBehavior` y las anotaciones determinan a qué método de DynamoDB de bajo nivel se llamará. En general, se llama a `UpdateItem` excepto cuando se usa `SaveBehavior.CLOBBER` y `SaveBehavior.PUT`. Las claves generadas automáticamente son un caso de uso especial y, en ocasiones, se utilizan `PutItem` y `UpdateItem`.
		`table.putItem(putItemRequest)`
		`table.putItem(item)`
		`table.putItemWithResponse(item) // Returns metadata.`
		
		`updateItem(updateItemRequest)`
		`table.updateItem(item)`
		`table.updateItemWithResponse(item) // Returns metadata.`

Leer un	`mapper.load(item)` `mapper.load(item, config)`	`table.getItem(getItemRequest)` `table.getItem(item)`

Caso de uso	V1	V2
elemen de una tabla de Dynam a un POJO de Java Operac de Dynam GetIte		`table.getItem(key)` `table.getItemWithResponse(key) // Returns POJO with metadata.`

Elimina un elemen de una tabla de Dynam
 	
Operac de Dynam Delete m
	`mapper.delete(item, deleteExpression, config)`	`table.deleteItem(deleteItemRequest)`
		`table.deleteItem(item)`
		`table.deleteItem(key)`

Caso de uso	V1	V2

Consult una tabla o un índice secund o de Dynam y devoluc n de una lista paginac
 	
Operac de Dynam `Query`
	`mapper.query(Customer.class , queryExpression)`
	`mapper.query(Custom er.class, queryExpression,`
	
	`mapperConfig)`
		`table.query(queryRequest)`
		`table.query(queryConditional)`
		
		Usar el `PageIterable.stream()` devuelto (carga diferida) para respuestas sincrónicas y `PagePublisher.subscribe()` para respuestas asincrónicas

Caso de uso	V1	V2

Consult una tabla o un índice secund o de Dynam y devolve una lista
 	
Operac de Dynam `Query`
	`mapper.queryPage(Customer.class, queryExpression)`
	`mapper.queryPage(Customer.class, queryExpression, mapperConfig)`
		`table.query(queryRequest)`
		`table.query(queryConditional)`
		
		Usar el `PageIterable.items()` devuelto (carga diferida) para respuestas sincrónicas y `PagePublisher.items.subscribe()` para respuestas asincrónicas

Caso de uso	V1	V2

Analiza una tabla o un índice secund o de Dynam y devolve una lista paginad
 	
Operac de Dynam `Scan`
	`mapper.scan(Customer.class, scanExpression)`
	`mapper.scan(Customer.class, scanExpression, mapperConfig)`
		`table.scan()`
		`table.scan(scanRequest)`
		
		Usar el `PageIterable.stream()` devuelto (carga diferida) para respuestas sincrónicas y `PagePublisher.subscribe()` para respuestas asincrónicas

Caso de uso	V1	V2

Analiza una tabla o un índice secundario de Dynam y devolve una lista
 	
Operac de Dynam `Scan`
	`mapper.scanPage(Customer.class, scanExpression)`
	`mapper.scanPage(Customer.class, scanExpression,`
	`mapperConfig)`
		`table.scan()`
		`table.scan(scanRequest)`
		
		Usar el `PageIterable.items()` devuelto (carga diferida) para respuestas sincrónicas y `PagePublisher.items.subscribe()` para respuestas asincrónicas

Caso de uso	V1	V2

Leer varios elemen de varias tablas de un lote
 	
Operac de Dynam BatchG tem
	`mapper.batchLoad(Arrays.asList(customer1,`
	
	`  customer2,`
	
	`  book1))`
	`mapper.batchLoad(itemsToGet)`
	`  // itemsToGet: Map<Class<?>, List<KeyPair>>`
		`enhancedClient.batchGetItem(batchGetItemRequest)`
		
		`enhancedClient.batchGetItem(r -> r.readBatches(`
		`  ReadBatch.builder(Record1.class)`
		`  .mappedTableResource(mappedTable1)`
		`  .addGetItem(i -> i.key(k -> k.partitionValue(0)))`
		`  .build(),`
		`  ReadBatch.builder(Record2.class)`
		`  .mappedTableResource(mappedTable2)`
		`  .addGetItem(i -> i.key(k -> k.partitionValue(0)))`
		`  .build()))`
		
		`// Iterate over pages with lazy loading or over all items`
		`  from the same table.`

Caso de uso	V1	V2

Escribir varios elemen en varias tablas de un lote
 	
Operac de Dynam BatchW eItem
	`mapper.batchSave(Arrays.asL ist(customer1,`
	
	`customer2,`
	
	`book1))`
		`enhancedClient.batchWriteItem(batchW riteItemRequest)`
		
		`enhancedClient.batchWriteItem(r ->`
		` r.writeBatches(`
		`WriteBatch.builder(Record1.class)`
		`.mappedTableResource(mapped Table1)`
		`.addPutItem(item1)`
		`.build(),`
		`WriteBatch.builder(Record2.class)`
		`.mappedTableResource(mapped Table2)`
		`.addPutItem(item2)`
		`.build()))`

Elimina varios elemen de varias tablas de un lote
 	
Operac de Dynam BatchW eItem
	`mapper.batchDelete(Arrays.a sList(customer1,`
	
	`customer2,`
	
	`book1))`
		`enhancedClient.batchWriteItem(r ->`
		` r.writeBatches(`
		`WriteBatch.builder(Record1.class)`
		`.mappedTableResource(mapped Table1)`
		`.addDeleteItem(item1key)`
		`.build(),`
		`WriteBatch.builder(Record2.class)`
		`.mappedTableResource(mapped Table2)`
		`.addDeleteItem(item2key)`
		`.build()))`

Caso de uso	V1	V2
Escribir eliminar varios elemen de un lote Operac de Dynam BatchW eItem	`mapper.batchWrite(Arrays.as List(customer1, book1), Arrays.as List(customer2))`	`enhancedClient.batchWriteItem(r -> r.writeBatches( WriteBatch.builder(Record1.class) .mappedTableResource(mapped Table1) .addPutItem(item1) .build(), WriteBatch.builder(Record2.class) .mappedTableResource(mapped Table2) .addDeleteItem(item2key) .build()))`
Realiza una escritur transac onal Operac de Dynam Transa riteIt	`mapper.transactionWrite(tra nsactionWriteRequest)`	`enhancedClient.transactWriteItems(tr ansasctWriteItemsRequest)`

Caso de uso	V1	V2
Realiza una lectura transaccional Operación de DynamoDB: `TransactGetItems`	`mapper.transactionLoad(transactionLoadRequest)`	`enhancedClient.transactGetItems(transactGetItemsRequest)`

Obtener un recuento de elementos coincidentes de una consulta
 	
Operación de DynamoDB: `Query` con `Select.COUNT`
	`mapper.count(Customer.class, queryExpression)`	`// Get the count from query results.`
		`PageIterable<Customer> pageIterable =`
		`customerTable.query(QueryEnhancedRequest.builder()`
		`.queryConditional(queryConditional)`
		`.select(Select.COUNT)`
		`.build());`
		`Iterator<Page<Customer>> iterator = pageIterable.iterator();`
		`Page<Customer> page = iterator.next();`
		`int count = page.count();`
		
		`// For a more concise approach, you can chain the method calls:`
		`int count = customerTable.query(QueryEnhancedRequest.builder()`
		`.queryConditional(queryConditional)`
		`.select(Select.COUNT)`
		`.build())`
		`.iterator().next().count();`

Caso de uso	V1	V2

Obtener un recuento de elementos coincidentes de un análisis
 	
Operación de DynamoDB Scan con Select: COUNT
	`mapper.count(Customer.class, scanExpression)`	`// Get the count from scan results.`
		`PageIterable<Customer> pageIterable =`
		`customerTable.scan(ScanEnhancedRequest.builder()`
		`.filterExpression(filterExpression)`
		`.select(Select.COUNT)`
		`.build());`
		`Iterator<Page<Customer>> iterator = pageIterable.iterator();`
		`Page<Customer> page = iterator.next();`
		`int count = page.count();`
		
		`// For a more concise approach, you can chain the method calls:`
		`int count = customerTable.scan(ScanEnhancedRequest.builder()`
		`.filterExpression(filterExpression)`
		`.select(Select.COUNT)`
		`.build())`
		`.iterator().next().count();`

Caso de uso	V1	V2

Crear una tabla en Dynam correspondiente a la clase POJO
 	
Operac de Dynam `Create` le
	`mapper.generateCreateTableRequest(Customer.class)`
	
	La instrucción anterior genera una solicitud de creación de tabla de bajo nivel; los usuarios deben llamar a `createTable` en el cliente de DynamoDB.
		`table.createTable(createTableRequest)`
		
		`table.createTable(r -> r.provisionedThroughput(defaultThroughput())`
		`.globalSecondaryIndices(`
		`EnhancedGlobalSecondaryIndex.builder()`
		`.indexName("gsi_1")`
		`.projection(p -> p.projectionType(ProjectionType.ALL))`
		`.provisionedThroughput(defaultThroughput())`
		`.build()));`

Caso de uso	V1	V2
Realiza un análisis paralelo en Dynam Operac de Dynam `Scan` con paráme sSegme y `Totals` ents	`mapper.parallelScan(Custome r.class, scanExpre ssion, numTotalS egments)`	Los usuarios deben administrar los subprocesos de trabajo y llamar a `scan` para cada segmento: `table.scan(r -> r.segment(0).total Segments(5))`
Integrac ón de Amazor S3 con Dynam para almace enlaces de S3 inteliger tes	`mapper.createS3Link(bucket, key) mapper.getS3ClientCache()`	No se admite porque acopla Amazon S3 y DynamoDB.

Asignación de clases y propiedades

Tanto en la V1 como en la V2, las clases se asignan a tablas mediante anotaciones de tipo bean. La V2 también ofrece otras formas de definir esquemas para casos de uso específicos, como trabajar con clases inmutables.

Anotaciones de bean

La siguiente tabla muestra las anotaciones de bean equivalentes para un caso de uso específico que se utilizan en V1 y V2. Se utiliza un escenario de clase de `Customer` para ilustrar parámetros.

Las anotaciones, así como las clases y las enumeraciones, de la versión 2 siguen la convención camel case y utilizan '', no 'DynamoDB'. DynamoDb

Caso de uso	V1	V2
Asignar clase a tabla	`@DynamoDBTable (tableName ="CustomerTable")`	`@DynamoDbBean` `@DynamoDbBean(converterProviders = {...})` El nombre de la tabla se define al llamar al método `DynamoDbEnhancedClient#table()` .
Designar un miembro de clase como atributo de tabla	`@DynamoDBAttribute (attributeName = "customerName")`	`@DynamoDbAttribute("customerName")`
Designar a un hash/ partition miembro de la clase es clave	`@DynamoDBHashKey`	`@DynamoDbPartitionKey`
Designar a un miembro de la clase	`@DynamoDBRangeKey`	`@DynamoDbSortKey`

Caso de uso	V1	V2
es range/sort clave		
Designar un miembro de clase como clave de hash/partición de índice secundario	`@DynamoDBIndexHashKey`	`@DynamoDbSecondaryPartitionKey`
Designar un miembro de clase como clave de rango/clasificación de índice secundario	`@DynamoDBIndexRangeKey`	`@DynamoDbSecondarySortKey`
Ignorar este miembro de clase al asignarlo a una tabla	`@DynamoDBIgnore`	`@DynamoDbIgnore`
Designar un miembro de clase como atributo clave UUID generado automáticamente	`@DynamoDBAutoGeneratedKey`	`@DynamoDbAutoGeneratedUuid` La extensión que lo proporciona no se carga de forma predeterminada; debe agregarla al compilador de clientes.

Caso de uso	V1	V2
Designar un miembro de clase como atributo de marca de tiempo generado automáticamente	`@DynamoDBAutoGeneratedTimestamp`	`@DynamoDbAutoGeneratedTimestampAttribute` La extensión que lo proporciona no se carga de forma predeterminada; debe agregarla al compilador de clientes.
Designar un miembro de clase como atributo de versión con incremento automático	`@DynamoDBVersionAttribute`	`@DynamoDbVersionAttribute` La extensión que proporciona esto se carga automáticamente.
Designar que un miembro de clase requiere una conversión personalizada	`@DynamoDBTypeConverted`	`@DynamoDbConvertedBy`
Designar que un miembro de clase se almacene como otro tipo de atributo	`@DynamoDBTyped(<DynamoDBAttributeType>)`	Utilice una implementación de `AttributeConverter` . V2 proporciona muchos convertidores integrados para tipos de Java comunes. También puede implementar su propio `AttributeConverter` o `AttributeConverterProvider` personalizado. Consulte the section called “Conversión de atributos de control” en esta guía.

Caso de uso	V1	V2
Designe una clase que se pueda serializar en un documento (documento de estilo JSON) o subdocumento de DynamoDB	`@DynamoDBDocument`	Uso de la API de Documento mejorado Consulte los siguientes recursos: • the section called “Trabajar con documentos JSON” en esta guía • Entrada de blog publicada cuando se lanzó la API de Documento mejorado

Anotaciones adicionales de la V2

Caso de uso	V1	V2
Designar que un miembro de clase no se almacene como atributo NULL si el valor de Java es nulo	N/A	`@DynamoDbIgnoreNulls`
Designar un miembro de clase como objeto vacío si todos los atributos son nulos	N/A	`@DynamoDbPreserveEmptyObject`
Designar una acción de actualización especial para un miembro de clase	N/A	`@DynamoDbUpdateBehavior`
Designar una clase inmutable	N/A	`@DynamoDbImmutable`
Designar un miembro de clase como atributo de	N/A	`@DynamoDbAtomicCounter`

Caso de uso	V1	V2
contador de incremento automático		La extensión que proporciona esto se carga automáticamente.

Configuración

En la V1, generalmente se controlan comportamientos específicos mediante una instancia de `DynamoDBMapperConfig`. Puede proporcionar el objeto de configuración al crear el asignador o al realizar una solicitud. En la V2, la configuración es específica del objeto de solicitud de la operación.

Caso de uso	V1	Predeterminado en V1	V2
	`DynamoDBMapperConfig.builder()`		
Estrategia de load/write reintento por lotes	`.withBatchLoadRetryStrategy(loadRetryStrategy)` `.withBatchWriteRetryStrategy(writeRetryStrategy)`	reintento de elementos fallidos	Configure la estrategia de reintento en el `DynamoDBClient` subyacente. Consulte the section called “Reintentos” en esta guía.
Lecturas consistentes	`.withConsistentReads(CONSISTENT)`	`EVENTU`	De forma predeterminada, las lecturas consistentes son falsas para operaciones de lectura. Anule con `.consistentRead(true)` en el objeto de solicitud.
Esquema de conversión con	`.withConversionSchema(conversionSchema)`	`V2_COMPATIBLE`	No se usa. Se trata de una función antigua que hace referencia a la forma en que las primeras versiones de DynamoDB (V1) almacenaban los tipos de datos, y este comportamiento

Caso de uso	V1	Predeterminado en V1	V2
conjuntos de serializadores/ deserializadores	Las implementaciones estáticas proporcionan compatibilidad con versiones anteriores.		no se conservará en el cliente mejorado. Un ejemplo de comportamiento en DynamoDB V1 es almacenar los valores booleanos como número en lugar de como booleanos.
Nombres de tablas	`.withObjectTableNameResolver()` `.withTableNameOverride()` `.withTableNameResolver()` Las implementaciones estáticas proporcionan compatibilidad con versiones anteriores	usa anotación o estimación a partir de la clase	El nombre de la tabla se define al llamar al método `DynamoDbEnhancedClient#table()` .
Estrategia de carga de paginación	`.withPaginationLoadingStrategy(strategy)` Las opciones son: `LAZY_LOADING`, `EAGER_LOADING` o `ITERATION_ONLY`	`LAZY_LOADING`	• Iteración solo es la opción predeterminada. No se admiten las demás opciones de la V1. • Puede implementar el equivalente a una carga intensiva en la V2 con lo siguiente: `List<Customer> allItems = customerTable.scan().items().stream().collect(Collectors.toList());` • Para carga diferida, debe implementar su propia lógica de almacenamiento en caché para los elementos a los que acceda.

Caso de uso	V1	Predeter inado en V1	V2
Solicitud de recopilación de métricas	`.withRequestMetricCollector(collector)`	`null`	Use `metricPublisher()` en `ClientOverrideConfiguration` al crear el cliente estándar de DynamoDB.
Comportamiento de guardado	`.withSaveBehavior(SaveBehavior.CLOBBER)` Las opciones son `UPDATE`, `CLOBBER`, `PUT`, `APPEND_SET` o `UPDATE_SKIP_NULL_ATTRIBUTES` .	`UPDATE`	En la V2, se llama a `putItem()` o `updateItem()` de forma explícita. `CLOBBER` or `PUT`: la acción correspondiente en la v2 es llamar a `putItem()` . No hay una configuración específica de `CLOBBER`. `UPDATE`: Corresponde a `updateItem()` `UPDATE_SKIP_NULL_ATTRIBUTES` : Corresponde a`updateItem()` . Controle el comportamiento de actualización con la configuración de solicitud `ignoreNulls` y la anotación/etiqueta `DynamoDbUpdateBehavior` . `APPEND_SET` : no se admite
Fábrica de convertidores de tipos	`.withTypeConverterFactory(typeConverterFactory)`	convertidores de tipos estándar	Establezca el bean utilizando `@DynamoDbBean(converterProviders = {ConverterProvider.class, DefaultAttributeConverterProvider.class})`

Configuración por operación

En la V1, algunas operaciones, por ejemplo, `query()`, son altamente configurables mediante un objeto de "expresión" enviado a la operación. Por ejemplo:

```
DynamoDBQueryExpression<Customer> emailBwQueryExpr = new
 DynamoDBQueryExpression<Customer>()
    .withRangeKeyCondition("Email",
        new Condition()
            .withComparisonOperator(ComparisonOperator.BEGINS_WITH)
            .withAttributeValueList(
                new AttributeValue().withS("my")));

mapper.query(Customer.class, emailBwQueryExpr);
```

En la V2, en lugar de utilizar un objeto de configuración, se establecen parámetros en el objeto de solicitud mediante un generador. Por ejemplo:

```
QueryEnhancedRequest emailBw = QueryEnhancedRequest.builder()
    .queryConditional(QueryConditional
        .sortBeginsWith(kb -> kb
            .sortValue("my"))).build();

customerTable.query(emailBw);
```

Condicionales

En la V2, las expresiones condicionales y de filtrado se expresan mediante un objeto `Expression`, que encapsula la condición y la asignación de nombres y filtros.

Caso de uso	Operaciones	V1	V2
Condiciones de atributo esperada	save(), delete(), query(), scan()	`new DynamoDBSaveExpression() .withExpected(Collections.singletonMap( "otherAttribute", new`	Obsoleto; utilice `ConditionExpression` en su lugar.

Caso de uso	Operaciones	V1	V2
		`ExpectedAttributeValue(false))).withConditionalOperator(ConditionalOperator.AND);`	
Expresión de condición	delete()	`deleteExpression.setConditionExpression("zipcode = :zipcode")` `deleteExpression.setExpressionAttributeValues(...)`	`Expression conditionExpression = Expression.builder().expression("#key = :value OR #key1 = :value1").putExpressionName("#key", "attribute").putExpressionName("#key1", "attribute3").putExpressionValue(":value", AttributeValues.stringValue("wrong")).putExpressionValue(":value1", AttributeValues.stringValue("three")).build();`  `DeleteItemEnhancedRequest request = DeleteItemEnhancedRequest.builder().conditionExpression(conditionExpression).build();`

Caso de uso	Operaciones	V1	V2
Expresión de filtro	query(), scan()	`scanExpression .withFilterExpression("#statename = :state") .withExpressionAttributeValues(attributeValueMapBuilder.build()) .withExpressionAttributeNames(attributeNameMapBuilder.build())`	`Map<String, AttributeValue> values = singletonMap(":key", stringValue("value")); Expression filterExpression = Expression.builder() .expression("name = :key") .expressionValues(values) .build(); QueryEnhancedRequest request = QueryEnhancedRequest.builder() .filterExpression(filterExpression).build();`
Expresión de condición para consulta	query()	`queryExpression.withKeyConditionExpression()`	`QueryConditional keyEqual = QueryConditional.keyEqualTo(b -> b .partitionValue("movie01")); QueryEnhancedRequest tableQuery = QueryEnhancedRequest.builder() .queryConditional(keyEqual) .build();`

Conversión de tipos

Convertidores predeterminados

En la V2, el SDK proporciona un conjunto de convertidores predeterminados para todos los tipos comunes. Puede cambiar los convertidores de tipos tanto en el nivel de proveedor general como para un único atributo. Puedes encontrar una lista de los convertidores disponibles en la referencia de la AttributeConverterAPI.

Establecimiento de un conversor personalizado para un atributo

En la V1, puede anotar un método getter con `@DynamoDBTypeConverted` para especificar la clase que convierte entre el tipo de atributo de Java y un tipo de atributo de DynamoDB. Por ejemplo, se puede aplicar un `CurrencyFormatConverter` que convierta entre un tipo `Currency` de Java y una cadena de DynamoDB, como se muestra en el siguiente fragmento de código.

```
@DynamoDBTypeConverted(converter = CurrencyFormatConverter.class)
public Currency getCurrency() { return currency; }
```

A continuación se muestra el equivalente en V2 del fragmento anterior.

```
@DynamoDbConvertedBy(CurrencyFormatConverter.class)
public Currency getCurrency() { return currency; }
```

> **Note**
>
> En la V1 puede aplicar la anotación al atributo en sí, a un tipo o a una anotación definida por el usuario, mientras que en la V2 solo se puede aplicar la anotación al getter.

Adición de una fábrica o un proveedor de convertidores de tipos

En la V1 puede proporcionar su propio conjunto de convertidores de tipos o anular los tipos que le interesen añadiendo una fábrica de convertidores de tipos a la configuración. La fábrica de convertidores de tipos amplía `DynamoDBTypeConverterFactory` y las anulaciones se realizan tomando una referencia al conjunto predeterminado y ampliándola. En el siguiente fragmento de código se muestra cómo hacerlo.

```
DynamoDBTypeConverterFactory typeConverterFactory =
    DynamoDBTypeConverterFactory.standard().override()
        .with(String.class, CustomBoolean.class, new DynamoDBTypeConverter<String,
 CustomBoolean>() {
            @Override
            public String convert(CustomBoolean bool) {
                return String.valueOf(bool.getValue());
            }
            @Override
            public CustomBoolean unconvert(String string) {
```

```
                return new CustomBoolean(Boolean.valueOf(string));
            }}).build();
DynamoDBMapperConfig config =
    DynamoDBMapperConfig.builder()
        .withTypeConverterFactory(typeConverterFactory)
        .build();
DynamoDBMapper mapperWithTypeConverterFactory = new DynamoDBMapper(dynamo, config);
```

La V2 proporciona una funcionalidad similar a través de la anotación `@DynamoDbBean`. Puede proporcionar un `AttributeConverterProvider` único o una cadena de `AttributeConverterProvider` en orden. Tenga en cuenta que si suministra su propia cadena de proveedores de convertidores de atributos, anulará el proveedor de convertidores predeterminado y deberá incluirlo en la cadena para utilizar sus convertidores de atributos.

```
@DynamoDbBean(converterProviders = {
   ConverterProvider1.class,
   ConverterProvider2.class,
   DefaultAttributeConverterProvider.class})
public class Customer {
  ...
}
```

La sección sobre conversión de atributos de esta guía contiene un ejemplo completo para la V2.

Diferencias en el tratamiento de cadenas entre la versión 1 y la 2 del SDK para Java

La V1 y la V2 tratan las cadenas vacías de forma diferente al enviar datos a DynamoDB:

- V1: convierte las cadenas vacías en valores nulos antes de enviarlas a DynamoDB (lo que no produce ningún atributo)
- V2: envía cadenas vacías como valores reales de cadenas vacías a DynamoDB

> **Important**
>
> Tras migrar a la V2, si no desea almacenar cadenas vacías en DynamoDB, debe implementar convertidores personalizados. Sin convertidores personalizados, la V2 almacena cadenas vacías como atributos de cadenas vacías reales en los elementos de DynamoDB, lo que difiere del comportamiento de la V1, que omite estos atributos por completo.

Example conversor personalizado para la V2 que convierte un atributo de cadena vacía en nulo

```
/**
 * Custom converter that maintains V1 behavior by converting empty strings to null
 values
 * when writing to DynamoDB, ensuring compatibility with existing data. No attribute
 will be saved to DynamoDB.
 */
public class NullifyEmptyStringConverter implements AttributeConverter<String> {
    @Override
    public AttributeValue transformFrom(String value) {
        if (value == null || value.isEmpty()) {
            return AttributeValue.builder().nul(true).build();
        }
        return AttributeValue.builder().s(value).build();
    }

    @Override
    public String transformTo(AttributeValue attributeValue) {
        if (attributeValue.nul()) {
            return null;
        }
        return attributeValue.s();
    }

    @Override
    public EnhancedType<String> type() {
        return EnhancedType.of(String.class);
    }

    @Override
    public AttributeValueType attributeValueType() {
        return AttributeValueType.S;
    }
}

// V2 usage:
@DynamoDbBean
public class Customer {
    private String name;

    @DynamoDbConvertedBy(NullifyEmptyStringConverter.class)
    public String getName() {
        return name;
```

```
    }
}
```

Diferencias de bloqueo positivo entre la versión 1 y la 2 del SDK para Java

Tanto la V1 como la V2 implementan bloqueo positivo con una anotación de atributo que marca una propiedad en la clase bean para almacenar el número de versión.

Diferencias en el comportamiento de bloqueo positivo

	V1	V2
Anotación de clase bean	`@DynamoDBVersionAttribute`	`@DynamoDbVersionAttribute` (tenga en cuenta que la V2 usa una “b” minúscula)
Guardado inicial	Atributo de número de versión establecido en 1.	Valor inicial del atributo de versión establecido en `@DynamoDbVersionAttribute(startAt = X)`. El valor predeterminado es 0.
Actualización	El atributo de número de versión se incrementa en 1 si la comprobación condicional verifica que el número de versión del objeto que se está actualizando coincide con el número de la base de datos.	El atributo de número de versión se incrementa si la comprobación condicional verifica que el número de versión del objeto que se está actualizando coincide con el número de la base de datos. El atributo de número de versión se incrementa mediante la opción `incrementBy` establecida en `@DynamoDbVersionAttribute(incrementBy = X)`. El valor predeterminado es 1.

<table>
<tr><th></th><th>V1</th><th>V2</th></tr>
<tr><td>Eliminar</td><td><code>DynamoDBMapper</code> añade una comprobación condicional de que el número de versión del objeto que se está eliminando coincide con el número de versión de la base de datos.</td><td>La V2 no añade automáticamente condiciones para las operaciones de eliminación. Debe añadir expresiones de condición manualmente si desea controlar el comportamiento de eliminación.

En el siguiente ejemplo, <code>recordVersion</code> es el atributo de versión del bean.

<pre>// 1. Read the item and get its current version.
Customer item = customerTable.getItem(Key.builder().
partitionValue("someId").build());
AttributeValue currentVersion = item.getRecordVers
ion();

// 2. Create conditional delete with the `currentV
ersion` value.
DeleteItemEnhancedRequest deleteItemRequest =
    DeleteItemEnhancedRequest.builder()
       .key(KEY)
       .conditionExpression(Expression.builder()
           .expression("recordVersion = :current_
version_value")
           .putExpressionValue(":current_versio
n_value", currentVersion)
           .build()).build();

customerTable.deleteItem(deleteItemRequest);</pre></td></tr>
</table>

	V1	V2
Escritura transaccional con comprobación de condición	No se puede utilizar una clase de bean que esté anotada con `@DynamoDBVersionAttribute` en un método `addConditionCheck`.	Puede utilizar una clase de bean con la anotación `@DynamoDbVersionAttribute` en un método de compilador `addConditionCheck` para una solicitud `transactWriteItems`.
Deshabilitado	Para deshabilitar el bloqueo positivo, cambie el valor de enumeración `DynamoDBMapperConfig.SaveBehavior` de `UPDATE` a `CLOBBER`.	No utilice la anotación `@DynamoDbVersionAttribute`.

Fluent setters: diferencias entre la versión 1 y la 2 del SDK para Java

Se puede usar POJOs con configuradores fluidos en la API de mapeo de DynamoDB para la versión 1 y con la V2 desde la versión 2.30.29.

Por ejemplo, el siguiente POJO devuelve una instancia `Customer` del método `setName`:

```
// V1

@DynamoDBTable(tableName ="Customer")
public class Customer{
```

```
  private String name;
  // Other attributes and methods not shown.
  public Customer setName(String name){
     this.name = name;
     return this;
  }
}
```

Sin embargo, si utiliza una versión de V2 anterior a la 2.30.29, `setName` devuelve una instancia `Customer` con un valor `name` de `null`.

```
// V2 prior to version 2.30.29.

@DynamoDbBean
public class Customer{
  private String name;
  // Other attributes and methods not shown.
  public Customer setName(String name){
     this.name = name;
     return this;  // Bug: returns this instance with a `name` value of `null`.
  }
}
```

```
// Available in V2 since version 2.30.29.

@DynamoDbBean
public class Customer{
  private String name;
  // Other attributes and methods not shown.
  public Customer setName(String name){
     this.name = name;
     return this;  // Returns this instance for method chaining with the `name` value
 set.
  }
}
```

Documente las diferencias de API entre la versión 1 y la versión 2 de AWS SDK para Java

La API de documentos permite trabajar con documentos de estilo JSON como elementos individuales en una tabla de DynamoDB. La API de documentos de la V1 tiene una API

correspondiente en la V2, pero en lugar de utilizar un cliente independiente para la API de documentos como en la V1, la V2 incorpora características de la API de documentos en el cliente mejorado de DynamoDB.

En la V1, la clase `Item` representa un registro no estructurado de una tabla de DynamoDB. En la V2, un registro no estructurado se representa mediante una instancia de la clase `EnhancedDocument`. Tenga en cuenta que las claves principales se definen en el esquema de tabla en la V2 y en el propio elemento en la V1.

En la siguiente tabla se comparan las diferencias entre el documento APIs en la V1 y la V2.

Caso de uso	V1	V2
Cree un cliente de documentos	`AmazonDynamoDB client = ... //Create a client. DynamoDB documentClient = new DynamoDB(client);`	`// The V2 Document API uses the same DynamoDbEnhancedClient // that is used for mapping POJOs. DynamoDbClient standardClient = ... //Create a standard client. DynamoDbEnhancedClient enhancedClient = ... // Create an enhanced client.`
Haga referencia a una tabla	`Table documentTable = docClient.documentClient("Person");`	`DynamoDbTable<EnhancedDocument> documentTable = enhancedClient.table("Person", TableSchema.documentSchemaBuilder() .addIndexPartitionKey(TableMetadata.primaryIndexName(),"id", AttributeValueType.S)`

Caso de uso	V1	V2
		`.attributeConverterProviders(AttributeConverterProvider.defaultProvider())` `.build());`
Work with semi-structured data		

Poner elemento	`Item item = new Item()`
	`.withPrimaryKey("id", 50)`
	`.withString("firstName", "Shirley");`
	`PutItemOutcome outcome = documentTable.putItem(item);`
		`EnhancedDocument personDocument = EnhancedDocument.builder()`
		`.putNumber("id", 50)`
		`.putString("firstName", "Shirley")`
		`.build();`
		`documentTable.putItem(personDocument);`

Obtener elemento	`GetItemOutcome outcome = documentTable.getItemOutcome( "id", 50);`
	`Item personDocFromDb = outcome.getItem();`
	`String firstName = personDocFromDb.getString("firstName");`
		`EnhancedDocument personDocFromDb = documentTable`
		`.getItem(`
		`Key.builder()`
		`.partitionValue(50)`
		`.build());`
		`String firstName = personDocFromDb.getString("firstName");`

Work with JSON items		

Caso de uso	V1	V2
Convierte una estructura JSON para usarla con la API de documentos	`// The 'jsonPerson' identifier is a JSON string. Item item = new Item().fromJSON(jsonPerson);`	`// The 'jsonPerson' identifier is a JSON string. EnhancedDocument document = EnhancedDocument.builder() .json(jsonPerson).build());`
Pon JSON	`documentTable.putItem(item)`	`documentTable.putItem(document);`
Lee JSON	`GetItemOutcome outcome = //Get item. String jsonPerson = outcome.getItem().toJSON();`	`String jsonPerson = documentTable.getItem(Key.builder() .partitionValue(50).build()) .fromJson();`

Referencia de API y guías para el documento APIs

	V1	V2
Referencia de la API	Referencia de la API	Referencia de la API
Guía de documentación	Guía para desarrolladores de Amazon DynamoDB	API de documentos mejorada (esta guía)

De la API Xpec de la V1 a la API Expresiones de la V2

La API de especificación de expresiones (Xspec) disponible en la V1, que ayuda a crear expresiones para trabajar con datos orientados a documentos, no está disponible en la V2. La versión 2 usa la

API Expression, que funciona tanto con datos orientados a documentos como con datos object-to-item mapeados.

	V1	V2
Nombre de API	API de especificación de expresiones (Xspec)	API de expresiones
Funciona con	Métodos de la clase Tabla de la API Documentos, como updateItem y scan	Ambos APIs de DynamoDB Enhanced Client: 1. métodos de la API de mapeo object-to-item 2. métodos de la API de documentos mejorada para trabajar con datos orientados a documentos (JSON) Para ambos tipos de APIs, después de haber adquirido una `DynamoDbTable` instancia: • De `BeanTableSchema`, por ejemplo, para la API de object-to-item mapeo • Desde un `DocumentTableSchema` para la API orientada a documentos utilice expresiones en métodos `DynamoDbTable` cuando cree objetos de solicitud. Por ejemplo, en el método `filterExpression` del `QueryEnhancedRequest.Builder`
Recursos	• Entrada del blog sobre la versión inicial de Xpec • Referencia de la API	Información sobre expresiones en esta Guía para desarrolladores de Java

Migración de la biblioteca de cifrado

Para obtener información sobre la migración de la biblioteca de cifrado para que DynamoDB funcione con la versión 2 del SDK de Java, consulte la Guía para desarrolladores de Cliente de encriptación de Amazon DynamoDB.

Cambios en el procesamiento automático de solicitudes por lotes de Amazon SQS de la versión 1 a la 2

En este tema se detallan los cambios en el procesamiento automático de solicitudes por lotes para Amazon SQS entre la versión 1 y la 2 de AWS SDK para Java.

Cambios de alto nivel

La versión AWS SDK para Java 1.x realiza el almacenamiento en búfer del lado del cliente mediante una `AmazonSQSBufferedAsyncClient` clase independiente que requiere una inicialización explícita para el procesamiento por lotes de solicitudes.

Esto AWS SDK for Java 2.x simplifica y mejora la funcionalidad de almacenamiento en búfer con. `SqsAsyncBatchManager` La implementación de esta interfaz proporciona capacidades automáticas de procesamiento de solicitudes por lotes integradas directamente con el `SqsAsyncClient` estándar. Para obtener más información sobre el `SqsAsyncBatchManager` de la v2, consulte el tema the section called “Uso de procesamiento automático de solicitudes por lotes” de esta guía.

Cambio	v1	v2
dependencias Maven	`<dependencyManagement> <dependencies> <dependency> <groupId> com.amazonaws</groupId> <artifactId>aws-java-sdk-bom</artifactId> <version> 1.12.782[1]</version> <type>pom</type>`	`<dependencyManagement> <dependencies> <dependency> <groupId> software.amazon.awssdk</groupId> <artifactId>bom</artifactId> <version> 2.31.15[2]</version> <type>pom</type> <scope>import</scope>`

Cambio	v1	v2
	<scope>import</scope> </dependency> </dependencies> </dependencyManagement> <dependencies> <dependency> <groupId>com.amazonaws</groupId> <artifactId>aws-java-sdk-sqs</artifactId> </dependency> </dependencies>	</dependency> </dependencies> </dependencyManagement> <dependencies> <dependency> <groupId>software.amazon.awssdk</groupId> <artifactId>sqs</artifactId> </dependency> </dependencies>
Nombres de paquetes	`com.amazonaws.services.sqs.buffered`	`software.amazon.awssdk.services.sqs.batchmanager`
Nombres de clase	`AmazonSQSBufferedAsyncClient`	`SqsAsyncBatchManager`

[1] Última versión. [2] Última versión.

Uso del procesamiento automático de solicitudes por lotes de SQS

Cambio	v1	v2
Creación de un administrador de lotes	`AmazonSQSAsync sqsAsync = new AmazonSQSAsyncClient();` `AmazonSQSAsync bufferedSqs = new AmazonSQSBufferedAsyncClient(sqsAsync);`	`SqsAsyncClient asyncClient = SqsAsyncClient.create();` `SqsAsyncBatchManager sqsAsyncBatchManager =`

Cambio	v1	v2
		`asyncClient.batchManager();`

Cambio	v1	v2

Creación de un administrador de lotes con configuración personalizada	`AmazonSQSAsync sqsAsync = new AmazonSQSAsyncClient();`
	
	`QueueBufferConfig queueBufferConfig = new QueueBufferConfig()`
	`.withMaxBatchOpenMs(200)`
	`.withMaxBatchSize(10)`
	`.withMinReceiveWaitTimeMs(1000)`
	`.withVisibilityTimeoutSeconds(20)`
	`.withReceiveMessageAttributeNames(messageAttributeValues);`
	
	`AmazonSQSAsync bufferedSqs = new AmazonSQSBufferedAsyncClient(sqsAsync, queueBufferConfig);`
		`BatchOverrideConfiguration batchOverrideConfiguration = BatchOverrideConfiguration.builder()`
		`.sendRequestFrequency(Duration.ofMillis(200))`
		`.maxBatchSize(10)`
		`.receiveMessageMinWaitDuration(Duration.ofMillis(1000))`
		`.receiveMessageVisibilityTimeout(Duration.ofSeconds(20))`
		`.receiveMessageSystemAttributeNames(messageSystemAttributeNames)`
		`.receiveMessageAttributeNames(messageAttributeValues)`
		`.build();`
		
		`SqsAsyncBatchManager sqsAsyncBatchManager = SqsAsyncBatchManager.builder()`
		`.overrideConfiguration(batchOverrideConfiguration)`
		`.client(SqsAsyncClient.create())`
		`.scheduledExecutor(Executor`

Cambio	v1	v2
		`s.newScheduledThreadPool(8))` `.build();`

Envío de mensajes	`Future<SendMessageResult> sendResultFuture = bufferedSqs.sendMessageAsync(new SendMessageRequest()`
	`.withQueueUrl(queueUrl)`
	`.withMessageBody(body));`
		`CompletableFuture<SendMessageResponse> sendCompletableFuture = sqsAsyncBatchManager.sendMessage(`
		`SendMessageRequest.builder()`
		`.queueUrl(queueUrl)`
		`.messageBody(body)`
		`.build());`

Cómo eliminar mensajes	`Future<DeleteMessageResult> deletResultFuture = bufferedSqs.deleteMessageAsync(new DeleteMessageRequest()`
	`.withQueueUrl(queueUrl));`
		`CompletableFuture<DeleteMessageResponse> deleteResultCompletableFuture = sqsAsyncBatchManager.deleteMessage(`
		`DeleteMessageRequest.builder()`
		`.queueUrl(queueUrl)`
		`.build());`

Cambio	v1	v2
Cambio de visibilidad de los mensajes	`Future<ChangeMessageVisibilityResult> changeVisibilityResultFuture = bufferedSqs.changeMessageVisibilityAsync(new ChangeMessageVisibilityRequest() .withQueueUrl(queueUrl) .withVisibilityTimeout(20));`	`CompletableFuture<ChangeMessageVisibilityResponse> changeResponseCompletableFuture = sqsAsyncBatchManager.changeMessageVisibility( ChangeMessageVisibilityRequest.builder() .queueUrl(queueUrl) .visibilityTimeout(20) .build());`
Recepción de mensajes	`ReceiveMessageResult receiveResult = bufferedSqs.receiveMessage(new ReceiveMessageRequest() .withQueueUrl(queueUrl));`	`CompletableFuture<ReceiveMessageResponse> responseCompletableFuture = sqsAsyncBatchManager.receiveMessage( ReceiveMessageRequest.builder() .queueUrl(queueUrl) .build());`

Diferencias entre tipos de devolución asincrónica

Cambio	v1	v2
Tipo de devolución	`Future<ResultType>`	`CompletableFuture<ResponseType>`
Mecanismo de devolución de llamada	Requiere un `AsyncHandler` con métodos `onSuccess` y `onError` separados	Usos `CompletableFuture` APIs proporcionados por el JDK, como,, `whenComplete()` `thenCompose()` `thenApply()`
Tratamiento de excepciones	Utiliza el método `AsyncHandler#onError()`	Usos `CompletableFuture` APIs proporcionados por el JDK, como`exceptionally()` , `handle()` o `whenComplete()`
Cancelación	Compatibilidad básica a través de `Future.cancel()`	Al cancelar un `CompletableFuture` principal se cancelan automáticamente todos los futuros dependientes de la cadena

Diferencias en el tratamiento de finalización asincrónica

Cambio	v1	v2
Implementación del controlador de respuestas	`Future<ReceiveMessageResult> future = bufferedSqs.receiveMessageAsync( receiveRequest, new AsyncHandler<ReceiveMessageRequest, ReceiveMessageResult>() {`	`CompletableFuture<ReceiveMessageResponse> completableFuture = sqsAsyncBatchManager .receiveMessage(ReceiveMessageRequest.builder()`

Cambio	v1	v2
	`@Override public void onSuccess(ReceiveMessageRequest request, ReceiveMessageResult result) { List<Message> messages = result.getMessages(); System.out.println("Received " + messages.size() + " messages"); for (Message message : messages) { System.out.println("Message ID: " + message.getMessageId()); System.out.println("Body: " + message.getBody()); } } @Override public void onError(Exception e) { System.err.println("Error receiving messages: " + e.getMessage()); e.printStackTrace();`	`.queueUrl(queueUrl).build()) .whenComplete((receiveMessageResponse, throwable) -> { if (throwable != null) { System.err.println("Error receiving messages: " + throwable.getMessage()); throwable.printStackTrace(); } else { List<Message> messages = receiveMessageResponse.messages(); System.out.println("Received " + messages.size() + " messages"); for (Message message : messages) { System.out.println("Message ID: " + message.messageId()); System.out.println("Body: " + message.body()); } } });`

Cambio	v1	v2
	<pre> } });</pre>	

Parámetros principales de configuración

Parámetro	v1	v2
Tamaño máximo de lote	`maxBatchSize` (de forma predeterminada, 10 solicitudes por lote)	`maxBatchSize` (de forma predeterminada, 10 solicitudes por lote)
Tiempo de espera por lotes	`maxBatchOpenMs` (de forma predeterminada, 200 ms)	`sendRequestFrequency` (de forma predeterminada, 200 ms)
Tiempo de espera de visibilidad	`visibilityTimeoutSeconds` (-1 para cola de forma predeterminada)	`receiveMessageVisibilityTimeout` (cola de forma predeterminada)
Tiempo de espera mínimo	`longPollWaitTimeoutSeconds` (20 s cuando `longPoll` es True)	`receiveMessageMinWaitDuration` (de forma predeterminada, 50 ms)
Atributos de mensajes	Configure usando `ReceiveMessageRequest`	`receiveMessageAttributeNames` (ninguno de forma predeterminada)
Atributos del sistema	Configure usando `ReceiveMessageRequest`	`receiveMessageSystemAttributeNames` (ninguno de forma predeterminada)
Sondeo largo	`longPoll` (el valor predeterminado es True)	No se admite para evitar que las conexiones abiertas

Parámetro	v1	v2
		esperen hasta que el servidor envíe los mensajes
Tiempo de espera máximo para sondeos prolongados	`longPollWaitTimeoutSeconds` (de forma predeterminada, 20 s)	No se admite para evitar que las conexiones abiertas esperen hasta que el servidor envíe los mensajes
Número máximo de lotes de recepción de captura previa almacenados en el cliente	`maxDoneReceiveBatches` (10 lotes)	No se admite porque se trata internamente
Número máximo de lotes de salida activos procesados de forma simultánea	`maxInflightOutboundBatches` (de forma predeterminada, 5 lotes)	No se admite porque se trata internamente
Número máximo de lotes de recepción activos procesados de forma simultánea	`maxInflightReceiveBatches` (de forma predeterminada, 10 lotes)	No se admite porque se trata internamente

Utilizar el SDK para Java 1.x y 2.x en paralelo

Puede utilizar ambas versiones de AWS SDK para Java en sus proyectos.

A continuación, se muestra un ejemplo del archivo `pom.xml` para un proyecto que utiliza Amazon S3 de la versión 1.11.x y DynamoDB de la versión 2.27.21.

Example Ejemplo de POM

En este ejemplo se muestra una entrada de archivo `pom.xml` para un proyecto que utiliza las versiones 1.x y 2.x del SDK.

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>com.amazonaws</groupId>
            <artifactId>aws-java-sdk-bom</artifactId>
```

```
            <version>1.12.1</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
        <dependency>
          <groupId>software.amazon.awssdk</groupId>
          <artifactId>bom</artifactId>
          <version>2.27.21</version>
          <type>pom</type>
          <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>

<dependencies>
    <dependency>
      <groupId>com.amazonaws</groupId>
      <artifactId>aws-java-sdk-s3</artifactId>
    </dependency>
    <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>dynamodb</artifactId>
    </dependency>
</dependencies>
```

Encuentre aplicaciones mediante clientes AWS SDK para Java 1.x

Antes de migrar a AWS SDK for Java 2.x, debe identificar qué aplicaciones de su entorno utilizan clientes de la versión 1.x. Puede consultar el campo «UserAgent» en AWS CloudTrail los eventos para encontrar estas aplicaciones.

Use CloudTrail Lake para buscar aplicaciones con clientes 1.x

AWS CloudTrail Lake le permite consultar los eventos registrados por CloudTrail. Siga estos pasos para crear un lago de datos que identifique las versiones del SDK que utilizan sus aplicaciones:

1. Cree un lago CloudTrail de datos. Consulte la Guía del usuario para crear un almacén de datos de eventos.
2. Después de crear el almacén de datos, examine el contenido del registro. El cuerpo del registro contiene campos que determinan la acción, el momento y la ubicación solicitados. Para obtener más información, consulte la guía del usuario para ver el contenido de los CloudTrail registros.

3. Ejecute consultas con sus datos. Siga la Guía del usuario para consultar y guardar los resultados de las consultas.

El campo userAgent de cada registro contiene la versión del SDK que realizó la solicitud. Utilice este campo para identificar las aplicaciones que utilizan la versión 1.x del SDK de Java.

La siguiente consulta de ejemplo busca todas las solicitudes de EventDatastore ID `sample-Data-Store-Id` realizadas con el SDK 1.x de Java a partir del 17 de junio de 2025:

```
select userIdentity, eventSource, awsRegion,
    eventName, eventType, eventTime, userAgent,
    requestParameters, sourceIPAddress
 from sample-Data-Store-Id
where eventTime > '2025-06-17 00:00:00'
and userAgent like '%aws-sdk-java/1.%'
order by eventTime desc
```

Un ejemplo del contenido del evento en el resultado de la consulta es el siguiente:

```
{
    "userIdentity": "{
         "type": "IAMUser",
         "principalId": "AIDAJ45Q7YFFAREXAMPLE",
         "arn": "arn:aws:iam::123456789012:user/Alice",
         "accountId": "123456789012",
         "accessKeyId": "",
         "userName": "Alice"
    }",
    "eventSource": "dynamodb.amazonaws.com",
    "awsRegion": "us-west-2",
    "eventName": "ListTables",
    "eventType": "AwsApiCall",
    "eventTime": "2025-07-01 02:23:52.000",
    "userAgent": "aws-sdk-java/1.12.746 Linux/5.10.240 OpenJDK/11.0.25+9-LTS ...",
    "requestParameters": "",
    "sourceIPAddress": "12.345.6.78"
}
```

Puede usar esta información para ayudar a determinar cuándo y dónde se realizó la solicitud.

En el ejemplo, se realizó una solicitud `ListTables` de DynamoDB en `2025-07-01 02:23:52 (UTC)` desde la dirección IP `12.345.6.78` con las credenciales del usuario de IAM llamado Alice. El valor del campo UserAgent muestra que la solicitud se realizó con la AWS SDK para Java versión `1.12.746` de un sistema Linux con JDK 11.

Para obtener una descripción de los campos del registro de AWS CloudTrail eventos, consulte el contenido del CloudTrail registro de eventos de administración, datos y actividad de red.

Seguridad para el sistema AWS SDK para Java

La seguridad en la nube de Amazon Web Services (AWS) es la máxima prioridad. Como cliente de AWS, se beneficia de una arquitectura de red y un centro de datos que se han diseñado para satisfacer los requisitos de seguridad de las organizaciones más exigentes. La seguridad es una responsabilidad compartida entre AWS usted y usted. En el modelo de responsabilidad compartida, se habla de “seguridad de la nube” y “seguridad en la nube”:

Seguridad de la nube: AWS se encarga de proteger la infraestructura en la que se ejecutan todos los servicios que se ofrecen en la AWS nube y de proporcionarle servicios que pueda utilizar de forma segura. Nuestra responsabilidad en materia de seguridad es nuestra máxima prioridad AWS, y auditores externos comprueban y verifican periódicamente la eficacia de nuestra seguridad como parte de los programas de AWS conformidad.

Seguridad en la nube: su responsabilidad viene determinada por el AWS servicio que utilice y otros factores, como la confidencialidad de sus datos, los requisitos de su organización y las leyes y reglamentos aplicables.

Este AWS producto o servicio sigue el modelo de responsabilidad compartida a través de los servicios específicos de Amazon Web Services (AWS) a los que da soporte. Para obtener información sobre la seguridad de los AWS servicios, consulte la página de documentación sobre la seguridad del AWS servicio y AWS los servicios que se encuentran dentro del ámbito de aplicación de AWS las medidas de conformidad establecidas por el programa de conformidad.

Temas

- Protección de datos en la versión AWS SDK para Java 2.x
- Trabajar con TLS en el SDK para JavaScript
- Gestión de identidad y acceso
- Validación de la conformidad de este AWS producto o servicio
- Resiliencia de este AWS producto o servicio
- Seguridad de la infraestructura para este AWS producto o servicio

Protección de datos en la versión AWS SDK para Java 2.x

El modelo de responsabilidad AWS compartida modelo se aplica a la protección de datos en AWS SDK para Java. Como se describe en este modelo, AWS es responsable de proteger la

infraestructura global que ejecuta todos los Nube de AWS. Eres responsable de mantener el control sobre el contenido alojado en esta infraestructura. También eres responsable de las tareas de administración y configuración de seguridad para los Servicios de AWS que utiliza. Para obtener más información sobre la privacidad de los datos, consulte las Preguntas frecuentes sobre la privacidad de datos. Para obtener información sobre la protección de datos en Europa, consulte la publicación de blog sobre el Modelo de responsabilidad compartida de AWS y GDPR en el Blog de seguridad de AWS .

Con fines de protección de datos, le recomendamos que proteja Cuenta de AWS las credenciales y configure los usuarios individuales con AWS IAM Identity Center o AWS Identity and Access Management (IAM). De esta manera, solo se otorgan a cada usuario los permisos necesarios para cumplir sus obligaciones laborales. También recomendamos proteger sus datos de la siguiente manera:

- Utiliza la autenticación multifactor (MFA) en cada cuenta.
- Se utiliza SSL/TLS para comunicarse con AWS los recursos. Exigimos TLS 1.2 y recomendamos TLS 1.3.
- Configure la API y el registro de actividad de los usuarios con AWS CloudTrail. Para obtener información sobre el uso de CloudTrail senderos para capturar AWS actividades, consulte Cómo trabajar con CloudTrail senderos en la Guía del AWS CloudTrail usuario.
- Utilice soluciones de AWS cifrado, junto con todos los controles de seguridad predeterminados Servicios de AWS.
- Utiliza servicios de seguridad administrados avanzados, como Amazon Macie, que lo ayuden a detectar y proteger la información confidencial almacenada en Amazon S3.
- Si necesita módulos criptográficos validados por FIPS 140-3 para acceder a AWS través de una interfaz de línea de comandos o una API, utilice un punto final FIPS. Para obtener más información sobre los puntos de conexión de FIPS disponibles, consulte Estándar de procesamiento de la información federal (FIPS) 140-3.

Se recomienda encarecidamente no introducir nunca información confidencial o sensible, como por ejemplo, direcciones de correo electrónico de clientes, en etiquetas o campos de formato libre, tales como el campo Nombre. Esto incluye cuando trabajas con el SDK para Java u otro Servicios de AWS mediante la consola AWS CLI, la API o AWS SDKs. Cualquier dato que introduzca en etiquetas o campos de formato libre utilizados para los nombres se pueden emplear para los registros de facturación o diagnóstico. Si proporciona una URL a un servidor externo, recomendamos

encarecidamente que no incluya información de credenciales en la URL a fin de validar la solicitud para ese servidor.

Trabajar con TLS en el SDK para JavaScript

AWS SDK para Java Utiliza las capacidades de TLS de su plataforma Java subyacente. En este tema, mostramos ejemplos del uso de la implementación de OpenJDK utilizada por Amazon Corretto 17.

Para que funcione Servicios de AWS, el JDK subyacente debe ser compatible con una versión mínima de TLS 1.2, pero se recomienda TLS 1.3.

Los usuarios deben consultar la documentación de la plataforma Java que utilizan con el SDK para saber qué versiones de TLS están habilitadas de forma predeterminada y cómo habilitar y deshabilitar versiones específicas de TLS.

Cómo comprobar la información de la versión de TLS

Con OpenJDK, el siguiente código muestra el uso SSLContextde para imprimir TLS/SSL qué versiones son compatibles.

```
System.out.println(Arrays.toString(SSLContext.getDefault().getSupportedSSLParameters().getProto
```

Por ejemplo, Amazon Corretto 17 (OpenJDK) produce el siguiente resultado.

```
[TLSv1.3, TLSv1.2, TLSv1.1, TLSv1, SSLv3, SSLv2Hello]
```

Para ver el protocolo de enlace SSL en acción y qué versión de TLS se utiliza, puede utilizar la propiedad del sistema javax.net.debug.

Por ejemplo, ejecute una aplicación Java que utilice TLS.

```
java app.jar -Djavax.net.debug=ssl:handshake
```

La aplicación registra el enlace SSL de forma similar a la siguiente.

```
...
```

```
javax.net.ssl|DEBUG|10|main|2022-12-23 13:53:12.221 EST|ClientHello.java:641|Produced
 ClientHello handshake message (
"ClientHello": {
  "client version"      : "TLSv1.2",

...
javax.net.ssl|DEBUG|10|main|2022-12-23 13:53:12.295 EST|ServerHello.java:888|Consuming
 ServerHello handshake message (
"ServerHello": {
  "server version"      : "TLSv1.2",
...
```

Aplicar una versión mínima de TLS

El SDK para Java siempre prefiere la última versión de TLS compatible con la plataforma y el servicio. Si desea aplicar una versión mínima específica de TLS, consulte la documentación de su plataforma Java.

Para los basados en OpenJDK JVMs, puede usar la propiedad del sistema. `jdk.tls.client.protocols`

Por ejemplo, si desea que los clientes del servicio SDK de su aplicación utilicen TLS 1.2, aunque TLS 1.3 esté disponible, proporcione la siguiente propiedad del sistema.

```
java app.jar -Djdk.tls.client.protocols=TLSv1.2
```

AWS Los puntos finales de la API se actualizan a TLS 1.2

Consulte esta entrada del blog para obtener información sobre la migración de los puntos finales de la AWS API a TLS 1.2 para obtener la versión mínima.

Gestión de identidad y acceso

AWS Identity and Access Management (IAM) es una herramienta Servicio de AWS que ayuda al administrador a controlar de forma segura el acceso a los AWS recursos. Los administradores de IAM controlan quién puede autenticarse (iniciar sesión) y quién puede autorizarse (tener permisos) para usar los recursos. AWS La IAM es una Servicio de AWS opción que puede utilizar sin coste adicional.

Temas

- Público
- Autenticación con identidades
- Administración del acceso con políticas
- ¿Cómo Servicios de AWS trabajar con IAM
- Solución de problemas de AWS identidad y acceso

Público

La forma de usar AWS Identity and Access Management (IAM) varía según el trabajo en el que se realice. AWS

Usuario del servicio: si Servicios de AWS solía hacer su trabajo, el administrador le proporcionará las credenciales y los permisos que necesita. A medida que vaya utilizando más AWS funciones para realizar su trabajo, es posible que necesite permisos adicionales. Entender cómo se administra el acceso puede ayudarlo a solicitar los permisos correctos al administrador. Si no puede acceder a una función de AWS, consulte Solución de problemas de AWS identidad y acceso o consulte la guía del usuario de la Servicio de AWS que está utilizando.

Administrador de servicios: si está a cargo de AWS los recursos de su empresa, probablemente tenga acceso total a ellos AWS. Su trabajo consiste en determinar a qué AWS funciones y recursos deben acceder los usuarios del servicio. Luego, debe enviar solicitudes a su administrador de IAM para cambiar los permisos de los usuarios de su servicio. Revise la información de esta página para conocer los conceptos básicos de IAM. Para obtener más información sobre cómo su empresa puede utilizar la IAM AWS, consulte la guía del usuario del Servicio de AWS que está utilizando.

Administrador de IAM: si es un administrador de IAM, es posible que quiera conocer más detalles sobre cómo escribir políticas para administrar el acceso a AWS. Para ver ejemplos de políticas AWS basadas en la identidad que puede utilizar en IAM, consulte la guía del usuario de la Servicio de AWS que está utilizando.

Autenticación con identidades

La autenticación es la forma de iniciar sesión AWS con sus credenciales de identidad. Debe autenticarse como usuario de Usuario raíz de la cuenta de AWS IAM o asumir una función de IAM.

Puede iniciar sesión como una identidad federada con las credenciales de una fuente de identidad, como AWS IAM Identity Center (IAM Identity Center), la autenticación de inicio de sesión único o las

credenciales. Google/Facebook Para obtener más información sobre el inicio de sesión, consulte Cómo iniciar sesión en la Cuenta de AWS en la Guía del usuario de AWS Sign-In .

Para el acceso programático, AWS proporciona un SDK y una CLI para firmar criptográficamente las solicitudes. Para obtener más información, consulte AWS Signature Version 4 para solicitudes de API en la Guía del usuario de IAM.

Cuenta de AWS usuario root

Al crear un Cuenta de AWS, se comienza con una identidad de inicio de sesión denominada usuario Cuenta de AWS raíz que tiene acceso completo a todos Servicios de AWS los recursos. Se recomiendaencarecidamente que no utilice el usuario raíz para las tareas diarias. Para ver las tareas que requieren credenciales de usuario raíz, consulte Tareas que requieren credenciales de usuario raíz en la Guía del usuario de IAM.

Identidad federada

Como práctica recomendada, exija a los usuarios humanos que utilicen la federación con un proveedor de identidades para acceder Servicios de AWS mediante credenciales temporales.

Una identidad federada es un usuario del directorio empresarial, del proveedor de identidades web o al Directory Service que se accede Servicios de AWS mediante credenciales de una fuente de identidad. Las identidades federadas asumen roles que proporcionan credenciales temporales.

Para una administración de acceso centralizada, se recomienda AWS IAM Identity Center. Para obtener más información, consulte ¿Qué es el Centro de identidades de IAM? en la Guía del usuario de AWS IAM Identity Center .

Usuarios y grupos de IAM

Un usuario de IAM es una identidad con permisos específicos para una sola persona o aplicación. Recomendamos el uso de credenciales temporales en lugar de usuarios de IAM con credenciales de larga duración. Para obtener más información, consulte Exigir a los usuarios humanos que utilicen la federación con un proveedor de identidad para acceder AWS mediante credenciales temporales en la Guía del usuario de IAM.

Un grupo de IAM especifica un conjunto de usuarios de IAM y facilita la administración de los permisos para grupos grandes de usuarios. Para obtener más información, consulte Casos de uso para usuarios de IAM en la Guía del usuario de IAM.

Roles de IAM

Un Rol de IAM es una identidad con permisos específicos que proporciona credenciales temporales. Puede asumir un rol cambiando de un rol de usuario a uno de IAM (consola) o llamando a una AWS CLI operación de AWS API. Para obtener más información, consulte Métodos para asumir un rol en la Guía del usuario de IAM.

Los roles de IAM son útiles para el acceso de usuario federado, los permisos de usuario de IAM temporales, el acceso entre cuentas, el acceso entre servicios y las aplicaciones que se ejecutan en Amazon EC2. Para obtener más información, consulte Acceso a recursos entre cuentas en IAM en la Guía del usuario de IAM.

Administración del acceso con políticas

AWS Para controlar el acceso, puede crear políticas y adjuntarlas a AWS identidades o recursos. Una política define los permisos cuando están asociados a una identidad o un recurso. AWS evalúa estas políticas cuando un director hace una solicitud. La mayoría de las políticas se almacenan AWS como documentos JSON. Para obtener más información sobre los documentos de políticas de JSON, consulte Información general de políticas de JSON en la Guía del usuario de IAM.

Mediante las políticas, los administradores especifican quién tiene acceso a qué, definiendo qué entidad principal puede realizar acciones sobre qué recursos y en qué condiciones.

De forma predeterminada, los usuarios y los roles no tienen permisos. Un administrador de IAM crea políticas de IAM y las agrega a roles, que los usuarios pueden asumir posteriormente. Las políticas de IAM definen permisos independientemente del método que se utilice para realizar la operación.

Políticas basadas en identidades

Las políticas basadas en identidad son documentos de política de permisos JSON que asocia a una identidad (usuario, grupo o rol). Estas políticas controlan qué acciones pueden realizar las identidades, en qué recursos y en qué condiciones. Para obtener más información sobre cómo crear una política basada en la identidad, consulte Definición de permisos de IAM personalizados con políticas administradas por el cliente en la Guía del usuario de IAM.

Las políticas basadas en identidad pueden ser políticas insertadas (incrustadas directamente en una sola identidad) o políticas administradas (políticas independientes asociadas a varias identidades). Para obtener información sobre cómo elegir entre políticas administradas e insertadas, consulte Selección entre políticas administradas y políticas insertadas en la Guía del usuario de IAM.

Políticas basadas en recursos

Las políticas basadas en recursos son documentos de políticas JSON que se asocian a un recurso. Los ejemplos incluyen las Políticas de confianza de roles de IAM y las Políticas de bucket de Amazon S3. En los servicios que admiten políticas basadas en recursos, los administradores de servicios pueden utilizarlos para controlar el acceso a un recurso específico. Debe especificar una entidad principal en una política basada en recursos.

Las políticas basadas en recursos son políticas insertadas que se encuentran en ese servicio. No puedes usar políticas AWS gestionadas de IAM en una política basada en recursos.

Listas de control de acceso () ACLs

Las listas de control de acceso (ACLs) controlan qué responsables (miembros de la cuenta, usuarios o roles) tienen permisos para acceder a un recurso. ACLs son similares a las políticas basadas en recursos, aunque no utilizan el formato de documento de políticas JSON.

Amazon S3 y Amazon VPC son ejemplos de servicios compatibles. AWS WAF ACLs Para obtener más información ACLs, consulte la descripción general de la lista de control de acceso (ACL) en la Guía para desarrolladores de Amazon Simple Storage Service.

Otros tipos de políticas

AWS admite tipos de políticas adicionales que pueden establecer los permisos máximos otorgados por los tipos de políticas más comunes:

- Límites de permisos: establecen los permisos máximos que una política basada en identidad puede conceder a una entidad de IAM. Para obtener más información, consulte Límites de permisos para las entidades de IAM en la Guía del usuario de IAM.
- Políticas de control de servicios (SCPs): especifican los permisos máximos para una organización o unidad organizativa en AWS Organizations. Para obtener más información, consulte Políticas de control de servicios en la Guía del usuario de AWS Organizations .
- Políticas de control de recursos (RCPs): establece los permisos máximos disponibles para los recursos de tus cuentas. Para obtener más información, consulte Políticas de control de recursos (RCPs) en la Guía del AWS Organizations usuario.
- Políticas de sesión: políticas avanzadas que se pasan como parámetro cuando se crea una sesión temporal para un rol o un usuario federado. Para obtener más información, consulte Políticas de sesión en la Guía del usuario de IAM.

Varios tipos de políticas

Cuando se aplican varios tipos de políticas a una solicitud, los permisos resultantes son más complicados de entender. Para saber cómo se AWS determina si se debe permitir una solicitud cuando se trata de varios tipos de políticas, consulte la lógica de evaluación de políticas en la Guía del usuario de IAM.

¿Cómo Servicios de AWS trabajar con IAM

Para obtener una visión general de cómo Servicios de AWS trabajar con la mayoría de las funciones de IAM, consulte AWS los servicios que funcionan con IAM en la Guía del usuario de IAM.

Para obtener información sobre cómo utilizar una función específica Servicio de AWS con IAM, consulte la sección de seguridad de la guía del usuario del servicio correspondiente.

Solución de problemas de AWS identidad y acceso

Utilice la siguiente información como ayuda para diagnosticar y solucionar los problemas habituales que pueden surgir al trabajar con un AWS IAM.

Temas

- No estoy autorizado a realizar ninguna acción en AWS
- No estoy autorizado a realizar tareas como: PassRole
- Quiero permitir que personas ajenas a mí accedan Cuenta de AWS a mis AWS recursos

No estoy autorizado a realizar ninguna acción en AWS

Si recibe un error que indica que no tiene autorización para realizar una acción, las políticas se deben actualizar para permitirle realizar la acción.

En el siguiente ejemplo, el error se produce cuando el usuario de IAM `mateojackson` intenta utilizar la consola para consultar los detalles acerca de un recurso ficticio *`my-example-widget`*, pero no tiene los permisos ficticios `awes:`*`GetWidget`*.

```
User: arn:aws:iam::123456789012:user/mateojackson is not authorized to perform:
 awes:GetWidget on resource: my-example-widget
```

En este caso, la política del usuario `mateojackson` debe actualizarse para permitir el acceso al recurso *`my-example-widget`* mediante la acción `awes:`*`GetWidget`*.

Si necesita ayuda, póngase en contacto con su AWS administrador. El administrador es la persona que le proporcionó las credenciales de inicio de sesión.

No estoy autorizado a realizar tareas como: PassRole

Si recibe un error que indica que no tiene autorización para realizar la acción `iam:PassRole`, las políticas deben actualizarse a fin de permitirle pasar un rol a AWS.

Algunas Servicios de AWS permiten transferir una función existente a ese servicio en lugar de crear una nueva función de servicio o una función vinculada a un servicio. Para ello, debe tener permisos para transferir la función al servicio.

En el siguiente ejemplo, el error se produce cuando un usuario de IAM denominado `marymajor` intenta utilizar la consola para realizar una acción en AWS. Sin embargo, la acción requiere que el servicio cuente con permisos que otorguen un rol de servicio. Mary no tiene permisos para transferir el rol al servicio.

```
User: arn:aws:iam::123456789012:user/marymajor is not authorized to perform:
 iam:PassRole
```

En este caso, las políticas de Mary se deben actualizar para permitirle realizar la acción `iam:PassRole`.

Si necesita ayuda, póngase en contacto con su AWS administrador. El administrador es la persona que le proporcionó las credenciales de inicio de sesión.

Quiero permitir que personas ajenas a mí accedan Cuenta de AWS a mis AWS recursos

Se puede crear un rol que los usuarios de otras cuentas o las personas externas a la organización puedan utilizar para acceder a sus recursos. Se puede especificar una persona de confianza para que asuma el rol. En el caso de los servicios que respaldan las políticas basadas en recursos o las listas de control de acceso (ACLs), puedes usar esas políticas para permitir que las personas accedan a tus recursos.

Para obtener más información, consulte lo siguiente:

- Para saber si AWS es compatible con estas funciones, consulte. ¿Cómo Servicios de AWS trabajar con IAM

- Para obtener información sobre cómo proporcionar acceso a los recursos de su Cuentas de AWS propiedad, consulte Proporcionar acceso a un usuario de IAM en otro usuario de su propiedad Cuenta de AWS en la Guía del usuario de IAM.
- Para obtener información sobre cómo proporcionar acceso a tus recursos a terceros Cuentas de AWS, consulta Cómo proporcionar acceso a recursos que Cuentas de AWS son propiedad de terceros en la Guía del usuario de IAM.
- Para obtener información sobre cómo proporcionar acceso mediante una federación de identidades, consulte Proporcionar acceso a usuarios autenticados externamente (identidad federada) en la Guía del usuario de IAM.
- Para conocer sobre la diferencia entre las políticas basadas en roles y en recursos para el acceso entre cuentas, consulte Acceso a recursos entre cuentas en IAM en la Guía del usuario de IAM.

Validación de la conformidad de este AWS producto o servicio

Para saber si un programa de cumplimiento Servicio de AWS está dentro del ámbito de aplicación de programas de cumplimiento específicos, consulte Servicios de AWS Alcance por programa de de cumplimiento y elija el programa de cumplimiento que le interese. Para obtener información general, consulte Programas de AWS cumplimiento > Programas AWS .

Puede descargar informes de auditoría de terceros utilizando AWS Artifact. Para obtener más información, consulte Descarga de informes en AWS Artifact .

Su responsabilidad de cumplimiento al Servicios de AWS utilizarlos viene determinada por la confidencialidad de sus datos, los objetivos de cumplimiento de su empresa y las leyes y reglamentos aplicables. Para obtener más información sobre su responsabilidad de conformidad al utilizarlos Servicios de AWS, consulte AWS la documentación de seguridad.

Este AWS producto o servicio sigue el modelo de responsabilidad compartida a través de los servicios específicos de Amazon Web Services (AWS) a los que da soporte. Para obtener información sobre la seguridad de los AWS servicios, consulte la página de documentación sobre la seguridad del AWS servicio y AWS los servicios que se encuentran dentro del ámbito de aplicación de AWS las medidas de conformidad establecidas por el programa de conformidad.

Resiliencia de este AWS producto o servicio

La infraestructura AWS global se basa en Regiones de AWS zonas de disponibilidad.

Regiones de AWS proporcionan varias zonas de disponibilidad aisladas y separadas físicamente, que están conectadas mediante redes de baja latencia, alto rendimiento y alta redundancia.

Con las zonas de disponibilidad, puede diseñar y utilizar aplicaciones y bases de datos que realizan una conmutación por error automática entre las zonas sin interrupciones. Las zonas de disponibilidad tienen una mayor disponibilidad, tolerancia a errores y escalabilidad que las infraestructuras tradicionales de uno o varios centros de datos.

Para obtener más información sobre AWS las regiones y las zonas de disponibilidad, consulte Infraestructura global.AWS

Este AWS producto o servicio sigue el modelo de responsabilidad compartida a través de los servicios específicos de Amazon Web Services (AWS) a los que da soporte. Para obtener información sobre la seguridad de los AWS servicios, consulte la página de documentación sobre la seguridad del AWS servicio y AWS los servicios que se encuentran dentro del ámbito de aplicación de AWS las medidas de conformidad establecidas por el programa de conformidad.

Seguridad de la infraestructura para este AWS producto o servicio

Este AWS producto o servicio utiliza servicios gestionados y, por lo tanto, está protegido por la seguridad de la red AWS global. Para obtener información sobre los servicios AWS de seguridad y cómo se AWS protege la infraestructura, consulte Seguridad AWS en la nube. Para diseñar su AWS entorno utilizando las mejores prácticas de seguridad de la infraestructura, consulte Protección de infraestructuras en un marco de buena AWS arquitectura basado en el pilar de la seguridad.

Utiliza las llamadas a la API AWS publicadas para acceder a este AWS producto o servicio a través de la red. Los clientes deben admitir lo siguiente:

- Seguridad de la capa de transporte (TLS). Exigimos TLS 1.2 y recomendamos TLS 1.3.
- Conjuntos de cifrado con confidencialidad directa total (PFS) como DHE (Ephemeral Diffie-Hellman) o ECDHE (Elliptic Curve Ephemeral Diffie-Hellman). La mayoría de los sistemas modernos como Java 7 y posteriores son compatibles con estos modos.

Además, las solicitudes deben estar firmadas mediante un ID de clave de acceso y una clave de acceso secreta que esté asociada a una entidad principal de IAM. También puedes utilizar AWS Security Token Service (AWS STS) para generar credenciales de seguridad temporales para firmar solicitudes.

Este AWS producto o servicio sigue el modelo de responsabilidad compartida a través de los servicios específicos de Amazon Web Services (AWS) a los que da soporte. Para obtener información sobre la seguridad de los AWS servicios, consulte la página de documentación sobre la seguridad del AWS servicio y AWS los servicios que se encuentran dentro del ámbito de aplicación de AWS las medidas de conformidad establecidas por el programa de conformidad.

Clave OpenPGP para AWS SDK para Java

Todos los artefactos de Maven disponibles públicamente para AWS SDK para Java están firmados con el estándar OpenPGP. La clave pública que necesita para verificar la firma de un artefacto está disponible en la siguiente sección.

Clave actual

En la siguiente tabla se muestra la información clave de OpenPGP para las versiones actuales del SDK para Java 1x y del SDK para Java 2.x.

ID de clave	0xAC107B386692DADD
Tipo	RSA
Tamaño	4096/4096
Created (Creado)	30-06-2016
Expires	27-09-2026
ID de usuario	SDK de AWS y herramientas < aws-dr-tools@amazon.com >
Huella digital clave	FEB9 209F 2F2F 3F46 6484 1E55 AC10 7B38 6692 DADD

Para copiar la siguiente clave pública de OpenPGP para el SDK para Java en el portapapeles, seleccione el icono “Copiar” en la esquina superior derecha.

```
-----BEGIN PGP PUBLIC KEY BLOCK-----
Comment: Hostname:
Version: Hockeypuck 2.2

xsFNBFd1gAUBEACqbmmFbxdJgz1lD7wrlskQA1LLuSAC4p8ny9u/D2zLR8Ynk3Yz
mzJuQ+Kfjne2t+xTDex6MPJlMYpOviSWsX2psgvdmeyUpW9ap0lrThNYkc+W5fRc
buFehfbi9LSATZGJi8RG0sCCr5FsYVz0gEk85M2+PeM24cXhQIOZtQUjswX/pdk/
KduGtZASqNAYLKROmRODzUuaokLPo24pfm9bnr1RnRtwt5ktPAA5bM9ZZaGKriej
kT2lPffbBjp8F5AZvmGLtNm2Cmg4FKBvI04SQjy2jjrQ3wBzi5Lc9HTxDuHK/rtV
```

```
u6PewUe2WPlnxlXenhMZU1UK4YoSB9E9StQ2VxQiySLHSdxR7Ma4WgYdVLn9bOie
nj3QxLuQ1ZUKF79ES6JaM4tOz1gGcQeU1+UklgjFLuKwmzWRdEIFfxMyvH6qgKnd
U+DioH5mcUwhwffAAsuIJyAdMIEUYh7IfzJJXQf+fF+XfOCl6byOJFWrIGQkAzMu
CEvaCfwtHC2Lpzo33/WRFeMAuzzd0QJ4uz4xFFvaSOSZHMLHWI9YV/+Pea3X99Ms
0Nlek/LolAJh67MynHeVBOHKrq+fluorWepQivctzN6Y1NOkx5naTPGGaKWK7G2q
TbcY5SMnkIWfLFSougj0Fvmjczq8iZRwYxWA+i+LQvsR9WEXEiQffIWRoQARAQAB
zSxBV1MgU0RLcyBhbmQgVG9vbHMgPGF3cy1kci10b29sc0BhbWF6b24uY29tPsLB
lAQTAQoAPgIbAwULCQgHAwUVCgkICwUWAgMBAAIeAQIXgBYhBP65IJ8vLz9GZIQe
VawQezhmktrdBQJo12ZrBQkTQxnmAAoJEKwQezhmktrdi18P/A3De83MBx8bdcWJ
Fot71Vk1TyBQFErgrtcytSU0czEHx3tGbzgQLbMlyzjirOT03usxEkOeqTVK+RU+
5uFXNZYQLwMJlHJ6S8tnfLe/ExM5WQ2KPwIUPfZs1GDDRQB2dIKSc+qYrP1O1vf4
O4iPgfLHMW2bFh3zjjxcaHCJyqc7Cau33eZFBAsRni1jOUo7MeyX0hlXfW8pd48Q
wZllQVZ/6KmDiFWA0CZ+2svJ5cL0tgPoh1OQjoz0nHpNfuDILMrZ+e7tx2VTlkGH
UGeNSydnrK8v9ztFn34KtU/k7NEWoVSyEi+5ICZL18FBwPqTwdVWXwXrqZCKiIpr
8ZdJWDz2sJfgDFNCC6rKgCQ6FrmaD9G76dYWkQ4AbZqABlUzU3q36W1K0r3iOAb5
G4tdOt4yqXHTe1x+ZUNaeW7gaCmtXAxLw0OfeJrcq/44b/SQP+qJ8sSOv76Yg2oF
BsF5DWOVUFghbTyokHAoVROyhBR4dUUisY39AqLSL8+Lp9Pr3wNuGl9GLrMD5701
piUb88B3Gwe1EiKV1gaKrvZ3mECDUiSMVO0Z5iG8E4QDpNmVbJbV1uT821ubvtOv
2Ko10Fa0uwCYGssdRGqEXNy6jz/Er8LAC3+nmGINDJQzrF+loYoSSkI2Nu7lhMuL
7iWwUPF7OhDXoVSAn4X3x6q2rGK0wsGUBBMBCgA+AhsDBQsJCAcDBRUKCQgLBRYC
AwEAAh4BAheAFiEE/rkgny8vP0ZkhB5VrBB7OGaS2t0FAmjXZTsFCRNDGLYACgkQ
rBB7OGaS2t0/Ow//YIv51vHtD+kwMmIvk3zpizDHY0zW2dOezAo+C/DsSyC7wDll
Dixw34EQ1yLXH5xLR8CH1zupl3JmmEp1ucdQggoefbidxDl8Fld7tJOD1y3GGnTD
0jAl2ZC+W65Oh+wS1mD1FlaKjMGGkvJf0dA7RtU2T8dv3vt8dsxg76FMFS3+fqlC
FNOAsNTn9zWR1SqBIfkMJK83aq6s/rcEV9VrAYgDgqex58fygB5EuTf842/IF7WZ
Q9gd6fupB0mMZP5YWd2uj/vsBTYakG+mgQwDxZuKPeEzAqnqqS7biSQOUO6Wozlq
Yy4fSczE9GkBAvg0pGmbko+zHvpnjvX/h1CUpC6odvFyOAhZp6zyhs0QWz9thfqV
lU8WlbgJ2atFDn5GUSxF/fe0Yzovlbbs6sbYXuvMG9RiEOuJ1mBbZR3aIdZ1U6Do
BHc/vjc5mWcV7JQSP7i4W/8W7X3UAuN9LdxB+IvF3Cwrgtlw2BWvA5Alco5Tnz8t
P/CIVmBjk+sLme8W4kfLK3IWEbwClOdNnErI/MHRm65A2Y5EMIhwjrOi07SU1Pxa
nPpg3OYJCdvjzdB8QE3/DBiMfOl4dISfKDVEWnfK8mZaYd/BeRm2gUAa9UrqSFCG
BlA7Lg+eLI3US0FvwWJ4j5bBJqgLu+y7crIkiUOPAQuLk3lO+5uYU/I3DuLCwZQE
EwEKAD4CGwMFCwkIBwMFFQoJCAsFFgIDAQACHgECF4AWIQT+uSCfLy8/RmSEHlWs
EHs4ZpLa3QUCZwAXCAUJEWvKgwAKCRCsEHs4ZpLa3ZdTEACMBLg2q9zk8ZH02nDz
Sg5zc8Wlqq8WdxU0Pj8qx4UOrrMca7wyiUvrgoxPW5lh1RVNUeMkDRfu9pSXcOVI
V9LvmYE/WnwKROubgGbsC4T7M/LqV0/AulXil4d7IXcO6l4toa8LTNWtD5bODgrN
gvay1AzCU8kq1Qw1cKZ2gAfvA3Ba7PWyLeUN4HTlGrXcw73G+0CofY1L8wqWxHCJ
29XqQzeTEc6MDEeIlNlVdUcy8Qr5uwkEsl34H9AxS5F1opJ4TqvXiDZsrSRRv57R
XYmRZDWeYT+9PZaMsHXza5qgej7BfATxhYfICsNaY6MK3x6b+nDSKkoZgO+i09zh
1YjpahhQe6G336v/3mRj0dKGCRQ6znQ9ghUaB5z9zfvgH5AOEkTe3l8MqM+j5A6P
VjSBBJAHKejxr7+wKJKIA6P+DqpsYAunzftwUzrLVqb+BZQ+DcTmVrE7OPcMYJD5
QglX/Le+WmWZHI154NXgpWWUOUgZUbUge4DKrT+zCJ9iecPLKTW7OcULyXO+rjb8
8BGrD5GPlHB3dOUXXTlMKCqg3qy1Bu2KnZTQiaEEdZgSIGQbrW0JTMmmXJkKjokd
JMA4vYeg5en51G9nRQjScPngx77IxvByNyFWTJdG1ENpJpsK9TtmENcpyUJtJZTJ
```

```
ZSOIRVPP5RzR5vInuXWq6VV0BMLBlAQTAQoAPgIbAwULCQgHAwUVCgkICwUWAgMB
AAIeAQIXgBYhBP65IJ8vLz9GZIQeVawQezhmktrdBQJlJEoiBQkPj/2dAAoJEKwQ
ezhmktrdx1YP/0vvym3jgX/pwnR7K1rafZMb1iKQBr0ISG8cdbaf4pqX5vuUZnyj
w9Cl/oONn7jJjnQxOIIzuBoxne2WN28ftM2w0nVXm85mAmz2fwQz/fdKDyonXcOh
pfD2iMqn7gESjhEgRE7wMDYMDuLdqHI7OKWGVfgrh7xEmKapLh45h7cnumo2VjL9
uDYY1aOBHz993T7oE41y43rhk+6kKbGFd2uuo7h5j1ZF8Lj6sYfcEzXOU1OhRlD0
nyBjDy9MYWu0YNouc70WgMceGx6hjvCAM/5fxP7SZFecZ7ePeB0GpvVA24hSNENE
0r3tUekuOf1I0FunMnMnbh7ZO9rPYqWvWDNIpU3S4CjFhY82L+IeKnmLy8N6ASRk
HsPiNCOHSK8C/0ynrd9xLhX8Jsk/TGiQYaleoHhWkNLlZsL86QHL8SKEqkqZCQf5
AEqghDP6NEGS7lnOenA7JjIrA9KLlT7fnNWZOwFi5X+o/CymE2ytEMS0Yf3nmY4U
n9x56Wgn6J2zqB5nqOXf6NxGdAIgOBm098YEnKCIFzk+yhoDlprVpHcnd2b5f6Oq
uh8KYOEbKgpMJ3zZuWSL5kwGF1nNoYiAkonMaz9H3pOQnOMVYCUeUTDRsiO/prrd
UhNlry4TAsBMpeXnFhdLVM3vFQZVpByadGOJNmnaN/Wavw2a00UGBFa4wsF9BBMB
CgAnAhsDBQsJCAcDBRUKCQgLBRYCAwEAAh4BAheABQJhMqGaBQkLnlUVAAoJEKwQ
ezhmktrd2sQP/3YHM+U+BbOy1nSEAfykZ71+uCM2hkHMLdxQYWB/rBWkmg/pbu+d
r4t45RsTASrNjRcZOntlPMQRIq973ymHfpmeS+noFwvTGH7zDv1BRBR9wPrd1XUz
iSuEUHGi/fqxUVXQ5mbonzfThX8tuXeuiQmeToqoB00FYlZm6xsNnEHcjVl66mC4
IPoJLWnZJs4rOCeoRf5XvDTgX6xt5/kLYRZf79qaWGFvaZpsc1CH+rQJUdVa/D4T
7pI7hX6zy0S91z4iuC5HZUiOTF+y5auEZHGTdTWNS1kvOvfcCTi0XK/GkGL82SZu
7X2VGnpCeUnFyViRGlk+KaDG1sVyDY+lcBPg6ilr45M6MQV0iHS5OF04QNXSKt5+
UnzJH7lldgNsR6ibRMyNV3k5v3fyUcSBvIYyLORTTBiVEjQDSbk1QNqbrQlX9CWz
+EJWn16BFTmMFvxBSWPm640GncHP5J3/0MbMw3Cm90x7k8UfNANIemcrJrSxIDwm
g9cVAg3a+D+wxjrVe8jGg0ejvECpm+0yswigj5x6Lqj09A4UgdjEauN+/pn0nhBo
Gv7DzMXtM/LoDtgp6wn93qZVN2TsuHnkEk4UyntB6eWJbBdXHWUr47exiWh0dvQN
tpwCWPT6I7ZTPtA5K/zx+q9m6797BLgAkTYc6gloQL3vs1Z1S3m/hZNawsF9BBMB
CgAnAhsDBQsJCAcDBRUKCQgLBRYCAwEAAh4BAheABQJgmrz2BQkLBnBxAAoJEKwQ
ezhmktrd36oP/2rB2EkwSOCKC4m0heWSfDWi6OBKoEbbDtFtc6/HwqBW8SPsiKlq
zV0e3qBY/LVju04+ktJEK+EGXLnC3iC36MegrQ8zt391kEx/Zv9LIuVOCX90QIAX
dL8MVUkkjRLCFFH8pTgRy1cJYWk1X4dYdXWYc29fCwNVartNdNBhsb2ht3VJeKDE
kUivBHmkjuISDPEnI1coY7Lj0ZtY5cHdRF2eZpB0RkTBpsIt18rCYyHkERZrhmvb
j3rOyPyvOa+1/dQS8/hv5pEmbKx8cy8RdJkmbUHYatPBsjHkJSWr7O7G9VFW4GoN
9CRAI4KkbDSEDjCL5dv2pq0Sew1MkLuWJGULAMgiIUlWcOs5SZZGFSksNQrtSFV9
Z/wGocecMGkGQNXQ06JV/Fry/TvyphBlmylEqL+NLqEcEjnlz90IVu+ZA+M09J96
UlHO7V5GvBgM+QK/q/dJeMHPWrNlo1gA6Nwl/HBdM0DqzdZ2jEPvsQSABvZrPMty
+BAqEar4wqY1AH4X5ccEjO7nJQoBQSDRSki1fkBsc1nx44N/m0kHdIa0Z/Y+Mw4v
WiZhREkOospG1I4lBa3CNTVAhSs9msGsYfkqvFJGHL7sZY8XSv82GBBvA0nUNrsJ
bLBwo2FaQG9eoatRAGkqp4b/OtNtBuGeiQoNwFGbfUZTAaStj5/zZj0swsF9BBMB
CgAnAhsDBQsJCAcDBRUKCQgLBRYCAwEAAh4BAheABQJe+9bwBQkJZ4plAAoJEKwQ
ezhmktrd+ScP/RoaUKriVVAgLHOGs+/mnfKtnfTlClzi5dsdI9/6H0vLpmSWK/Cl
2cT6gary45VMgAeVK+H1lQXafYj+FY++I5kYoe2GrSvIXhpjaFAJyNf/dKleTsqR
Tm371i8b3FDYs5kvy2CnTbmHB8MsOGxck8/YHd1x+g8WpO2IgF89yYCSF3CAdxC3
6bHbs6Z3C3lcM/3SoWF+Yie2P8XeBMPCGp/BcjQzUcHF6G06TwDDYhixucUi6vEY
EH5JtOwVVQ7bubT8OFeOoJwVxlzYz4UoqxjKDWymarTzu03AUIT0PXPece94bJAK
mSh68ItQe3H8tSPMubERWz2tEV3lVkChDGXcC7BYQmxHseolxz/qzCtJ0iX9BvZR
```

```
dniZNeNJ/Cu8M2pDp47zdNFXzf/Q/sQ9pQlws22G2g119rWDneBku9n1vTP80/er
SB+VLTBjDiArlCY5y9+BG8wbscExJySoQxkB9j/nlMzPY5rgk0SyxsNj9GbqH+hr
EjS3/uacNwSLxGcOT2E9Teot5pfTEO6fQVq+35QhfAlP8c8jze01W/+u+wXu1Ui9
azRSzYtCHanGyyet6U1mlBpAkqkZzH6t3CA5czc9i6FbzjvFVZnbRUZIRzfISYew
lF5WqgTn2iYVdxagPRvLF5kjd696brGW9d5HwirCVGaK04VsXWlAblB9wsF9BBMB
CgAnBQJXdYAFAhsDBQkHhh+ABQsJCAcDBRUKCQgLBRYCAwEAAh4BAheAAAoJEKwQ
ezhmktrdWigP/3QWl7aO81BUWyby4HEhN4SdAoWGY/FLqO4mCtuplcnMgRUCSiL9
l2BSCTMCtUcdSWtYwOgSChN2mMsdi1U2FNR5HvNunYR/pFdqjfQurf1ZmKVeG5/4
uuKaOxMw9e8pK5uYAfs+O7gr8gu/f6/Drp7NZk3/yVKpf4WCY9oX9TA1q9O/11nN
cwS45U/d7YP+N1YM9cBXa1DnDcdfm0BlykzouAF0qd1Lwi/tmLENvybD3+2c2WsE
rlFZGSa5ZafO0tTIWXh5k6wh5FdRRycrnSyRK3B9N9+yaXfMQ0XpOypa8dqQEnCi
IsngDCJPxtTrhMWKhBFRUMzK/WZTDboTQSQDK+YVRrE4K8MtoZSKwZLV2r9O3TpX
kpbKsPVYmexerfdMeZfjZMF1bC7BmEs7jciH6JjbqAoAPnHzN0481aeNarINSViX
PQWr2mp9qShei2/RavLtx2ZNrvmGW72ZKpF8E3WWUDpBJqFVeGNRvOm3aZj8o/Hl
ewtNjcT4ouJfqlfKiULv+g7ANEMDLQTFDTg5twRdvmZlB7oTBsavf+LwxPIXhH32
IR7TX7VeicMMxmZnmZK2ANT/QBi3laf+ojVHvB+f6D74eLNq0Zqjfi/3UFNYsYjg
E+YgCqEUBpHbl61nOHwGOSsQwfap2uKKlzukD/KxH5SPBC3DYGBI+KCbzsFNBFd1
gAUBEAC8zNArPWb3dPMThL2xAY+fS60vXdB1SkOtYJpDWpFgvo0d+VQ+hV6XulGA
HAS6xG1WHysPT9KejIRSgLG+e9CaM5yhsxNa1WFGUM4Q9ESo3t+a75Go7xHIxgFj
C046/O6Vh3g9N/PREeuG8zkZ3H2v5fmD+ejyPgk4W9sFL00zjRiZD0FKVYR/j9ue
nEC/2NBcLuFy3q6cDfmCoDEOO62kXMnaGz3knzEK/X1SkcjsxRDq7zaQlQ1Kou+3
dICwy4x5SJQ8jl+eeeEvF2C2/dXmDohb57tqUwioohMUQkmCtvZgEHjypUwgp0MT
o25gWxkvJlSJKUOb6b1786WNySIzF2gxqlkkEmBl4RAssQkeXjrSmGwsMDyHNqyJ
eYFusl8sPaSpo+V2n0z+2B070Uq+wmf1S5A5FpegH0PZzzoNZo8I6QxaZje9YSZU
ijGmZIdEBleRVt3Svhi8MYlnasd4bW2RK1sr7plkBf8QRe6biiQRF3KDOSn5CbmX
pAcHJ1ZHzRRdkXZDNQC6vCJxsy13O0TrhJtAV1Yq347uyUbVi291ISVgroUVtprs
mHoEk5GoOTHbg9SCSt+xi/FiJQC+ubWmIGXoFKMR3UmhDnnzobKcbnbs/Hd981Fd
VghYYvq//gTAkJk0WxfGqO30wtXRndPOA0T+qhP3TE+LtGRJ+wARAQABwsF8BBgB
CgAmAhsMFiEE/rkgny8vP0ZkhB5VrBB7OGaS2t0FAmjXZm4FCRNDGegACgkQrBB7
OGaS2t3y5g/7BFXp/fdanzuQPToJTPen7AVwhLloKaiYhG3GjdXfMPLvu6UtaaGm
qynLolUNNooobptFqc1G9BKoAghQrta7CsDHtsQF2xyc3Mfu0gmpL/7X5a7sFIeJ
j08UjfweHx4DSG4LEZgNaAoWFjZltp4+8cqijkAHXt+r+1ayQG4VVHOWyXXqmSH4
9HqtbPcPyRzxdoVLeshZC9jmhHhhKqw/LwGyipWSOUKQDjWarBwdyhNmWCaLvxH1
ndMp4tq8DPGC3G4T9tYAbANrn7nKfZgHebMSzMw9kSp0L6QvwwTDjJyIWz85WyeH
WHeBysDaBOit3XDlehUew27y7N6a9hQSYjnXuwvre5mjDIOqJon/31R6ui2Z1y9P
a+bC11hbLXXh9tLCXRuoOt6thh9Cq5X1a76PPpEv30o3bpsb6l2hbrut1OKezwvK
l7txito/jfMiWfsZHA9O4SoM+8GnmVingHtZ805n1T4RddJvT/vaqplfI6zf7jmf
a69lALP420riFOQcwntNUM5tVmFUZsnFp2YRd4Ls7MiXVjtABahlSbb94l5WSVc0
jrOLDf94edvzk4R8i2Ob8CfVZNqEsTR6bHz8dT7Q+xQzEdjUujyyZY1UUl157Qeb
OsHjhCtuZYCI04X9hZ37nKnZXSxRlRDCnt5BEiyFu2WD1RscUe6PcVDCwXwEGAEK
ACYCGwwWIQT+uSCfLy8/RmSEHlWsEHs4ZpLa3QUCaNdlPQUJE0MYuAAKCRCsEHs4
ZpLa3XCpD/42DrcveE+q2ulrAIYPDlUlHiwIMejqBDRm6zmr1KSAeb4E6/MFcP4s
rXSSscMlrqG6NVynjNCXjD2YzWii68EwoXLJkgoD3r2ifzkV62EX2MIEeNZAVwuy
KNxorzmy6bhuWltRYNK/hITs2AG5orOk9ADEJ8PixKymrWlhesPaWX6Yhp9/tWaC
```

```
RHOSRiLbRVaJ+7sqT88urLmkV9Hqx949Zxv4+cgBVUGL6WXKsfWhHjbDMNJnozWB
SZaIJznLApOM8z+1DNrqUYyfR8SkF4IOVmg6HDzoyuseJJ8JvMAlkvT6F9VBq/iE
yeDYdEEQxwHwozKrEx5Ybxl5mntbqwCXy6kHSx2+/3RZWpZQ8K29YP9QEk0KeGF8
9Vap3jjNrX4u3cuRNQpeblQc4uFn3Nzaj+cVV4YzcRw94NifecXpujSvk8XU2ytJ
/JgMBxPIBKglN4eEMet9b4FRB5XeBdPAm19/LXyb4IlIipGNXlgNz/HCuBzidzHT
QQdqfA9rZVx1hwFr7AJCVqWaXVsx1oEAhKqpTtsLMyj594DvnRuwKw5Vse+1eydW
MIHYdbxmJccsTGIt/hsOpc8zfm+QYk5752jshhOKEBy+Ey3QZI1WbO547NOb2Hwr
Pgt7fw2NCKMPElSu98zmneFPhqNHf7L5urBe5gADj81E8lm6t/oVxcLBfAQYAQoA
JgIbDBYhBP65IJ8vLz9GZIQeVawQezhmktrdBQJnABcLBQkRa8qFAAoJEKwQezhm
ktrde3MP/13CLWp99XvRROrzD/bWOfWjAenT2PE/tYdOY9YcTQFbnIUhaVUDWAo3
pibR3D4u9LlY4olpGfJ7BTIHFa9myfpaVvmrNjueYI4omli24JQ/CKqNdY8Qzxz+
/QyiNK7Aw5cEBWIu84WGB1SsefWWT3rZe9YBb77gNcWHZ15pXTXrcgUxGY4808MC
I9YFWq8EA0iHawtFnmB3UFfClWt37Hy3PKvr1is3uG60+ULI8RQz3/+ZwSG8U+xt
b+I7H9+gITc1eFCb+tIwp5xWflyxcFXYk6UzOL7y3Fg2tIEuSNtIHUC9NDVobf6c
I0KAzZcMvKiPQiuBnVOjgDLmCZM5H6axj9x+gi4oVh6ea3HLqMzyjm5JkeCGgKWv
H0gD3yGEZDvcbavkQOle5T+4JefndKzCPrluX0iyx+oQiiOL8WieSSkSB6BsZcUN
SeuGJwM79Y7Oqld/YVrQNBZj5Vz+m3nZ+0EWDDMI0hRgMpSEIc+dnTC0u103Z+Rc
c2IJq8INmU653sUcfCZE12ParW4rF7ib6kViYrABT8f4e2TP0aOyP5kp51ied9qL
azaBA6tt/C9X1V2EJZK4srXtmcZO2Im45RAiVXyfpBAmmiF3eZWCbKe7qBC4rDRh
LZG4RQW/S86Da0BID7gQz9IFSkaG504MsDhvnA7iAqaHUHUepCsiwsF8BBgBCgAm
AhsMFiEE/rkgny8vP0ZkhB5VrBB7OGaS2t0FAmUkSiQFCQ+P/Z8ACgkQrBB7OGaS
2t3AwA/9GkXKUgvjKGCxwE4SdDt7c2jw6to2TTP9iFJ3Xbk3+5BURT3gkZCuu9D7
gt+97aVo/B4EM7Xz8DQKyY7Ic9VAwDRra/Hwi1V0hw1zyIWQ/gAnX3baU6qLRWHR
vVR5meV8r35C+rg9DaWFYmvS7PIv9LfxESwBPUjbmx8k4/5EJpHUwf12bzkTnot5
7q5lHxKQa6IvqQak+Hp9ZM2KPdsgKO2HWJJIIvYcI5byW9zBKV0O7YR8gtRAJKp9
IbtsXx0WT6cqHOFVc5SSzdcaMt0gLFl7BTnJyvKK2l9GABGBmzYDjeCyF2J+Ippf
oqxqfTe6EoOsuEMc2PbLTs9SsWjyCC2VGlX8+uUH9SoKwL0VQ6LFsP6fhkVKqi/a
rB6UuPR/iZnrKIuxMNQ4U+t2Q6UdMlmXsAXTNdkwzoK9oJRokIrH0ZV1KtH4sjjA
tCic+tOddq+GQLiKe2WpJfxlA0uESCB0TxjAwQmfn1H+dUhPeLlbNimHlH0/hXPd
ifuNGozzADIRseQDyzjl8xGL1qRZLD3cfmda6RyZ+S3dQRuaRrcFCDccpY/pO+F8
jbx64zyqqNs+KV+SkQGOcKFhWTZGCfQ/zMDtDmQKjb3eTAkv1zdEOMw9zEjjmS0q
8FNl+2wO3VnvXwvBbtDdVCIaIq+jVcsy5XtnnV+bJ19Q9yue/XvCwWUEGAEKAA8C
GwwFAmEyoZoFCQueVRUACgkQrBB7OGaS2t1uHBAAhOYVvrtchRmzCvdNER1DtkIs
bgQPJ9OxbyfvmvoD06qxH7PrycLZKbt7yYpAUU/CMc86GwaEe0I5Nm1CTs6NvDIv
g3e7EPIS859tyQflbM56NlwbsopCuoCJYknuroIf/M6dW6vJKNXLMmnL/AtalUBw
X+5pblmGUUJep49oTOxQEnvnuqyvaGjXgFXix5PVFJD2ed5NnQeFpvfCpc/ioNOj
z7ORO82j1ht5nWqPraXX5AYhQFM/kwR1cK4LV7gVDd/q+dfGYHzpxQ/HtyX/Lasi
N6I52QqA95SM1ZZLPFLaNh6EvnB7uC9pLCYS8nvilX7/cez5PFff1e1gXCOT0jv3
mJ2exLmXV0BbfKgjccFCxhrdRLtukfiDfJkySy1zdscnpfng8wJ3xKRv43cUTz7M
Z24OYNMqK26aJZVXEQUYjCwsBylY/F5wjYAwgwZ8yF5RFix28P/K8JsIHb3QrAJK
sNWQAb03ZWis3N3spR5M9Mw3VuDZ3WUXq7mxB5M3kpVoZ3vETU5cwTbADYNPf4Sw
BDK2uIVtxabezxSBtz0FcyYoF+OW8q7r4WvoyC9/+3GfnozZLJcEIVDk4W2pMW4A
UhG/6drKTm3HkSDWIDu7d1sHWMffLEYfUHtN5DKkDkGoPfHvZvu9teR5yLfUrPTf
ktihPn/JMrmwa9pwi8LCwWUEGAEKAA8CGwwFAmCavPcFCQsGcHIACgkQrBB7OGaS
```

```
2t0uaA//UWRaRiHEAKeRqBG/T2ak+XZJNu7QHfNgoUEAub9Zru8oPPXx2AJLcHEN
KWmeFlLxADdWOZs4Bm9oOew3VQnR/dBqjnXfob9Rc+eYUjA3rXazM/QrqcU8Syi3
MjNGUmjdL5aQF+IppAMgOBLG1TEnM7C5/PvrGJuYpGEnkKEwMK/GYhqg2V60pHEV
Pvs66mefJpCzbZSy56qtknSt6yBNWc14XgDX6VTn2kW4CV/3vVJUuvjvYs9SPyY8
mKEXa6QvUd3PcXv6RiWk4lGYuT1+jh2VkcFQ+JnUwv9TbKFB9b5jq1bvW9+LMDEl
YXux7pBP5RPk+OLpyiExIRFWhi3x7aMWOzQ+I9yuNTeYkTHiEAQRUhs/1Fh4oLgI
v9QZgC0mRSN3zm8plQdivs1ZlAosAqqkA9BQwqsgosQe7P92irYIJqay0si9wGCD
wSMsmeXdIF6wW3/UMJZl66aarPeiZApGX0QdTZwjMh/QK/8gTKyeZulKmNkNfwWq
O17OirWqLKssVHtg3VUM8EIdh+oNqDDXSeWtYUmpPpWp+yWZ0x1MFFZhUQHQZTGu
TIj4A92LQzbrfj/jXRvWm2SrJMivUoiDUn+qxKIpVwFlI5gVb+uyTFhw89PCkphr
JwRi052RLoU9yd6Ek46UH4XfZZWrZuzY+zzB7oqGONphLgi/h3DCwWUEGAEKAA8C
GwwFAl771b8FCQlniTUACgkQrBB7OGaS2t2/MxAAjoEGPdzavhsOlXdPCRd1D5QJ
r8T/NSEV2z1cp8ZvdrkjNF09TBP4qsBnKJiuvY1Iw7OGX9W2okvXxgJizE45v9MH
WEMz4hmIjmAfRwcqENgpOc1IY/T0/+kkCW8dB6d30J1kT0n2PCRzN9L5vPqZXGTG
mLvd9MOjH1256w4uxLb+e1HMDTCqEN1ppq9G+EAR/29q8JZWs1marbZZWxSWcg/E
1YYbNafzklgjq4CLh/j8AEWSvLr39zRy9uvQ/yqAKZ4K4aZfh/SPupGDvsD6ZK54
EPHxErQ7aiXTbUHtvwhxWLOP6WmxFA3Shr6L6YUb6jq+0PVliFC517g3mxFHJtwt
yXGNIKhmzmr0l9OlsHafulJ/9QPfK3Ce32SkPhW/11MYA8HzduMv5Arp7cBczXSP
EUTmNIVKv3gTjSQrzRhwhHmMuqyDZ/rXQQ1jl2sxIDjO4MUMvVjYKF+OCNm42gVs
8ca3/wN9ZNU6hyFWeKQDuCAqPPbT5GO/DKseFEwB+07wwyH1RXbyl0v4fneg605X
S7lqhNtw2p1hDL0HYHDiV+aPZ+LoOmX6+dmnqE6bQJaIlVb922KWmliO7F3DkqP7
0jFlhoE1gfiXWkxP4Gy8wOobNfEMgvz02djkGQy+oQqeNdIcZFZgzPTGKB/nVgpt
9CcRDWjPltFCd2e1FBbCwWUEGAEKAA8FAld1gAUCGwwFCQeGH4AACgkQrBB7OGaS
2t1PIQ//Qc5VYfBCxpaMysaPQ44wXPEZSjxIGZhhMGzb1UzzAEYOw+RgKN5nNTXq
L2KoOkOrGnKqZOKByMdXwIPH/rGwwEsbbIpopnibf5ic5B/+xCTIK+qLIwX2ZLuk
NhbL6Y+E+7DxMMh+KqBWHONKkgwVY+rFWOfoops839ABKvc9/Ry4/qqkcb40AzpD
l1iQJ5vK/DMuaDWxWeKXqJLIl3WMGPcPfheuBZL1u7LEEHYKMgzvpbF81WIn3MBo
8jvxf2/o+kMafSSDqgvOu6yu8GOhmScpCbRJn7jV/HrG+tM+zy48TN6/MkGWSR7q
TD34pqBjyatVfVl6dGD6xj/i/Emt5hZB6qXruCDH7AWMoNx+FkDubs4sc4PKysZU
Itya6KdQFo2UeYsNwZhdn6QwKhd85um4JUHJCY0mARvjsQgWXH/5MR40cow77bbE
vVq0XNd+QRVlyT42CEtnIUOFLeDVuZrum5Tuvvna6ImMDoi/z6QcNeL79XsY2m6I
QVRiHr1BDb/8JLkfnWiwL8GRv169Kf8unx0y5u1YBpcMYkyDD2+pnnk3TY0rR+8X
8goecaS8fbyu/Q48K85ZMD8wKW/bzLQ+tK9y8xed24u2QERftMhIw9b6f45Nrrf/
PhgV8RnuwUusSbdDe8kw3eYTmLdzD4kZc9K7SdO2CqT+hm//9JI=
=uGHC
-----END PGP PUBLIC KEY BLOCK-----
```

Claves anteriores

> **Important**
>
> Las nuevas claves se crean antes de que se venzan las anteriores. Como resultado, en un momento dado, puede ser válida más de una clave. Las claves se utilizan para firmar artefactos a partir del día en que se crean. Por tanto, utilice la última clave emitida cuando la validez de las claves se solape.

Fecha de vencimiento: 04-10-2025

ID de clave	0xAC107B386692DADD
Tipo	RSA
Tamaño	4096/4096
Created (Creado)	30-06-2016
Fecha de vencimiento	2025-10-04
ID de usuario	SDK de AWS y herramientas < aws-dr-tools@amazon.com >
Huella digital clave	FEB9 209F 2F2F 3F46 6484 1E55 AC10 7B38 6692 DADD

Para copiar la siguiente clave pública de OpenPGP para el SDK para Java en el portapapeles, seleccione el icono “Copiar” en la esquina superior derecha.

```
-----BEGIN PGP PUBLIC KEY BLOCK-----
Comment: Hostname:
Version: Hockeypuck 2.2

xsFNBFd1gAUBEACqbmmFbxdJgz1lD7wrlskQA1LLuSAC4p8ny9u/D2zLR8Ynk3Yz
mzJuQ+Kfjne2t+xTDex6MPJlMYpOviSWsX2psgvdmeyUpW9ap0lrThNYkc+W5fRc
buFehfbi9LSATZGJi8RG0sCCr5FsYVz0gEk85M2+PeM24cXhQIOZtQUjswX/pdk/
KduGtZASqNAYLKROmRODzUuaokLPo24pfm9bnr1RnRtwt5ktPAA5bM9ZZaGKriej
```

```
kT2lPffbBjp8F5AZvmGLtNm2Cmg4FKBvI04SQjy2jjrQ3wBzi5Lc9HTxDuHK/rtV
u6PewUe2WPlnxlXenhMZU1UK4YoSB9E9StQ2VxQiySLHSdxR7Ma4WgYdVLn9bOie
nj3QxLuQ1ZUKF79ES6JaM4tOz1gGcQeU1+UklgjFLuKwmzWRdEIFfxMyvH6qgKnd
U+DioH5mcUwhwffAAsuIJyAdMIEUYh7IfzJJXQf+fF+XfOCl6byOJFWrIGQkAzMu
CEvaCfwtHC2Lpzo33/WRFeMAuzzd0QJ4uz4xFFvaSOSZHMLHWI9YV/+Pea3X99Ms
0Nlek/LolAJh67MynHeVBOHKrq+fluorWepQivctzN6Y1NOkx5naTPGGaKWK7G2q
TbcY5SMnkIWfLFSougj0Fvmjczq8iZRwYxWA+i+LQvsR9WEXEiQffIWRoQARAQAB
zSxBV1MgU0RLcyBhbmQgVG9vbHMgPGF3cy1kci10b29sc0BhbWF6b24uY29tPsLB
lAQTAQoAPgIbAwULCQgHAwUVCgkICwUWAgMBAAIeAQIXgBYhBP65IJ8vLz9GZIQe
VawQezhmktrdBQJnABcIBQkRa8qDAAoJEKwQezhmktrdl1MQAIwEuDar3OTxkfTa
cPNKDnNzxaWqrxZ3FTQ+PyrHhQ6usxxrvDKJS+uCjE9bmWHVFU1R4yQNF+72lJdw
5UhX0u+ZgT9afApE65uAZuwLhPsz8upXT8C6VeKXh3shdw7qXi2hrwtM1a0Pls4O
Cs2C9rLUDMJTySrVDDVwpnaAB+8DcFrs9bIt5Q3gdOUatdzDvcb7QKh9jUvzCpbE
cInb1epDN5MRzowMR4iU2VV1RzLxCvm7CQSyXfgf0DFLkXWiknhOq9eINmytJFG/
ntFdiZFkNZ5hP709loywdfNrmqB6PsF8BPGFh8gKw1pjowrfHpv6cNIqShmA76LT
3OHViOlqGFB7obffq//eZGPR0oYJFDrOdD2CFRoHnP3N++AfkA4SRN7eXwyoz6Pk
Do9WNIEEkAcp6PGvv7AokogDo/4OqmxgC6fN+3BTOstWpv4FlD4NxOZWsTs49wxg
kPlCCVf8t75aZZkcjXng1eClZZQ5SBlRtSB7gMqtP7MIn2J5w8spNbs5xQvJc76u
NvzwEasPkY+UcHd05RddOUwoKqDerLUG7YqdlNCJoQR1mBIgZButbQlMyaZcmQqO
iR0kwDi9h6Dl6fnUb2dFCNJw+eDHvsjG8HI3IVZMl0bUQ2kmmwr1O2YQ1ynJQm0l
lMllI4hFU8/lHNHm8ie5darpVXQEwsGUBBMBCgA+AhsDBQsJCAcDBRUKCQgLBRYC
AwEAAh4BAheAFiEE/rkgny8vP0ZkhB5VrBB7OGaS2t0FAmUkSiIFCQ+P/Z0ACgkQ
rBB7OGaS2t3HVg//S+/KbeOBf+nCdHsrWtp9kxvWIpAGvQhIbxx1tp/impfm+5Rm
fKPD0KX+g42fuMmOdDE4gjO4GjGd7ZY3bx+0zbDSdVebzmYCbPZ/BDP990oPKidd
w6Gl8PaIyqfuARKOESBETvAwNgwO4t2ocjs4pYZV+CuHvESYpqkuHjmHtye6ajZW
Mv24NhjVo4EfP33dPugTjXLjeuGT7qQpsYV3a66juHmPVkXwuPqxh9wTNc5TU6FG
UPSfIGMPL0xha7Rg2i5zvRaAxx4bHqGO8IAz/l/E/tJkV5xnt494HQam9UDbiFI0
Q0TSve1R6S45/UjQW6cycyduHtk72s9ipa9YM0ilTdLgKMWFjzYv4h4qeYvLw3oB
JGQew+I0I4dIrwL/TKet33EuFfwmyT9MaJBhqV6geFaQ0uVmwvzpAcvxIoSqSpkJ
B/kASqCEM/o0QZLuWc56cDsmMisD0ouVPt+c1Zk7AWLlf6j8LKYTbK0QxLRh/eeZ
jhSf3HnpaCfonbOoHmeo5d/o3EZ0AiA4GbT3xgScoIgXOT7KGgOWmtWkdyd3Zvl/
o6q6Hwpg4RsqCkwnfNm5ZIvmTAYXWc2hiICSicxrP0fek5Cc4xVgJR5RMNGyI7+m
ut1SE2WvLhMCwEyl5ecWF0tUze8VBlWkHJp0Y4k2ado39Zq/DZrTRQYEVrjCwX0E
EwEKACcCGwMFCwkIBwMFFQoJCAsFFgIDAQACHgECF4AFAmEyoZoFCQueVRUACgkQ
rBB7OGaS2t3axA//dgcz5T4Fs7LWdIQB/KRnvX64IzaGQcwt3FBhYH+sFaSaD+lu
752vi3jlGxMBKs2NFxk6e2U8xBEir3vfKYd+mZ5L6egXC9MYfvMO/UFEFH3A+t3V
dTOJK4RQcaL9+rFRVdDmZuifN9OFfy25d66JCZ5OiqgHTQViVmbrGw2cQdyNWXrq
YLgg+gktadkmzis4J6hF/le8NOBfrG3n+QthFl/v2ppYYW9pmmxzUIf6tAlR1Vr8
PhPukjuFfrPLRL3XPiK4LkdlSI5MX7Llq4RkcZN1NY1LWS8699wJOLRcr8aQYvzZ
Jm7tfZUaekJ5ScXJWJEaWT4poMbWxXINj6VwE+DqKWvjkzoxBXSIdLk4XThA1dIq
3n5SfMkfuWV2A2xHqJtEzI1XeTm/d/JRxIG8hjIs5FNMGJUSNANJuTVA2putCVf0
JbP4QlafXoEVOYwW/EFJY+brjQadwc/knf/QxszDcKb3THuTxR80A0h6ZysmtLEg
PCaD1xUCDdr4P7DGOtV7yMaDR6O8QKmb7TKzCKCPnHouqPT0DhSB2MRq437+mfSe
EGga/sPMxe0z8ugO2CnrCf3eplU3ZOy4eeQSThTKe0Hp5YlsF1cdZSvjt7GJaHR2
```

```
9A22nAJY9PojtlM+0Dkr/PH6r2brv3sEuACRNhzqCWhAve+zVnVLeb+Fk1rCwX0E
EwEKACcCGwMFCwkIBwMFFQoJCAsFFgIDAQACHgECF4AFAmCavPYFCQsGcHEACgkQ
rBB7OGaS2t3fqg//asHYSTBI4IoLibSF5ZJ8NaLo4EqgRtsO0W1zr8fCoFbxI+yI
qWrNXR7eoFj8tWO7Tj6S0kQr4QZcucLeILfox6CtDzO3f3WQTH9m/0si5U4Jf3RA
gBd0vwxVSSSNEsIUUfylOBHLVwlhaTVfh1h1dZhzb18LA1Vqu0100GGxvaG3dUl4
oMSRSK8EeaSO4hIM8ScjVyhjsuPRm1jlwd1EXZ5mkHRGRMGmwi3XysJjIeQRFmuG
a9uPes7I/K85r7X91BLz+G/mkSZsrHxzLxF0mSZtQdhq08GyMeQlJavs7sb1UVbg
ag30JEAjgqRsNIQOMIvl2/amrRJ7DUyQu5YkZQsAyCIhSVZw6zlJlkYVKSw1Cu1I
VX1n/Aahx5wwaQZA1dDTolX8WvL9O/KmEGWbKUSov40uoRwSOeXP3QhW75kD4zT0
n3pSUc7tXka8GAz5Ar+r90l4wc9as2WjWADo3CX8cF0zQOrN1naMQ++xBIAG9ms8
y3L4ECoRqvjCpjUAfhflxwSM7uclCgFBINFKSLV+QGxzWfHjg3+bSQd0hrRn9j4z
Di9aJmFESQ6iykbUjiUFrcI1NUCFKz2awaxh+Sq8UkYcvuxljxdK/zYYEG8DSdQ2
uwlssHCjYVpAb16hq1EAaSqnhv86020G4Z6JCg3AUZt9RlMBpK2Pn/NmPSzCwX0E
EwEKACcCGwMFCwkIBwMFFQoJCAsFFgIDAQACHgECF4AFAl771vAFCQlnimUACgkQ
rBB7OGaS2t35Jw/9GhpQquJVUCAsc4az7+ad8q2d9OUKXOLl2x0j3/ofS8umZJYr
8KXZxPqBqvLjlUyAB5Ur4fWVBdp9iP4Vj74jmRih7YatK8heGmNoUAnI1/90qV5O
ypFObfvWLxvcUNizmS/LYKdNuYcHwyw4bFyTz9gd3XH6Dxak7YiAXz3JgJIXcIB3
ELfpsduzpncLeVwz/dKhYX5iJ7Y/xd4Ew8Ian8FyNDNRwcXobTpPAMNiGLG5xSLq
8RgQfkm07BVVDtu5tPw4V46gnBXGXNjPhSirGMoNbKZqtPO7TcBQhPQ9c95x73hs
kAqZKHrwi1B7cfy1I8y5sRFbPa0RXeVWQKEMZdwLsFhCbEex6iXHP+rMK0nSJf0G
9lF2eJk140n8K7wzakOnjvN00VfN/9D+xD2lCXCzbYbaDXX2tYOd4GS72fW9M/zT
96tIH5UtMGMOICuUJjnL34EbzBuxwTEnJKhDGQH2P+eUzM9jmuCTRLLGw2P0Zuof
6GsSNLf+5pw3BIvEZw5PYT1N6i3ml9MQ7p9BWr7flCF8CU/xzyPN7TVb/677Be7V
SL1rNFLNi0IdqcbLJ63pTWaUGkCSqRnMfq3cIDlzNz2LoVvOO8VVmdtFRkhHN8hJ
h7CUXlaqBOfaJhV3FqA9G8sXmSN3r3pusZb13kfCKsJUZorThWxdaUBuUH3CwX0E
EwEKACcFAld1gAUCGwMFCQeGH4AFCwkIBwMFFQoJCAsFFgIDAQACHgECF4AACgkQ
rBB7OGaS2t1aKA//dBaXto7zUFRbJvLgcSE3hJ0ChYZj8Uuo7iYK26mVycyBFQJK
Iv2XYFIJMwK1Rx1Ja1jA6BIKE3aYyx2LVTYU1Hke826dhH+kV2qN9C6t/VmYpV4b
n/i64po7EzD17ykrm5gB+z47uCvyC79/r8Ouns1mTf/JUql/hYJj2hf1MDWr07/X
Wc1zBLjlT93tg/43Vgz1wFdrUOcNx1+bQGXKTOi4AXSp3UvCL+2YsQ2/JsPf7ZzZ
awSuUVkZJrllp87S1MhZeHmTrCHkV1FHJyudLJErcH0337Jpd8xDRek7Klrx2pAS
cKIiyeAMIk/G1OuExYqEEVFQzMr9ZlMNuhNBJAMr5hVGsTgrwy2hlIrBktXav07d
OleSlsqw9ViZ7F6t90x5l+NkwXVsLsGYSzuNyIfomNuoCgA+cfM3TjzVp41qsg1J
WJc9Bavaan2pKF6Lb9Fq8u3HZk2u+YZbvZkqkXwTdZZQOkEmoVV4Y1G86bdpmPyj
8eV7C02NxPii4l+qV8qJQu/6DsA0QwMtBMUNODm3BF2+ZmUHuhMGxq9/4vDE8heE
ffYhHtNftV6JwwzGZmeZkrYA1P9AGLeVp/6iNUe8H5/oPvh4s2rRmqN+L/dQU1ix
iOAT5iAKoRQGkduXrWc4fAY5KxDB9qna4oqXO6QP8rEflI8ELcNgYEj4oJvOwU0E
V3WABQEQALzM0Cs9Zvd08xOEvbEBj59LrS9d0HVKQ61gmkNakWC+jR35VD6FXpe6
UYAcBLrEbVYfKw9P0p6MhFKAsb570JoznKGzE1rVYUZQzhD0RKje35rvkajvEcjG
AWMLTjr87pWHeD0389ER64bzORncfa/l+YP56PI+CThb2wUvTTONGJkPQUpVhH+P
256cQL/Y0Fwu4XLerpwN+YKgMQ47raRcydobPeSfMQr9fVKRyOzFEOrvNpCVDUqi
77d0gLDLjHlIlDyOX5554S8XYLb91eYOiFvnu2pTCKiiExRCSYK29mAQePKlTCCn
QxOjbmBbGS8mVIkpQ5vpvXvzpY3JIjMXaDGqWSQSYGXhECyxCR5eOtKYbCwwPIc2
rIl5gW6yXyw9pKmj5XafTP7YHTvRSr7CZ/VLkDkWl6AfQ9nPOg1mjwjpDFpmN71h
```

```
JlSKMaZkh0QGV5FW3dK+GLwxiWdqx3htbZErWyvumWQF/xBF7puKJBEXcoM5KfkJ
uZekBwcnVkfNFF2RdkM1ALq8InGzLXc7ROuEm0BXVirfju7JRtWLb3UhJWCuhRW2
muyYegSTkag5MduD1IJK37GL8WIlAL65taYgZegUoxHdSaEOefOhspxuduz8d33z
UV1WCFhi+r/+BMCQmTRbF8ao7fTC1dGd084DRP6qE/dMT4u0ZEn7ABEBAAHCwXwE
GAEKACYCGwwWIQT+uSCfLy8/RmSEHlWsEHs4ZpLa3QUCZwAXCwUJEWvKhQAKCRCs
EHs4ZpLa3XtzD/9dwi1qffV70UTq8w/21jn1owHp09jxP7WHTmPWHE0BW5yFIWlV
A1gKN6Ym0dw+LvS5WOKJaRnyewUyBxWvZsn6Wlb5qzY7nmCOKJpYtuCUPwiqjXWP
EM8c/v0MojSuwMOXBAViLvOFhgdUrHn1lk962XvWAW++4DXFh2deaV0163IFMRmO
PNPDAiPWBVqvBANIh2sLRZ5gd1BXwpVrd+x8tzyr69YrN7hutPlCyPEUM9//mcEh
vFPsbW/iOx/foCE3NXhQm/rSMKecVn5csXBV2JOlMzi+8txYNrSBLkjbSB1AvTQ1
aG3+nCNCgM2XDLyoj0IrgZ1To4Ay5gmTOR+msY/cfoIuKFYenmtxy6jM8o5uSZHg
hoClrx9IA98hhGQ73G2r5EDpXuU/uCXn53Sswj65bl9IssfqEIoji/FonkkpEgeg
bGXFDUnrhicDO/WOzqpXf2Fa0DQWY+Vc/pt52ftBFgwzCNIUYDKUhCHPnZ0wtLtd
N2fkXHNiCavCDZlOud7FHHwmRNdj2q1uKxe4m+pFYmKwAU/H+Htkz9Gjsj+ZKedY
nnfai2s2gQOrbfwvV9VdhCWSuLK17ZnGTtiJuOUQIlV8n6QQJpohd3mVgmynu6gQ
uKw0YS2RuEUFv0vOg2tASA+4EM/SBUpGhudODLA4b5wO4gKmh1B1HqQrIsLBfAQY
AQoAJgIbDBYhBP65IJ8vLz9GZIQeVawQezhmktrdBQJlJEokBQkPj/2fAAoJEKwQ
ezhmktrdwMAP/RpFylIL4yhgscBOEnQ7e3No8OraNk0z/YhSd125N/uQVEU94JGQ
rrvQ+4Lfve2laPweBDO18/A0CsmOyHPVQMA0a2vx8ItVdIcNc8iFkP4AJ1922lOq
i0Vh0b1UeZnlfK9+Qvq4PQ2lhWJr0uzyL/S38REsAT1I25sfJOP+RCaR1MH9dm85
E56Lee6uZR8SkGuiL6kGpPh6fWTNij3bICjth1iSSCL2HCOW8lvcwSldDu2EfILU
QCSqfSG7bF8dFk+nKhzhVXOUks3XGjLdICxZewU5ycryitpfRgARgZs2A43gshdi
fiKaX6Ksan03uhKDrLhDHNj2y07PUrFo8ggtlRpV/PrlB/UqCsC9FUOixbD+n4ZF
Sqov2qwelLj0f4mZ6yiLsTDUOFPrdkOlHTJZl7AF0zXZMM6CvaCUaJCKx9GVdSrR
+LI4wLQonPrTnXavhkC4intlqSX8ZQNLhEggdE8YwMEJn59R/nVIT3i5WzYph5R9
P4Vz3Yn7jRqM8wAyEbHkA8s45fMRi9akWSw93H5nWukcmfkt3UEbmka3BQg3HKWP
6TvhfI28euM8qqjbPilfkpEBjnChYVk2Rgn0P8zA7Q5kCo293kwJL9c3RDjMPcxI
45ktKvBTZftsDt1Z718LwW7Q3VQiGiKvo1XLMuV7Z51fmydfUPcrnv17wsFlBBgB
CgAPAhsMBQJhMqGaBQkLnlUVAAoJEKwQezhmktrdbhwQAITmFb67XIUZswr3TREd
Q7ZCLG4EDyfTsW8n75r6A9OqsR+z68nC2Sm7e8mKQFFPwjHPOhsGhHtCOTZtQk7O
jbwyL4N3uxDyEvOfbckH5WzOejZcG7KKQrqAiWJJ7q6CH/zOnVurySjVyzJpy/wL
WpVAcF/uaW5ZhlFCXqePaEzsUBJ757qsr2ho14BV4seT1RSQ9nneTZ0Hhab3wqXP
4qDTo8+zkTvNo9YbeZ1qj62l1+QGIUBTP5MEdXCuC1e4FQ3f6vnXxmB86cUPx7cl
/y2rIjeiOdkKgPeUjNWWSzxS2jYehL5we7gvaSwmEvJ74pV+/3Hs+TxX39XtYFwj
k9I795idnsS5l1dAW3yoI3HBQsYa3US7bpH4g3yZMkstc3bHJ6X54PMCd8Skb+N3
FE8+zGduDmDTKitumiWVVxEFGIwsLAcpWPxecI2AMIMGfMheURYsdvD/yvCbCB29
0KwCSrDVkAG9N2VorNzd7KUeTPTMN1bg2d1lF6u5sQeTN5KVaGd7xE1OXME2wA2D
T3+EsAQytriFbcWm3s8Ugbc9BXMmKBfjlvKu6+Fr6Mgvf/txn56M2SyXBCFQ5OFt
qTFuAFIRv+nayk5tx5Eg1iA7u3dbB1jH3yxGH1B7TeQypA5BqD3x72b7vbXkeci3
1Kz035LYoT5/yTK5sGvacIvCwsFlBBgBCgAPAhsMBQJgmrz3BQkLBnByAAoJEKwQ
ezhmktrdLmgP/1FkWkYhxACnkagRv09mpPl2STbu0B3zYKFBALm/Wa7vKDz18dgC
S3BxDSlpnhZS8QA3VjmbOAZvaDnsN1UJ0f3Qao5136G/UXPnmFIwN612szP0K6nF
PEsotzIzRlJo3S+WkBfiKaQDIDgSxtUxJzOwufz76xibmKRhJ5ChMDCvxmIaoNle
tKRxFT77OupnnyaQs22UsueqrZJ0resgTVnNeF4A1+lU59pFuAlf971SVLr472LP
```

```
Uj8mPJihF2ukL1Hdz3F7+kYlpOJRmLk9fo4dlZHBUPiZ1ML/U2yhQfW+Y6tW71vf
izAxJWF7se6QT+UT5Pji6cohMSERVoYt8e2jFjs0PiPcrjU3mJEx4hAEEVIbP9RY
eKC4CL/UGYAtJkUjd85vKZUHYr7NWZQKLAKqpAPQUMKrIKLEHuz/doq2CCamstLI
vcBgg8EjLJnl3SBesFt/1DCWZeummqz3omQKRl9EHU2cIzIf0Cv/IEysnmbpSpjZ
DX8Fqjtezoq1qiyrLFR7YN1VDPBCHYfqDagw10nlrWFJqT6VqfslmdMdTBRWYVEB
0GUxrkyI+APdi0M2634/410b1ptkqyTIr1KIg1J/qsSiKVcBZSOYFW/rskxYcPPT
wpKYaycEYtOdkS6FPcnehJOOlB+F32WVq2bs2Ps8we6KhjjaYS4Iv4dwwsFlBBgB
CgAPAhsMBQJe+9W/BQkJZ4k1AAoJEKwQezhmktrdvzMQAI6BBj3c2r4bDpV3TwkX
dQ+UCa/E/zUhFds9XKfGb3a5IzRdPUwT+KrAZyiYrr2NSMOzhl/VtqJL18YCYsxO
Ob/TB1hDM+IZiI5gH0cHKhDYKTnNSGP09P/pJAlvHQend9CdZE9J9jwkczfS+bz6
mVxkxpi73fTDox9duesOLsS2/ntRzA0wqhDdaaavRvhAEf9vavCWVrNZmq22WVsU
lnIPxNWGGzWn85JYI6uAi4f4/ABFkry69/c0cvbr0P8qgCmeCuGmX4f0j7qRg77A
+mSueBDx8RK0O2ol021B7b8IcVizj+lpsRQN0oa+i+mFG+o6vtD1ZYhQude4N5sR
RybcLclxjSCoZs5q9JfTpbB2n7pSf/UD3ytwnt9kpD4Vv9dTGAPB83bjL+QK6e3A
XM10jxFE5jSFSr94E40kK80YcIR5jLqsg2f610ENY5drMSA4zuDFDL1Y2ChfjgjZ
uNoFbPHGt/8DfWTVOochVnikA7ggKjz20+RjvwyrHhRMAftO8MMh9UV28pdL+H53
oOtOV0u5aoTbcNqdYQy9B2Bw4lfmj2fi6Dpl+vnZp6hOm0CWiJVW/dtilppYjuxd
w5Kj+9IxZYaBNYH4l1pMT+BsvMDqGzXxDIL89NnY5BkMvqEKnjXSHGRWYMz0xigf
51YKbfQnEQ1oz5bRQndntRQWwsFlBBgBCgAPBQJXdYAFAhsMBQkHhh+AAAoJEKwQ
ezhmktrdTyEP/0HOVWHwQsaWjMrGj0OOMFzxGUo8SBmYYTBs29VM8wBGDsPkYCje
ZzU16i9iqDpDqxpyqmTigcjHV8CDx/6xsMBLG2yKaKZ4m3+YnOQf/sQkyCvqiyMF
9mS7pDYWy+mPhPuw8TDIfiqgVhzjSpIMFWPqxVjn6KKbPN/QASr3Pf0cuP6qpHG+
NAM6Q5dYkCebyvwzLmg1sVnil6iSyJd1jBj3D34XrgWS9buyxBB2CjIM76WxfNVi
J9zAaPI78X9v6PpDGn0kg6oLzrusrvBjoZknKQm0SZ+41fx6xvrTPs8uPEzevzJB
lkke6kw9+KagY8mrVX1ZenRg+sY/4vxJreYWQeql67ggx+wFjKDcfhZA7m7OLHOD
ysrGVCLcmuinUBaNlHmLDcGYXZ+kMCoXfObpuCVByQmNJgEb47EIFlx/+TEeNHKM
O+22xL1atFzXfkEVZck+NghLZyFDhS3g1bma7puU7r752uiJjA6Iv8+kHDXi+/V7
GNpuiEFUYh69QQ2//CS5H51osC/Bkb9evSn/Lp8dMubtWAaXDGJMgw9vqZ55N02N
K0fvF/IKHnGkvH28rv0OPCvOWTA/MClv28y0PrSvcvMXnduLtkBEX7TISMPW+n+O
Ta63/z4YFfEZ7sFLrEm3Q3vJMN3mE5i3cw+JGXPSu0nTtgqk/oZv//SS
=bboB
-----END PGP PUBLIC KEY BLOCK-----
```

Fecha de vencimiento: 08-10-2024

ID de clave	0xAC107B386692DADD
Tipo	RSA
Tamaño	4096/4096
Created (Creado)	30-06-2016

Fecha de vencimiento	08-10-2024
ID de usuario	SDK de AWS y herramientas < aws-dr-tools@amazon.com >
Huella digital clave	FEB9 209F 2F2F 3F46 6484 1E55 AC10 7B38 6692 DADD

Para copiar la siguiente clave pública de OpenPGP para el SDK para Java en el portapapeles, seleccione el icono “Copiar” en la esquina superior derecha.

```
-----BEGIN PGP PUBLIC KEY BLOCK-----

xsFNBFd1gAUBEACqbmmFbxdJgz1lD7wrlskQA1LLuSAC4p8ny9u/D2zLR8Ynk3Yz
mzJuQ+Kfjne2t+xTDex6MPJlMYpOviSWsX2psgvdmeyUpW9ap0lrThNYkc+W5fRc
buFehfbi9LSATZGJi8RG0sCCr5FsYVz0gEk85M2+PeM24cXhQIOZtQUjswX/pdk/
KduGtZASqNAYLKROmRODzUuaokLPo24pfm9bnr1RnRtwt5ktPAA5bM9ZZaGKriej
kT2lPffbBjp8F5AZvmGLtNm2Cmg4FKBvI04SQjy2jjrQ3wBzi5Lc9HTxDuHK/rtV
u6PewUe2WPlnxlXenhMZU1UK4YoSB9E9StQ2VxQiySLHSdxR7Ma4WgYdVLn9bOie
nj3QxLuQ1ZUKF79ES6JaM4tOz1gGcQeU1+UklgjFLuKwmzWRdEIFfxMyvH6qgKnd
U+DioH5mcUwhwffAAsuIJyAdMIEUYh7IfzJJXQf+fF+XfOCl6byOJFWrIGQkAzMu
CEvaCfwtHC2Lpzo33/WRFeMAuzzd0QJ4uz4xFFvaSOSZHMLHWI9YV/+Pea3X99Ms
0Nlek/LolAJh67MynHeVBOHKrq+fluorWepQivctzN6Y1NOkx5naTPGGaKWK7G2q
TbcY5SMnkIWfLFSougj0Fvmjczq8iZRwYxWA+i+LQvsR9WEXEiQffIWRoQARAQAB
zsFNBFd1gAUBEAC8zNArPWb3dPMThL2xAY+fS60vXdB1SkOtYJpDWpFgvo0d+VQ+
hV6XulGAHAS6xG1WHysPT9KejIRSgLG+e9CaM5yhsxNa1WFGUM4Q9ESo3t+a75Go
7xHIxgFjC046/O6Vh3g9N/PREeuG8zkZ3H2v5fmD+ejyPgk4W9sFL00zjRiZD0FK
VYR/j9uenEC/2NBcLuFy3q6cDfmCoDEOO62kXMnaGz3knzEK/X1SkcjsxRDq7zaQ
lQ1Kou+3dICwy4x5SJQ8jl+eeeEvF2C2/dXmDohb57tqUwioohMUQkmCtvZgEHjy
pUwgp0MTo25gWxkvJlSJKUOb6b1786WNySIzF2gxqlkkEmBl4RAssQkeXjrSmGws
MDyHNqyJeYFusl8sPaSpo+V2n0z+2B070Uq+wmf1S5A5FpegH0PZzzoNZo8I6Qxa
Zje9YSZUijGmZIdEBleRVt3Svhi8MYlnasd4bW2RK1sr7plkBf8QRe6biiQRF3KD
OSn5CbmXpAcHJ1ZHzRRdkXZDNQC6vCJxsy13O0TrhJtAV1Yq347uyUbVi291ISVg
roUVtprsmHoEk5GoOTHbg9SCSt+xi/FiJQC+ubWmIGXoFKMR3UmhDnnzobKcbnbs
/Hd981FdVghYYvq//gTAkJk0WxfGqO30wtXRndPOA0T+qhP3TE+LtGRJ+wARAQAB
wsFlBBgBCgAPBQJXdYAFAhsMBQkHhh+AAAoJEKwQezhmktrdTyEP/0HOVWHwQsaW
jMrGj0OOMFzxGUo8SBmYYTBs29VM8wBGDsPkYCjeZzU16i9iqDpDqxpyqmTigcjH
V8CDx/6xsMBLG2yKaKZ4m3+YnOQf/sQkyCvqiyMF9mS7pDYWy+mPhPuw8TDIfiqg
VhzjSpIMFWPqxVjn6KKbPN/QASr3Pf0cuP6qpHG+NAM6Q5dYkCebyvwzLmg1sVni
l6iSyJd1jBj3D34XrgWS9buyxBB2CjIM76WxfNViJ9zAaPI78X9v6PpDGn0kg6oL
zrusrvBjoZknKQm0SZ+41fx6xvrTPs8uPEzevzJBlkke6kw9+KagY8mrVX1ZenRg
```

```
+sY/4vxJreYWQeql67ggx+wFjKDcfhZA7m7OLHODysrGVCLcmuinUBaNlHmLDcGY
XZ+kMCoXfObpuCVByQmNJgEb47EIFlx/+TEeNHKMO+22xL1atFzXfkEVZck+NghL
ZyFDhS3g1bma7puU7r752uiJjA6Iv8+kHDXi+/V7GNpuiEFUYh69QQ2//CS5H51o
sC/Bkb9evSn/Lp8dMubtWAaXDGJMgw9vqZ55N02NK0fvF/IKHnGkvH28rv0OPCvO
WTA/MClv28y0PrSvcvMXnduLtkBEX7TISMPW+n+OTa63/z4YFfEZ7sFLrEm3Q3vJ
MN3mE5i3cw+JGXPSu0nTtgqk/oZv//SS
=Z9u3
-----END PGP PUBLIC KEY BLOCK-----
```

Historial de documentos

En este tema se describen los cambios importantes en la Guía para desarrolladores de AWS SDK para Java a lo largo de su historia.

Cambio	Descripción	Fecha
the section called “Clave actual”	Agregue una nueva clave PGP que caduque el 27 de septiembre de 2026.	1 de octubre de 2025
Patrones de código no compatibles	Documente los patrones de código no compatibles de la herramienta de migración.	23 de septiembre de 2025
Herramienta de migración	Actualizaciones para el lanzamiento de GA.	19 de septiembre de 2025
Referencia de métricas	Agregue más detalles sobre las métricas recopiladas por el SDK.	3 de septiembre de 2025
the section called “Implemente bloqueo positivo con `VersionedRecordExtension`”	Agregue detalles sobre la `VersionRecordExtension` de DynamoDB Enhanced Client.	2 de septiembre de 2025
Busque aplicaciones mediante clientes 1.x	Agregue instrucciones que ayuden a identificar las aplicaciones que utilizan clientes de AWS SDK para Java 1.x consultando eventos AWS CloudTrail antes de migrar a la versión 2.	20 de agosto de 2025
Transfer Manager	Agregue tablas de migración completas para construct ores de clientes, métodos,	1 de julio de 2025

Cambio	Descripción	Fecha
	objetos del modelo y cambios de comportamiento. Incluye ejemplos detallados de código para métodos no compatibl es que requieren migración manual.	
Métricas	Agregue documentación completa para `LoggingMetricPublisher`. Se ha reestructurado el tema sobre métricas con una guía de introducción mejorada.	20 de junio de 2025
the section called “Cambios de alto nivel”	Agregue información sobre diferencias en la administración de cadenas vacías entre `DynamoDBMapper` (v1) y DynamoDB Enhanced Client (v2) en la guía de migración.	18 de junio de 2025
Reorganización del índice	Agregue un capítulo ??? compilado a partir de otras secciones de la guía.	16 de junio de 2025
???	Agregue información sobre el uso del `LegacyMd5Plugin` para garantizar la compatibi lidad con versiones anteriore s de sistemas que requieren sumas de comprobación MD5.	19 de mayo de 2025

Cambio	Descripción	Fecha
the section called “Diferencias entre clientes de S3”	Agregue las diferencias de clientes de S3 entre v1 y v2 de AWS SDK para Java y proporcione ejemplos de migración si la herramienta de migración no puede migrar automáticamente el código de v1.	24 de abril de 2025
Diferencias en la deserialización	Agregue diferencia de deserialización entre v1 y v2 del SDK para Java.	10 de abril de 2025
the section called “Procesamiento automático de solicitudes por lotes de SQS”	Agregue contenido de migración para procesamiento automático de solicitudes por lotes de SQS de v1 a v2 del SDK para Java.	8 de abril de 2025
???	Actualice la información sobre cálculos automáticos de sumas de control	3 de abril de 2025
the section called “Configuración de ALPN”	Muestre la configuración de la negociación del protocolo ALPN con el cliente HTTP basado en Netty.	21 de febrero de 2025
the section called “Funciones de Lambda”	Agregue información sobre el uso del publicador de métricas de registro de EMF con AWS Lambda para capturar métricas del SDK.	6 de febrero de 2025

Cambio	Descripción	Fecha
Implemente `ContentStreamProvider`	Agregue un tema sobre cómo implementar un `ContentStreamProvider` .	29 de enero de 2025
the section called “Protección de la integridad de los datos con sumas de comprobación”	Se ha actualizado el contenido con detalles sobre el cálculo automático de sumas de comprobación.	16 de enero de 2025
the section called “Uso de Amazon S3”	Agregue contenido de migración para trabajar con Amazon S3.	8 de enero de 2025
the section called “Acceda a los clientes HTTP basados en CRT AWS”	Agregue información sobre cómo usar un jar específico de la plataforma con component es basados en AWS CRT.	14 de noviembre de 2024
the section called “Uso IAM Roles Anywhere en autentica ción”	Agregue información sobre cómo usar IAM Roles Anywhere para autenticación.	6 de noviembre de 2024
the section called “Ejemplo de configuración de credenciales de almacenamiento en caché”	Agregue un ejemplo que configure un proveedor de credenciales mediante la propiedad `asyncCred entialUpdateEnabled` .	4 de noviembre de 2024
the section called “Uso de procesamiento automático de solicitudes por lotes”	Agregue un tema nuevo que documente la API de procesamiento automático de solicitudes por lotes para Amazon SQS.	23 de octubre de 2024
Clave OpenPGP	Actualice la información clave actual de OpenPGP.	10 de octubre de 2024

Cambio	Descripción	Fecha
the section called “Uso de tipos complejos en expresiones” y the section called “Actualización de elementos que contienen tipos complejos”	Agregue contenido sobre cómo trabajar con tipos complejos en expresiones y actualizaciones.	10 de octubre de 2024
Actualización de nombres de bucket de Amazon S3	Actualice nombres de bucket de Amazon S3.	30 de septiembre de 2024
the section called “Optimización del rendimiento con puntos de conexión basados en cuentas”	Agregue información sobre los puntos de conexión basados en cuentas de AWS para DynamoDB.	24 de septiembre de 2024
the section called “Uso de atributos que son beans, mapas, listas y conjuntos”	Actualiz la sección para DynamoDB Enhance Client en la que se explica cómo trabajar con atributos de tipos complejos.	6 de septiembre de 2024
the section called “Configurar los clientes de servicio para abreviar las búsquedas”	Aclare el uso de `EnvironmentVariableCredentialsProvider` cuando se utiliza Lambda SnapStart para Java.	19 de agosto de 2024
the section called “Configuración de la compatibilidad con la transferencia paralela”	Adición de una página con información sobre cómo habilitar compatibilidad con transferencia paralela	15 de agosto de 2024
the section called “Genere un UUID con AutoGeneratedUuidExtension”	Adición de información sobre el `AutoGeneratedUuidExtension` de DynamoDB Enhanced Client	14 de agosto de 2024

Cambio	Descripción	Fecha
???	Adición de una sección sobre la herramienta de migración (versión preliminar)	9 de agosto de 2024
the section called “Notificaciones de eventos de S3”	Adición de una sección que analice cómo trabajar con la API Notificaciones de eventos de S3	21 de julio de 2024
the section called “Uso de DynamoDB”	Adición de información de migración de v1 a v2 para las API de asignación y documentos de DynamoDB	21 de julio de 2024
the section called “Notificaciones de eventos de S3”	Adición de información de migración de v1 a v2 para la API Notificaciones de eventos de S3	21 de julio de 2024
the section called “Reintentos”	Adición de tema de estrategia de reintento	18 de junio de 2024
Cómo configurar el TTL de JVM	Elimine las instrucciones para establecer la propiedad de seguridad `networkaddress.cache.ttl` mediante una propiedad del sistema de línea de comandos de Java.	21 de mayo de 2024
the section called “Reduzca el tiempo de inicio del SDK para AWS Lambda”	Actualización de la recomendación del cliente HTTP para reducir el tiempo de inicio de AWS Lambda	14 de mayo de 2024

Cambio	Descripción	Fecha
the section called “Referencia de métricas”	Reorganización de elementos de tablas de métricas	1 de mayo de 2024
the section called “Resolución de problemas”	Agregue tema sobre solución de problemas.	26 de abril de 2024
the section called “Métricas recopiladas con cada solicitud”	Agregue nuevas métricas facilitadas por el SDK.	26 de abril de 2024
the section called “Configurar el TTL de JVM para las búsquedas de nombres DNS”	Cambie el TTL de consulta de DNS recomendado a 5 segundos.	23 de abril de 2024
the section called “Asignaciones de nombre del paquete a artifactId”	Agregue el nombre del paquete al tema de asignación de artifactId de Maven.	17 de abril de 2024
the section called “Métricas”	Agregue detalles de configuración a la sección de métricas.	12 de abril de 2024
the section called “API del creador de políticas de IAM”	Agregue información de migración de la API del creador de políticas de IAM.	11 de abril de 2024
???	Actualice la información del proxy de HTTP.	3 de abril de 2024
the section called “Con seguridad”	Agregue instrucciones para deshabilitar IMDSv1.	14 de marzo de 2024
the section called “Step-by-step instrucciones”	Agregue instrucciones de migración paso a paso.	8 de marzo de 2024
Migrar a la versión 2	Actualice el tema de migración .	14 de febrero de 2024

Cambio	Descripción	Fecha
the section called “Configurar clientes AWS HTTP basados en CRT”	Añadir información sobre el cliente HTTP síncrono AWS basado en CRT.	5 de enero de 2024
the section called “Amazon Cognito Identity” y the section called “Amazon Cognito Identity Provider”	Los ejemplos de Amazon Cognito se han trasladado a la sección de ejemplos de código.	28 de diciembre de 2023
Clave OpenPGP	Proporcionar la clave OpenPGP actual.	6 de diciembre de 2023
the section called “Diferencias de serialización”	Describir las diferencias de serialización entre las versiones 1 y 2 del SDK para Java.	5 de diciembre de 2023
the section called “Transfer Manager”	Añadida una sección que detalla los cambios en el S3 Transfer Manager de la versión 1 a la versión 2.	13 de noviembre de 2023
the section called “Referencia de anotaciones”	Añadida una lista de anotacion es de clases de datos que se puedan utilizar con el cliente mejorado de DynamoDB.	30 de octubre de 2023
???	Añadida información sobre el estado de migración de las bibliotecas y utilidades del SDK para Java v1.x a la v2.x	17 de octubre de 2023
???	Actualizado el tema de configuración de Gradle	17 de octubre de 2023

Cambio	Descripción	Fecha
the section called “Ignorar atributos nulos de los objetos anidados”	Añadida información sobre la anotación `@DynamoDb IgnoreNulls` del cliente mejorado DynamoDB	22 de septiembre de 2023
the section called “Acceso entre regiones”	Añadida información acerca del acceso entre regiones a los buckets de Amazon S3.	31 de agosto de 2023
the section called “Conserva los objetos vacíos”	Añadida una sección que analiza la anotación `@DynamoDbPreserveEmptyObject` .	25 de agosto de 2023
???	Actualizada la sección de clientes del servicio.	15 de agosto de 2023
the section called “Recomendaciones sobre clientes”	Desde la versión 0.23, AWS CRT es compatible con sistemas operativos basados en MUSL, como Alpine Linux. Las recomendaciones de los clientes HTTP ahora reflejan la compatibilidad con musl.	11 de agosto de 2023
the section called “Crear políticas de IAM”	Añadida la sección API del creador de políticas de IAM	31 de julio de 2023
the section called “Introducción”	Corregidos varios fragmentos de la sección Introducción del tema Cliente mejorado de DynamoDB	24 de julio de 2023

Cambio	Descripción	Fecha
the section called “Configuración de proxies de HTTP”	Añadidos información y ejemplos de compatibilidad con el proxy HTTP para cada cliente HTTP.	2 de junio de 2023
Reorganizada la tabla de contenido	Promocionada la sección Ejemplos de código y Llamada a Servicios de AWS a entradas del índice nivel superior.	24 de mayo de 2023
the section called “Añadir dependencia de registro”	Muestra las dependencias de Gradle en la sección de registro.	23 de mayo de 2023
the section called “Paginación”	Actualizado el tema de paginación.	18 de mayo de 2023
the section called “Configurar un proyecto Gradle”	Actualizada la configuración del proyecto de Gradle.	3 de mayo de 2023
API de cliente mejorado de DynamoDB	Publicado el tema reescrito sobre la API de cliente mejorado de DynamoDB.	28 de abril de 2023
Actualizadas las instrucciones del tutorial de introducción	Modificado el arquetipo de Maven para incluir la opción CredentialsProvider; las instrucciones se modificaron en consecuencia.	11 de abril de 2023
the section called “Recomendaciones sobre clientes”	Añadida una guía para la toma de decisiones para clientes HTTP	30 de marzo de 2023

Cambio	Descripción	Fecha
Actualizaciones de las prácticas recomendadas de IAM	Se ha actualizado la guía para implementar las prácticas recomendadas de IAM. Para obtener más información, consulta prácticas recomendadas de seguridad en IAM.	14 de marzo de 2023
the section called “Volver a cargar credenciales del perfil”	Añadida una sección sobre la recarga de las credenciales del perfil.	9 de febrero de 2023
the section called “Configurar clientes AWS HTTP basados en CRT”	Tema actualizado para el lanzamiento de GA.	8 de febrero de 2023
the section called “Trabajar con metadatos de la instancia de Amazon EC2”	Añadido un ejemplo guiado para el cliente Java SDK para el servicio de metadatos de instancias Amazon S3.	1 de febrero de 2023
the section called “Utilizar un cliente S3 de alto rendimiento”	Añadida una sección para el Cliente S3 basado en AWS CRT.	19 de diciembre de 2022
the section called “Transferir archivos y directorios”	Actualizados los ejemplos del Amazon S3 Transfer Manager para la versión de GA.	19 de diciembre de 2022
the section called “Prácticas recomendadas”	Añadida la sección de prácticas recomendadas.	18 de noviembre de 2022
the section called “Uso de un proceso externo”	Añadida una sección sobre la carga de credenciales de un proceso externo.	15 de noviembre de 2022

Cambio	Descripción	Fecha
the section called “Referencia de métricas”	Actualizado el listado de métricas con el requisito de uso de clientes HTTP.	9 de noviembre de 2022
the section called “Transferir archivos y directorios”	Código de ejemplo corregido.	2 de noviembre de 2022
the section called “Reduzca el tiempo de inicio del SDK para AWS Lambda”	Sección actualizada con opciones adicionales para reducir el tiempo de arranque de Lambda.	1 de noviembre de 2022
the section called “Configuración de clientes de HTTP”	Añadida información de configuración para cubrir todos los clientes HTTP del SDK.	26 de octubre de 2022
the section called “Registro”	Tema de registro actualizado para incluir detalles de registro de red para todos los clientes HTTP.	4 de octubre de 2022
the section called “Servicios de bases de datos de AWS”	Añadida una sección de descripción de los servicios de bases de datos AWS y SDK para Java 2.x.	13 de septiembre de 2022
Se retira EC2-Classic Networking	EC2-Classic se retirará el 15 de agosto de 2022.	28 de julio de 2022
the section called “Opciones de autenticación adicionales”	Actualización de la dependencia necesaria para la autenticación de inicio de sesión único.	18 de julio de 2022
the section called “seguridad de la capa de transporte (TLS)”	Información de seguridad TLS actualizada.	8 de abril de 2022

Cambio	Descripción	Fecha
the section called “Opciones de autenticación adicionales”	Se ha añadido más información sobre la configuración y el uso de credenciales.	22 de febrero de 2021
the section called “Configurar un proyecto de imagen nativa de GraalVM”	Nuevo tema para configurar un proyecto de GraalVM Native Image.	18 de febrero de 2021
the section called “Esperadores”	Lanzamiento de esperadores; se ha añadido un tema para la nueva característica.	30 de septiembre de 2020
the section called “Métricas”	Métricas publicadas; tema añadido para la nueva característica.	17 de agosto de 2020
the section called “Amazon SNS”	Se han añadido temas de ejemplo para Amazon SNS.	30 de mayo de 2020
the section called “Reduzca el tiempo de inicio del SDK para AWS Lambda”	Añadido el tema del rendimiento de la función AWS Lambda.	29 mayo de 2020
the section called “Configurar el TTL de JVM para las búsquedas de nombres DNS”	Añadido el tema JVM TTL DNS caching.	27 de abril de 2020
the section called “Configurar un proyecto Apache Maven”, the section called “Configurar un proyecto Gradle”	Nuevos temas de configuración de Maven y Gradle.	21 de abril de 2020
the section called “seguridad de la capa de transporte (TLS)”	Se ha agregado TLS 1.2 a la sección de seguridad.	19 de marzo de 2020

Cambio	Descripción	Fecha
the section called “Suscripción a Amazon Kinesis Data Streams”	Añadidos ejemplos de flujos de Kinesis.	2 de agosto de 2018
the section called “Paginación”	Se ha añadido un tema sobre la paginación automática.	5 de abril de 2018
???	Añadidos temas de ejemplo para IAM, Amazon EC2, CloudWatch y DynamoDB.	29 de diciembre de 2017
the section called “Amazon S3”	Añadido el ejemplo getobjects para Amazon S3.	7 de agosto de 2017
the section called “Programación asíncrona”	Se ha añadido el tema sobre métodos asíncronos.	4 de agosto de 2017
Publicación GA del AWS SDK para Java 2.x	Lanzamiento de la versión 2 (v2) del AWS SDK para Java.	28 de junio de 2017

Las traducciones son generadas a través de traducción automática. En caso de conflicto entre la traducción y la version original de inglés, prevalecerá la version en inglés.